

MEASUREMENT REPORT

FCC PART 15.249

FCC ID: SVYSB-HW10

Application: Intex Development Company Limited

Application Type: Certification

Product: PureSpa

Model No.: SB-HW10

Brand Name: INTEX

FCC Classification: Part 15 Low Power Communication Device Transmitter (DXX)

FCC Rule Part(s): FCC Part 15C (Section 15.249)

Test Procedure(s): ANSI C63.10 - 2013


Test Date: April 25 ~ June 28 , 2019

Reviewed By:



(Kevin Guo)

Approved By:



(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1903WSU013-U1	Rev. 01	Initial Report	08-01-2019	Valid

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Operation Frequency and Channel List.....	7
2.4. Test Configuration	8
2.5. EMI Suppression Device(s)/Modifications.....	8
2.6. Labeling Requirements.....	8
3. DESCRIPTION OF TEST	9
3.1. Evaluation Procedure	9
3.2. AC Line Conducted Emissions	9
3.3. Radiated Emissions	10
4. ANTENNA REQUIREMENTS.....	11
5. TEST EQUIPMENT CALIBRATION DATE	12
6. MEASUREMENT UNCERTAINTY.....	14
7. TEST RESULT	15
7.1. Summary	15
7.2. Conducted Emission.....	16
7.2.1. Test Limit	16
7.2.2. Test Setup.....	16
7.2.3. Test Result.....	17
7.3. Radiated Emission.....	19
7.3.1. Test Limit	19
7.3.2. Test Setup.....	20
7.3.3. Test Result.....	21
7.4. Radiated Restricted Band Edge Measurement	26
7.4.1. Test Limit	26
7.4.2. Test Setup.....	27
7.4.3. Test Result.....	28
7.5. 20dB Spectrum Bandwidth Measurement.....	32

7.5.1.	Test Limit	32
7.5.2.	Test Procedure used.....	32
7.5.3.	Test Setting.....	32
7.5.4.	Test Setup.....	32
7.5.5.	Test Result.....	33
7.6.	99% Bandwidth Measurement	34
7.6.1.	Test Limit	34
7.6.2.	Test Procedure used.....	34
7.6.3.	Test Setting.....	34
7.6.4.	Test Setup.....	34
7.6.5.	Test Result.....	35
8.	CONCLUSION.....	36
Appendix A - Test Setup Photograph		37
Appendix B - EUT Photograph.....		38

§2.1033 General Information

Applicant:	Intex Development Company Limited			
Applicant Address:	9th Floor, Dah Sing financial Centre 108 Gloucester Road, Wanchai, Hong Kong			
Manufacturer:	Intex Development Company Limited			
Manufacturer Address:	9th Floor, Dah Sing financial Centre 108 Gloucester Road, Wanchai, Hong Kong			
Test Site:	MRT Technology (Suzhou) Co., Ltd			
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China			
Test Device Serial No.:	N/A	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	PureSpa
Model No.:	SB-HW10
Brand Name:	INTEX
Wireless Specification:	2408 ~ 2476MHz
Wireless Power Transfer:	110 ~ 205KHz
Working Voltage:	AC 120V/60Hz for PureSpa DC 5V(Battery) for Controller

2.2. Product Specification Subjective to this Report

Frequency Range:	2408 ~ 2476 MHz
Channel Number:	69
Channel Spacing:	1MHz
Type of Modulation:	GFSK
Antenna Type:	PCB Antenna
Antenna Gain:	2.5dBi

Note: For other features of this EUT, test report will be issued separately.

2.3. Operation Frequency and Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
Low	2408MHz	Mid	2442MHz	High	2476MHz

Note: The engineer test sample was provided by the manufacturer, it was configured into fixed frequency Tx status after power on.

2.4. Test Configuration

The EUT was tested as described in this report is in compliance with the requirements limits of FCC Rules Part 15.207, 15.209, 15.215 and 15.249. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.5. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.6. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the requirements provided in FCC 15.207, 15.209, 15.215 and 15.249 were performed in the report of the EUT.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150 kHz to 30 MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9 kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

This unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test PureSpa	R&S	ESR3	MRTSUE06185	1 year	2020/04/15
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2020/06/14
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2020/06/14
Thermohygrometer	Testo	608-H1	MRTSUE06404	1 year	2019/08/14
Shielding Chamber	MIX-BEP	Chamber-SR2	MRTSUE06214	N/A	N/A

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test PureSpa	R&S	ESR7	MRTSUE06001	1 year	2019/08/13
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2019/09/25
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2019/11/09
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2020/03/31
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2019/10/19
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2019/12/17
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2019/11/16
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/12
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2019/08/14
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06213	1 year	2020/04/30

Radiated Emission - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2019/08/13
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2019/11/09
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2019/10/19
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2019/11/09
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2019/12/17
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2019/11/16
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/12
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2019/12/13
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2020/04/30

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2020/04/15
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2019/07/19
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2020/04/15
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2019/11/16
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2019/07/19
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2019/07/05
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2020/06/14
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2019/08/14
Modulation Analyzer	HP	8901A	MRTSUE06098	1 year	2019/10/18
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2019/11/16
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2019/11/16
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2019/08/14

Software	Version	Function
e3	V8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): Horizontal: 30MHz~300MHz: 4.07dB 300MHz~1GHz: 3.63dB 1GHz~18GHz: 4.16dB Vertical: 30MHz~300MHz: 4.18dB 300MHz~1GHz: 3.60dB 1GHz~18GHz: 4.76dB
Radiated Emission Measurement – AC2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): Horizontal: 30MHz~300MHz: 3.75dB 300MHz~1GHz: 3.53dB 1GHz~18GHz: 4.28dB Vertical: 30MHz~300MHz: 3.86dB 300MHz~1GHz: 3.53dB 1GHz~18GHz: 4.33dB

7. TEST RESULT

7.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.2
15.209 15.249	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 & clause 8.10	Radiated	Pass	Section 7.3 & 7.4
15.215(c)	20dB Spectrum Bandwidth	20 dB bandwidth of the emission in the specific band	Conducted	Pass	Section 7.5
15.215(c)	99% Occupied Bandwidth	N/A	Conducted	Pass	Section 7.6

Notes:

1. All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.


7.2. Conducted Emission

7.2.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50


Note 1: The lower limit shall apply at the transition frequencies.
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.2.2. Test Setup

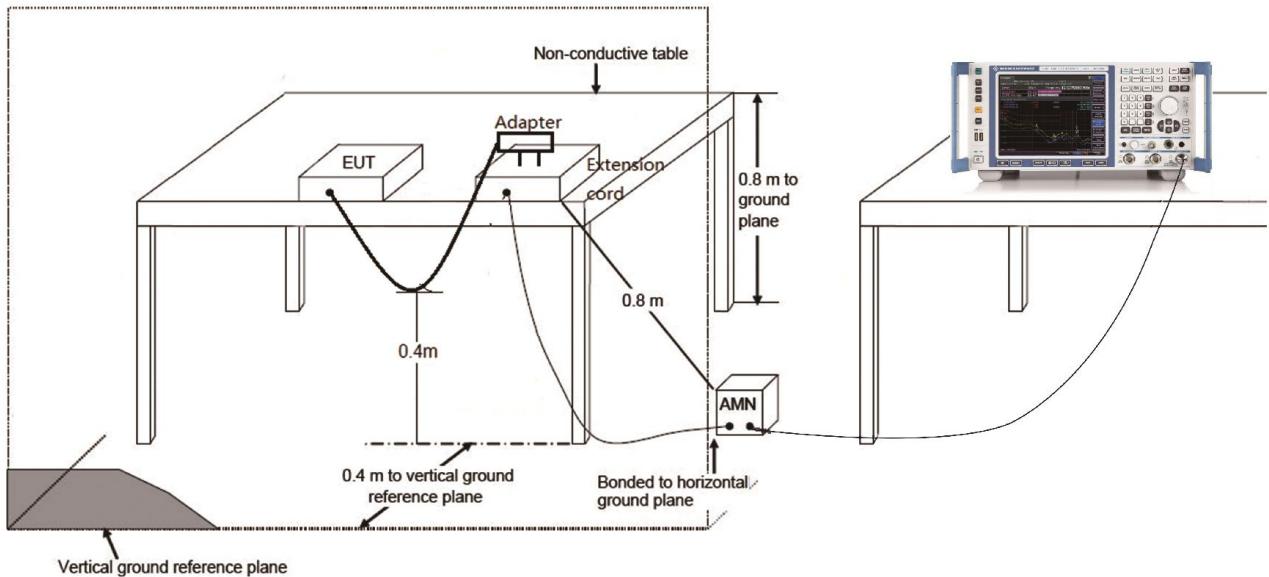

7.2.3. Test Result

Site: SR2	Time: 2019/06/28 - 10:12
Limit: FCC_Part15.207_CE_AC Power	Engineer: Liz Yuan
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: PureSpa	Power: AC 120V/60Hz
Test Mode 1	

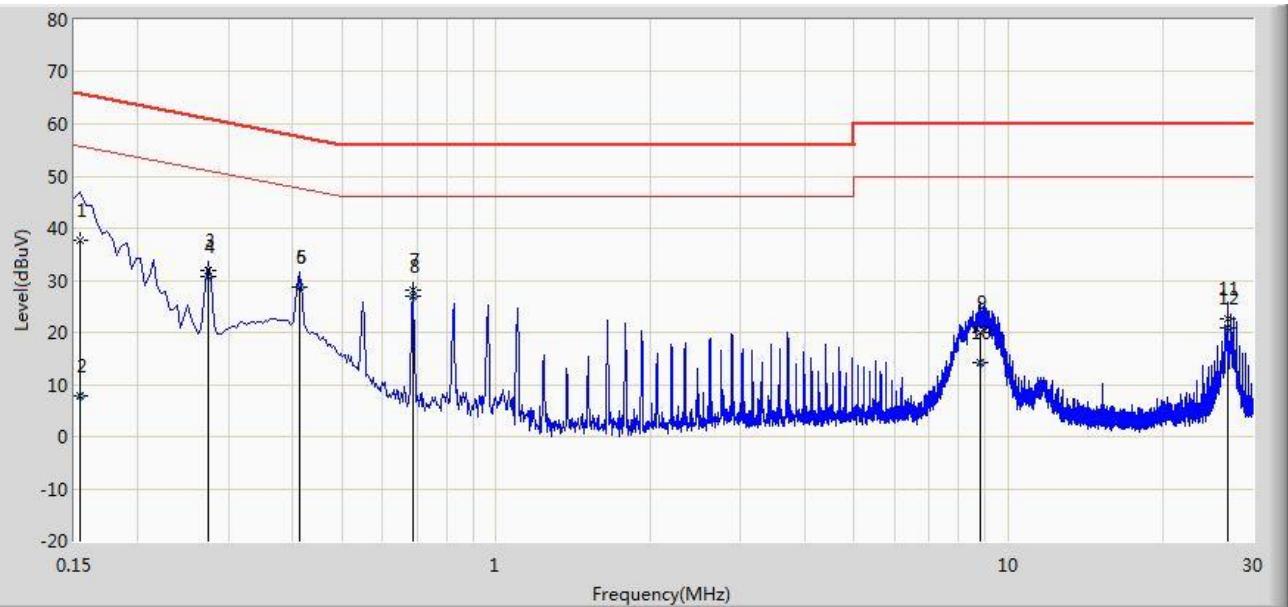


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.154	37.540	26.800	-28.242	65.781	10.740	QP
2			0.154	7.940	-2.800	-47.842	55.781	10.740	AV
3			0.274	31.857	21.874	-29.139	60.996	9.983	QP
4			0.274	30.856	20.873	-20.140	50.996	9.983	AV
5			0.414	28.632	18.535	-28.936	57.568	10.097	QP
6	*		0.414	28.598	18.501	-18.970	47.568	10.097	AV
7			0.686	28.188	18.117	-27.812	56.000	10.070	QP
8			0.686	26.898	16.828	-19.102	46.000	10.070	AV
9			8.798	20.043	9.880	-39.957	60.000	10.163	QP
10			8.798	14.319	4.156	-35.681	50.000	10.163	AV
11			26.786	22.711	12.472	-37.289	60.000	10.239	QP
12			26.786	20.756	10.517	-29.244	50.000	10.239	AV

Note: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2019/06/28 - 10:18
Limit: FCC_Part15.207_CE_AC Power	Engineer: Liz Yuan
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: PureSpa	Power: AC 120V/60Hz
Test Mode 1	

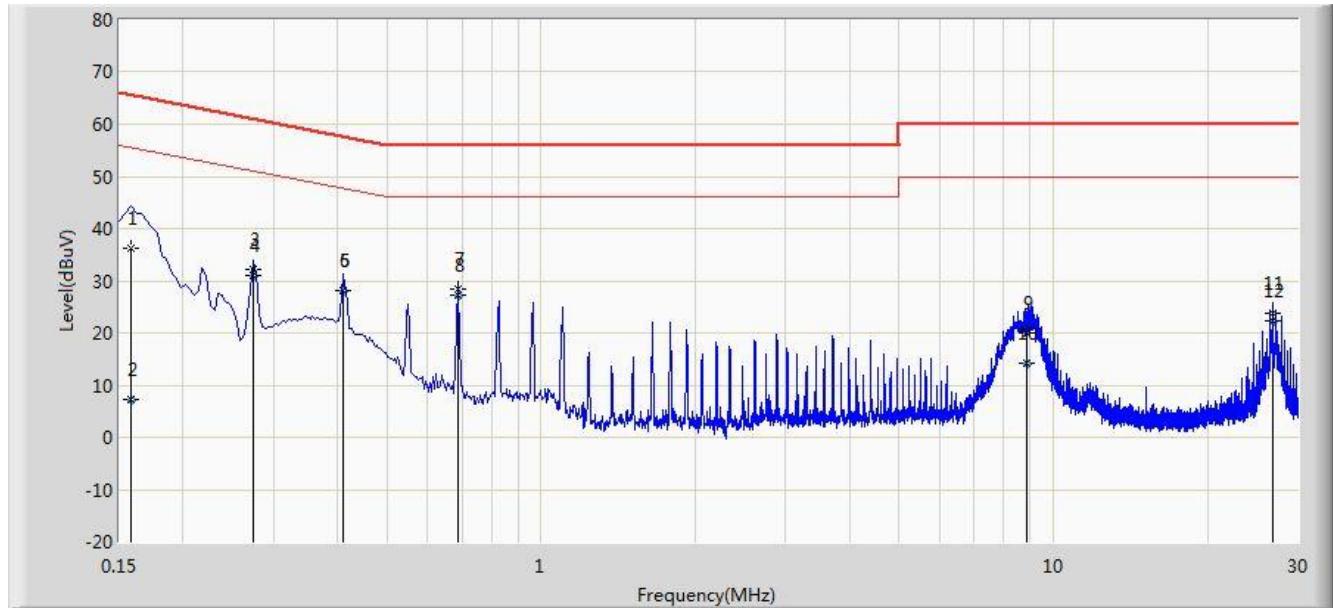

No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V)	Reading Level (dB μ V)	Over Limit (dB)	Limit (dB μ V)	Factor (dB)	Type
1			0.158	36.190	25.900	-29.379	65.568	10.290	QP
2			0.158	7.290	-3.000	-48.279	55.568	10.290	AV
3			0.274	32.134	22.116	-28.861	60.996	10.019	QP
4			0.274	31.142	21.123	-19.854	50.996	10.019	AV
5			0.410	28.174	18.054	-29.475	57.648	10.119	QP
6			0.410	28.088	17.968	-19.560	47.648	10.119	AV
7			0.686	28.463	18.380	-27.537	56.000	10.083	QP
8	*		0.686	27.155	17.072	-18.845	46.000	10.083	AV
9			8.895	20.041	9.870	-39.959	60.000	10.171	QP
10			8.895	14.277	4.106	-35.723	50.000	10.171	AV
11			26.790	23.907	13.549	-36.093	60.000	10.358	QP
12			26.790	22.294	11.936	-27.706	50.000	10.358	AV

Note: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

7.3. Radiated Emission

7.3.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.249		
Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (uV/m)
902 ~ 908	50	500
2400 ~ 2483.5	50	500
5725 ~ 5875	50	500
24000 ~ 24250	250	2500


Note: FCC Part 15.249 (d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100**	3
88 ~ 216	150**	3
216 ~ 960	200**	3
Above 960	500	3


Note 1: The lower limit shall apply at the transition frequency.
Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m).

7.3.2. Test Setup

Below 1GHz Test Setup:

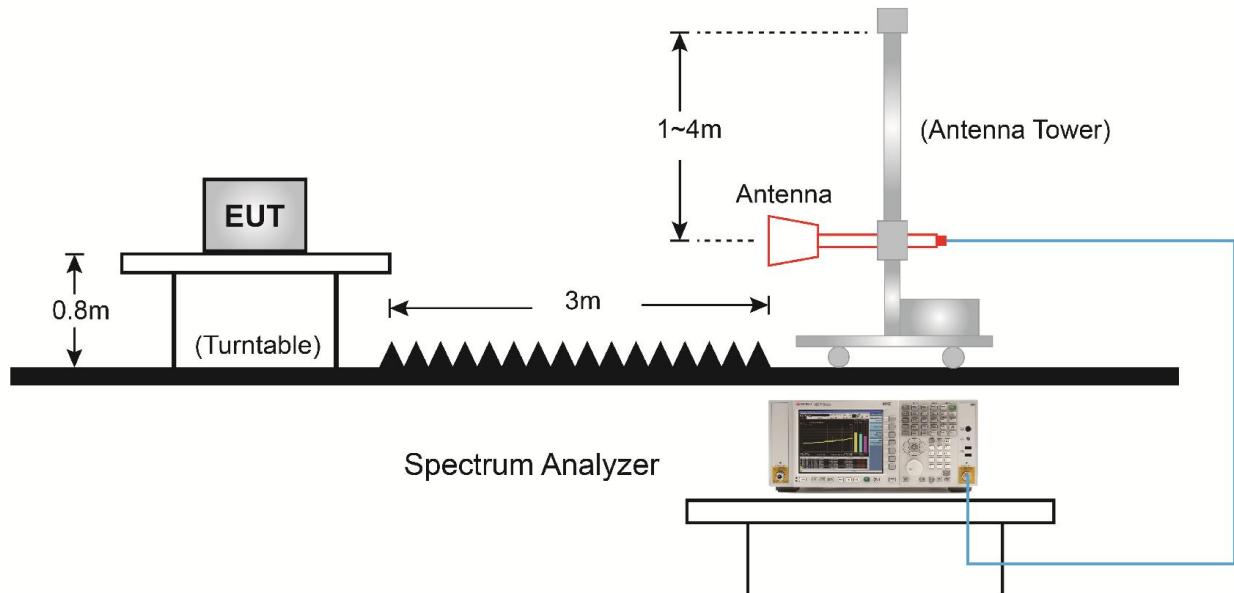

Above 1GHz Test Setup:

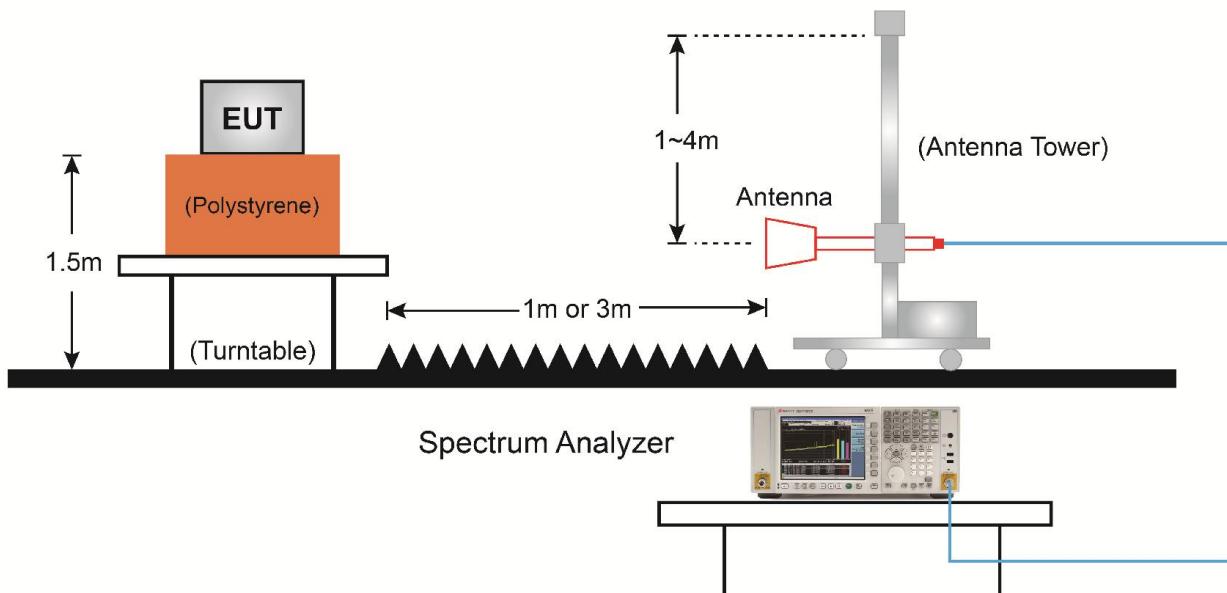

7.3.3. Test Result


Product	PureSpa	Temperature	24°C
Test Engineer	Messiah Li	Relative Humidity	56%
Test Site	AC1	Test Date	2019/04/25

Time On (ms)	One Period (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)
0.76	100	0.76	-42.4

Note 1: Duty Cycle Factor = $20 \times \log_{10}(\text{Duty Cycle})$

Note 2: Time On(ms) = $(0.120 + 0.070) \times 4 = 0.76 \text{ ms}$

Note 3: According to ANSI C63.10, the period of the pulse train should be 100 ms if the pulse train length is greater than 100 ms

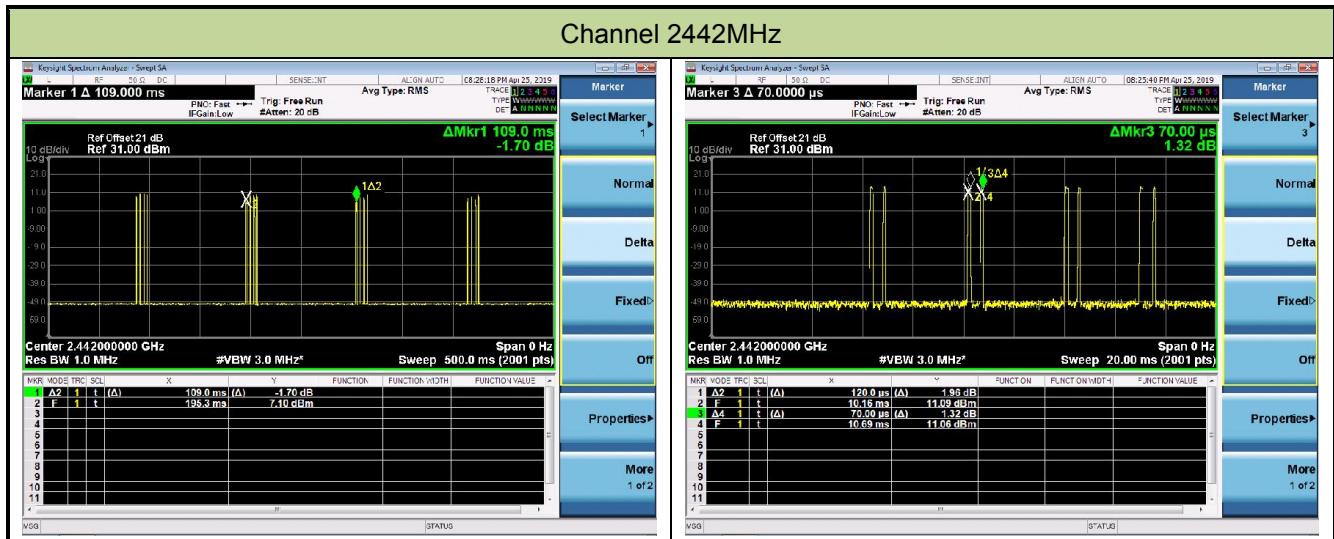

Product	PureSpa			Temperature	24°C		
Test Engineer	Messiah Li			Relative Humidity	56%		
Test Site	AC1			Test Date	2019/05/09		
Remark	Fundamental Radiated Emission						

Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
2408	68.2	32.4	N/A	100.6	114	-13.4	PK	Horizontal
	68.2	32.4	-42.4	58.2	94	-35.8	AV	Horizontal
	61.1	32.4	N/A	93.5	114	-20.5	PK	Vertical
	61.1	32.4	-42.4	51.1	94	-42.9	AV	Vertical
2442	67.3	32.3	N/A	99.6	114	-14.4	PK	Horizontal
	67.3	32.3	-42.4	57.2	94	-36.8	AV	Horizontal
	61.7	32.3	N/A	94.0	114	-20.0	PK	Vertical
	61.7	32.3	-42.4	51.6	94	-42.4	AV	Vertical
2476	67	32.4	N/A	99.4	114	-14.6	PK	Horizontal
	67	32.4	-42.4	57.0	94	-37.0	AV	Horizontal
	60.1	32.4	N/A	92.5	114	-21.5	PK	Vertical
	60.1	32.4	-42.4	50.1	94	-43.9	AV	Vertical

Note 1: Peak Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: All readings below 1GHz are peak, above 1GHz are performed with peak and/or average measurements as necessary.

Product	PureSpa			Temperature	24°C
Test Engineer	Messiah Li			Relative Humidity	56%
Test Site	AC1			Test Date	2019/05/09
Remark:	Radiated Emission - 2408MHz				

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	4816.5	45.6	4.6	N/A	50.2	74.0 (Note 3)	-23.8	PK	Horizontal
	5114.0	36.5	5.6	N/A	42.1	74.0 (Note 3)	-31.9	PK	Horizontal
	6720.5	37.6	8.5	N/A	46.1	74.0 (Note 3)	-27.9	PK	Horizontal
*	7222.0	44.7	10.6	N/A	55.3	74.0	-18.7	PK	Horizontal
*	7222.0	44.7	10.6	-42.4	12.9	54.0	-41.1	AV	Horizontal
*	4816.5	46.3	4.6	N/A	50.9	74.0 (Note 3)	-23.1	PK	Vertical
	5139.5	37.6	5.6	N/A	43.2	74.0 (Note 3)	-30.8	PK	Vertical
*	7222.0	47.1	10.6	N/A	57.7	74.0 (Note 3)	-16.3	PK	Vertical
	9627.5	37.7	14.2	N/A	51.9	74.0 (Note 3)	-22.1	PK	Vertical

Note 1: “*” is frequency of harmonic.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Note 3: Average measurement was not performed when the peak level lower than average limit.

Note 4: The test trace is same as the ambient noise (the test frequency range: 9 kHz ~ 30 MHz and 18 GHz ~ 25 GHz), therefore no data appear in the report.

Product	PureSpa			Temperature	24°C
Test Engineer	Messiah Li			Relative Humidity	56%
Test Site	AC1			Test Date	2019/05/09
Remark:	Radiated Emission - 2442MHz				

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	4884.5	45.7	4.7	N/A	50.4	74.0 (Note 3)	-23.6	PK	Horizontal
*	7324.0	45.5	10.5	N/A	56.0	74.0	-18.0	PK	Horizontal
*	7324.0	45.5	10.5	-42.4	13.6	54.0	-40.4	AV	Horizontal
	7842.5	36.2	10.9	N/A	47.1	74.0 (Note 3)	-26.9	PK	Horizontal
	8888.0	35.9	12.0	N/A	47.9	74.0 (Note 3)	-26.1	PK	Horizontal
*	4884.5	47.2	4.7	N/A	51.9	74.0 (Note 3)	-22.1	PK	Vertical
	7621.5	36.6	10.6	N/A	47.2	74.0 (Note 3)	-26.8	PK	Vertical
	7953.0	36.1	11.3	N/A	47.4	74.0 (Note 3)	-26.6	PK	Vertical
	9772.0	37.9	14.5	N/A	52.4	74.0 (Note 3)	-21.6	PK	Vertical

Note 1: “*” is frequency of harmonic.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Note 3: Average measurement was not performed when the peak level lower than average limit.

Note 4: The test trace is same as the ambient noise (the test frequency range: 9 kHz ~ 30 MHz and 18 GHz ~ 25 GHz), therefore no data appear in the report.

Product	PureSpa			Temperature	24°C
Test Engineer	Messiah Li			Relative Humidity	56%
Test Site	AC1			Test Date	2019/05/09
Remark:	Radiated Emission - 2476MHz				

Mark	Frequency (MHz)	Reading Level (dB μ V)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Polarization
*	4952.5	50.8	4.9	N/A	55.7	74.0	-18.3	PK	Horizontal
*	4952.5	50.8	4.9	-42.4	13.3	54.0	-40.7	AV	Horizontal
*	7426.0	48.3	10.7	N/A	59.0	74.0	-15.0	PK	Horizontal
*	7426.0	48.3	10.7	-42.4	16.6	54.0	-37.4	AV	Horizontal
	7842.5	34.7	10.9	N/A	45.6	74.0 (Note 3)	-28.4	PK	Horizontal
	8743.5	35.8	12.0	N/A	47.8	74.0 (Note 3)	-26.2	PK	Horizontal
	4952.5	41.8	4.9	N/A	46.7	74.0 (Note 3)	-27.3	PK	Vertical
*	7426.0	45.7	10.7	N/A	56.4	74.0	-17.6	PK	Vertical
*	7426.0	45.7	10.7	-42.4	14.0	54.0	-40.0	AV	Vertical
	7936.0	36.9	11.4	N/A	48.3	74.0 (Note 3)	-25.7	PK	Vertical
	8794.5	36.9	12.0	N/A	48.9	74.0 (Note 3)	-25.1	PK	Vertical

Note 1: “*” is frequency of harmonic.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) – Pre Amplifier Gain (dB)

Note 3: Average measurement was not performed when the peak level lower than average limit.

Note 4: The test trace is same as the ambient noise (the test frequency range: 9 kHz ~ 30 MHz and 18 GHz ~ 25 GHz), therefore no data appear in the report.

7.4. Radiated Restricted Band Edge Measurement

7.4.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).


Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meter]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


7.4.2. Test Setup

1GHz ~ 18GHz Test Setup:

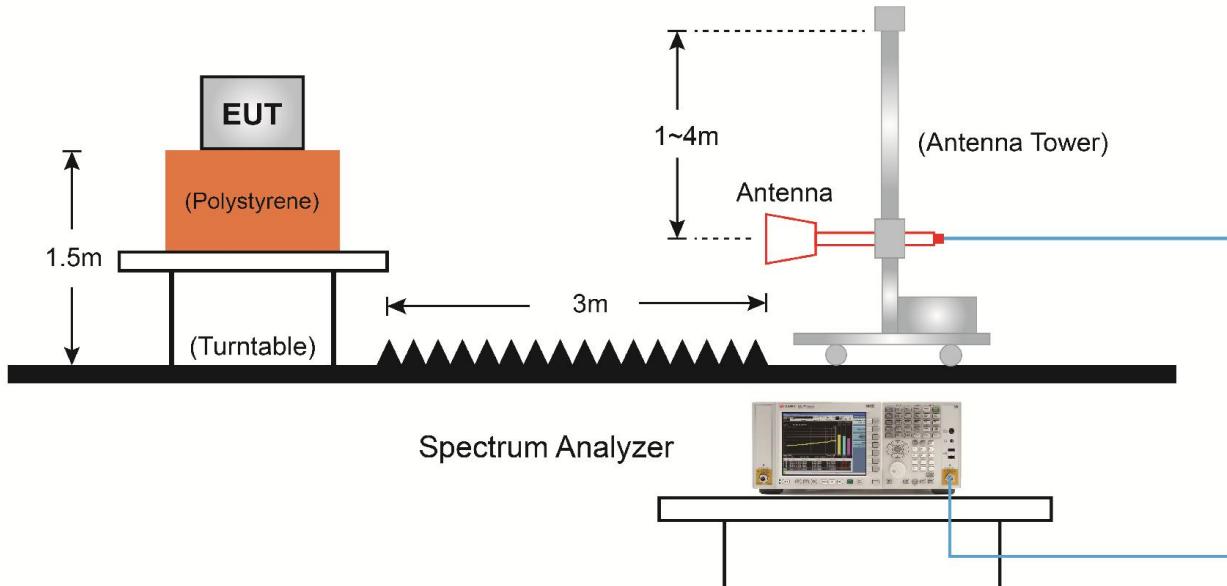

7.4.3. Test Result

Site: AC1	Time: 2019/05/09 - 21:26
Limit: FCC_Part15_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: PureSpa	Power: DC 5V
Test Mode: Transmit at Channel 2408MHz	

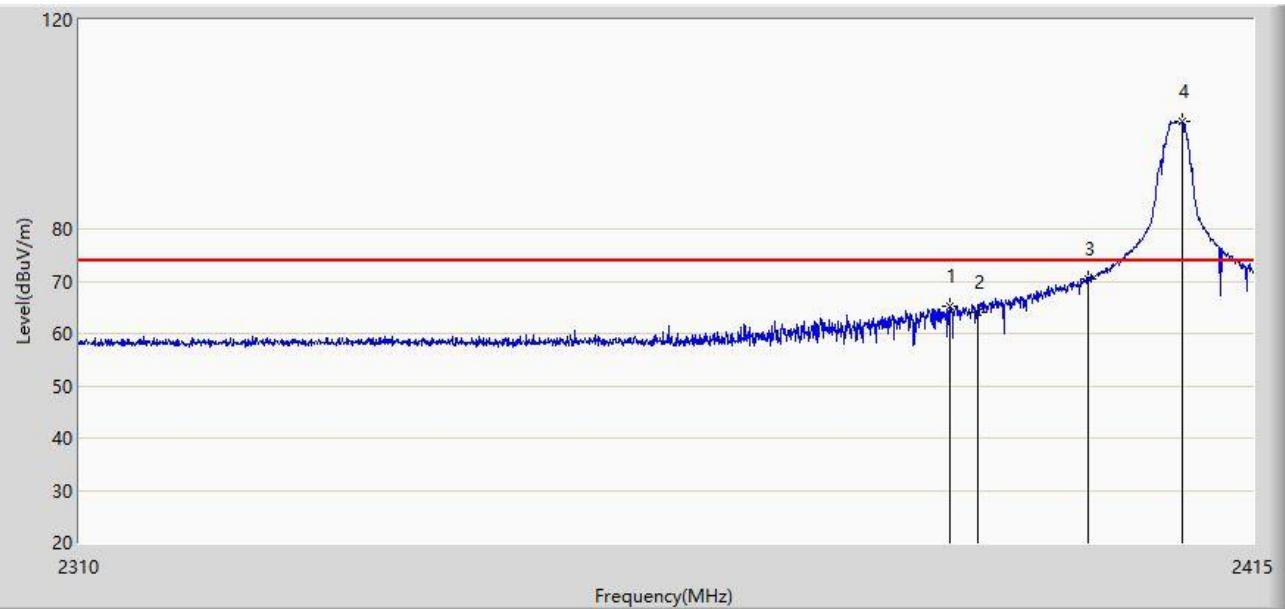


No	Flag	Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
1			2387.490	32.833	32.417	N/A	65.250	74.000	-8.750	PK
			2387.490	32.833	32.417	-42.400	22.850	54.000	-31.150	AV
2			2390.000	31.694	32.413	N/A	64.107	74.000	-9.893	PK
			2390.000	31.694	32.413	-42.400	21.707	54.000	-32.293	AV
3			2400.000	37.922	32.399	N/A	70.320	74.000	-3.680	PK
			2400.000	37.922	32.399	-42.400	27.920	54.000	-26.080	AV
4			2408.595	68.178	32.388	N/A	100.566	114.000	-13.434	PK
			2408.595	68.178	32.388	-42.400	58.166	94.000	-35.834	AV

Note: Peak Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/05/09 - 21:35
Limit: FCC_Part15_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: PureSpa	Power: DC 5V
Test Mode: Transmit at Channel 2408MHz	

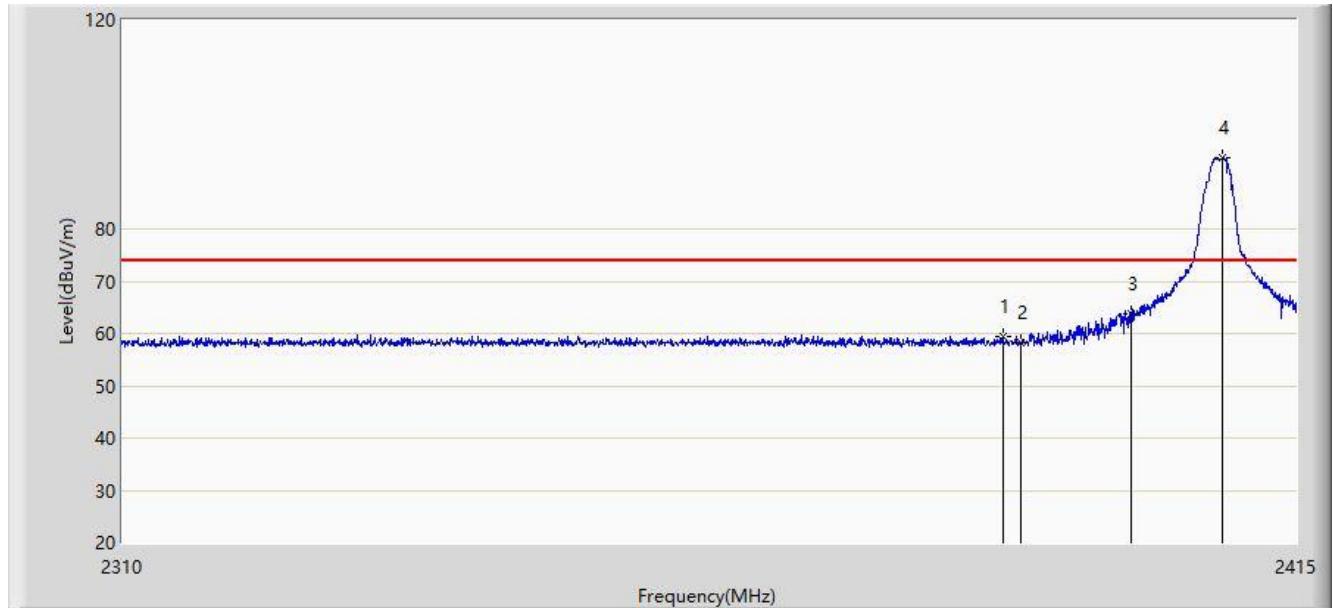


No	Flag	Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
1			2388.330	27.062	32.416	N/A	59.478	74.000	-14.522	PK
			2388.330	27.062	32.416	-42.400	17.078	54.000	-36.922	AV
2			2390.000	25.836	32.413	N/A	58.249	74.000	-15.751	PK
			2390.000	25.836	32.413	-42.400	15.849	54.000	-38.151	AV
3			2400.000	31.311	32.399	N/A	63.709	74.000	-10.291	PK
			2400.000	31.311	32.399	-42.400	21.309	54.000	-32.691	AV
4			2408.280	61.096	32.388	N/A	93.484	114.000	-20.516	PK
			2408.280	61.096	32.388	-42.400	51.084	94.000	-42.916	AV

Note: Peak Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/05/09 - 22:02
Limit: FCC_Part15_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: PureSpa	Power: DC 5V
Test Mode: Transmit at Channel 2476MHz	

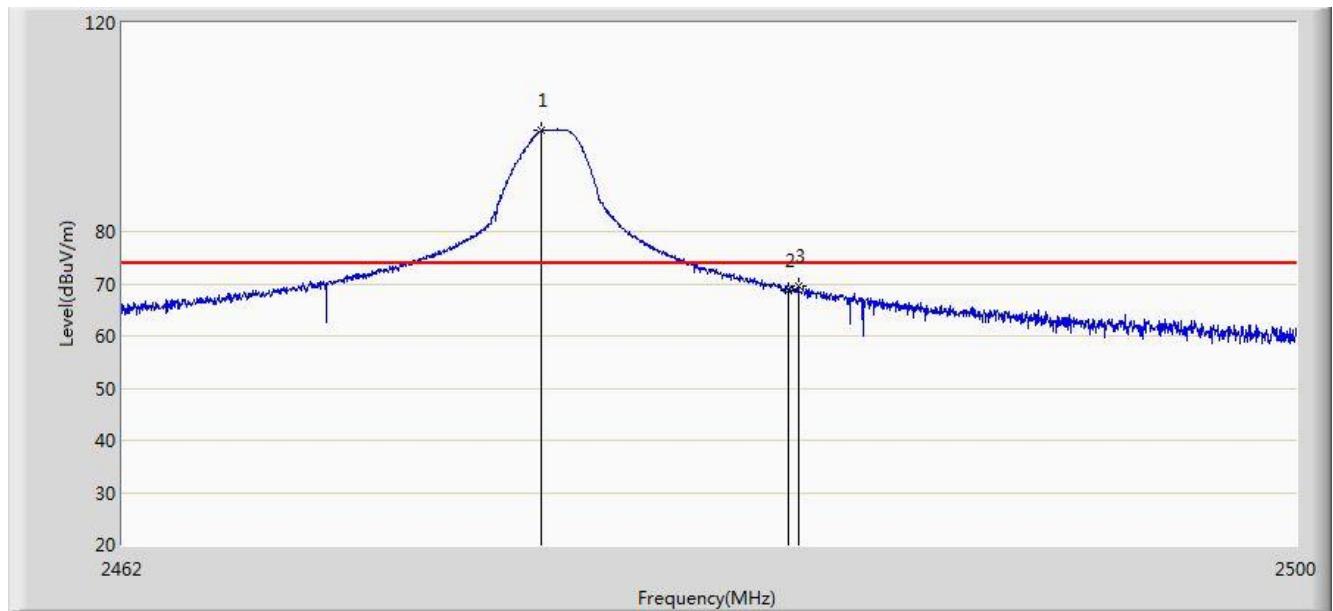


No	Flag	Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
1			2475.509	66.950	32.398	N/A	99.348	114.000	-14.652	PK
			2475.509	66.950	32.398	-42.400	56.948	94.000	-37.052	AV
2			2483.500	36.349	32.416	N/A	68.765	74.000	-5.235	PK
			2483.500	36.349	32.416	-42.400	26.365	54.000	-27.635	AV
3			2483.812	37.233	32.416	N/A	69.649	74.000	-4.351	PK
			2483.812	37.233	32.416	-42.400	27.249	54.000	-26.751	AV

Note: Peak Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/05/09 - 22:12
Limit: FCC_Part15_RE(3m)	Engineer: Messiah Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: PureSpa	Power: DC 5V
Test Mode: Transmit at Channel 2476MHz	

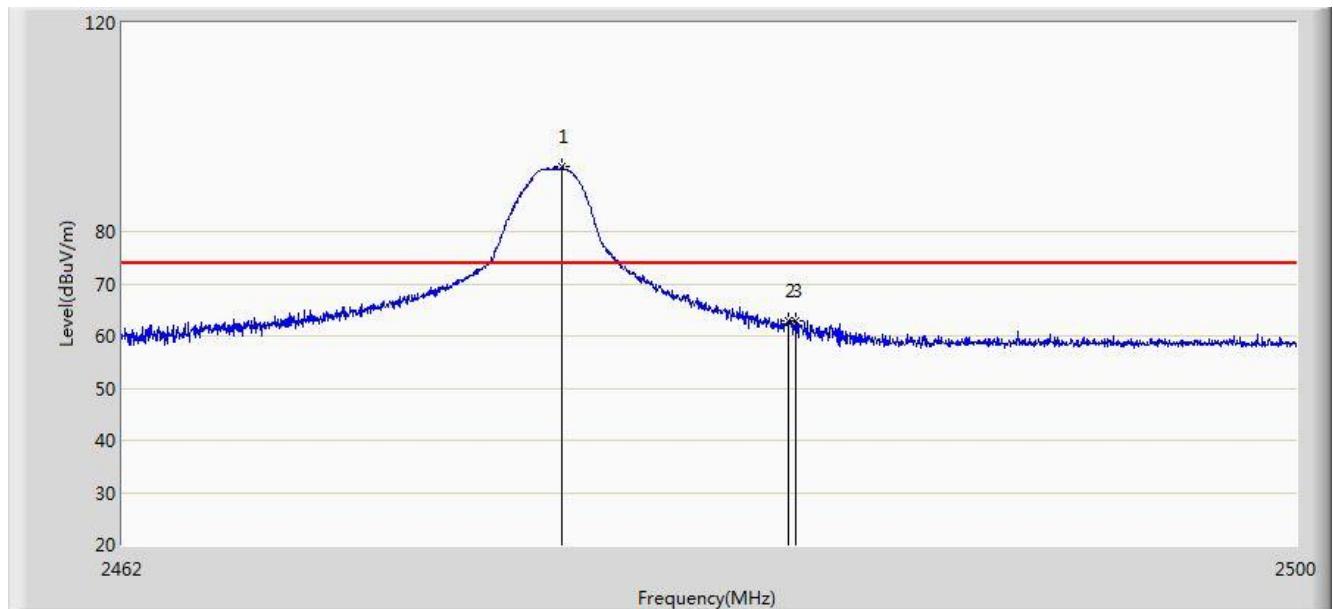

No	Flag	Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB)	Duty Cycle Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Type
1			2476.174	60.129	32.399	N/A	92.528	114.000	-21.472	PK
			2476.174	60.129	32.399	-42.400	50.128	94.000	-43.872	AV
2			2483.500	30.340	32.416	N/A	62.756	74.000	-11.244	PK
			2483.500	30.340	32.416	-42.400	20.356	54.000	-33.644	AV
3			2483.755	30.627	32.416	N/A	63.043	74.000	-10.957	PK
			2483.755	30.627	32.416	-42.400	20.643	54.000	-33.357	AV

Note: Peak Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Average Measure Level = Peak Measure Level + Duty Cycle Factor

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.5. 20dB Spectrum Bandwidth Measurement

7.5.1. Test Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission in the specific band (2408 ~ 2476).


7.5.2. Test Procedure used

ANSI C63.10 Clause 6.9.2

7.5.3. Test Setting

1. Set the spectrum span range to overlap the nominal center frequency
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize and marker the highest level
8. Determine the display level (the highest level - 20dB) and place two markers, one at the lowest frequency and the other at the highest frequency


7.5.4. Test Setup

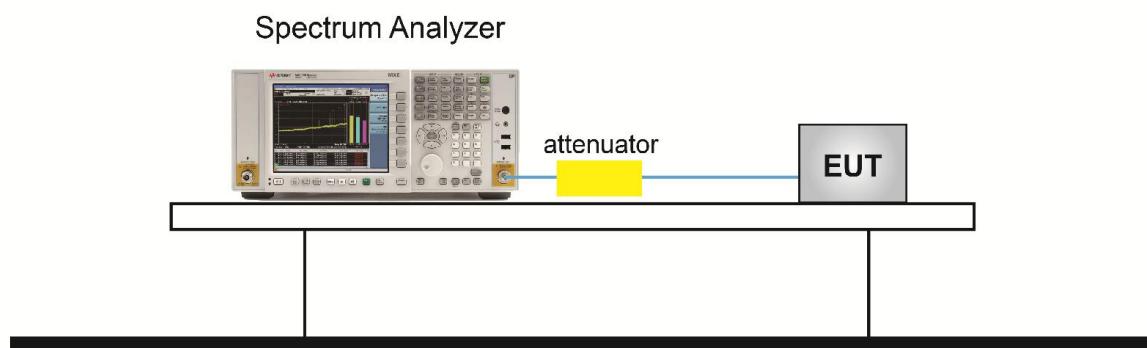

7.5.5. Test Result

Product	PureSpa	Temperature	24°C
Test Engineer	Messiah Li	Relative Humidity	56%
Test Site	AC1	Test Date	2019/04/25

Frequency (MHz)	Frequency Range (MHz)	Frequency Range (MHz)	Result
2408	2406.89	--	Pass
2476	--	2477.32	Pass

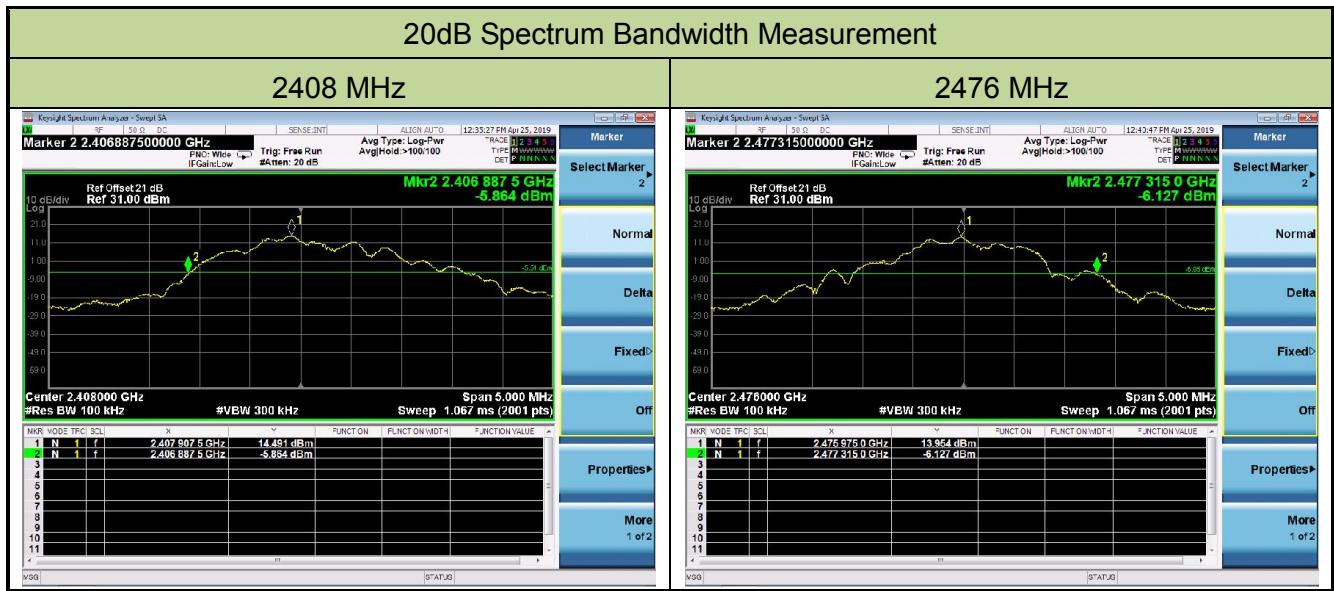

7.6. 99% Bandwidth Measurement

7.6.1. Test Limit

N/A


7.6.2. Test Procedure used

ANSI C63.10 Section 6.9

7.6.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 99% bandwidth measurement. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% to 5% of the OBW.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.6.4. Test Setup

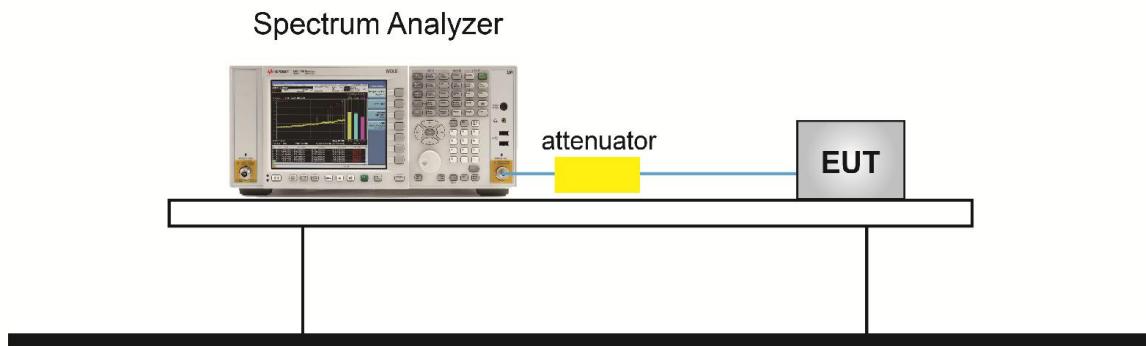

7.6.5. Test Result

Product	PureSpa	Temperature	24°C
Test Engineer	Messiah Li	Relative Humidity	56%
Test Site	AC1	Test Date	2019/04/25

Frequency (MHz)	99% Bandwidth (MHz)
2408	2.26
2442	2.13
2476	1.95



8. CONCLUSION

The data collected relate only the item(s) tested and show that the **PureSpa** is in compliance with Part 15C of the FCC Rules.

The End

Appendix A - Test Setup Photograph

Refer to "1903WSU013-UT" file.

Appendix B - EUT Photograph

Refer to "1903WSU013-UE" file.