



EMC TEST REPORT

Report No.: SET2021-14152

Product Name: Smart Minipos Terminal

FCC ID: SWSI2000

Model No. : i2000

Applicant: UROVO TECHNOLOGY CO., LTD.

Address: 36F, High-Tech Zone Union Tower, No. 63, Xuefu Road, Nanshan District, Shenzhen, Guangdong, China

Dates of Testing: 2021.09.08-2021.10.21

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 Fax: 86 755 26627238

This test report consists of **21** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name..... Smart Minipos Terminal

Model No. i2000

Trade name UROVO

Brand name UROVO

Applicant..... UROVO TECHNOLOGY CO., LTD.

Applicant Address..... 36F,High-Tech Zone Union Tower,No.63,Xuefu Road, Nanshan District, Shenzhen, Guangdong, China

Manufacturer UROVO TECHNOLOGY CO., LTD.

Manufacturer Address 36F,High-Tech Zone Union Tower,No.63,Xuefu Road, Nanshan District, Shenzhen, Guangdong, China

Test Standards..... 47 CFR Part 15 Subpart B

Test Result..... PASS

Tested by Ruihong Xie

Ruihong Xie Test Engineer

2021.10.21

Reviewed by Chris You

Chris You Senior Engineer

2021.10.21

Approved by Shuangwen Zhang

Shuangwen Zhang, Manager

2021.10.21

**TABLE OF CONTENTS**

1.	GENERAL INFORMATION	4
1.1	EUT Description	4
1.2	Test Standards and Results	5
1.3	Facilities and Accreditations	6
1.3.1	Facilities	6
1.3.2	Test Environment Conditions	6
1.3.3	Measurement Uncertainty	6
2.	TEST CONDITIONS SETTING	7
2.1	Test Peripherals	7
2.2	Use of Software Checklist	7
2.3	Test Mode	7
2.4	Test Setup and Equipments List.....	8
2.4.1	Conducted Emission	8
2.4.2	Radiated Emission.....	9
3.	47 CFR PART 15B REQUIREMENTS	11
3.1	Conducted Emission	11
3.1.1	Requirement	11
3.1.2	Test Description	11
3.1.3	Test Result	11
	Radiated Emission.....	14
3.1.4	Requirement	14
3.1.5	Test Description	15
3.1.6	Test Result	15

Change History		
Issue	Date	Reason for change
1.0	2021.10.21	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : Smart Minipos Terminal
Trade Name.....: UROVO
Brand Name.....: UROVO
Hardware Version..... : N/A
Software Version..... : N/A
Ancillary Equipment : AC Adapter
Model No.: TPA-46050200UU
I/p: 100-240V~50/60Hz ,500mA
O/p: 5.0V---2A
Manufacturer: SHENZHEN TIANYIN ELECTRONICS CO.,LTD

Note1: The EUT is a Smart Minipos Terminal;

*Note 2:*For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



1.3 Facilities and Accreditations

1.3.1 Facilities

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until June 30th, 2023.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 °C - 35 °C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 2.6 dB (k=2)
Uncertainty of Radiated Emission: (30MHz~1GHz)	Uc = 3.91 dB (k=2)
Uncertainty of Radiated Emission: (1~18GHz)	Uc = 4.5 dB (k=2)
Uncertainty of Radiated Emission: (18~40GHz)	Uc = 4.9 dB (k=2)

2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	ThinkPad	E430C	A131101550	N/A
Mouse	Logitech	M100r	25011051	DOC

Support Cable:

Description	Shield Type	Ferrite Core	Length
Antenna Cable	Un- shielding	No	1.2m
USB Cable	shielding	Yes	1.2m
PC Power adapter Cable	Un- shielding	No	1.2m
Mouse Cable	Un- shielding	No	1m

2.2 Use of Software Checklist

Software	Version number	Manufacturer	Use the project
ES-K1	V1.73	ROHDE&SCHWARZ	Radiated Emissions below 1GHz
TS+	JS32-RE 2.5.2.0	Tonsceng	Radiated Emissions above 1GHz
EMC32	Version 10.35.10	ROHDE&SCHWARZ	Conducted Emission

2.3 Test Mode

The EUT have the following typical setups during the test:

Setup1: EUT (DATA)+ PC + adapter


Setup 2: EUT Play + adapter

Note: only worst-case mode setup 1 mode data provide at the report

2.4 Test Setup and Equipments List

2.4.1 Conducted Emission

A. Test Setup:

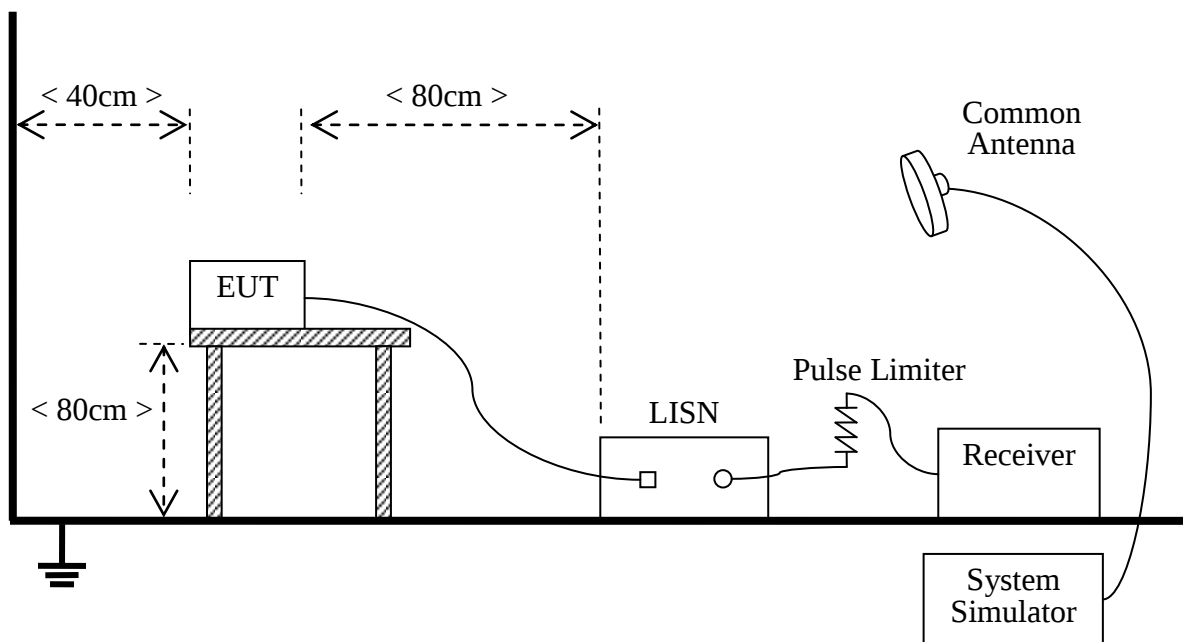

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2021.09.20	2022.08.04
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2021.09.21	2022.08.02
Cable	MATCHING PAD	W7	/	2021.08.01	2022.08.02


2.4.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

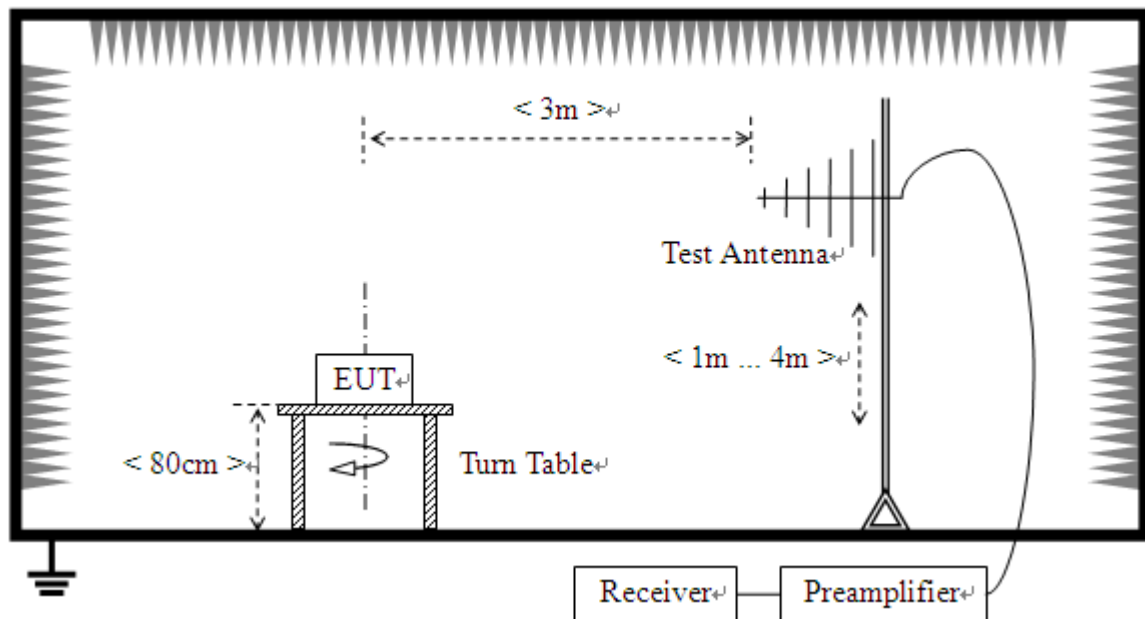

- 2) For radiated emissions above 1GHz

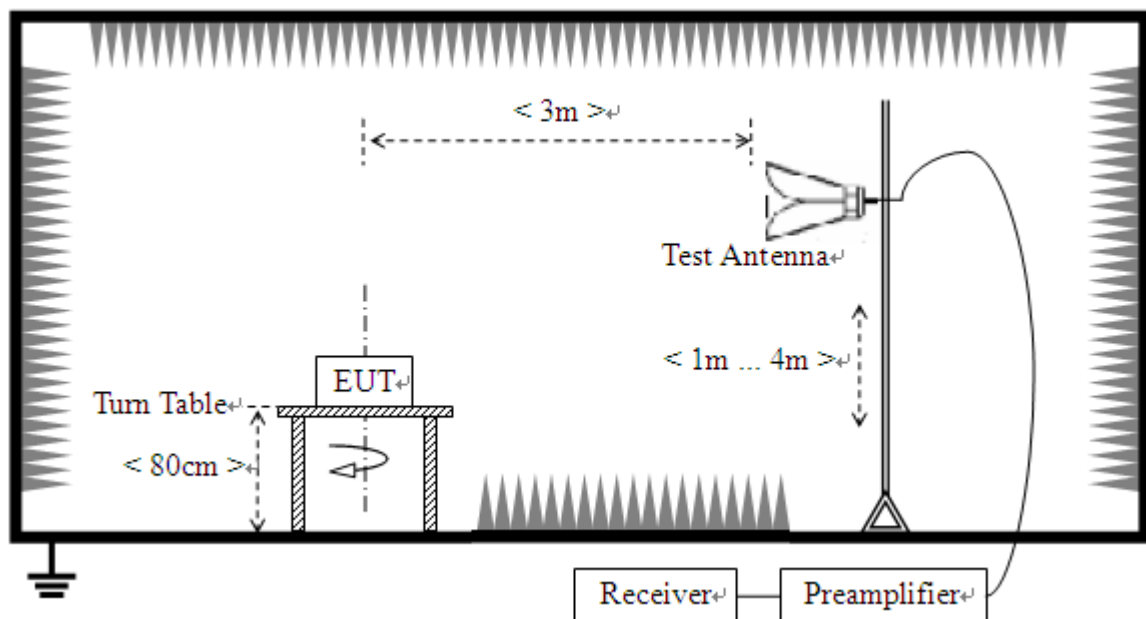

**B. Test Procedure**

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2021.09.20	2022.08.04
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2021.09.21	2022.08.02
Shield Room	Xinju Electronics	L7300*W4500 *H3100	A181003226	2021.09.05	2024.07.29
EMI Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2021.06.23	2022.05.23
Broadband Ant.	2786	ETC	A150402239	2021.09.16	2024.03.03
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2021.08.12	2022.08.01
System Simulator	ROHDE&SCHWARZ	CMW500	A150802214	2021.08.06	2022.08.02
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2019.03.25	2023.03.24
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2019.04.17	2022.04.17

3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description

See section 2.4.1 of this report.

3.1.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

Note:

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.


-Level(dB μ v)=Read Level(dB μ v)+Correction Factor(dB)

-Margin= Read Level(dB μ v)-Limit Line(dB μ v)

-Correction factor= LISN Factor(dB)+Cable Loss(dB)+ attenuation factor(dB)

Test voltage and frequency


A. Mains terminal disturbance voltage, L phase

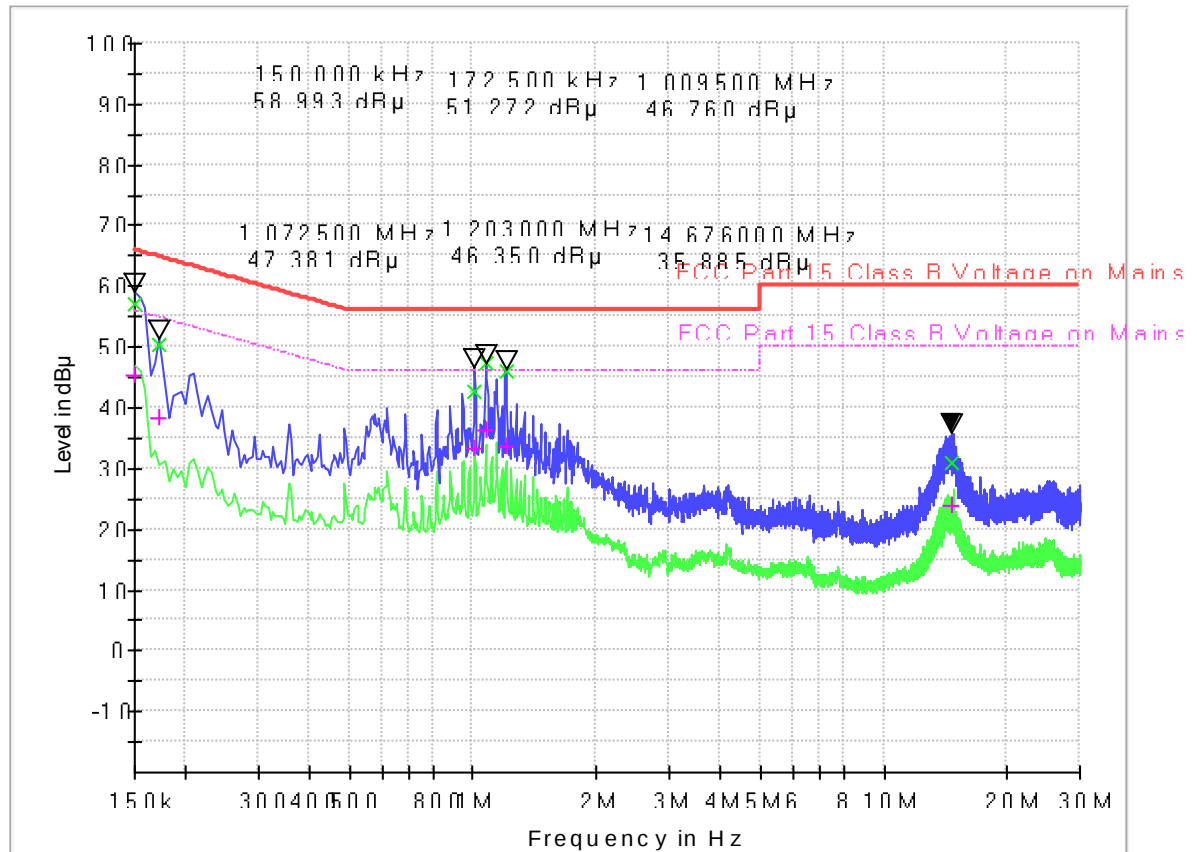

(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.150000	57.19	45.41	0.1	19.5	8.81	66.0	10.59	56.0
0.172500	50.38	38.25	0.2	19.5	14.46	64.8	16.59	54.8
1.009500	42.73	33.23	0.1	19.5	13.27	56.0	12.77	46.0
1.072500	47.25	36.18	0.1	19.5	8.75	56.0	9.82	46.0
1.203000	45.88	33.50	0.1	19.5	10.12	56.0	12.50	46.0
14.67600	30.80	24.03	0.2	19.8	29.20	60.0	25.97	50.0

B. Mains terminal disturbance voltage, N phase

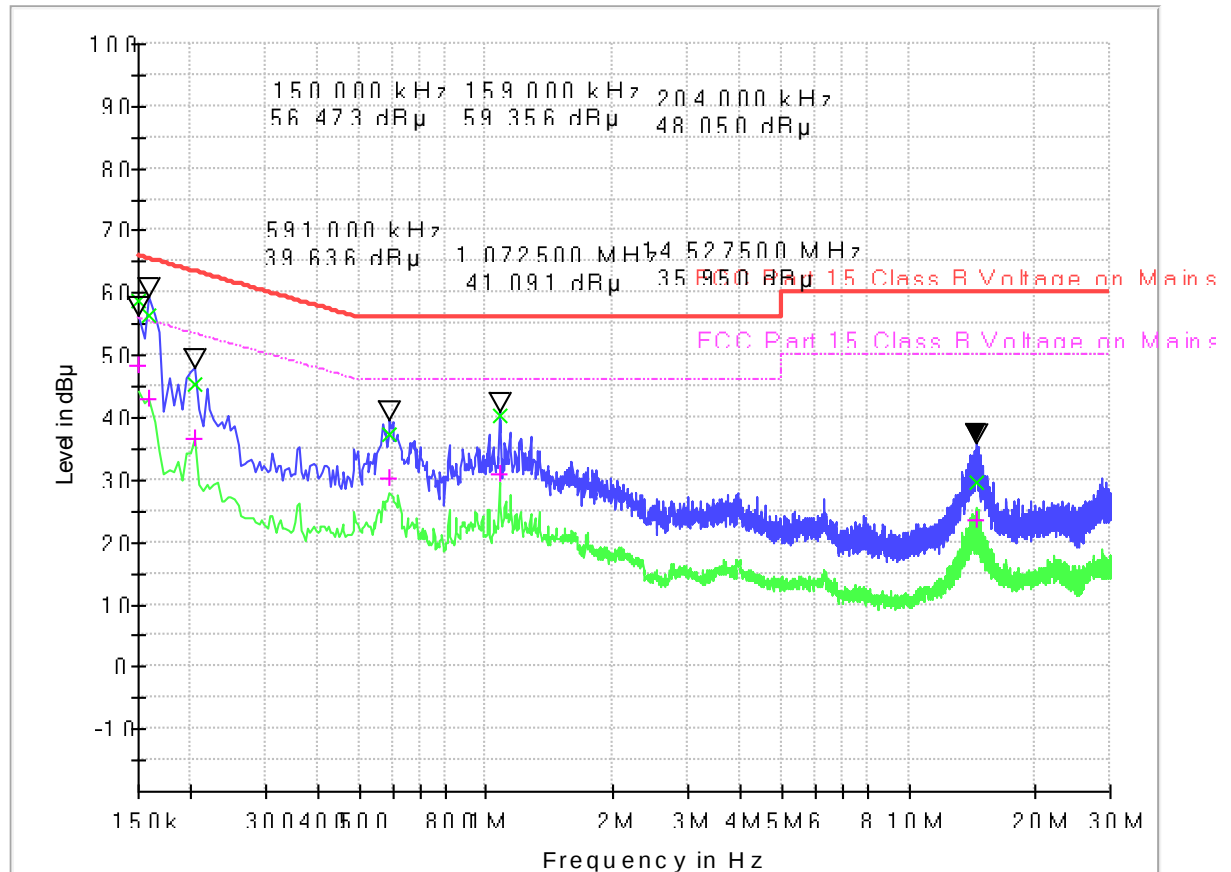

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB μV)	CAverage (dB μV)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μV)
0.150000	58.70	48.25	0.1	19.4	7.30	66.0	7.75	56.0
0.159000	56.34	43.08	0.2	19.4	9.18	65.5	12.44	55.5
0.204000	45.41	36.50	0.2	19.4	18.04	63.4	16.95	53.4
0.591000	37.25	30.26	0.2	19.4	18.75	56.0	15.74	46.0
1.072500	40.37	30.95	0.2	19.4	15.63	56.0	15.05	46.0
14.527500	29.77	23.46	0.2	19.8	30.23	60.0	26.54	50.0

Radiated Emission

3.1.4 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	($\mu\text{V/m}$)	(dBuV/m)
0.009 - 0.490	$2400/F(\text{kHz})$	300m	$10000 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 80$
0.490 - 1.705	$2400/F(\text{kHz})$	30m	$100 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 40$
1.705 - 30.00	30	30m	$100 * 30$	$20\log 30 + 40$
30.0 - 88.0	100	3m	100	$20\log 100$
88.0 - 216.0	150	3m	150	$20\log 150$
216.0 - 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$

- As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- The tighter limit shall apply at the boundary between two frequency range.
- Limitation expressed in dBuV/m is calculated by $20\log \text{Emission Level}(\mu\text{V/m})$.
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is $30\mu\text{V/m}$, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}.$$

3.1.5 Test Description

See section 2.3.2 of this report.

3.1.6 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.


The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

-Emission Level(dBuV/m)= 20log Emission Level(uV/m)

-Corrected Reading=Antenna factor+Cable Loss+Read Level-Preamp Factor= Level


A.Radiation disturbances, antenna polarization:Vertical

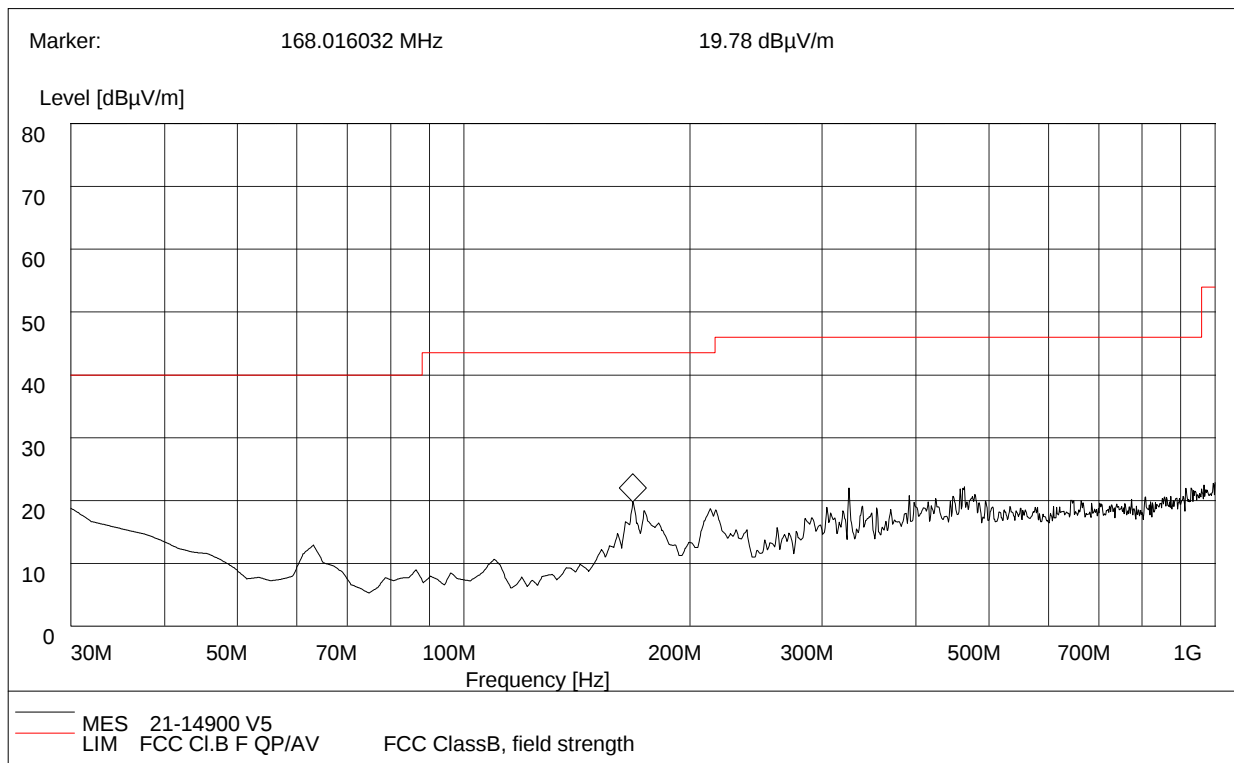

(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	16.80	120.000	93	40.0	23.20	Vertical	0.4	26.3	Pass
62.04	12.09	120.000	127	40.0	27.91	Vertical	0.4	26.3	Pass
168.06	19.82	120.000	101	43.5	23.68	Vertical	0.5	29.0	Pass
212.98	18.69	120.000	228	43.5	24.81	Vertical	0.5	29.0	Pass
325.01	22.01	120.000	287	46.0	23.99	Vertical	0.7	29.0	Pass
461.05	21.09	120.000	97	46.0	24.91	Vertical	0.7	29.0	Pass

B.Radiation disturbances, antenna polarization: Horizontal

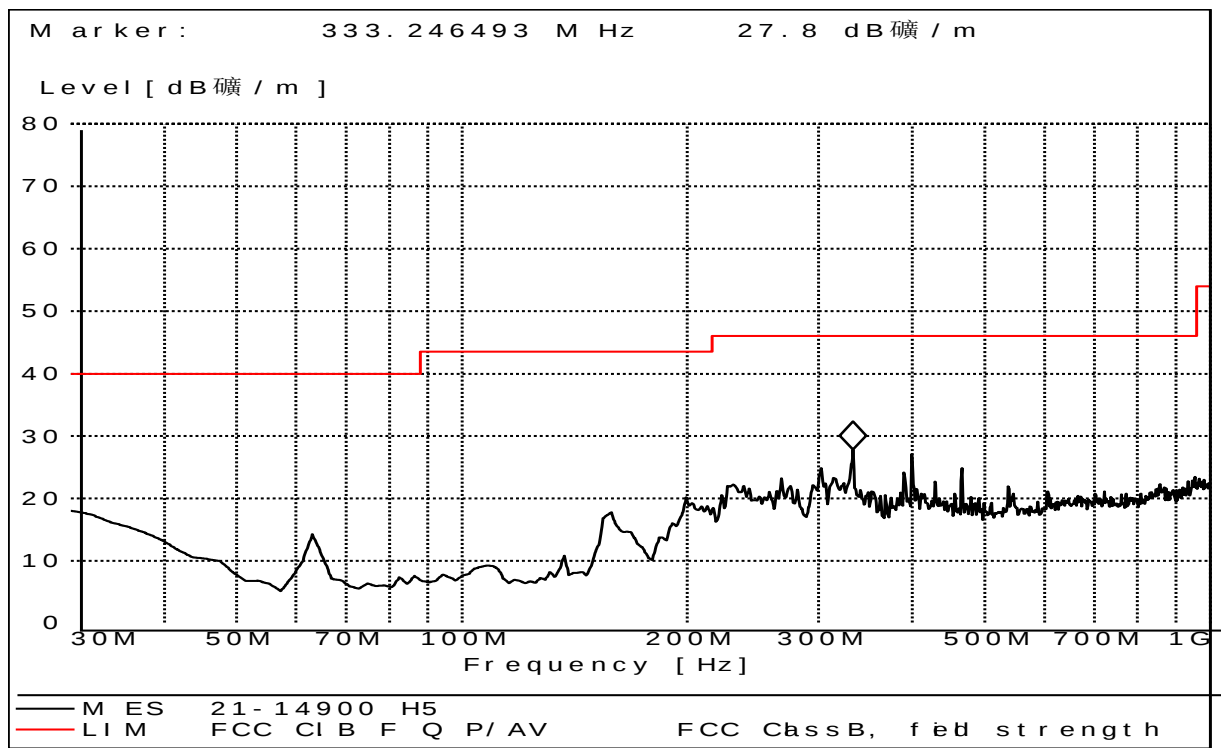


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	17.93	120.000	304	40.0	22.15	Horizon	0.4	26.3	Pass
62.04	14.08	120.000	254	40.0	28.95	Horizon	0.5	26.3	Pass
158.64	20.34	120.000	268	43.5	20.18	Horizon	0.4	26.3	Pass
199.11	20.01	120.000	183	43.5	24.57	Horizon	0.5	29.0	Pass
302.27	23.80	120.000	165	46.0	25.75	Horizon	0.5	29.0	Pass
333.24	26.82	120.000	221	46.0	25.50	Horizon	0.6	29.0	Pass

Test Result: PASS


A.Radiation disturbances, antenna polarization: Horizontal

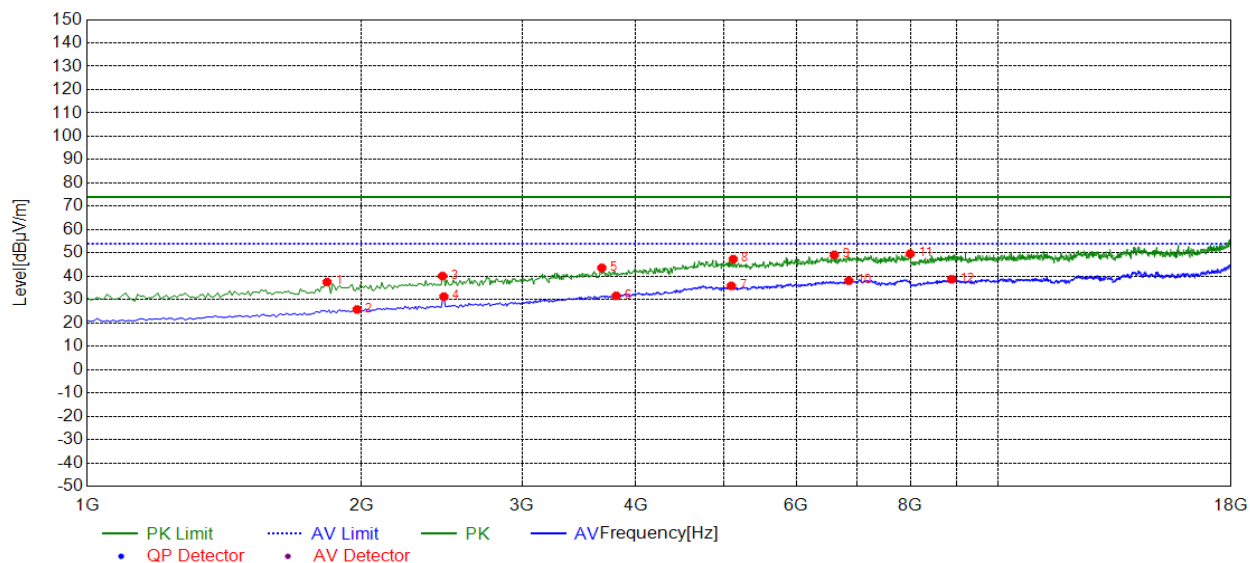

(Plot E: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1833.41	37.53	-11.82	74.00	36.47	PK	144	120	Horizontal
2	1977.98	25.76	-11.09	54.00	28.24	AV	158	110	Horizontal
3	2454.22	40.11	-9.44	74.00	33.89	PK	206	180	Horizontal
4	2462.73	31.28	-9.40	54.00	22.72	AV	212	190	Horizontal
5	3670.33	43.62	-4.31	74.00	30.38	PK	158	220	Horizontal
6	3806.40	31.61	-4.00	54.00	22.39	AV	144	210	Horizontal
7	5090.54	35.86	0.29	54.00	18.14	AV	206	310	Horizontal
8	5116.05	47.34	0.28	74.00	26.66	PK	198	320	Horizontal
9	6604.30	49.19	3.07	74.00	24.81	PK	133	160	Horizontal
10	6850.92	38.10	3.27	54.00	15.90	AV	146	150	Horizontal
11	7998.99	49.65	3.86	74.00	24.35	PK	235	50	Horizontal
12	8883.44	38.73	4.65	54.00	15.27	AV	241	60	Horizontal

B.Radiation disturbances, antenna polarization: Vertical

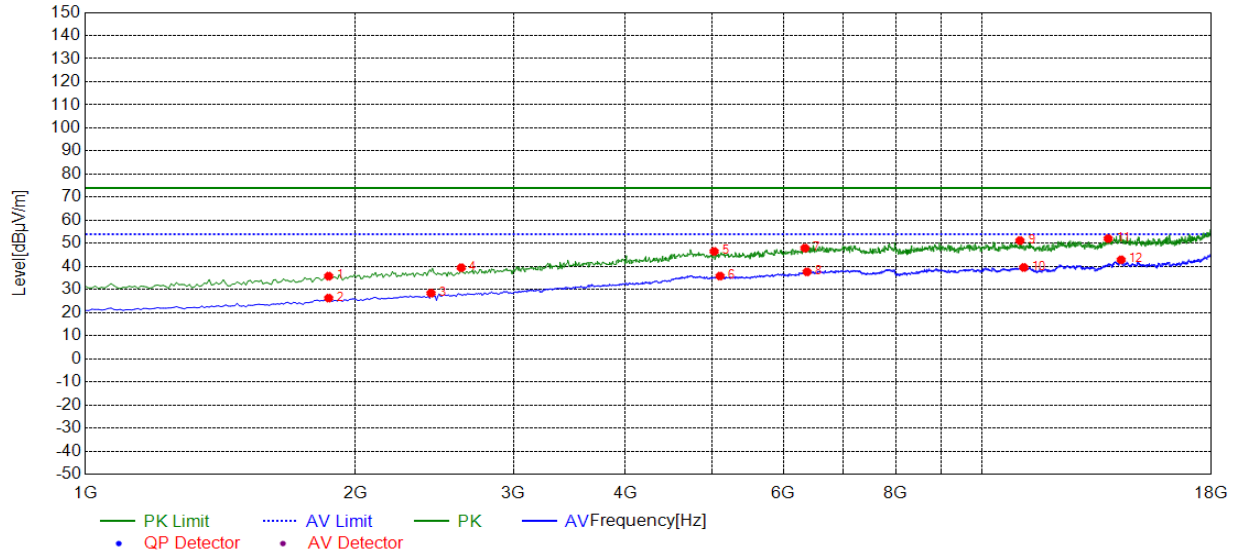

(Plot F: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1867.43	35.78	-11.64	74.00	38.22	PK	114	170	Vertical
2	1867.43	26.28	-11.64	54.00	27.72	AV	108	200	Vertical
3	2428.71	28.41	-9.55	54.00	25.59	AV	133	160	Vertical
4	2624.31	39.45	-8.78	74.00	34.55	PK	140	80	Vertical
5	5022.51	46.50	0.06	74.00	27.50	PK	176	50	Vertical
6	5099.04	35.82	0.32	54.00	18.18	AV	183	360	Vertical
7	6340.67	47.94	2.58	74.00	26.06	PK	259	200	Vertical
8	6374.68	37.64	2.64	54.00	16.36	AV	284	350	Vertical
9	11009.5	51.19	6.26	74.00	22.81	PK	194	250	Vertical
10	11120.0	39.56	6.23	54.00	14.44	AV	219	280	Vertical
11	13807.4	52.07	9.91	74.00	21.93	PK	176	190	Vertical
12	14275.1	42.88	10.89	54.00	11.12	AV	183	70	Vertical

-----End of Report-----