

## FCC Test Report

**Report No.:** RF151111C13D-1

**FCC ID:** SXE-JAO1802

**Test Model:** JAO18

**Received Date:** Nov. 02, 2016

**Test Date:** Nov. 14, 2016 ~ Nov. 15, 2016

**Issued Date:** Dec. 05, 2016

**Applicant:** Barco N.V

**Address:** President Kennedypark 35, Kortrijk 8500, Belgium

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan  
( R.O.C )

**Test Location:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results.....</b>	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Modification Record .....	5
<b>3 General Information .....</b>	<b>6</b>
3.1 General Description of EUT .....	6
3.2 Description of Support Units .....	7
3.2.1 Configuration of System under Test .....	7
3.3 General Description of Applied Standards.....	7
<b>4 Test Types and Results .....</b>	<b>8</b>
4.1 Radiated Emission and Bandedge Measurement .....	8
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	8
4.1.2 Test Instruments .....	9
4.1.3 Test Procedures.....	10
4.1.4 Deviation from Test Standard .....	10
4.1.5 Test Set Up .....	11
4.1.6 EUT Operating Conditions.....	11
4.1.7 Test Results .....	12
4.2 Conducted Emission Measurement.....	15
4.2.1 Limits of Conducted Emission Measurement .....	15
4.2.2 Test Instruments .....	15
4.2.3 Test Procedures.....	16
4.2.4 Deviation from Test Standard .....	17
4.2.5 Test Setup.....	17
4.2.6 EUT Operating Conditions.....	17
4.2.7 Test Results .....	18
<b>5 Pictures of Test Arrangements.....</b>	<b>20</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>21</b>

### Release Control Record

Issue No.	Description	Date Issued
RF151111C13D-1	Original Release	Dec. 05, 2016

## 1 Certificate of Conformity

**Product:** Panel PC

**Brand:** Barco

**Test Model:** JAO18

**Sample Status:** Identical Prototype

**Applicant:** Barco N.V

**Test Date:** Nov. 14, 2016 ~ Nov. 15, 2016

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.209)

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.


**Prepared by :**

Rona Chen

, **Date:** Dec. 05, 2016

Rona Chen / Specialist

**Approved by :**

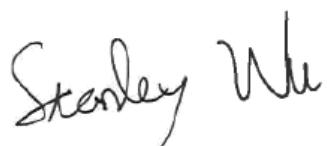Stanley Wu

, **Date:** Dec. 05, 2016

Stanley Wu / Assistant Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.225, 15.215)			
FCC Clause	Test Item	Result	Remarks
15.207	Conducted emission test	Pass	Meet the requirement of limit. Minimum passing margin is -16.76 dB at 0.63520 MHz.
15.209	Radiated emission test	Pass	Meet the requirement of limit. Minimum passing margin is -0.91 dB at 771.6 MHz.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Panel PC
<b>Brand</b>	Barco
<b>Test Model</b>	JAO18
<b>Status of EUT</b>	Identical Prototype
<b>Power Supply Rating</b>	19Vdc (Adapter)
<b>Operating Frequency</b>	125 kHz
<b>Antenna Connector</b>	N/A
<b>Accessory Device</b>	Refer to Note as below
<b>Data Cable Supplied</b>	N/A

Note:

1. This report is issued as a supplementary to BV CPS report: RF151111C28-3. The difference compared with original report is adding a Dual Band RFID Module.
2. The EUT contains following accessory devices.


<b>Product</b>	<b>Brand</b>	<b>Model</b>	<b>Description</b>
Adapter	DELTA ELECTRONICS, INC.	MDS-090AAS19 B	I/P: 100-240Vac, 50-60Hz, 1.5A O/P: 19Vdc, 4.74A 0.5m shielded cable with core
Handset	Barco	JAOHandset	1m shielded cable w/o core
CPU	Intel	Celeron J1900	--
RFID module	Synnx Technology	CL-2301M	--
Wifi module	Bointec	DPE809-AA	--

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

#### 3.2.1 Configuration of System under Test

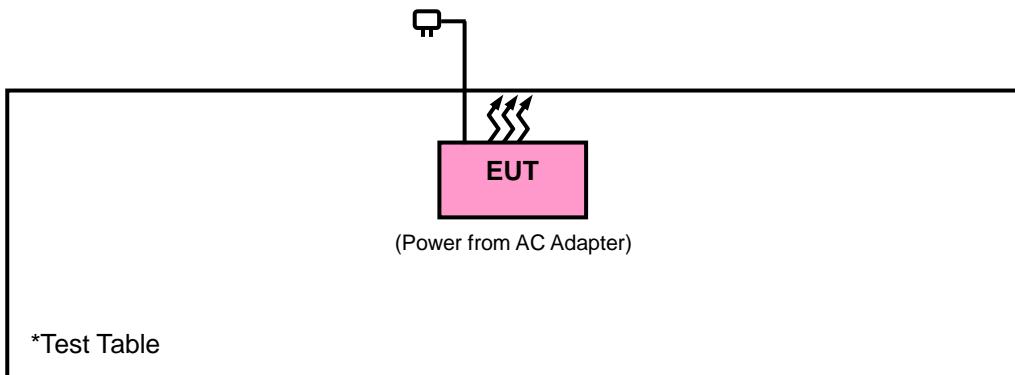

### 3.3 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### FCC Part 15, Subpart C (15.209)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).  
The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>u</sub>V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Jan. 21, 2016	Jan. 20, 2017
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 17, 2015	Dec. 16, 2016
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Jan. 07, 2016	Jan. 06, 2017
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Jan. 04, 2016	Jan. 03, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Jan. 08, 2016	Jan. 07, 2017
Loop Antenna	EM-6879	269	Aug. 11, 2016	Aug. 10, 2017
Preamplifier EMCI	EMC 012645	980115	Oct. 21, 2016	Oct. 20, 2017
Preamplifier EMCI	EMC 184045	980116	Oct. 21, 2016	Oct. 20, 2017
Preamplifier EMCI	EMC 330H	980112	Oct. 21, 2016	Oct. 20, 2017
Power Meter Anritsu	ML2495A	1232002	Sep. 08, 2016	Sep. 07, 2017
Power Sensor Anritsu	MA2411B	1207325	Sep. 08, 2016	Sep. 07, 2017
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4 2950114	Oct. 21, 2016	Oct. 20, 2017
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 21, 2016	Oct. 20, 2017
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 21, 2016	Oct. 20, 2017
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.
3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 690701.
5. The IC Site Registration No. is IC7450F-10.

#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10 Hz (Duty cycle  $> 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up

##### Frequency range 9k~30 MHz:

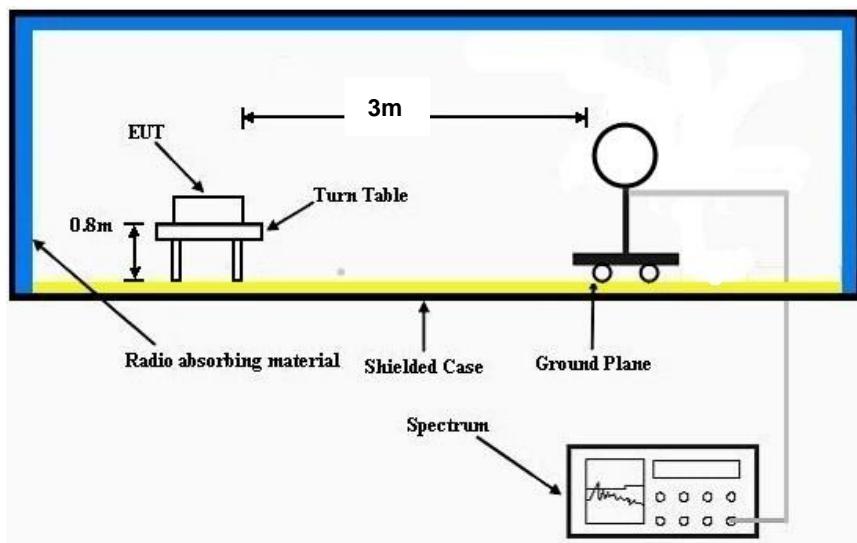

##### Frequency range 30~1000 MHz:

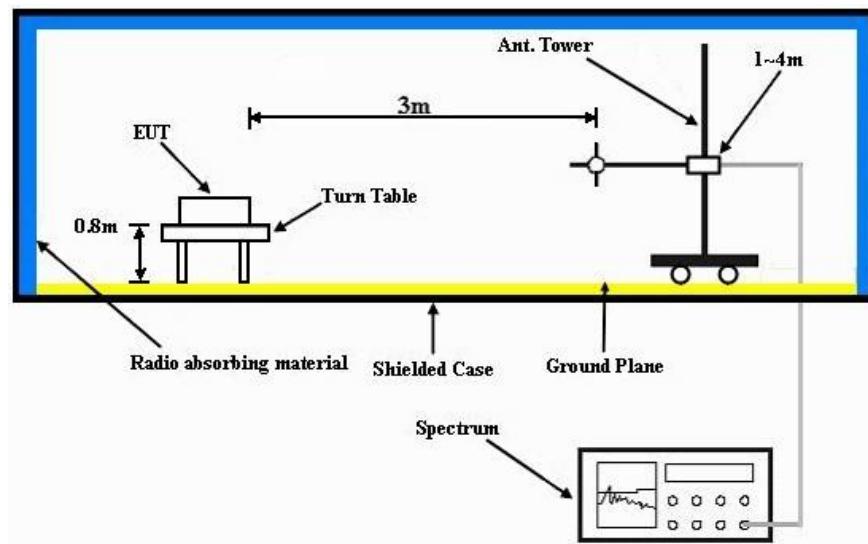

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

Set the EUT under transmission condition continuously at specific channel frequency.

## 4.1.7 Test Results

EUT Test Condition			Measurement Detail						
<b>Input Power</b>		120 Vac, 60 Hz			<b>Frequency Range</b>		0.009 ~ 30 MHz		
<b>Environmental Conditions</b>		25 deg. C, 65 % RH			<b>Detector Function</b>		Average Quasi-Peak		
<b>Tested By</b>		Getaz Yang							


Antennal Polarity & Test Distance: Open at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
0.13	84.06	68.98	105.67	-21.61	56.06	0.02	41	100	360	Average
0.25	65.63	56.25	99.65	-34.02	50.2	0.02	40.84	100	360	Average
0.38	57.53	51.23	96.12	-38.59	46.99	0.04	40.73	100	360	Average
0.5	49	44.49	73.62	-24.62	45.1	0.06	40.65	100	360	QP
0.63	47.53	44.57	71.69	-24.16	43.56	0.08	40.68	100	360	QP
0.75	46.21	44.31	70.1	-23.89	42.5	0.1	40.7	100	360	QP
Antennal Polarity & Test Distance: Close at 3 m										
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
0.13	80.06	64.98	105.67	-25.61	56.06	0.02	41	100	0	Average
0.25	59.63	50.25	99.65	-40.02	50.2	0.02	40.84	100	0	Average
0.38	52.53	46.23	96.12	-43.59	46.99	0.04	40.73	100	0	Average
0.5	44	39.49	73.62	-29.62	45.1	0.06	40.65	100	0	QP
0.63	42.53	39.57	71.69	-29.16	43.56	0.08	40.68	100	0	QP
0.75	42.21	40.31	70.1	-27.89	42.5	0.1	40.7	100	0	QP

## Remarks:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Pre-Amplifier Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. Above limits have been translated by the formula

EUT Test Condition		Measurement Detail	
<b>Input Power</b>	120 Vac, 60 Hz	<b>Frequency Range</b>	Below 1000 MHz
<b>Environmental Conditions</b>	25 deg. C, 65 % RH	<b>Detector Function</b>	Peak Quasi-Peak
<b>Tested By</b>	Getaz Yang		

## Horizontal

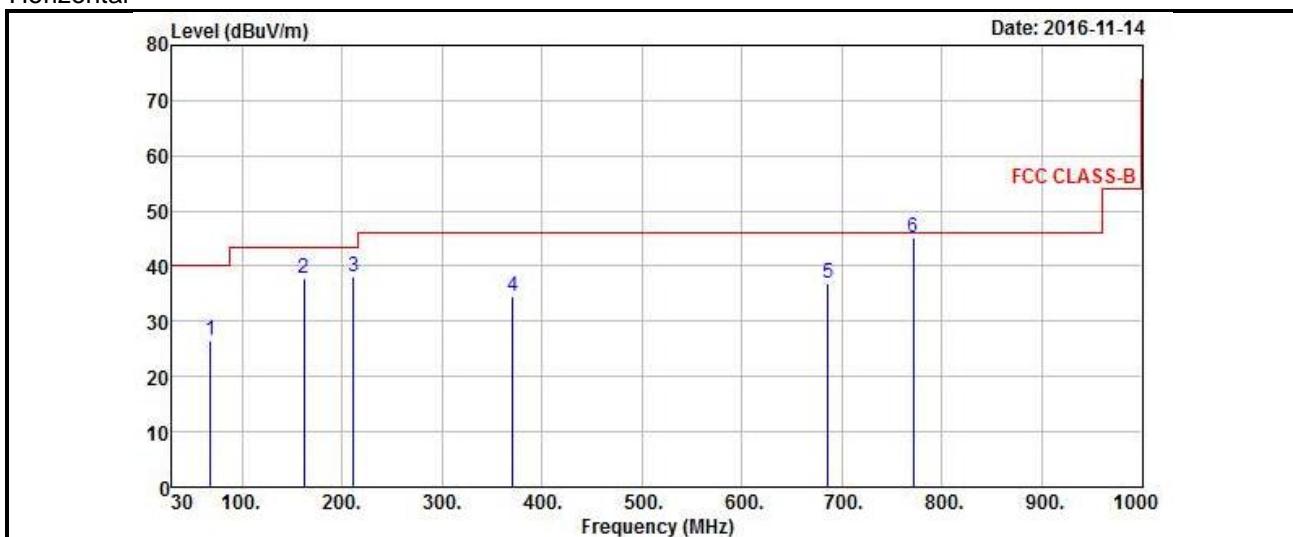

## Vertical

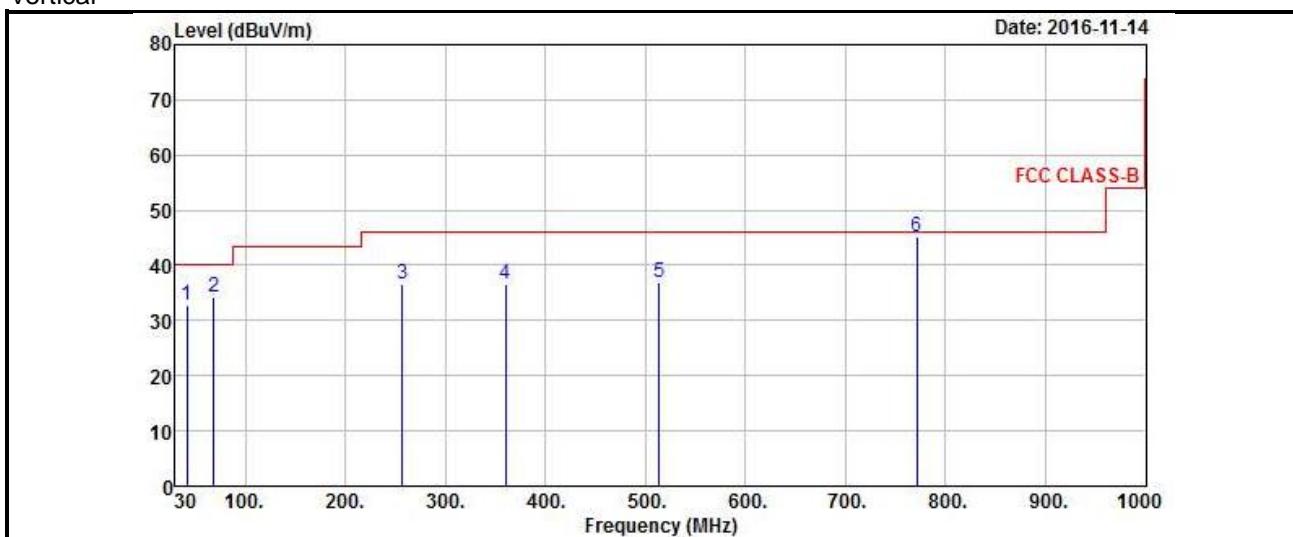

## Antenna Polarity &amp; Test Distance: Horizontal at 3 m

Frequency (MHz)	Emissino Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
68.8	26.6	46.63	40	-13.4	10.89	0.85	31.77	131	37	Peak
161.92	37.9	56.07	43.5	-5.6	12.54	1.14	31.85	116	2	Peak
211.39	37.99	58.4	43.5	-5.51	9.85	1.34	31.6	120	2	Peak
370.47	34.54	50.01	46	-11.46	14.63	1.82	31.92	138	20	Peak
685.72	36.98	45.75	46	-9.02	20.64	2.43	31.84	127	231	Peak
771.6	45.09	52.02	46	-0.91	21.83	2.57	31.33	108	131	QP

## Antenna Polarity &amp; Test Distance: Vertical at 3 m

Frequency (MHz)	Emissino Level (dBuV/m)	Read Level (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
41.64	32.81	49.64	40	-7.19	13.56	0.66	31.05	131	40	Peak
68.8	34.27	54.3	40	-5.73	10.89	0.85	31.77	130	271	Peak
256.98	36.71	55.4	46	-9.29	11.68	1.51	31.88	120	81	Peak
359.8	36.62	52.42	46	-9.38	14.38	1.79	31.97	104	342	Peak
514.03	37.02	48.84	46	-8.98	17.64	2.12	31.58	125	302	Peak
771.6	45.03	51.96	46	-0.97	21.83	2.57	31.33	166	232	QP

## Remarks:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value.

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 24, 2016	Oct. 23, 2017
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Dec. 26, 2015	Dec. 25, 2016
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 26, 2016	Feb. 25, 2017
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 28, 2016	Jul. 27, 2017
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.

#### 4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz - 30 MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

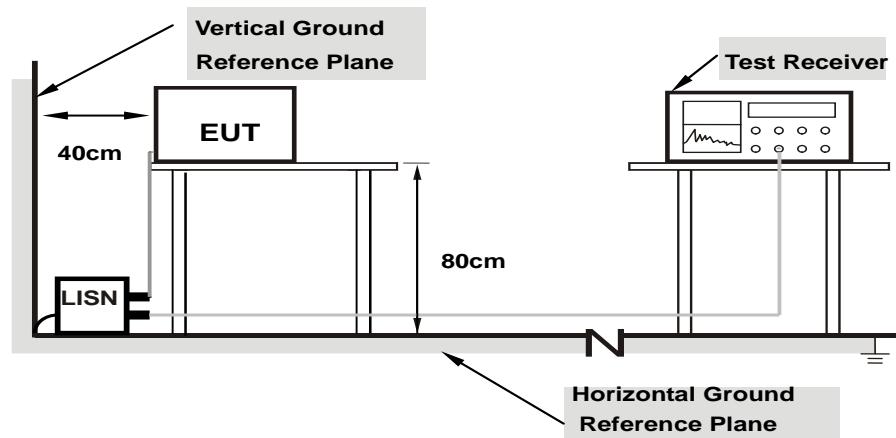

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


## 4.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Toby Tian	Test Date	2016/11/15

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.34550	10.10	27.70	14.56	37.80	24.66	59.07	49.07	-21.27	-24.41
2	0.51754	10.14	26.30	16.21	36.44	26.35	56.00	46.00	-19.56	-19.65
<b>3</b>	<b>0.63520</b>	<b>10.15</b>	<b>29.09</b>	<b>16.13</b>	<b>39.24</b>	<b>26.28</b>	<b>56.00</b>	<b>46.00</b>	<b>-16.76</b>	<b>-19.72</b>
4	0.93591	10.19	25.01	14.40	35.20	24.59	56.00	46.00	-20.80	-21.41
5	1.80002	10.26	19.82	13.47	30.08	23.73	56.00	46.00	-25.92	-22.27
6	16.91999	11.15	22.81	19.81	33.96	30.96	60.00	50.00	-26.04	-19.04

## Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

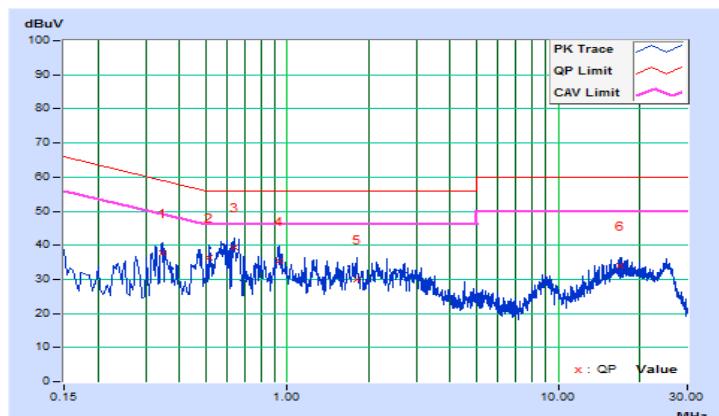


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Toby Tian	Test Date	2016/11/15

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.34941	10.11	29.52	16.37	39.63	26.48	58.98	48.98	-19.35	-22.50
2	0.46669	10.14	27.59	15.86	37.73	26.00	56.57	46.57	-18.84	-20.57
3	0.61920	10.16	28.51	14.30	38.67	24.46	56.00	46.00	-17.33	-21.54
4	0.92809	10.20	26.87	16.49	37.07	26.69	56.00	46.00	-18.93	-19.31
5	1.61234	10.25	22.34	17.60	32.59	27.85	56.00	46.00	-23.41	-18.15
6	17.22106	11.27	22.42	18.75	33.69	30.02	60.00	50.00	-26.31	-19.98

## Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

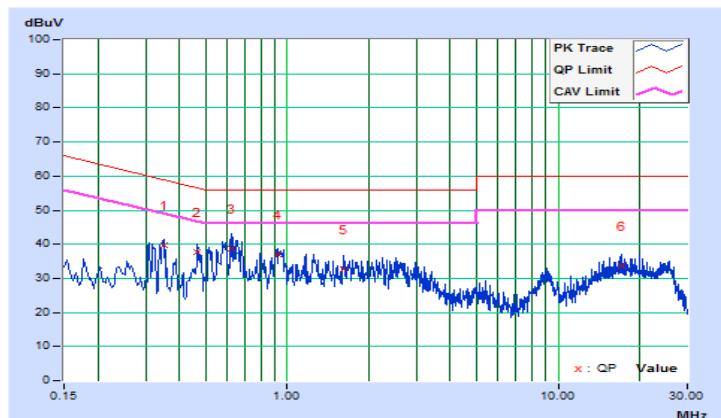

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### **Linko EMC/RF Lab**

Tel: 886-2-26052180  
Fax: 886-2-26051924

### **Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565  
Fax: 886-3-6668323

### **Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232  
Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---