



DATE: 19 January 2016

I.T.L. (PRODUCT TESTING) LTD.
FCC Radio Test Report
for
**Galcon Bakarim Agricultural
Cooperative Society Ltd.**

Equipment under test:
Irrigation Controller

11000BT-SN; 11000BT*

*See customer's Declaration on page 6

Tested by:

M. Zohar

Approved by:

D. Shidowsky

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for
Galcon Bakarim Agricultural Cooperative Society
Ltd.
Irrigation Controller

11000BT-SN

FCC ID: SZ811BT

This report concerns:	Original Grant: <input checked="" type="checkbox"/>
	Class I Change: <input type="checkbox"/>
	Class II Change: <input type="checkbox"/>
Equipment type:	Digital Transmission System
Limits used:	47CFR15 Section 15.247
Measurement procedure used is KDB 558074 D01 v03r03 and ANSI C63.4-2014.	
Application for Certification prepared by: R. Pinchuck ITL (Product Testing) Ltd. 1 Bat Sheva St. Lod 7116002 e-mail Rpinchuck@itl.co.il	Applicant for this device: (different from "prepared by") Tom Rush Galcon Bakerim Agricultural etc. Kibbutz Kfar Blum D.N. Upper Galilee, 12150, Israelo Tel: +972-4-690-0222 Fax: +972-4-690-2727 e-mail: Tomr@galcon.co.il



TABLE OF CONTENTS

1. GENERAL INFORMATION -----	5
1.1 Administrative Information.....	5
1.2 List of Accreditations	7
1.3 Product Description	8
1.4 Test Methodology	8
1.5 Test Facility	8
1.6 Measurement Uncertainty	8
2. SYSTEM TEST CONFIGURATION-----	9
2.1 Justification.....	9
2.2 EUT Exercise Software	9
2.3 Special Accessories	9
2.4 Equipment Modifications	9
2.5 Configuration of Tested System.....	9
3. RADIATED MEASUREMENT TEST SET-UP PHOTOS -----	10
4. 6 DB MINIMUM BANDWIDTH -----	12
4.1 Test Specification	12
4.2 Test Procedure.....	12
4.3 Test Results.....	12
4.4 Test Equipment Used; 6dB Bandwidth	15
6. MAXIMUM TRANSMITTED PEAK POWER OUTPUT -----	16
6.1 Test Specification	16
6.2 Test Procedure.....	16
6.3 Test Results.....	16
6.4 Test Equipment Used; Maximum Peak Power Output.....	20
7. BAND EDGE SPECTRUM -----	21
7.1 Test Specification	21
7.2 Test Procedure.....	21
7.3 Test Results.....	21
7.4 Test Equipment Used; Band Edge Spectrum	23
8. EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS-----	24
8.1 Test Specification	24
8.2 Test Procedure.....	24
8.3 Test Results.....	25
8.4 Test Instrumentation Used, Emission in Non Restricted Frequency Bands ..	26
8.5 Field Strength Calculation	27
9. EMISSIONS IN RESTRICTED FREQUENCY BANDS -----	28
9.1 Test Specification	28
9.2 Test Procedure.....	28
9.3 Test Results.....	29
9.4 Test Instrumentation Used Emissions in Restricted Frequency Bands	32
10. TRANSMITTED POWER DENSITY -----	33
10.1 Test Specification	33
10.2 Test Procedure.....	33
10.3 Test Results.....	33
10.4 Test Equipment Used; Transmitted Power Density	36
11. ANTENNA GAIN/INFORMATION-----	37
12. R.F EXPOSURE/SAFETY-----	38
13. APPENDIX A - CORRECTION FACTORS -----	39
13.1 Correction factors for CABLE	39
13.2 Correction factors for Horn Antenna	40
13.3 Correction factors for Horn ANTENNA.....	41
13.4 Correction factors for Horn ANTENNA.....	42



13.5 Correction factors for Log Periodic Antenna	43
13.7 Correction factors for Biconical Antenna.....	44
13.8 Correction factors for ACTIVE LOOP ANTENNA	45



1. General Information

1.1 Administrative Information

Manufacturer: Galcon Bakarim Agricultural Cooperative Society Ltd.

Manufacturer's Address: Kibbutz Kfar Blum
D.N. Upper Galilee
12150
Israel
Tel: +972-4-690-0222
Fax: +972-4-690-2727

Manufacturer's Representative: Tom Rash

Equipment Under Test (E.U.T): Irrigation Controller

Equipment Model No.: 11000BT-SN, 11000BT*

Equipment Serial No.: Not designated

Date of Receipt of E.U.T: 26.11.2015

Start of Test: 26.11.2015

End of Test: 07.12.2015

Test Laboratory Location: I.T.L (Product Testing) Ltd.
1 Batsheva St.,
Lod
ISRAEL 7120101

Test Specifications: FCC Part 15, Subpart C

*See customer's Declaration on following page.



DECLARATION

I HEREBY DECLARE THAT:

MODEL No. 11000BT-SN

IS A FULL CONFIGURATION MODEL,

OTHER MODELS No. WHICH INCLUDE ARE:

11000BT

DIFFER FROM THE **11000BT-SN** ONLY BY EXTRACTED COMPONENTS.

Please relate to them all (from a RF/EMC point of view) as the same product.

Thank you,

Full Name: Dvora Zilberas Fine Position: Engineering Manager Date: 03.08.2015

Signature: *DVORA Z*

Place: Kfar Blum



1.2 *List of Accreditations*

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation No. IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-3006, R-2729, T-1877, G-245.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site Nos. IC 4025A-1, IC 4025A-2.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



1.3 **Product Description**

Bluetooth operated irrigation controller with an integrated electric motor actuator. The controller works on 9V alkaline battery with optional rain sensor connector.

Model name	11000BT-SN
Working voltage	9VDC battery operated
Mode of operation	Transceiver BLE
Modulations	GFSK
Frequency Range	2402MHz-2480MHz
Transmit power	8dBm
Antenna Gain	-5.0 dBi
Modulation BW	>500kHz
Temperature (°C)/ Humidity (%RH)	18°C/35%

1.4 **Test Methodology**

Both conducted and radiated testing was performed according to the procedures in KDB 558074 D01 v03r03 and ANSI C63.4: 2014. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 **Test Facility**

Emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

1.6 **Measurement Uncertainty**

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.98 dB

2. System Test Configuration

2.1 Justification

Exploratory emission testing was performed in 3 orthogonal polarities to determine the worst case.

The fundamental results are shown in the below table:

Frequency (MHz)	Y axis (dBuV/m)	X axis (dBuV/m)	Z axis (dBuV/m)
2402.0	87.7	86.6	85.6
2440.0	85.4	82.4	80.3
2480.0	81.2	80.6	80.4

Figure 1. Screening Results

According to above results the worst case was the Y axis.

The unit was evaluated while transmitting at the low channel (2402MHz), the mid channel (2440MHz) and the high channel (2480MHz) in BLE technology.

2.2 EUT Exercise Software

No special exercise software was used.

2.3 Special Accessories

No special accessories were needed to achieve compliance.

2.4 Equipment Modifications

No modifications were necessary in order to achieve compliance.

2.5 Configuration of Tested System

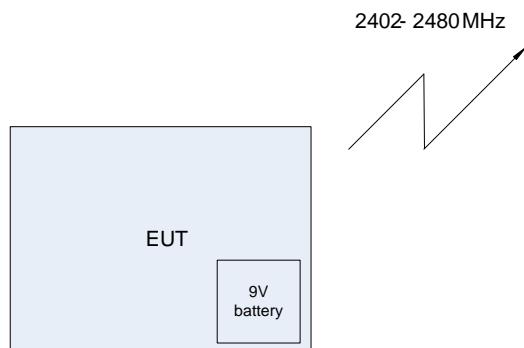


Figure 2. Configuration of Tested System

3. Radiated Measurement Test Set-Up Photos



Figure 3. Radiated Emission Test



Figure 4. Radiated Emission Test



Figure 5. Radiated Emission Test

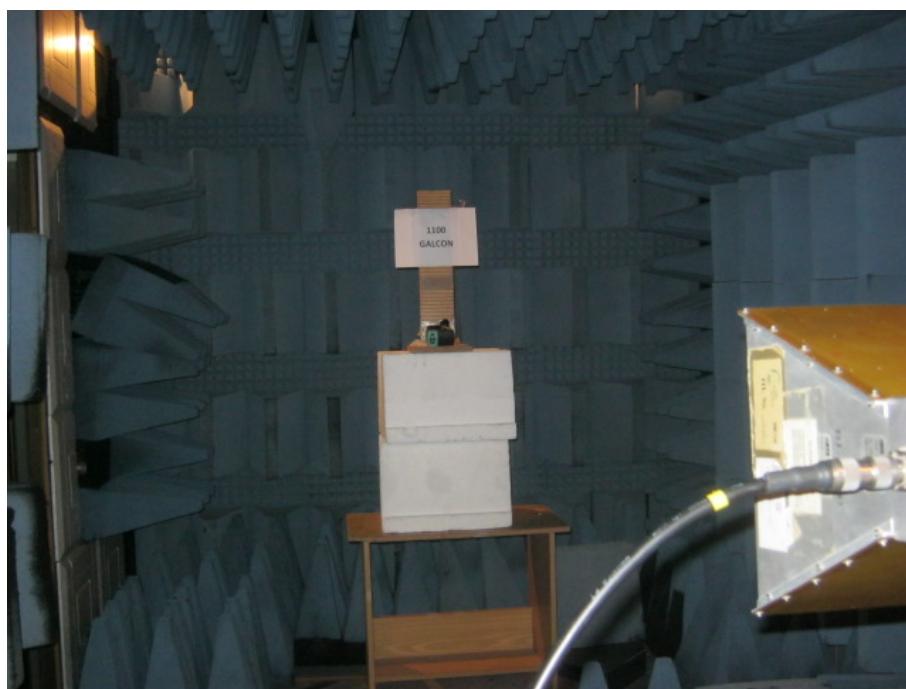


Figure 6. Radiated Emission Test



4. 6 dB Minimum Bandwidth

4.1 Test Specification

FCC Part 15, Subpart C, Section 247(a)(2)

4.2 Test Procedure

The E.U.T operation mode and test set-up are as described in Section 2 of this report.

The E.U.T was tested in the chamber, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The configuration tested is shown in *Figure 2*.

The spectrum bandwidth of the E.U.T. at the point of 6 dB below maximum peak power was measured and recorded. The RBW was set to 100 kHz.


4.3 Test Results

Operation Frequency (MHz)	Reading (MHz)	Specification (MHz)
2402.0	0.719	>0.5
2440.0	0.729	>0.5
2480.0	0.768	>0.5


Figure 7 6 dB Minimum Bandwidth

JUDGEMENT: Passed

For additional information see *Figure 8* to *Figure 10*.

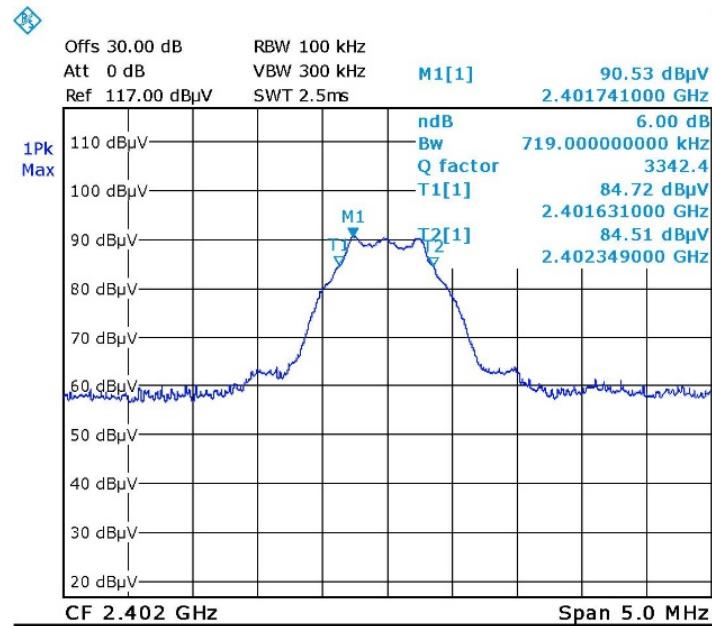


Date: 26.NOV.2015 13:57:23

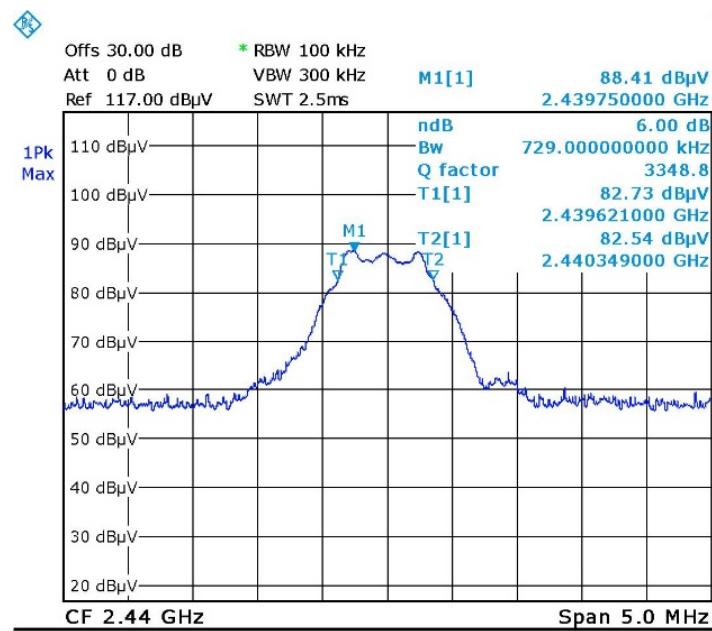Figure 8. 2402.0 MHz

Date: 26.NOV.2015 14:07:13

Figure 9. 2440.0 MHz

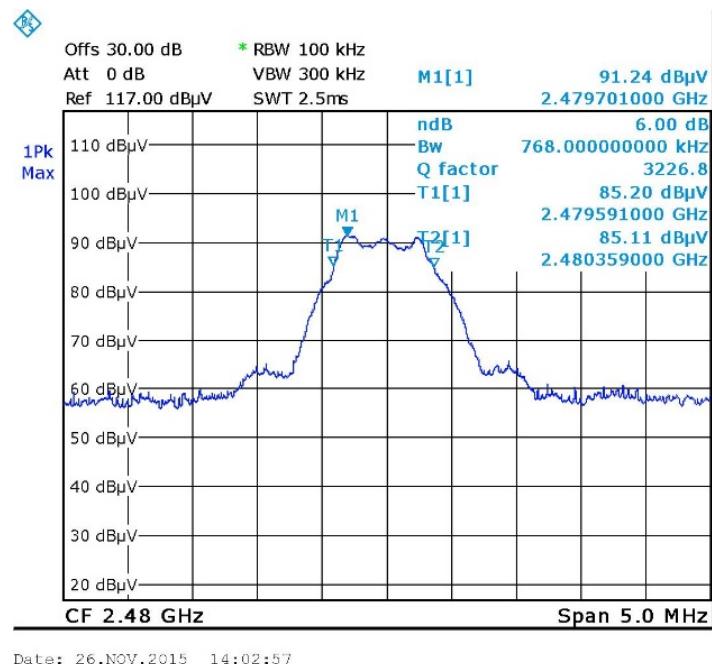**Figure 10. 2480.0 MHz**



4.4 **Test Equipment Used; 6dB Bandwidth**

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Date
Spectrum Analyzer	R&S	FSL6	100194	January 1, 2015	January 1, 2016
Horn Antenna	ETS	3115	6142	May 19, 2015	May 19, 2018
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	N/A	N/A

Figure 11 Test Equipment Used



6. Maximum Transmitted Peak Power Output

6.1 Test Specification

FCC, Part 15, Subpart C, Section 247(b)(3)

6.2 Test Procedure

The E.U.T operation mode and test set-up are as described in Section 2 of this report.

The E.U.T was tested in the chamber, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The configuration tested is shown in *Figure 2*.

The E.U.T was evaluated in 3 channels: Low (2402.0 MHz), Mid (2440.0 MHz) and High (2480.0 MHz).

Radiated output power levels were measured at selected operation frequencies and the results were converted to power level according to the formula as shown below:

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} \quad [W]$$

E - Field Strength (V/m)

d – Distance from transmitter (m)

G – Antenna gain

P – Peak power (W)


6.3 Test Results

Operation Frequency (MHz)	Polarization (V/H)	Power (dBuV/m)	Power (dBm)	Power (mW)	Specification (mW)	Margin (mW)
2402.0	V	98.4	3.2	2.09	1000.0	-997.91
2402.0	H	93.3	-1.9	0.65	1000.0	-999.35
2440.0	V	96.4	1.2	1.32	1000.0	-998.68
2440.0	H	91.4	-3.8	0.42	1000.0	-999.58
2480.0	V	96.8	1.6	1.45	1000.0	-998.55
2480.0	H	91.6	-3.6	0.44	1000.0	-999.56

Figure 12 Maximum Peak Power Output


JUDGEMENT: Passed by 997.91 mW

For additional information see *Figure 13* to *Figure 18*.

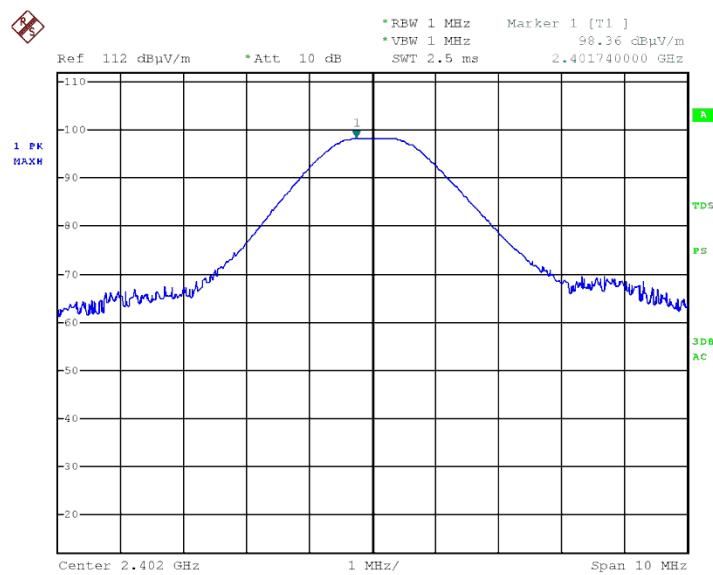


Date: 6.DEC.2015 13:51:45

Figure 13 2402.0 MHz – Vertical

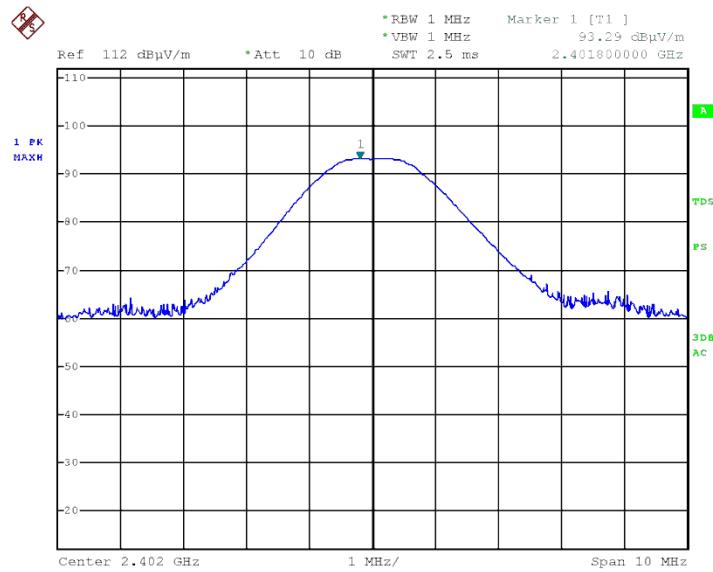


Date: 6.DEC.2015 14:02:57

Figure 14 2402.0 MHz – Horizontal

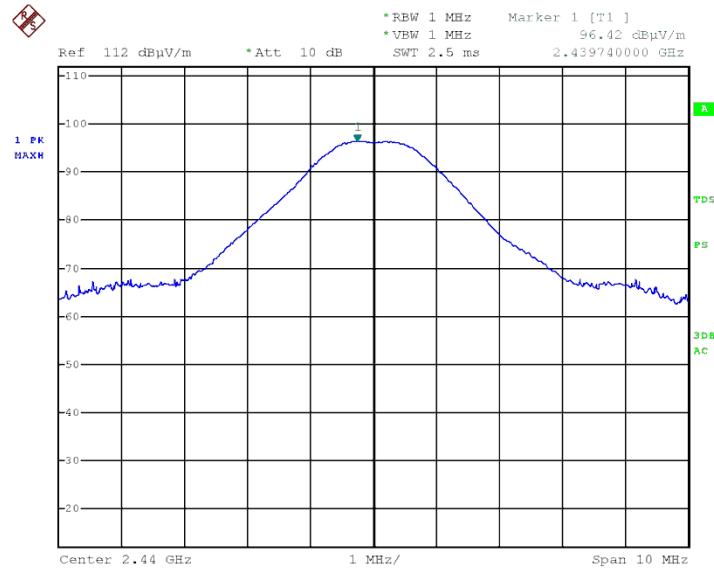


Date: 6.DEC.2015 13:44:57

Figure 15 2440.0 MHz – Vertical

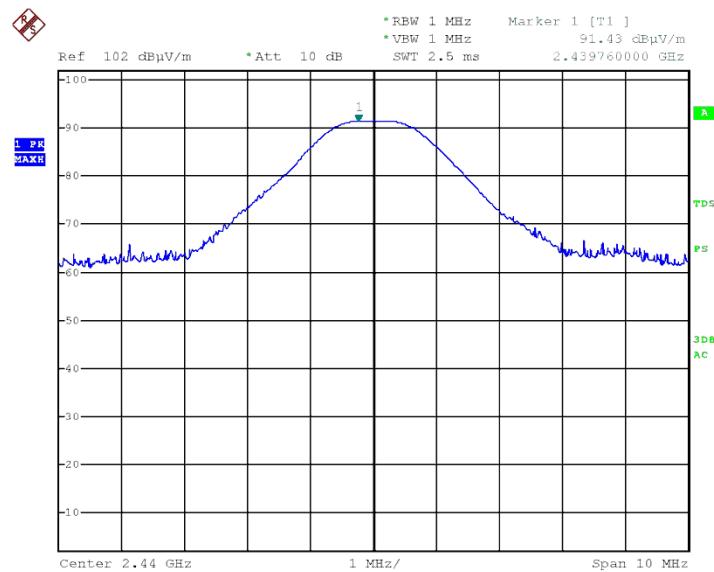


Date: 6.DEC.2015 13:39:51

Figure 16 2440.0 MHz – Horizontal

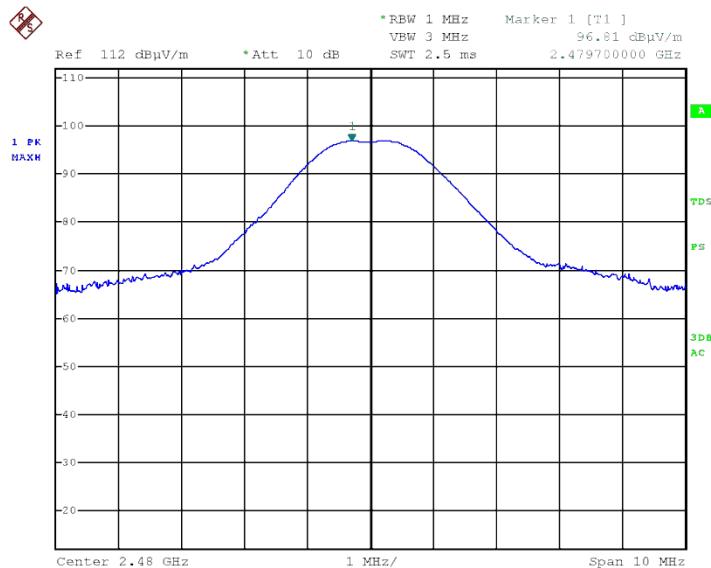

Date: 6.DEC.2015 12:23:14

Figure 17 2480.0 MHz – Vertical

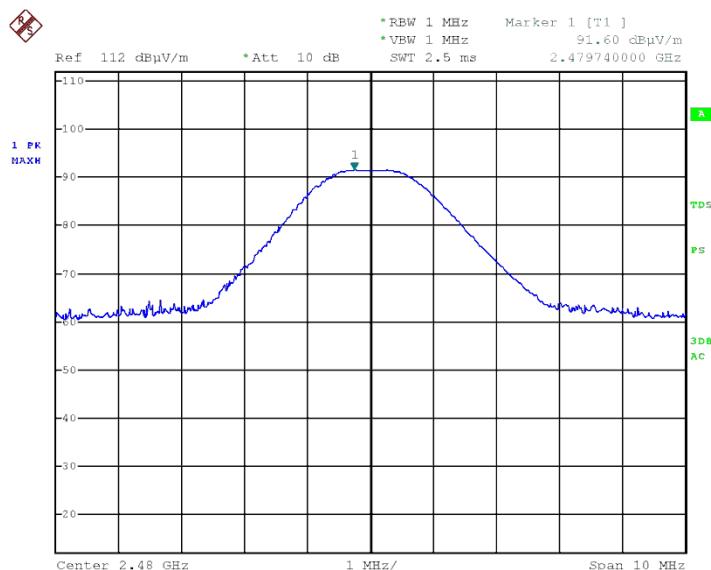

Date: 6.DEC.2015 12:31:31

Figure 18 2480.0 MHz – Horizontal



6.4 **Test Equipment Used; Maximum Peak Power Output**

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Date
EMI Receiver	R&S	ESCI7	100724	January 4, 2015	January 31, 2016
Horn Antenna	ETS	3115	6142	May 19, 2015	May 19, 2018
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	N/A	N/A

Figure 19 Test Equipment Used



7. Band Edge Spectrum

7.1 Test Specification

FCC, Part 15, Subpart C, Section 247(d)

7.2 Test Procedure

The E.U.T operation mode and test set-up are as described in Section 2 of this report.

The E.U.T was tested in the chamber, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The configuration tested is shown in *Figure 2*.

The RBW was set to 100 kHz.


7.3 Test Results

Operation Frequency (MHz)	Modulation	Band Edge Frequency (MHz)	Spectrum Level (dBuV/m)	Specification (dBuV/m)	Margin (dB)
Low	BLE	2400.0	56.6	70.6	-14.0
High	BLE	2483.5	57.3	71.3	-14.0

Figure 20 Band Edge Spectrum


JUDGEMENT: Passed by 14.0 dB

For additional information see *Figure 21* and *Figure 22*.

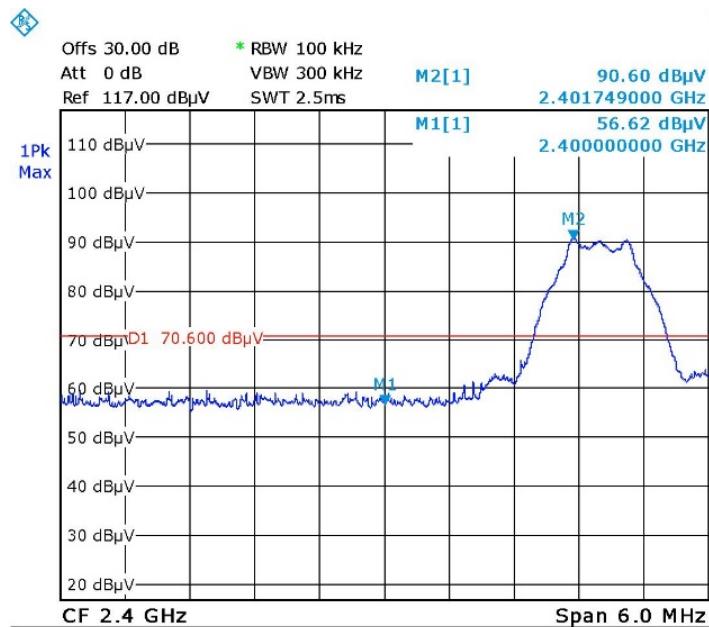

Date: 26.NOV.2015 13:59:56

Figure 21 —Lower Band Edge

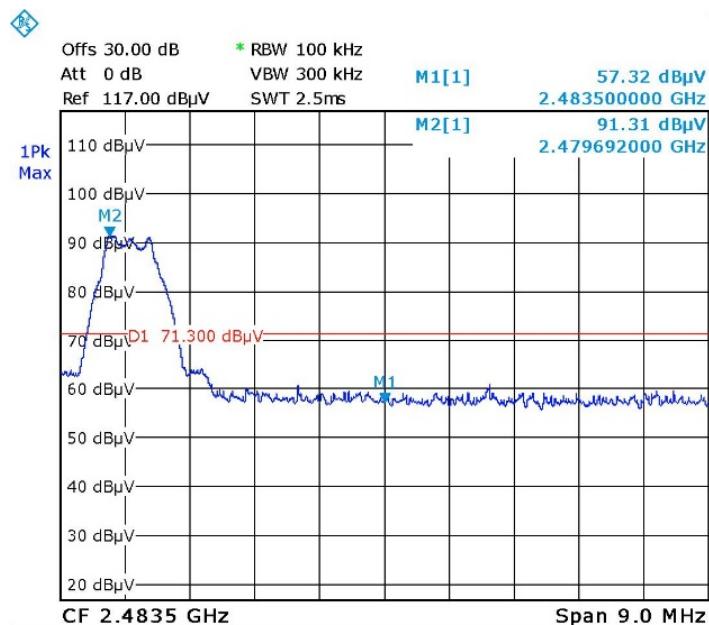

Date: 26.NOV.2015 14:02:00

Figure 22 —Upper Band Edge



7.4 **Test Equipment Used; Band Edge Spectrum**

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Date
EMI Receiver	R&S	FSL6	100194	January 1, 2015	January 1, 2016
Horn Antenna	ETS	3115	6142	May 19, 2015	May 19, 2018
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	N/A	N/A

Figure 23 Test Equipment Used



8. Emissions in Non-Restricted Frequency Bands

8.1 Test Specification

FCC, Part 15, Subpart C, Section 247(d)

8.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 2 of this report.

For 0.009MHz-1000MHz range:

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in *Figure 2*.

The frequency range 0.009 MHz-1000 MHz was scanned.

RBW was set to 100 kHz.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements.

In the frequency range of 9 kHz – 30 MHz, the center of the loop antenna height was one meter above the ground.

In the frequency range of 30 MHz – 1000 MHz the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

For 1000MHz-25000MHz range:

The E.U.T was placed in the chamber and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The configuration tested is shown in *Figure 2*.

The frequency range 1000 MHz - 25000 MHz was scanned.

RBW was set to 100 kHz.

In the frequency range 30 – 7000 MHz, a computerized EMI receiver complying with CISPR 16 requirements was used.

In the frequency range 7000 MHz -25000 MHz, a spectrum analyzer including a low noise amplifier was used.

The readings were maximized by adjusting the turntable azimuth between 0-360°, and the antenna polarization.

For all final evaluations the distance was 3 meters.

The E.U.T. was operated at the low, mid and high channels (2402.0 MHz, 2440 MHz and 2480.0 MHz).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.



8.3 ***Test Results***

JUDGEMENT: Passed

All detected emissions were greater than 20dBc below the fundamental level.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 247(d) specification.



8.4 **Test Instrumentation Used, Emission in Non Restricted Frequency Bands**

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Date
EMI Receiver	R&S	ESCI7	100724	January 4, 2015	January 31, 2016
Spectrum Analyzer	HP	8592L	3826A01204	March 4, 2015	March 3, 2016
EMI Receiver	HP	8542E	3906A00276	March 11, 2015	March 31, 2016
RF Filter Section	HP	85420E	3705A00248	March 19, 2015	March 31, 2016
Spectrum Analyzer	HP	8564E	3442A00275	March 11, 2015	March 31, 2016
Biconical Antenna	EMCO	3104	2606	December 28, 2014	December 28, 2015
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2015	November 4, 2016
Log Periodic Antenna	EMCO	3146	9505-4081	December 28, 2014	December 28, 2015
Horn Antenna	ETS	3115	29845	May 19, 2015	May 19, 2018
Horn Antenna	ARA	SWH-28	1007	March 3, 2014	March 30, 2016
Low Noise Amplifier	Narda	DBS-0411N313	13	March 1, 2015	March 1, 2016
Low Noise Amplifier	Sophia Wireless	LNA28-B	232	March 1, 2015	March 1, 2016
Spectrum Analyzer	HP	8593EM	3536A00120ADI	February 24, 2015	February 28, 2016
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	N/A	March 1, 2016
Antenna Mast	ETS	2070-2	9608-1497	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

Figure 24 Test Equipment Used



8.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors", using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ V/m]

RA: Receiver Amplitude [dB μ V]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

Example: $FS = 30.7 \text{ dB}\mu\text{V (RA)} + 14.0 \text{ dB (AF)} + 0.9 \text{ dB (CF)} = 45.6 \text{ dB}\mu\text{V}$

No external pre-amplifiers are used.



9. Emissions in Restricted Frequency Bands

9.1 *Test Specification*

FCC, Part 15, Subpart C, Sections 15.209, 15.205, 15.247(d)

9.2 *Test Procedure*

For 0.009MHz-1000MHz range:

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 2.

The frequency range 0.009 MHz-1000 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying with CISPR 16 requirements.

In the frequency range of 9 kHz – 30 MHz, the center of the loop antenna height was one meter above the ground.

In the frequency range of 30 MHz – 1000 MHz the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

For 1000MHz-25000MHz range:

The E.U.T was placed in the chamber and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The configuration tested is shown in Figure 2.

The frequency range 1000 MHz-25000 MHz was scanned.

The readings were maximized by adjusting the turntable azimuth between 0-360°, and the antenna polarization.

During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

In the frequency range 30-7000MHz,a computerized EMI receiver complying with CISPR 16 requirements was used.

In the frequency range 7000M-25000 MHz, a spectrum analyzer including a low noise amplifier was used.

For all final evaluations, the distance was 3 meters.

The E.U.T. was operated at the low, mid and high channels. (2402, 2440, 2480 MHz).

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	Field strength* (dB μ V/m)	Field strength* (dB μ V/m)@3m
0.009-0.490	2400/F(kHz)	300	48.5-13.8	128.5-73.8
0.490-1.705	24000/F(kHz)	30	33.8-23.0	73.8-63.0
1.705-30.0	30	30	29.5	69.5
30-88	100	3	40.0	40.0
88-216	150	3	43.5	43.5
216-960	200	3	46.0	46.0
Above 960	500	3	54.0	54.0

*The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

Figure 25 Table of Limits

9.3 Test Results

JUDGEMENT: Passed by 5.1dB

For the operation frequency of 2402 MHz, the margin between the emission level and the specification limit is in the worst case 8.0dB at the frequency of 2390.0 MHz, vertical polarization.

For the operation frequency of 2440 MHz, the margin between the emission level and the specification limit is in the worst case 9.6 dB at the frequency of 4880.0 MHz, vertical polarization.

For the operation frequency of 2480 MHz, the margin between the emission level and the specification limit is in the worst case 5.1dB at the frequency of 2483.5 MHz, vertical polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart C specification.

The details of the highest emissions are given in *Figure 26* to *Figure 27*.



Radiated Emission

E.U.T Description Irrigation Controller
Type 11000BT-SN
Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 0.009MHz to 25.0 GHz
Test Distance: 3 meters Detector: Peak

Operation Frequency (MHz)	Freq. (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
2402.0	2390.0	H	60.5	74.0	-13.5
2402.0	2390.0	V	61.5	74.0	-12.5
2402.0	4804.0	H	61.5	74.0	-12.5
2402.0	4804.0	V	63.6	74.0	-10.4
2440.0	4880.0	H	63.5	74.0	-10.5
2440.0	4880.0	V	64.4	74.0	-9.6
2480.0	4960.0	H	62.6	74.0	-11.4
2480.0	4960.0	V	62.9	74.0	-11.1
2480.0	2483.5	H	66.2	74.0	-7.8
2480.0	2483.5	V	67.7	74.0	-6.3

**Figure 26. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Radiated Emission

E.U.T Description Irrigation Controller
Type 11000BT-SN
Serial Number: Not designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 0.009MHz to 25.0 GHz
Test Distance: 3 meters Detector: Average

Operation Frequency (MHz)	Freq. (MHz)	Polarity (H/V)	Average Reading (dB μ V/m)	Average Specification (dB μ V/m)	Average Margin (dB)
2402.0	2390.0	H	45.1	54.0	-8.9
2402.0	2390.0	V	46.0	54.0	-8.0
2402.0	4804.0	H	41.7	54.0	-12.3
2402.0	4804.0	V	42.6	54.0	-11.4
2440.0	4880.0	H	42.4	54.0	-11.6
2440.0	4880.0	V	42.7	54.0	-11.3
2480.0	4960.0	H	40.5	54.0	-13.5
2480.0	4960.0	V	41.6	54.0	-12.4
2480.0	2483.5	H	47.0	54.0	-7.0
2480.0	2483.5	V	48.9	54.0	-5.1

**Figure 27. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



9.4 **Test Instrumentation Used Emissions in Restricted Frequency Bands**

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Date
EMI Receiver	R&S	ESCI7	100724	January 4, 2015	January 31, 2016
Spectrum Analyzer	HP	8592L	3826A01204	March 4, 2015	March 3, 2016
EMI Receiver	HP	8542E	3906A00276	March 11, 2015	March 31, 2016
RF Filter Section	HP	85420E	3705A00248	March 19, 2015	March 31, 2016
Spectrum Analyzer	HP	8564E	3442A00275	March 11, 2015	March 31, 2016
Biconical Antenna	EMCO	3104	2606	December 28, 2014	December 28, 2015
Active Loop Antenna	EMCO	6502	9506-2950	November 4, 2015	November 4, 2016
Log Periodic Antenna	EMCO	3146	9505-4081	December 28, 2014	December 28, 2015
Horn Antenna	ETS	3115	29845	May 19, 2015	May 19, 2018
Horn Antenna	ARA	SWH-28	1007	March 3, 2014	March 30, 2016
Low Noise Amplifier	Narda	DBS-0411N313	13	March 1, 2015	March 1, 2016
Low Noise Amplifier	Sophia Wireless	LNA28-B	232	March 1, 2015	March 1, 2016
Spectrum Analyzer	HP	8593EM	3536A00120ADI	February 24, 2015	February 28, 2016
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	N/A	March 1, 2016
Antenna Mast	ETS	2070-2	9608-1497	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

Figure 28 Test Equipment Used

10. Transmitted Power Density

10.1 Test Specification

FCC, Part 15, Subpart C, Section 247(e)

10.2 Test Procedure

The E.U.T operation mode and test set-up are as described in Section 2 of this report.

The E.U.T was tested in the chamber, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The configuration tested is shown in *Figure 2*.

The spectrum analyzer was set to 3 kHz RBW and VBW to 10 kHz.

The E.U.T was evaluated in 3 channels: Low (2402MHz), Mid (2440MHz) and High (2480MHz).

Radiated output power levels were measured at selected operation frequencies and the results were converted to power level according to the formula as shown below:

$$P = \frac{(E_{V/m} \times d)^2}{(30 \times G)} \quad [W]$$

E - Field Strength (V/m)

d – Distance from transmitter (m)

G – Antenna gain

P – Peak power (W)


10.3 Test Results

Operation Frequency (MHz)	Reading Spectrum Analyzer (dB μ V/m)	Reading Spectrum Analyzer (dBm)	Specification (dBm)	Margin (dB)
2402.0	82.8	-12.4	8.0	-20.4
2440.0	80.4	-14.8	8.0	-22.8
2480.0	80.7	-14.5	8.0	-22.5

Figure 29 Test Results


JUDGEMENT: Passed by dB

For additional information see *Figure 30* to *Figure 32*.

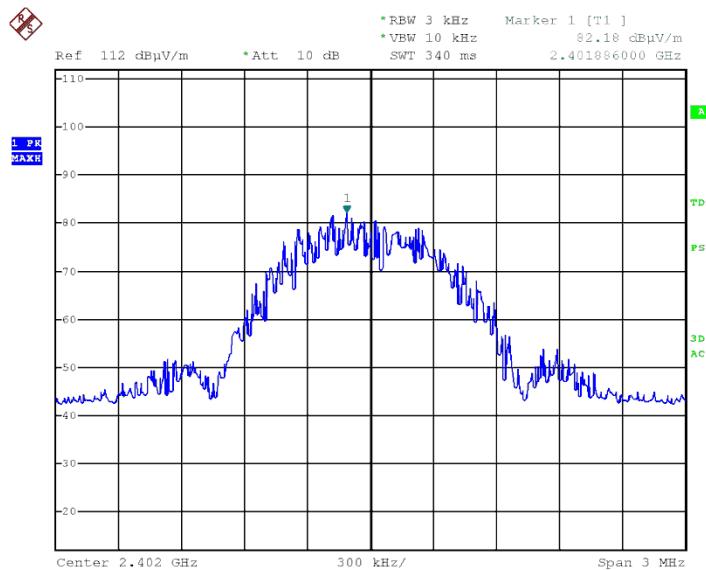


Date: 6.DEC.2015 13:50:07

Figure 30 — 2402.0 MHz

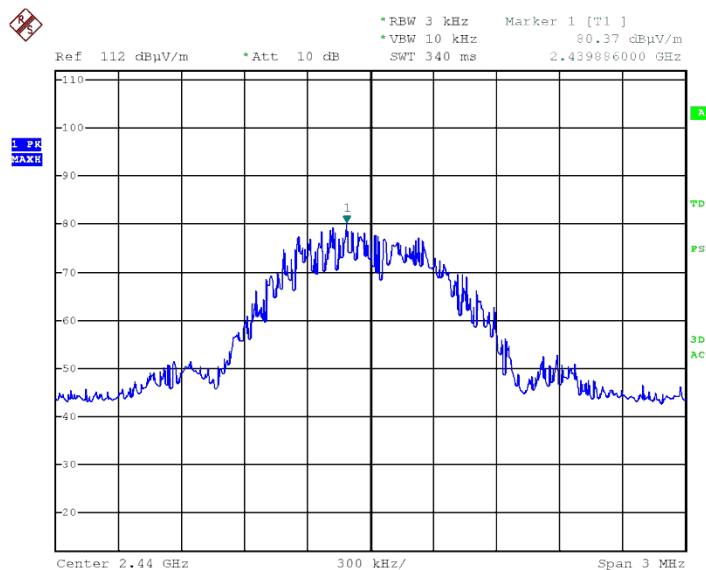

Date: 6.DEC.2015 13:47:38

Figure 31 — 2440.0 MHz

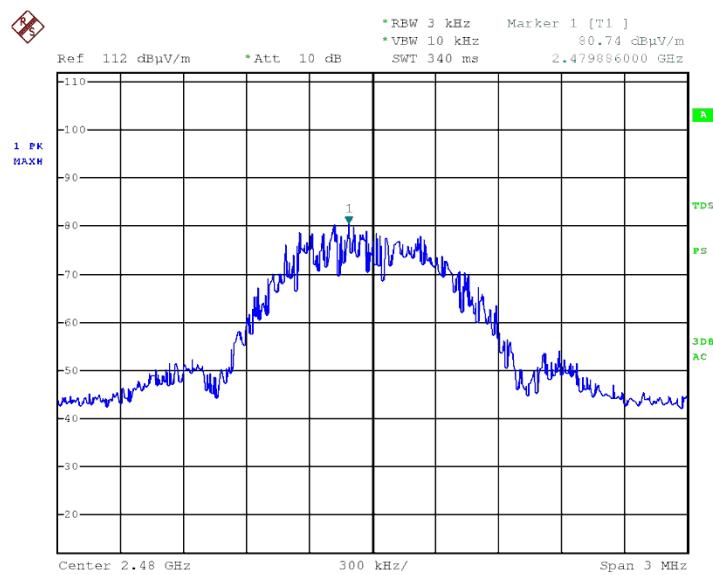

Date: 6.DEC.2015 12:24:08

Figure 32 — 2480.0 MHz



10.4 **Test Equipment Used; Transmitted Power Density**

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Date
EMI Receiver	R&S	ESCI7	100724	January 1, 2015	January 31, 2016
Horn Antenna	ETS	3115	29845	May 19, 2015	May 19, 2018
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	N/A	N/A

Figure 33 Test Equipment Used



11. Antenna Gain/Information

The antenna gain is -5.0 dBi, integral.



12. R.F Exposure/Safety

Typical use of the E.U.T. is as a Bluetooth irrigation controller.

The typical placement of the E.U.T. is outside in field/garden. The typical distance between the E.U.T. and the user is 20 cm.

Calculation of Maximum Permissible Exposure (MPE) Based on Section 1.1310 Requirements

(a) FCC limits at 2402 MHz is: $1 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(b) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t- Transmitted Power 98.4 dBuV/m (Peak) 2.09mW (testing performed radiated; power results include antenna gain)

G_T- Antenna Gain, -5.0 dBi

R- Distance from Transmitter using 20cm worst case

(c) The peak power density is:

$$S = \frac{(2.09)}{4\pi(20)^2} = 4.16 \times 10^{-4} \frac{mW}{cm^2}$$

(d) This is below the FCC limit.



13. APPENDIX A - CORRECTION FACTORS

13.1 Correction factors for CABLE from EMI receiver

to test antenna
at 3 meter range.

Frequency (MHz)	Cable Loss (dB)
0.010	0.4
0.015	0.2
0.020	0.2
0.030	0.3
0.050	0.3
0.075	0.3
0.100	0.2
0.150	0.2
0.200	0.3
0.500	0.4
1.00	0.4
1.50	0.5
2.00	0.5
5.00	0.6
10.00	0.8
15.00	0.9
20.00	0.8

Frequency (MHz)	Cable Loss (dB)
50.00	1.2
100.00	0.7
150.00	2.1
200.00	2.3
300.00	2.9
500.00	3.8
750.00	4.8
1000.00	5.4
1500.00	6.7
2000.00	9.0
2500.00	9.4
3000.00	9.9
3500.00	10.2
4000.00	11.2
4500.00	12.1
5000.00	13.1
5500.00	13.5
6000.00	14.5

NOTES:

1. The cable type is SPUMA400 RF-11N(X2) and 39m long
2. The cable is manufactured by Huber + Suhner



13.2 Correction factors for

Horn Antenna
Model: SWH-28
at 1 meter range.

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4



13.3 Correction factors for Horn ANTENNA.
Model: 3115
Antenna serial number: 6142
3 meter range

FREQUENCY (MHz)	Antenna Factor (dB/m)	FREQUENCY (MHz)	Antenna Factor (dB/m)
1000	23.9	10500	38.4
1500	25.4	11000	38.5
2000	27.3	11500	39.4
2500	28.5	12000	39.2
3000	30.4	12500	39.4
3500	31.6	13000	40.7
4000	33	14000	42.1
4500	32.7	15000	40.1
5000	34.1	16000	38.2
5500	34.5	17000	41.7
6000	34.9	17500	45.7
6500	35.1	18000	47.7
7000	35.9		
7500	37.5		
8000	37.6		
8500	38.3		
9000	38.5		
9500	38.1		
10000	38.6		



13.4 Correction factors for

Horn ANTENNA.

Model: 3115

Antenna serial number: 29845
10 meter range

FREQUENCY (MHz)	AFE (dB/m)	FREQUENCY (MHz)	AFE (dB/m)
1000	22.4	10000	36.1
2000	25.2	11000	37.0
3000	31.1	12000	41.3
4000	30.2	13000	38.1
5000	34.2	14000	41.7
6000	31.6	15000	39.0
7000	34.7	16000	38.8
8000	34.8	17000	43.2
9000	36.2	18000	43.7



13.5 Correction factors for

Log Periodic Antenna EMCO, Model 3146, Serial #9505-4081

CALIBRATION DATA

Frequency, MHz	Antenna factor, dB/m ¹¹
200	11.55
250	11.60
300	14.43
400	15.38
500	17.98
600	18.78
700	21.17
800	21.16
900	22.67
1000	24.09

¹¹ The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



**13.7 Correction factors for Biconical Antenna
EMCO, Model 3104,
Serial #2606**

CALIBRATION DATA

Frequency, MHz	Near free space antenna factor, dB/m	Geometry specific correction factor, dB	Free space antenna factor, dB/m ¹⁾
30	12.97	0.13	12.84
35	12.34	0.09	12.25
40	12.03	0.06	11.97
45	11.42	0.02	11.40
50	11.91	0.03	11.88
60	11.92	0.37	11.55
70	9.60	0.25	9.35
80	6.99	-0.45	7.44
90	10.87	-0.34	11.21
100	11.51	-0.06	11.57
120	13.30	-0.20	13.10
140	12.56	-0.01	12.57
160	14.49	-0.12	14.61
180	16.53	0.05	16.48
200	15.30	0.15	15.15

¹⁾ The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



13.8 Correction factors for ACTIVE LOOP ANTENNA

Model 6502
S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2