

Prüfbericht-Nr.: Test report no.:	CN22U5UZ (P15C-WiFi) 001	Auftrags-Nr.: Order no.:	238540829	Seite 1 von 29 Page 1 of 29
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2022-03-16	
Auftraggeber: Client:	DEXATEK TECHNOLOGY LTD. 16F, No. 81, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221, Taiwan R.O.C.			
Prüfgegenstand: Test item:	DK9186			
Bezeichnung / Typ-Nr.: Identification / Type no.:	DK9186			
Auftrags-Inhalt: Order content:	FCC Part 15C Test report (WiFi 2.4GHz)			
Prüfgrundlage: Test specification:	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: Date of sample receipt:	2022-05-12			
Prüfmuster-Nr.: Test sample no:	A003259552-004 A003259552-003			
Prüfzeitraum: Testing period:	2022-05-16 - 2022-05-31			
Ort der Prüfung: Place of testing:	EMC/RF Taipei Testing Site			
Prüflaboratorium: Testing laboratory:	Taipei Testing Laboratories			
Prüfergebnis*: Test result*:	Pass			
überprüft von: compiled by:			genehmigt von: authorized by:	
Datum: Date:	2022-06-20		Ausstellungsdatum: Issue date:	2022-06-20
Stellung / Position:	Senior Project Manager		Stellung / Position:	Senior Project Manager
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
5 = mangelhaft N/T = nicht getestet				
5 = poor N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(3)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL.....	11
4.3 TEST OPERATION AND TEST SOFTWARE.....	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.5 TEST SETUP DIAGRAM	13
4.6 DUTY CYCLE OF TEST SIGNAL	15
5. TEST RESULTS	16
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	16
5.1.1 Antenna Requirement	16
5.1.2 Peak Output Power	17
5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth.....	20
5.1.4 Power Spectral Density.....	21
5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100 kHz Bandwidth.....	22
5.1.6 Radiated Spurious Emissions and Band Edges	23
5.2 MAINS EMISSION	28
5.2.1 Mains Conducted Emission.....	28

Prüfbericht - Nr.: CN22U5UZ (P15C-WiFi) 001
Test Report No.

Seite 4 von 29
Page 4 of 29

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: CN22U5UZ (P15C-WiFi) 001
Test Report No.

Seite 5 von 29
Page 5 of 29

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN22U5UZ (P15C-WiFi) 001	Original Release	2022-06-20

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 226631
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.53 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.50 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a DK9186. It contains a WLAN compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	DK9186
Type Identification	DK9186
FCC ID	SZY-DK9186

Technical Specification of EUT

Item	EUT information
Operating Frequency	2412 MHz ~ 2462 MHz
Channel Number	802.11b/g/n HT20: 11
Data Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to MCS7
Operation Voltage	5 Vdc
Modulation	DSSS (DBPSK, DQPSK, CCK) OFDM (BPSK, QPSK, 16QAM, 64QAM)
Maximum Output Power (mW)	802.11b: 108.39 802.11g: 341.19 802.11n HT20: 343.56
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

802.11b		802.11g		802.11n HT20	
Channel	Power Setting	Channel	Power Setting	Channel	Power Setting
1	89	1	104	1	104
6	88	6	104	6	104
11	88	11	103	11	104

4.2 Carrier Frequency and Channel

802.11b, 802.11g and 802.11n HT20:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	AmebaZ2_mptool_1V3
---------------	--------------------

The samples were used as follows:

A003259552-004

A003259552-003

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Z-plane**.
2. "-" means no effect.

Antenna Port Conducted Measurement

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	1.0
-	802.11g	1 to 11	1, 6, 11	6.0
-	802.11n HT20	1 to 11	1, 6, 11	MCS0

Radiated Spurious Emissions (Above 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	1.0
-	802.11g	1 to 11	1, 6, 11	6.0
-	802.11n HT20	1 to 11	1, 6, 11	MCS0

Radiated Spurious Emissions (Below 1 GHz)

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11n HT20	1 to 11	11	MCS0

Mains Conducted Emission

☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11n HT20	1 to 11	11	MCS0

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	23-23.8 °C	56-58.3 %	Andy Chen
Radiated Spurious Emissions above 1 GHz	22.9-24.8 °C	53-55 %	Ivan Chiang
Radiated Spurious Emissions below 1 GHz	22.9-24.8 °C	53-55 %	Ivan Chiang
Mains Conducted Emission	21.9 °C	59 %	Ray Huang

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None

Support Unit


Support Unit								
No	Description	Brand	Model	S/N	Shielded	Ferrite Core (Qty)	Length (cm)	Remark
A	Uart	MODULES	CP2102	N/A	-	-	-	Radiated
B	Fixture Cable	Dexatek	Dexatek-02	N/A	NO	NO	17	
1	NB	HP	15s-du0007TX	CND93662VF	-	-	-	
2	USB Cable	TUV-001	TUV-001	N/A	YES	NO	300	
3	USB Cable	TUV-002	TUV-002	N/A	YES	NO	200	
A	Uart	MODULES	CP2102	N/A	-	-	-	Mains Conducted
B	Fixture Cable	Dexatek	Dexatek-02	N/A	NO	NO	17	
1	Adapter	HP	PPP009D	N/A	YES	NO	179	
2	Notebook	Lenovo	81BL	MP1DCD6Y	-	-	-	
3	USB to Micro	TUV	TUV-01	N/A	NO	NO	100	

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

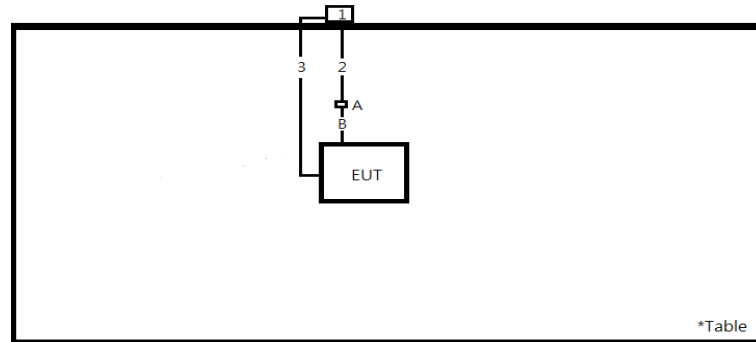

<Mains Conducted Emission mode>

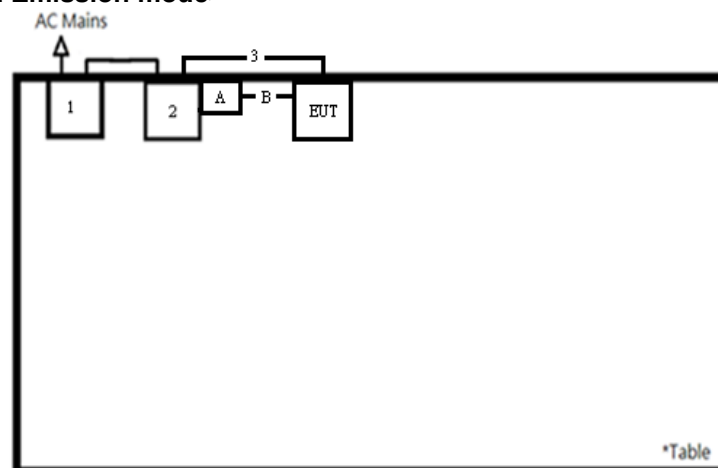

4.6 Duty Cycle of Test Signal

Mode	On + Off Time (ms)	On Time (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11b	1.00	1.00	100.00	0.00
802.11g	1.00	1.00	100.00	0.00
802.11n HT20	1.00	1.00	100.00	0.00



5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 2.20 dBi. The antenna is a PCB antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.


Refer to EUT photo for details.

5.1.2 Peak Output Power

Limit 1 watt (30 dBm)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2022/3/15	2023/3/14	2022/5/16	2022/5/31
Power Sensor	Anritsu	MA2411B	1725269	2022/3/15	2023/3/14	2022/5/16	2022/5/31

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result

Peak Output Power

<802.11b>

Channel	Channel Frequency (MHz)	Peak Output Power		Limit (dBm)
		(dBm)	(mW)	
1	2412	20.35	108.39	30
6	2437	20.28	106.66	30
11	2462	20.31	107.40	30

<802.11g>

Channel	Channel Frequency (MHz)	Peak Output Power		Limit (dBm)
		(dBm)	(mW)	
1	2412	25.18	329.61	30
6	2437	25.33	341.19	30
11	2462	25.26	335.74	30

<802.11n HT20>

Channel	Channel Frequency (MHz)	Peak Output Power		Limit (dBm)
		(dBm)	(mW)	
1	2412	25.17	328.85	30
6	2437	25.23	333.43	30
11	2462	25.36	343.56	30

Average Power**<802.11b>**

Channel	Channel Frequency (MHz)	Average Power	
		(dBm)	(mW)
1	2412	17.78	59.98
6	2437	17.71	59.02
11	2462	17.76	59.70

<802.11g>

Channel	Channel Frequency (MHz)	Average Power	
		(dBm)	(mW)
1	2412	17.71	59.02
6	2437	17.77	59.84
11	2462	17.75	59.57

<802.11n HT20>


Channel	Channel Frequency (MHz)	Average Power	
		(dBm)	(mW)
1	2412	17.61	57.68
6	2437	17.70	58.88
11	2462	17.78	59.98

5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth

Limit The minimum 6 dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/5/16	2022/5/31

Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

Test Results

Please refer to Appendix A.


5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/5/16	2022/5/31

Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Results

Please refer to Appendix A.


5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100 kHz Bandwidth

Limit

20 dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23	2022/5/16	2022/5/31

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

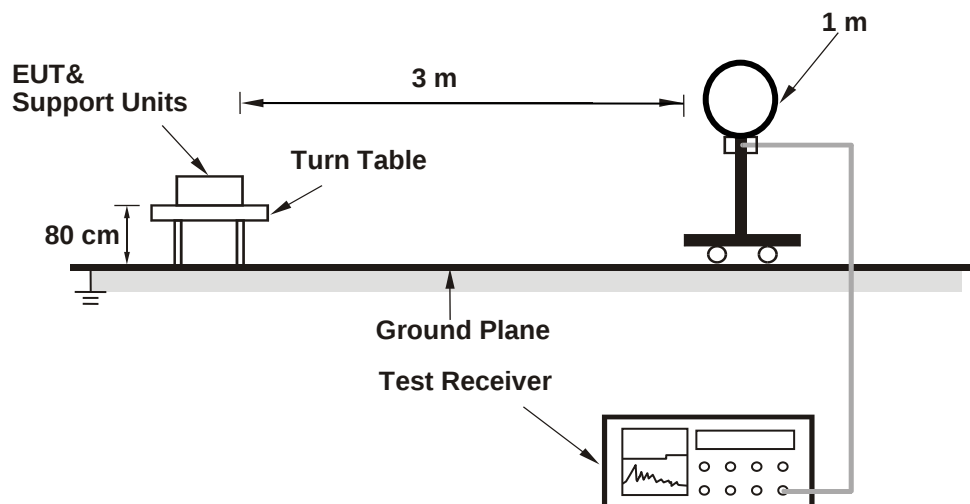

<Radiated Emissions 30 MHz to 1 GHz>

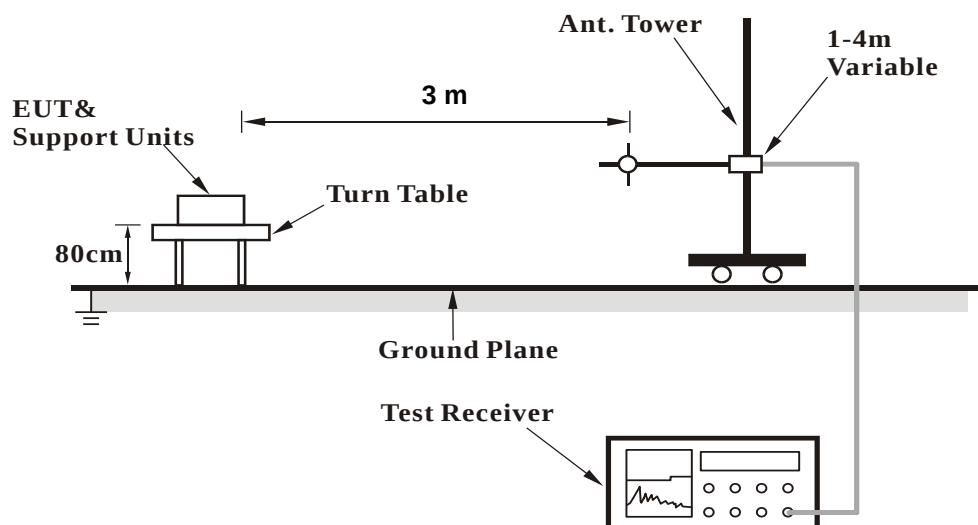

<Radiated Emissions above 1 GHz>

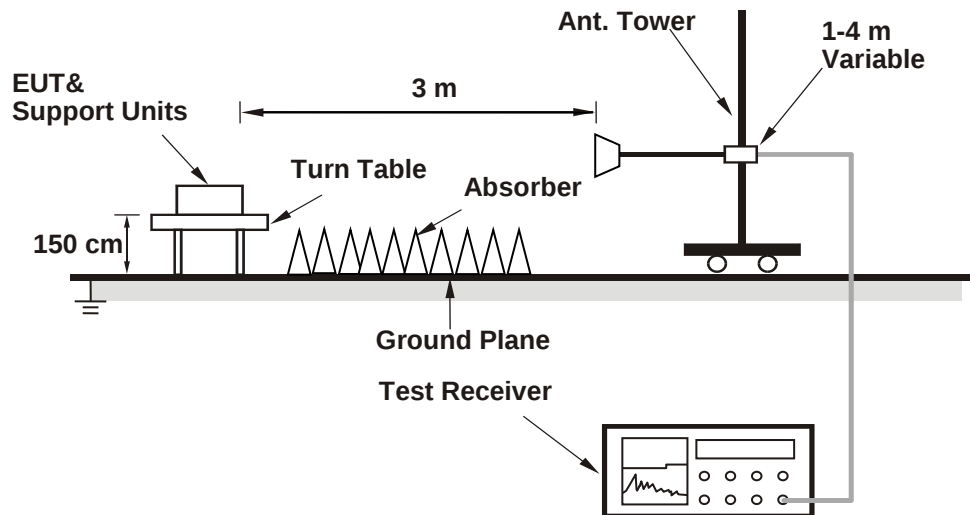

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Above 1 GHz					
Signal Analyzer	R&S	FSV40	101512	2022/2/24	2023/2/23
Horn Antenna	ETS-Lindgren	3117	00218929	2021/11/25	2022/11/24
HF-AMP + AC source	EMCI	EMC051845SE	980635	2022/1/20	2023/1/19
HF-AMP + AC source	EMCI	EMC184045SE	980656	2022/1/20	2023/1/19
Horn Antenna	SCHWARZBECK	BBHA 9170	00890	2022/5/6	2023/5/5
30 MHz ~ 1 GHz					
Receiver	R&S	ESR7	102109	2022/2/25	2023/2/24
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2022/4/6	2023/4/5
LF-AMP	Agilent	8447D	2727A05146	2022/2/16	2023/2/15
Below 30 MHz					
Receiver	R&S	ESR7	102109	2022/2/25	2023/2/24
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2021/12/8	2022/12/7

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.

Prüfbericht - Nr.: CN22U5UZ (P15C-WiFi) 001
Test Report No.

Seite 27 von 29
Page 27 of 29

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

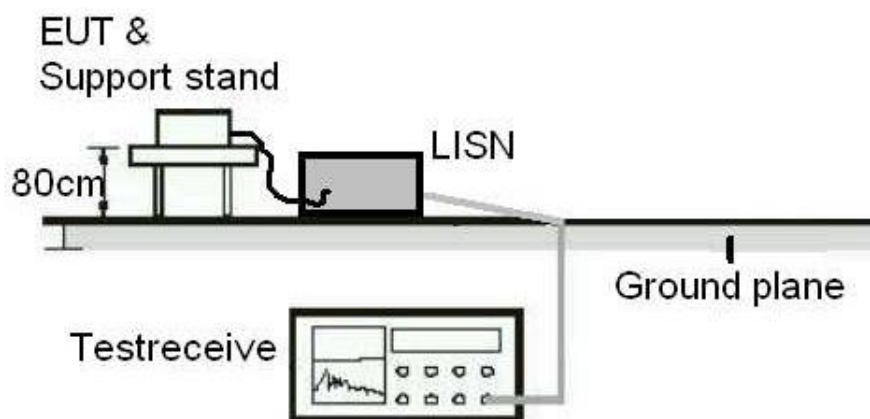

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Two-Line V-Network	Rohde & Schwarz	ENV216	101938	2021/9/23	2022/9/22
EMI Test Receiver	R&S	ESCI	1816063	2021/11/15	2022/11/14

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results

Please refer to Appendix B.


Appendix A: Test Results of Conducted Test

Test Result of 6 dB Bandwidth

802.11b


Channel	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
Low Channel	2412	9.07	> 0.5	Pass
Middle Channel	2437	9.07	> 0.5	Pass
High Channel	2462	9.07	> 0.5	Pass

Low Channel

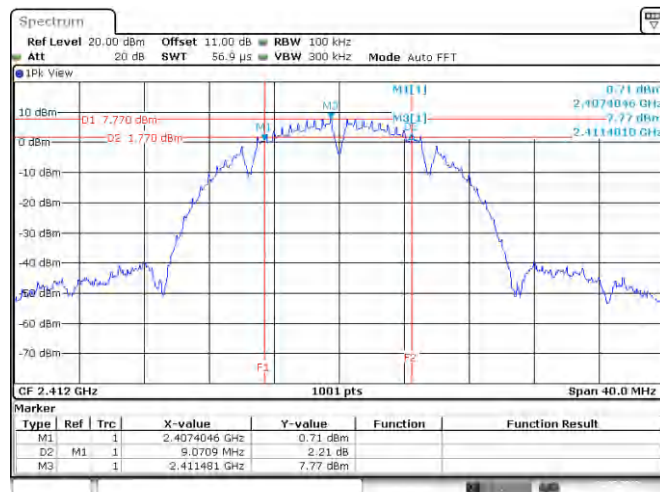


Date: 31 MAY 2022 11:49:32

Middle Channel

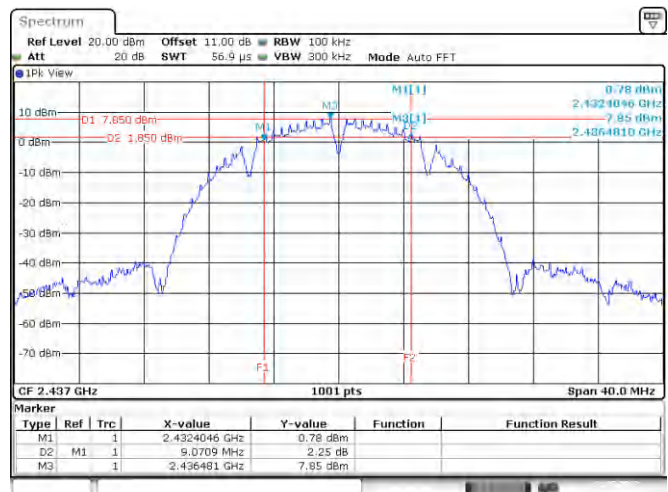

Date: 31 MAY 2022 11:33:23


High Channel

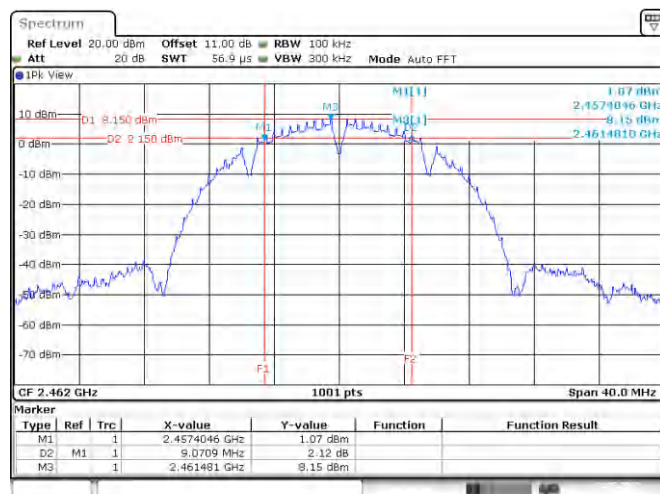


Date: 31 MAY 2022 11:37:49

802.11g


Channel	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
Low Channel	2412	16.54	> 0.5	Pass
Middle Channel	2437	16.54	> 0.5	Pass
High Channel	2462	16.54	> 0.5	Pass

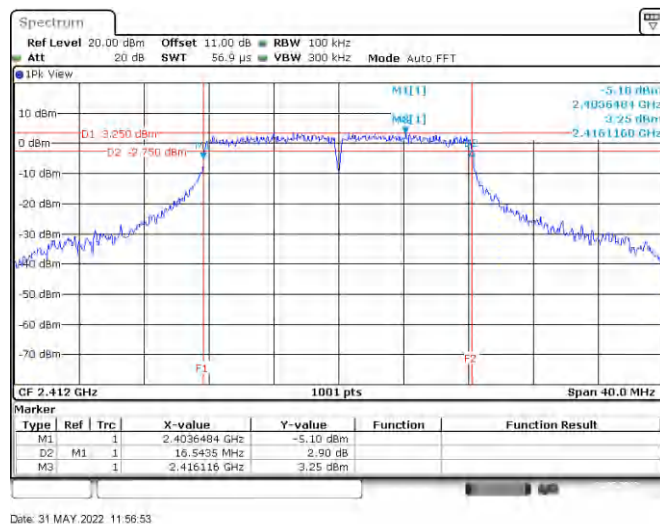Low Channel


Date: 31 MAY 2022 11:56:53

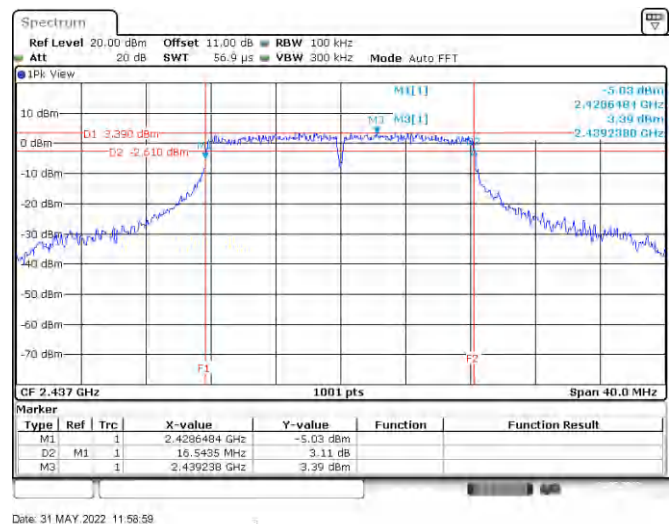Middle Channel


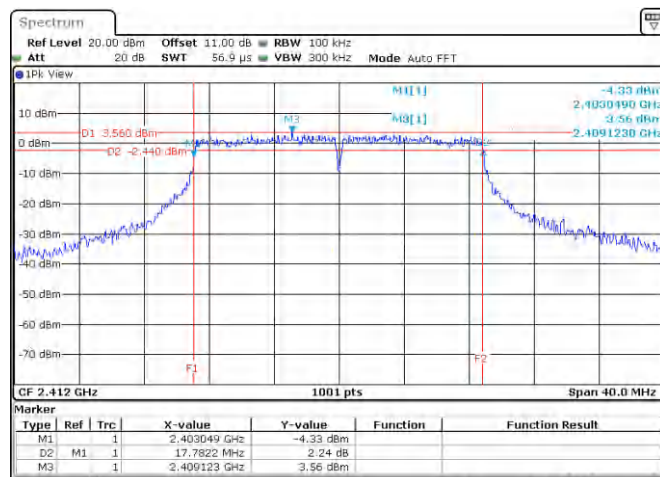
Date: 31 MAY 2022 11:58:59

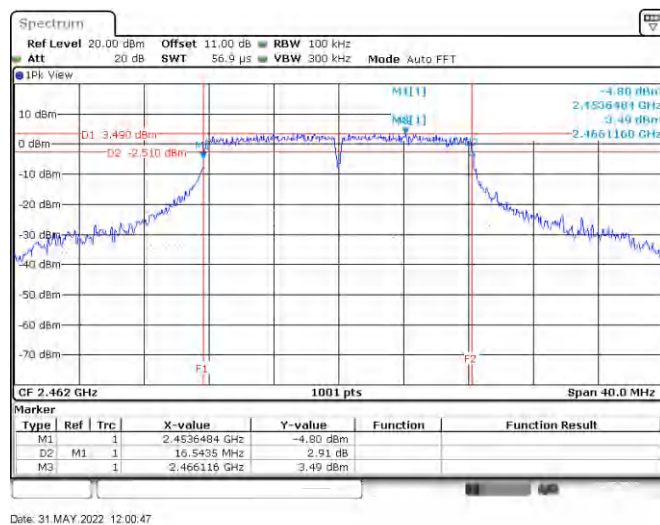High Channel


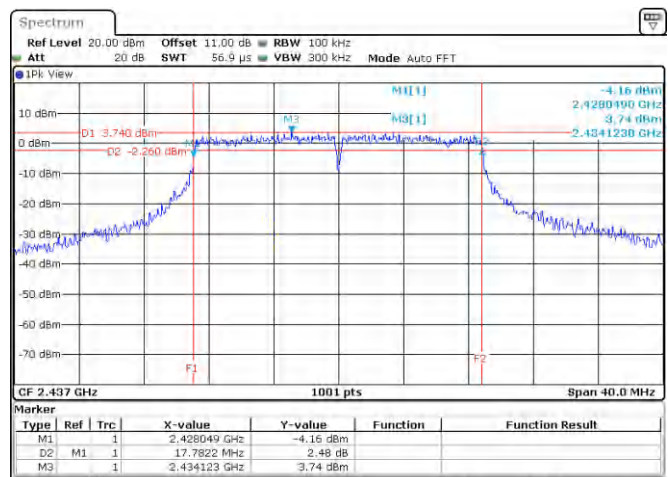
Date: 31 MAY 2022 12:00:47

802.11n HT20


Channel	Channel Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
Low Channel	2412	17.78	> 0.5	Pass
Middle Channel	2437	17.78	> 0.5	Pass
High Channel	2462	17.78	> 0.5	Pass

Low Channel


Date: 31 MAY 2022 13:06:27

Middle Channel


Date: 31 MAY 2022 13:09:42

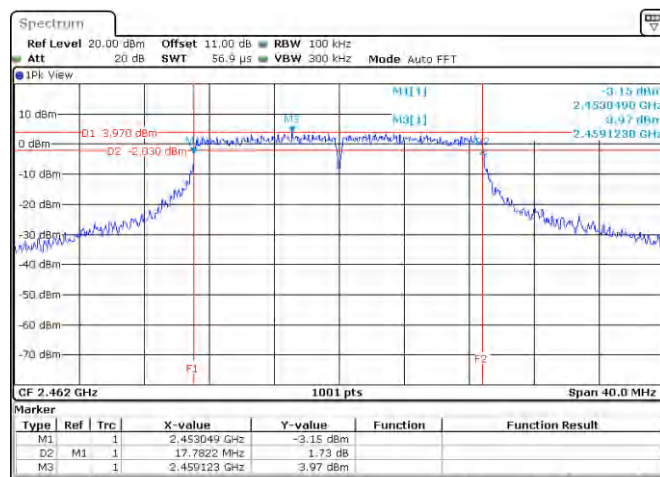High Channel


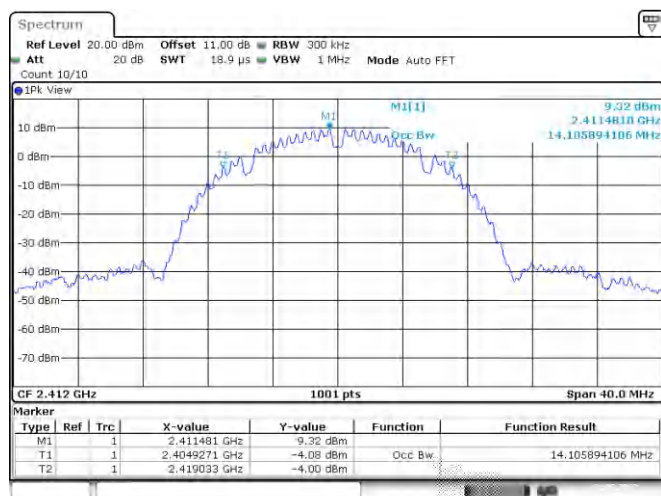
Date: 31 MAY 2022 13:11:27

Test Result of 99% Occupied Bandwidth

802.11b


Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2412	14.11
Middle Channel	2437	14.11
High Channel	2462	14.11

Low Channel




Date: 31.MAY.2022 11:49:46

Middle Channel

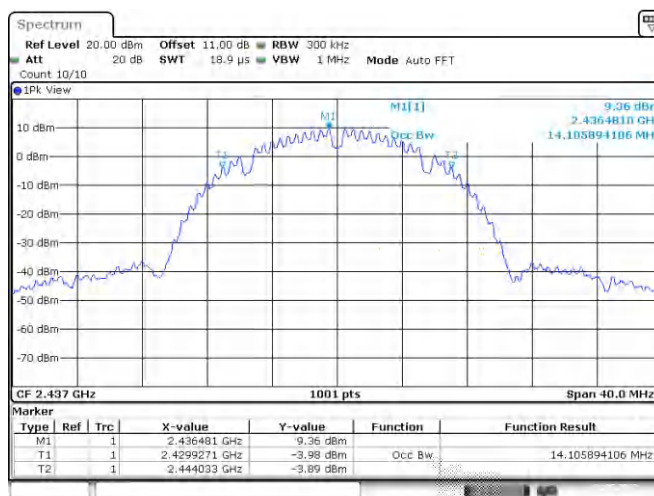

Date: 31.MAY.2022 11:34:22


High Channel

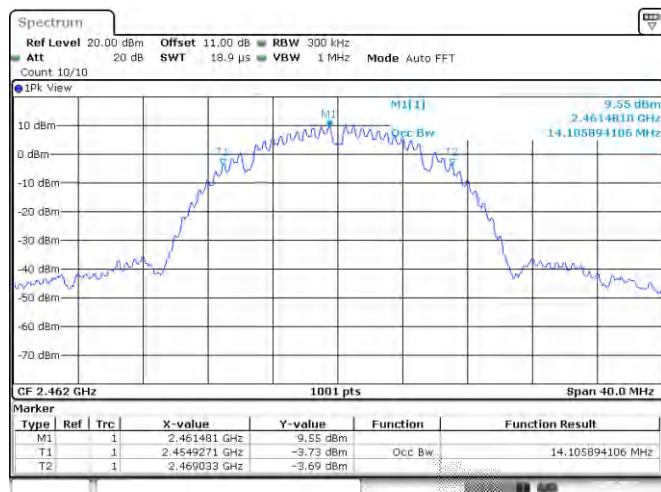

Date: 31.MAY.2022 11:38:41


802.11g

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2412	17.02
Middle Channel	2437	17.02
High Channel	2462	17.06

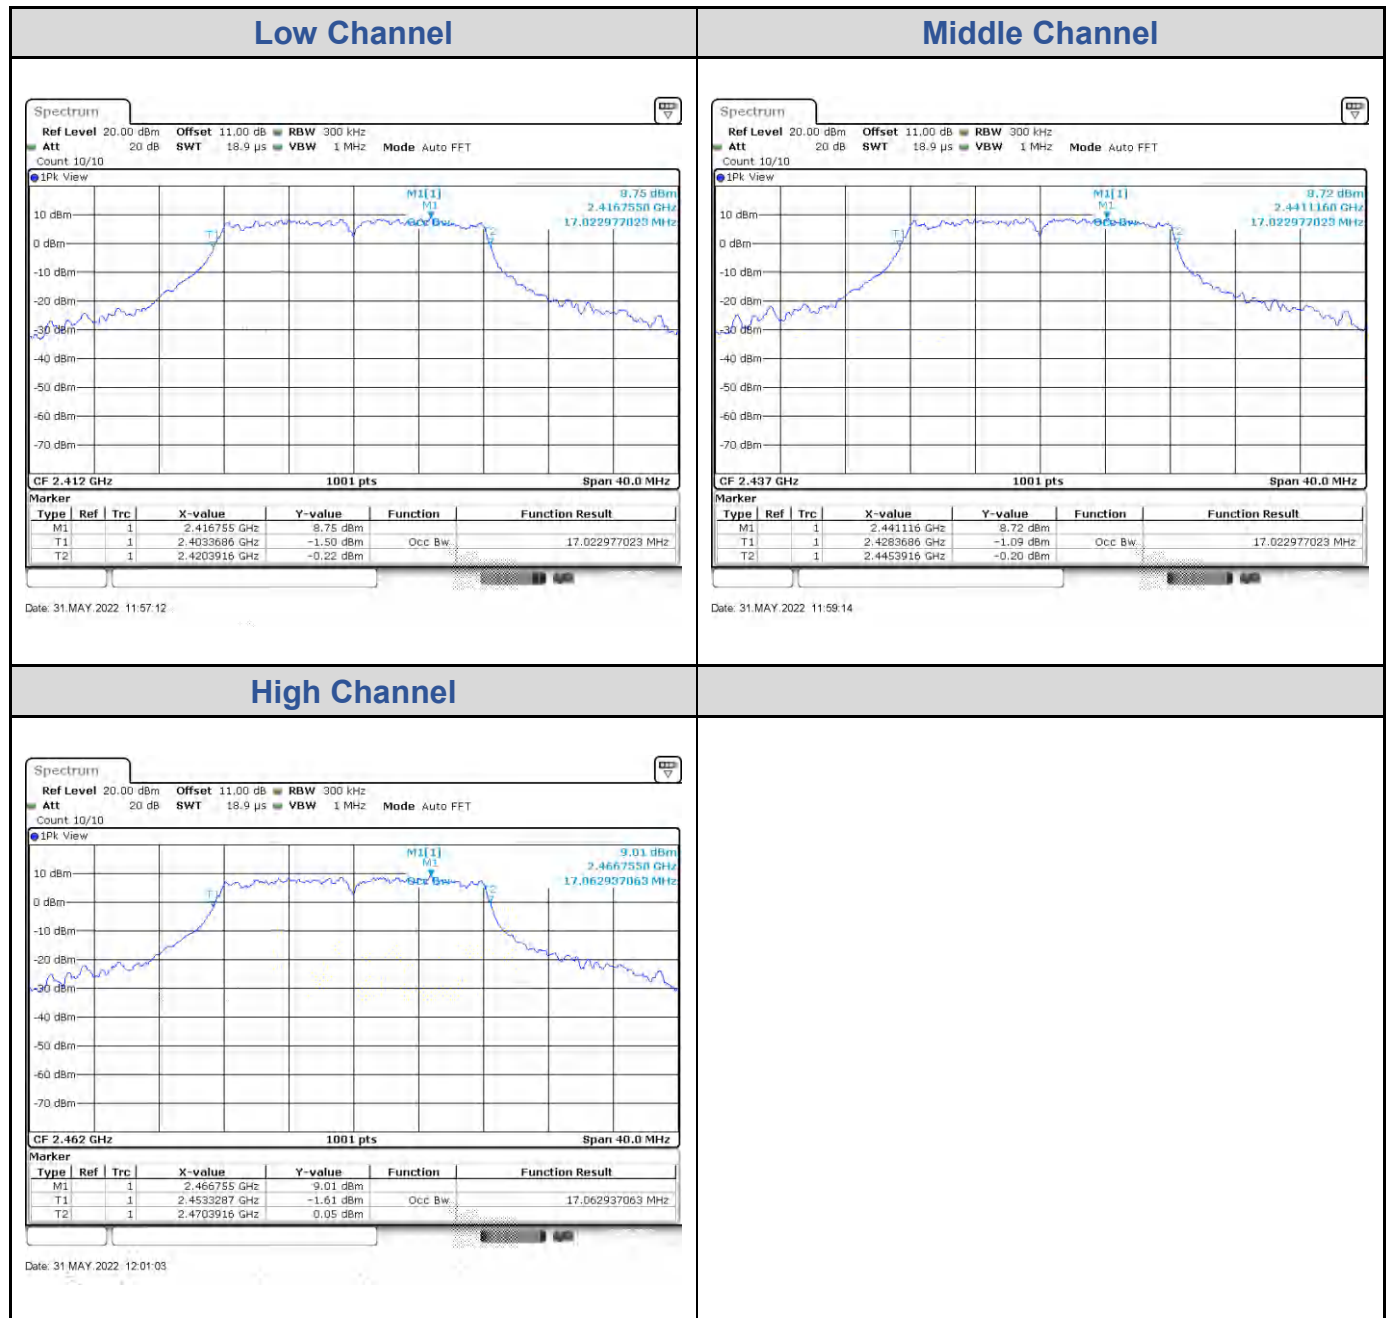

802.11n HT20

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2412	18.14
Middle Channel	2437	18.14
High Channel	2462	18.14

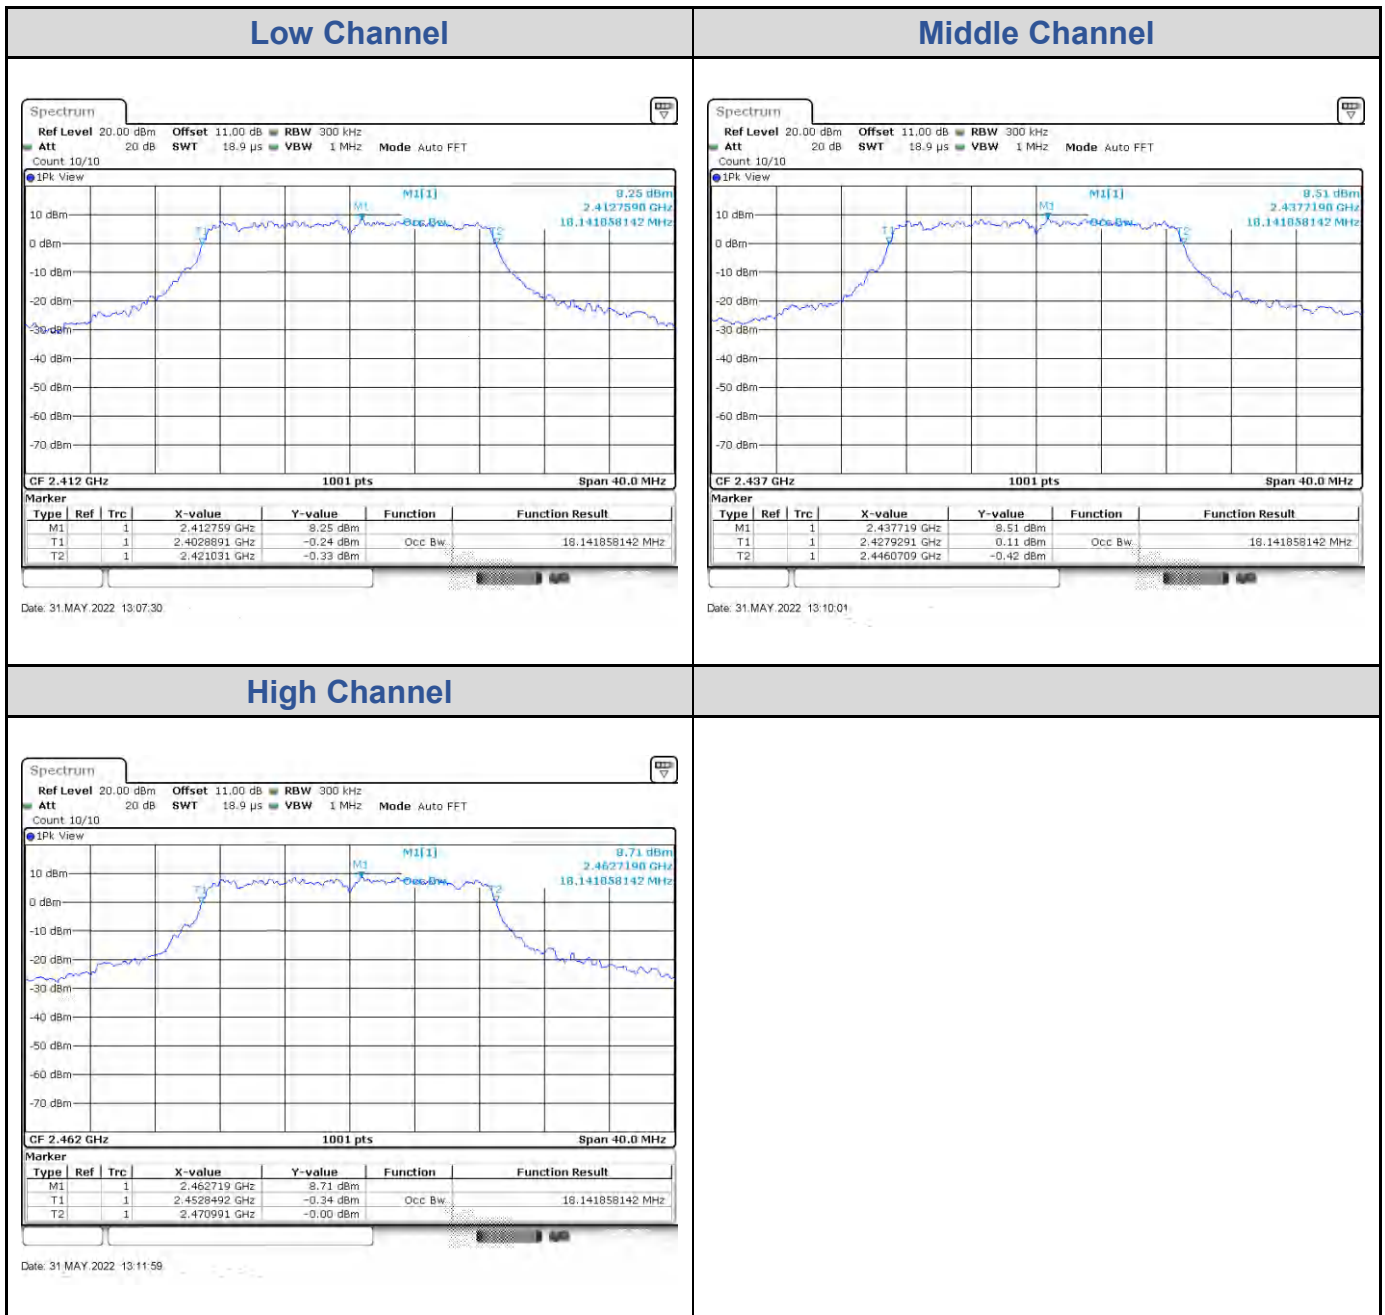


Test Result of Power Spectral Density

802.11b


Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)
Low Channel	2412	-12.73	8
Middle Channel	2437	-12.69	8
High Channel	2462	-12.50	8

Low Channel

Middle Channel

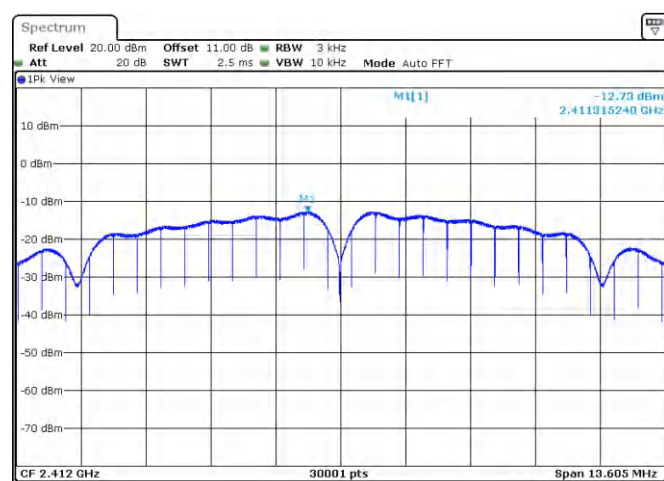


Date: 31.MAY.2022 11:49:57

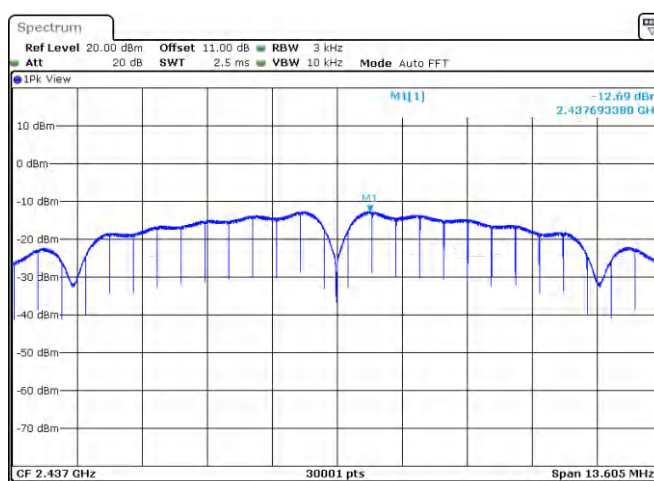

Date: 31.MAY.2022 11:34:32

High Channel

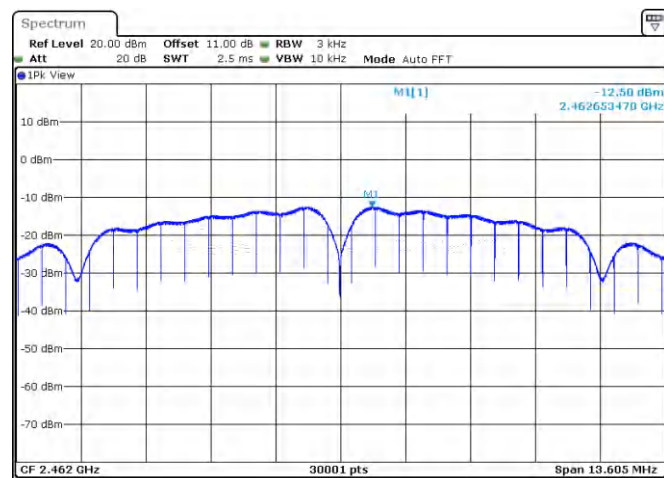


Date: 31.MAY.2022 11:38:51

802.11g


Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)
Low Channel	2412	-11.27	8
Middle Channel	2437	-10.98	8
High Channel	2462	-11.05	8

Low Channel

Middle Channel

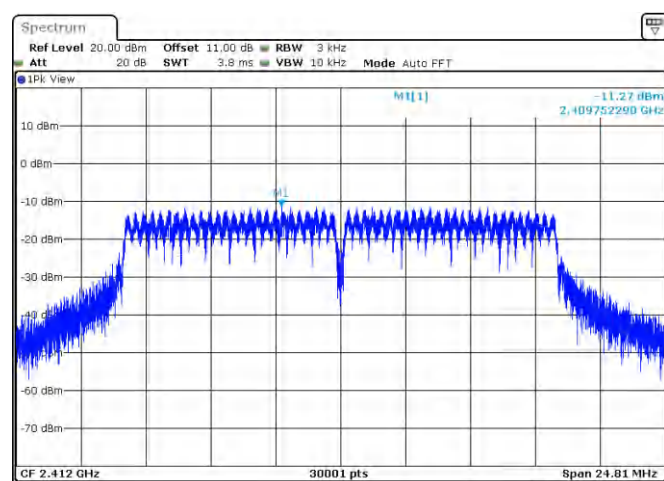


Date: 31.MAY.2022 11:57:23

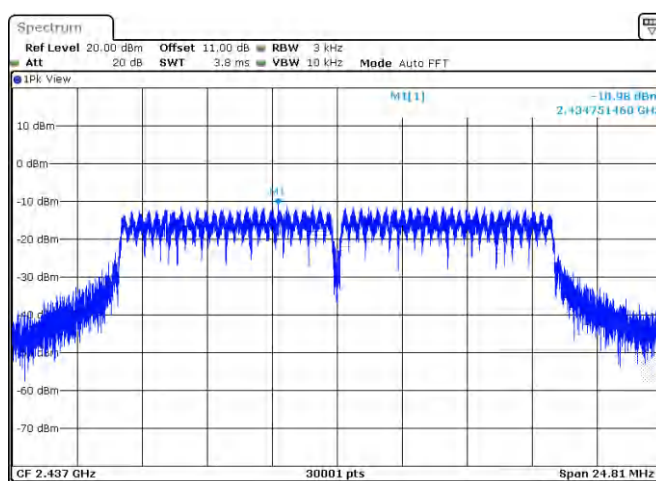

Date: 31.MAY.2022 11:59:24


High Channel

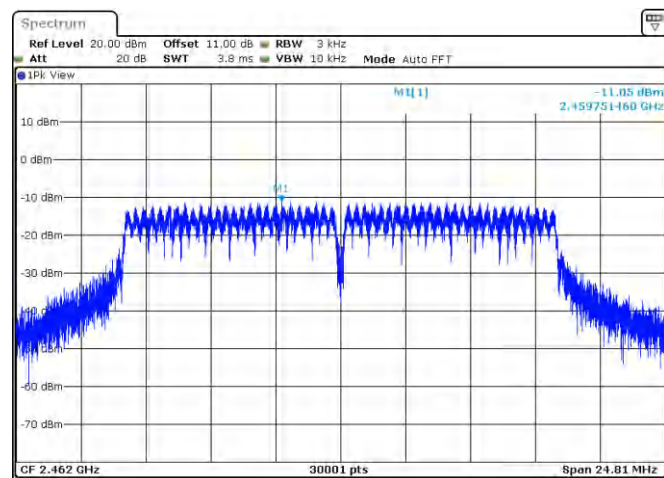

Date: 31.MAY.2022 12:01:13


802.11n HT20

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)
Low Channel	2412	-10.79	8
Middle Channel	2437	-10.50	8
High Channel	2462	-10.37	8

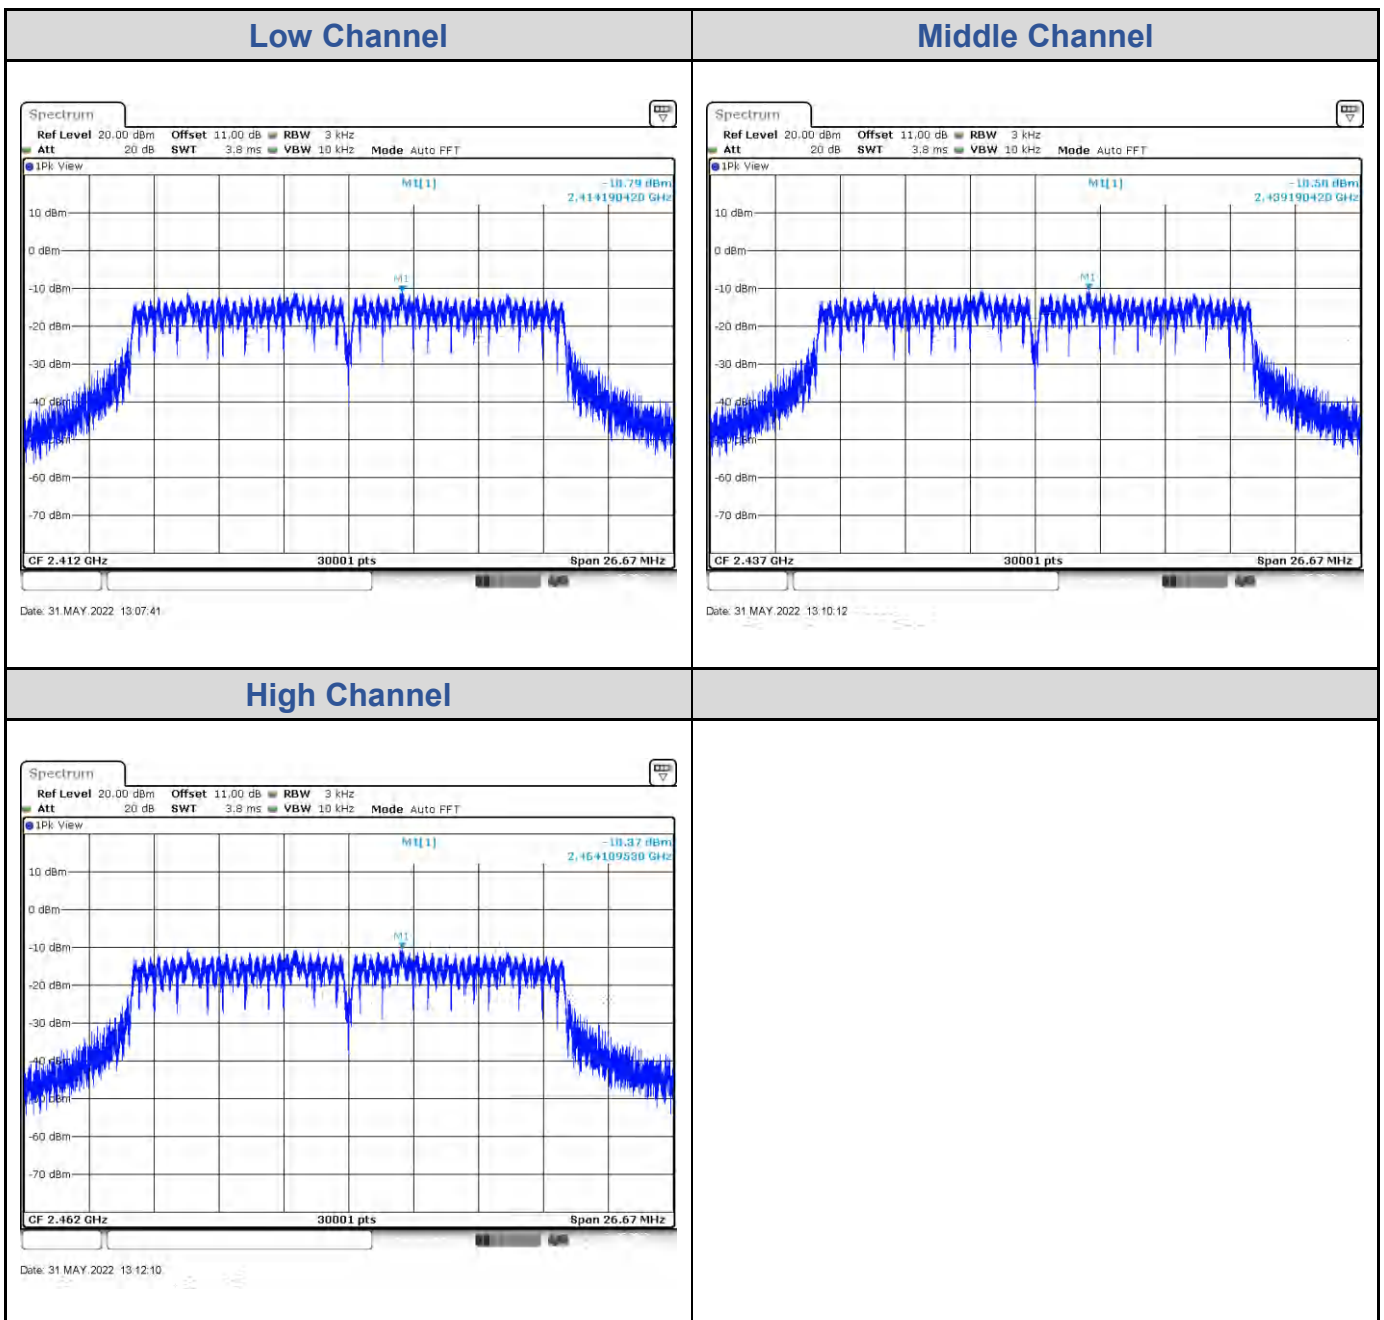

Test Result of Conducted Spurious Emissions



802.11b

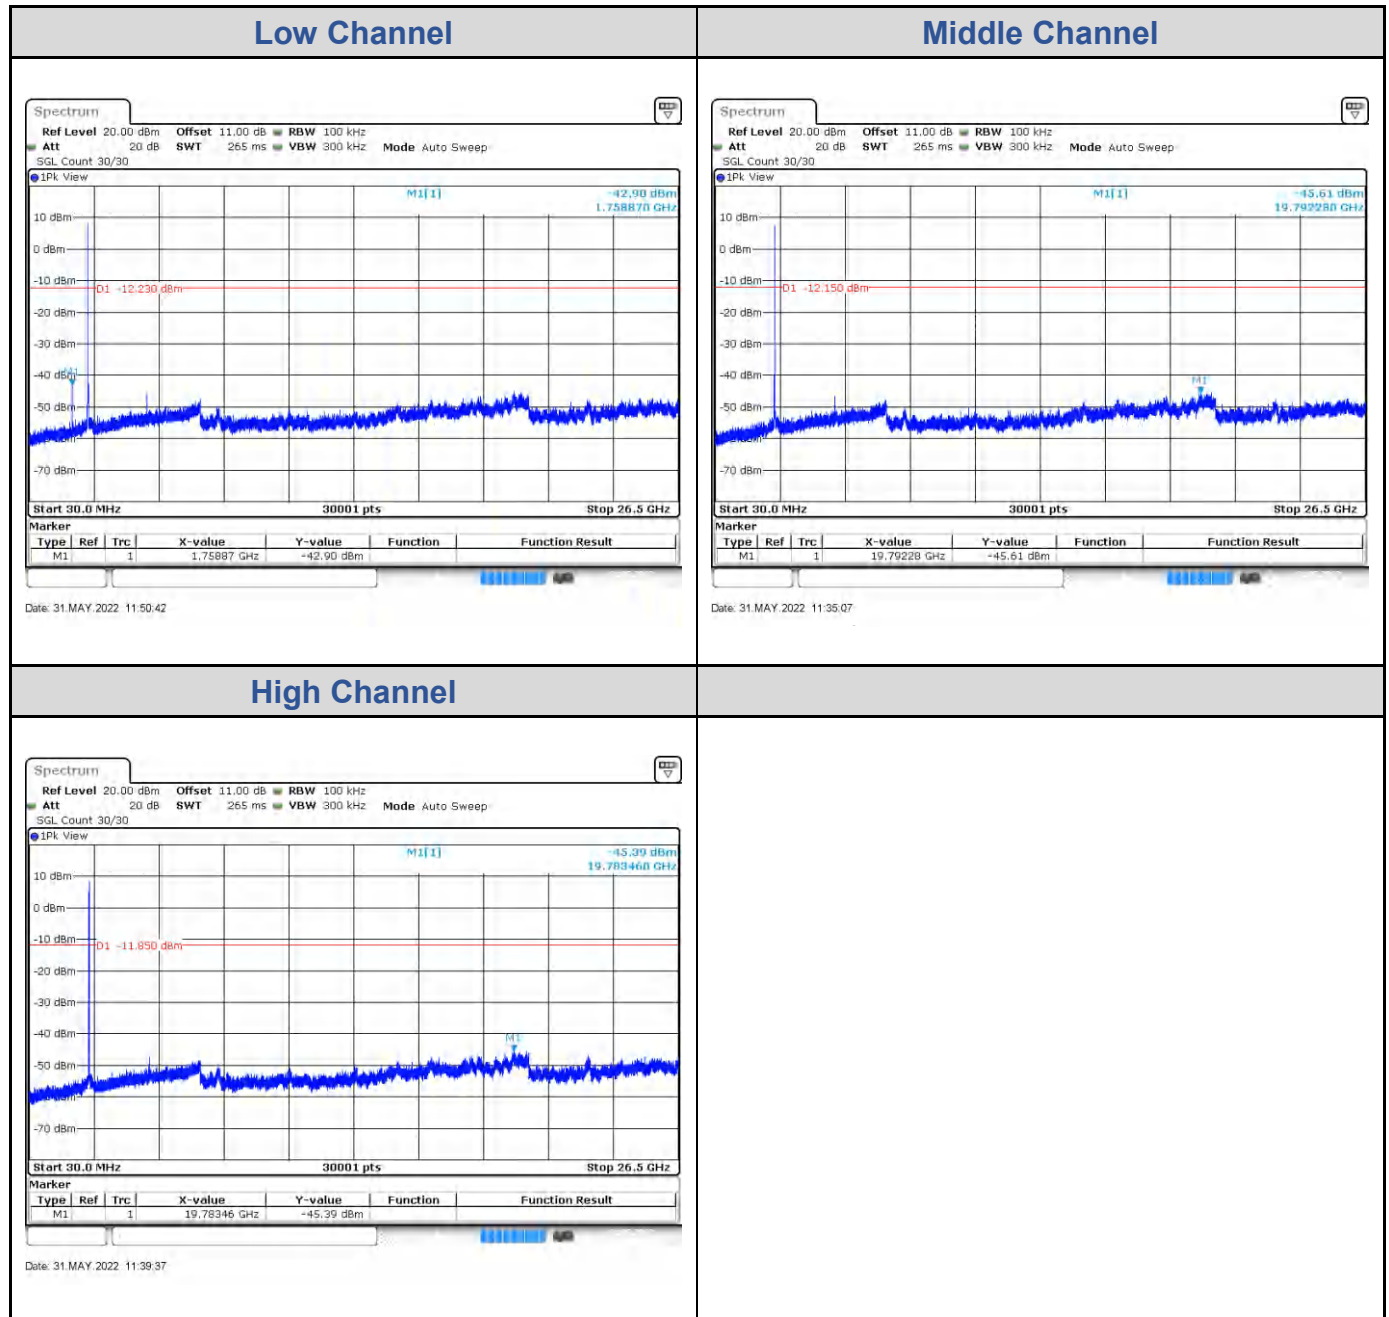


802.11g

Low Channel

Middle Channel

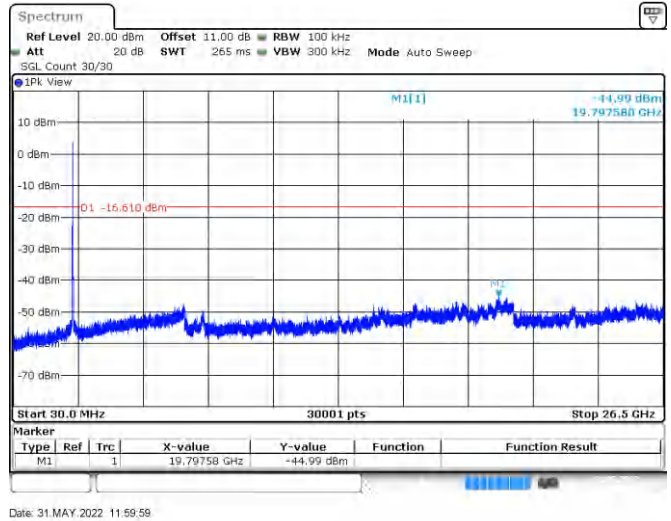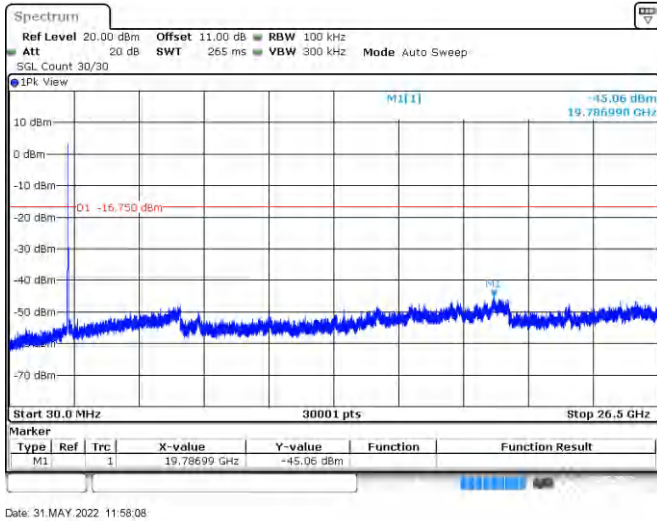


High Channel

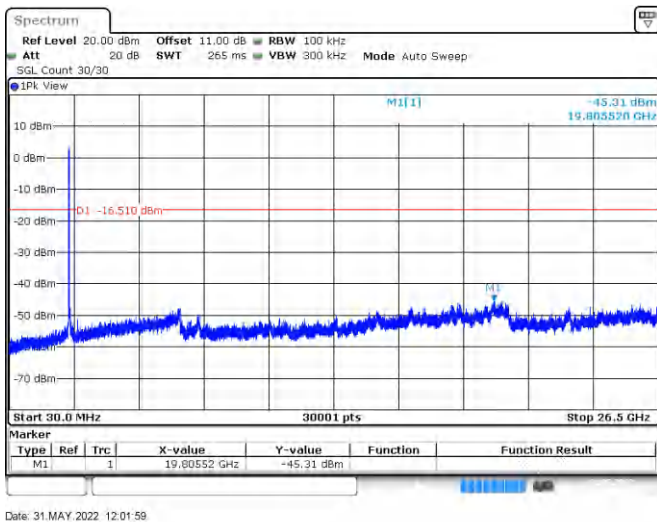


802.11n HT20


Low Channel

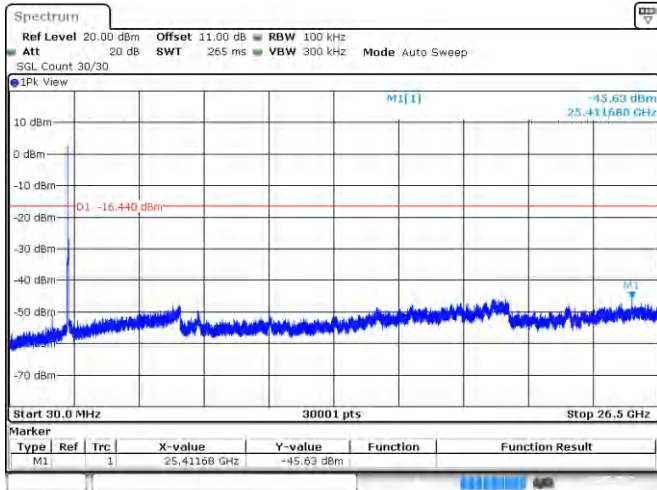

Middle Channel

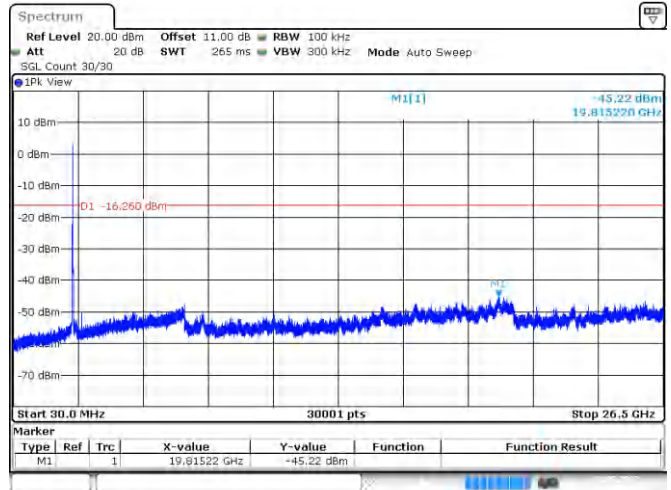


High Channel

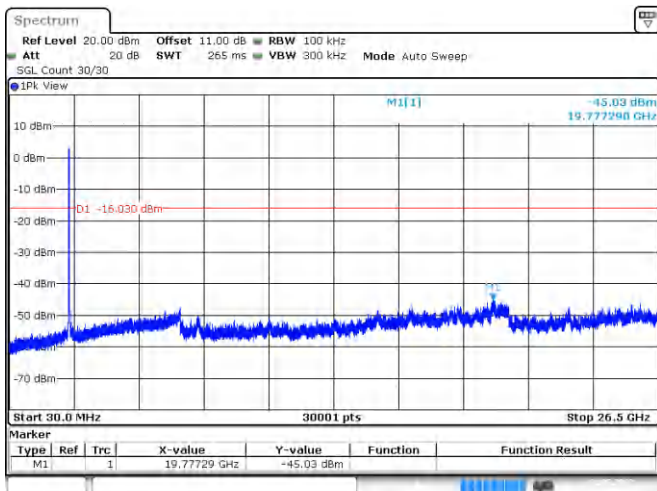


Test Result of Conducted Bandedge, Tx Mode

802.11b

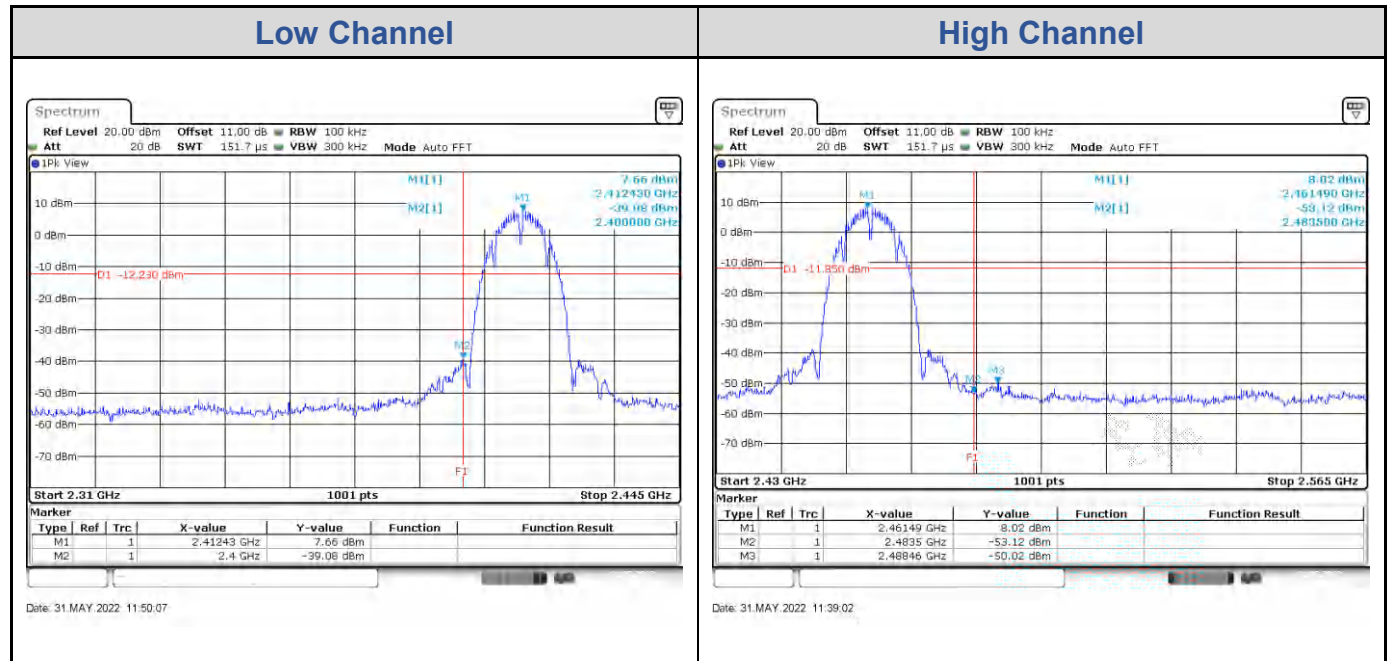


802.11g

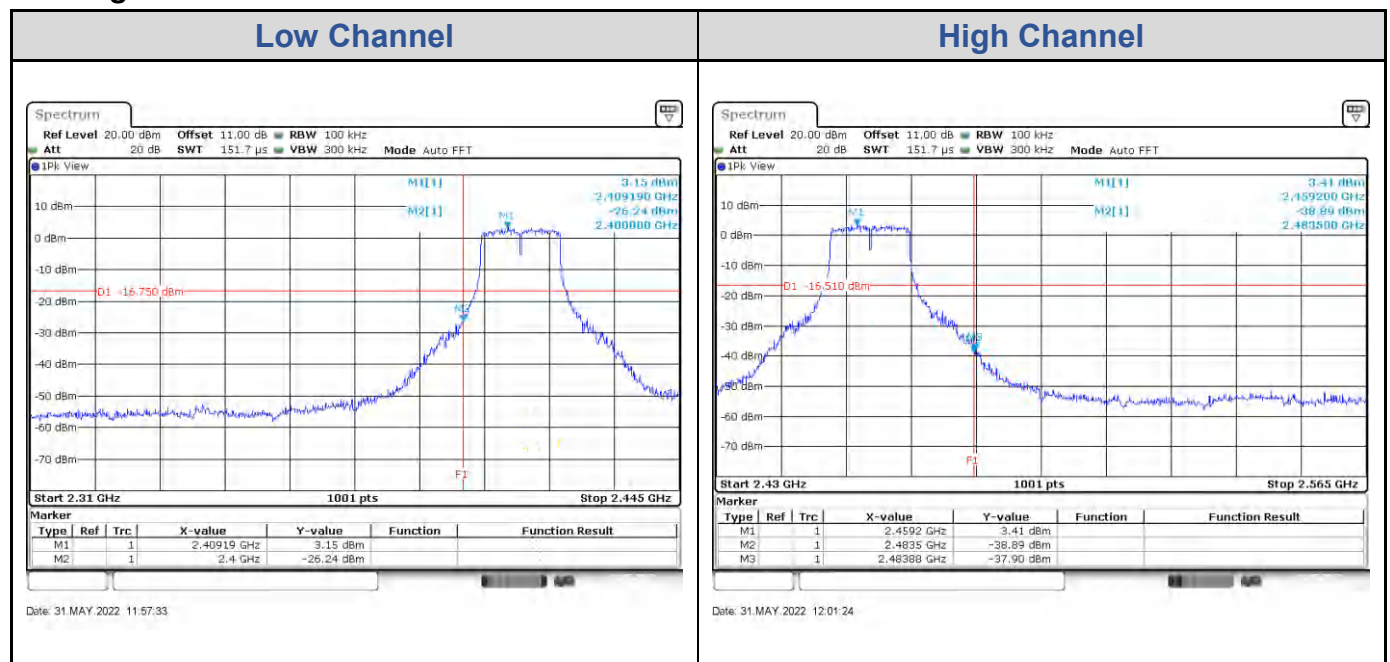


802.11n HT20

Low Channel

High Channel

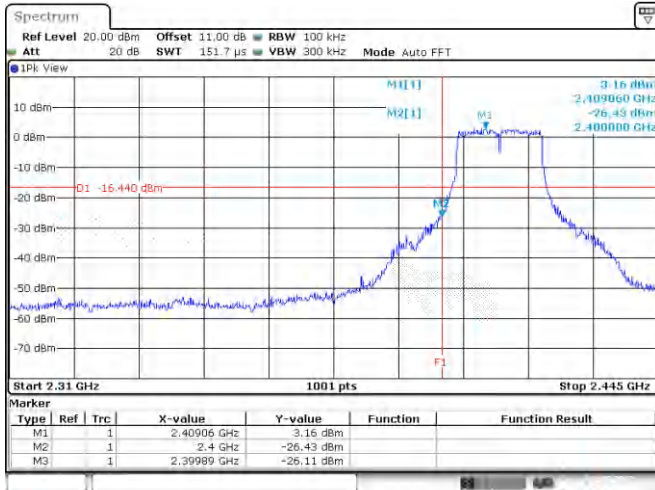

Date: 31 MAY 2022 13:07:51

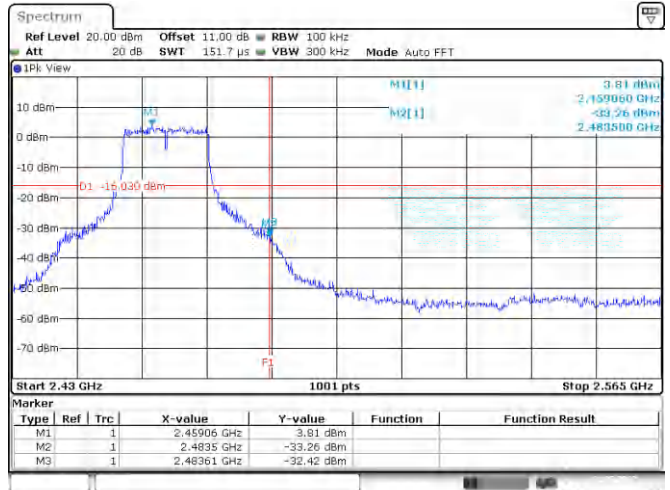

Date: 31 MAY 2022 13:12:20

Appendix B: Test Results of Radiated Spurious Emissions & Mains

Conducted Emission Test


Band Edges, 2.31GHz ~ 2.9GHz

802.11b

Low Channel (Horizontal) Peak



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

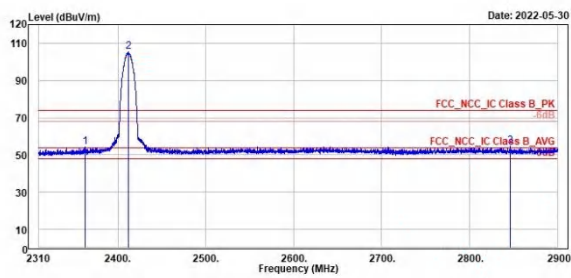


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2352.98	54.13	16.63	37.50	74.00	-19.87	247	262	Peak	Horizontal	
2 *	2412.00	105.26	67.63	37.63	74.00	31.26	247	262	Peak	Horizontal	
3	2846.31	54.55	16.51	38.04	74.00	-19.45	247	262	Peak	Horizontal	

Low Channel (Vertical) Peak



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

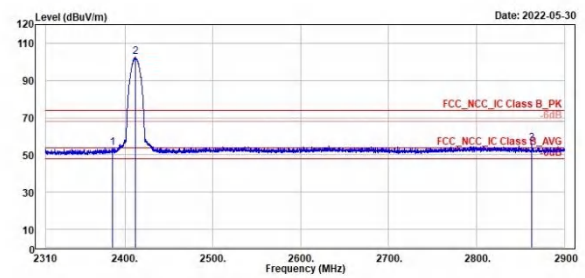


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2395.99	53.74	16.44	37.30	74.00	-20.26	350	301	Peak	Vertical	
2 *	2412.00	102.48	65.13	37.35	74.00	28.48	350	301	Peak	Vertical	
3	2862.36	55.93	17.75	38.18	74.00	-18.07	350	301	Peak	Vertical	

802.11b

Low Channel (Horizontal) Average



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

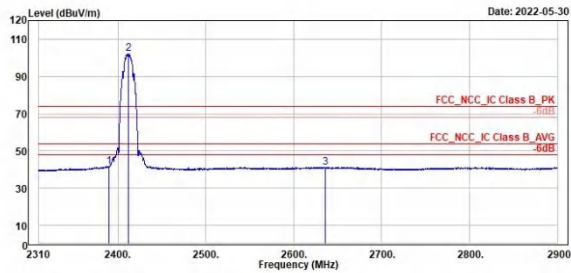


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2389.89	41.63	4.05	37.58	54.00	-12.37	247	262	Average	Horizontal	
2 *	2412.00	102.43	64.89	37.63	54.00	48.43	247	262	Average	Horizontal	
3	2635.56	41.28	3.09	38.19	54.00	-12.72	247	262	Average	Horizontal	

Low Channel (Vertical) Average





TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

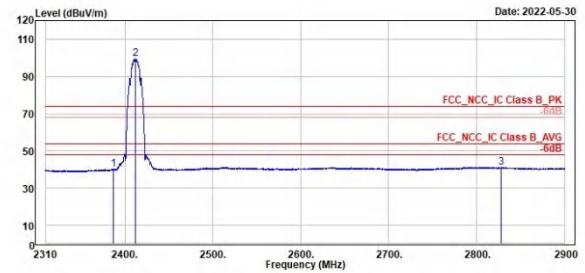


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2387.29	40.20	2.90	37.30	54.00	-13.80	350	301	Average	Vertical	
2 *	2412.00	99.58	62.23	37.35	54.00	45.58	350	301	Average	Vertical	
3	2828.02	41.18	2.97	38.21	54.00	-12.82	350	301	Average	Vertical	

802.11b

High Channel (Horizontal) Peak

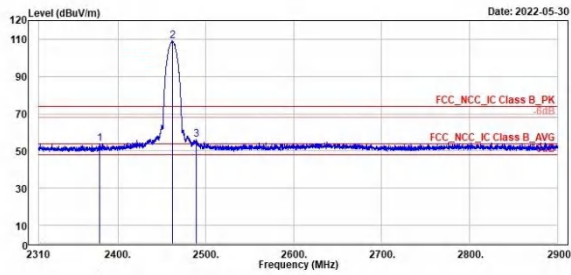

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	cm	deg			
1	2379.15	53.91	16.36	37.55	74.00	-20.09	239	261	Peak	Horizontal	
2 *	2462.00	109.18	71.54	37.64	74.00	35.18	239	261	Peak	Horizontal	
3	2489.48	56.27	18.71	37.56	74.00	-17.73	239	261	Peak	Horizontal	

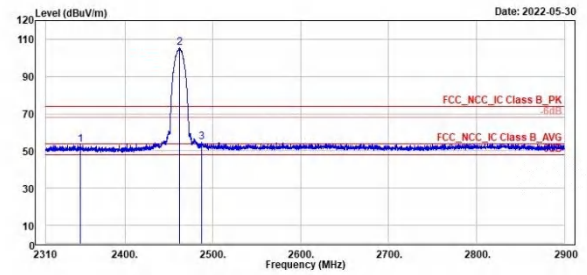


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	cm	deg			
1	2349.53	53.42	16.16	37.26	74.00	-20.58	379	301	Peak	Vertical	
2 *	2462.00	105.18	67.62	37.56	74.00	31.18	379	301	Peak	Vertical	
3	2487.12	54.58	16.84	37.74	74.00	-19.42	379	301	Peak	Vertical	

802.11g

Low Channel (Horizontal) Peak




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fongliang, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

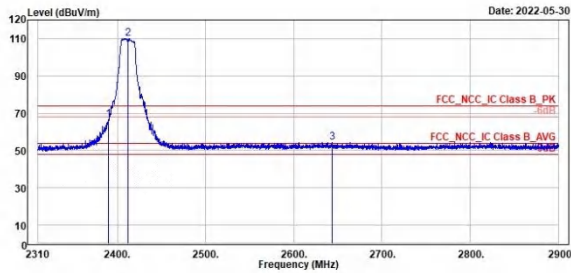


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2389.77	66.63	29.85	37.58	74.00	-7.37	247	262	Peak	Horizontal	
2 *	2412.00	109.98	72.35	37.63	74.00	35.98	247	262	Peak	Horizontal	
3	2644.06	54.44	16.24	38.20	74.00	-19.56	247	262	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fongliang, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

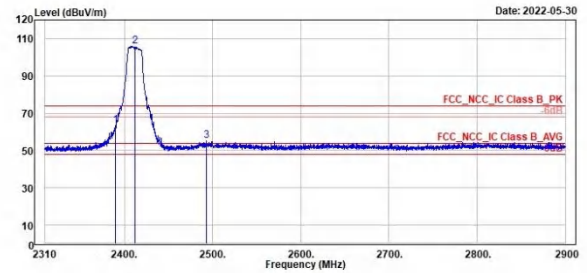

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2389.89	63.43	26.13	37.30	74.00	-10.57	358	304	Peak	Vertical	
2 *	2412.00	105.84	68.49	37.35	74.00	31.84	358	304	Peak	Vertical	
3	2492.90	55.15	17.37	37.78	74.00	-18.85	358	304	Peak	Vertical	

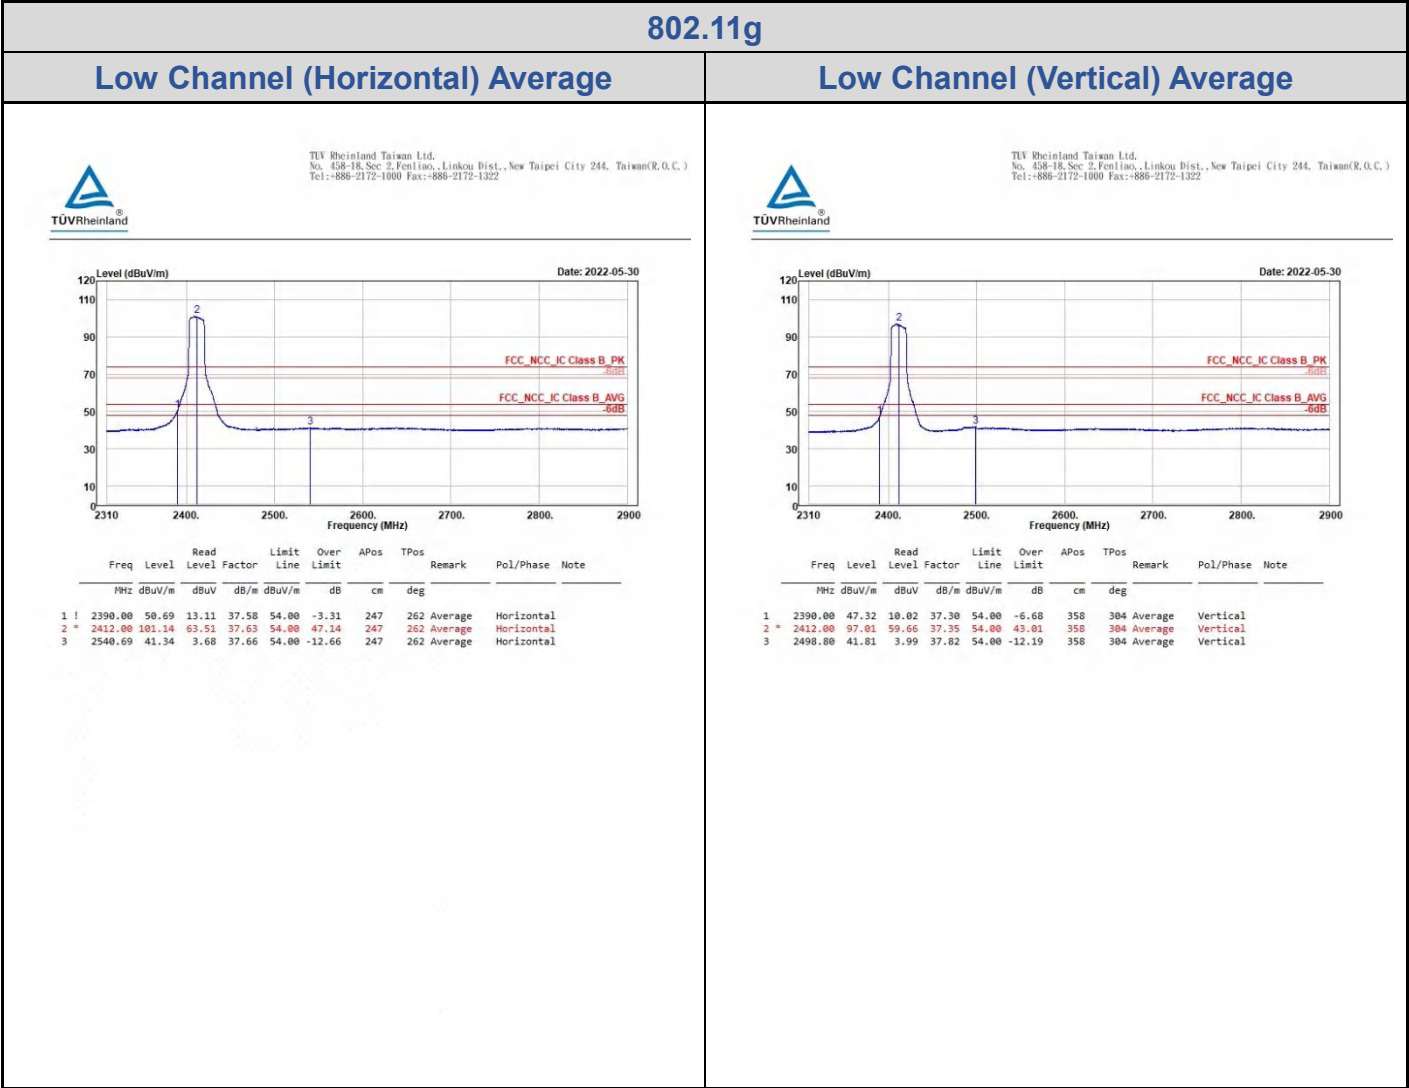


802.11g

High Channel (Horizontal) Peak




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

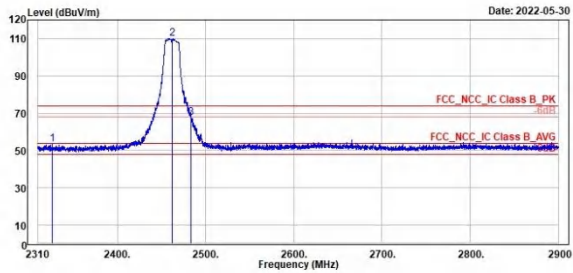

Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2325.93	53.16	15.78	37.38	74.00	-20.84	239	261	Peak	Horizontal		
2 *	2462.00	110.05	72.41	37.64	74.00	36.05	239	261	Peak	Horizontal		
3	2483.46	67.65	30.07	37.58	74.00	-6.35	239	261	Peak	Horizontal		



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

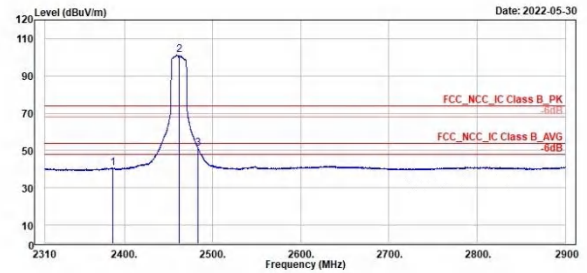


Peak	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2386.70	40.60	3.03	37.57	54.00	-13.40	239	261	Average	Horizontal		
2 *	2462.00	101.14	63.50	37.64	54.00	47.14	239	261	Average	Horizontal		
3 I	2483.46	51.01	13.43	37.58	54.00	-2.99	239	261	Average	Horizontal		

802.11g

High Channel (Horizontal) Average




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fongliang, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

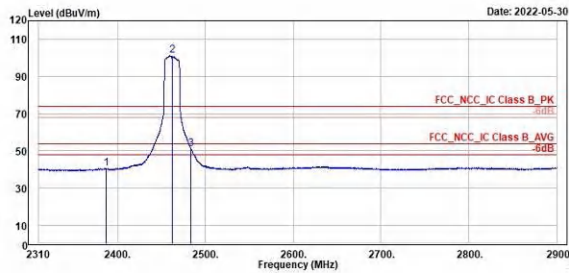


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	cm	deg			
1	2386.79	40.60	3.03	37.57	54.00	-13.40	239	261	Average	Horizontal	
2 *	2462.00	101.14	63.50	37.64	54.00	47.14	239	261	Average	Horizontal	
3 †	2483.46	51.01	13.43	37.58	54.00	-2.99	239	261	Average	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fongliang, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

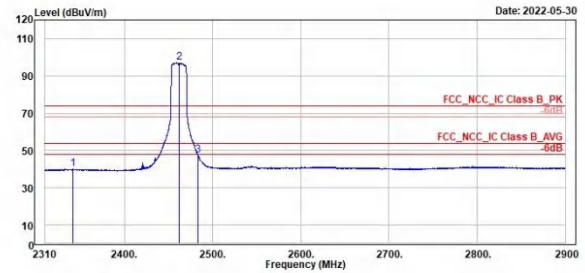

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	cm	deg			
1	2341.27	40.01	2.81	37.20	54.00	-13.99	379	301	Average	Vertical	
2 *	2462.00	97.10	59.54	37.56	54.00	43.10	379	301	Average	Vertical	
3	2483.58	47.59	9.88	37.71	54.00	-6.41	379	301	Average	Vertical	

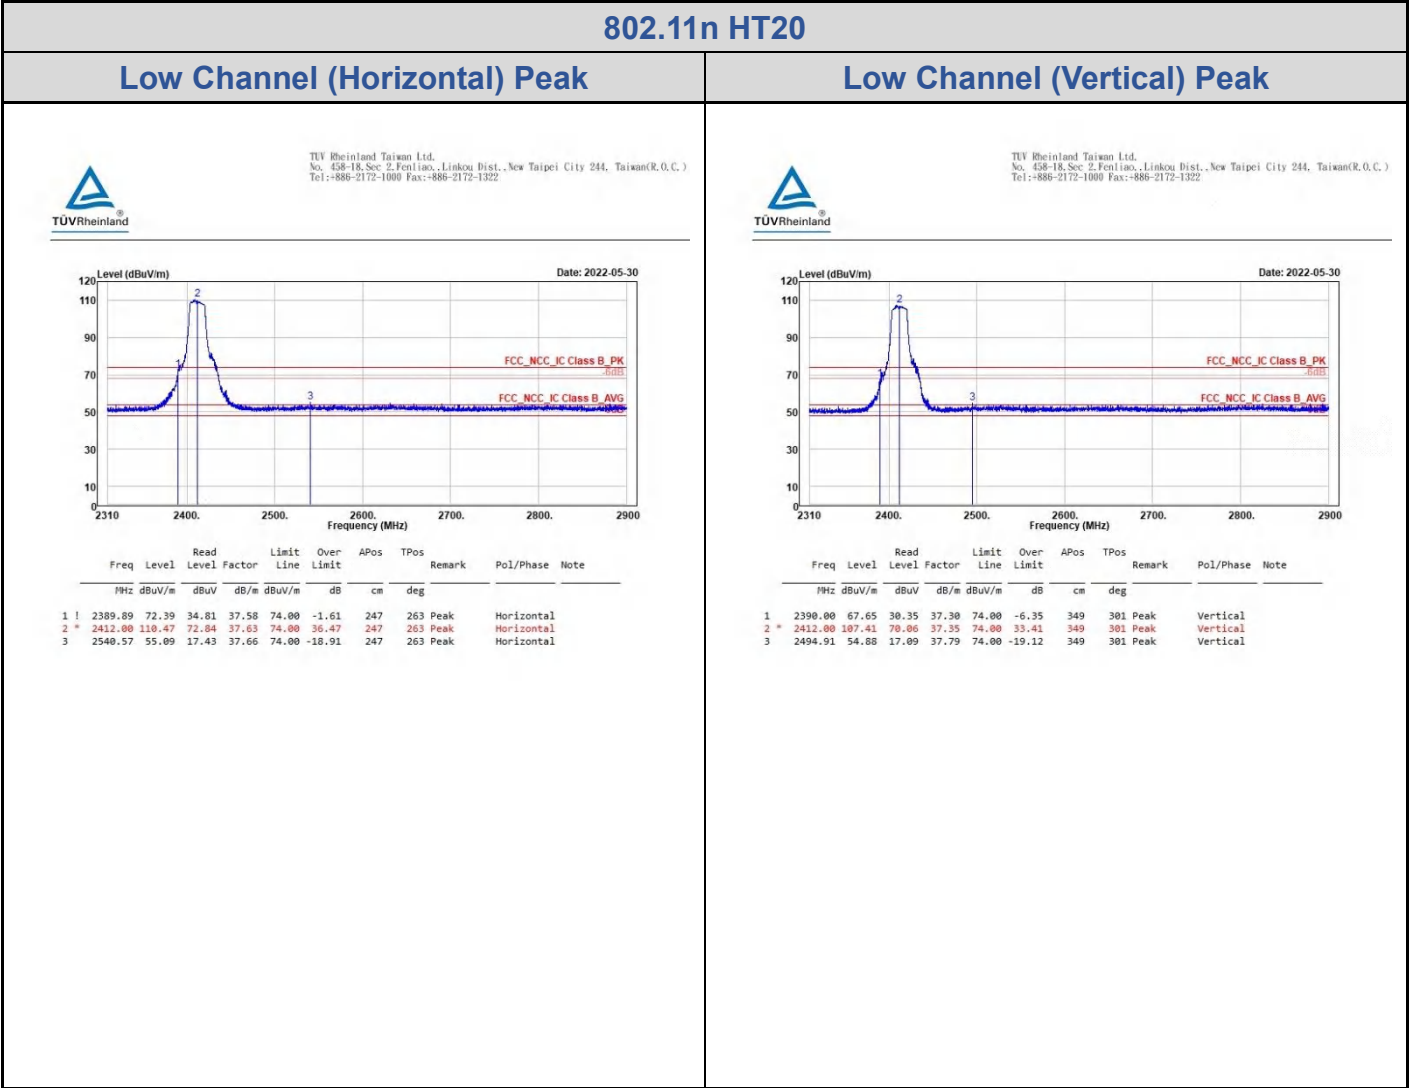


802.11n HT20

Low Channel (Horizontal) Average




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

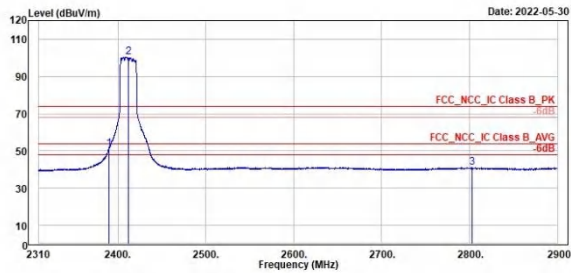

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2390.00	51.20	13.62	37.58	54.00	-2.80	247	263	Average	Horizontal	
2	2412.00	100.58	62.95	37.63	54.00	46.58	247	263	Average	Horizontal	
3	2892.89	41.28	3.21	38.07	54.00	-12.72	247	263	Average	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

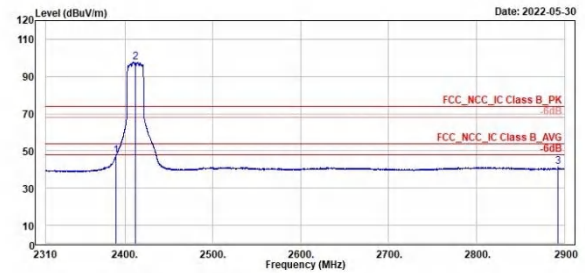


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	dB	cm	deg			
1	2390.00	47.49	10.19	37.30	54.00	-6.51	349	301	Average	Vertical	
2	2412.00	97.62	60.27	37.35	54.00	43.62	349	301	Average	Vertical	
3	2892.33	41.53	3.49	38.04	54.00	-12.47	349	301	Average	Vertical	

802.11n HT20

High Channel (Horizontal) Peak




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

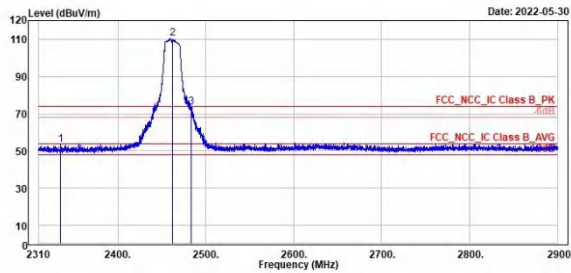

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2335.02	53.32	15.91	37.41	74.00	-20.68	239	262	Peak	Horizontal	
2 *	2462.00	110.38	72.74	37.64	74.00	36.38	239	262	Peak	Horizontal	
3 !	2483.81	73.66	36.09	37.57	74.00	-0.34	239	262	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua Rd., Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

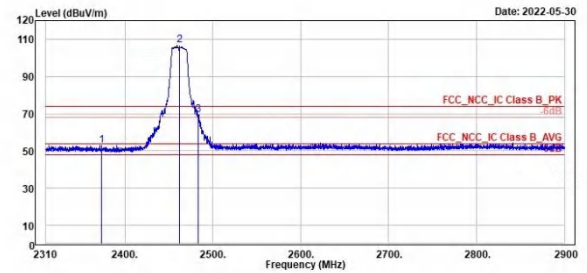


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2373.25	53.14	15.86	37.28	74.00	-20.86	380	302	Peak	Vertical	
2 *	2462.00	100.69	69.13	37.56	74.00	32.69	380	302	Peak	Vertical	
3 !	2483.58	69.56	31.85	37.71	74.00	-4.44	380	302	Peak	Vertical	

802.11n HT20

High Channel (Horizontal) Average




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

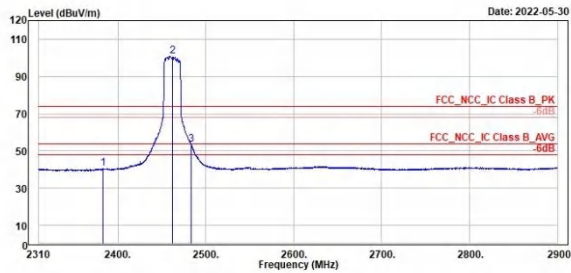

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	cm	deg			
1	2383.16	40.49	2.93	37.56	54.00	-13.51	239	262	Average	Horizontal	
2 *	2462.00	100.81	63.17	37.64	54.00	46.81	239	262	Average	Horizontal	
3 †	2483.46	53.40	15.82	37.58	54.00	-0.60	239	262	Average	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenliiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

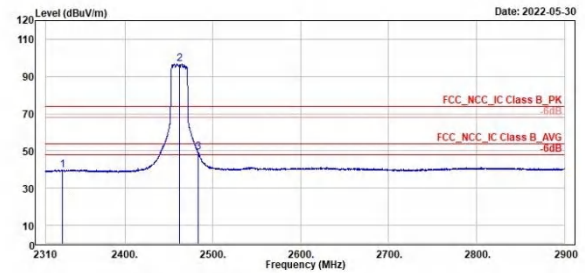

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	cm	deg			
1	2329.12	39.92	2.82	37.10	54.00	-14.08	380	302	Average	Vertical	
2 *	2462.00	96.67	59.11	37.56	54.00	42.67	380	302	Average	Vertical	
3 †	2483.58	49.24	11.53	37.71	54.00	-4.76	380	302	Average	Vertical	


Spurious Emissions, Tx Mode, 9kHz ~ 30MHz

802.11n HT20

High Channel (Open)9kHz~150kHz




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1010 Fax: +886-2172-1322

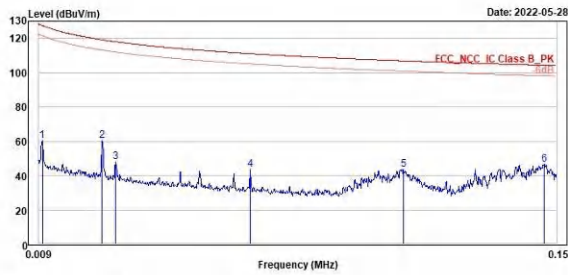

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	60.28	42.57	17.71	127.60	-67.32	100	266 QP	Open		
2	0.03	60.51	41.33	19.18	119.18	-58.67	100	18 QP	Open		
3	0.03	47.89	28.38	19.51	118.05	-70.16	100	136 QP	Open		
4	0.07	43.70	24.76	18.94	111.12	-67.42	100	198 QP	Open		
5	0.11	43.49	25.24	18.25	106.90	-63.41	100	196 QP	Open		
6	0.15	46.68	28.30	18.38	104.27	-57.59	100	188 QP	Open		



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1010 Fax: +886-2172-1322

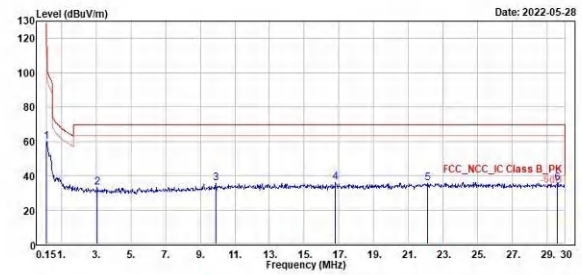


Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.15	59.99	41.59	18.40	104.00	-44.00	100	194 QP	Open		
2	3.08	33.02	13.54	19.48	69.50	-36.48	100	266 QP	Open		
3	9.88	35.37	14.02	21.35	69.50	-34.13	100	188 QP	Open		
4	16.81	35.95	14.10	21.85	69.50	-33.55	100	240 QP	Open		
5	22.12	35.60	13.46	22.14	69.50	-33.90	100	219 QP	Open		
6	29.58	35.77	13.34	22.43	69.50	-33.73	100	229 QP	Open		

802.11n HT20

High Channel (Close)9kHz~150kHz




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

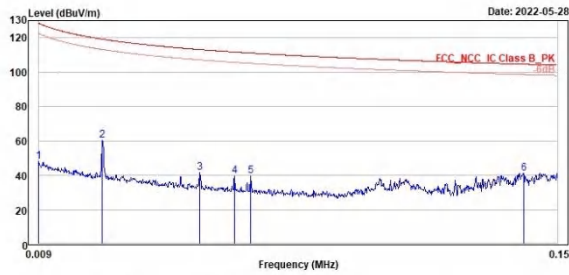

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.01	47.92	29.91	18.01	128.50	-88.58	100	9 QP	Close		
2	0.03	60.45	41.27	19.18	119.18	-58.73	100	68 QP	Close		
3	0.05	41.43	22.18	19.25	113.13	-71.70	100	192 QP	Close		
4	0.06	39.67	20.63	19.04	111.72	-72.05	100	235 QP	Close		
5	0.07	39.51	20.57	18.94	111.12	-71.61	100	240 QP	Close		
6	0.14	41.18	22.82	18.36	104.62	-63.44	100	224 QP	Close		



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Fenhua, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

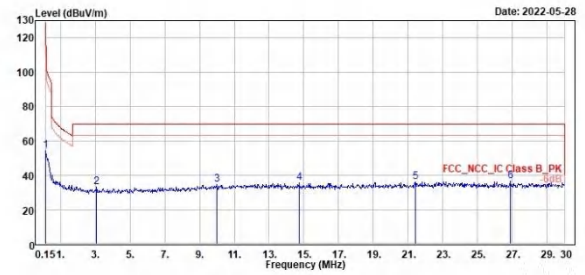

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	0.15	54.34	35.04	18.40	104.80	-49.74	100	227 QP	Close		
2	3.08	33.02	13.54	19.48	69.50	-36.48	100	306 QP	Close		
3	10.00	34.51	13.11	21.40	69.50	-34.99	100	48 QP	Close		
4	14.75	35.49	13.78	21.71	69.50	-34.01	100	316 QP	Close		
5	21.43	35.95	13.84	22.11	69.50	-33.55	100	95 QP	Close		
6	26.87	36.49	14.17	22.32	69.50	-33.01	100	155 QP	Close		

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


802.11n HT20

High Channel (Horizontal)

High Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenhua, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

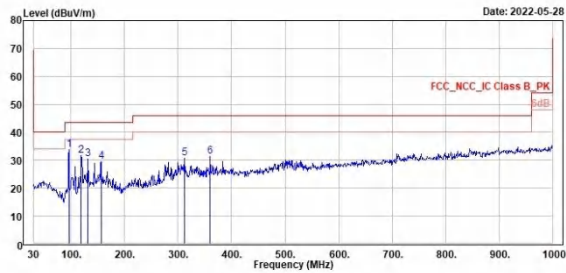

	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	95.96	33.68	45.76	-12.08	43.50	-9.82	400	126	QP	Horizontal		
2	119.24	31.63	40.19	-8.47	43.50	-11.87	300	96	QP	Horizontal		
3	131.85	30.32	37.14	-6.82	43.50	-13.18	200	95	QP	Horizontal		
4	156.10	29.38	35.17	-5.79	43.50	-14.12	300	115	QP	Horizontal		
5	311.30	30.76	35.21	-4.45	46.00	-15.24	100	151	QP	Horizontal		
6	359.00	31.31	34.96	-3.65	46.00	-14.69	100	263	QP	Horizontal		





TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenhua, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

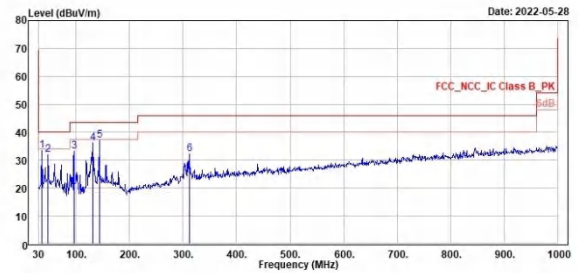



	Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	35.82	33.68	48.69	-7.09	40.00	-6.40	100	23	QP	Vertical		
2	47.46	31.90	37.66	-5.76	40.00	-8.10	100	23	QP	Vertical		
3	95.96	33.01	45.09	-12.08	43.50	-10.49	100	262	QP	Vertical		
4	130.88	36.08	43.08	-7.00	43.50	-7.42	100	360	QP	Vertical		
5	143.49	36.96	42.95	-5.99	43.50	-6.54	100	360	QP	Vertical		
6	311.30	32.20	36.65	-4.45	46.00	-13.80	100	26	QP	Vertical		

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4824.00	42.08	51.44	-9.36	74.00	-31.92	400	108	Peak	Vertical	

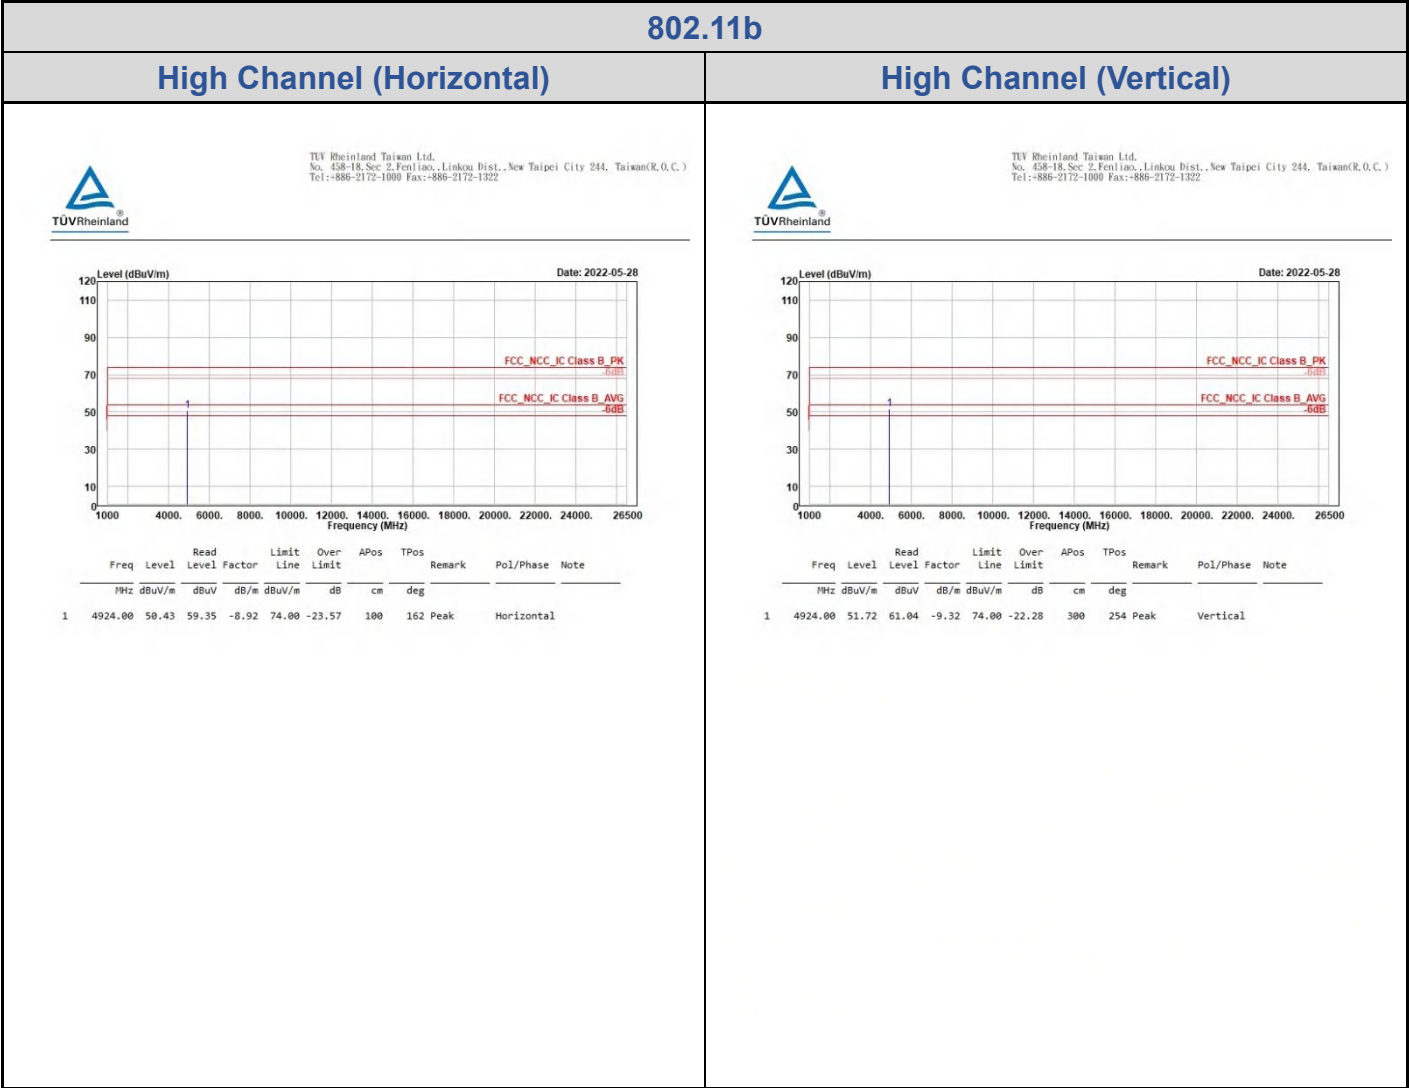

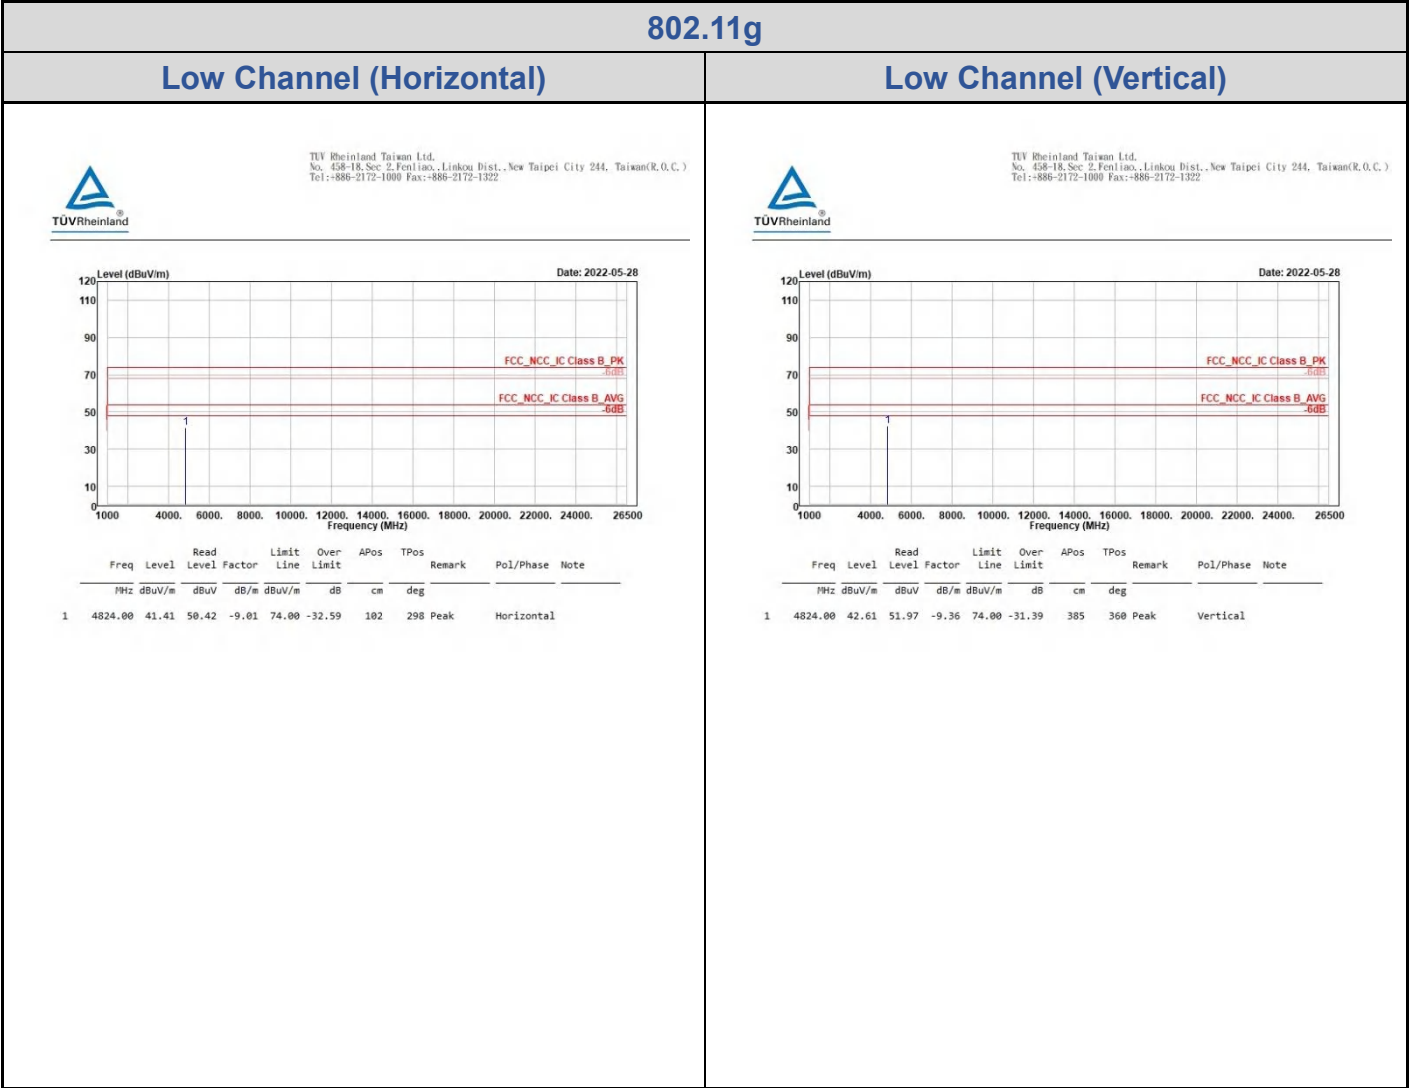

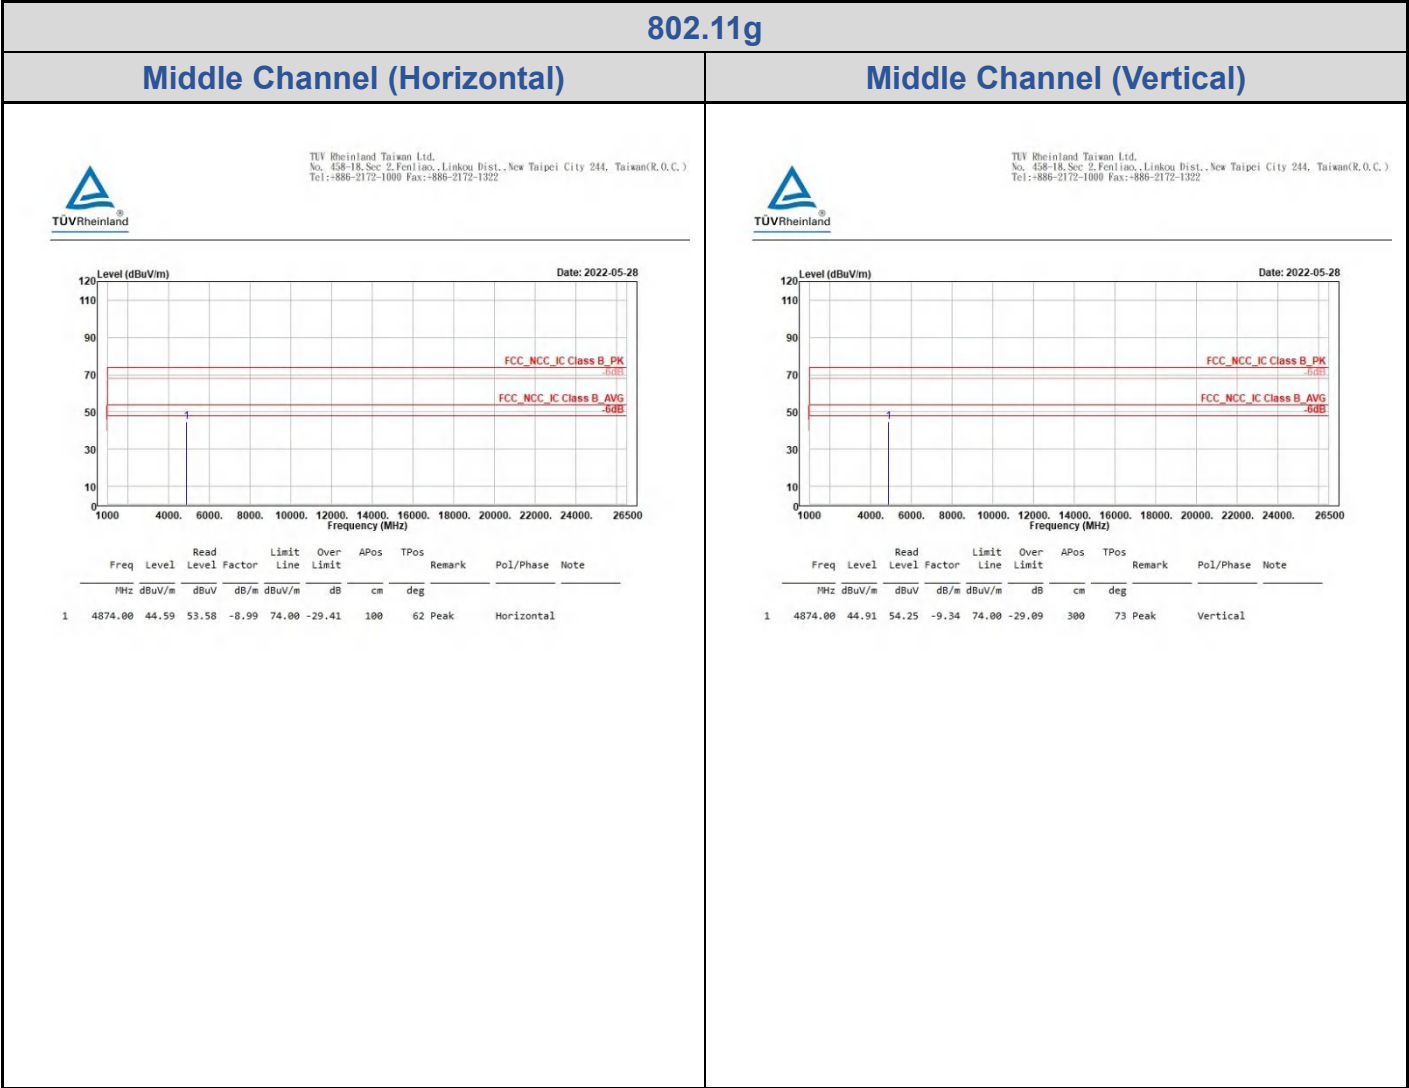

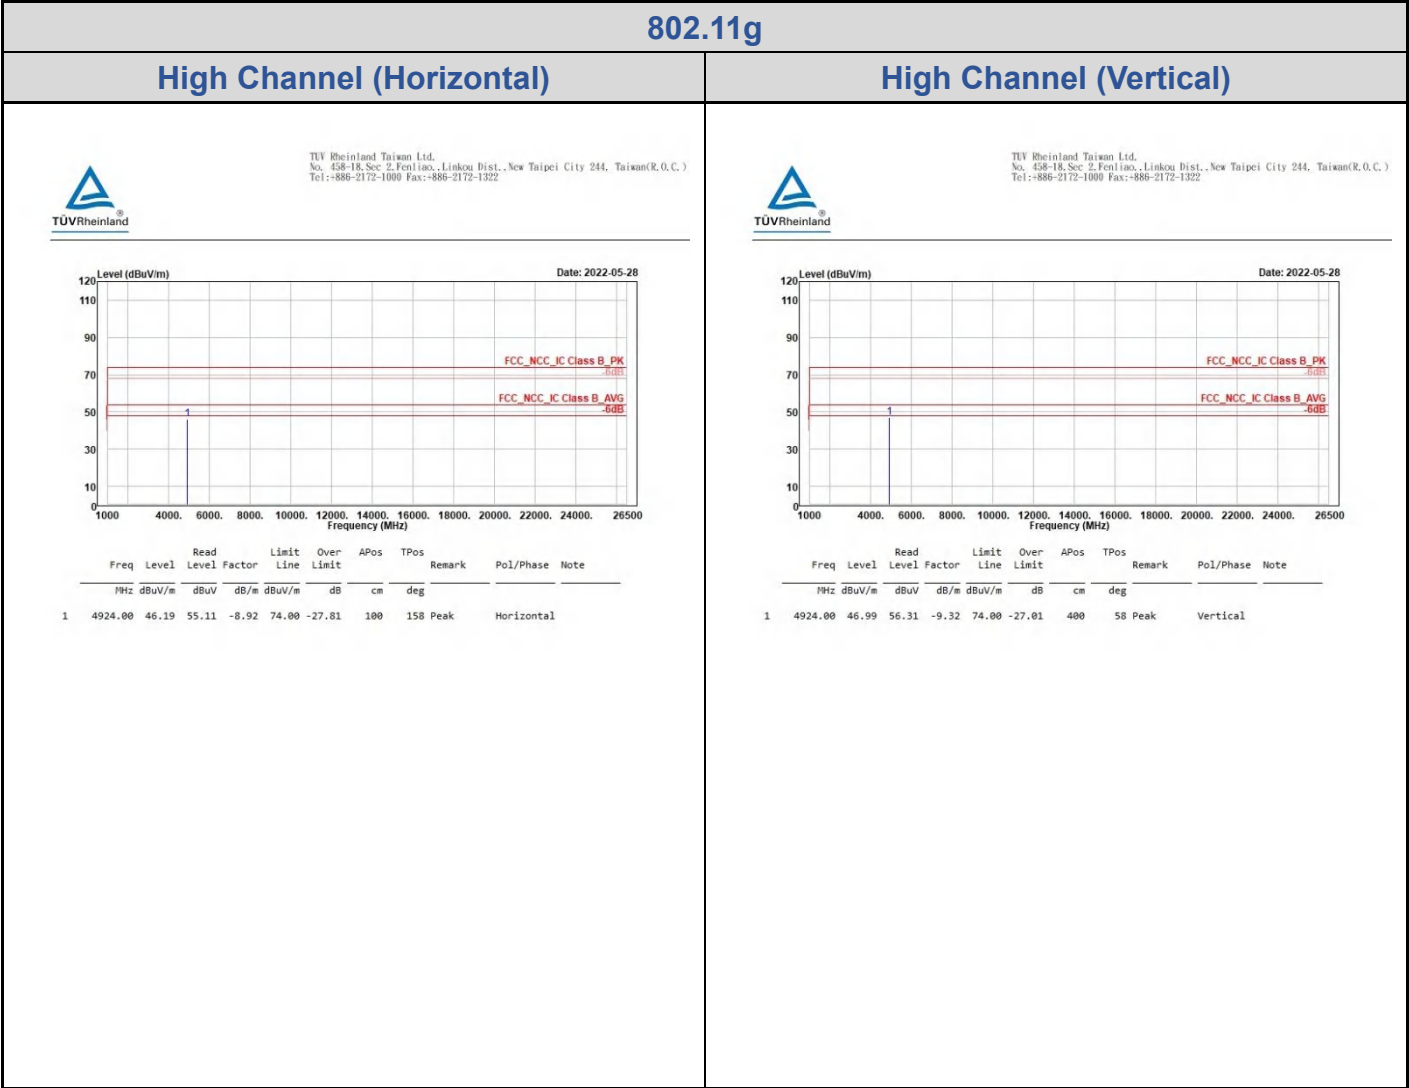

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4874.00	46.48	55.82	-9.34	74.00	-27.52	300	267	Peak	Vertical	




	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4924.00	44.57	53.89	-9.32	74.00	-29.43	200	262	Peak	Vertical	

Mains Conducted Emission, 150kHz ~ 30MHz

Worst Band


(Line)

(Neutral)

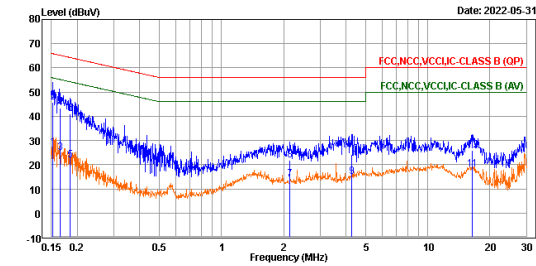

Trace: 1

	Freq	Level	Read	Limit	Over			
	MHz	dBuV	Level	Line	Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dB	dB			
1	0.15	26.93	17.32	9.61	55.92	-28.99 Average	line1	
2	0.15	45.67	36.06	9.61	65.92	-20.25 QP	line1	
3	0.17	25.05	15.44	9.61	55.17	-30.12 Average	line1	
4	0.17	43.53	33.92	9.61	65.17	-21.64 QP	line1	
5	0.18	21.86	12.25	9.61	54.26	-32.40 Average	line1	
6	0.18	41.07	31.46	9.61	64.26	-23.19 QP	line1	
7	2.15	13.79	4.14	9.65	46.00	-32.21 Average	line1	
8	2.15	21.68	12.03	9.65	56.00	-34.32 QP	line1	
9	4.27	14.95	5.27	9.68	46.00	-31.05 Average	line1	
10	4.27	24.36	14.68	9.68	56.00	-31.64 QP	line1	
11	16.41	17.97	8.25	9.72	50.00	-32.03 Average	line1	
12	16.41	25.79	16.07	9.72	60.00	-34.21 QP	line1	

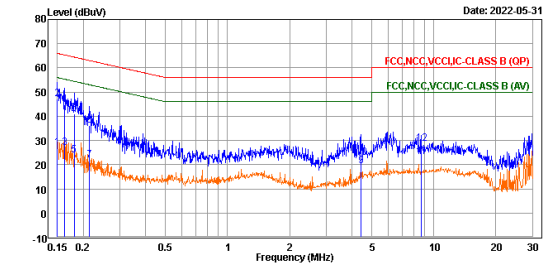

Trace: 1

	Freq	Level	Read	Limit	Over			
	MHz	dBuV	Level	Line	Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dB	dB	dB			
1	0.15	26.86	17.27	9.59	56.00	-29.14 Average	neutral	
2	0.15	47.00	37.41	9.59	66.00	-19.00 QP	neutral	
3	0.16	27.06	17.47	9.59	55.34	-28.28 Average	neutral	
4	0.16	44.76	35.17	9.59	65.34	-20.58 QP	neutral	
5	0.18	23.78	14.19	9.59	54.47	-30.69 Average	neutral	
6	0.18	40.82	31.23	9.59	64.47	-23.65 QP	neutral	
7	0.21	21.66	12.07	9.59	53.00	-31.36 Average	neutral	
8	0.21	36.30	26.71	9.59	63.00	-26.72 QP	neutral	
9	4.42	19.39	9.71	9.68	46.00	-26.61 Average	neutral	
10	4.42	22.73	13.05	9.68	56.00	-33.27 QP	neutral	
11	8.67	23.10	13.38	9.72	50.00	-26.90 Average	neutral	
12	8.67	28.64	18.92	9.72	60.00	-31.36 QP	neutral	