



## FCC PART 15.247

### TEST REPORT

For

### YEALINK (XIAMEN ) NETWORK TECHNOLOGY CO., LTD.

4th-5th Floor, South Building, No.63 Wanghai Road,2nd Software Park, XiaMen, China

**FCC ID: T2C-BT40**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Yealink Bluetooth® USB Dongle BT40
<b>Test Engineer:</b> <u>Ares Liu</u> <i>Ares Liu</i>	
<b>Report Number:</b> <u>R2DG130410002-00B</u>	
<b>Report Date:</b> <u>2013-05-03</u>	
<b>Reviewed By:</b> Ivan Cao RF Leader	<i>Ivan Cao</i>
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.

\* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★” (Rev.2), This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY.....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
EQUIPMENT MODIFICATIONS .....	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS.....</b>	<b>8</b>
<b>FCC §15.247 (i) &amp; §2.1093 - RF EXPOSURE.....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
ANTENNA CONNECTOR CONSTRUCTION .....	10
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
MEASUREMENT UNCERTAINTY .....	11
EUT SETUP .....	12
EMI TEST RECEIVER SETUP .....	12
TEST PROCEDURE .....	12
TEST EQUIPMENT LIST AND DETAILS.....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	13
TEST RESULTS SUMMARY .....	13
TEST RESULTS SUMMARY .....	13
TEST DATA .....	14
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
MEASUREMENT UNCERTAINTY .....	16
EUT SETUP .....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	17
TEST PROCEDURE .....	17
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY .....	18
TEST DATA .....	18
<b>FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....</b>	<b>22</b>
APPLICABLE STANDARD .....	22
TEST PROCEDURE .....	22
TEST EQUIPMENT LIST AND DETAILS.....	22

TEST DATA .....	22
<b>FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER .....</b>	<b>25</b>
APPLICABLE STANDARD .....	25
TEST PROCEDURE .....	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA .....	25
<b>FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA .....	28
<b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>	<b>30</b>
APPLICABLE STANDARD .....	30
TEST PROCEDURE .....	30
TEST EQUIPMENT LIST AND DETAILS.....	30
TEST DATA .....	30

## **GENERAL INFORMATION**

---

### **Product Description for Equipment under Test (EUT)**

The *YEALINK (XIAMEN ) NETWORK TECHNOLOGY CO., LTD.* 's product, model number: *BT40 (FCC ID: T2C-BT40)* or ("EUT") in this report is a *Yealink Bluetooth® USB Dongle BT40*, which was measured approximately: 1.9 cm (L) x 0.7 cm (W) x 0.3 cm (H), rated input voltage: DC 5V from System.

*All measurement and test data in this report was gathered from production sample serial number: 130410002 (Assigned by BACL, Dongguan). The EUT was received on 2013-04-11.*

### **Objective**

This report is prepared on behalf of *YEALINK (XIAMEN ) NETWORK TECHNOLOGY CO., LTD.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### **Related Submittal(s)/Grant(s)**

FCC Part 15C DSS submissions with FCC ID: T2C-BT40 for Bluetooth BDR and EDR mode.

### **Test Methodology**

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/5000690.htm>

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a test mode.

For Bluetooth LE mode, 40 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
..	...	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

### EUT Exercise Software

The software “Bluetest 3” was used in test, which was provided by manufacturer.

### Equipment Modifications


No modification was made to the EUT tested.

### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HP	Printer	C3941A	JPTVOB2337
SAST	Modem	AEM-2100	0293
DELL	Keyboard	L100	CNORH656658907BL05DC
DELL	Laptop	PP11L	N/A

### External I/O Cable

Cable Description	Length (m)	From	To
Shielded Detachable Printer Cable	1.2	Parallel Port of Laptop	Printer
Shielded Detachable Serial Cable	1.2	Serial Port of Laptop	Modem
Shielded Detachable Keyboard Cable	1.5	Keyboard Port of Laptop	Keyboard

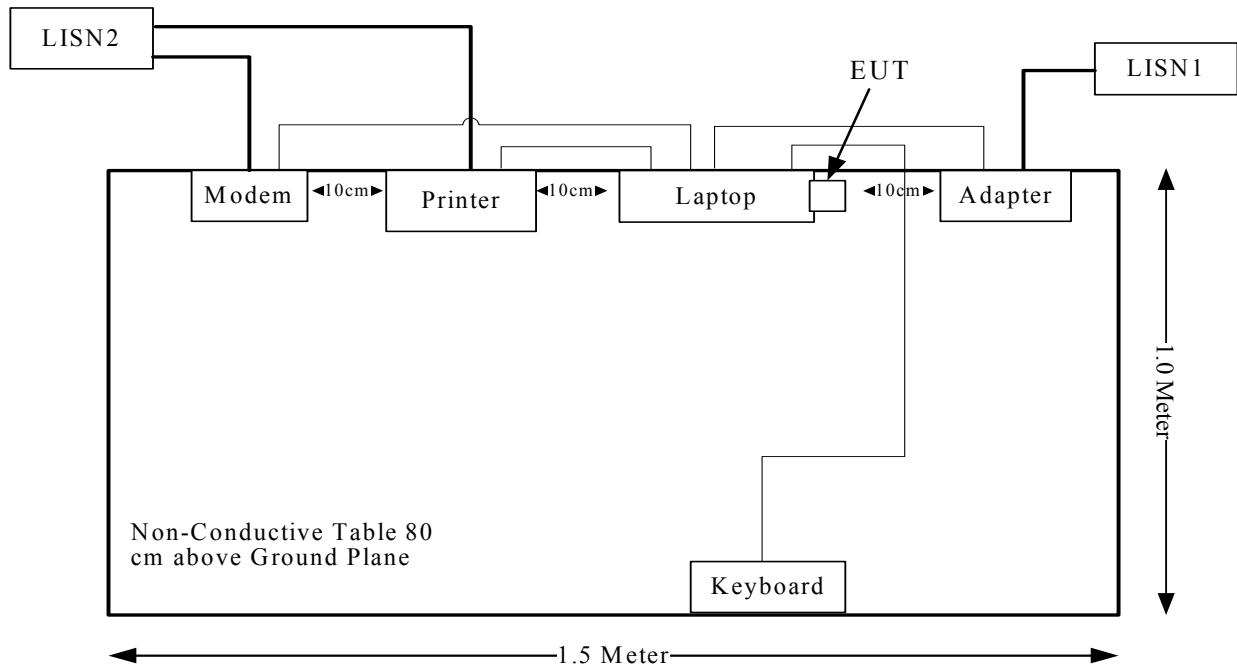**Block Diagram of Test Setup**

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

## **FCC §15.247 (i) & §2.1093 - RF EXPOSURE**

### **Applicable Standard**

According to HEE "§15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 Mobile Portable RF Exposure V05 Appendix A, SAR can be exempted if the output power is less than the SAR exclusion threshold:

For  $f=2450\text{MHz}$ , the output power is less  $10\text{mW}$  at distance of  $5\text{mm}$ .

### **Measurement Result**

Peak conducted output power=  $3.94\text{ dBm}$

Antenna gain =  $0\text{ dBi}$

SAR exclusion threshold  $10\text{ mW}$  ( $10\text{dBm}$ )  $> 3.94\text{ dBm}$

**So the SAR evaluation is not necessary.**

## **FCC §15.203 - ANTENNA REQUIREMENT**

### **Applicable Standard**

According to HEE "§15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### **Antenna Connector Construction**

The EUT has a printed antenna permanently soldering on the printed circuit boards, which in accordance to FCC §15.203, the antenna's maximum gain is 0 dBi; please refer to the internal photos.

**Result:** Compliance.

## **FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

### **Applicable Standard**

FCC"§15.207

### **Measurement Uncertainty**

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If  $U_{\text{lab}}$  is less than or equal to  $U_{\text{cispr}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{\text{lab}}$  is greater than  $U_{\text{cispr}}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{\text{cispr}}$

Measurement	$U_{\text{cispr}}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

## EUT Setup

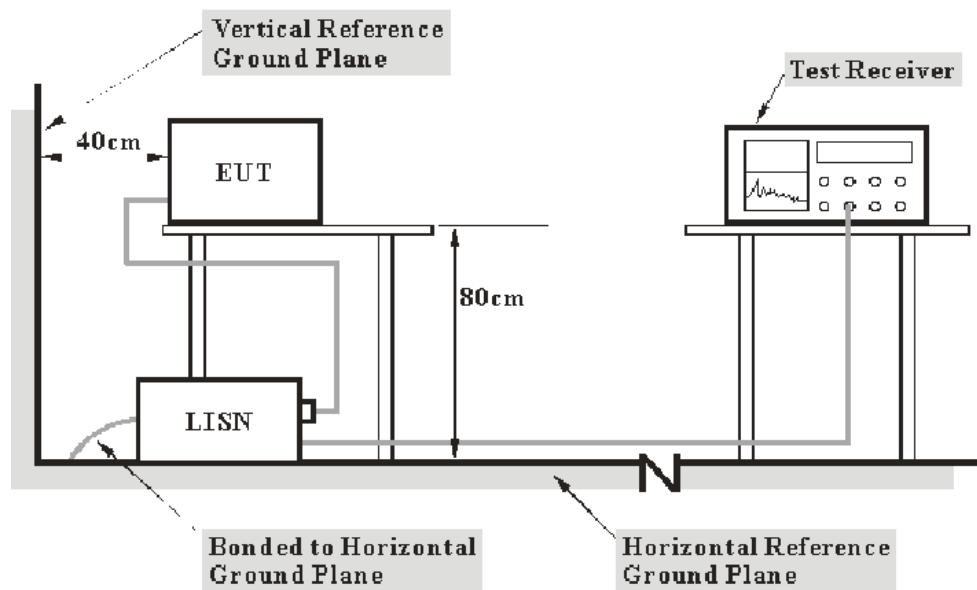

**Note:** 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<b>Frequency Range</b>	<b>IF B/W</b>
150 kHz – 30 MHz	9 kHz

## Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2012-11-29	2013-11-28
R&S	LISN1	ESH3-Z5	843331/015	2012-09-17	2013-09-16
R&S	LISN2	ESH3-Z5	100113	2012-11-29	2013-11-28
BACL	Test Software	BACL-EMC	V1.0-2010	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

**10.66 dB at 0.310 MHz in the Line conducted mode.**

## Test Data


### Environmental Conditions

Temperature:	26.4° C
Relative Humidity:	67 %
ATM Pressure:	100 kPa

The testing was performed by Ares Liu on 2013-04-19.


Test Mode: Transmitting

AC 120V/60 Hz, Line

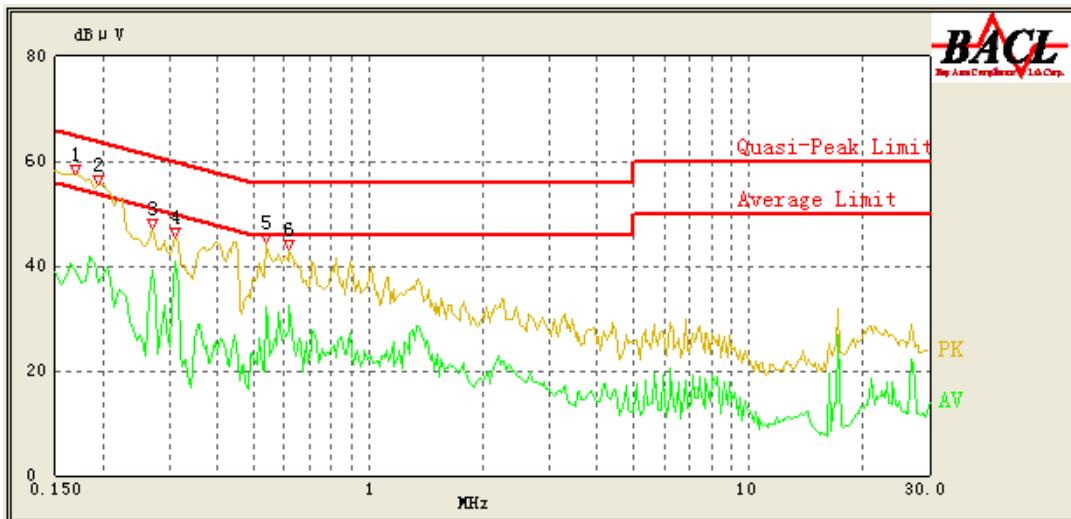

Frequency (MHz)	Cord. Reading (dB $\mu$ V)	Correction Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Detector (PK/AV/QP)
0.170	53.04	0.43	65.43	12.39	QP
0.170	39.19	0.43	55.43	16.24	AV
0.195	51.93	0.41	64.71	12.78	QP
0.195	36.82	0.41	54.71	17.89	AV
0.270	42.88	0.36	62.57	19.69	QP
0.270	39.27	0.36	52.57	13.30	AV
0.310	42.44	0.34	61.43	18.99	QP
0.310	40.77	0.34	51.43	10.66	AV
0.540	41.31	0.31	56.00	14.69	QP
0.540	32.33	0.31	46.00	13.67	AV
0.620	37.79	0.32	56.00	18.21	QP
0.620	32.58	0.32	46.00	13.42	AV

## AC 120V/60 Hz, Neutral

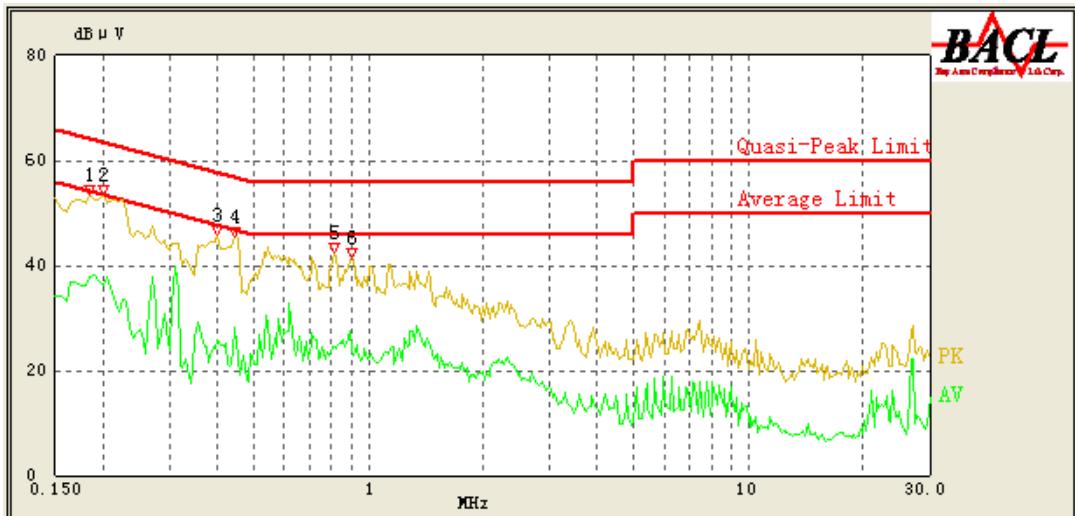

Frequency (MHz)	Cord. Reading (dB $\mu$ V)	Correction Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Detector (PK/AV/QP)
0.185	48.29	0.25	65.00	16.71	QP
0.185	37.70	0.25	55.00	17.30	AV
0.200	48.52	0.25	64.57	16.05	QP
0.200	36.18	0.25	54.57	18.39	AV
0.400	41.19	0.22	58.86	17.67	QP
0.400	25.81	0.22	48.86	23.05	AV
0.445	41.35	0.22	57.57	16.22	QP
0.445	28.04	0.22	47.57	19.53	AV
0.815	37.51	0.22	56.00	18.49	QP
0.810	24.60	0.22	46.00	21.40	AV
0.900	36.80	0.23	56.00	19.20	QP
0.900	24.28	0.23	46.00	21.72	AV

## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

### Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If  $U_{\text{lab}}$  is less than or equal to  $U_{\text{cisp}}$  of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{\text{lab}}$  is greater than  $U_{\text{cisp}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}})$ , exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cisp}})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 2 – Values of  $U_{\text{cisp}}$

Measurement	$U_{\text{cisp}}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

### EUT Setup

Below 1GHz:

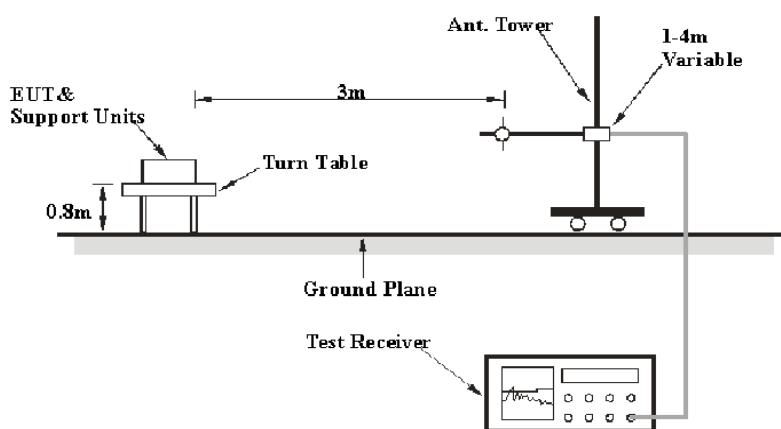

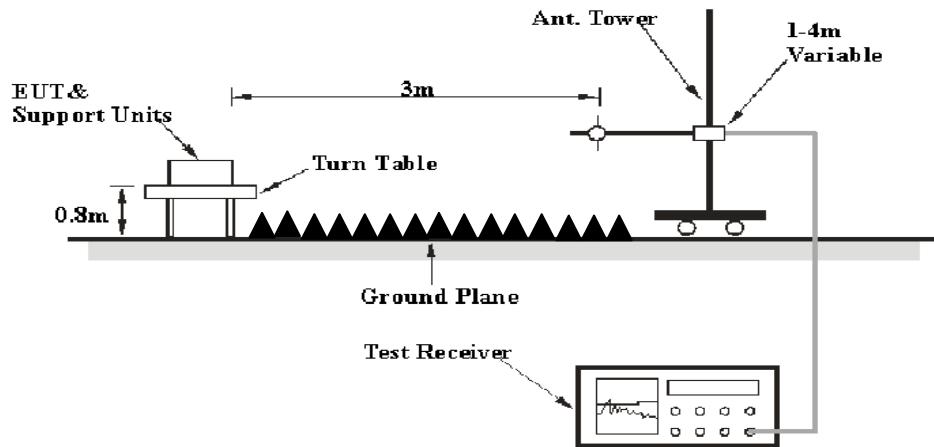**Above 1GHz:**

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<b>Frequency Range</b>	<b>RBW</b>	<b>Video B/W</b>	<b>Detector</b>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2012-05-14	2013-05-13
Sunol Sciences	Hybrid Antennas	JB3	A060611-1	2011-09-06	2013-09-05
HP	Pre-amplifier	8447E	2434A02181	2012-10-08	2013-10-07
R&S	Spectrum analyzer	FSEM 30	849016/001	2012-9-4	2013-9-3
ETS-LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2014-09-05
Mini-Circuits	Amplifier	ZVA-213-S+	054201245	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

**9.90 dB at 2483.5 MHz in the Vertical polarization**

## Test Data


### Environmental Conditions

<b>Temperature:</b>	24.1 ° C
<b>Relative Humidity:</b>	68 %
<b>ATM Pressure:</b>	100.4 kPa


*The testing was performed by Ares Liu on 2013-05-02.*

*Mode: Transmitting*


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	FCC 15.247	
	Reading (dB $\mu$ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dB $\mu$ V/m)	Margin (dB)
Low Channel: 2402~MHz									
2402	62.22	PK	H	25.65	3.90	0.00	91.77	N/A	N/A
2402	48.97	AV	H	25.65	3.90	0.00	78.52	N/A	N/A
2402	64.53	PK	V	25.65	3.90	0.00	94.08	N/A	N/A
2402	49.74	AV	V	25.65	3.90	0.00	79.29	N/A	N/A
2390	27.46	PK	V	25.61	3.84	0.00	56.91	74.00	17.09
2390	13.96	AV	V	25.61	3.84	0.00	43.41	54.00	10.59
4804	34.61	PK	V	30.59	4.67	27.26	42.61	74.00	31.39
4804	19.9	AV	V	30.59	4.67	27.26	27.90	54.00	26.10
7206	31.92	PK	V	34.09	6.50	26.30	46.21	74.00	27.79
7206	18.1	AV	V	34.09	6.50	26.30	32.39	54.00	21.61
9608	31.22	PK	V	35.96	8.75	26.22	49.71	74.00	24.29
9608	18.32	AV	V	35.96	8.75	26.22	36.81	54.00	17.19
2825	31.42	PK	V	27.01	6.11	27.44	37.10	74.00	36.90
2825	18.09	AV	V	27.01	6.11	27.44	23.77	54.00	30.23
402.58	29.23	QP	H	15.80	2.37	21.73	25.67	46.00	20.33
Middle Channel: 2440 MHz									
2440	62.93	PK	H	25.74	3.99	0.00	92.66	N/A	N/A
2440	49.62	AV	H	25.74	3.99	0.00	79.35	N/A	N/A
2440	65.21	PK	V	25.74	3.99	0.00	94.94	N/A	N/A
2440	50.39	AV	V	25.74	3.99	0.00	80.12	N/A	N/A
4880	35.31	PK	V	30.79	4.75	27.26	43.59	74.00	30.41
4880	20.55	AV	V	30.79	4.75	27.26	28.83	54.00	25.17
7320	31.56	PK	V	34.37	6.72	26.53	46.12	74.00	27.88
7320	18.41	AV	V	34.37	6.72	26.53	32.97	54.00	21.03
9760	30.91	PK	V	36.32	8.58	25.63	50.18	74.00	23.82
9760	18.36	AV	V	36.32	8.58	25.63	37.63	54.00	16.37
2825	32.41	PK	V	27.01	6.11	27.44	38.09	74.00	35.91
2825	18.85	AV	V	27.01	6.11	27.44	24.53	54.00	29.47
3260	31.91	PK	V	27.94	5.10	27.47	37.48	74.00	36.52
3260	18.4	AV	V	27.94	5.10	27.47	23.97	54.00	30.03
401.95	30.5	QP	H	15.79	2.36	21.72	26.93	46.00	19.07
High Channel: 2480 MHz									
2480	63.08	PK	H	25.85	3.82	0.00	92.75	N/A	N/A
2480	49.72	AV	H	25.85	3.82	0.00	79.39	N/A	N/A
2480	65.23	PK	V	25.85	3.82	0.00	94.90	N/A	N/A
2480	50.53	AV	V	25.85	3.82	0.00	80.20	N/A	N/A
2483.5	28.25	PK	V	25.86	3.80	0.00	57.91	74.00	16.09
2483.5	14.44	AV	V	25.86	3.80	0.00	44.10	54.00	9.90
4960	35.35	PK	V	31.00	4.70	27.27	43.78	74.00	30.22
4960	20.78	AV	V	31.00	4.70	27.27	29.21	54.00	24.79
7440	31.95	PK	V	34.66	6.95	26.56	47.00	74.00	27.00
7440	18.67	AV	V	34.66	6.95	26.56	33.72	54.00	20.28
9920	30.85	PK	V	36.71	8.41	25.50	50.47	74.00	23.53
9920	18.5	AV	V	36.71	8.41	25.50	38.12	54.00	15.88
2825	32.71	PK	V	27.01	6.11	27.44	38.39	74.00	35.61
2825	19.01	AV	V	27.01	6.11	27.44	24.69	54.00	29.31
402.04	30.72	QP	H	15.79	2.36	21.73	27.14	46.00	18.86

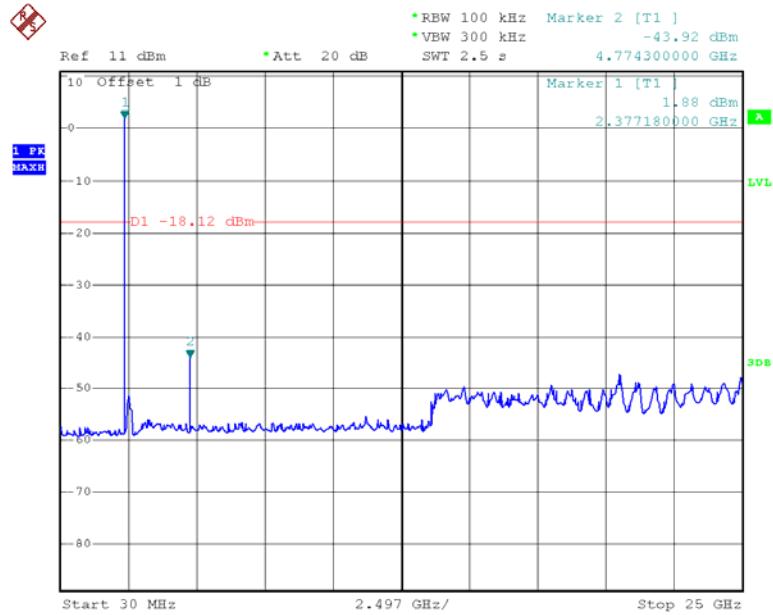**Conducted Spurious Emissions at Antenna Port****Low Channel**

Date: 2.MAY.2013 16:16:30

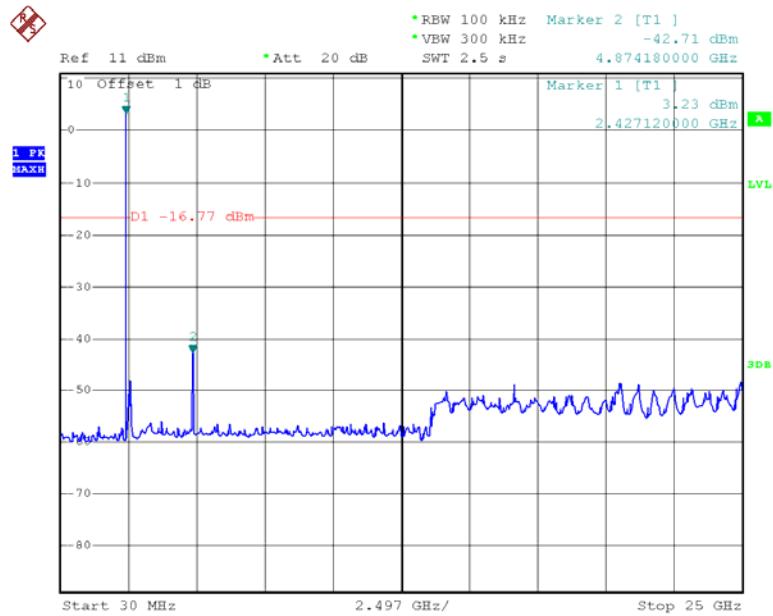**Middle Channel**

Date: 2.MAY.2013 16:17:14

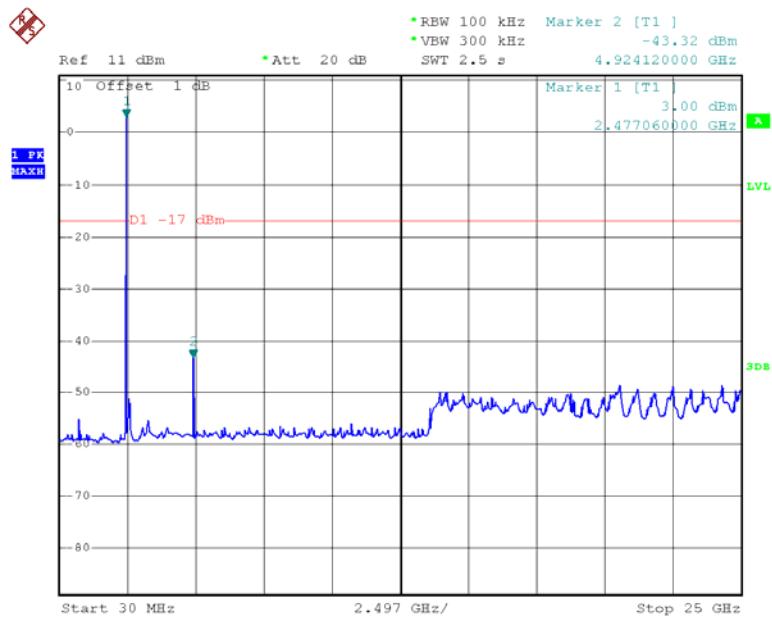**High Channel**

Date: 2.MAY.2013 16:17:57


## FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2012-5-14	2013-5-13

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	25.3 ° C
Relative Humidity:	54 %
ATM Pressure:	100.4 kPa


*The testing was performed by Ares Liu on 2013-05-02.*

**Test Result:** Pass.


Please refer to the following tables and plots.

Channel	Frequency	6 dB Bandwidth	Limit
	(MHz)	(MHz)	(kHz)
Low	2402	0.708	>500
Middle	2440	0.716	>500
High	2480	0.716	>500


### Low Channel

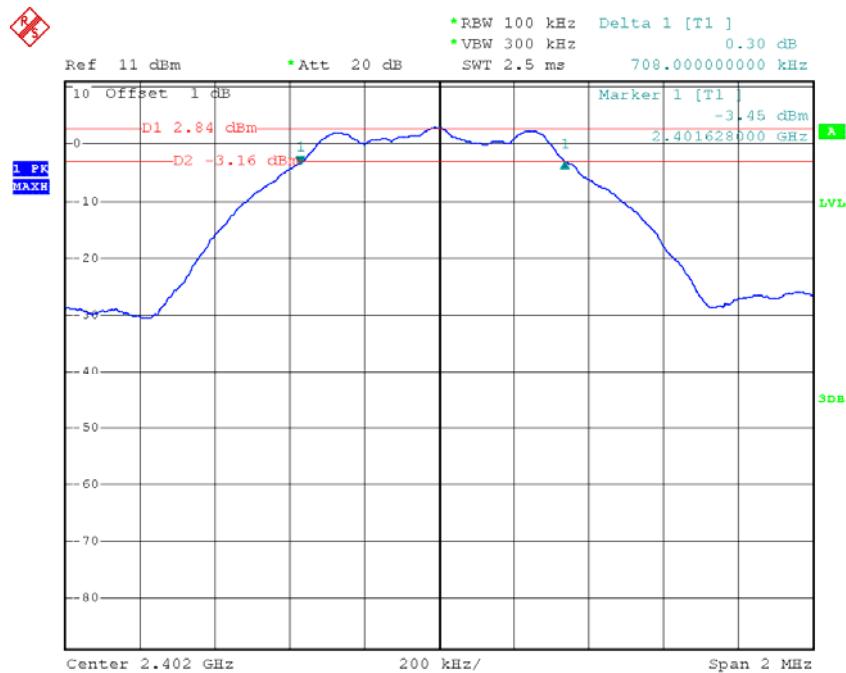

Date: 2.MAY.2013 14:46:29

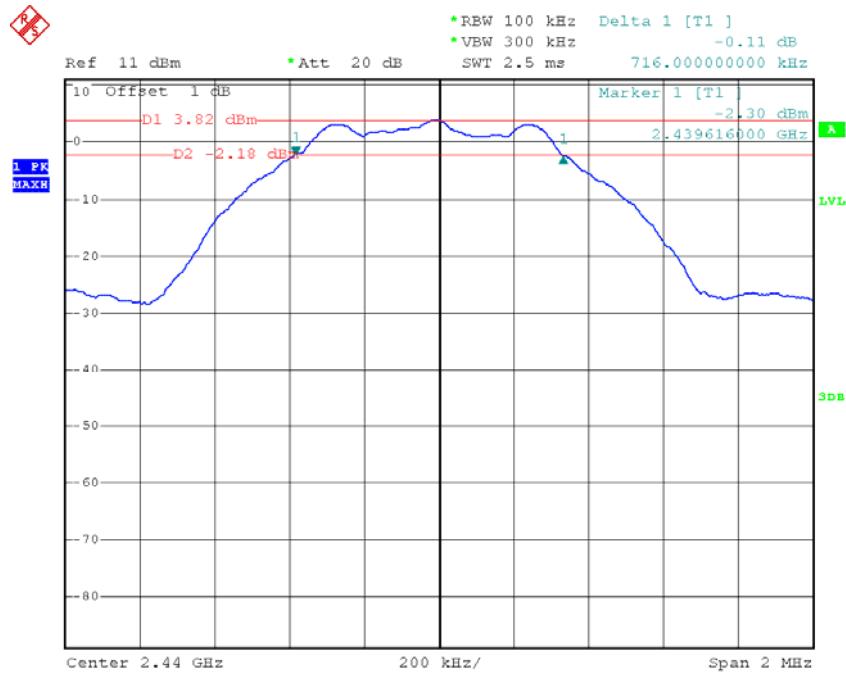**Middle Channel**

Date: 2.MAY.2013 14:55:24

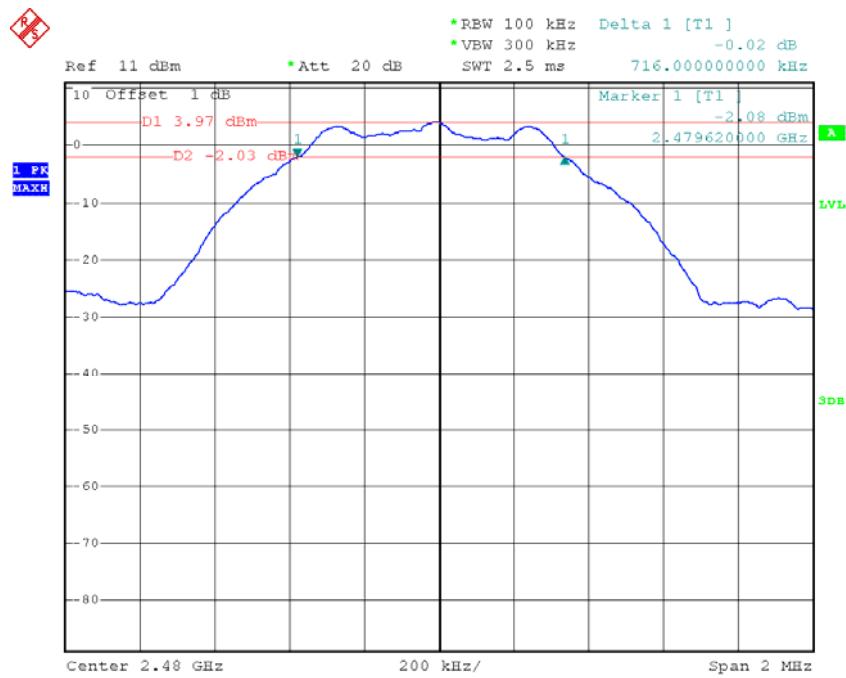**High Channel**

Date: 2.MAY.2013 15:04:24


## FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	25.3 °C
Relative Humidity:	54 %
ATM Pressure:	100.4 kPa


*The testing was performed by Ares Liu on 2013-05-02.*

*Test Mode: Transmitting*


Channel	Frequency	Conducted Output Power	Limit	Result
	(MHz)	(dBm)	(dBm)	
Low	2402	2.87	30	PASS
Middle	2440	3.82	30	PASS
High	2480	3.94	30	PASS

Please refer to the following plots


#### RF Output Power, Low Channel

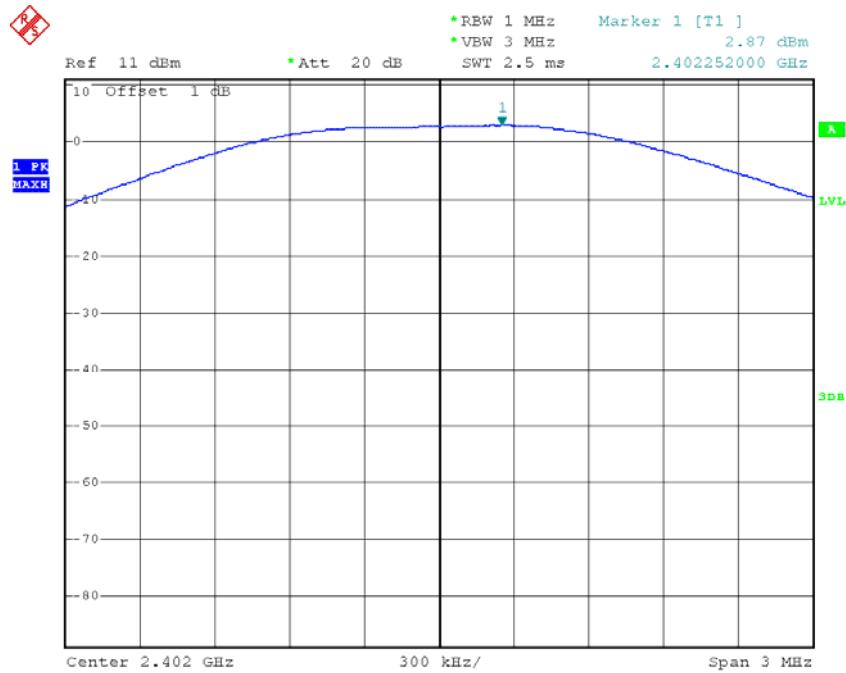

Date: 2.MAY.2013 14:46:54

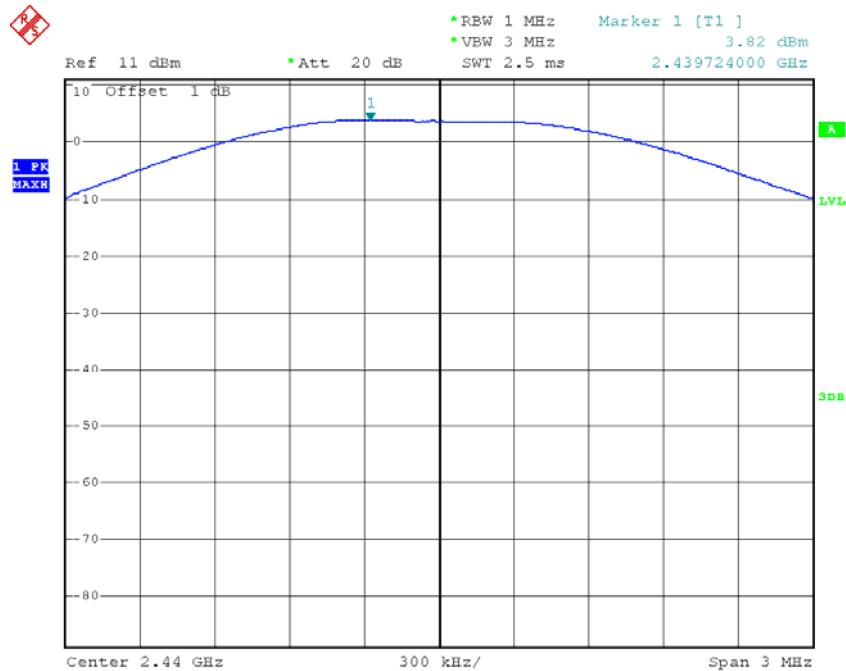**RF Output Power, Middle Channel**

Date: 2.MAY.2013 14:55:45

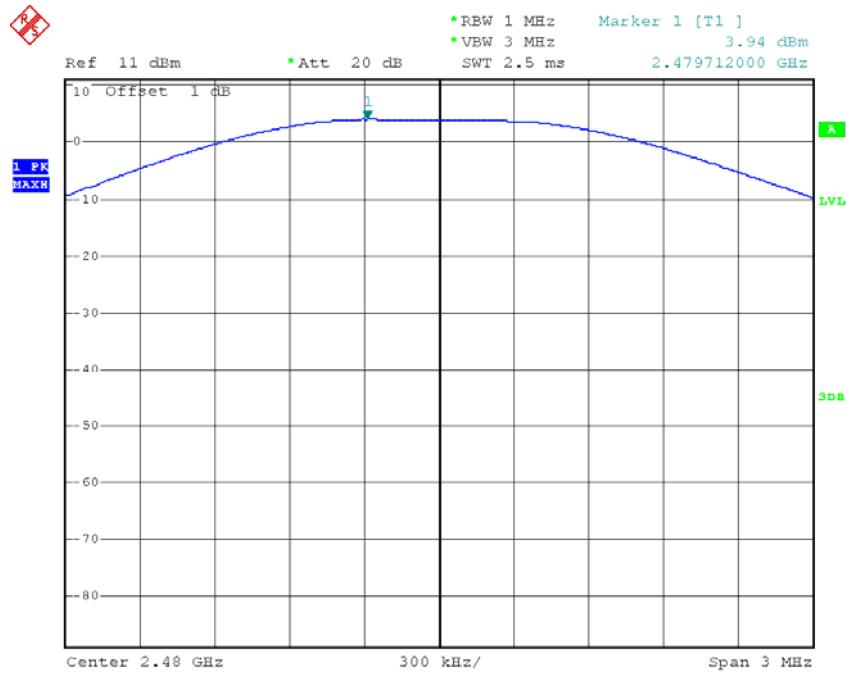**RF Output Power, High Channel**

Date: 2.MAY.2013 14:56:27

## FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


Temperature:	25.3 ° C
Relative Humidity:	54 %
ATM Pressure:	100.4 kPa

*The testing was performed by Ares Liu on 2013-05-02.*

#### Test Result: Compliance


Please refer to following plots.

## Band Edge, Left Side

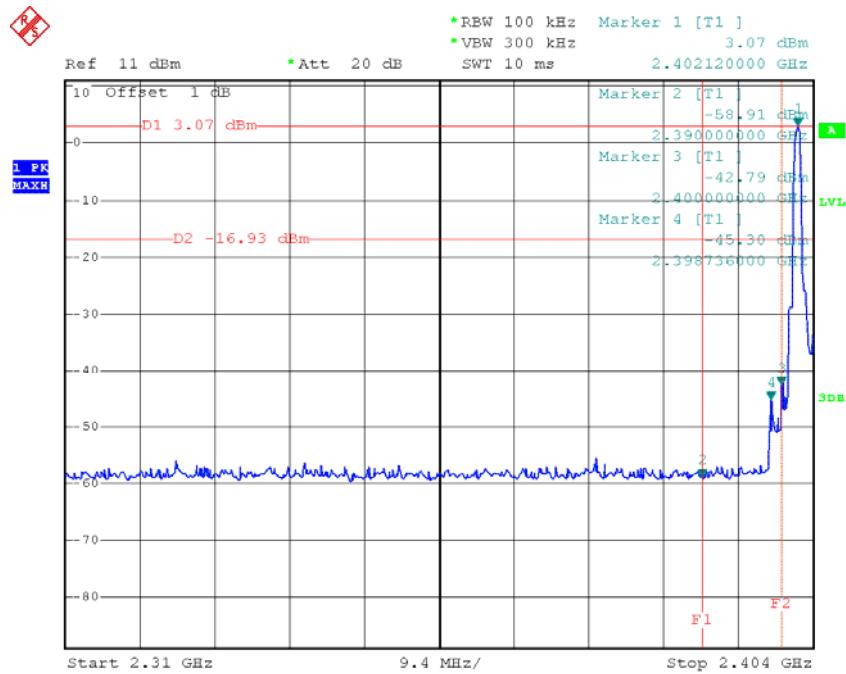

Date: 2.MAY.2013 14:48:54

## Band Edge, Right Side

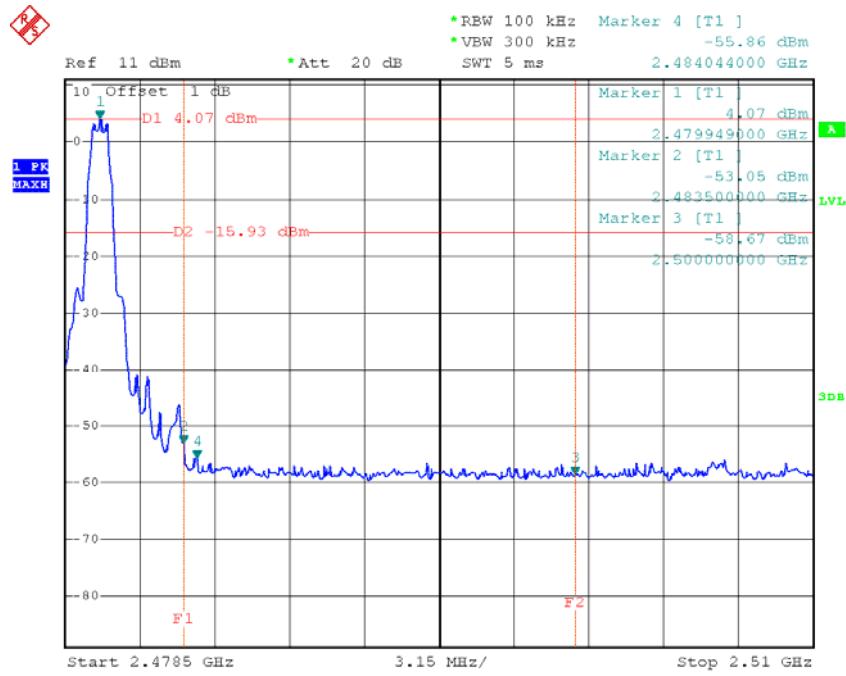

Date: 2.MAY.2013 15:00:39

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. According to KDB 558074 D01 DTS Meas Guidance v02, set the RBW = 3 kHz, VBW = 30 kHz, Set the span to 1.5 times the DTS channel bandwidth.
4. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	25.3 ° C
Relative Humidity:	54 %
ATM Pressure:	100.4 kPa

*The testing was performed by Ares Liu on 2013-05-03.*


Test Mode: Transmitting

**Test Result:** Pass

Channel	Frequency	PSD	Limit	Result
	MHz	(dBm/3kHz)	(dBm/3kHz)	
Low	2402	-29.62	8	PASS
Middle	2440	-28.61	8	PASS
High	2480	-27.74	8	PASS


Please refer to the following plots

#### Power Spectral Density, Low Channel

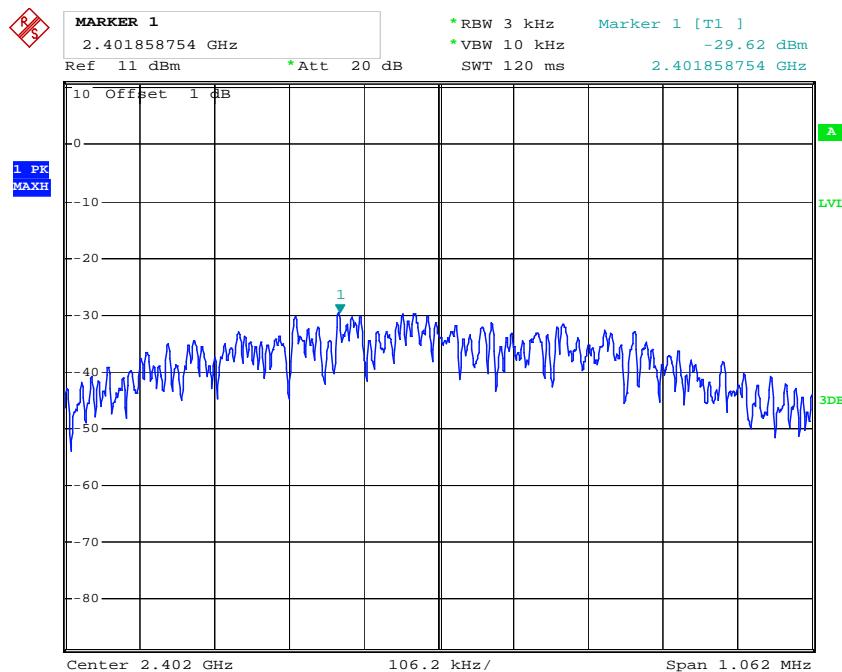


Date: 3.MAY.2013 11:36:36

## Power Spectral Density, Middle Channel

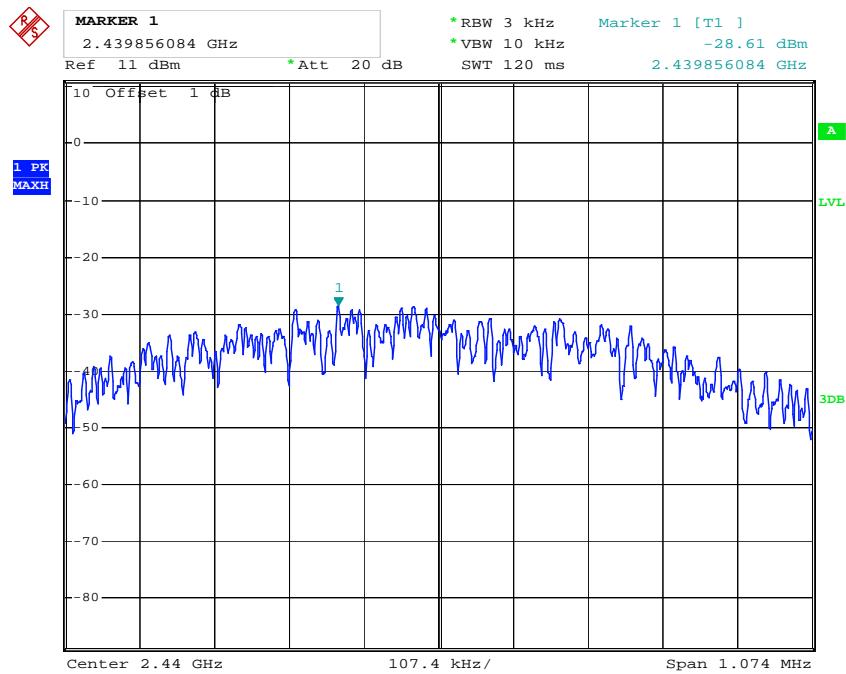

Date: 3.MAY.2013 11:37:38

## Power Spectral Density, High Channel

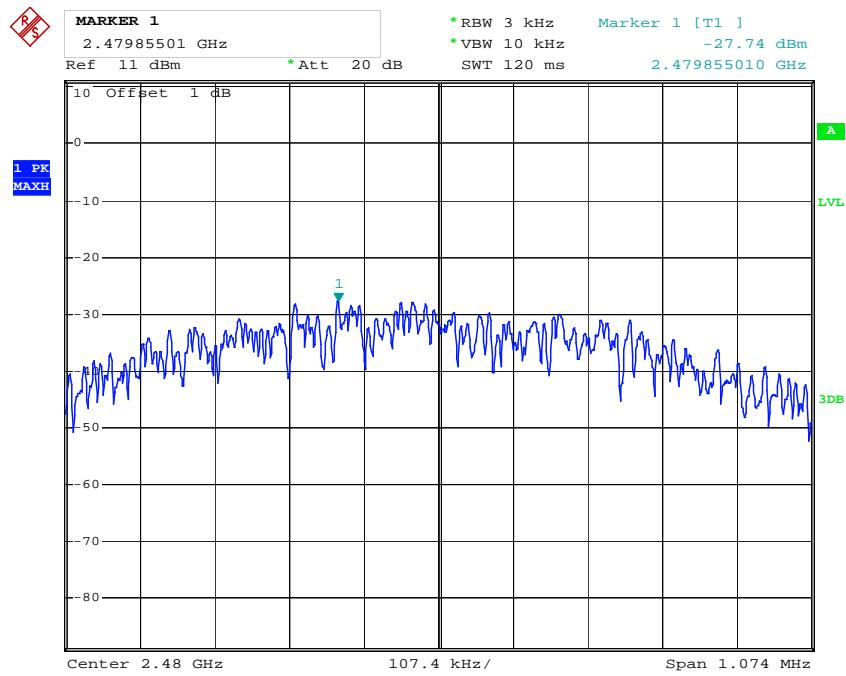

Date: 3.MAY.2013 11:38:14

\*\*\*\*\* END OF REPORT \*\*\*\*\*