






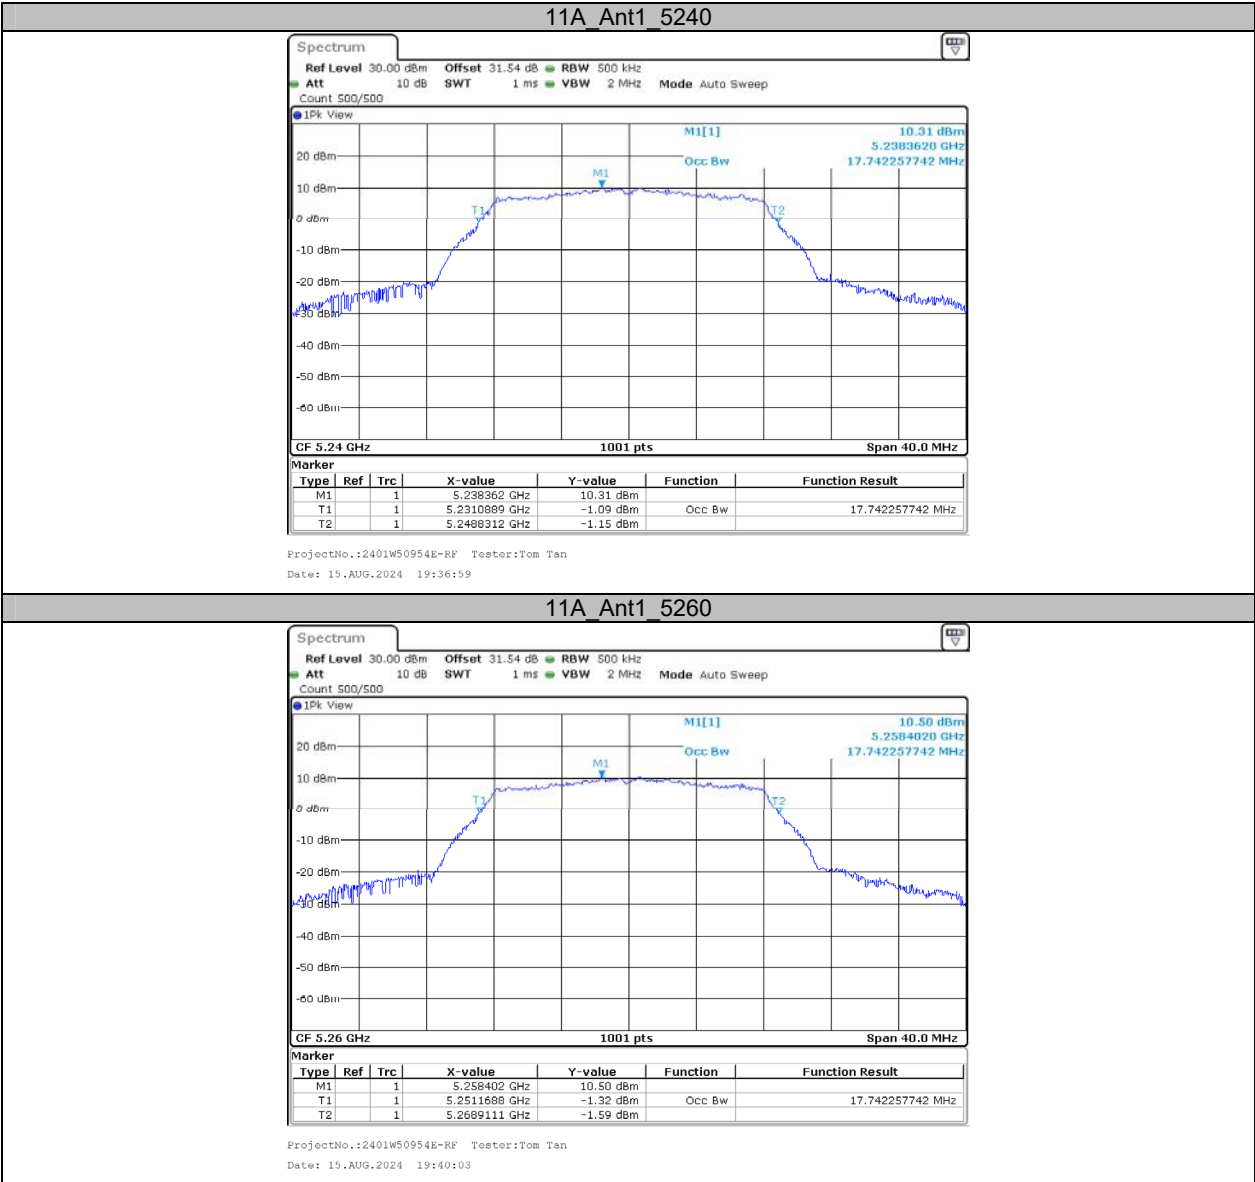


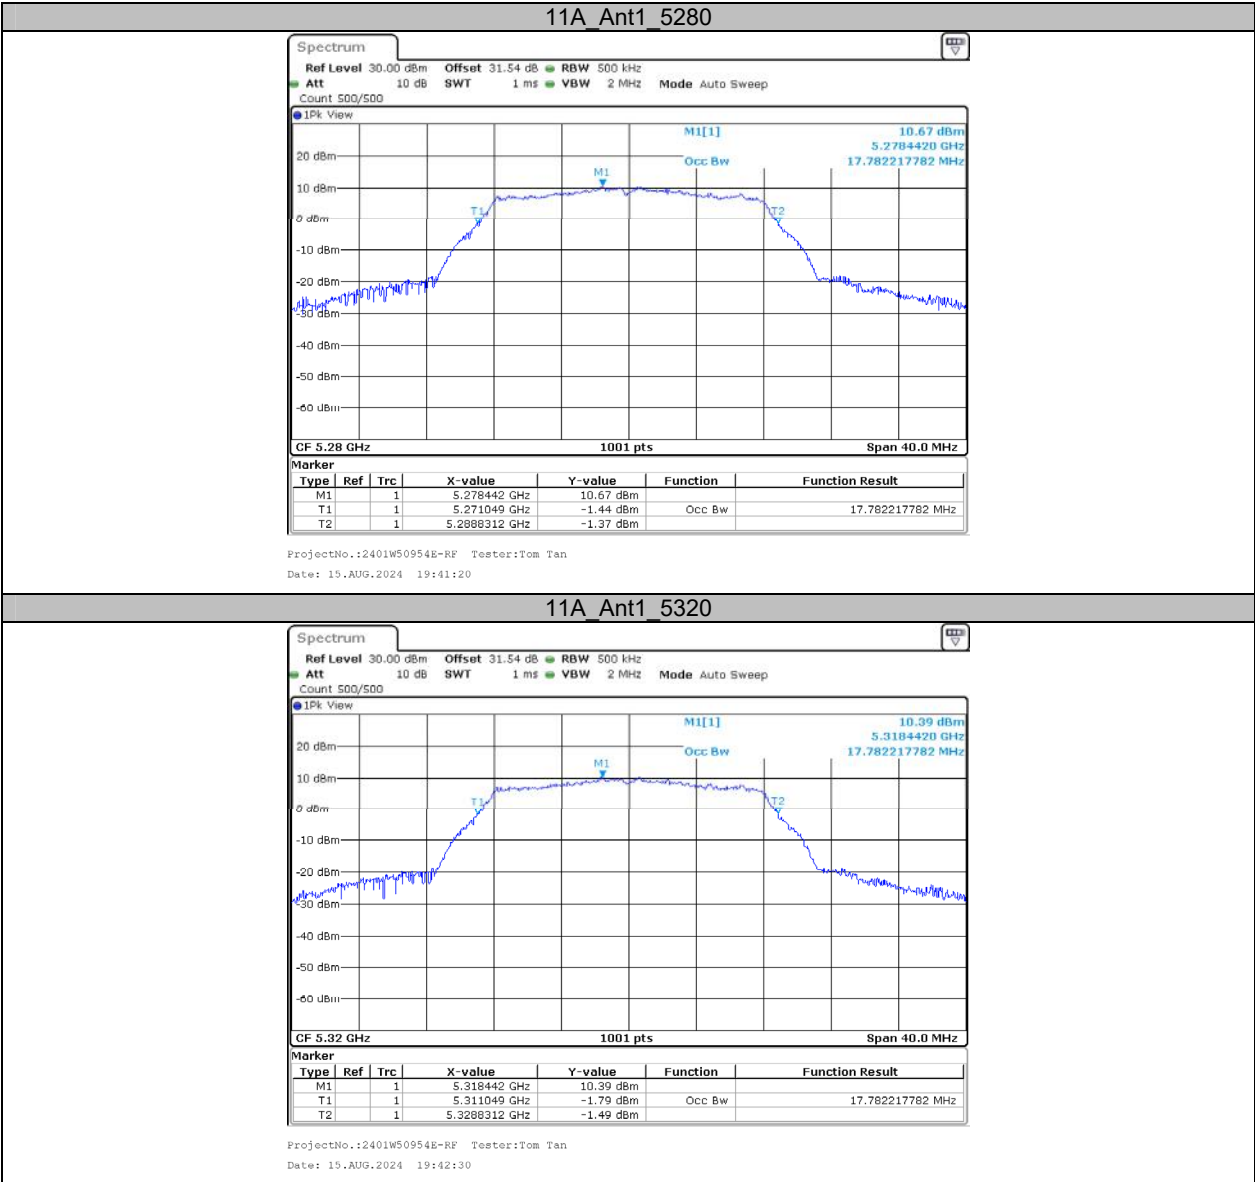


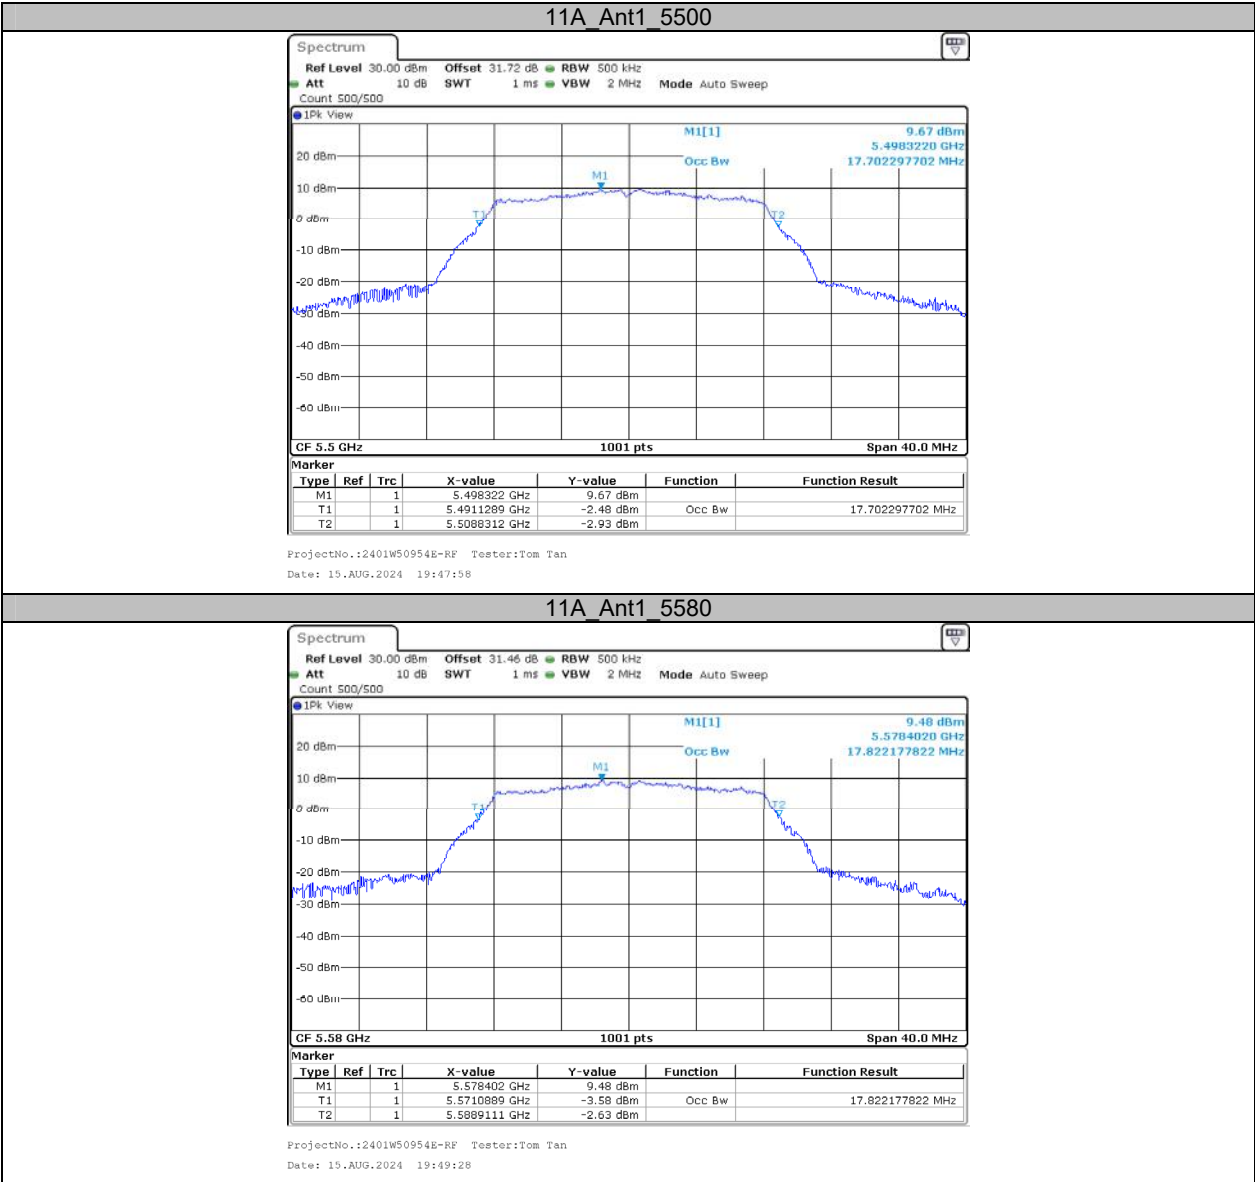


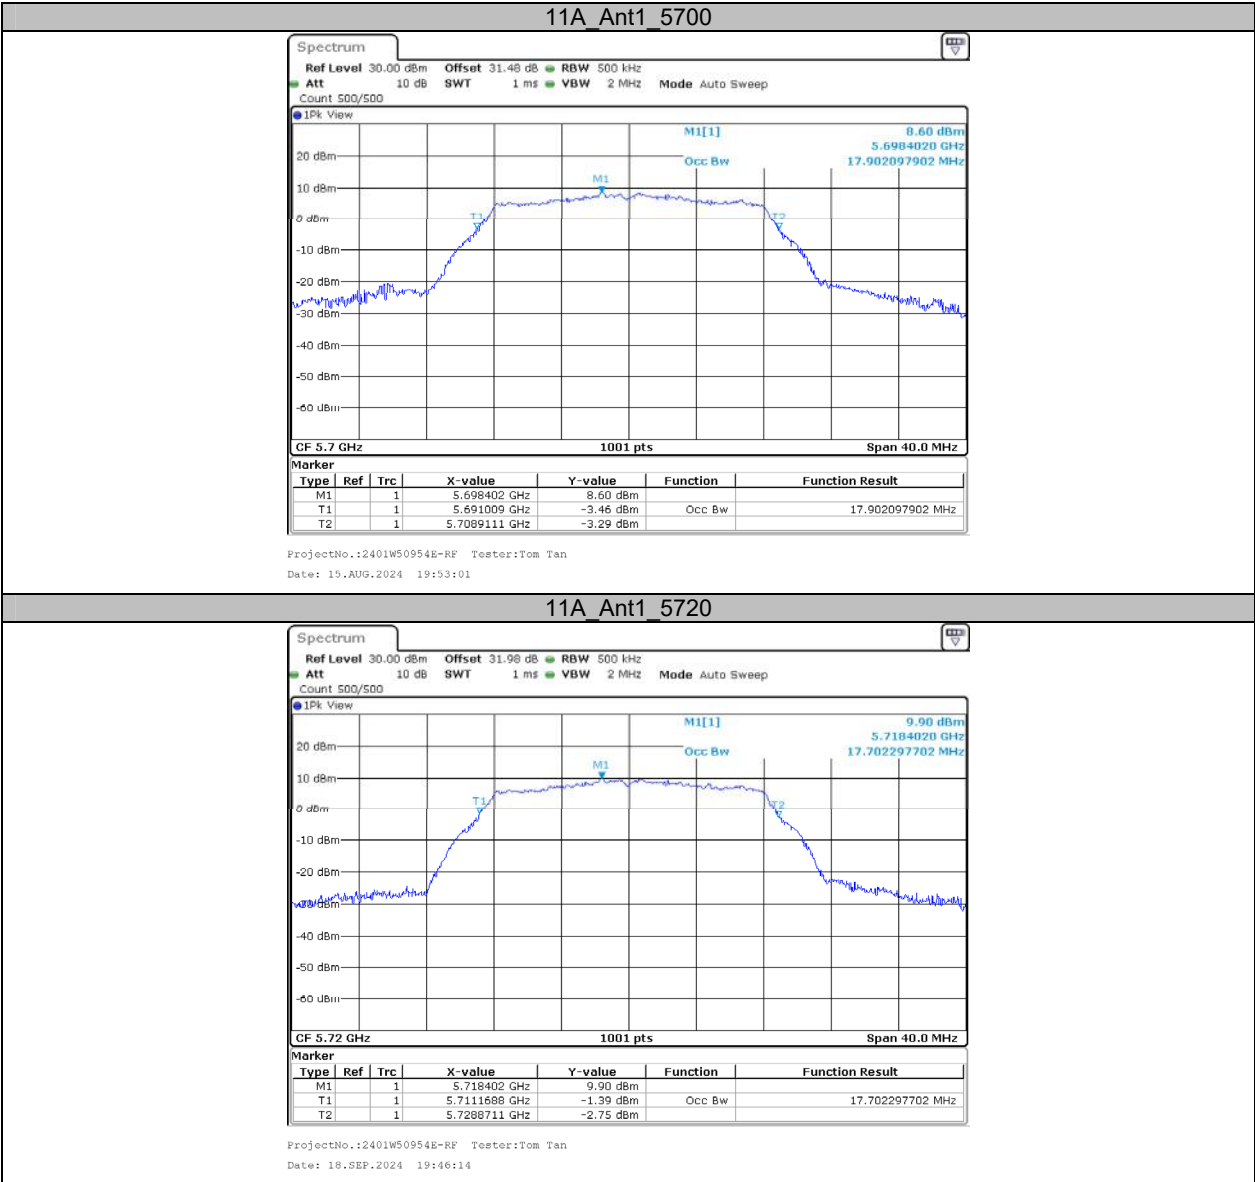


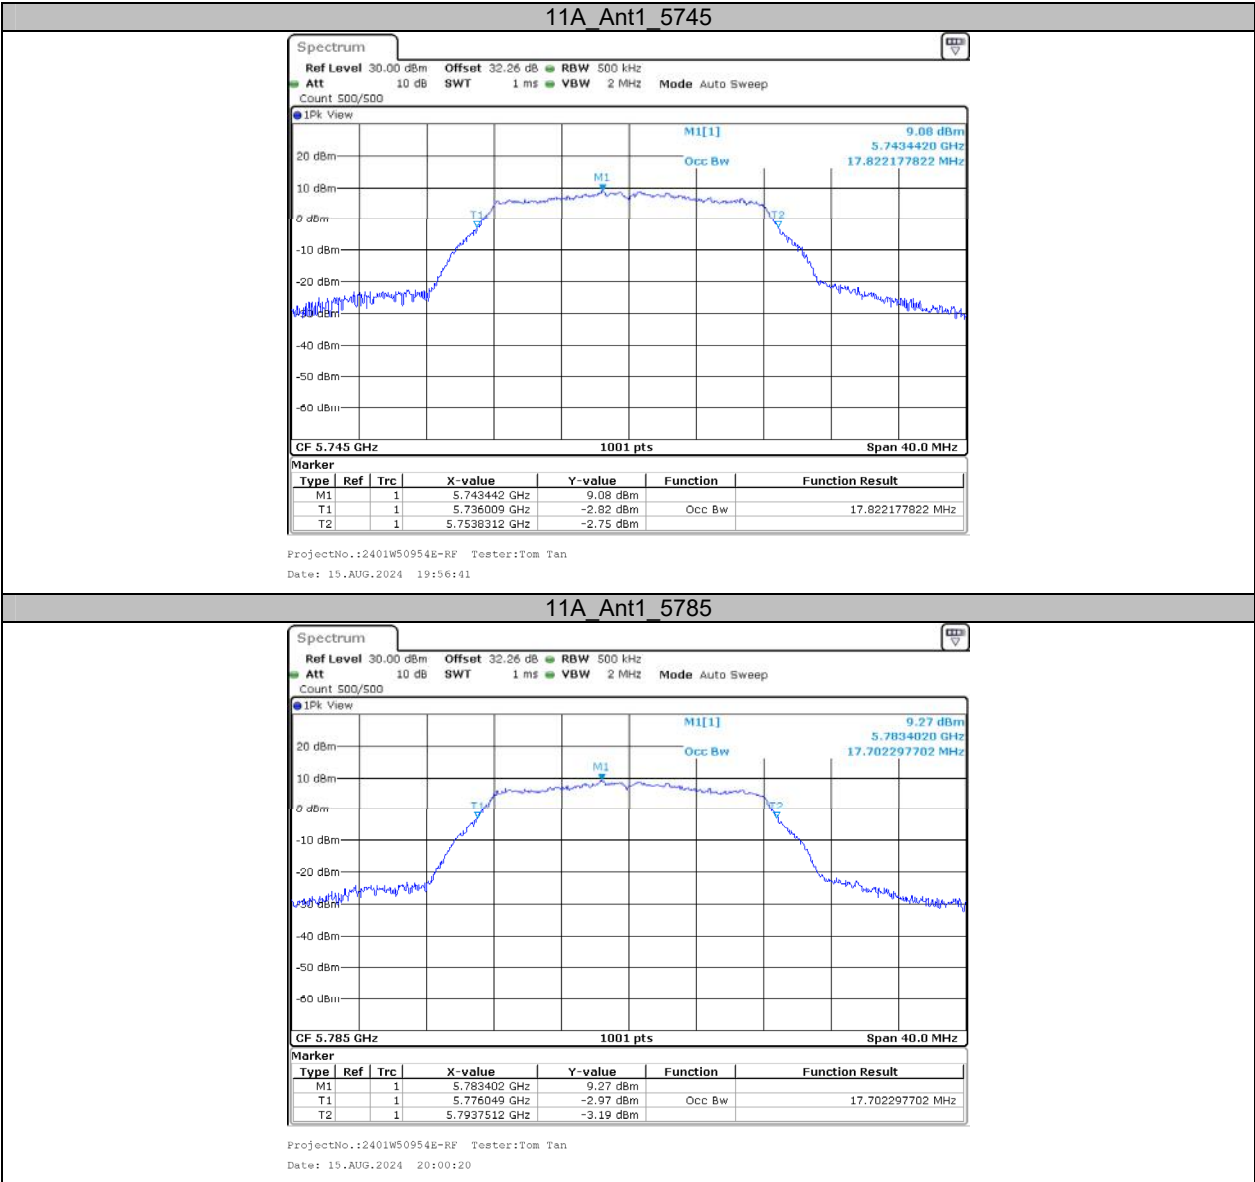


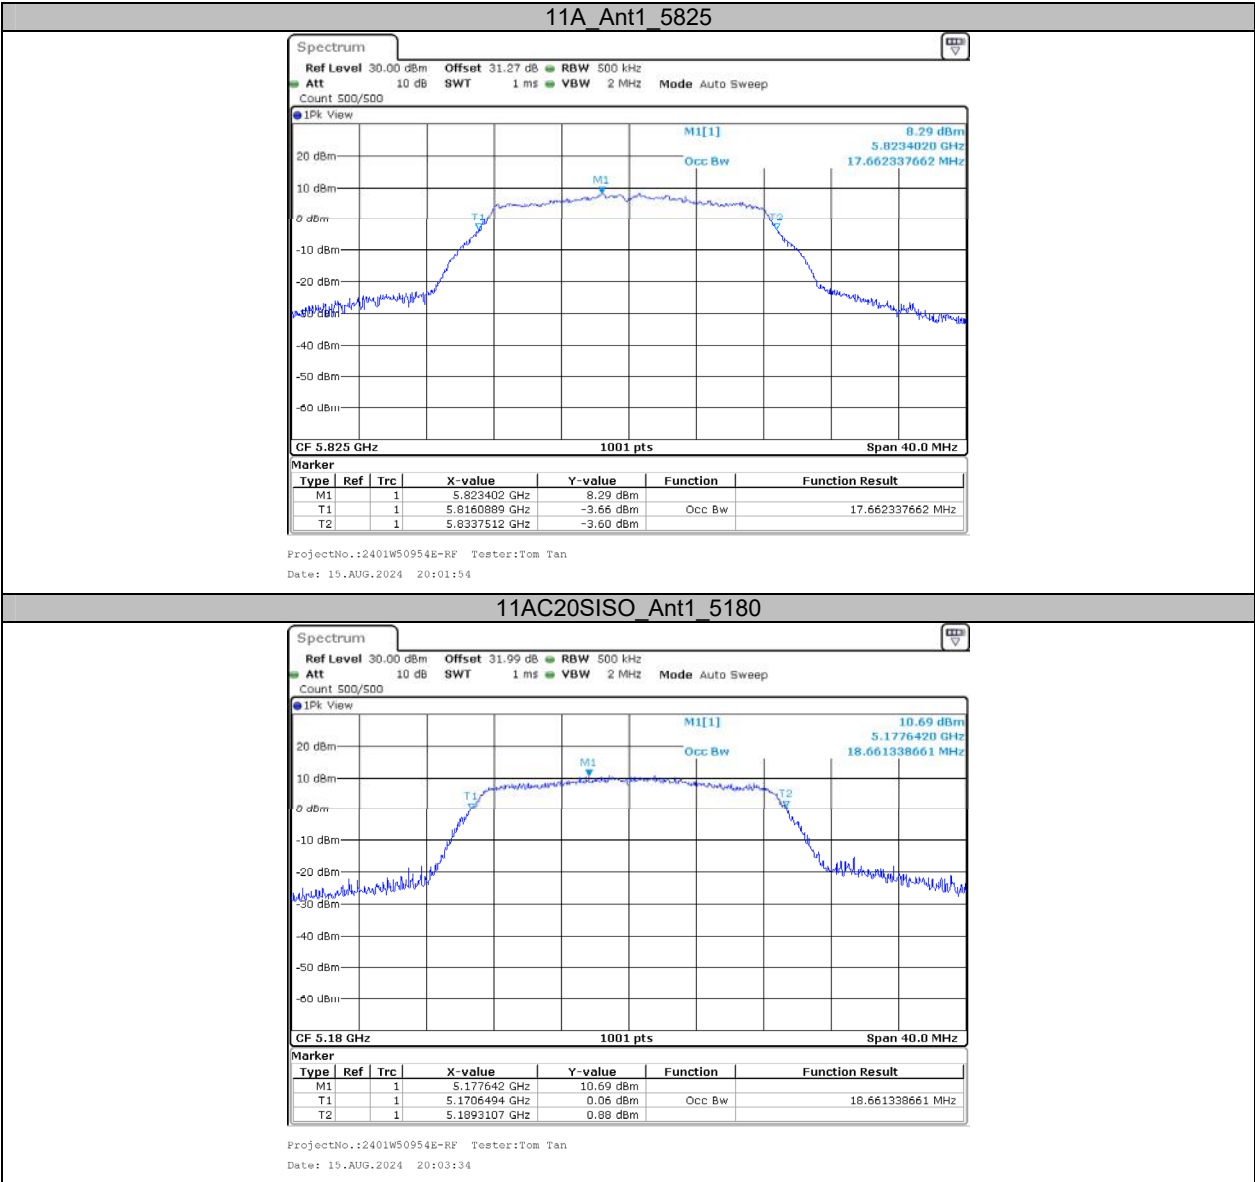


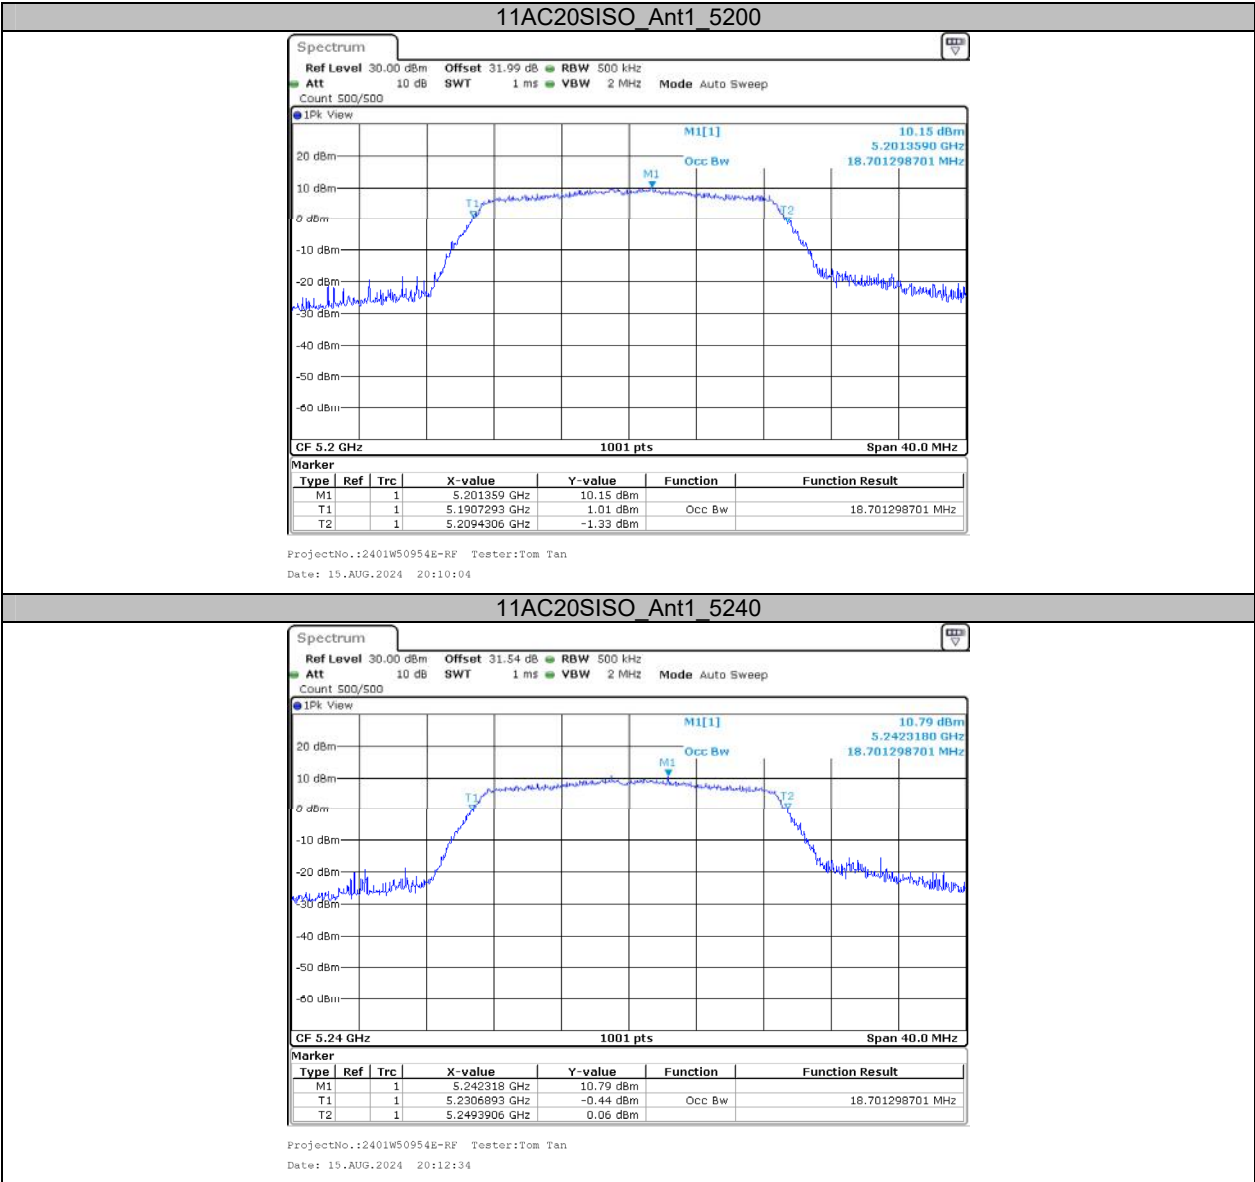


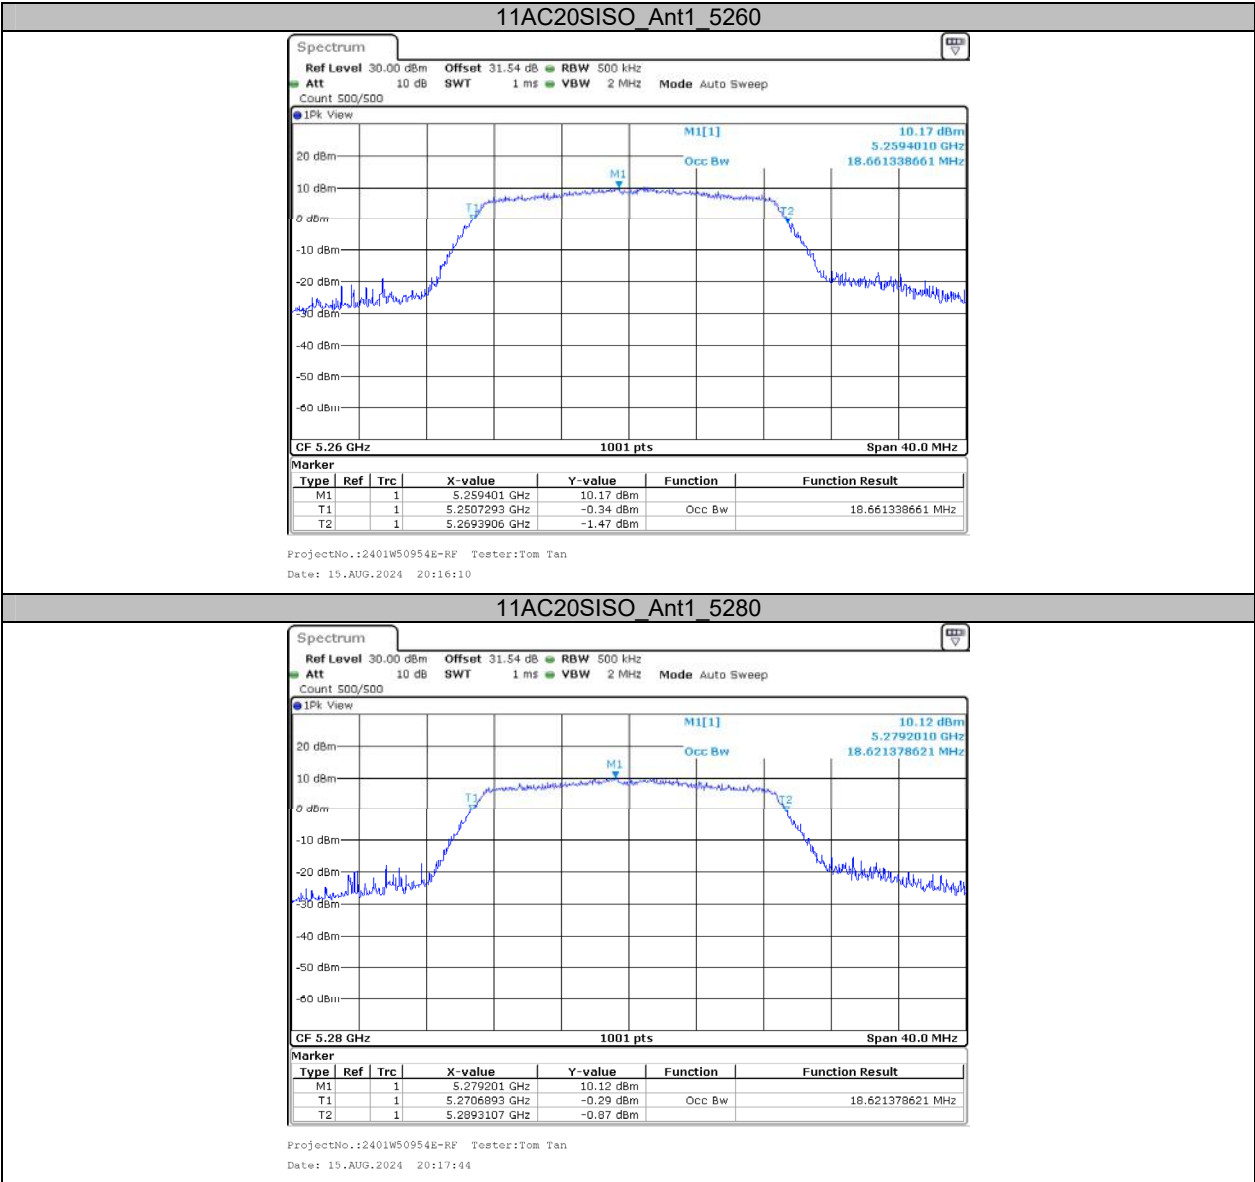


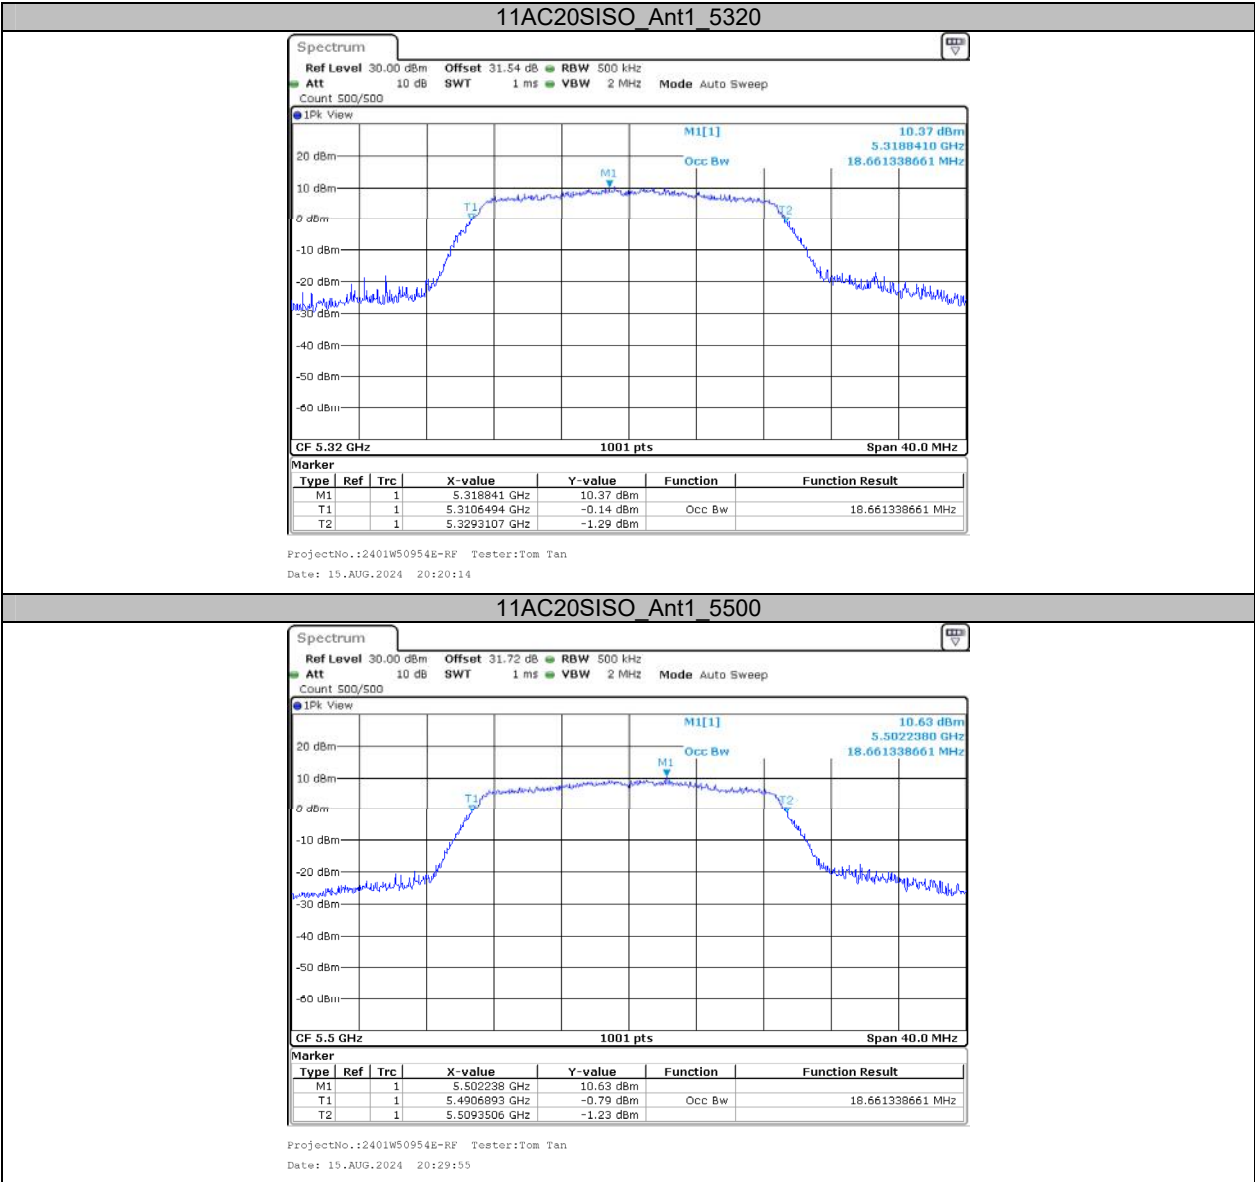


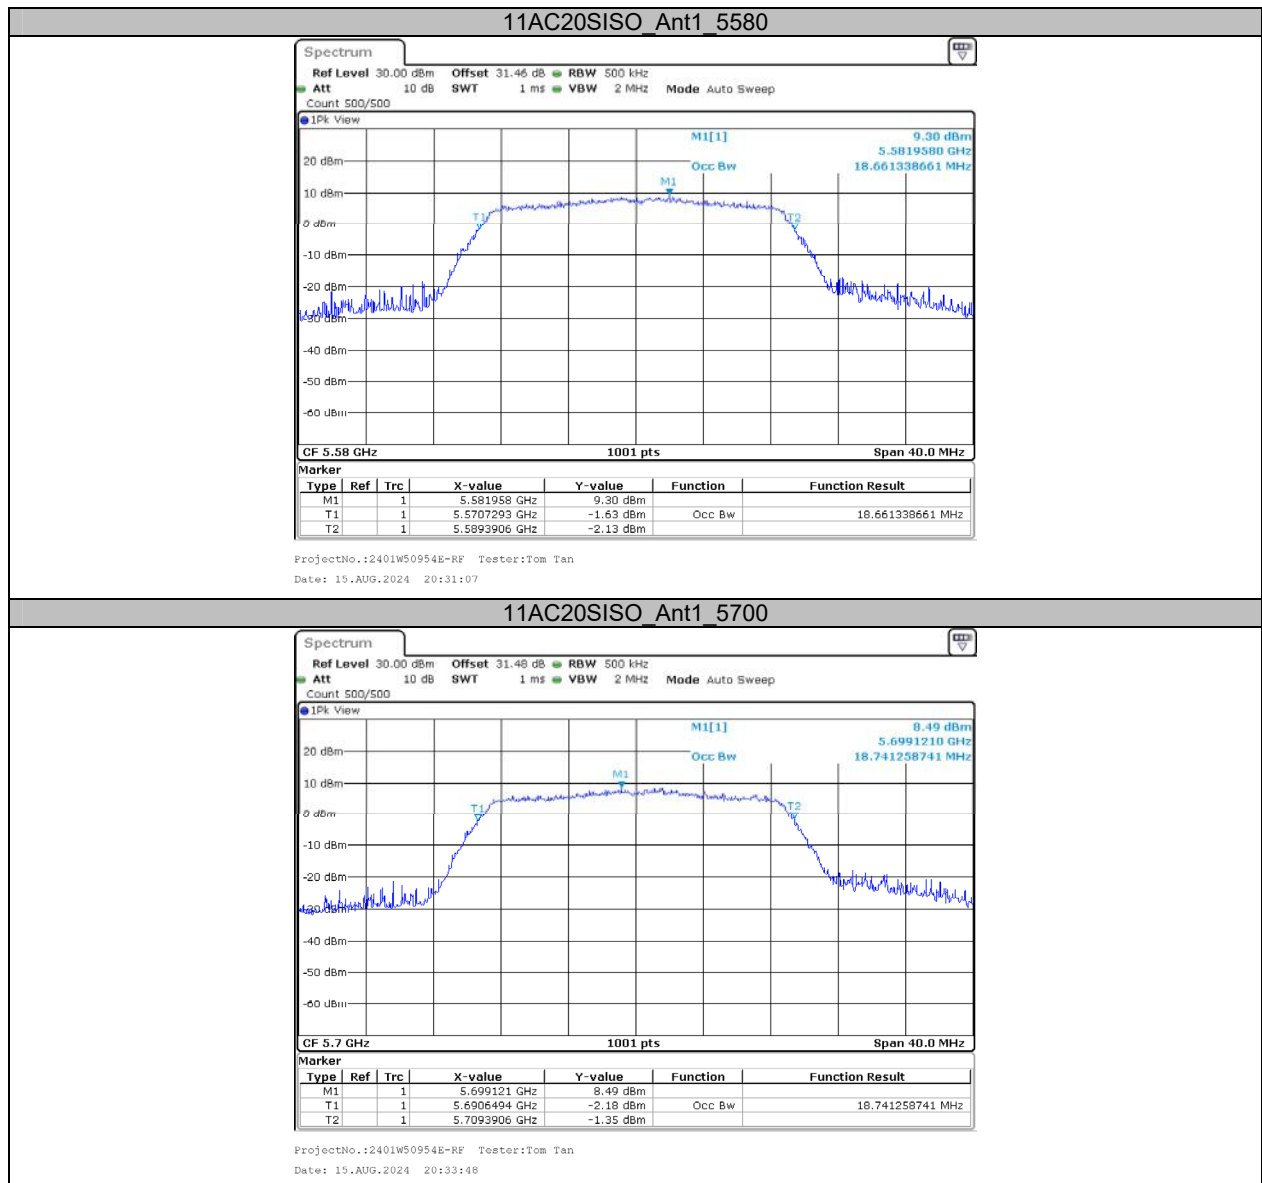


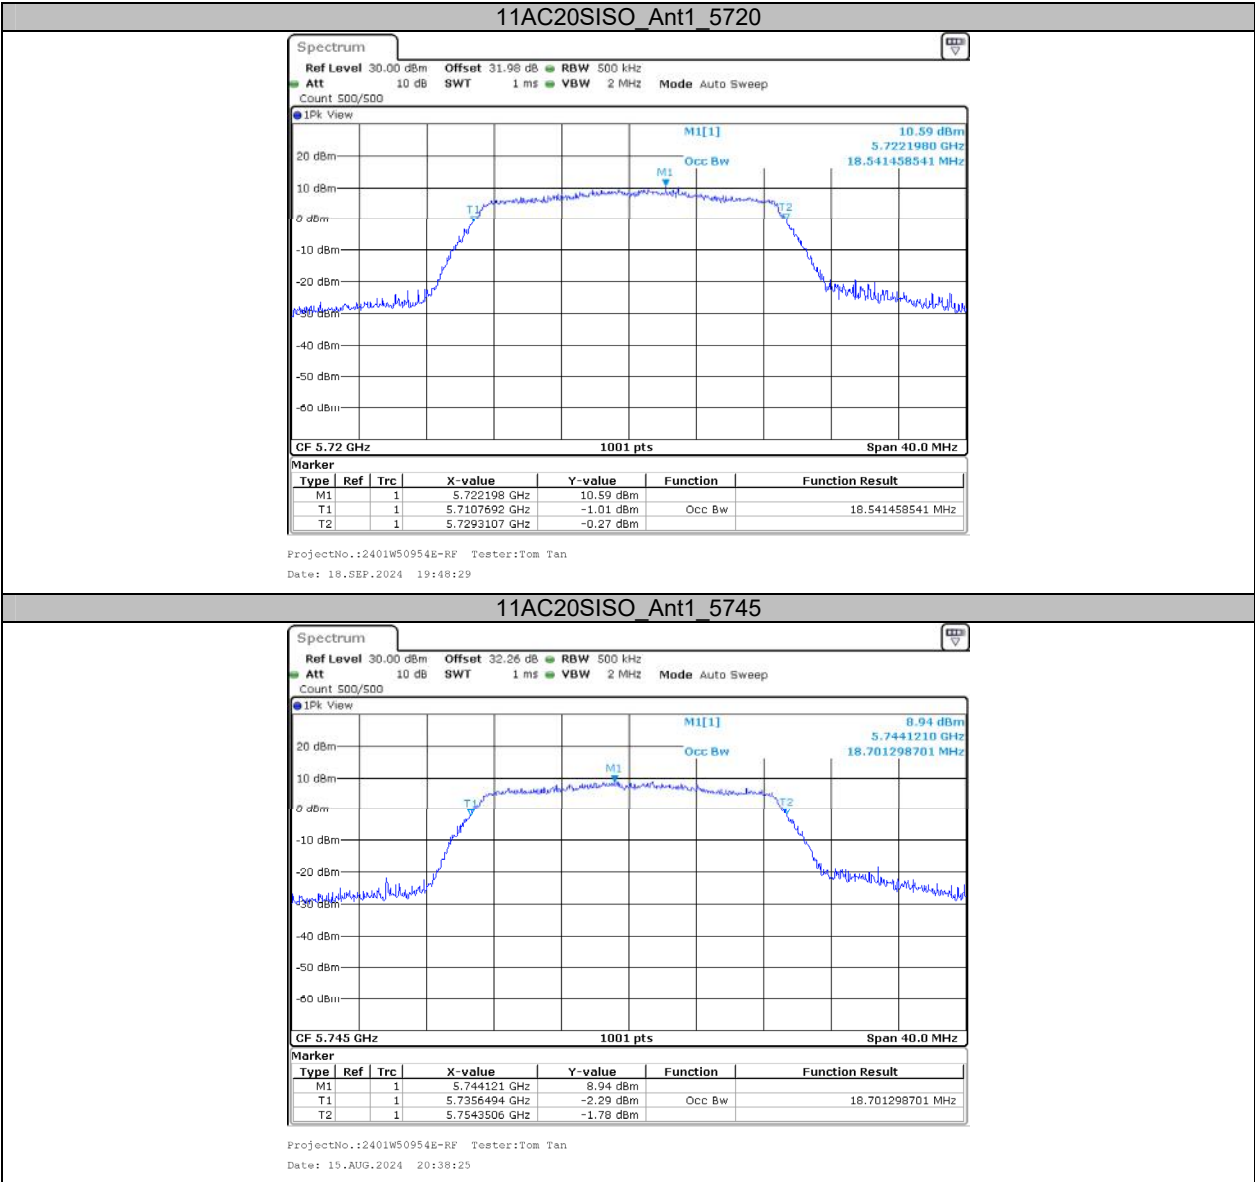


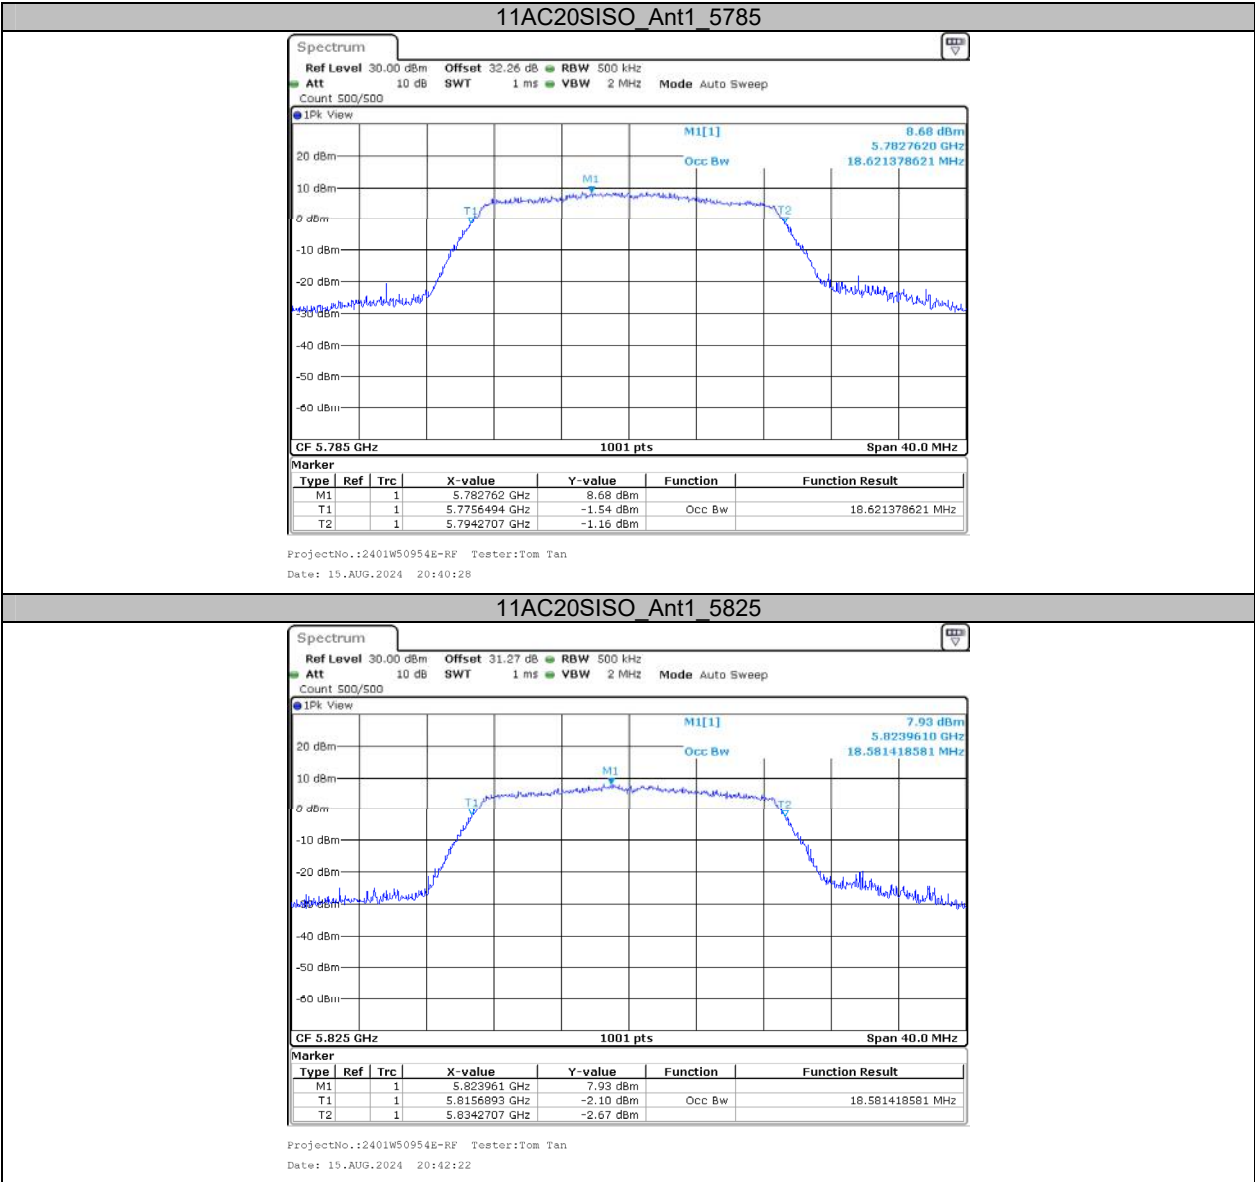


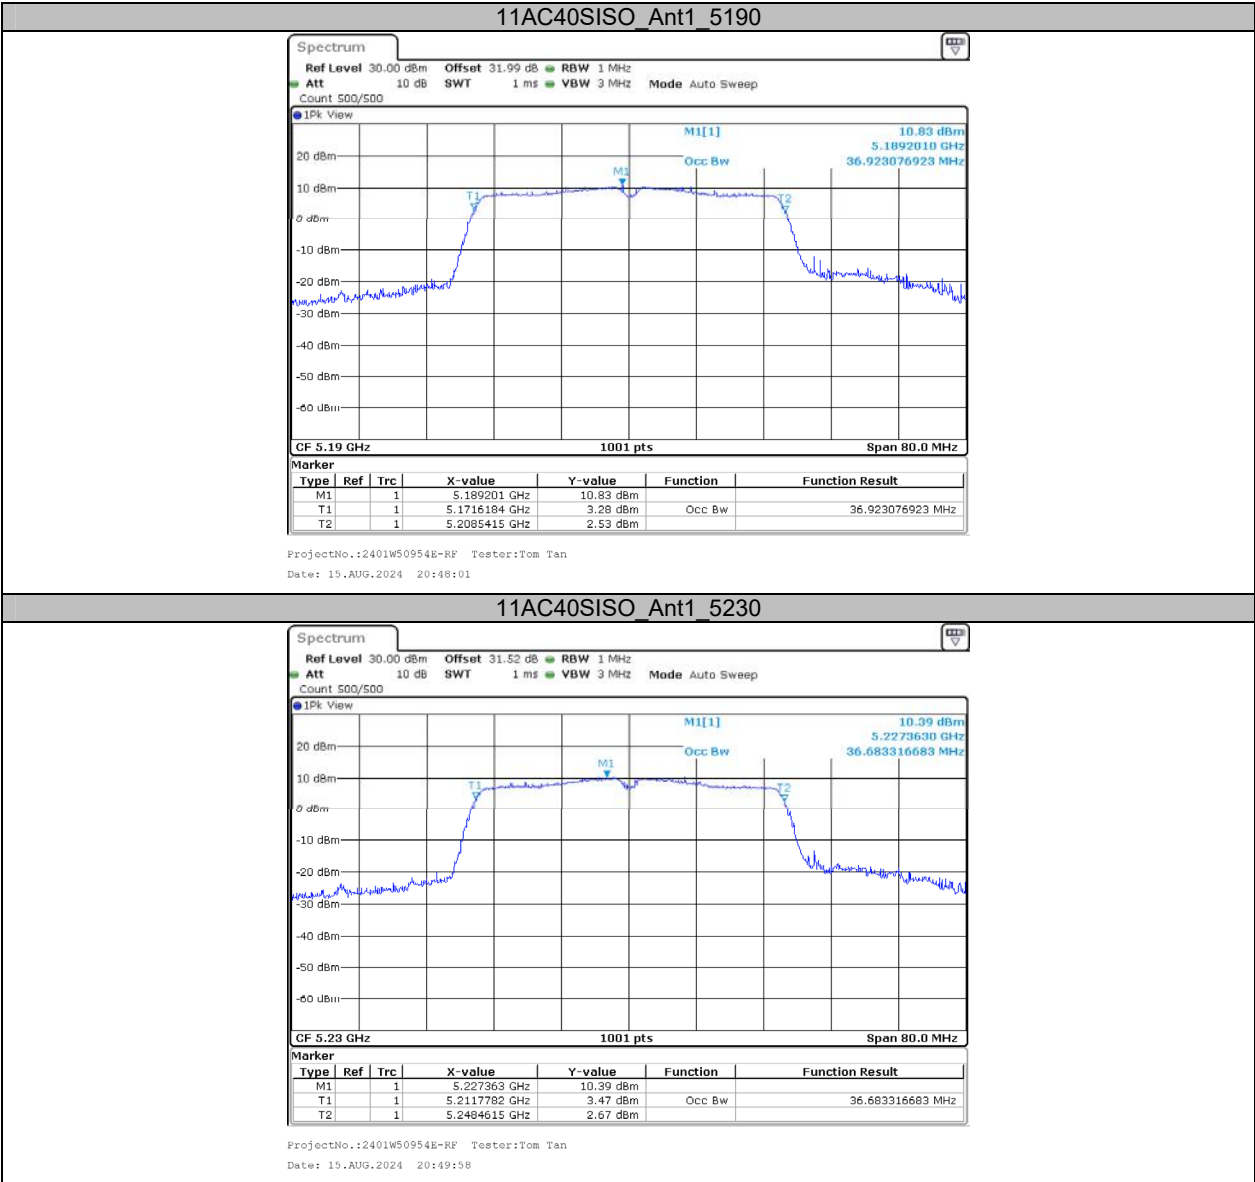


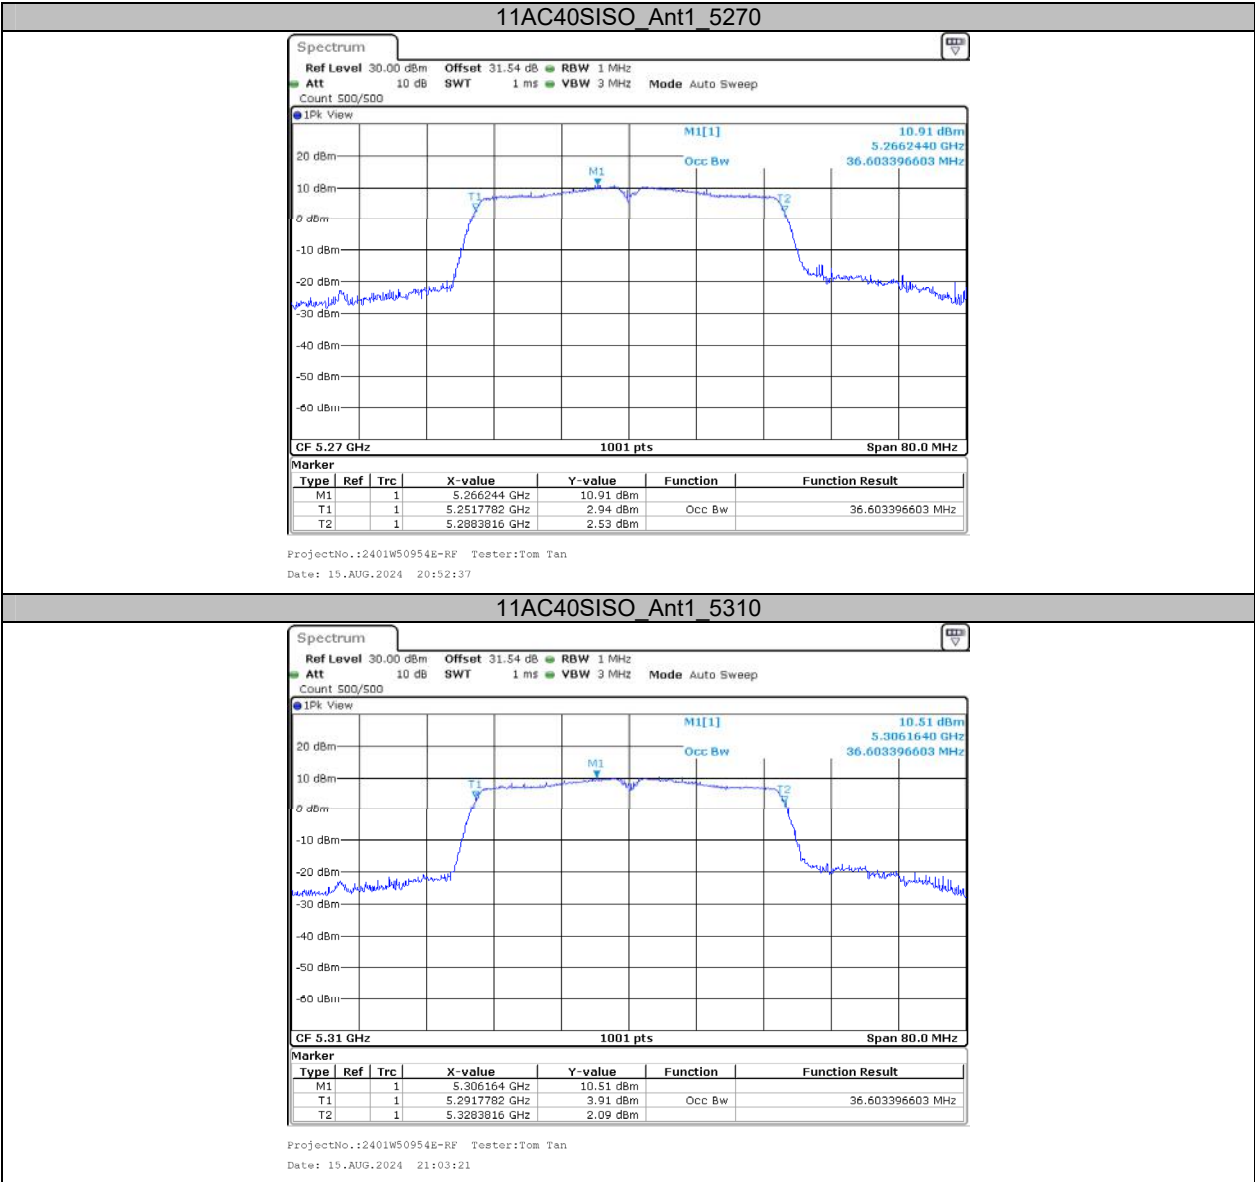


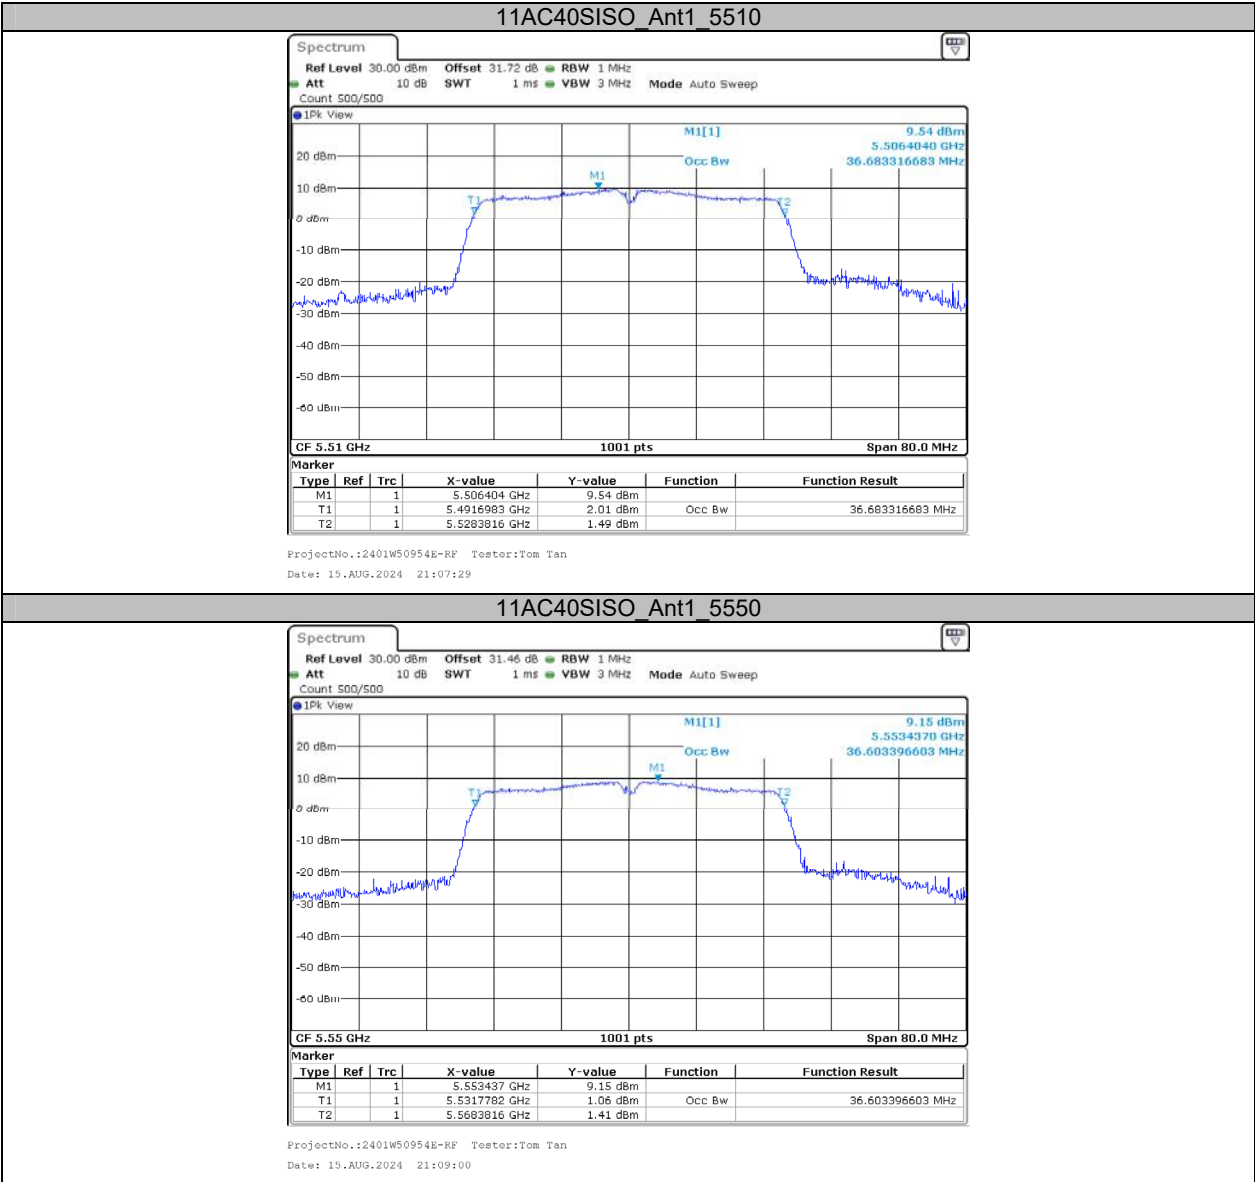


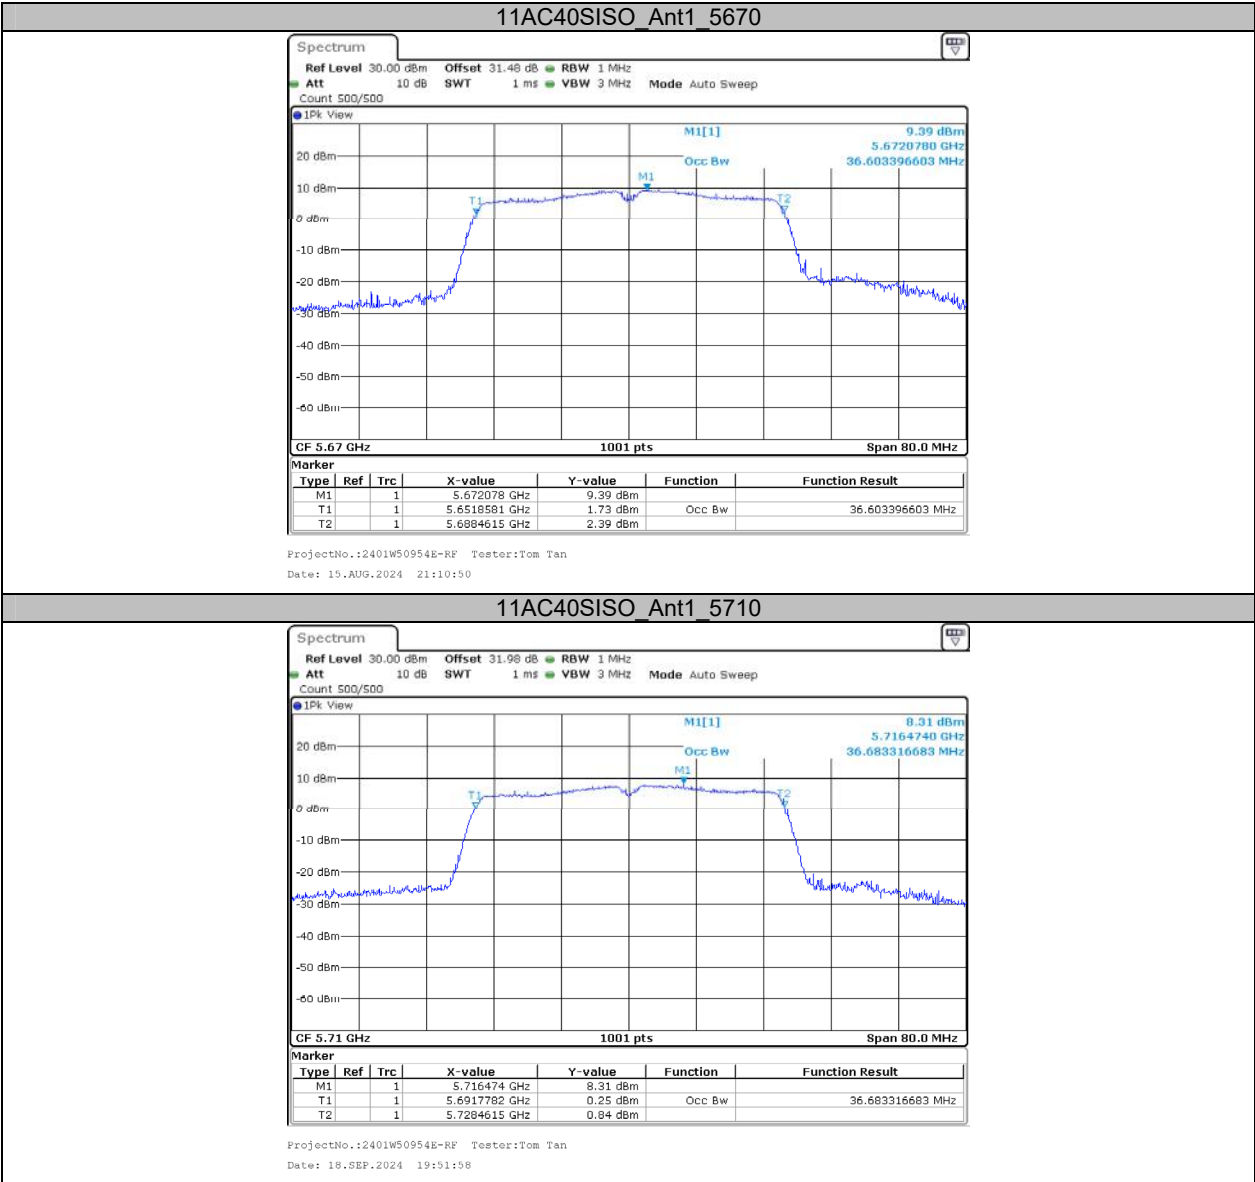

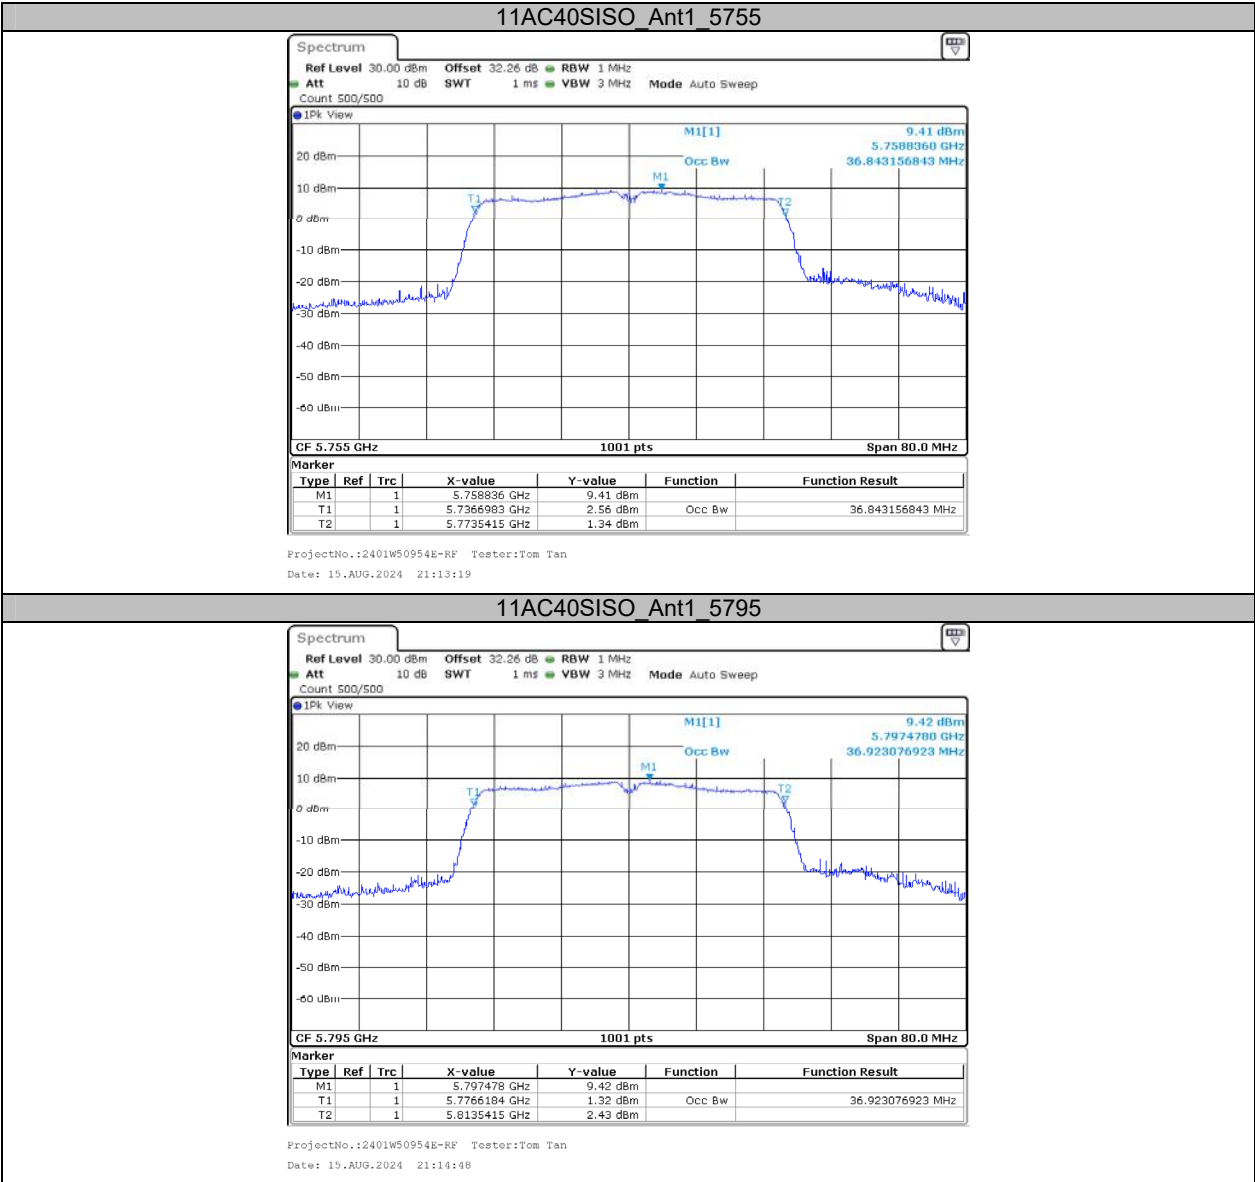

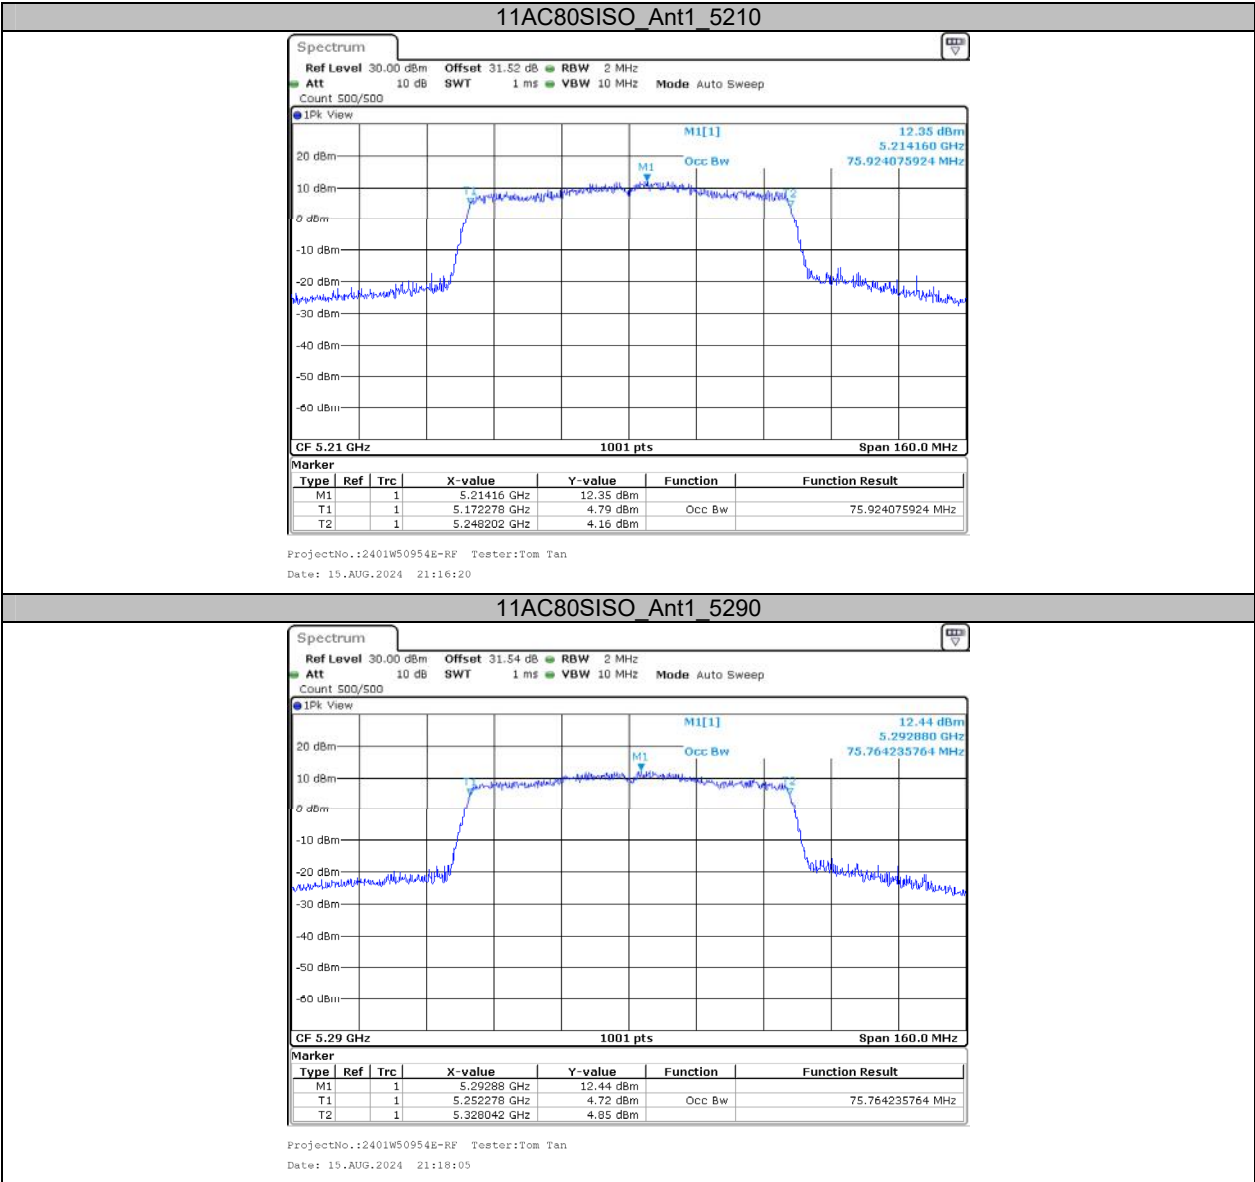

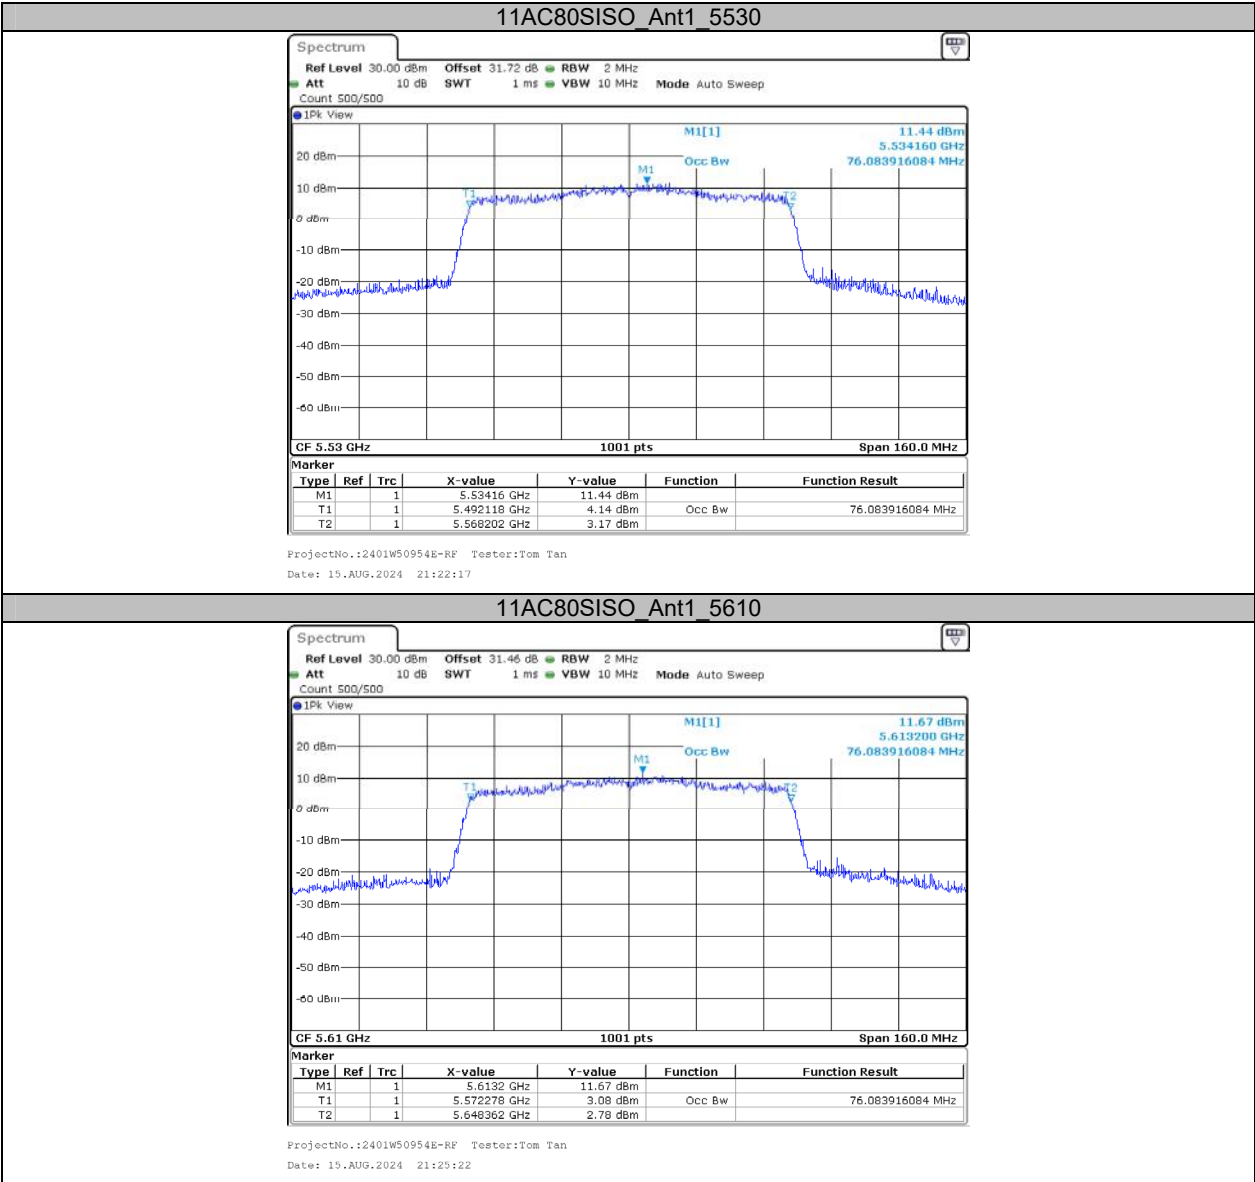


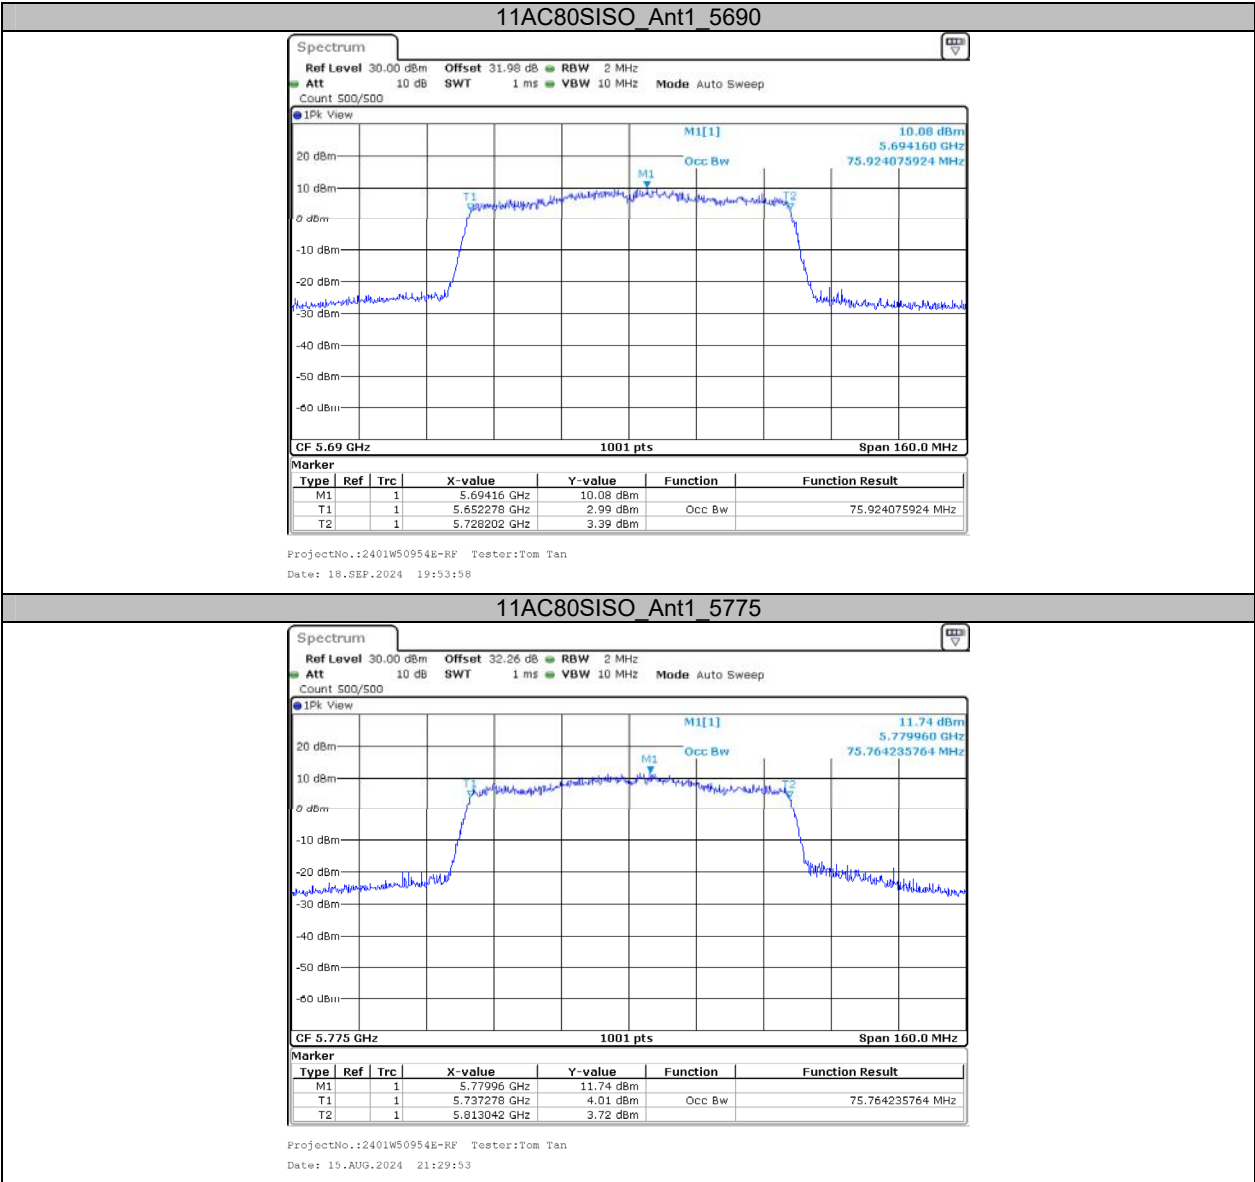



Appendix A3: Min emission bandwidth**Test Result**


Test Mode	Antenna	Frequency[MHz]	6dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5720	16.32	5711.84	5728.16	0.5	PASS
		5720 UNII-3	3.16	5725	5728.16	0.5	PASS
		5745	16.32	5736.84	5753.16	0.5	PASS
		5785	16.28	5776.84	5793.12	0.5	PASS
		5825	16.28	5816.84	5833.12	0.5	PASS
11AC20SISO	Ant1	5720	17.56	5711.20	5728.76	0.5	PASS
		5720 UNII-3	3.76	5725	5728.76	0.5	PASS
		5745	17.56	5736.20	5753.76	0.5	PASS
		5785	17.28	5776.20	5793.48	0.5	PASS
		5825	17.08	5816.44	5833.52	0.5	PASS
11AC40SISO	Ant1	5710	35.76	5692.40	5728.16	0.5	PASS
		5710 UNII-3	3.16	5725	5728.16	0.5	PASS
		5755	36.08	5737.08	5773.16	0.5	PASS
		5795	36.32	5776.84	5813.16	0.5	PASS
11AC80SISO	Ant1	5690	75.36	5652.40	5727.76	0.5	PASS
		5690 UNII-3	2.76	5725	5727.76	0.5	PASS
		5775	75.20	5737.40	5812.60	0.5	PASS


Test Graphs

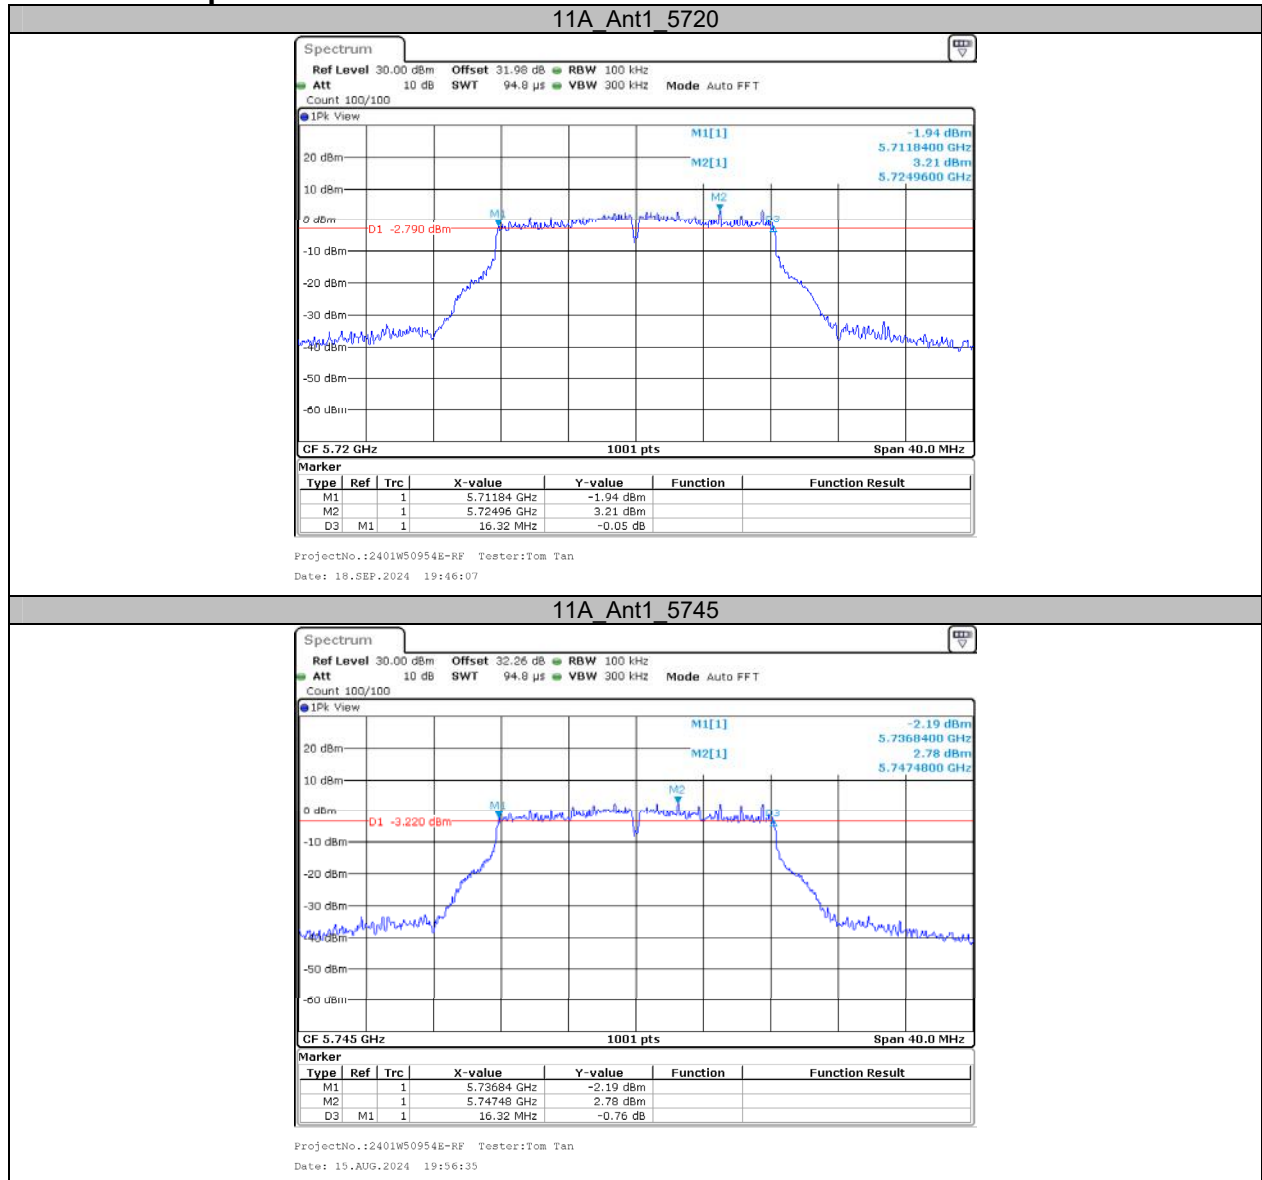


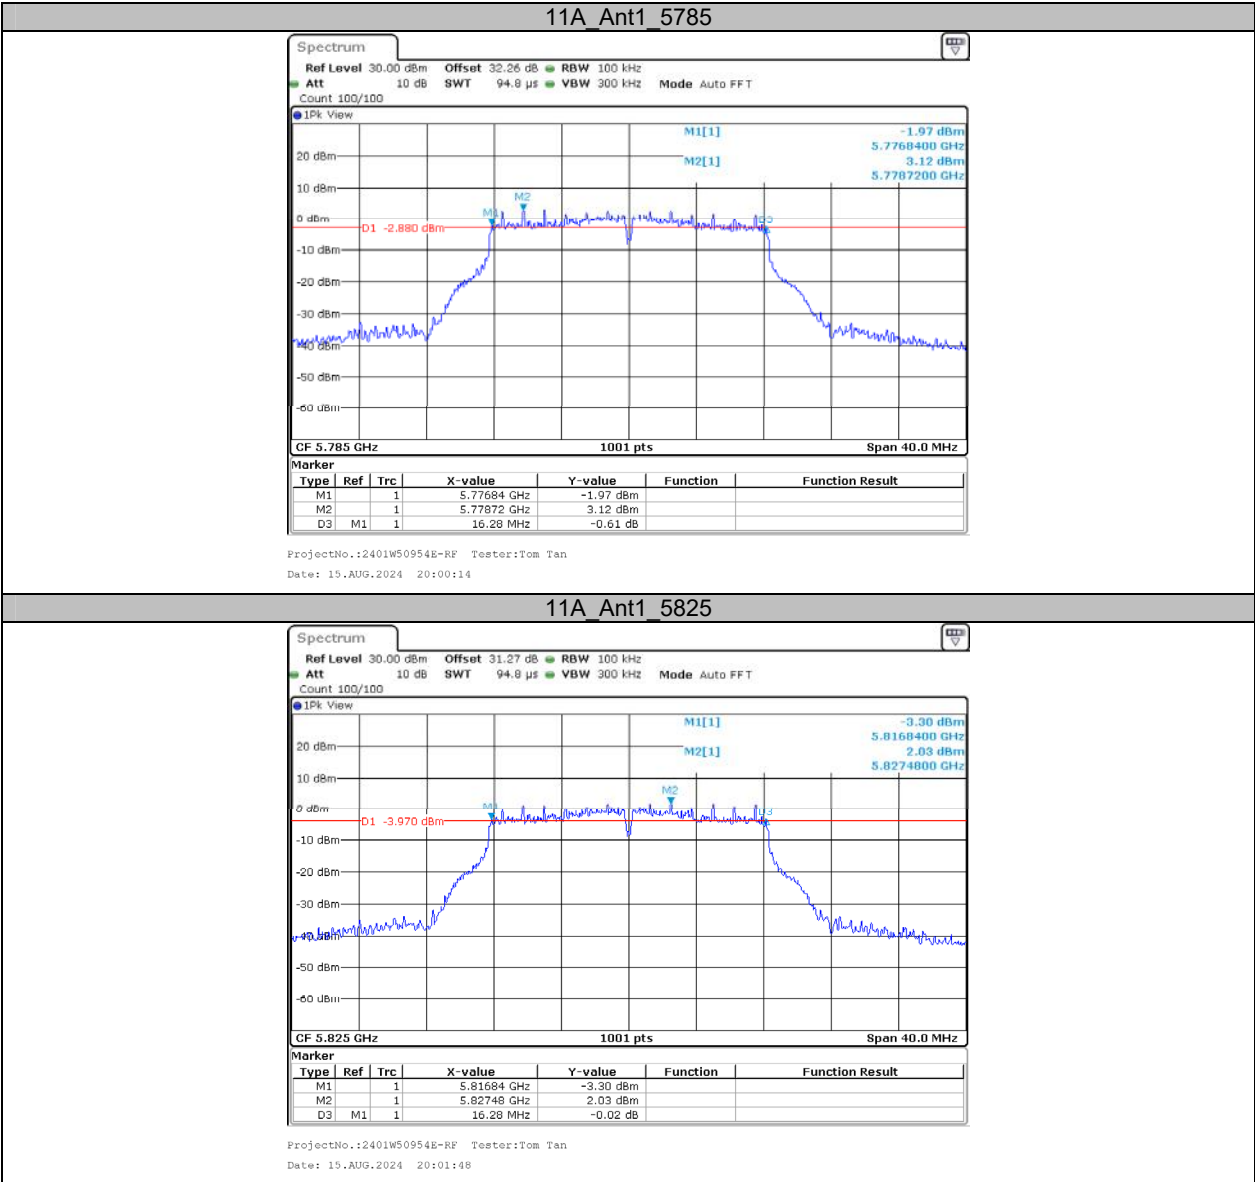


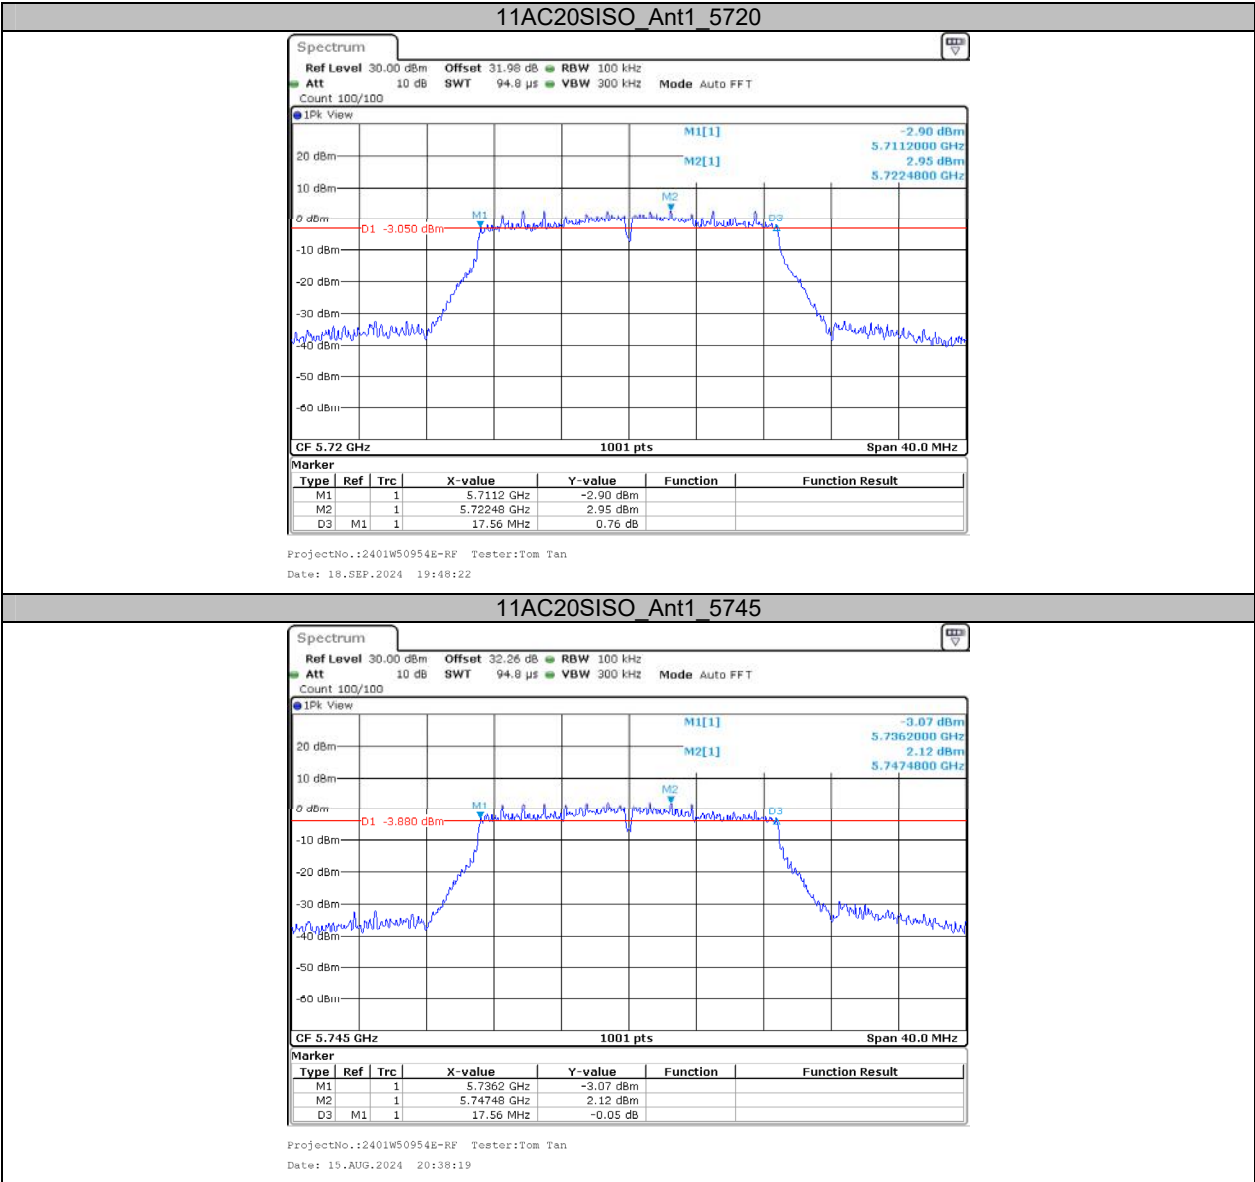

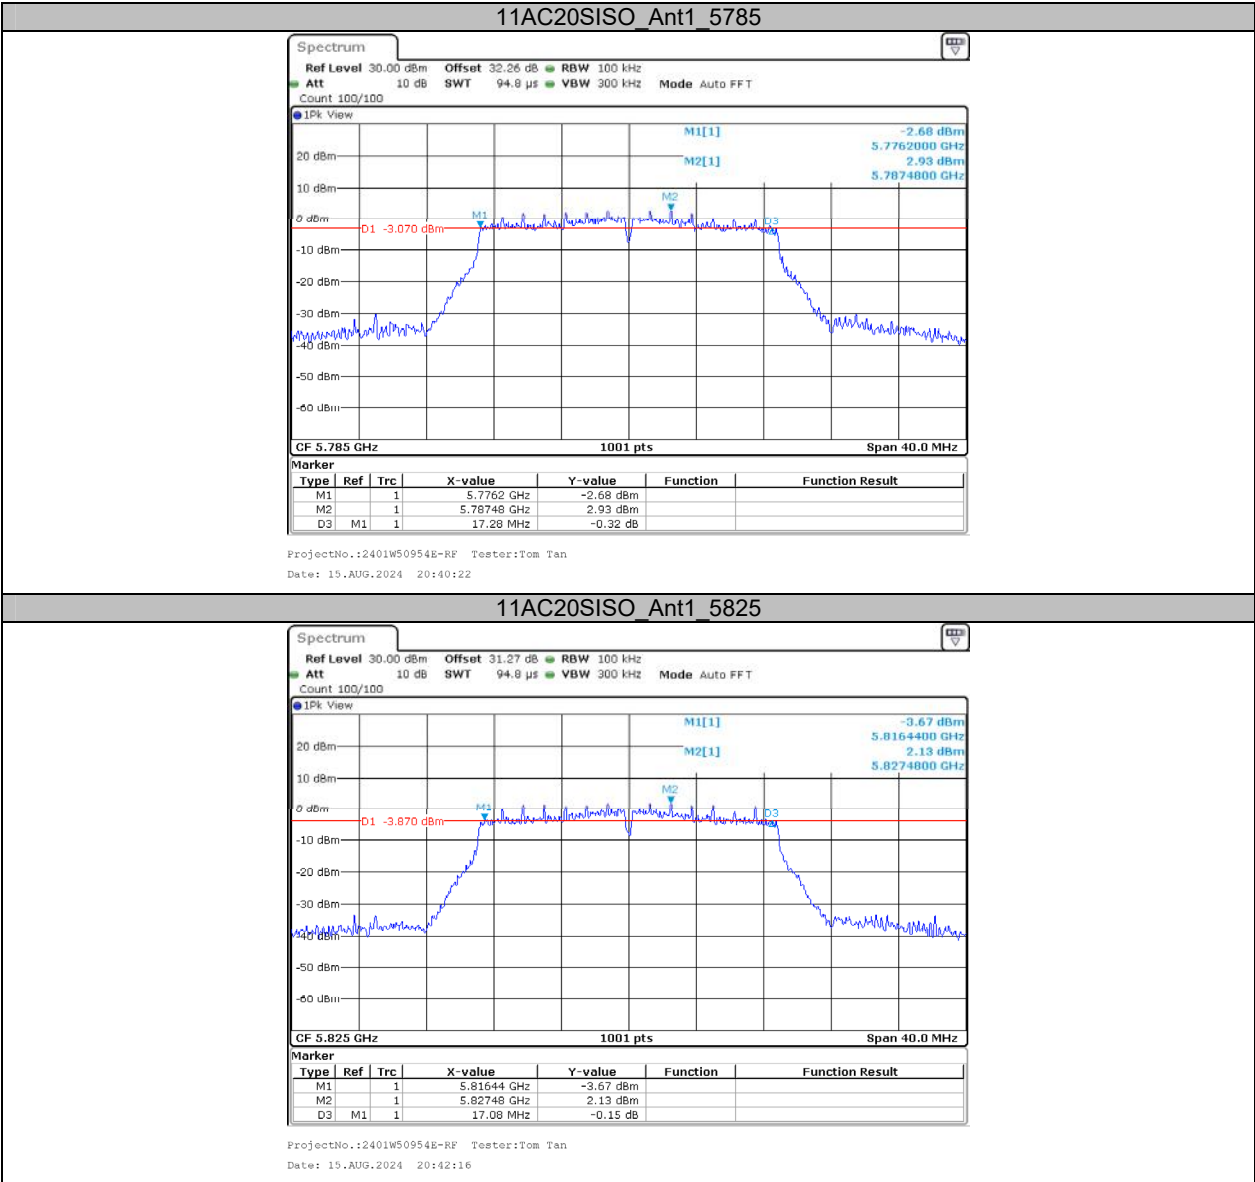

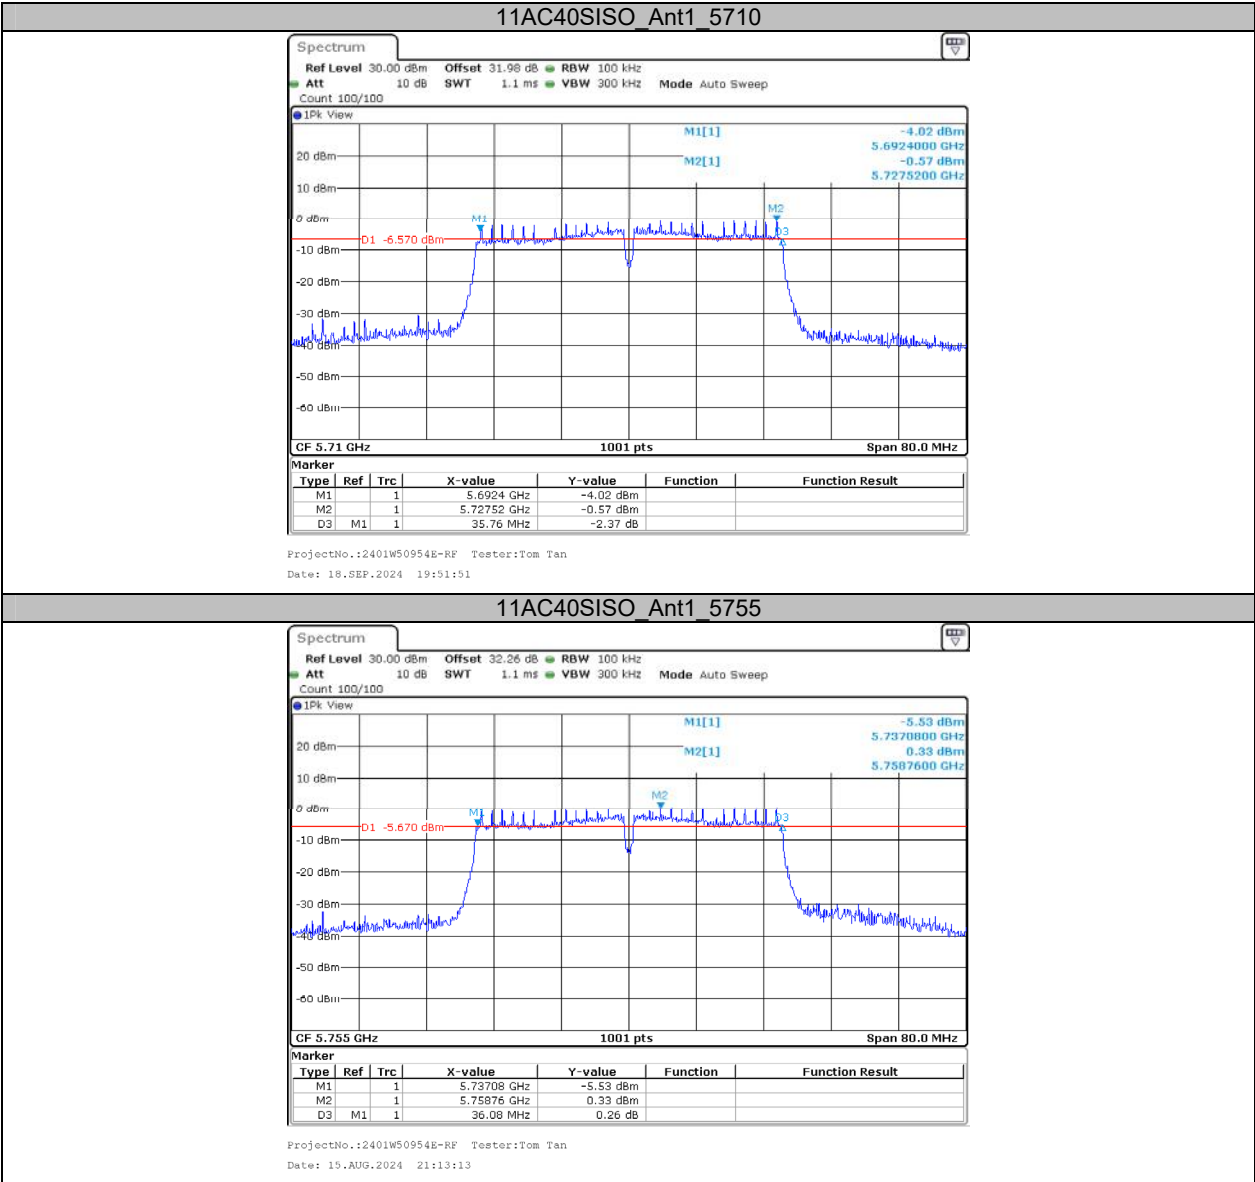

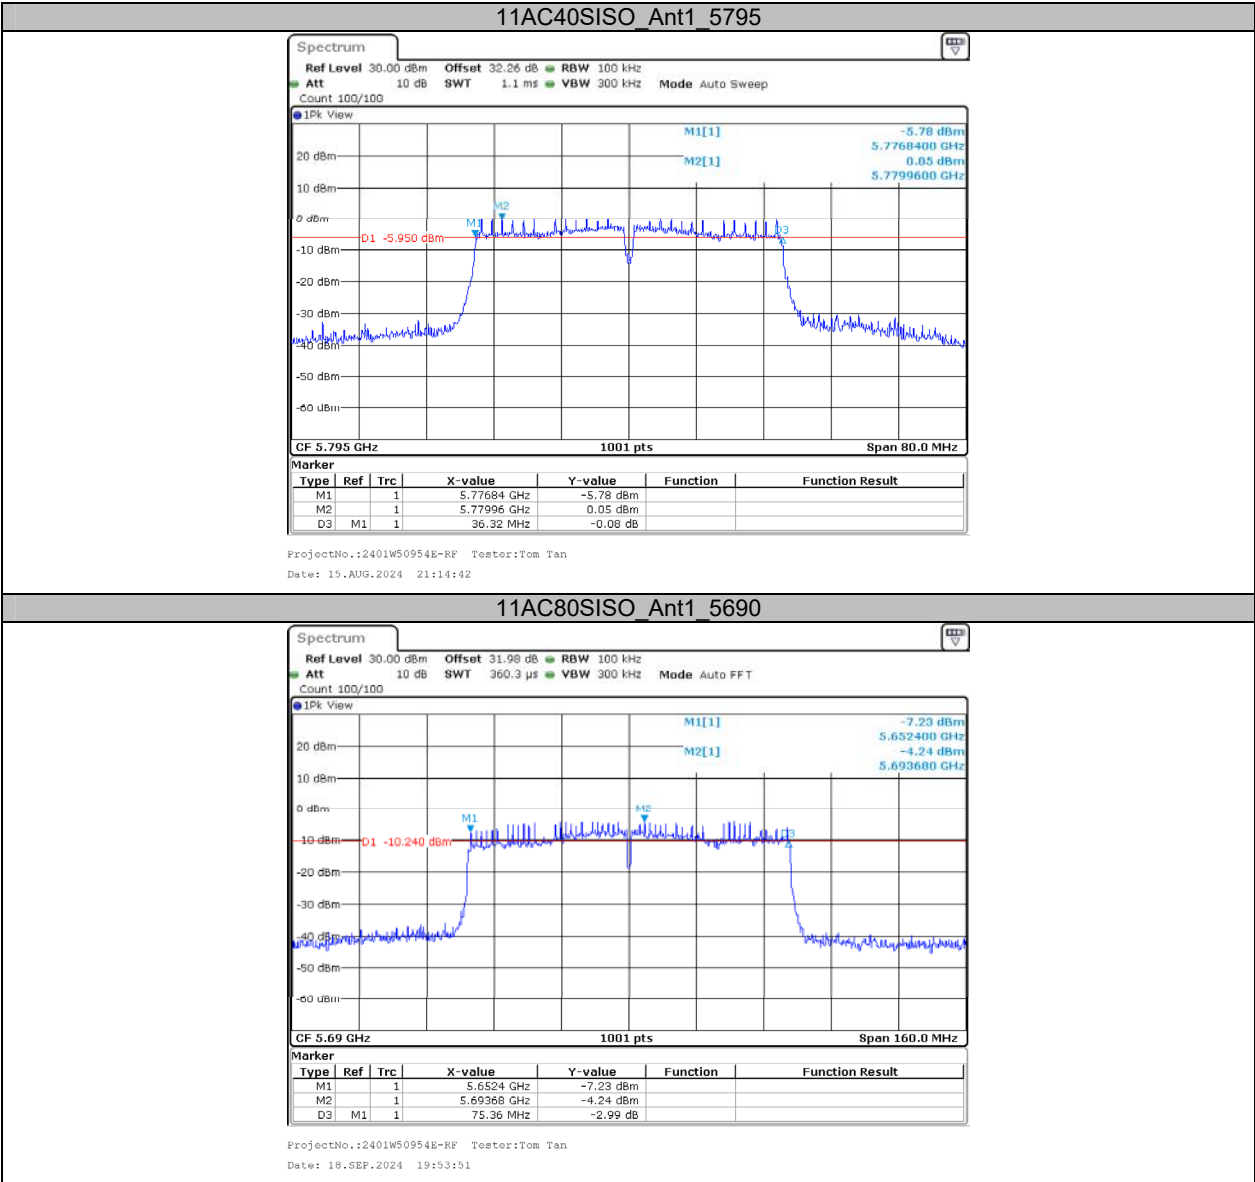

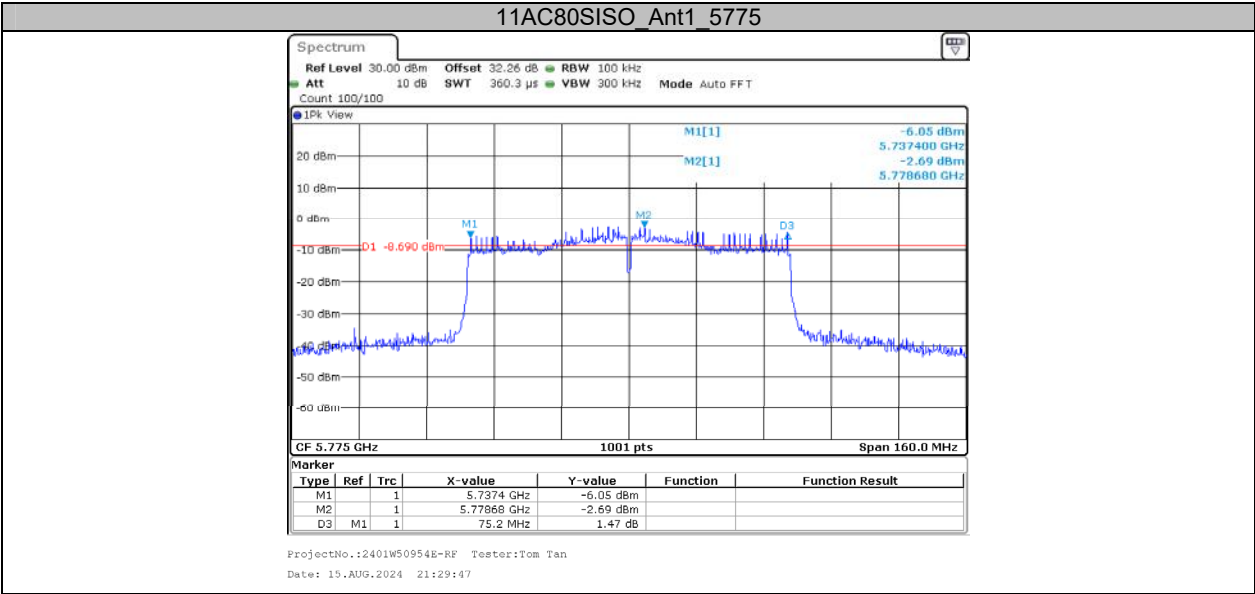

Appendix B: Maximum conducted output power**Test Result**

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	16.55	≤23.98	PASS
		5200	16.06	≤23.98	PASS
		5240	15.89	≤23.98	PASS
		5260	16.09	≤23.98	PASS
		5280	15.98	≤23.98	PASS
		5320	15.74	≤23.98	PASS
		5500	14.91	≤23.98	PASS
		5580	14.47	≤23.98	PASS
		5700	13.91	≤23.98	PASS
		5720	14.41	≤23.98	PASS
		5745	14.68	≤30.00	PASS
		5785	14.73	≤30.00	PASS
11AC20SISO	Ant1	5825	13.79	≤30.00	PASS
		5180	16.22	≤23.98	PASS
		5200	15.72	≤23.98	PASS
		5240	15.56	≤23.98	PASS
		5260	15.81	≤23.98	PASS
		5280	15.66	≤23.98	PASS
		5320	15.49	≤23.98	PASS
		5500	14.64	≤23.98	PASS
		5580	14.04	≤23.98	PASS
		5700	13.61	≤23.98	PASS
		5720	13.88	≤23.98	PASS
		5745	14.45	≤30.00	PASS
11AC40SISO	Ant1	5785	14.52	≤30.00	PASS
		5825	13.52	≤30.00	PASS
		5190	14.73	≤23.98	PASS
		5230	14.40	≤23.98	PASS
		5270	14.56	≤23.98	PASS
		5310	14.46	≤23.98	PASS
		5510	12.59	≤23.98	PASS
		5550	12.17	≤23.98	PASS
		5670	12.16	≤23.98	PASS
		5710	12.04	≤23.98	PASS
		5755	14.43	≤30.00	PASS
		5795	14.23	≤30.00	PASS
11AC80SISO	Ant1	5210	12.46	≤23.98	PASS
		5290	12.65	≤23.98	PASS
		5530	12.52	≤23.98	PASS
		5610	12.11	≤23.98	PASS
		5690	11.69	≤23.98	PASS
		5775	14.23	≤30.00	PASS

Note:

1. The device is a client device.

2. Additional channels cross the band 5470-5725MHz and 5725-5850 MHz, Conducted output power test with the additional channel to compliance with stricter limit of the two bands (5470-5725MHz more stricter)


Appendix C: Maximum power spectral density**Test Result**


Test Mode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	6.37	≤11.00	PASS
		5200	5.67	≤11.00	PASS
		5240	5.66	≤11.00	PASS
		5260	5.75	≤11.00	PASS
		5280	5.75	≤11.00	PASS
		5320	5.59	≤11.00	PASS
		5500	4.69	≤11.00	PASS
		5580	4.14	≤11.00	PASS
		5700	3.55	≤11.00	PASS
		5720_UNII-2C	5.61	≤11.00	PASS
		5720_UNII-3	0.43	≤30.00	PASS
		5745	1.62	≤30.00	PASS
		5785	1.75	≤30.00	PASS
		5825	0.94	≤30.00	PASS
11AC20SISO	Ant1	5180	5.81	≤11.00	PASS
		5200	5.00	≤11.00	PASS
		5240	5.05	≤11.00	PASS
		5260	5.45	≤11.00	PASS
		5280	5.10	≤11.00	PASS
		5320	4.97	≤11.00	PASS
		5500	4.12	≤11.00	PASS
		5580	3.83	≤11.00	PASS
		5700	3.15	≤11.00	PASS
		5720_UNII-2C	4.71	≤11.00	PASS
		5720_UNII-3	-0.38	≤30.00	PASS
		5745	1.24	≤30.00	PASS
		5785	1.38	≤30.00	PASS
		5825	0.36	≤30.00	PASS
11AC40SISO	Ant1	5190	1.06	≤11.00	PASS
		5230	0.97	≤11.00	PASS
		5270	1.08	≤11.00	PASS
		5310	1.26	≤11.00	PASS
		5510	-1.20	≤11.00	PASS
		5550	-1.27	≤11.00	PASS
		5670	-1.10	≤11.00	PASS
		5710_UNII-2C	-0.28	≤11.00	PASS
		5710_UNII-3	-5.32	≤30.00	PASS
		5755	-1.98	≤30.00	PASS
11AC80SISO	Ant1	5795	-2.19	≤30.00	PASS
		5210	-3.58	≤11.00	PASS
		5290	-3.97	≤11.00	PASS
		5530	-3.88	≤11.00	PASS
		5610	-4.34	≤11.00	PASS
		5690_UNII-2C	-3.41	≤11.00	PASS
		5690_UNII-3	-8.35	≤30.00	PASS
	Ant1	5775	-4.34	≤30.00	PASS


Note:


1. The EUT is a client device.
2. The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
3. The Duty Cycle Factor is compensated in the graph.


Test Graphs

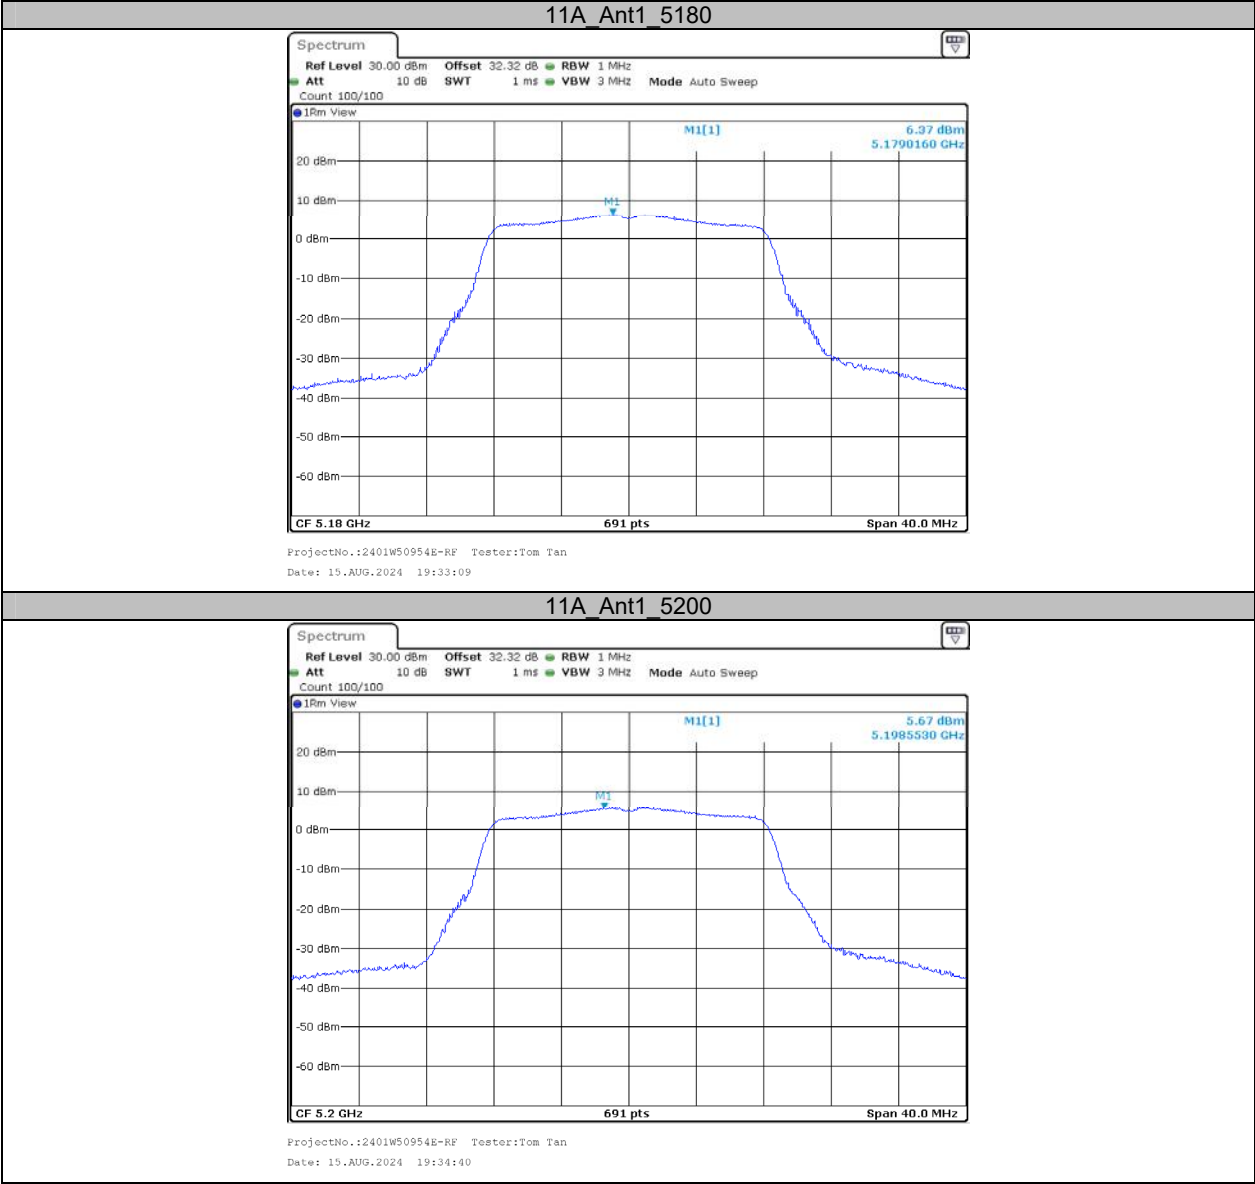


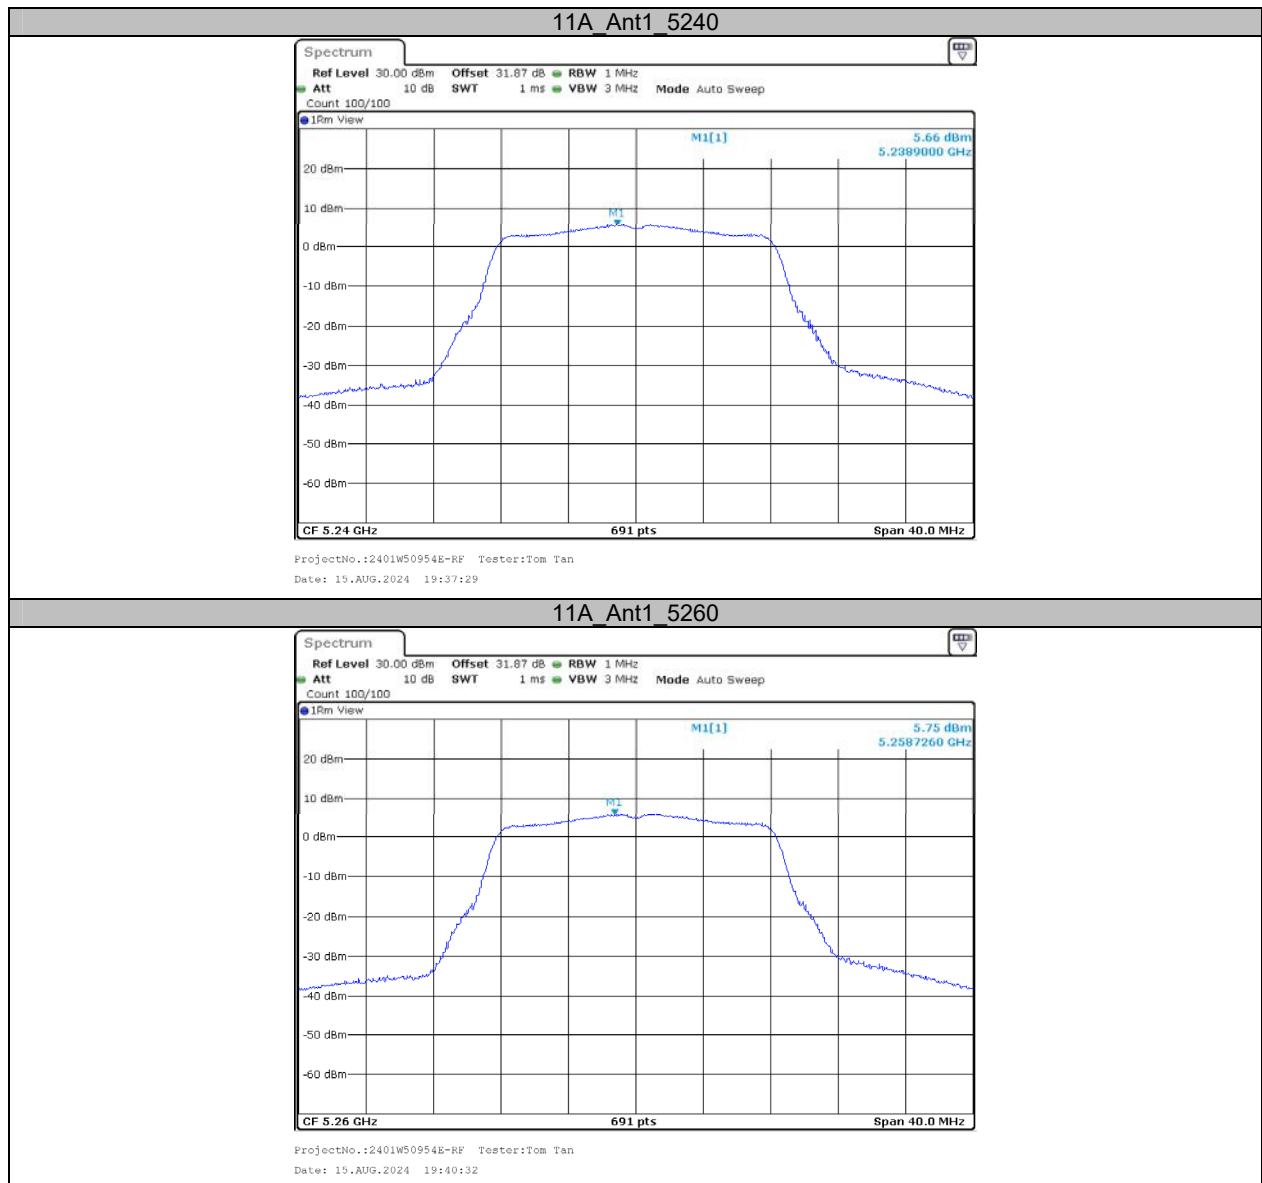


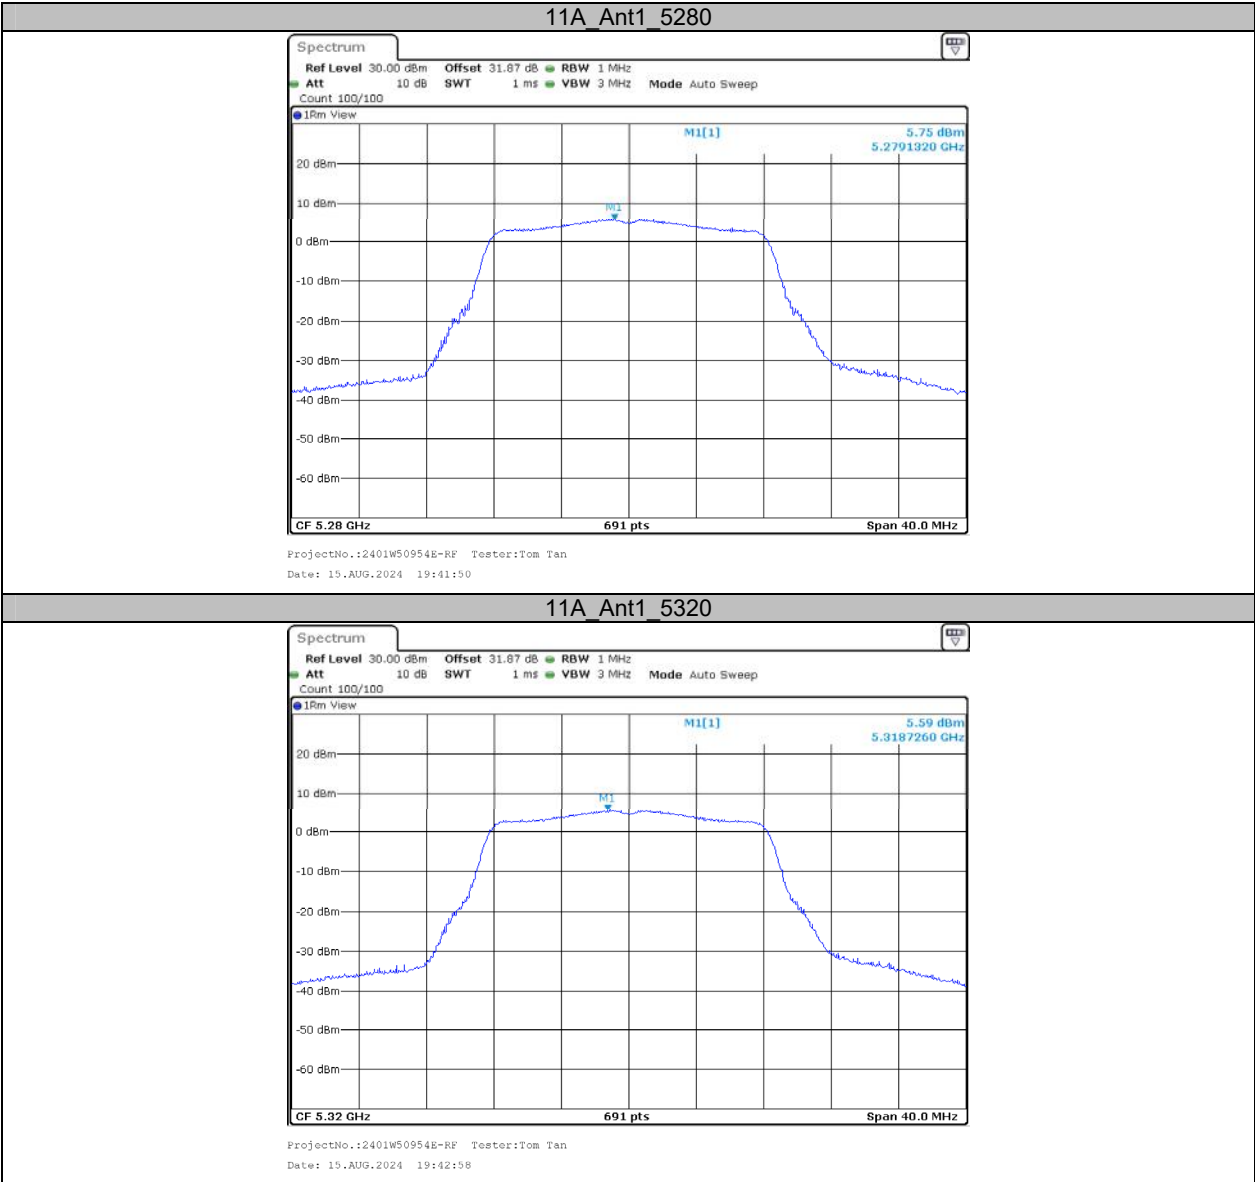


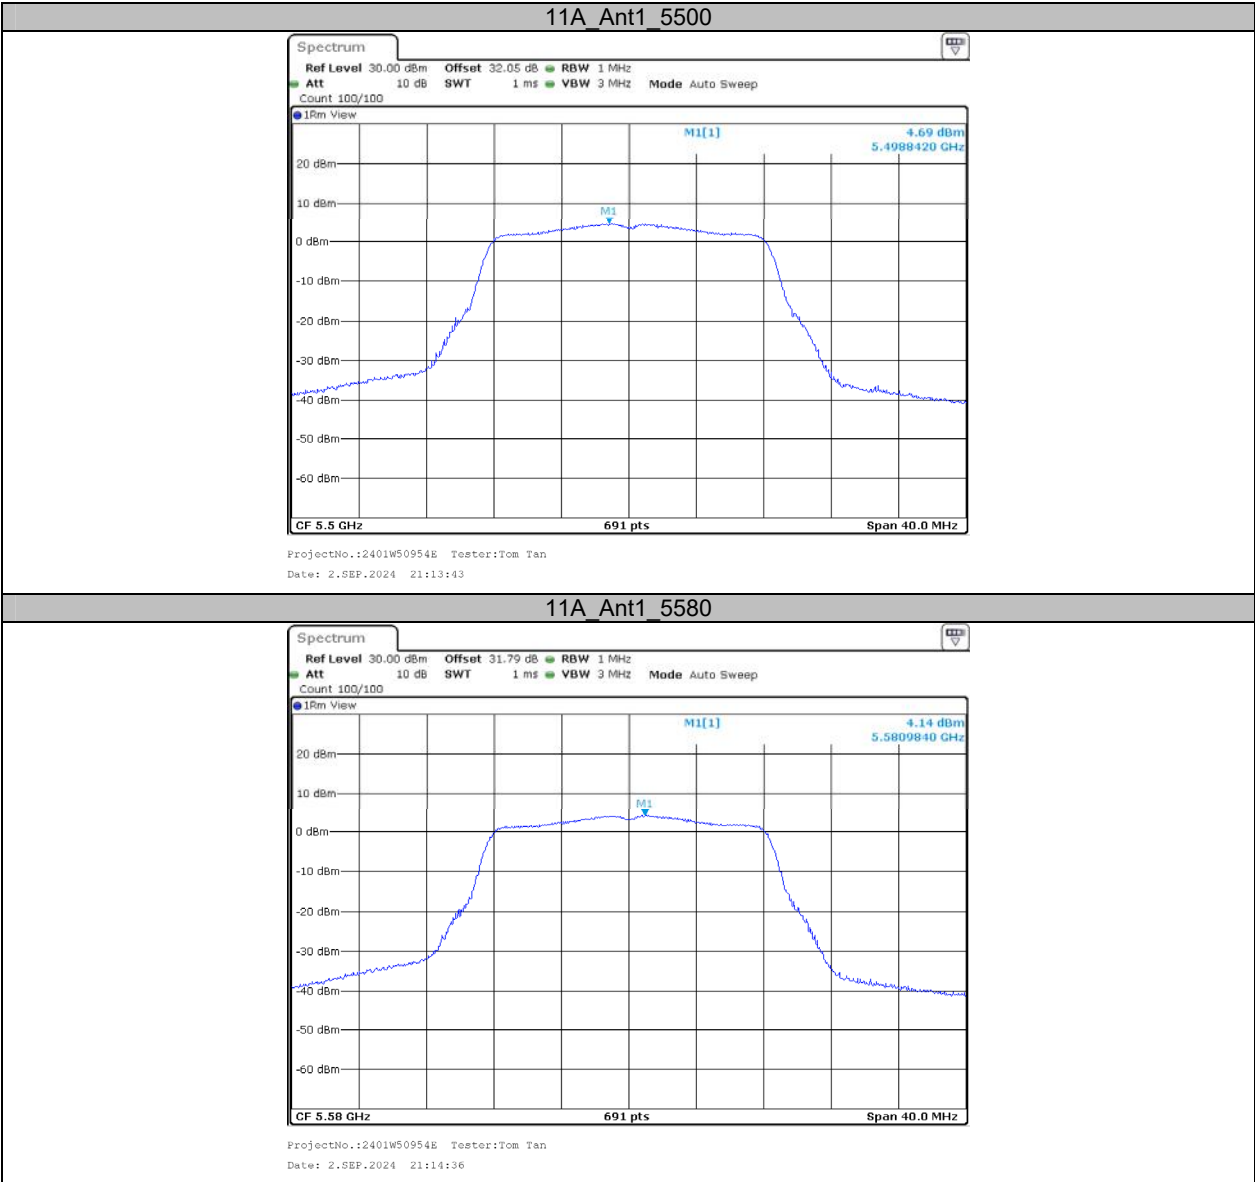


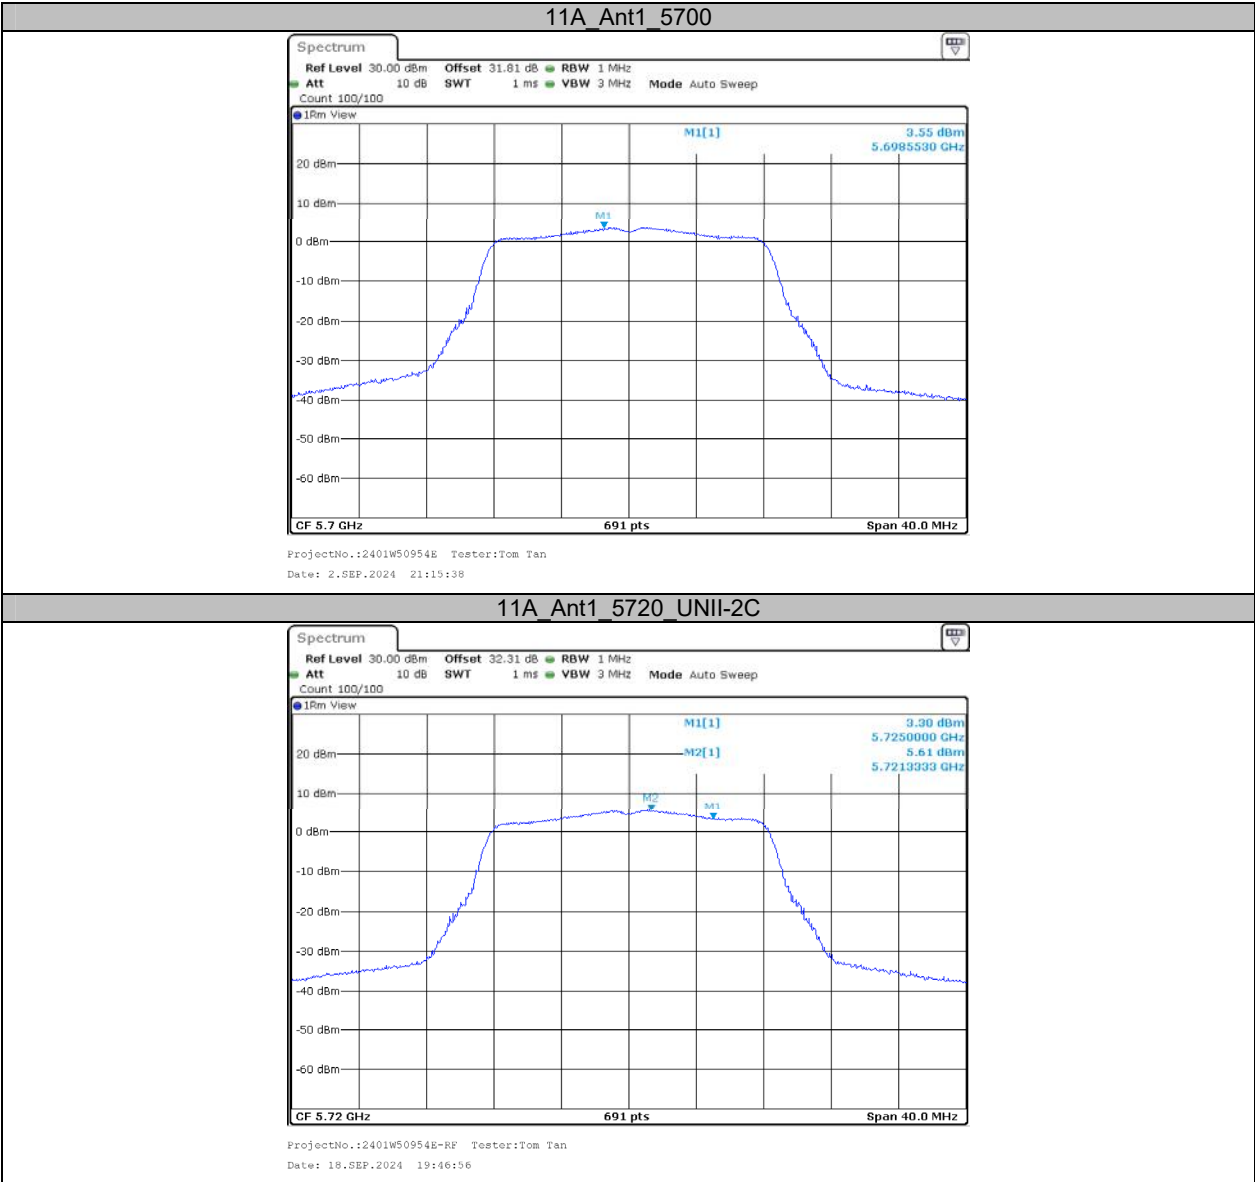


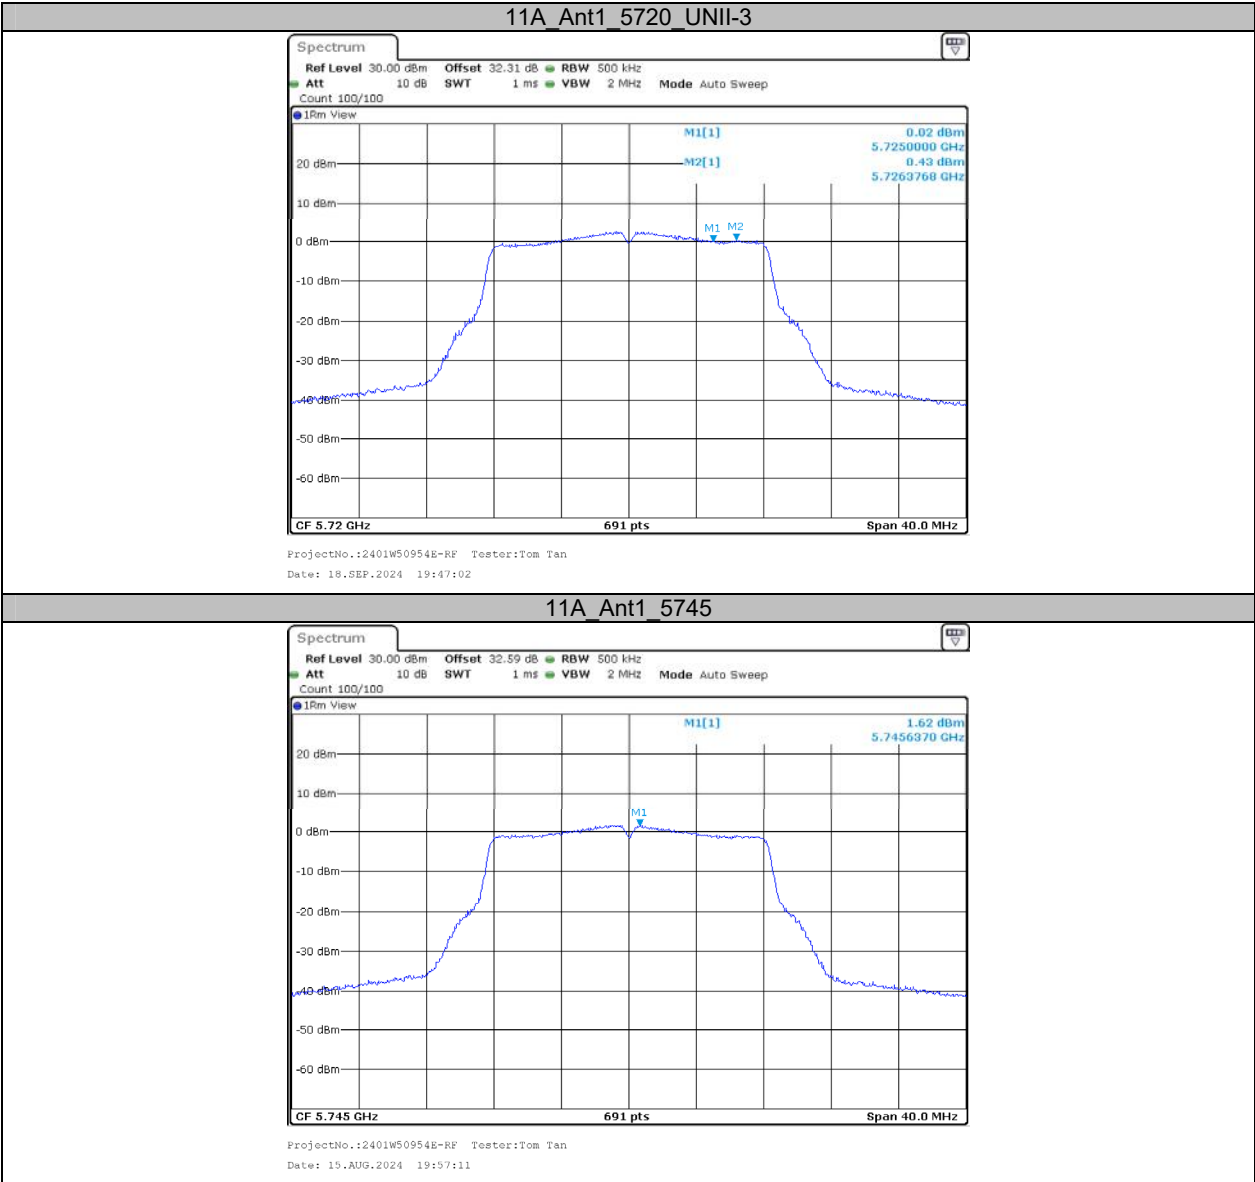


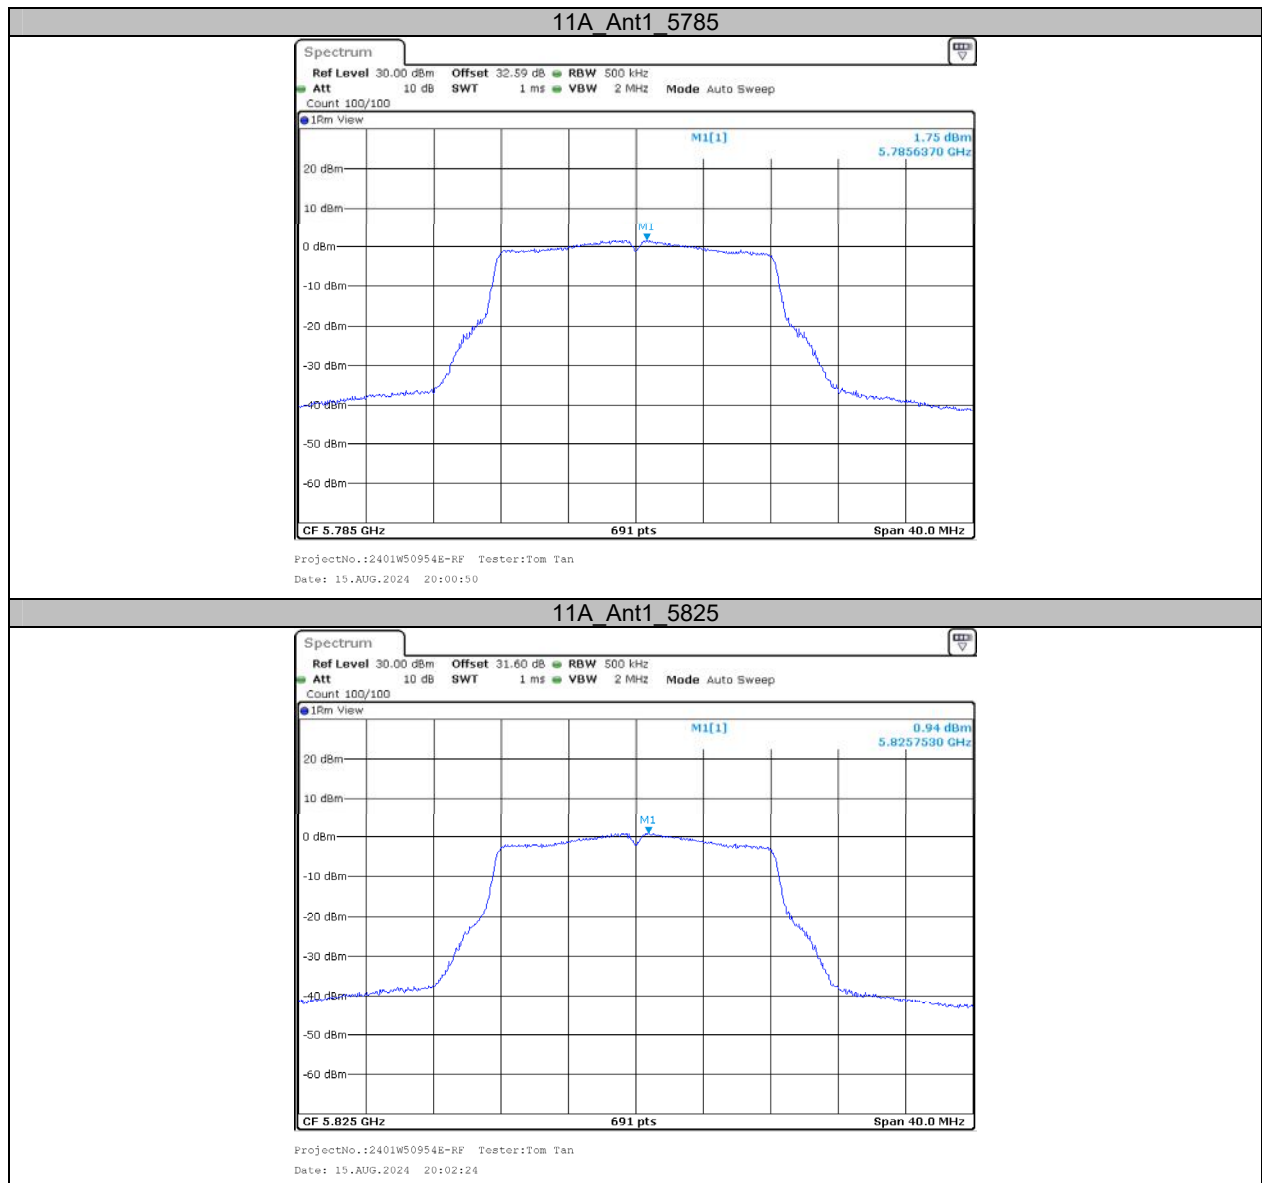


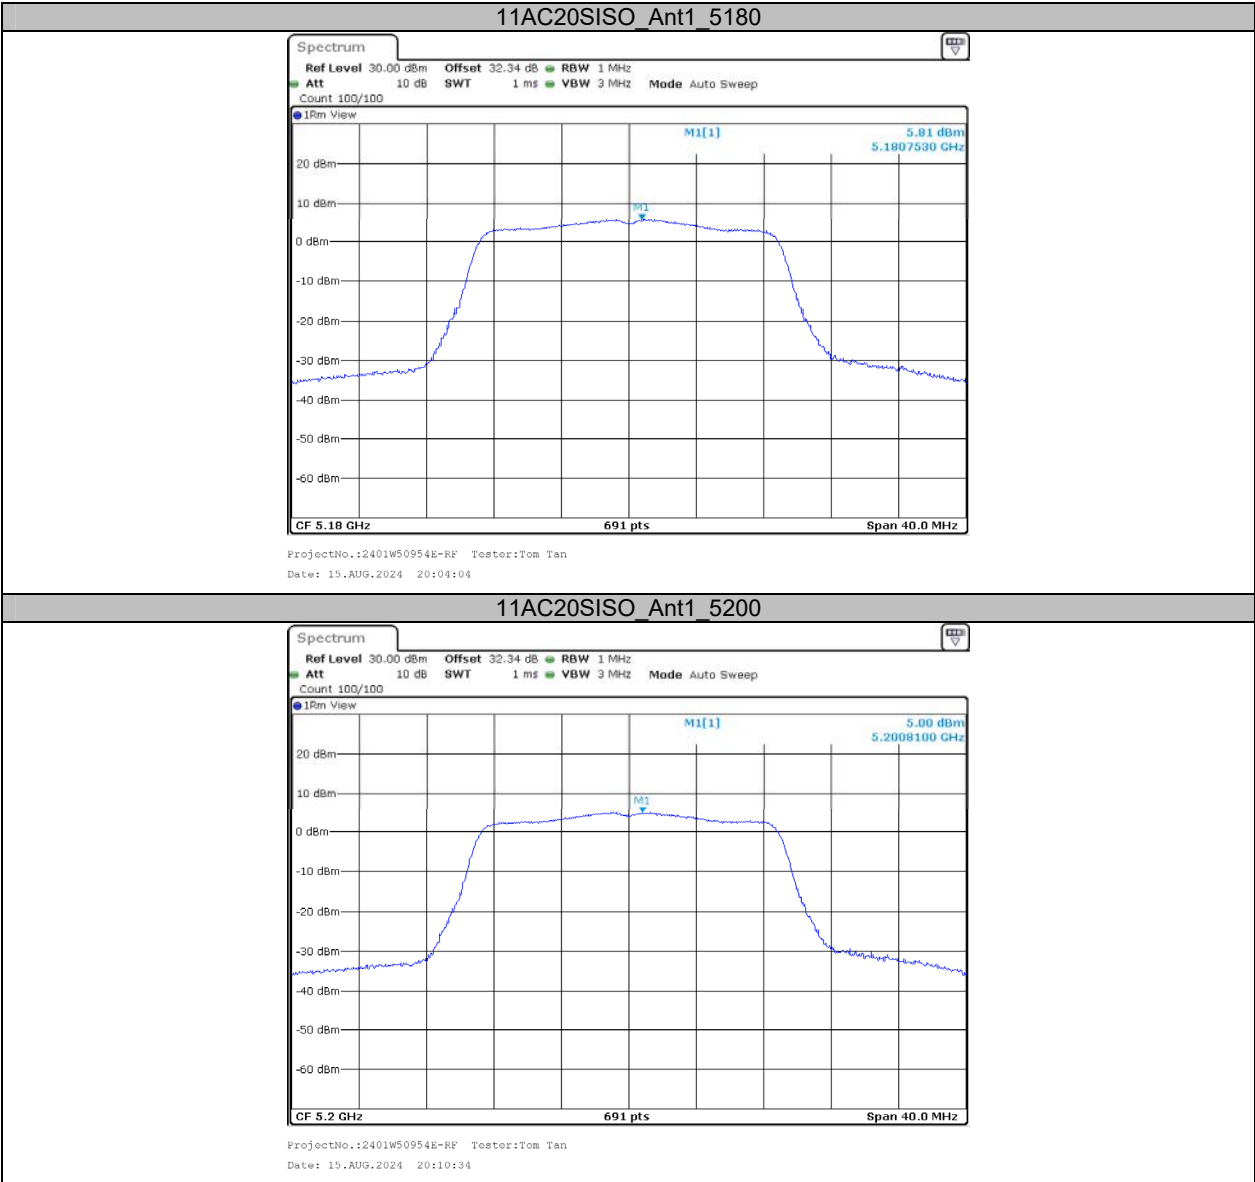


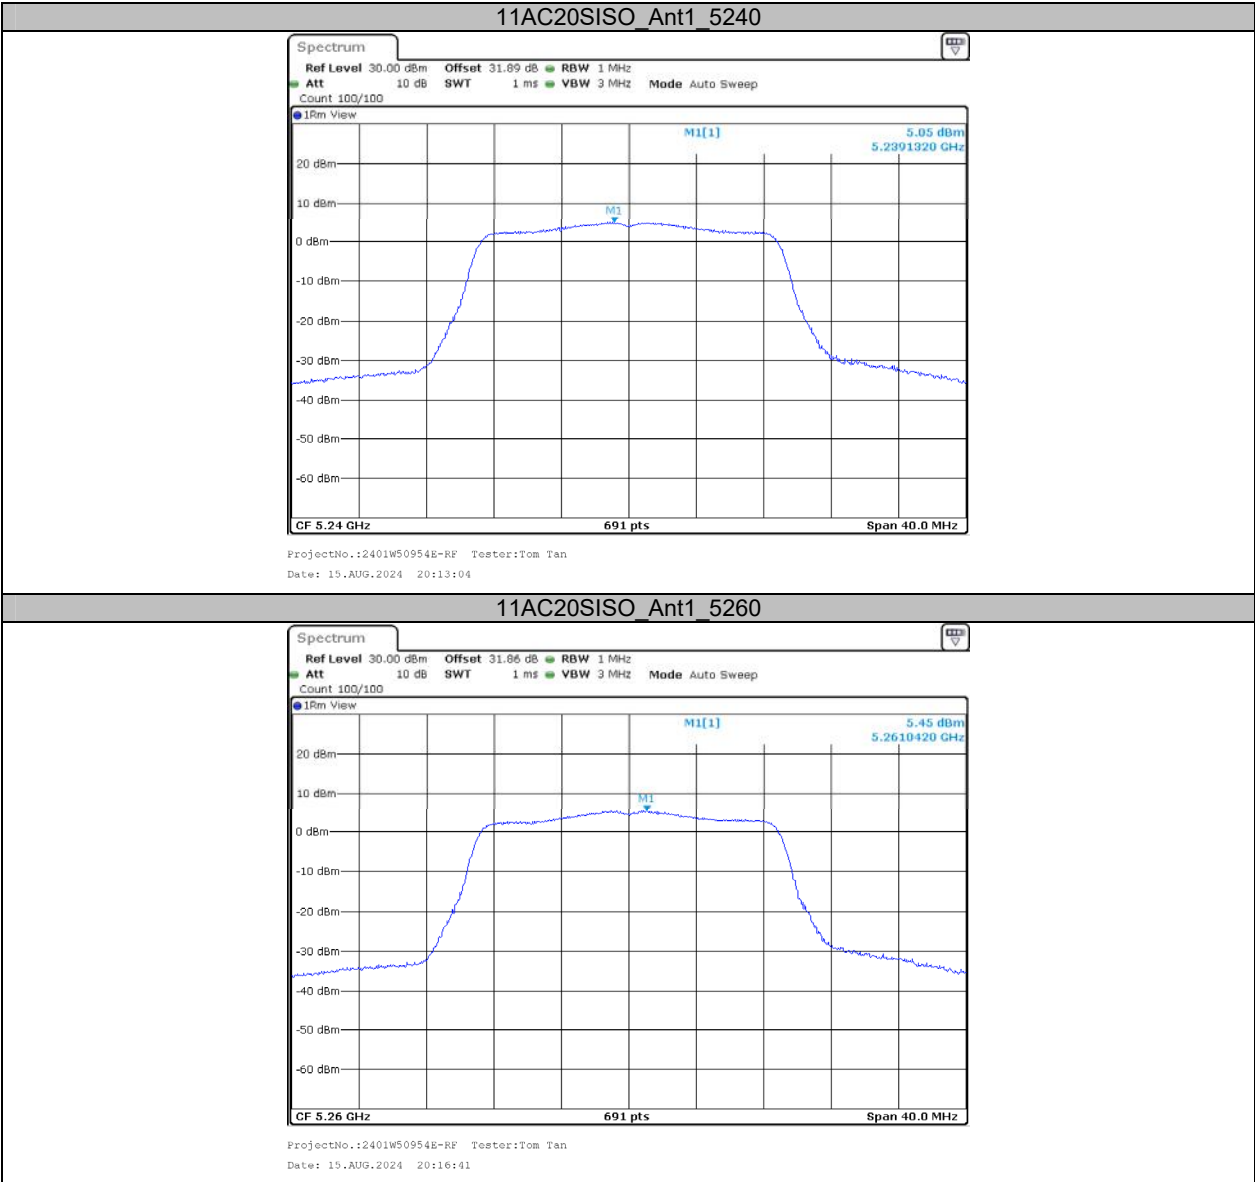


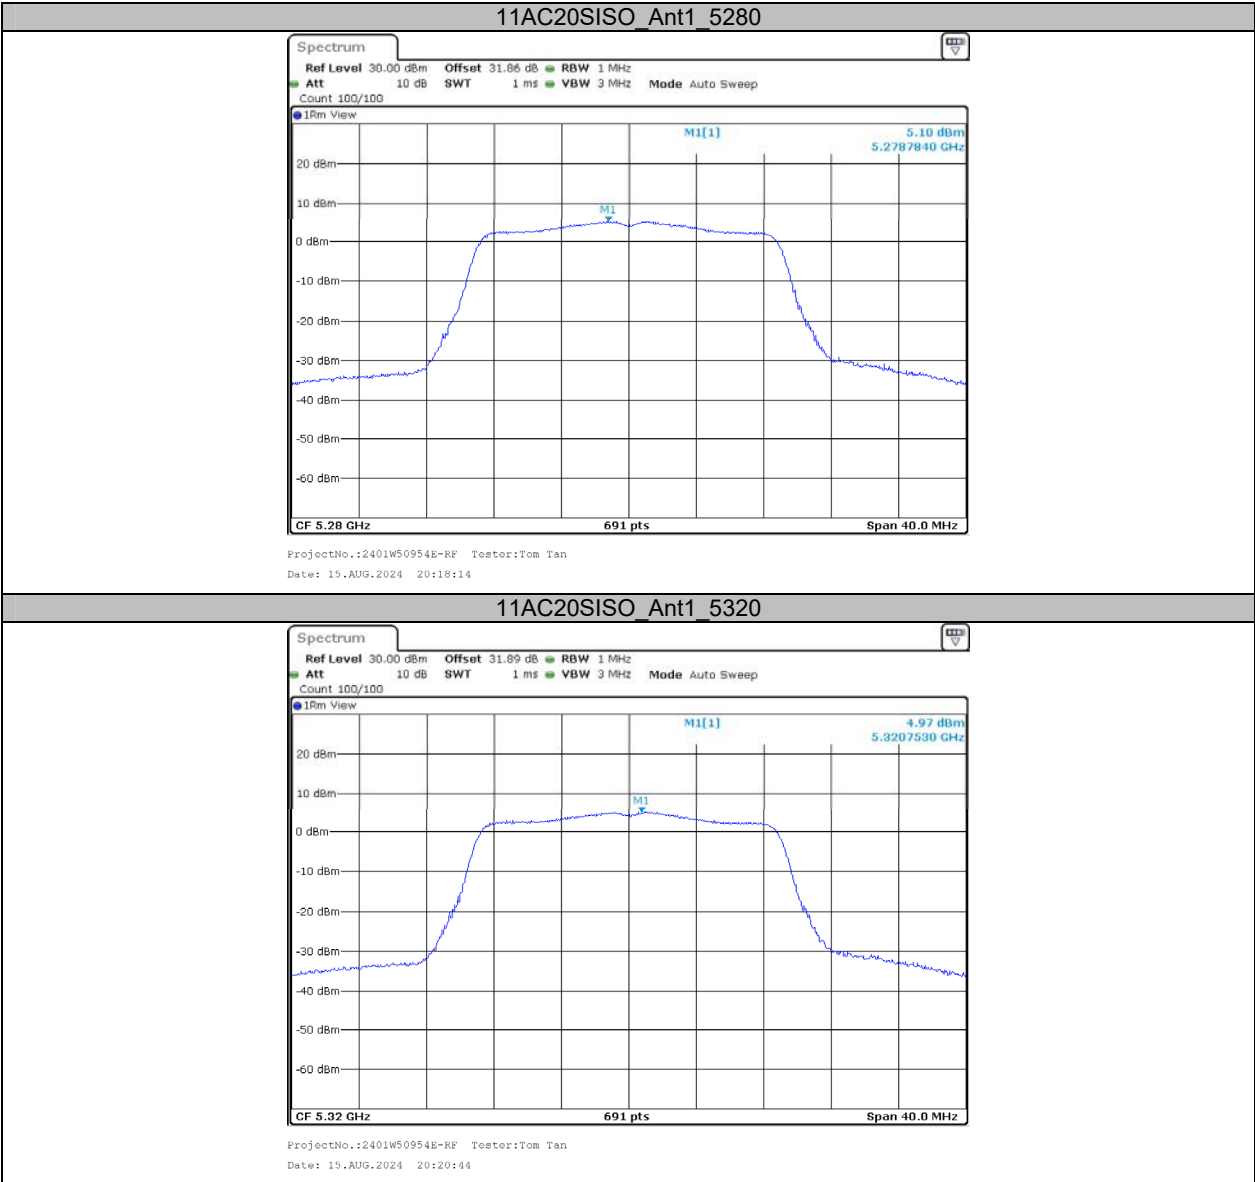


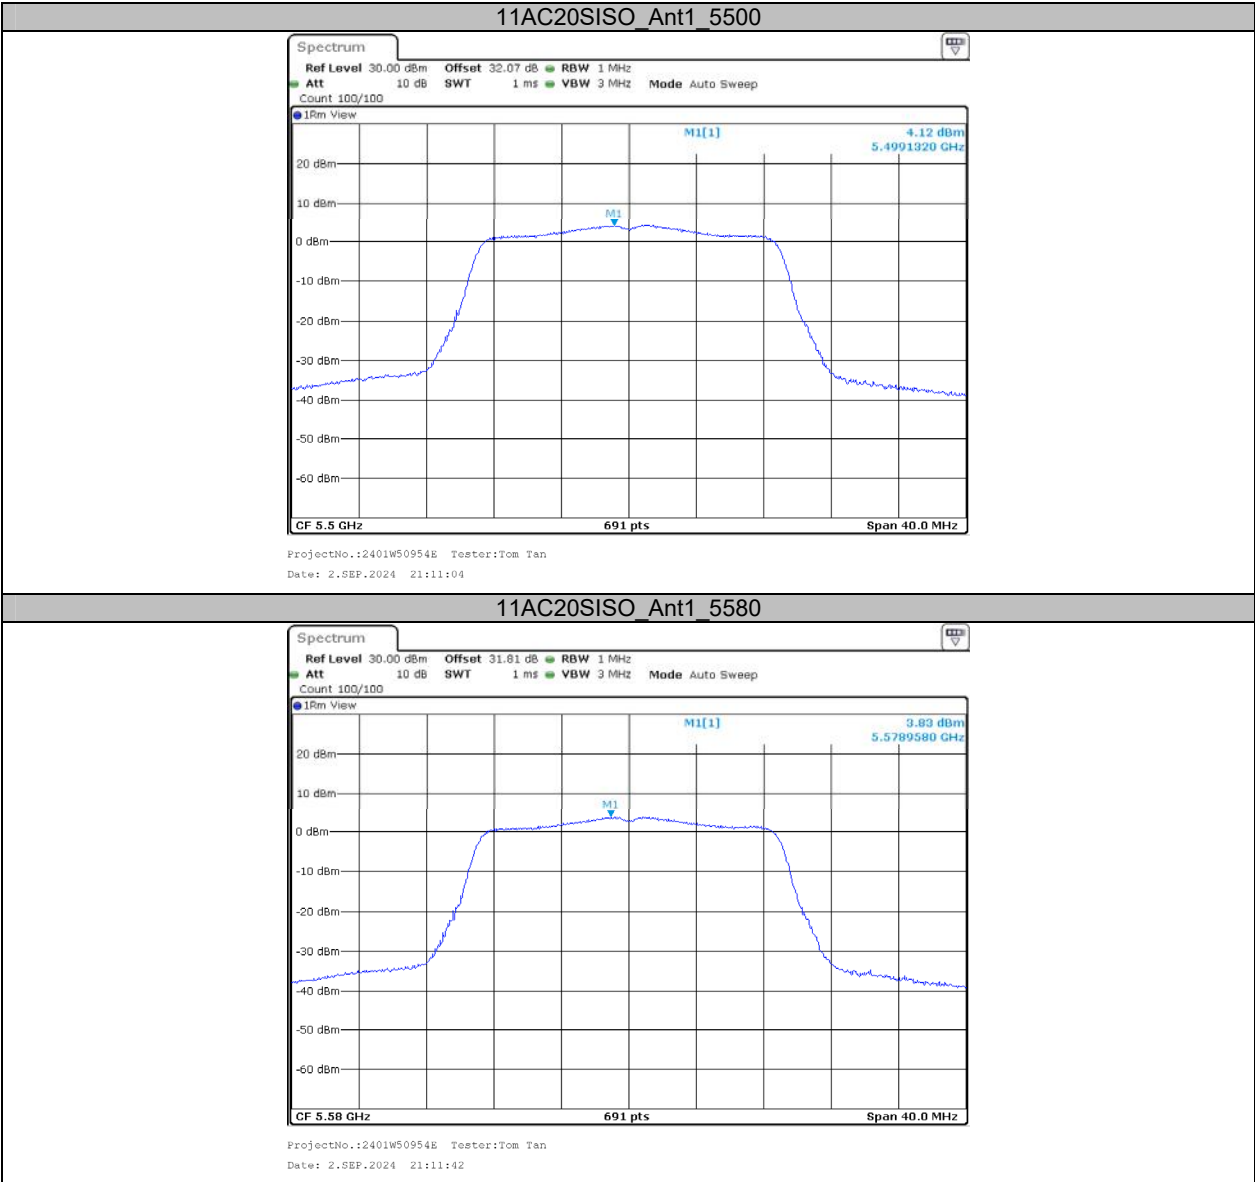


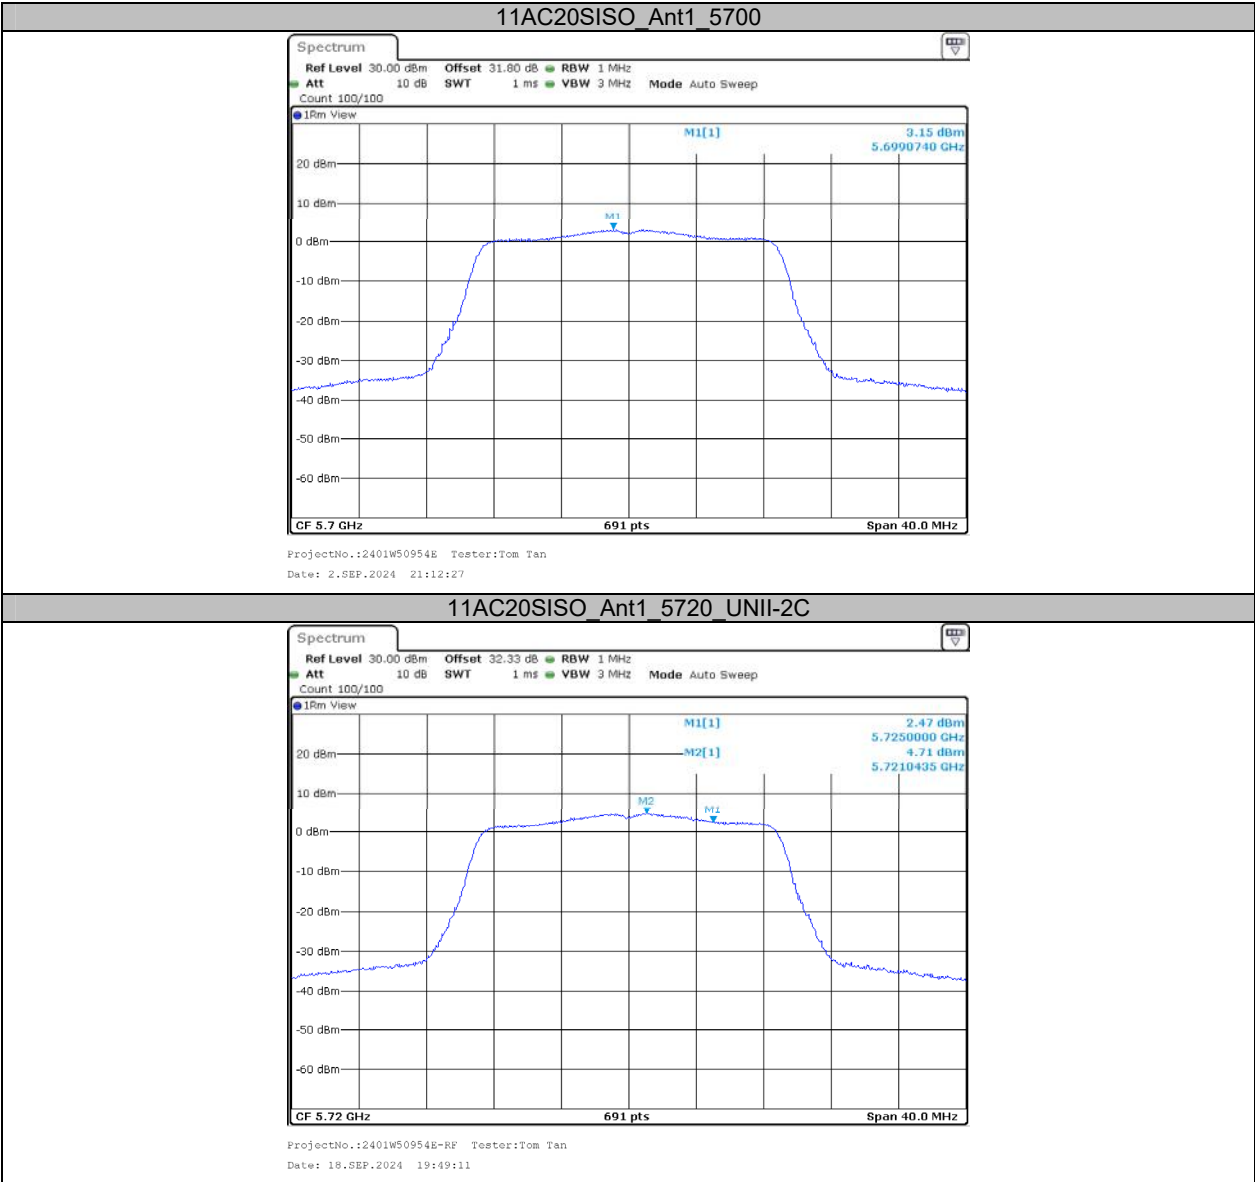


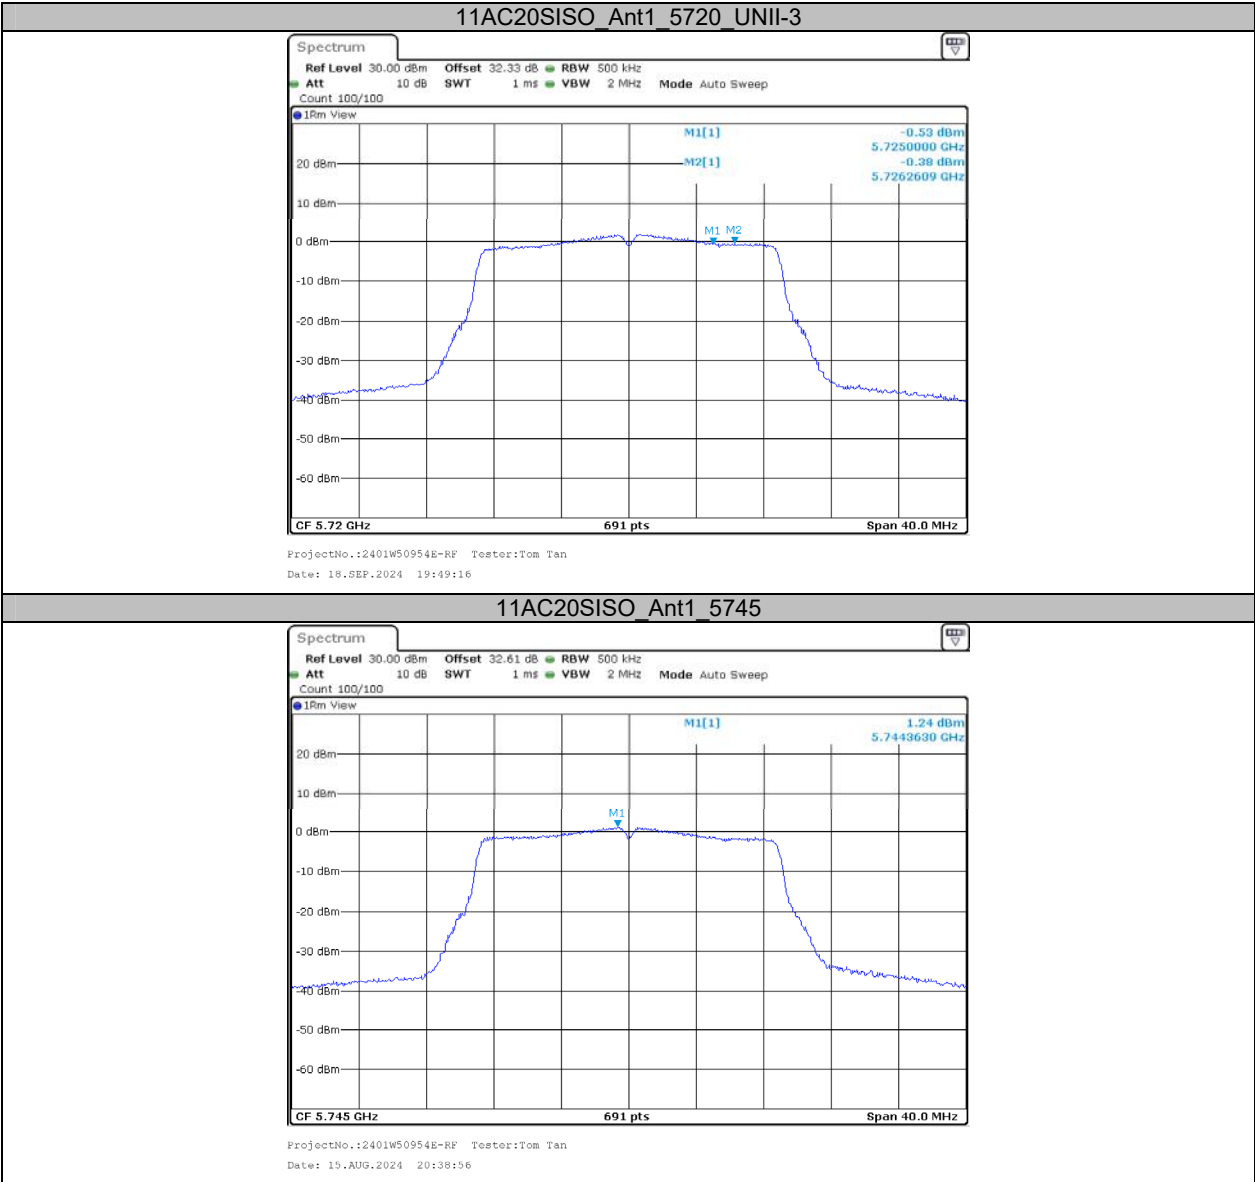


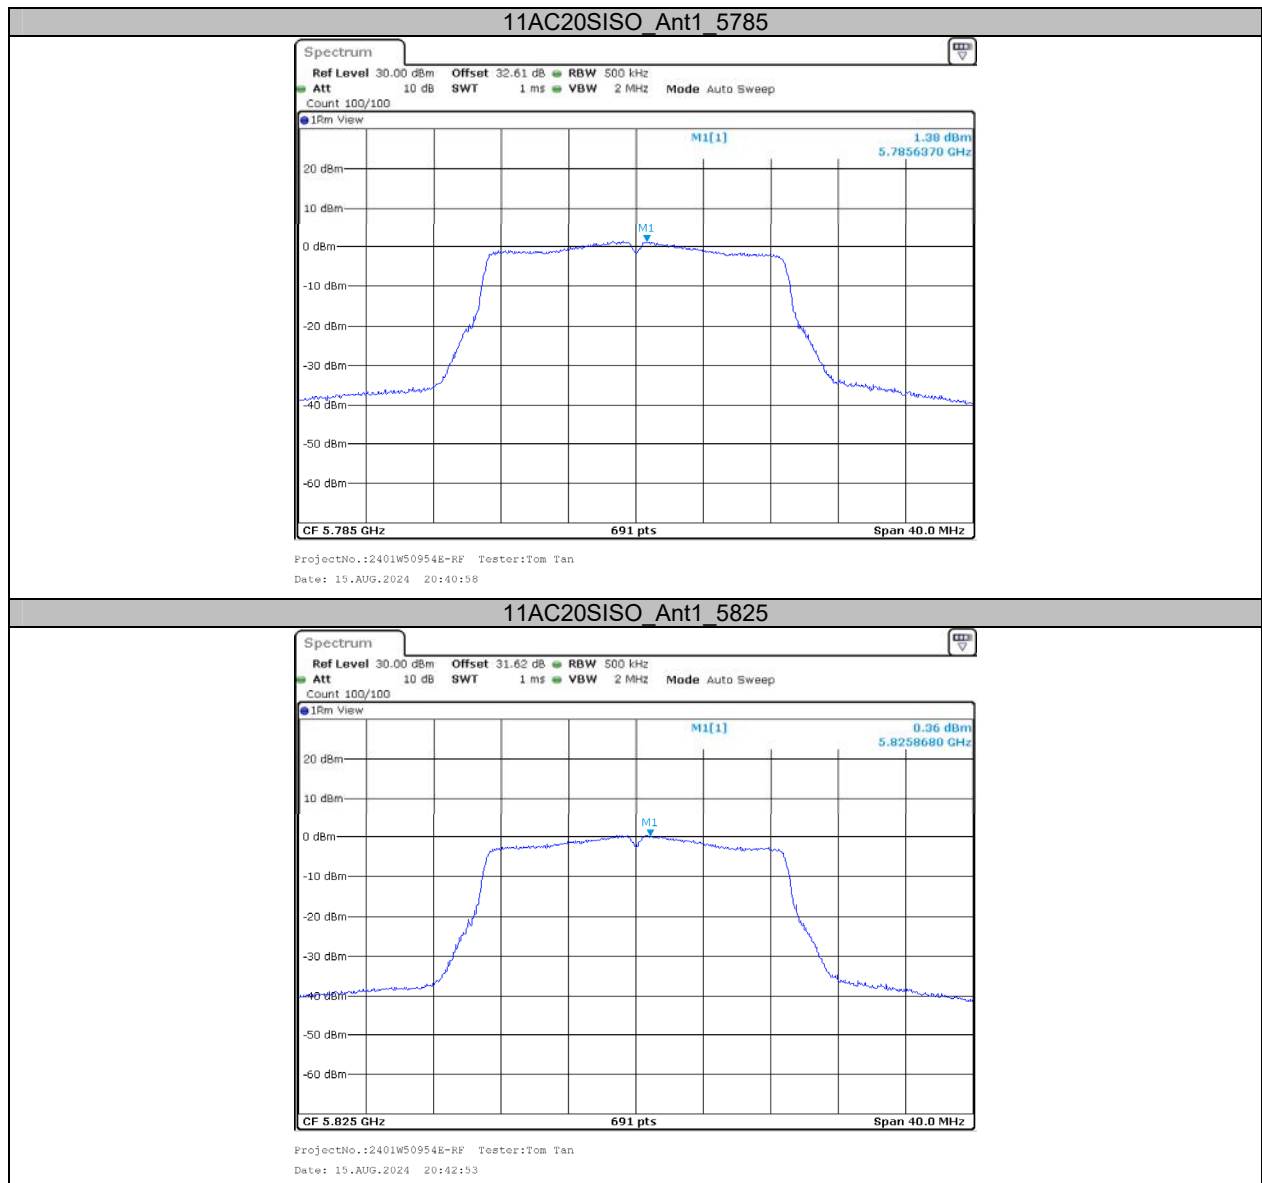


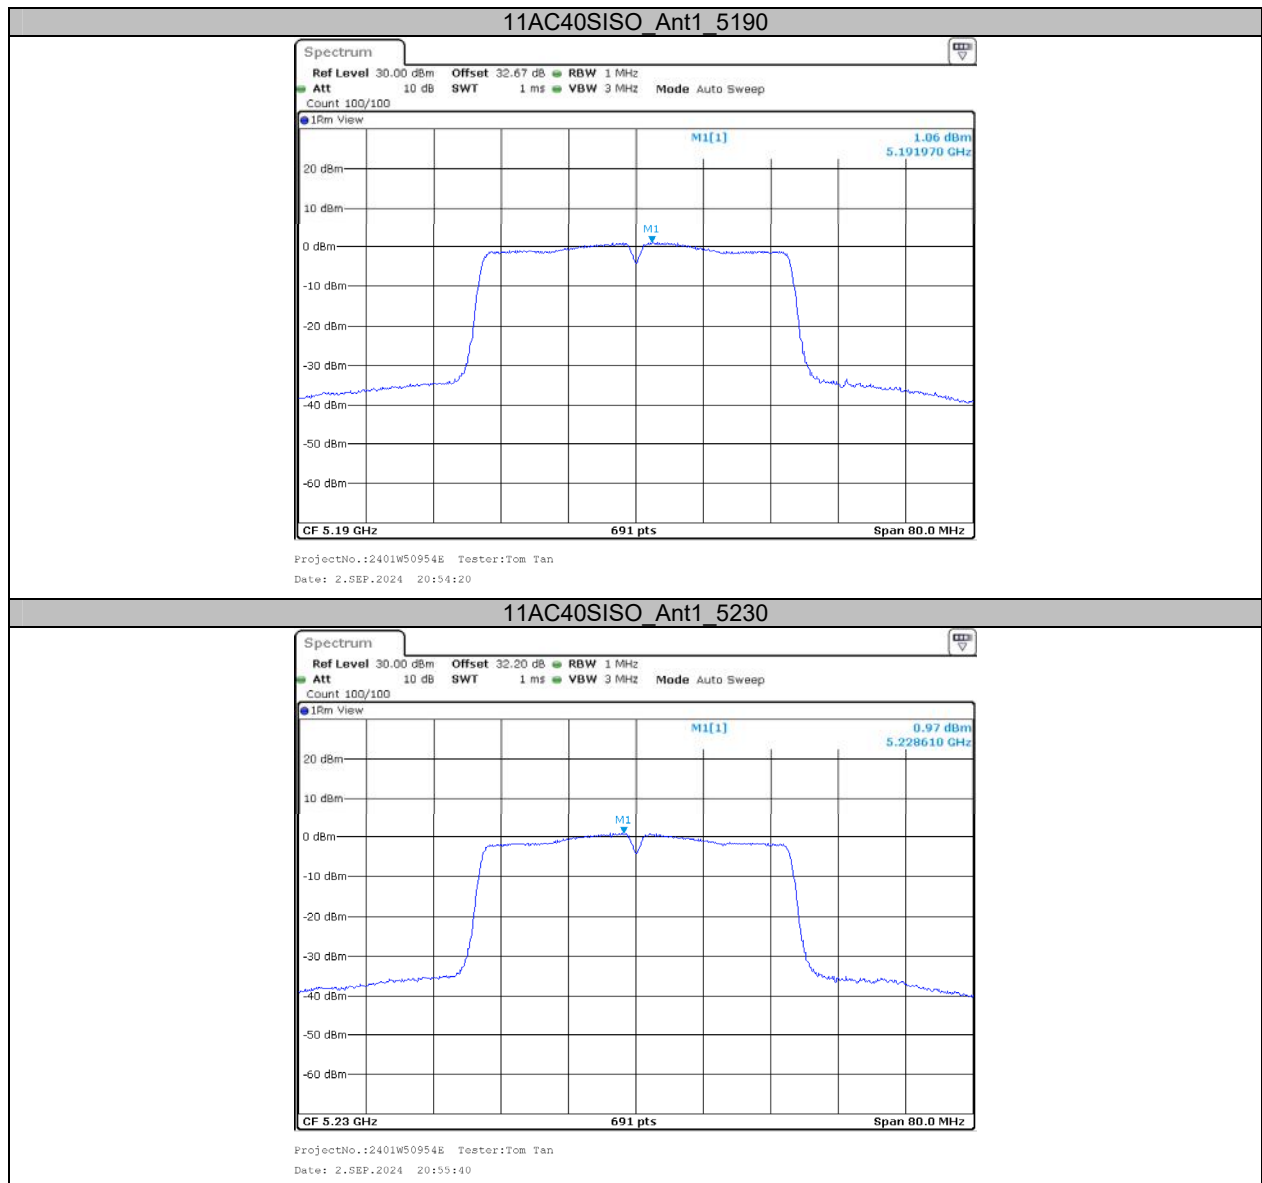


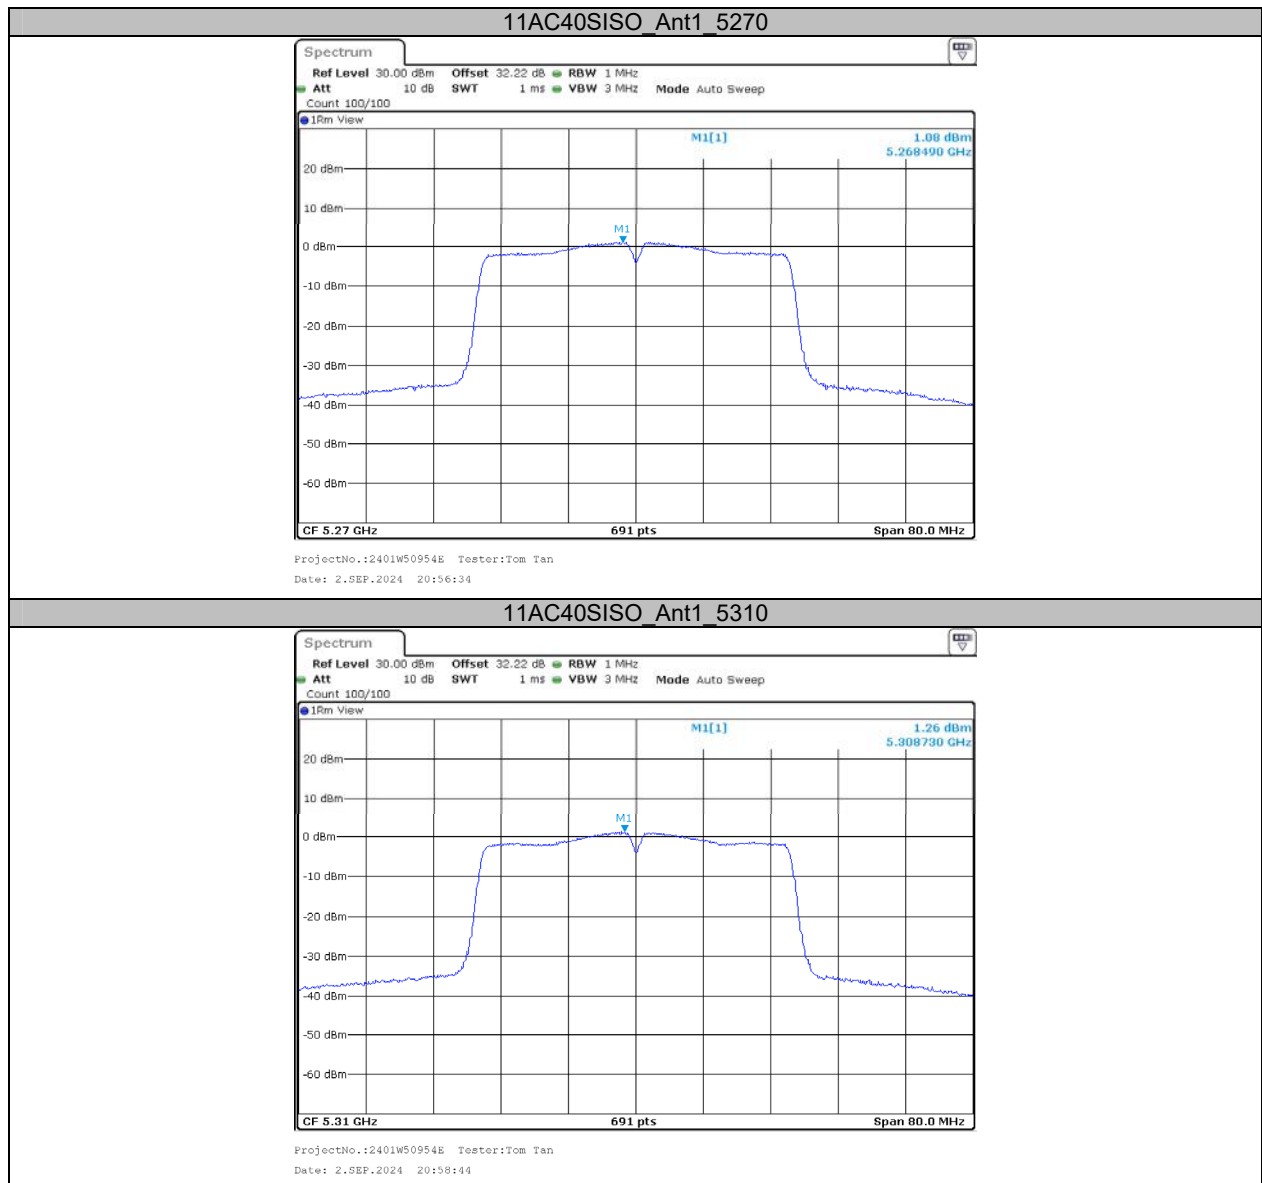


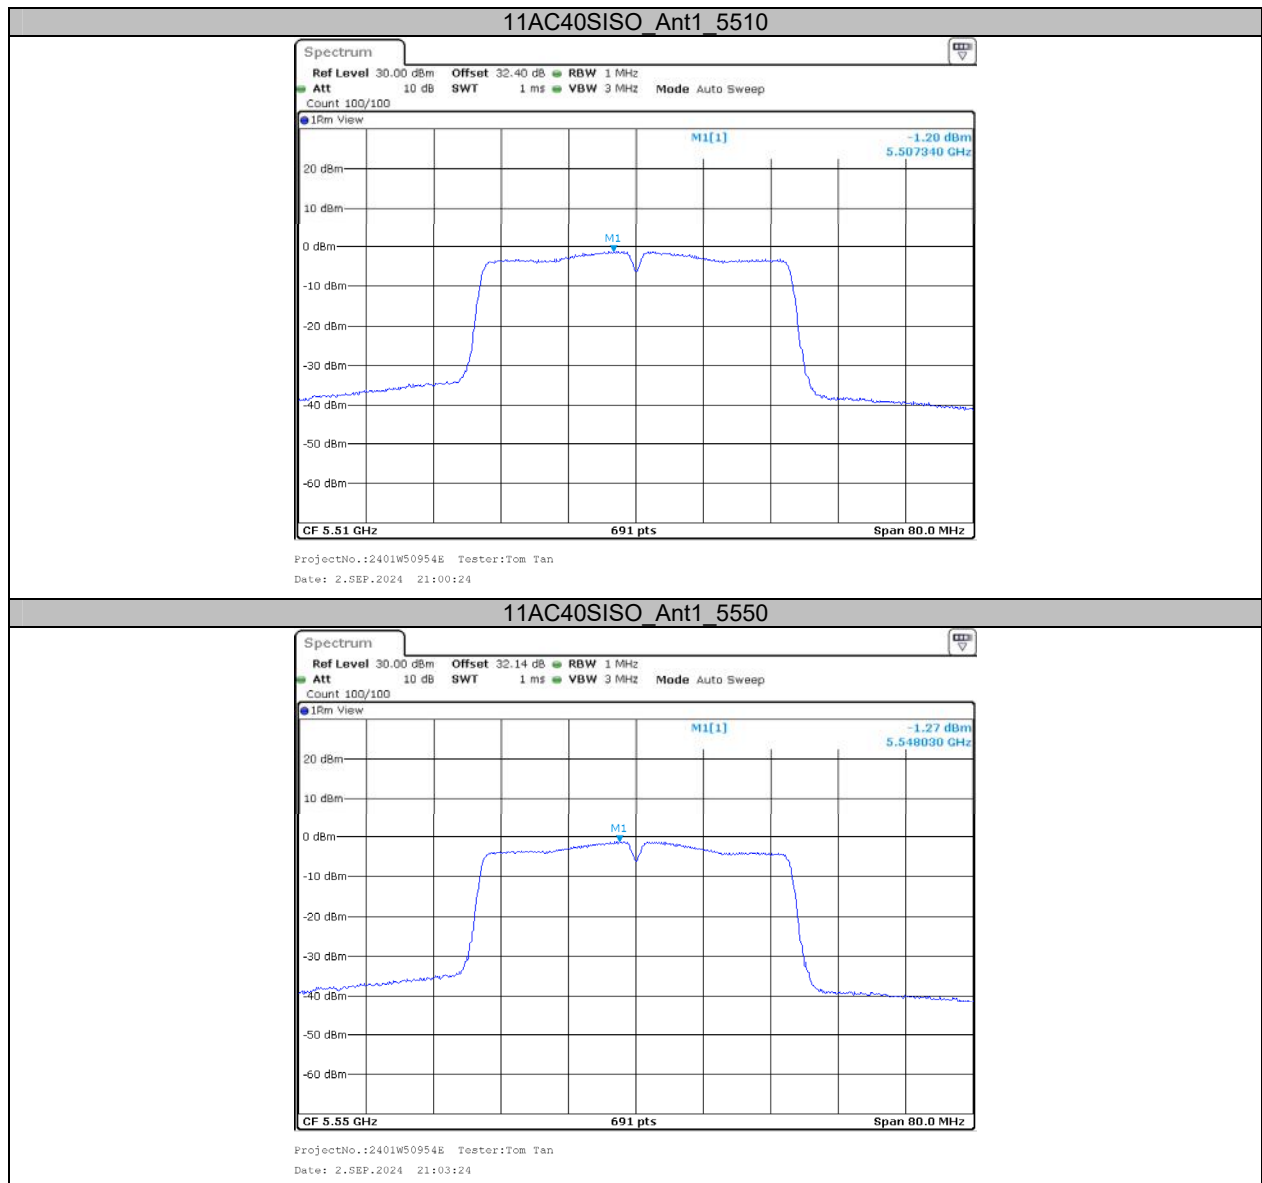


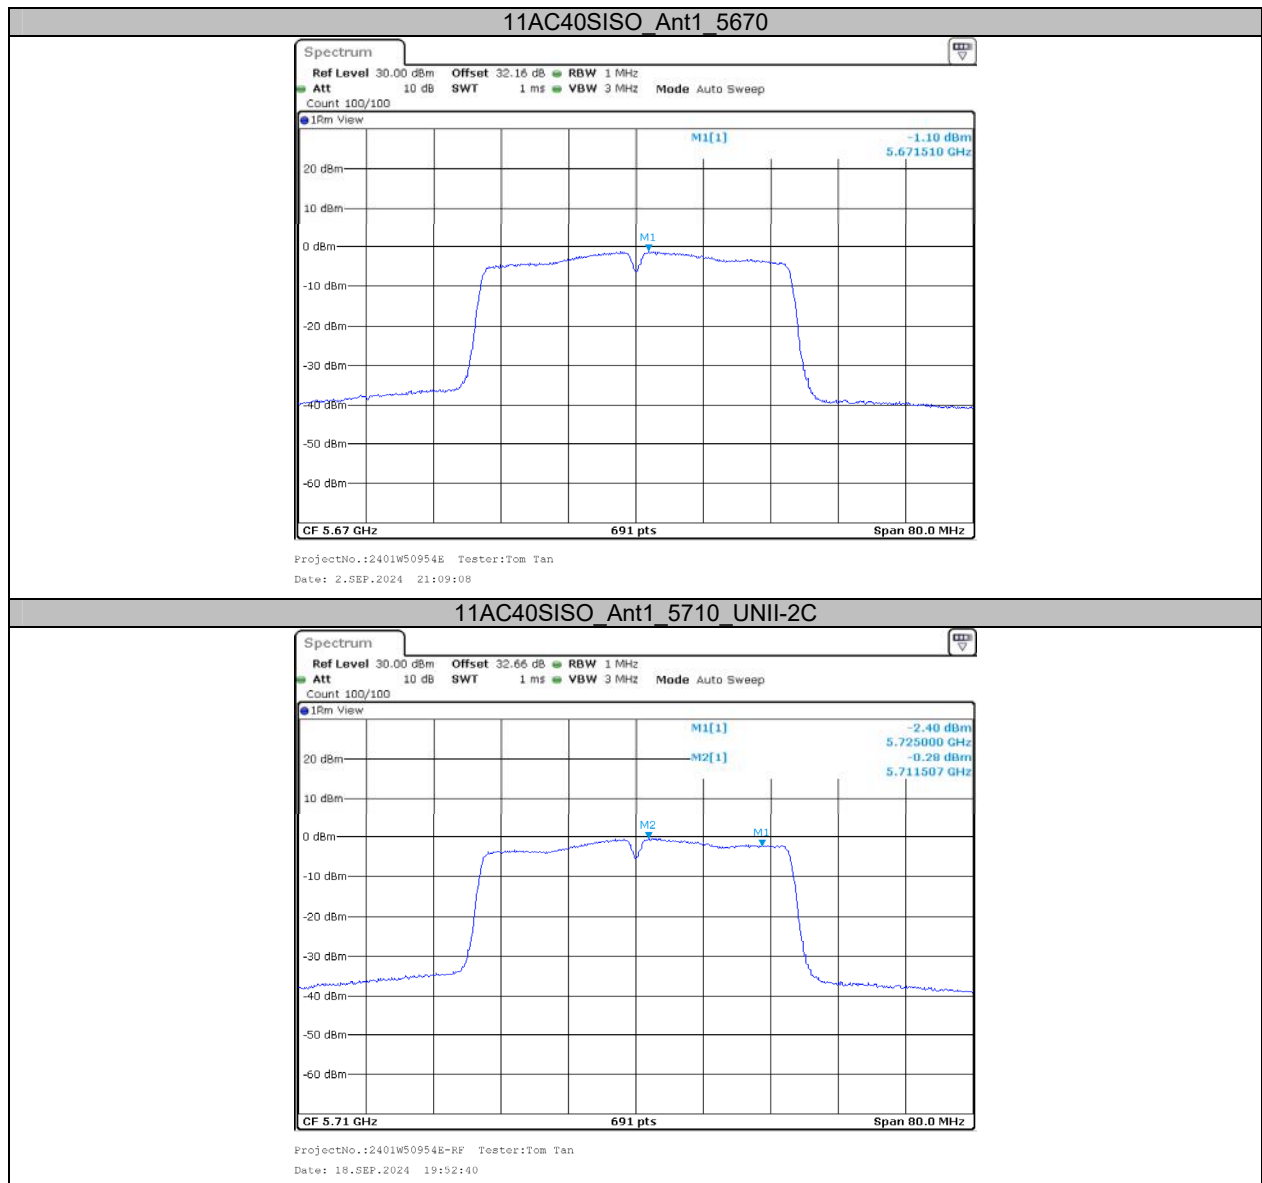


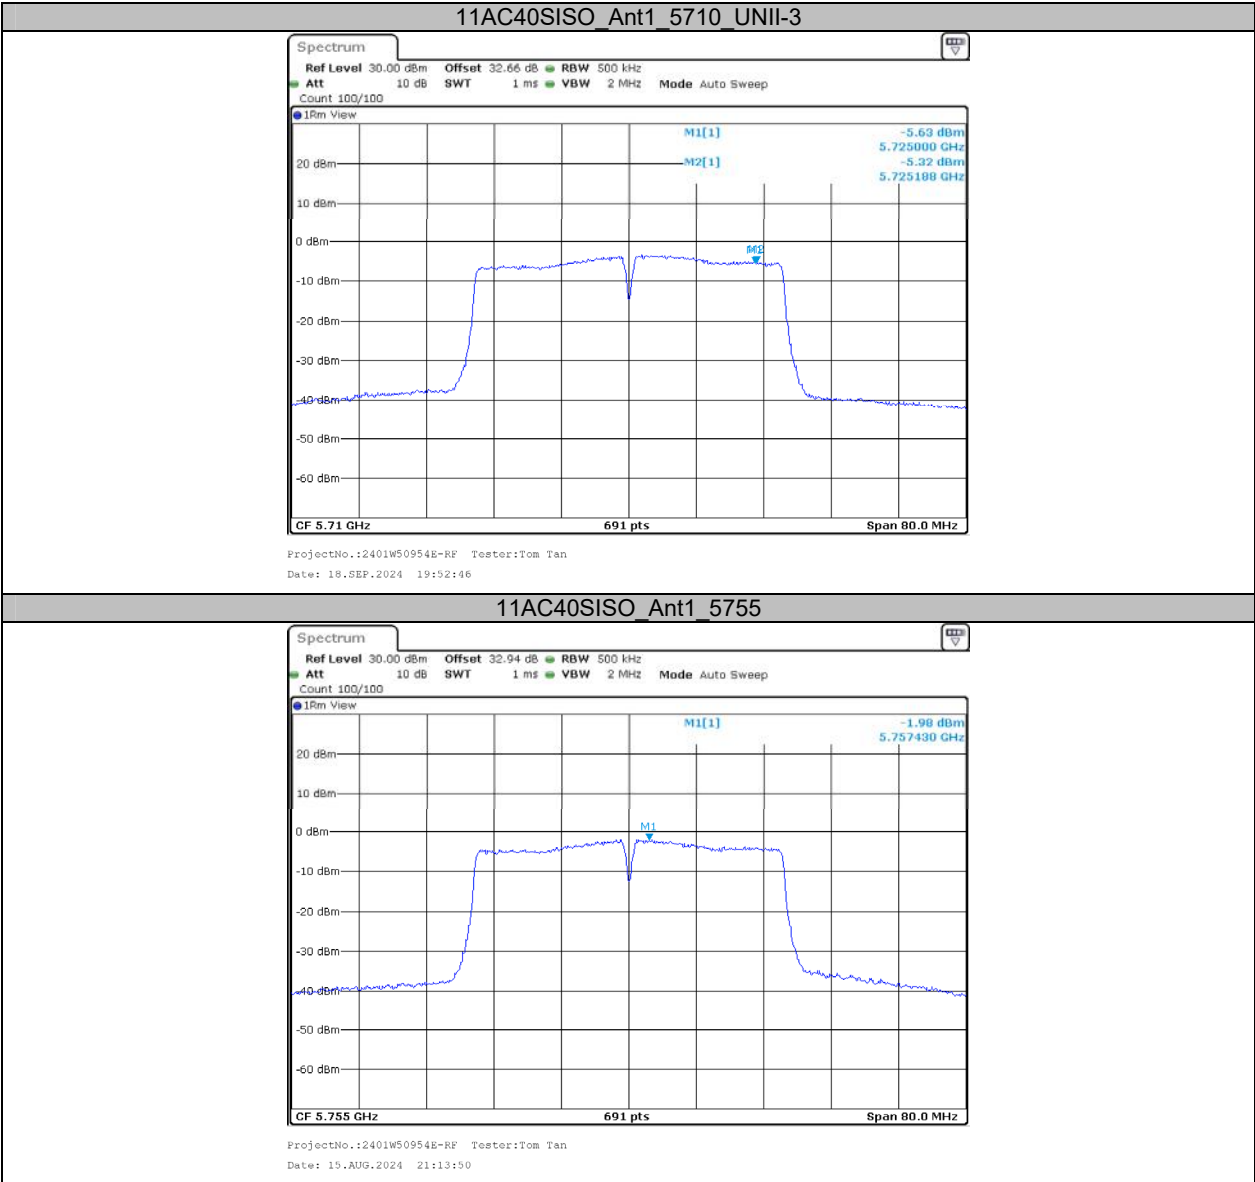

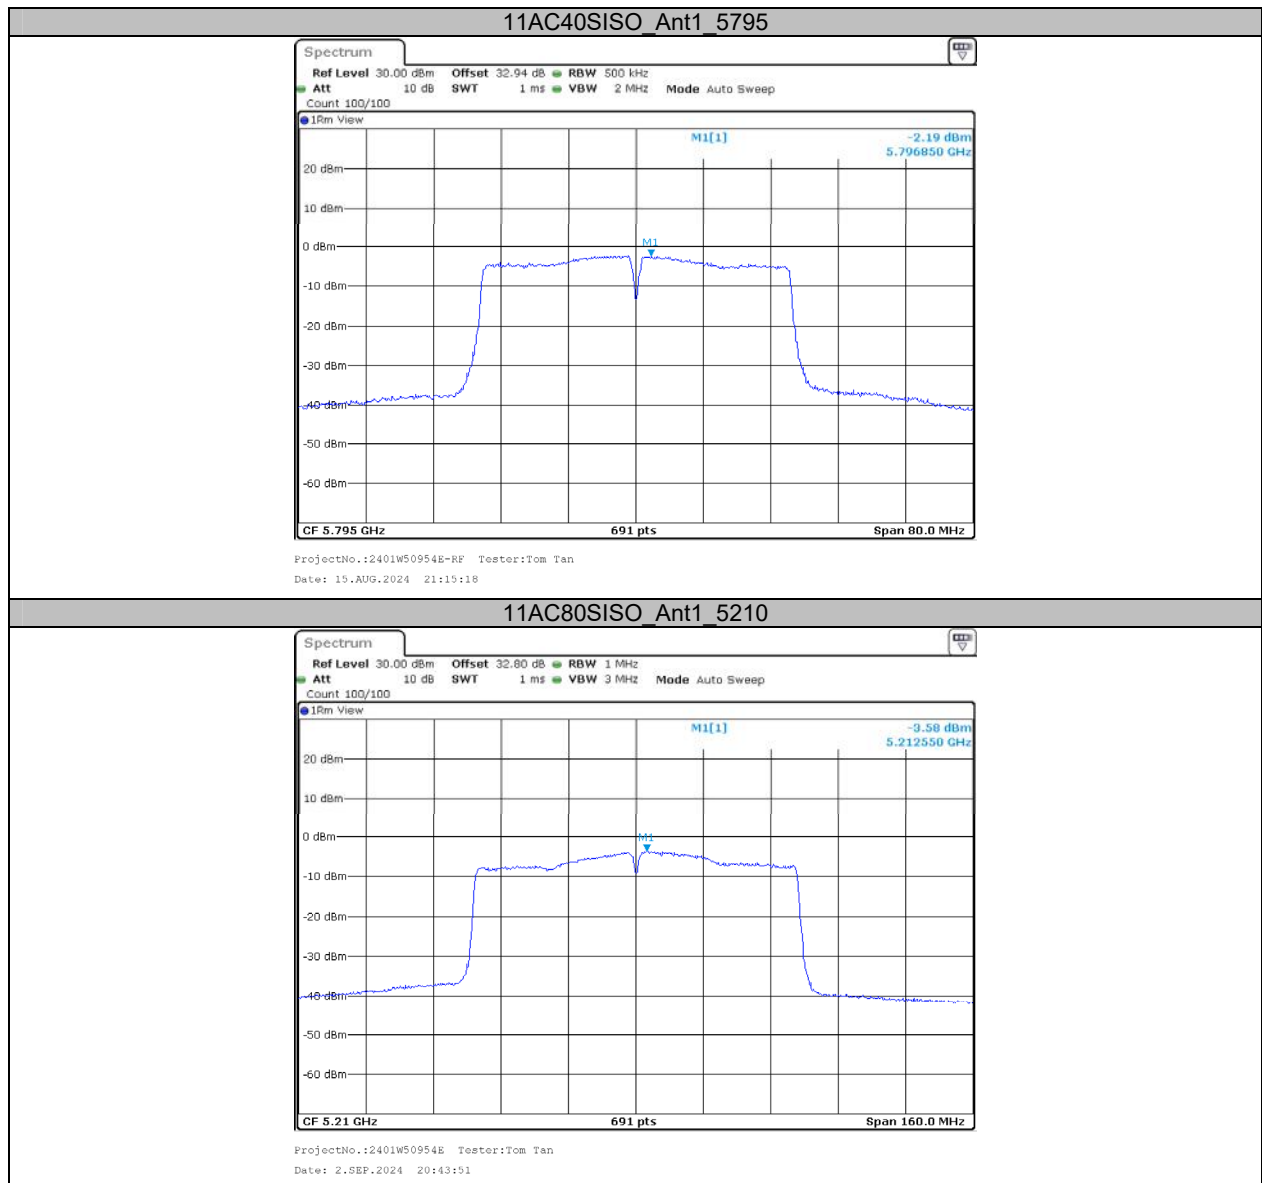

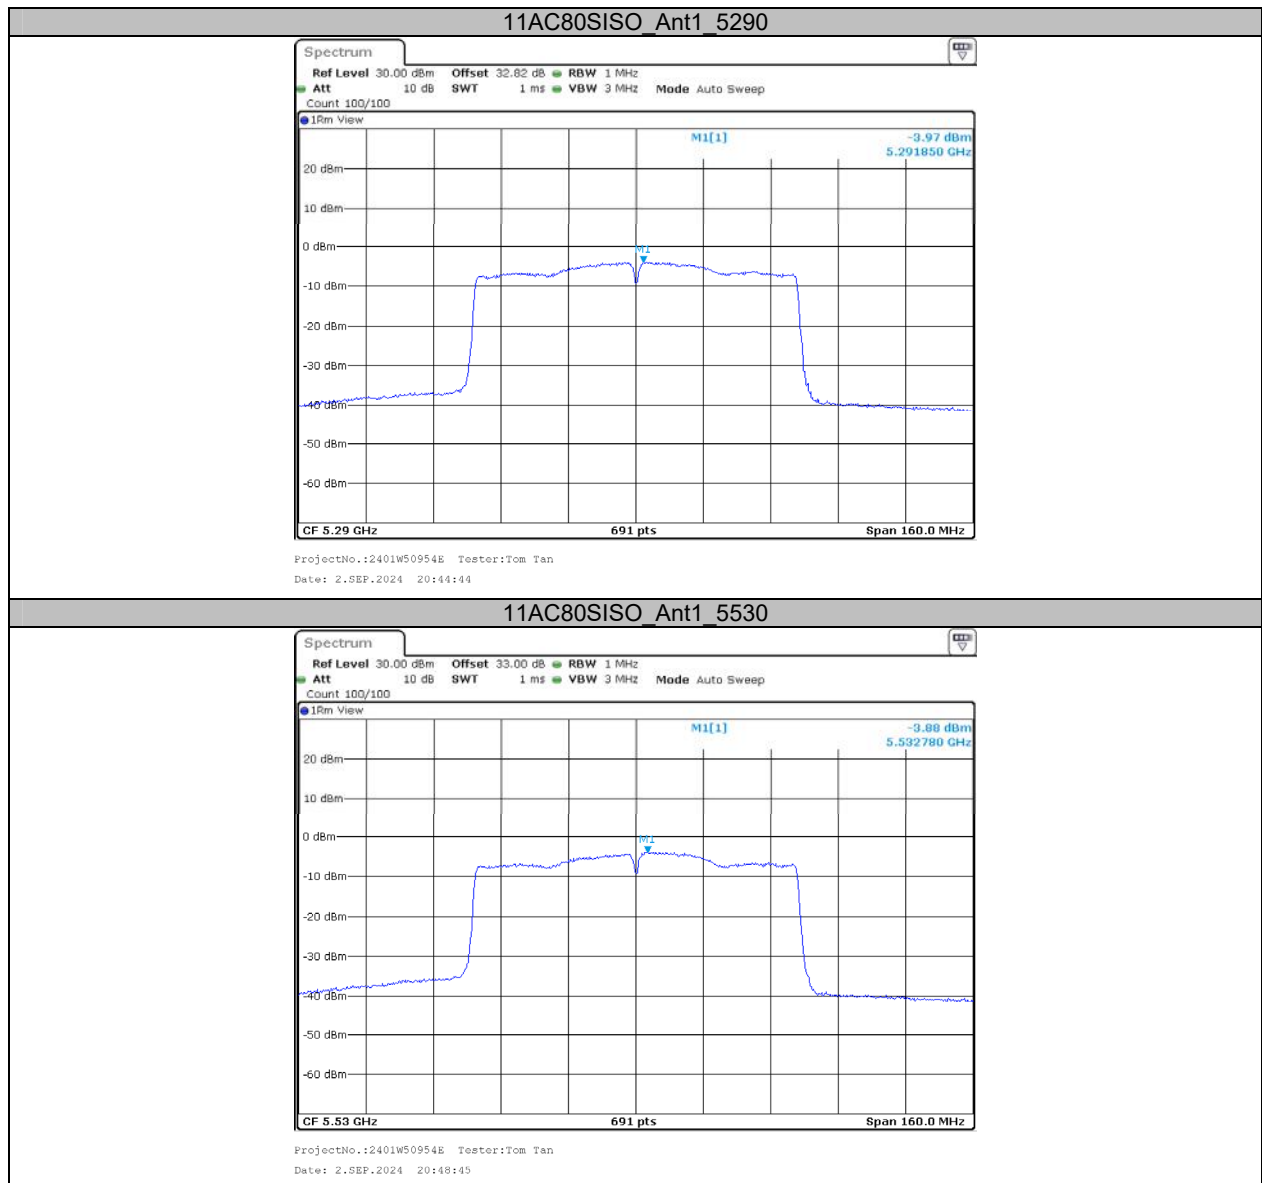

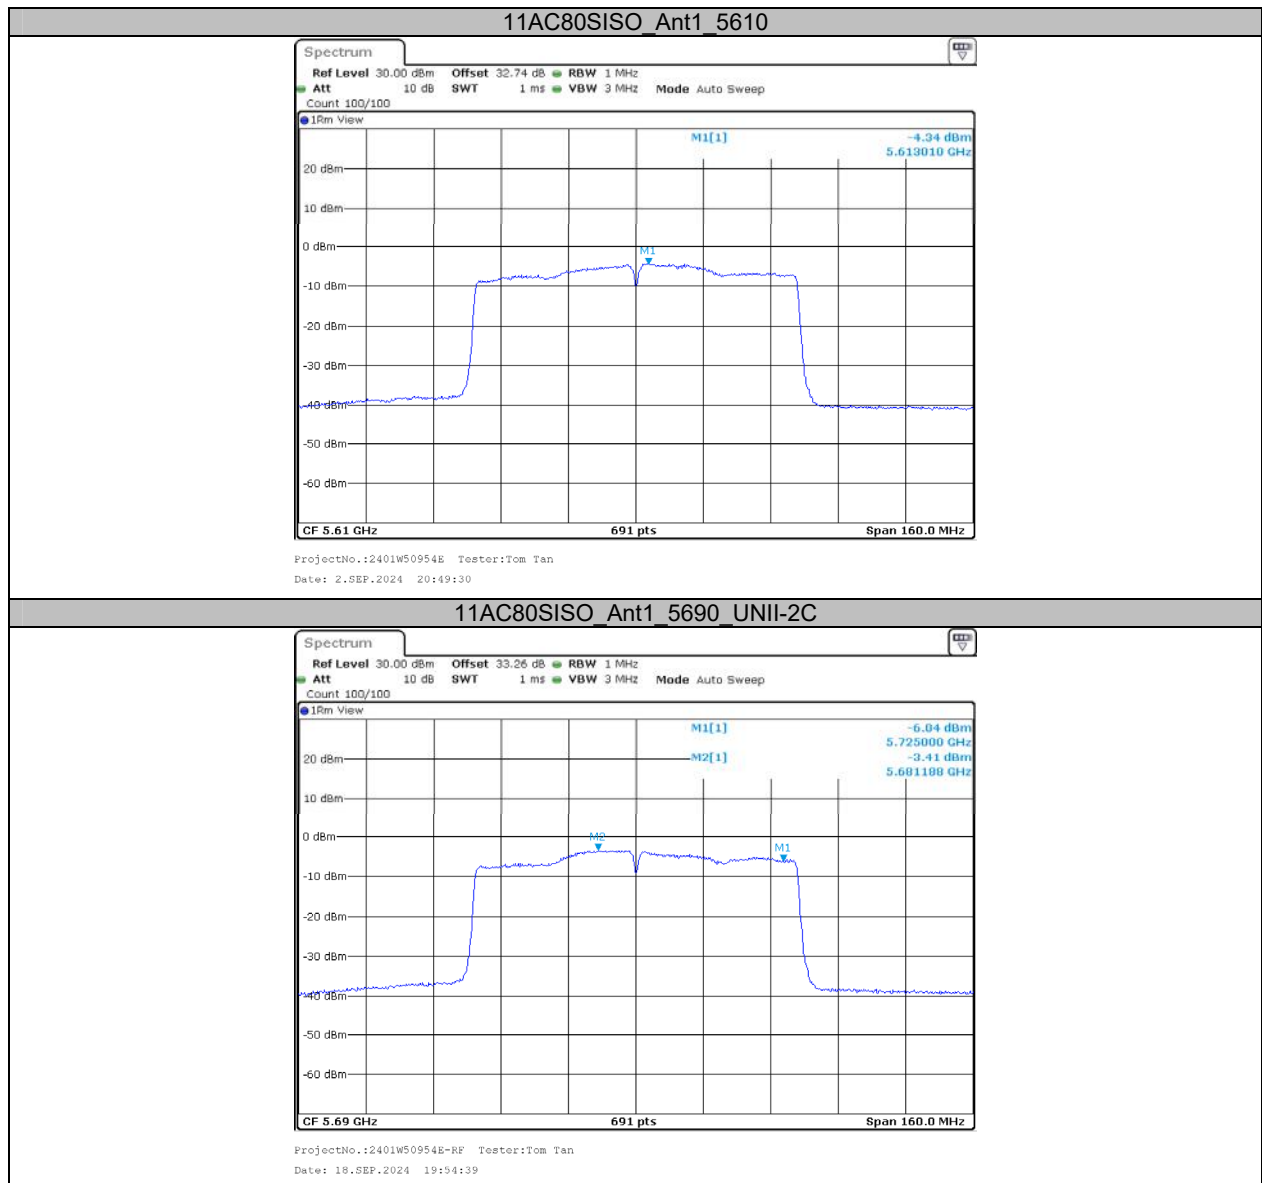

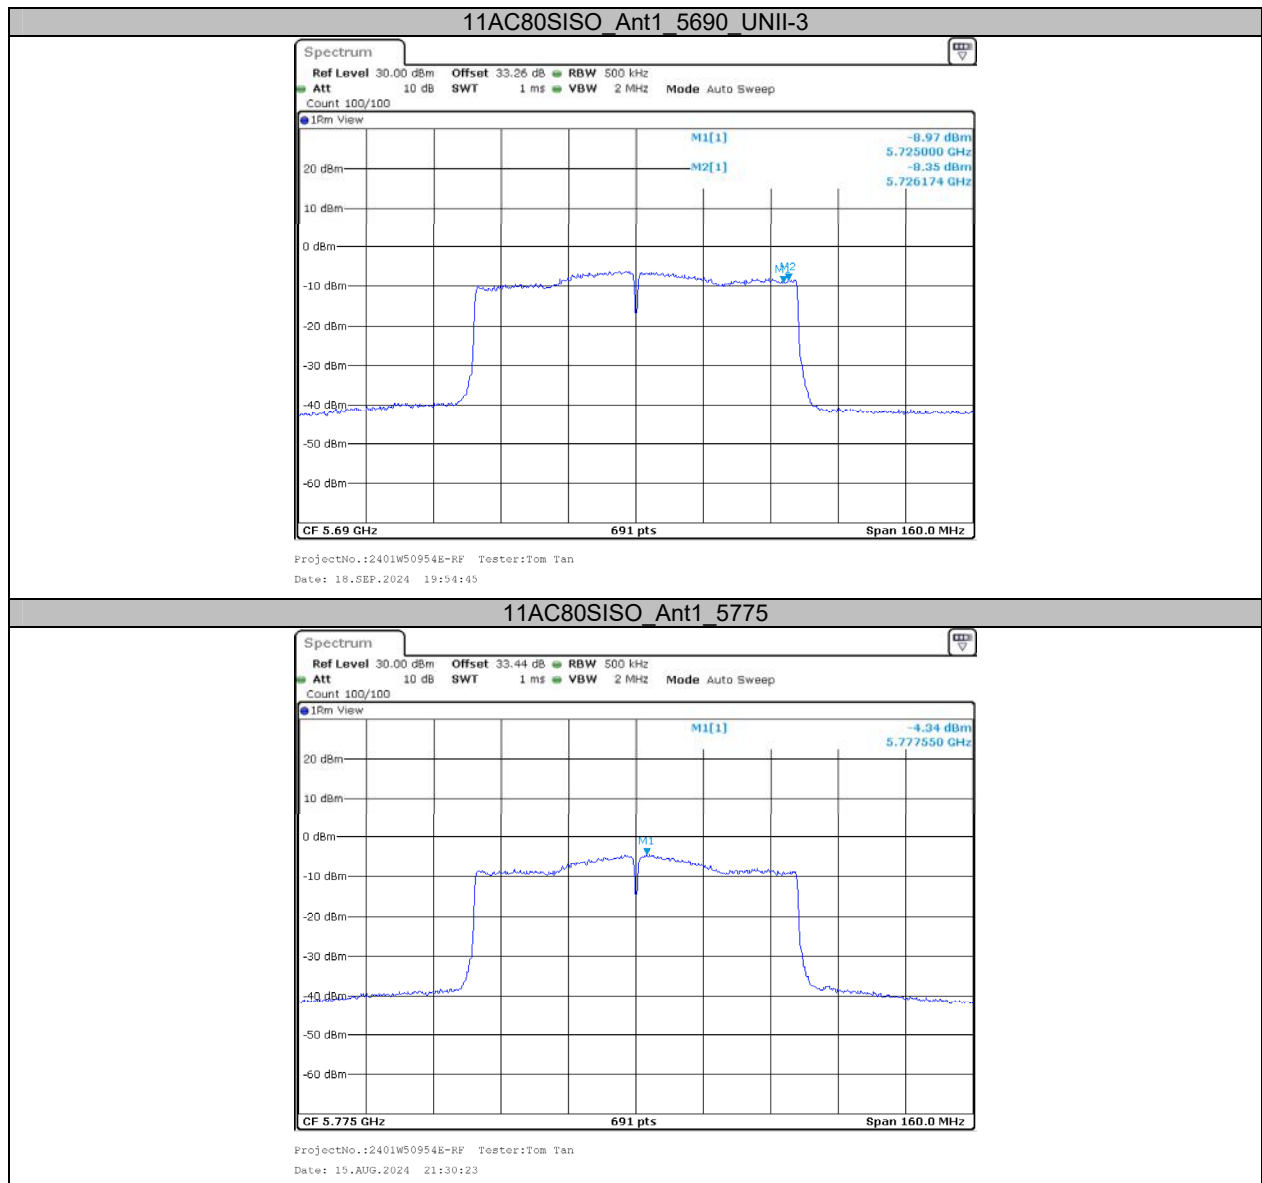

Appendix D: Duty Cycle**Test Result**

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]	1/T[Hz]	RBW Setting[Hz]
11A	Ant1	5180	1.39	1.50	92.67	0.33	719	1000
		5200	1.39	1.50	92.67	0.33	719	1000
		5240	1.39	1.50	92.67	0.33	719	1000
		5260	1.39	1.50	92.67	0.33	719	1000
		5280	1.39	1.50	92.67	0.33	719	1000
		5320	1.39	1.50	92.67	0.33	719	1000
		5500	1.39	1.50	92.67	0.33	719	1000
		5580	1.39	1.50	92.67	0.33	719	1000
		5700	1.39	1.50	92.67	0.33	719	1000
		5720	1.39	1.50	92.67	0.33	719	1000
		5745	1.39	1.50	92.67	0.33	719	1000
		5785	1.39	1.50	92.67	0.33	719	1000
		5825	1.39	1.50	92.67	0.33	719	1000
11AC20SISO	Ant1	5180	1.31	1.42	92.25	0.35	763	1000
		5200	1.31	1.42	92.25	0.35	763	1000
		5240	1.31	1.42	92.25	0.35	763	1000
		5260	1.31	1.41	92.91	0.32	763	1000
		5280	1.31	1.41	92.91	0.32	763	1000
		5320	1.31	1.42	92.25	0.35	763	1000
		5500	1.31	1.42	92.25	0.35	763	1000
		5580	1.31	1.42	92.25	0.35	763	1000
		5700	1.32	1.42	92.96	0.32	758	1000
		5720	1.31	1.42	92.25	0.35	763	1000
		5745	1.31	1.42	92.25	0.35	763	1000
		5785	1.31	1.42	92.25	0.35	763	1000
		5825	1.31	1.42	92.25	0.35	763	1000
11AC40SISO	Ant1	5190	0.65	0.76	85.53	0.68	1538	2000
		5230	0.65	0.76	85.53	0.68	1538	2000
		5270	0.65	0.76	85.53	0.68	1538	2000
		5310	0.65	0.76	85.53	0.68	1538	2000
		5510	0.65	0.76	85.53	0.68	1538	2000
		5550	0.65	0.76	85.53	0.68	1538	2000
		5670	0.65	0.76	85.53	0.68	1538	2000
		5710	0.65	0.76	85.53	0.68	1538	2000
		5755	0.65	0.76	85.53	0.68	1538	2000
11AC80SISO	Ant1	5795	0.65	0.76	85.53	0.68	1538	2000
		5210	0.32	0.43	74.42	1.28	3125	4000
		5290	0.32	0.43	74.42	1.28	3125	4000
		5530	0.32	0.43	74.42	1.28	3125	4000
		5610	0.32	0.43	74.42	1.28	3125	4000
		5690	0.32	0.43	74.42	1.28	3125	4000
		5775	0.32	0.42	76.19	1.18	3125	4000







