

Antenna Specification

Specifications Summary


ITEM	SPEC.	
	2.4GHz	
Center Frequency	2402 MHz	3.37 dBi
	2442 MHz	2.74 dBi
	2484 MHz	2.32 dBi
MAX. GAIN	3.37 dBi	
Impedance	50Ω	

ITEM	SPEC.	
	5 GHz	
Center Frequency	5150 MHz	1.47 dBi
	5300 MHz	2.66 dBi
	5500 MHz	3.02 dBi
	5800 MHz	1.57 dBi
MAX. GAIN	3.02 dBi	
Impedance	50Ω	

Antenna Photo & Length



天线类型/ ANT Type:	PCB	天线型号/ ANT	SmartVision 80 ANT1	制造商/ Manufactory:	YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD. No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China
--------------------	-----	--------------	------------------------	----------------------	---

天线尺寸/ANT Size


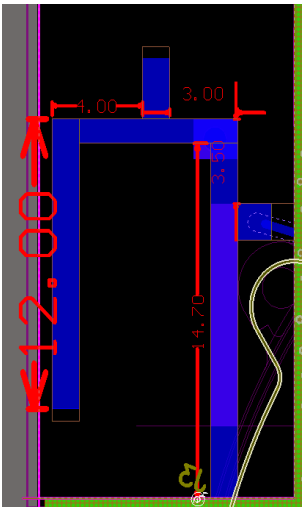


2402MHz

3D Antenna pattern

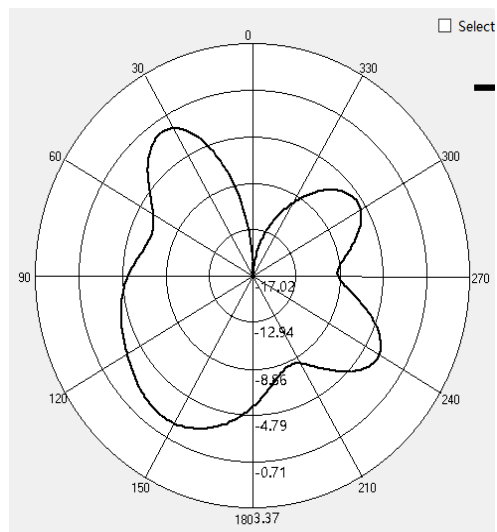



2D Antenna pattern (X->Y;X->Z;Y->Z)

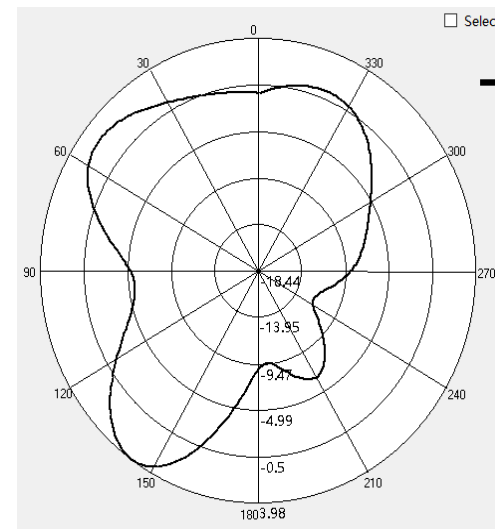
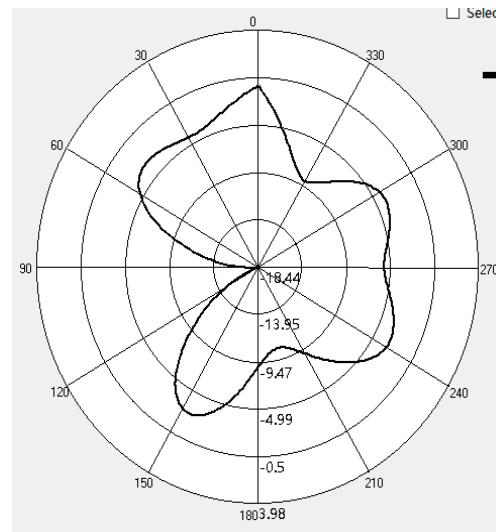


2442MHz

3D Antenna pattern



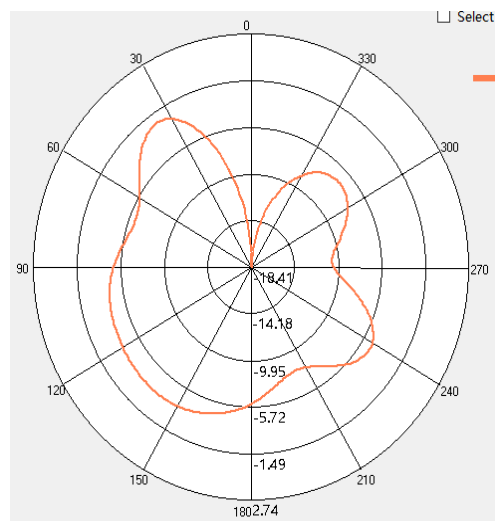



2D Antenna pattern (X->Y;X->Z;Y->Z)

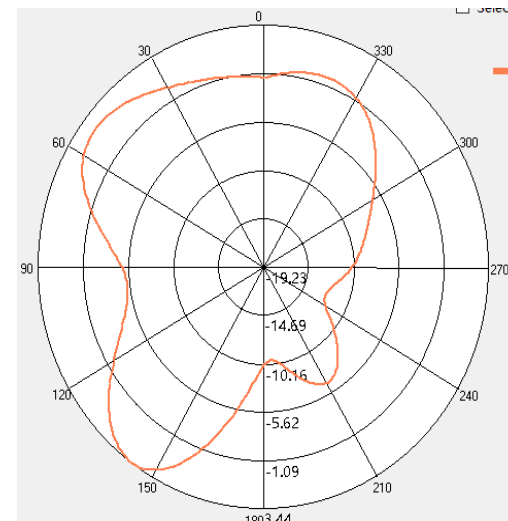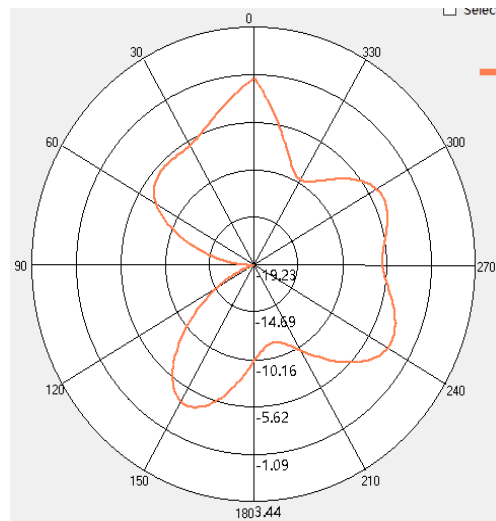

2484MHz





3D Antenna pattern

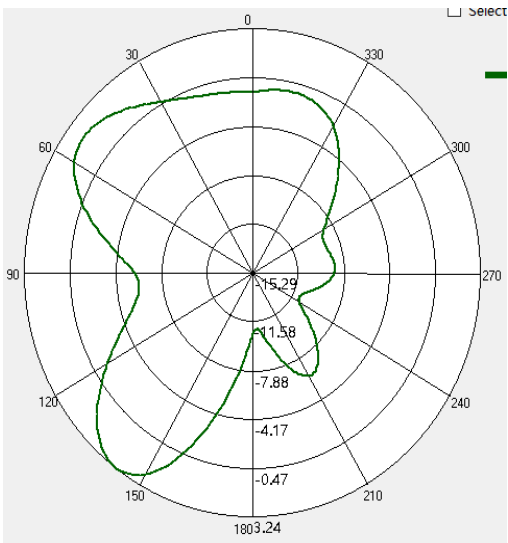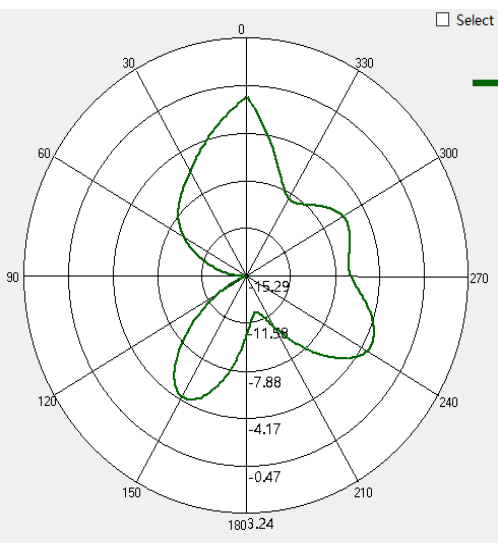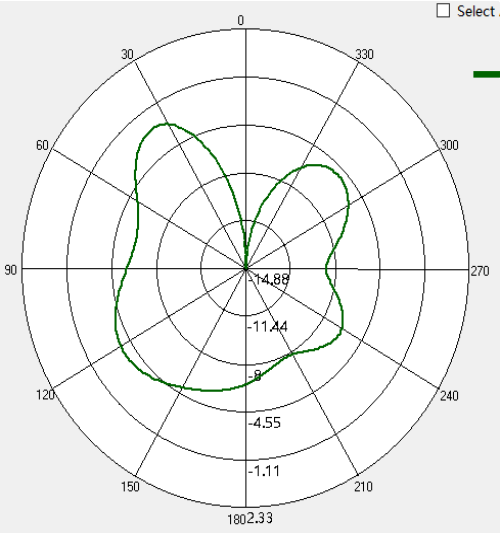

Point Values	Minimum Gain (dBi)	Maximum Gain (dBi)	Average Gain (dBi)
Frequency (MHz)			
2402	-17.0177	3.36798	-3.33712
2442	-18.4052	2.73746	-3.95218
2484	-14.8769	2.32260	-4.33680





5150MHz

3D Antenna pattern

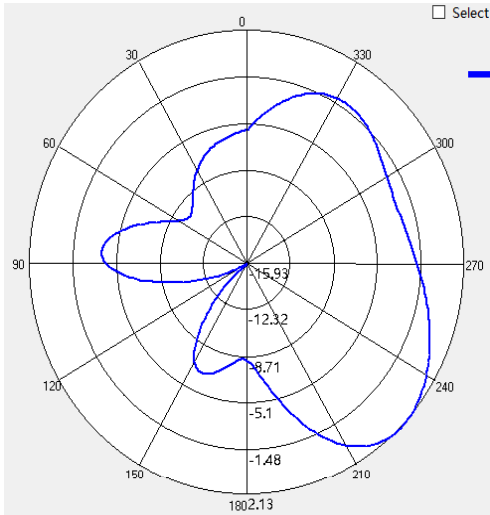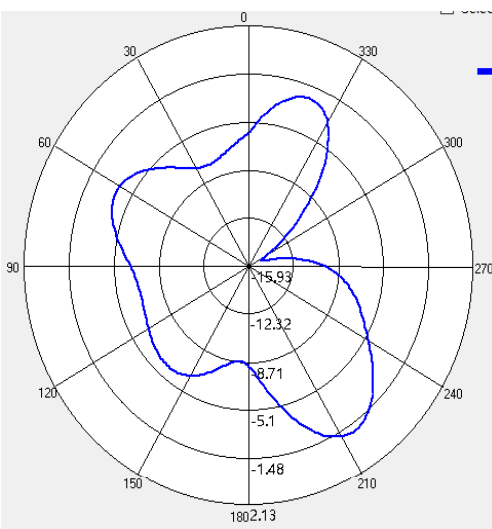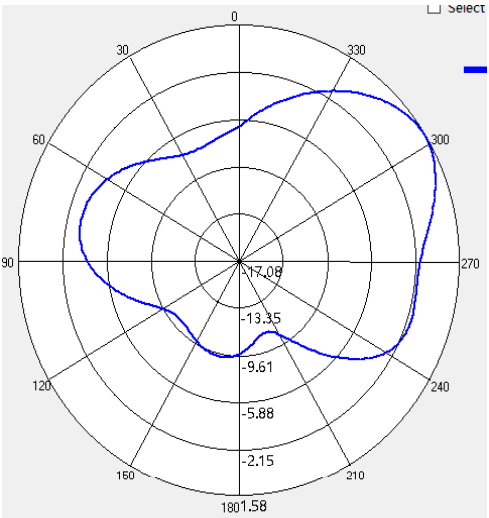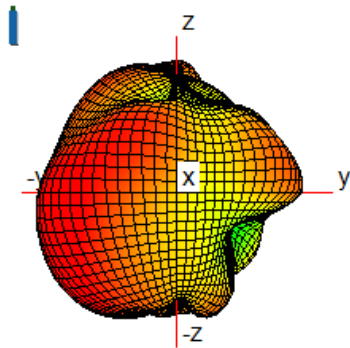





5300MHz

3D Antenna pattern

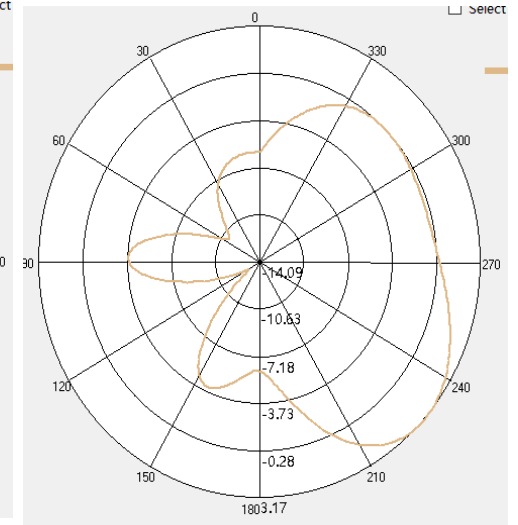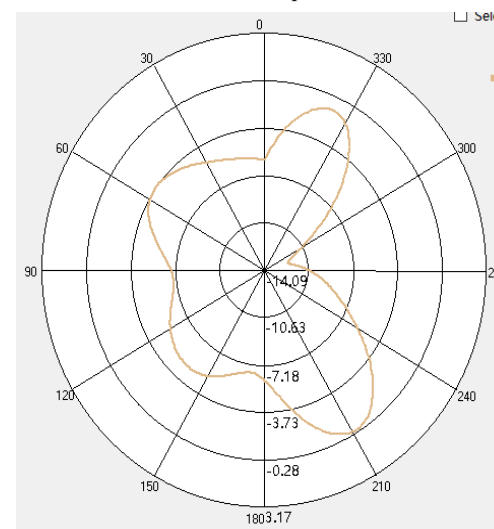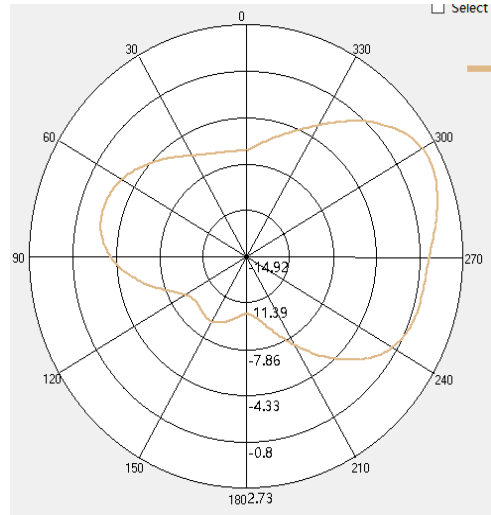



5500MHz

3D Antenna pattern

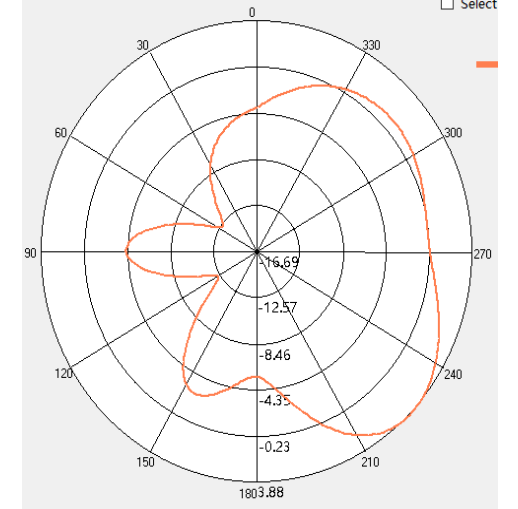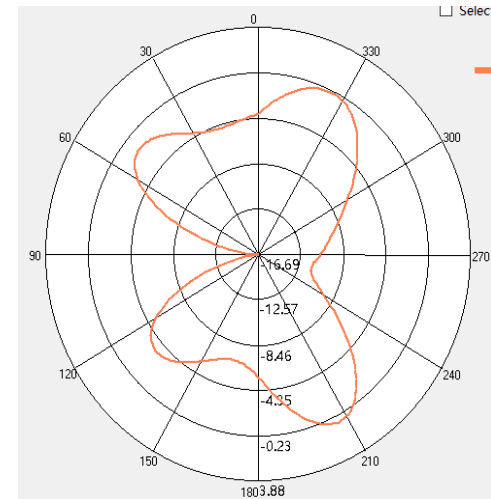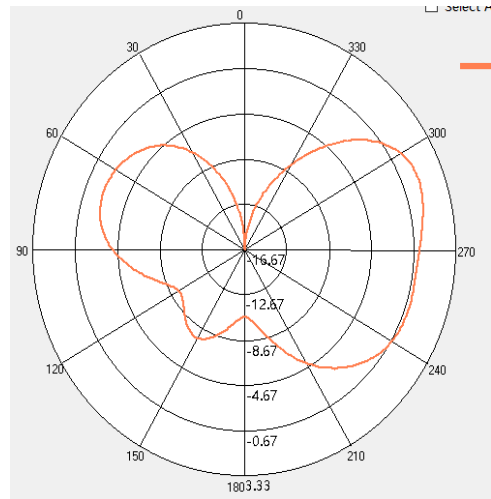



5800MHz

3D Antenna pattern

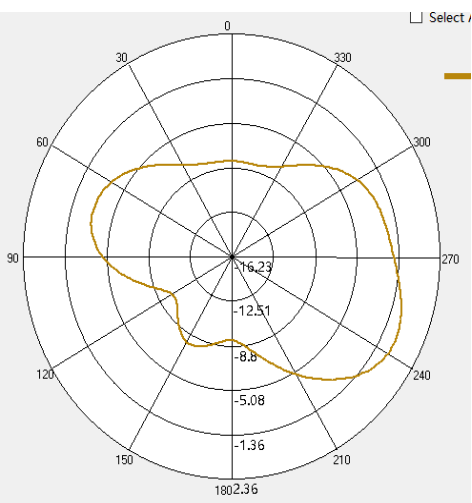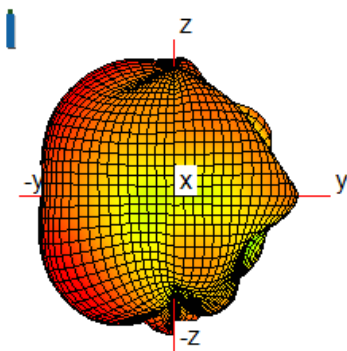

2D Antenna pattern (X->Y;X->Z;Y->Z)

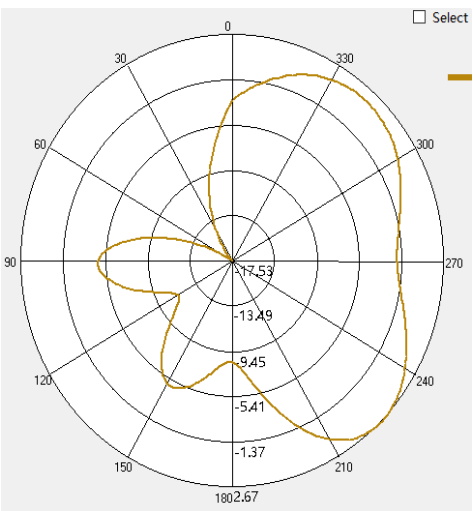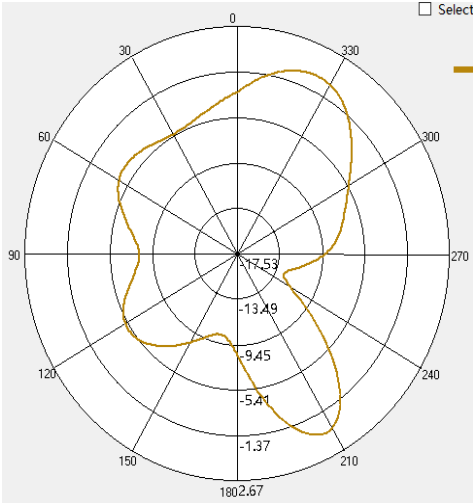

Point Values	Minimum Gain (dBi)	Maximum Gain (dBi)	Average Gain (dBi)
Frequency (MHz)			
5150	-15.8804	1.47098	-3.97103
5300	-13.8570	2.65810	-3.10876
5500	-16.6708	3.02001	-2.80377
5800	-15.9832	1.56849	-3.47736