

Antenna Specification

Specifications Summary

ITEM	SPEC.	
	2.4GHz	
Center Frequency	2402 MHz	3.13dBi
	2442 MHz	2.76dBi
	2484 MHz	2.10dBi
MAX. GAIN	3.13dBi	
Impedance	50Ω	

ITEM	SPEC.	
	5 GHz	
Center Frequency	5150 MHz	5.60dBi
	5300 MHz	5.73dBi
	5500 MHz	4.84dBi
	5800 MHz	1.53dBi
MAX. GAIN	5.73dBi	
Impedance	50Ω	

Antenna Photo & Length

天线类型/
ANT Type:

PCB


天线型号/
ANT Model:

T77LTE BT/Wi-Fi ANT

制造商/
Manufactory:


YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
No.666 Hu'an Rd,Huli District Xiamen City, Fujian, P.R. China

天线图/ANT Photo

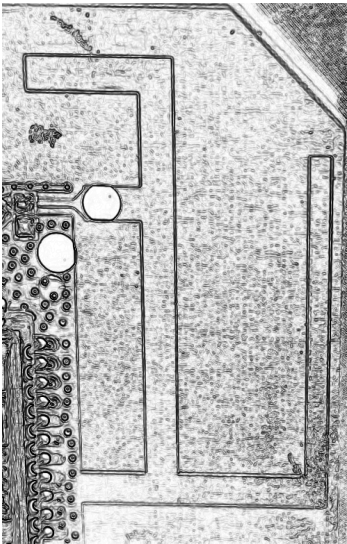


2402MHz

3D Antenna pattern

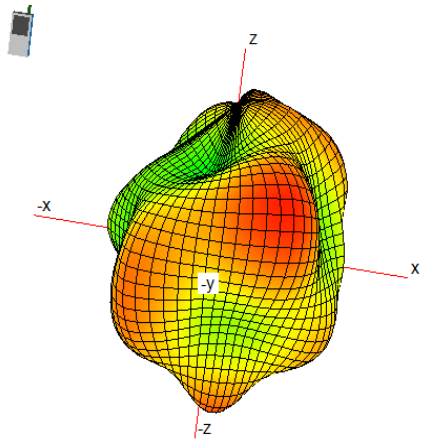


2442MHz

3D Antenna pattern

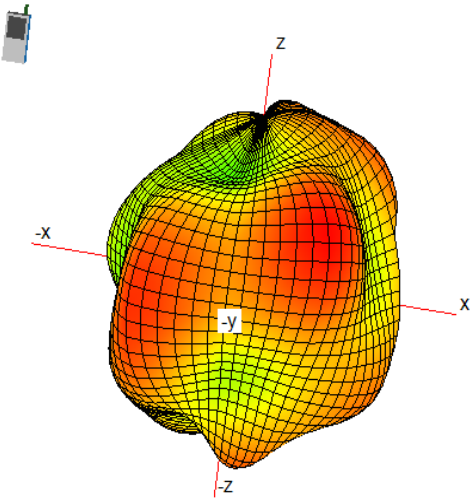

2484MHz


3D Antenna pattern

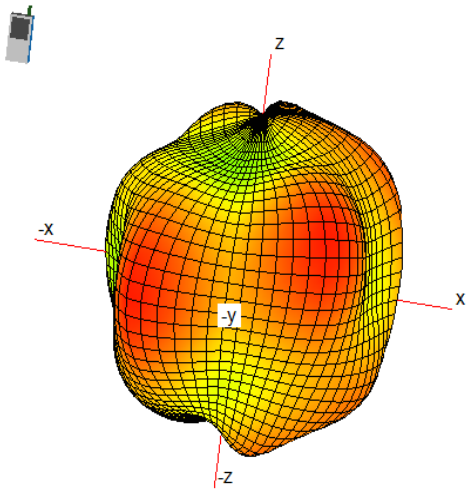

Point Values	Minimum Gain (dBi)	Maximum Gain (dBi)	Average Gain (dBi)
Frequency (MHz)			
2402	-10.03	3.13	-3.13
2442	-12.07	2.76	-3.33
2484	-14.67	2.10	-3.74


5150MHz

3D Antenna pattern

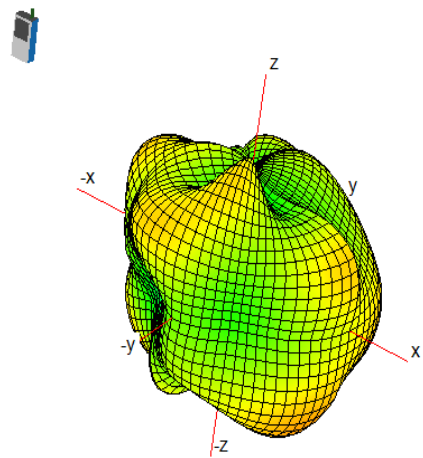


5300MHz

3D Antenna pattern

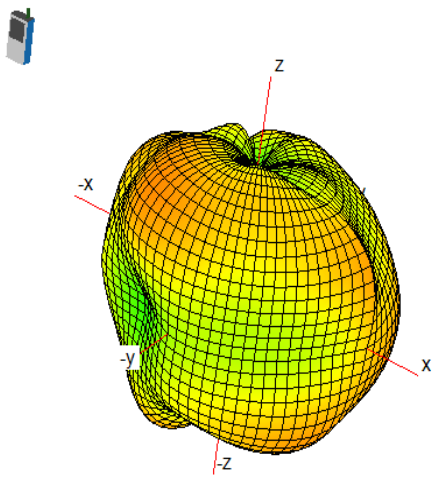


5500MHz

3D Antenna pattern

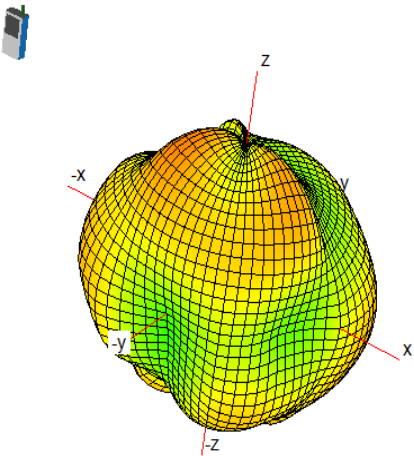

5800MHz

3D Antenna pattern

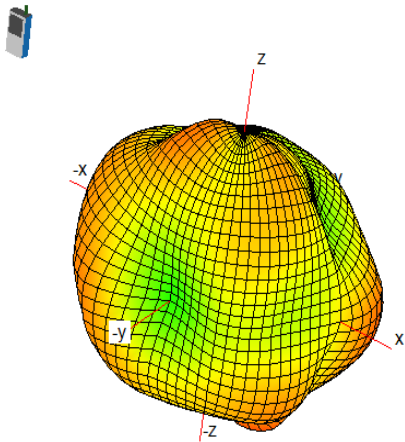

Point Values		Minimum Gain (dBi)	Maximum Gain (dBi)	Average Gain (dBi)
Frequency (MHz)				
5150		-16.3267936	5.59954723	-2.04423
5300		-15.48258626	5.73475969	-1.89319
5500		-17.38641047	4.837825858	-3.46804
5800		-15.08724442	1.526248171	-4.29517