




FCC PART 15, SUBPART C
IC RSS-210, ISSUE 8, DECEMBER 2010
TEST AND MEASUREMENT REPORT

For

CentraLite Systems, Inc.

1000 Cody Road, Suite A, Mobile, Alabama 36695, USA

FCC ID: T3L-SS013
IC: 12192A-SS013

Report Type: Original Report	Product Type: ZigBee Micro-Door Sensor
Prepared By Todd Moy Test Technician	
Report Number R1501193-247	
Report Date 2015-03-17	
Reviewed By Bo Li RF Lead	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*” (Rev. 2)

TABLE OF CONTENTS

1 General Description.....	5
1.1 Product Description for Equipment Under Test (EUT)	5
1.2 Mechanical Description of EUT	5
1.3 Objective.....	5
1.4 Related Submittal(s)/Grant(s)	5
1.5 Test Methodology	5
1.6 Measurement Uncertainty	5
1.7 Test Facility	6
2 System Test Configuration.....	7
2.1 Justification.....	7
2.2 EUT Exercise Software.....	7
2.3 Special Equipment	7
2.4 Equipment Modifications.....	7
2.5 Local Support Equipment	7
2.6 EUT Internal Configuration Details.....	7
2.7 Interface Ports and Cables	7
2.8 Power Supply List and Details.....	8
3 Summary of Test Results	9
4 FCC §15.247(i), §2.1091 & IC RSS-102 – RF Exposure.....	10
4.1 Applicable Standards	10
4.2 MPE Prediction.....	11
4.3 MPE Results	11
5 FCC §15.203 & IC RSS-Gen §7.1.2 – Antenna Requirements	12
5.1 Applicable Standards	12
5.2 Antenna Description	12
6 FCC §15.209, §15.247(d) & IC RSS-210 A8.5 – Spurious Radiated Emissions.....	13
6.1 Applicable Standards	13
6.2 Test Setup	14
6.3 Test Procedure	14
6.4 Corrected Amplitude & Margin Calculation.....	15
6.5 Test Setup Block Diagram	15
6.6 Test Equipment List and Details.....	16
6.7 Test Environmental Conditions	16
6.8 Summary of Test Results	16
6.9 Radiated Emissions Test Results	17
7 FCC§15.247(a)(2) & IC RSS-210 §A8.2 – 6 dB & 99% Emission Bandwidth	20
7.1 Applicable Standards	20
7.2 Measurement Procedure.....	20
7.3 Test Equipment List and Details.....	20
7.4 Test Environmental Conditions	20
7.5 Test Results.....	21
8 FCC §15.247(b) & IC RSS-210 §A8.4 (4) – Peak Output Power Measurement.....	23
8.1 Applicable Standards	23
8.2 Measurement Procedure.....	23
8.3 Test Equipment List and Details.....	23
8.4 Test Environmental Conditions	23
8.5 Test Results.....	24
9 FCC §15.247(d) & IC RSS-210 §A8.5 – 100 kHz Bandwidth of Band Edges.....	26
9.1 Applicable Standards	26
9.2 Measurement Procedure.....	26
9.3 Test Equipment List and Details.....	26

9.4	Test Environmental Conditions	26
9.5	Test Results.....	27
10	FCC §15.247(e) & IC RSS-210 §A8.2 (b) – Power Spectral Density	28
10.1	Applicable Standards	28
10.2	Measurement Procedure.....	28
10.3	Test Equipment List and Details.....	28
10.4	Test Environmental Conditions	28
10.5	Test Results.....	29
11	Exhibit A – FCC & IC Equipment Labeling Requirements	31
11.1	FCC ID Label Requirements	31
11.2	IC Label Requirements	31
11.3	FCC ID & IC Label Contents and Location.....	32
12	Exhibit B – Test Setup Photographs	33
12.1	Radiated Emission below 1 GHz Front View	33
12.2	Radiated Emission below 1 GHz Rear View	33
12.3	Radiated Emission above 1 GHz Front View	34
12.4	Radiated Emission above 1 GHz Rear View	34
13	Exhibit C – EUT Photographs.....	35
13.1	EUT Top View.....	35
13.2	EUT Bottom View	35
13.3	EUT Left View	36
13.4	EUT Right View	36
13.5	EUT Front View	37
13.6	EUT Back View.....	37
13.7	Main Board Top View	38
13.8	Main Board Rear View	38

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1501193-247	Original Report	2015-03-17

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *CentraLite Systems, Inc.*, and their product *FCC ID: T3L-SS013, IC: 12192A-SS013; model: 3321*, or the “EUT” (Equipment Under Testing) as referred to in this report. The EUT operates is a ZigBee Micro-Door Sensor and operates from 2405 to 2480 MHz.

1.2 Mechanical Description of EUT

The EUT measures approximately 1 cm (L) x 1 cm (W) x 1 cm (H) and weighs 0.05 kg.

Note: The EUT was tested without enclosure.

The test data gathered are from typical production sample, serial number: 3321 assigned by Client.

1.3 Objective

This report is prepared on behalf of *CentraLite Systems, Inc.* in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commission’s rules.

The objective is to determine compliance with FCC Part 15.247 rules and IC RSS-210 rules for Output Power, Antenna Requirements, 6 dB Bandwidth, and power spectral density, 100 kHz Bandwidth of Band Edges Measurement, Spurious Emissions, Conducted and Radiated Spurious Emissions.

1.4 Related Submittal(s)/Grant(s)

N/A

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz and FCC KDB 558074 D01 DTS Meas Guidance v03r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

The following calculation follows the procedures as set forth in clause 7.2.3, ETSI TR 100 028-1 V1.4.1 (2001-12), the expression of Uncertainty in Radiated RF Testing is in accordance to ISO/IEC 17025 and TR 100 028-1 V1.4.1 (2001-12).

The expanded Measurement Uncertainty value having a confidence factor of 95%, is within a range of 5.48 dB. This means that the value of conducted RF carrier power test will be within +/- 2.74 dB of the measuring radiated emissions power versus the expected value.

The expected value is defined as the power at the antenna of the Transmitter under Test.

1.7 Test Facility

Bay area compliance Laboratories Corp. (BACL) is:

1- An independent Commercial Test Laboratory accredited to **ISO 17025: 2005** by **A2LA**, in the fields of: Electromagnetic Compatibility & Telecommunications covering Emissions, Immunity, Radio, RF Exposure, Safety and Telecom. This includes NEBS (Network Equipment Building System), Wireless RF, Telecommunications Terminal Equipment (TTE); Network Equipment; Information Technology Equipment (ITE); Medical Electrical Equipment; Industrial, Commercial, and Medical Test Equipment; Professional Audio and Video Equipment; Electronic (Digital) Products; Industrial and Scientific Instruments; Cabled Distribution Systems and Energy Efficiency Lighting.

2- An ENERGY STAR Recognized Laboratory, for the LM80 Testing, a wide variety of Luminaires and Computers.

3- A NIST Designated Phase-I and Phase-II CAB including: ACMA (Australian Communication and Media Authority), BSMI (Bureau of Standards, Metrology and Inspection of Taiwan), IDA (Infocomm Development Authority of Singapore), IC (Industry Canada), Korea (Ministry of Communications Radio Research Laboratory), NCC (Formerly DGT; Directorate General of Telecommunication of Chinese Taipei) OFTA (Office of the Telecommunications Authority of Hong Kong), Vietnam, VCCI - Voluntary Control Council for Interference of Japan and a designated EU CAB (Conformity Assessment Body) (Notified Body) for the EMC and R&TTE Directives.

4- A Product Certification Body accredited to **ISO Guide 65: 1996** by **A2LA** to certify:

1- Unlicensed, Licensed radio frequency devices and Telephone Terminal Equipment for the FCC. Scope A1, A2, A3, A4, B1, B2, B3, B4 & C.

2. Radio Standards Specifications (RSS) in the Category I Equipment Standards List and All Broadcasting Technical Standards (BETS) in Category I Equipment Standards List for Industry Canada.

3. Radio Communication Equipment for Singapore.

4. Radio Equipment Specifications, GMDSS Marine Radio Equipment Specifications, and Fixed Network Equipment Specifications for Hong Kong.

5. Japan MIC Telecommunication Business Law (A1, A2) and Radio Law (B1, B2 and B3).

6. Audio/Video, Battery Charging Systems, Computers, Displays, Enterprise Servers, Imaging Equipment, Set-Top Boxes, Telephony, Televisions, Ceiling Fans, CFLs (Including GU24s), Decorative Light Strings, Integral LED Lamps, Luminaires, Residential Ventilating Fans.

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2009, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: A-0027. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is an American Association for Laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

<http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionid=8430d44f1f47cf2996124343c704b367816b>

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2009 and FCC KDB 558074 D01 DTS Meas Guidance v03r02.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PPSD across all data rates bandwidths, and modulations.

2.2 EUT Exercise Software

EUT was exercised using putty.exe.

2.3 Special Equipment

There were no special accessories required, included, or intended for use with EUT during these tests.

2.4 Equipment Modifications

No modifications were made to the EUT.

2.5 Local Support Equipment

Manufacturer	Description	Model	Serial Number
Hewlett-Packard	Power Supply	623B	2003A05705
Dell	Laptop	Latitude D 610	-

2.6 EUT Internal Configuration Details

Manufacturer	Description	Model	Serial Number
Silicon Labs	SkyWorks ZigBee Radio	EM357/SE2432L	-
Silicon Labs	CPU	Si4355	-

2.7 Interface Ports and Cables

Description	Length	From	To
Ethernet Cable	1M	Debug Adapter	Laptop
Ethernet Cable	1M	EUT	Debug Adapter

2.8 Power Supply List and Details

No power supplies were required for the EUT.

3 Summary of Test Results

Results reported relate only to the product tested.

FCC/IC Rules	Description of Test	Results
FCC §15.247(i), §2.1091 IC RSS-102	RF Exposure	Compliant
FCC §15.203 IC RSS-Gen §7.1.2	Antenna Requirement	Compliant
FCC §15.207(a) IC RSS-Gen §7.2.4	AC Line Conducted Emissions	N/A ¹
FCC §15.205 IC RSS-210 §2.2	Restricted Bands	Compliant
FCC §15.209, §15.247 (d) IC RSS-210 §A8.5	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(2) IC RSS-210 §A8.2	6 dB Emission Bandwidth	Compliant
FCC §15.247(b)(3) IC RSS-210 §A8.4	Maximum Peak Output Power	Compliant
FCC §15.247(d) IC RSS-210 §A8.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e) IC RSS-210 §A8.2(b)	Power Spectral Density	Compliant

¹ The EUT is battery powered

4 FCC §15.247(i), §2.1091 & IC RSS-102 – RF Exposure

4.1 Applicable Standards

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Before equipment certification is granted, the procedure of IC RSS-102 must be followed concerning the exposure of humans to RF field

According to IC RSS-102 Issue 2 section 4.1, RF limits used for general public will be applied to the EUT.

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Time Averaging (min)
0.003 - 1	280	2.19	-	6
1 - 10	280 / f	2.19 / f	-	6
10 - 30	28	2.19 / f	-	6
30 – 300	28	0.073	2*	6
300 – 1 500	1.585 f ^{0.5}	0.0042 f ^{0.5}	f / 150	6
1 500 – 15 000	61.4	0.163	10	6
15 000 – 150 000	61.4	0.163	10	616000 / f ^{1.2}
150 000- 300 000	0.158 f ^{0.5}	4.21 x 10 ⁻⁴ f ^{0.5}	6.67 x 10 ⁻⁵ f	616000 / f ^{1.2}

Note: f is frequency in MHz

* = Power density limit is applicable at frequencies greater than 100 MHz

4.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

4.3 MPE Results

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>15.322</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>34.0565</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>2405</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>0.77</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.194</u>
<u>Power density of prediction frequency at 20 cm (mW/cm²):</u>	<u>0.008099</u>
<u>Power density of prediction frequency at 20 cm (W/m²):</u>	<u>0.08099</u>
<u>MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>
<u>MPE limit for uncontrolled exposure at prediction frequency (W/m²):</u>	<u>10</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.008099 mW/cm² (0.08099 W/m²). Limit is 1.0 mW/cm² (10 W/m²).

5 FCC §15.203 & IC RSS-Gen §7.1.2 – Antenna Requirements

5.1 Applicable Standards

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to IC RSS-Gen §7.1.2: Transmitter Antenna

A transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 mW or less. For devices of output powers greater than 10 mW, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

Note: The power setting was controlled by manufacture with different antenna configuration. The power setting of the different antenna will be set with the corresponded value and no more than the level reported.

5.2 Antenna Description

The EUT uses a trace antenna, which complies with the antenna requirement. And the antenna gain is 0.77 dBi. Please refer to the internal photos.

6 FCC §15.209, §15.247(d) & IC RSS-210 A8.5 – Spurious Radiated Emissions

6.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As per FCC §15.209(a) and RSS-210: Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per IC RSS-210 A8.5 Out-of-band Emissions, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section A8.4 (4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

6.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.4-2009. The specification used was the FCC 15 Subpart C and IC RSS-210 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

6.3 Test Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v03r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 11: Emissions in non-restricted frequency bands and section 12: Emissions in restricted frequency bands. As well as ANSI C63.4: 2009 as described below:

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 3MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

6.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:


$$CA = Ai + AF + CL + Atten - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.5 Test Setup Block Diagram

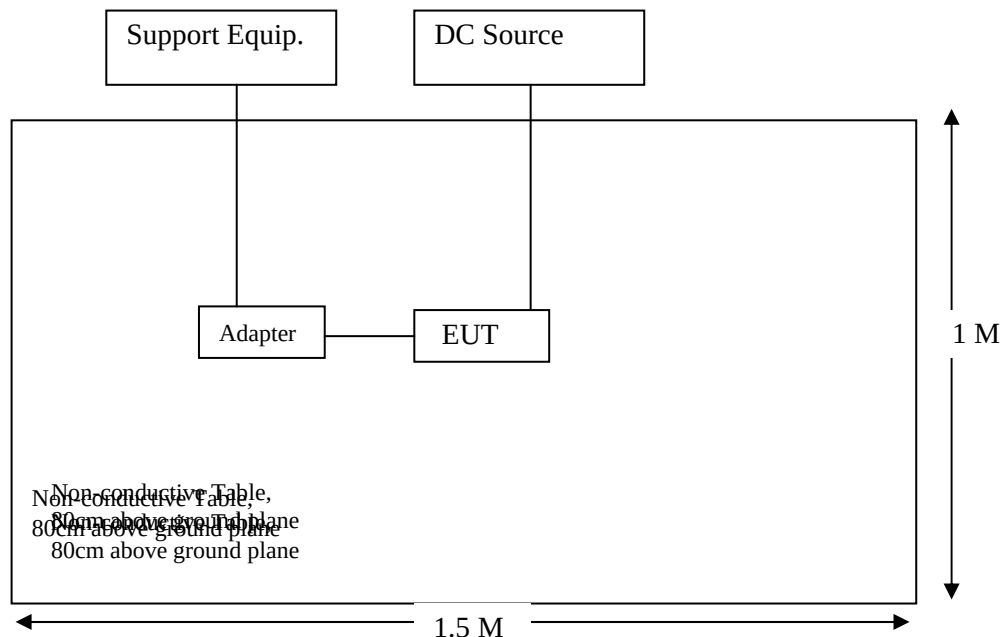

6.6 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Sunol Sciences	System Controller	SC99V	122303-1	N/R	N/R
Sunol Sciences	Antenna, Biconi-Log	JB3	A020106-2	2014-09-17	1 year
Hewlett Packard	Pre-amplifier 1-26.5 GHz	8447D	2944A06639	2014-04-26	1 year
HP/ Agilent	Pre-Amplifier	8449B OPT HO2	3008A0113	2014-03-10	1year
Agilent	Analyzer, Spectrum	E4440A	MY44303352	2014-11-13	1 year
Eaton	Antenna, Horn	96001	2617	2014-11-18	1 year
Rohde & Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100044	2014-07-17	1 year

Statement of Traceability: *BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.*

6.7 Test Environmental Conditions

Temperature:	17 °C
Relative Humidity:	46 %
ATM Pressure:	101.9 kPa

The testing was performed by Todd Moy on 2015-01-21 in 5 m chamber 3.

6.8 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Title 47, Part 15C and IC RSS-210/Gen standard's radiated emissions limits, and had the worst margin of:

30-1000 MHz:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Range (MHz)
-1.98	124.997	Vertical	30 to 1000 MHz


Above 1 GHz:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Range (MHz)
-0.821	2483.5	Vertical	1000 – 25000

Please refer to the following table and plots for specific test result details

6.9 Radiated Emissions Test Results

1) 30 MHz – 1 GHz, Measured at 3 meters

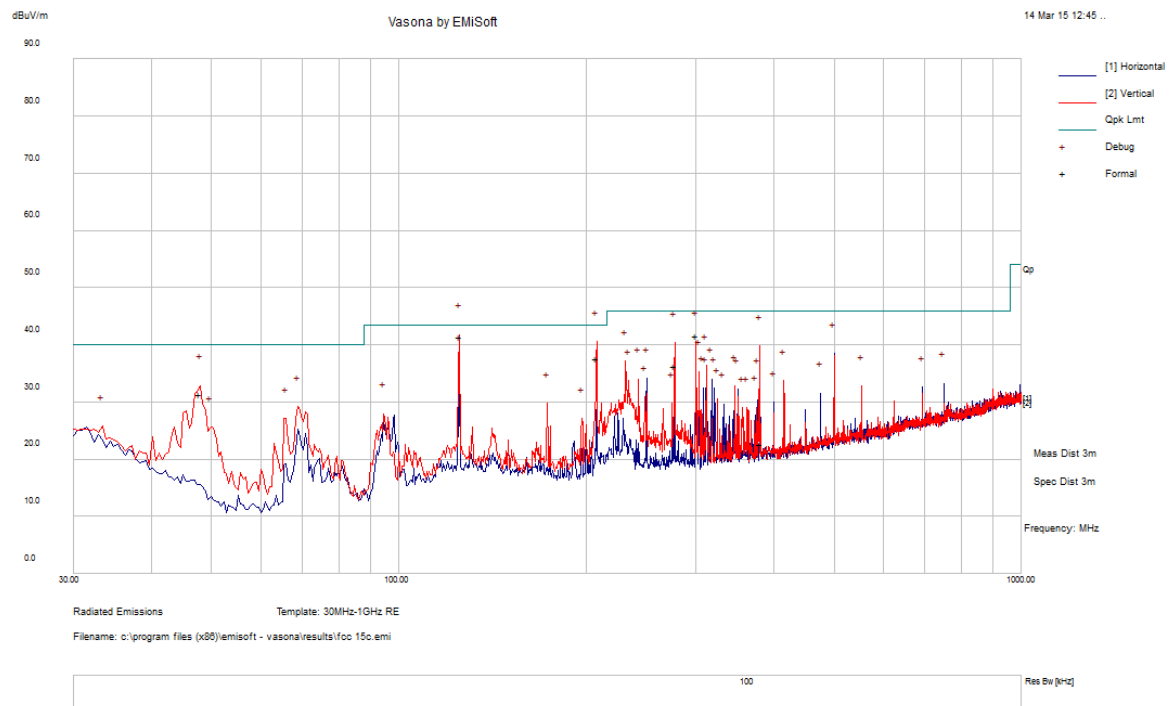

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)
124.997	41.52	100	V	216	43.5	-1.98
207.859	37.64	108	V	243	43.5	-5.86
300.001	41.72	100	V	175	46	-4.28
277.142	36.43	155	V	184	46	-9.57
379.917	22.81	164	V	269	46	-23.19
47.7978	31.4	101	V	36	40	-8.6

2) Above 1 GHz, Measured at 3 meters

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
Low Channel 2405 MHz, measured at 3 meters											
2405	73.68	79	100	V	28.174	2.865	0	104.719	-	-	Peak
2405	77.72	114	100	H	28.197	2.865	0	108.782	-	-	Peak
2405	71.48	61	100	V	28.174	2.865	0	102.519	-	-	Ave
2405	75.39	114	124	H	28.197	2.865	0	106.452	-	-	Ave
2390	26.6	79	100	V	28.174	2.865	0	57.639	74	-16.361	Peak
2390	27.46	114	100	H	28.197	2.865	0	58.522	74	-15.478	Peak
2390	15.62	61	100	V	28.174	2.865	0	46.659	54	-7.341	Ave
2390	17.04	114	124	H	28.197	2.865	0	48.102	54	-5.898	Ave
4810	51.91	215	100	V	33.119	4.297	35.858	53.468	74	-20.532	Peak
4810	53.2	45	100	H	33.322	4.297	35.858	54.961	74	-19.039	Peak
4810	42.89	209	116	V	33.119	4.297	35.858	44.448	54	-9.552	Ave
4810	42.84	9	100	H	33.322	4.297	35.858	44.601	54	-9.399	Ave
7215	49.35	135	100	V	37.444	5.675	36.011	56.458	84.719	-28.261	Peak
7215	48.32	117	100	H	37.442	5.675	36.011	55.426	88.782	-33.356	Peak
7215	40.73	66	100	V	37.444	5.675	36.011	47.838	82.519	-34.681	Ave
7215	39.44	87	100	H	37.442	5.675	36.011	46.546	86.452	-39.906	Ave
9620	47.02	0	100	V	38.830	8.704	36.044	58.509	84.719	-26.209	Peak
9620	46.23	0	100	H	38.834	8.704	36.044	57.723	88.782	-31.058	Peak
9620	34.24	0	100	V	38.830	8.704	36.044	45.729	82.519	-36.789	Ave
9620	33.78	0	100	H	38.834	8.704	36.044	45.273	86.452	-41.178	Ave
Middle Channel 2440 MHz, measured at 3 meters											
2440	74.07	79	100	V	28.174	2.865	0	105.109	-	-	Peak
2440	76.22	111	100	H	28.197	2.865	0	107.282	-	-	Peak
2440	71.68	81	100	V	28.174	2.865	0	102.719	-	-	Ave
2440	73.79	109	100	H	28.174	2.865	0	104.829	-	-	Ave
4880	53.93	216	100	V	33.119	4.404	35.896	55.557	74	-18.443	Peak
4880	51.92	230	100	H	33.354	4.404	35.896	53.782	74	-20.218	Peak
4880	45.59	301	100	V	33.119	4.404	35.896	47.217	54	-6.783	Ave
4880	45.54	54	100	H	33.354	4.404	35.896	47.402	54	-6.598	Ave
7320	49.1	67	100	V	37.242	5.788	35.958	56.172	74	-17.828	Peak
7320	47.45	87	100	H	37.356	5.788	35.958	54.636	74	-19.364	Peak
7320	38.24	75	100	V	37.242	5.788	35.958	45.312	54	-8.688	Ave
7320	39.19	139	100	H	37.356	5.788	35.958	46.376	54	-7.624	Ave
9760	46.89	0	100	V	38.908	8.157	36.032	57.924	85.109	-27.185	Peak
9760	46.7	0	100	H	38.913	8.157	36.032	57.739	87.282	-29.543	Peak
9760	35.33	0	100	V	38.908	8.157	36.032	46.364	82.719	-36.355	Ave
9760	35.1	0	100	H	38.913	8.157	36.032	46.139	84.829	-38.690	Ave

Frequency (MHz)	S.A. Reading (dBμV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Reading (dBμV/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)	
High Channel 2480 MHz, measured at 3 meters											
2480	63.03	68	100	V	29.009	2.950	0	94.989	-	-	Peak
2480	63.61	83	100	H	28.999	2.950	0	95.559	-	-	Peak
2480	60.67	68	100	V	28.009	2.950	0	91.629	-	-	Ave
2480	61.28	83	100	H	28.999	2.950	0	93.229	-	-	Ave
2483.5	34.29	68	100	V	28.009	2.950	0	65.249	74	-8.751	Peak
2483.5	30.57	83	100	H	28.990	2.950	0	62.510	74	-11.490	Peak
2483.5	22.22	68	100	V	28.009	2.950	0	53.179	54	-0.821	Ave
2483.5	18.69	83	100	H	28.990	2.950	0	50.630	54	-3.370	Ave
4960	49.84	13	100	V	33.531	4.485	35.909	51.947	74	-22.053	Peak
4960	48.69	173	100	H	33.556	4.485	35.909	50.822	74	-23.178	Peak
4960	37.57	13	100	V	33.531	4.485	35.909	39.677	54	-14.323	Ave
4960	36.49	173	100	H	33.556	4.485	35.909	38.622	54	-15.378	Ave
7440	45.89	0	100	V	37.242	5.869	35.963	53.038	74	-20.962	Peak
7440	46.61	0	100	H	37.238	5.869	35.963	53.754	74	-20.246	Peak
7440	31.72	0	100	V	37.242	5.869	35.963	38.868	54	-15.132	Ave
7440	31.73	0	100	H	37.238	5.869	35.963	38.874	54	-15.126	Ave
9920	46.68	0	100	V	39.036	7.444	35.976	57.184	74.989	-17.805	Peak
9920	46.98	0	100	H	39.052	7.444	35.976	57.500	75.559	-18.059	Peak
9920	32.49	0	100	V	39.036	7.444	35.976	42.994	71.629	-28.635	Ave
9920	32.52	0	100	H	39.052	7.444	35.976	43.040	73.229	-30.189	Ave

Note: The low and middle channels were tested using power setting of 8 dBm while the high channel was tested using power setting of -1 dBm.

7 FCC§15.247(a)(2) & IC RSS-210 §A8.2 – 6 dB & 99% Emission Bandwidth

7.1 Applicable Standards

According to FCC §15.247(a)(2) and IC RSS-210 A8.2 (a), systems using digital modulation techniques may operate in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz

7.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v03r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8: DTS bandwidth

7.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Sunol Sciences	System Controller	SC99V	122303-1	N/R	N/R
Agilent	Analyzer, Spectrum	E4440A	US 422221851	2014-04-09	1year
A.R.A.	Horn Antenna	DRG-118A	1132	2014-01-30	1 year

Statement of Traceability: BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.

7.4 Test Environmental Conditions

Temperature:	17 °C
Relative Humidity:	46 %
ATM Pressure:	101.9 kPa


The testing was performed by Todd Moy on 2015-01-21 in 5 m chamber 3.

7.5 Test Results


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (MHz)	Results
Low	2405	1.577	2.392	> 0.5	Compliant
Middle	2440	1.612	2.451	> 0.5	Compliant
High	2480	1.621	2.442	> 0.5	Compliant

Please refer to the following plots for detailed test results


Low channel: 2405 MHz

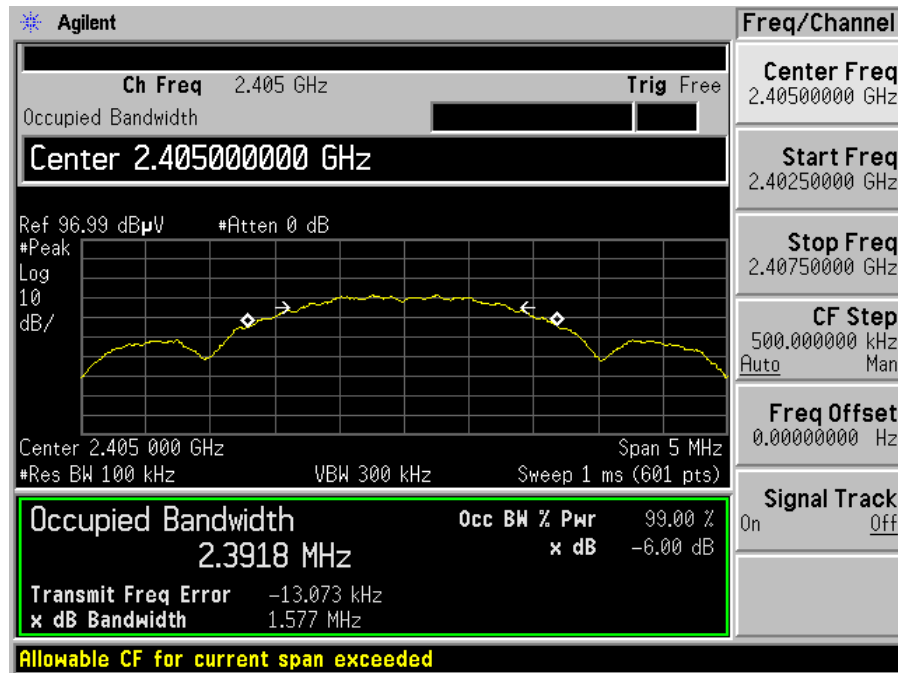

Middle channel: 2440 MHz

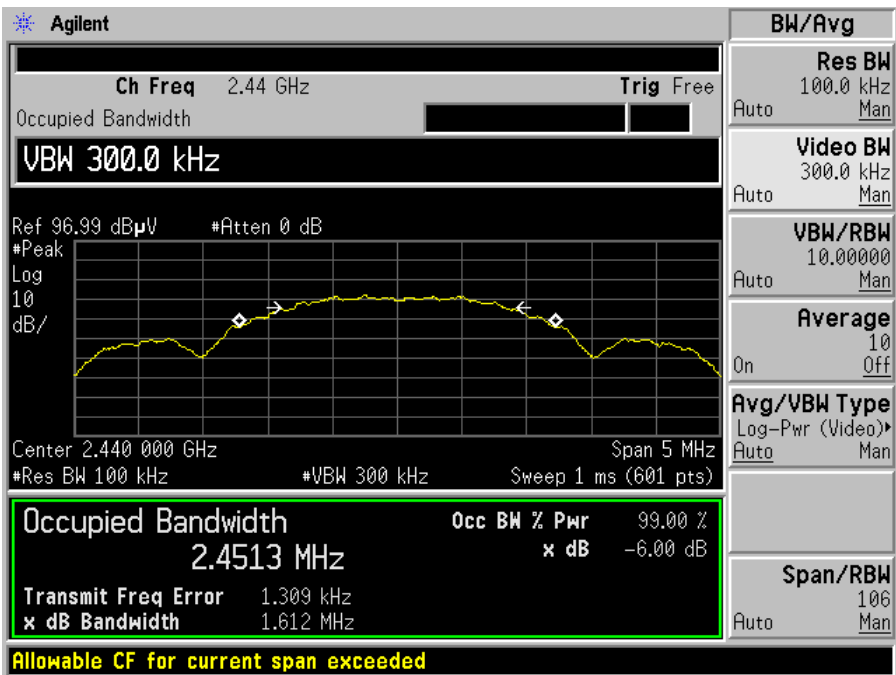

High Channel 2480 MHz

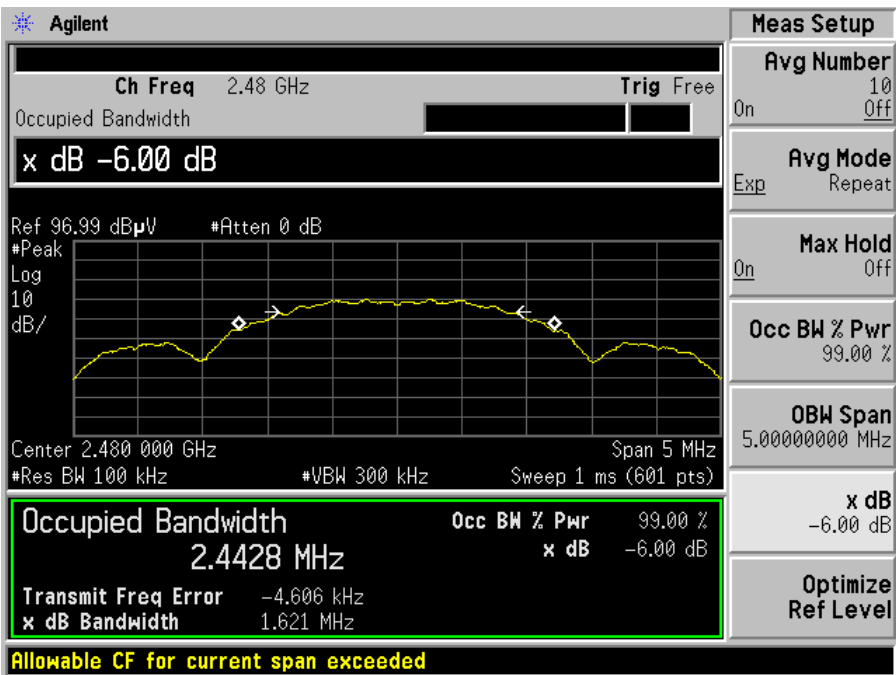

8 FCC §15.247(b) & IC RSS-210 §A8.4 (4) – Peak Output Power Measurement

8.1 Applicable Standards

According to FCC §15.247(b) and IC RSS-210 §A8.4 (4) for systems using digital modulation in the 902~928 MHz, 2400~2483.5 MHz, and 5725~5850 MHz bands: 1 Watt.

8.2 Measurement Procedure

The measurements are base on FCC KDB 558074 D01 DTS Meas Guidance v03r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 9: Fundamental emission output power

8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Sunol Sciences	System Controller	SC99V	122303-1	N/R	N/R
Agilent	Analyzer, Spectrum	E4440A	US 422221851	2014-04-09	1year
A.R.A.	Horn Antenna	DRG-118A	1132	2014-01-30	1 year

Statement of Traceability: BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.

8.4 Test Environmental Conditions

Temperature:	17° C
Relative Humidity:	46 %
ATM Pressure:	101.9 kPa

The testing was performed by Todd Moy on 2015-01-21 in 5 m chamber 3.

8.5 Test Results


Frequency (MHz)	S.A. Reading (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Cord. Reading (dBμV/m)	EIRP (dBm)	Antenna Gain (dBi)	Output Power (dBm)	Limit (dBm)	Power Setting
2405	80.29	28.197	-2.865	111.352	16.092	0.770	15.322	30	8
2440	77.5	28.197	-2.865	108.562	13.302	0.770	12.532	30	8
2480	61.98	28.999	-2.950	93.929	-1.331	0.770	0.616	30	-1

The field strength converts to conducted power should be as following:


$E \text{ (dB}\mu\text{V/m)} = \text{EIRP [dBm]} + 95.26$ for the distance at 3 meters.

Please refer to the following plots:


Low channel: 2405 MHz

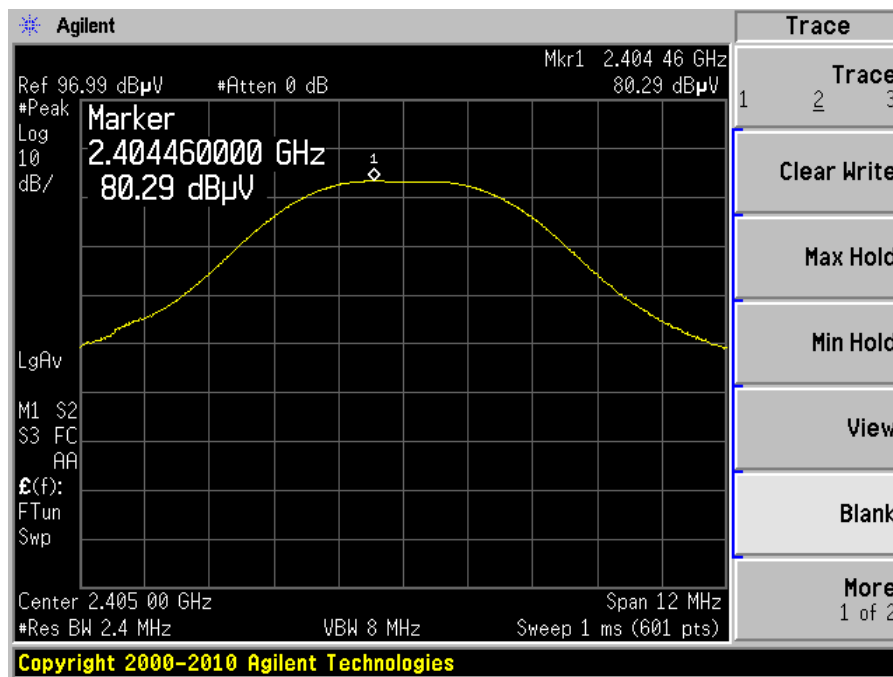

Middle channel: 2440 MHz

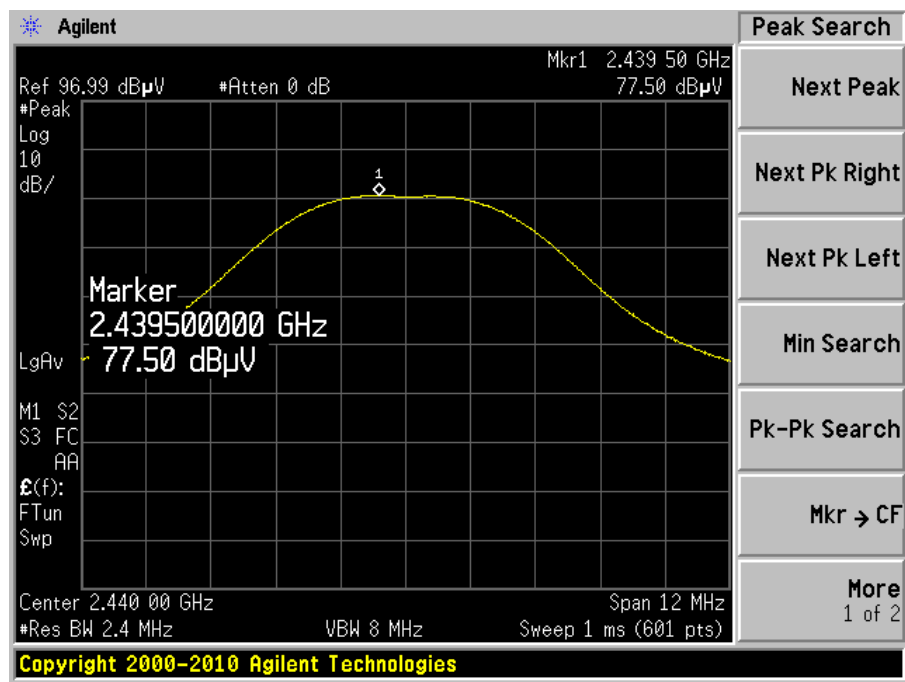

High Channel 2480 MHz

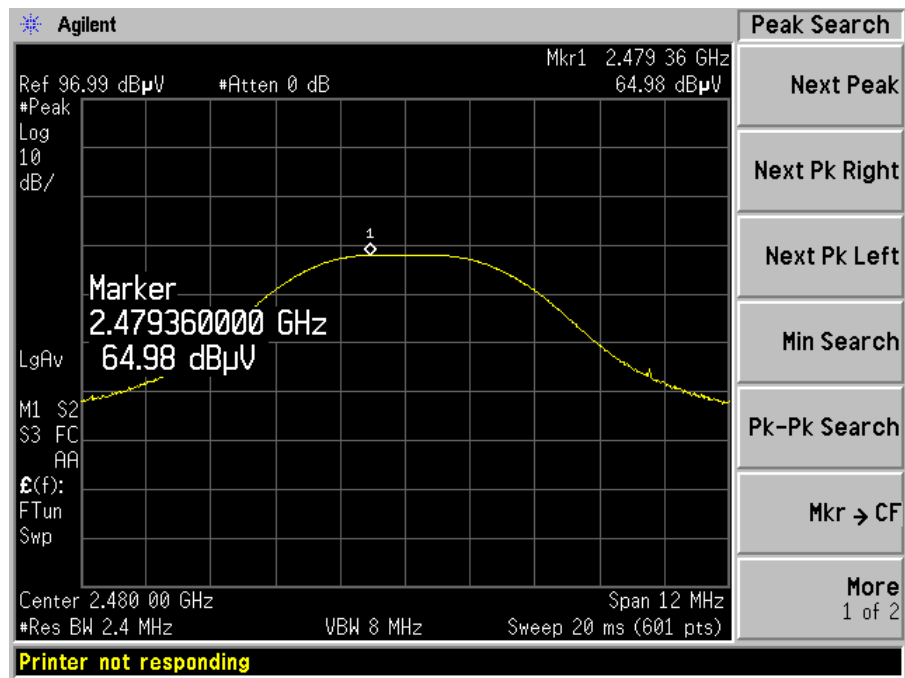

Note: These measurements were taken with the measuring antenna polarized horizontally.

9 FCC §15.247(d) & IC RSS-210 §A8.5 – 100 kHz Bandwidth of Band Edges

9.1 Applicable Standards

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to IC Rss-210 §A8.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required.

9.2 Measurement Procedure

The measurements are base on FCC KDB 558074 D01 DTS Meas Guidance v03r01: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 13: Band-edge measurements

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Sunol Sciences	System Controller	SC99V	122303-1	N/R	N/R
Agilent	Analyzer, Spectrum	E4440A	US 422221851	2014-04-09	1year
A.R.A.	Horn Antenna	DRG-118A	1132	2014-01-30	1 year

Statement of Traceability: BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.

9.4 Test Environmental Conditions


Temperature:	17° C
Relative Humidity:	46 %
ATM Pressure:	101.9 kPa

The testing was performed by Todd Moy on 2015-01-21 in 5 m chamber 3.


9.5 Test Results

Please refer to following plots of the band edge.

Low Channel 2405 MHz

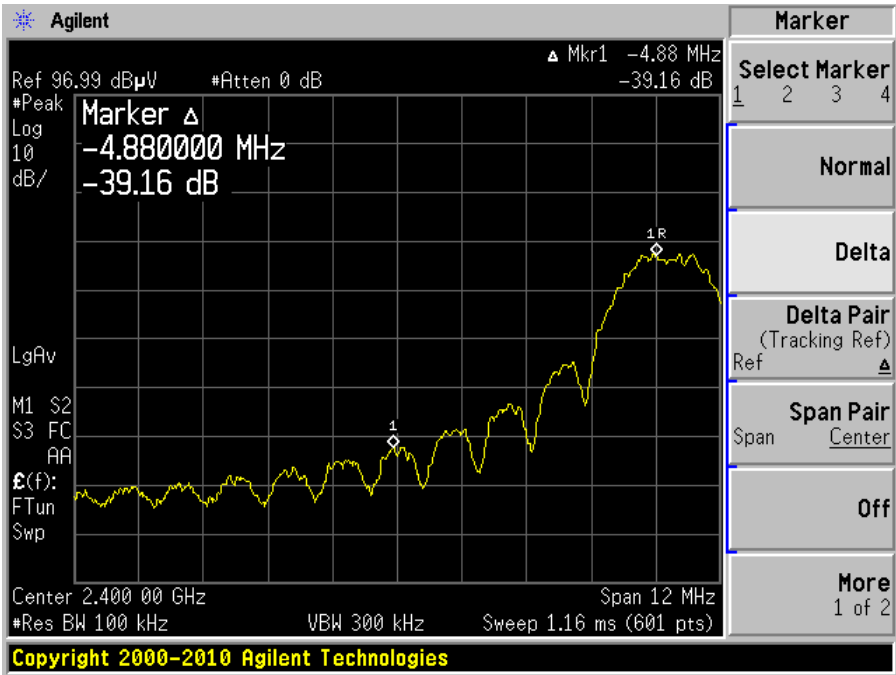

High Channel 2480 MHz

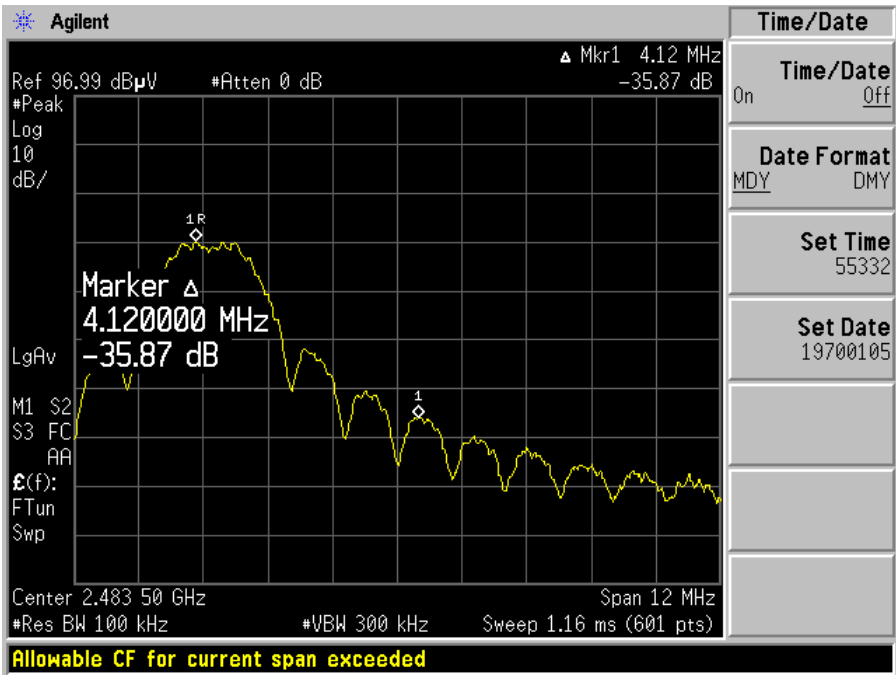

10 FCC §15.247(e) & IC RSS-210 §A8.2 (b) – Power Spectral Density

10.1 Applicable Standards

According to FCC §15.247(e) and RSS-210 §A8.2 (b), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

10.2 Measurement Procedure

The measurements are base on FCC KDB 558074 D01 DTS Meas Guidance v03r01: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10: Maximum power spectral density level in the fundamental emission

10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Sunol Sciences	System Controller	SC99V	122303-1	N/R	N/R
Agilent	Analyzer, Spectrum	E4440A	US 422221851	2014-04-09	1year
A.R.A.	Horn Antenna	DRG-118A	1132	2014-01-30	1 year

Statement of Traceability: *BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.*

10.4 Test Environmental Conditions

Temperature:	17 °C
Relative Humidity:	46 %
ATM Pressure:	101.9 kPa

The testing was performed by Todd Moy on 2015-01-21 in 5 m chamber 3.

10.5 Test Results


Frequency (MHz)	S.A. Reading (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Cord. Reading (dBμV/m)	EIRP (dBm)	Antenna Gain (dBi)	Output Power (dBm)	Limit
2405	64.12	28.197	-2.865	84.132	-11.128	0.770	-0.848	8
2440	61.36	28.197	-2.865	82.952	-12.308	0.770	-3.608	8
2480	49.97	28.999	-2.950	81.919	-13.341	0.770	-14.111	8

The field strength converts to conducted power should be as following:


$E \text{ (dB}\mu\text{V/m)} = \text{EIRP [dBm]} + 95.26$ for the distance at 3 meters.

Please refer to the following plots for detailed test results:


Low channel: 2405 MHz

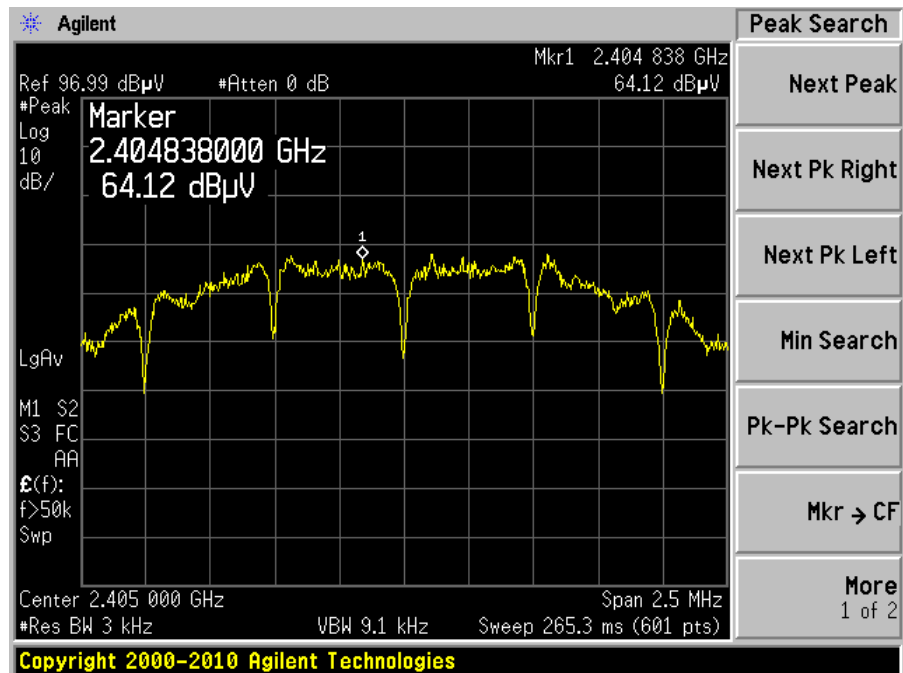

Middle channel: 2440 MHz

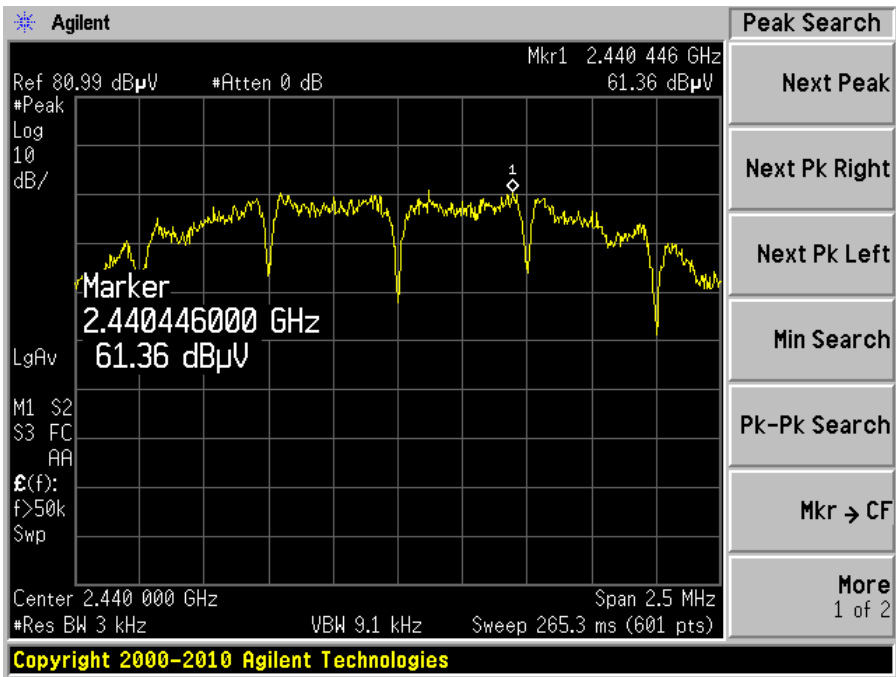

High Channel 2480 MHz

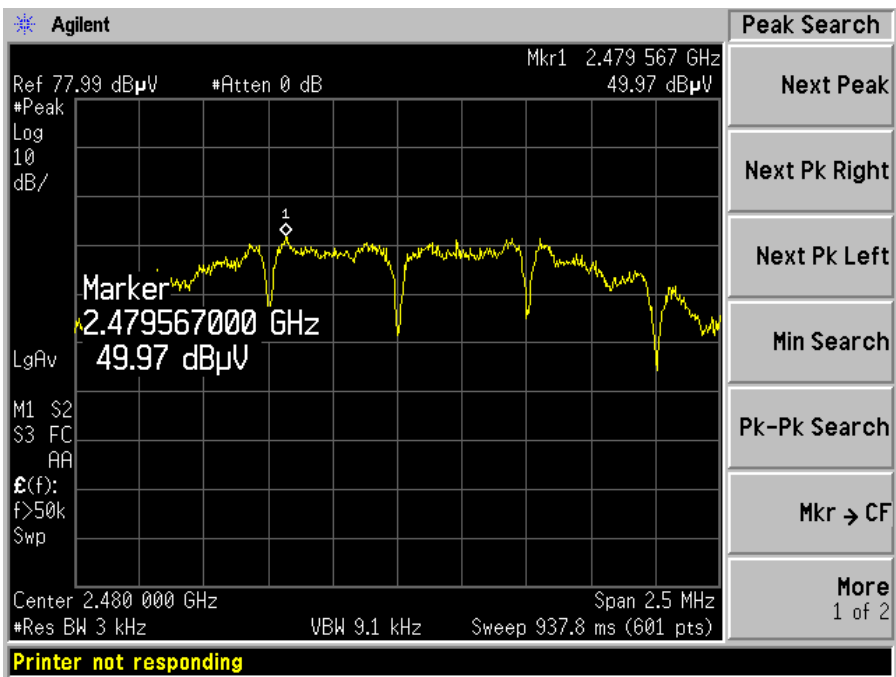

Note: These measurements were taken with the measuring antenna polarized horizontally.