

FCC PART 15.247


TEST REPORT

For

RTX Hong Kong Ltd.

8/F Corporation Square, 8 Lam Lok Street, Kowloon Bay, Hong Kong

FCC ID: T7HCT8200

Report Type: Original Report	Product Type: RTX8200 Location Gateway (BTLE/DECT)
Report Number: RSZ181211020-00B	
Report Date: 2019-05-31	
Rocky Kang 	
Reviewed By: RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
DUTY CYCLE	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	9
TEST EQUIPMENT LIST	10
FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
RESULT	12
FCC §15.203 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
CORRECTED FACTOR & MARGIN CALCULATION	15
TEST RESULTS SUMMARY	15
TEST DATA	15
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	21
TEST PROCEDURE	21
CORRECTED AMPLITUDE & MARGIN CALCULATION	21
TEST RESULTS SUMMARY	21
TEST DATA	22
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST DATA	44

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST DATA	47
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST DATA	48
FCC §15.247(e) - POWER SPECTRAL DENSITY	50
APPLICABLE STANDARD	50
TEST PROCEDURE	50
TEST DATA	50

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	RTX8200 Location Gateway (BTLE/DECT)
Tested Model	RTX8200 DECT + BTLE Location Gateway (WH)
Multiple Models	RTX8200 BTLE Location Gateway (WH) RTX8200 DECT + BTLE Location Gateway (BK) RTX8200 BTLE Location Gateway (BK) RTX8200 DECT + BTLE Location Gateway EXT (WH) RTX8200 BTLE Location Gateway EXT (WH) RTX8200 DECT + BTLE Location Gateway EXT (BK) RTX8200 BTLE Location Gateway EXT (BK)
Frequency Range	2402~2480MHz
Max Peak Output Power	Bluetooth LE: -6.31dBm
Modulation Technique	GFSK
Antenna Specification	Internal Bluetooth Antenna: -5 dBi External Bluetooth Antenna: 1.6 dBi
Voltage Range	DC 5V from adapter DC 48V from POE DC 12V DC 3V from alkaline battery
Date of Test	2018/12/12~2019/04/09
Sample serial number	181211020-1 & 181211020-2
Received date	2018/12/11
Sample/EUT Status	Good condition

Notes: This series products model: RTX8200 BTLE Location Gateway (WH), RTX8200 DECT + BTLE Location Gateway (BK), RTX8200 BTLE Location Gateway (BK), RTX8200 DECT + BTLE Location Gateway EXT (WH), RTX8200 BTLE Location Gateway EXT (WH), RTX8200 DECT + BTLE Location Gateway EXT (BK), RTX8200 BTLE Location Gateway EXT (BK) and RTX8200 DECT + BTLE Location Gateway (WH) are electrically identical, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

Objective

This report is prepared on behalf of *RTX Hong Kong Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Part 15D PUB submission with FCC ID: T7HCT8200.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.5dB
RF conducted test with spectrum		±1.5dB
AC Power Lines Conducted Emissions		±1.95dB
Radiated Emissions	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±3 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480


EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

CMD command was use for testing, the power level is default.

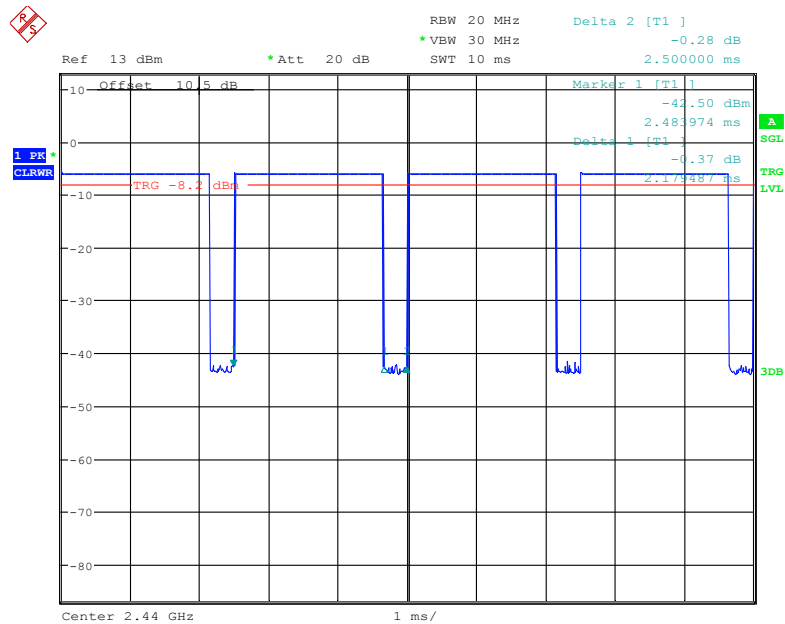Duty cycle**BLE Mode**

Date: 12.DEC.2018 14:11:07

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting	10log(1/ Duty Cycle)
BLE	87	2179	0.46	1kHz	0.6

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
NETGEAR	POE	GS108PEv3	3UU5685700E47
Ten Pao International LTD	Adapter	S008ACM0500060	N/A


External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-shielding Detachable RJ45 Cable	2.0	EUT	POE
Un-shielding Un-detachable AC Cable	1.0	POE	LISN
Un-shielding Detachable AC Cable	1.2	LISN	Socket
Un-shielding Detachable USB Cable	1.5	EUT	Adapter


Block Diagram of Test Setup

For conducted emissions:

Power by POE:

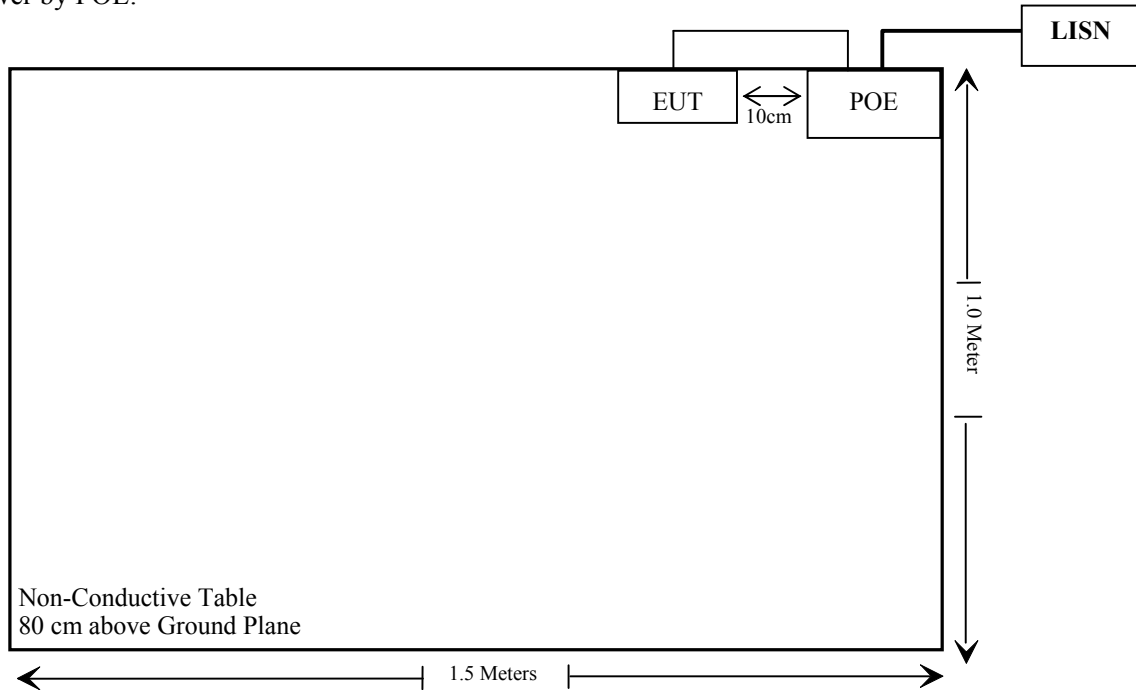

Powered by adapter:

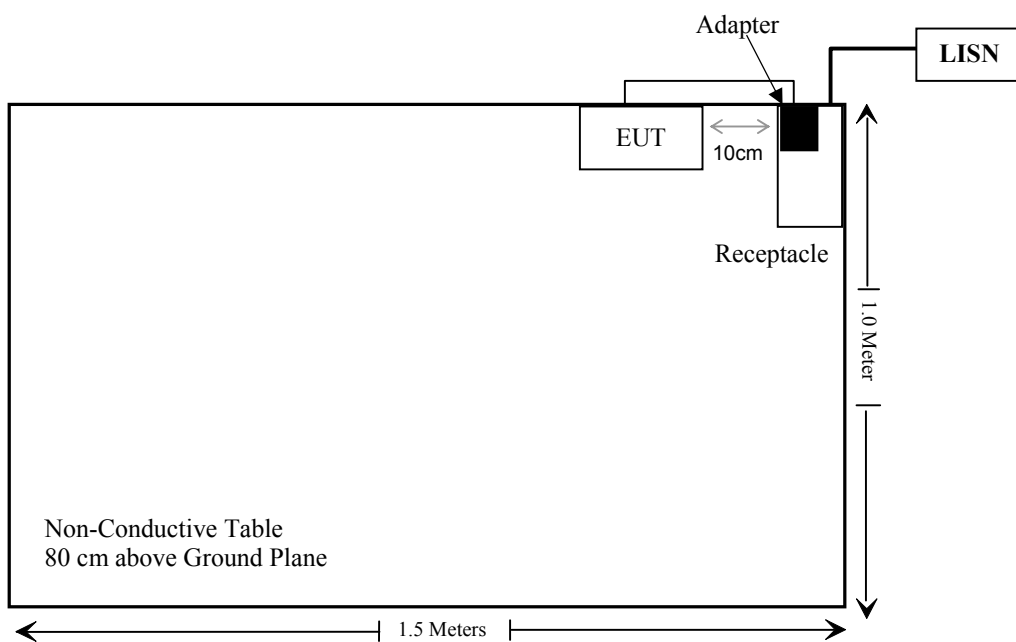

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i) & §2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

Note: This EUT has four BT antennas, and only one can transmit, those antennas only use different positive phase shift to obtain the best signal.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2018-07-11	2019-07-11
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2017-12-21	2018-12-21
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2018-11-12	2019-11-12
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Unknown	Conducted Emission Cable	78652	UF A210B-1-0720-504504	2018-11-12	2019-11-12
Radiated Emission Test					
A.H.System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
Rohde & Schwarz	Signal Analyzer	FSV40	101473	2019-01-09	2020-01-08
COM-POWER	Pre-amplifier	PA-122	181919	2018-11-12	2019-11-12
Sonoma instrument	Amplifier	310N	186238	2018-11-12	2019-11-12
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2018-07-11	2019-07-11
Ducommun technologies	RF Cable	UFA147A-2362-100100	MFR64639231029-003	2018-07-11	2021-07-10
Ducommun technologies	RF Cable	104PEA	218124002	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	RG-214	1	2018-11-19	2019-05-21
Ducommun technologies	RF Cable	RG-214	2	2018-11-12	2019-11-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Heatsink Required	Amplifier	QLW-18405536-J0	15964001002	2018-11-12	2019-11-12
Sinoscite	Band Reject Filter	BSF2402-2480MN-0898-001	99632	2018-11-12	2019-11-12
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Agilent	USB wideband power meter	U2021XA	MY54250003	2018-06-23	2019-06-23
WEINSCHTEL	10dB Attenuator	5324	AU 3842	Each Time	
Rohde & Schwarz	Spectrum Analyzer	FSU26	200120	2017-12-24	2018-12-24
Ducommun technologies	RF Cable	RG-214	3	Each Time	

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Tune-up conducted power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	1.6	1.45	-6	0.25	20	0.0001	1.0
1921.536 - 1928.448	2.0	1.58	19	79.43	20	0.0250	1.0

Consider the DECT and BLE transmitting simultaneously:

$$\text{The ratio} = \text{MPE}/\text{Limit}_{\text{DECT}} + \text{MPE}/\text{Limit}_{\text{BLE}} = 0.0001/1.0 + 0.025/1 = 0.0251 < 1.0$$

Result: Compliance. To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has antenna arrangement which are permanently attached and the antenna gain is -5 dBi for each Internal Bluetooth Antenna and 1.6 dBi for each External Bluetooth Antenna, fulfill the requirement of this section. Please refer to the EUT photos.

The external antenna version needs professional installation that is stated in user manual.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

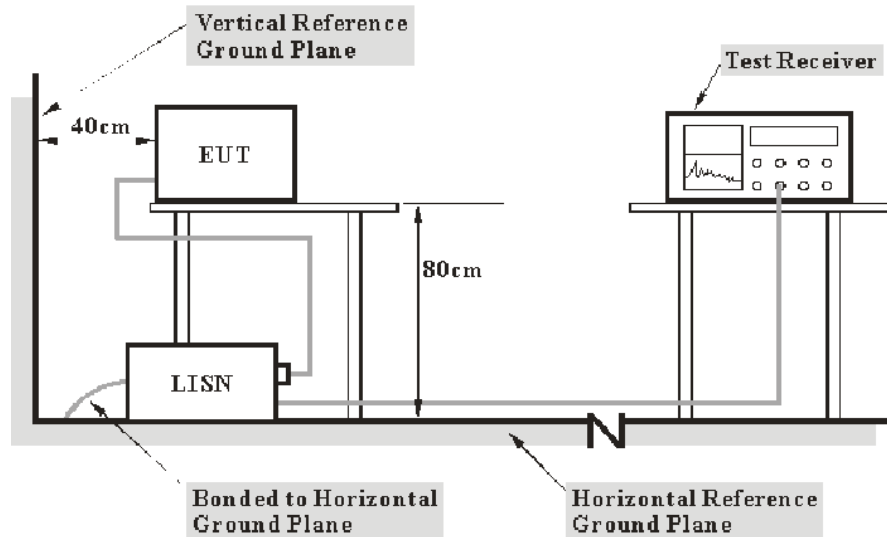

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by Haiguo Li on 2018-12-20.

EUT operation mode: Transmitting


BLE Mode: (worst case for high channel)

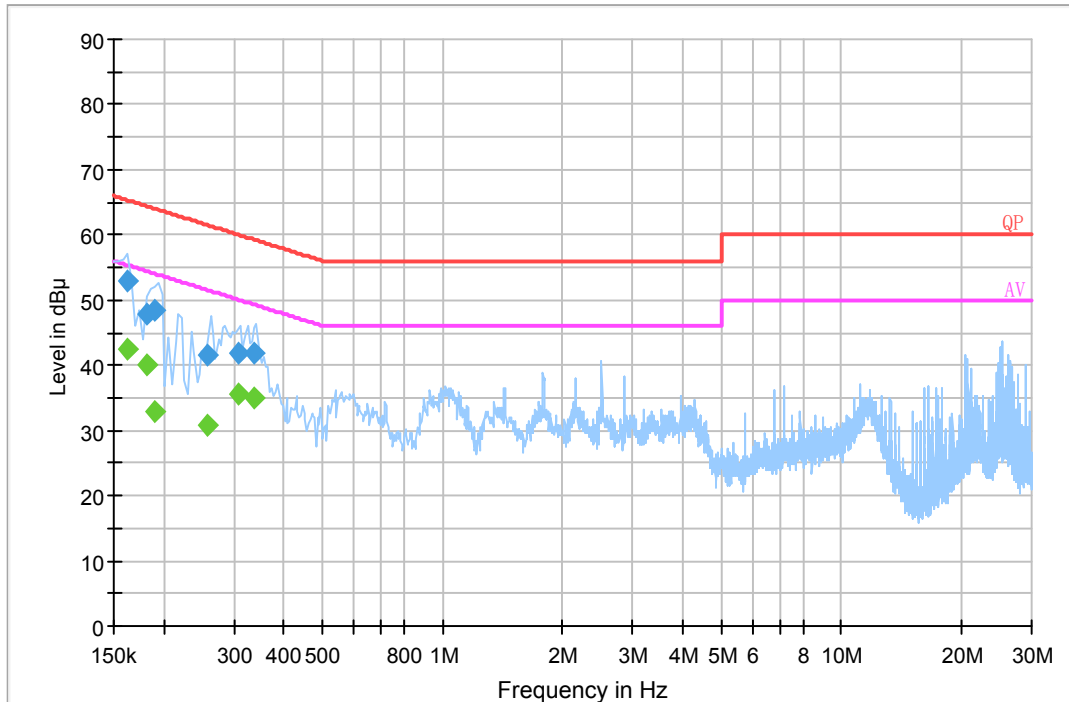Model RTX8200 DECT + BTLE Location Gateway (WH):**Power by POE:****AC 120V/60 Hz, Line**


Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.161500	52.9	19.8	65.4	12.5	QP
0.181500	48.0	19.8	64.4	16.4	QP
0.189500	48.6	19.8	64.1	15.5	QP
0.257500	41.6	19.7	61.5	19.9	QP
0.309350	41.8	19.8	60.0	18.2	QP
0.336870	41.7	19.7	59.3	17.6	QP
0.161500	42.6	19.8	55.4	12.8	Ave.
0.181500	39.9	19.8	54.4	14.5	Ave.
0.189500	32.8	19.8	54.1	21.3	Ave.
0.257500	30.7	19.7	51.5	20.8	Ave.
0.309350	35.5	19.8	50.0	14.5	Ave.
0.336870	35.0	19.7	49.3	14.3	Ave.

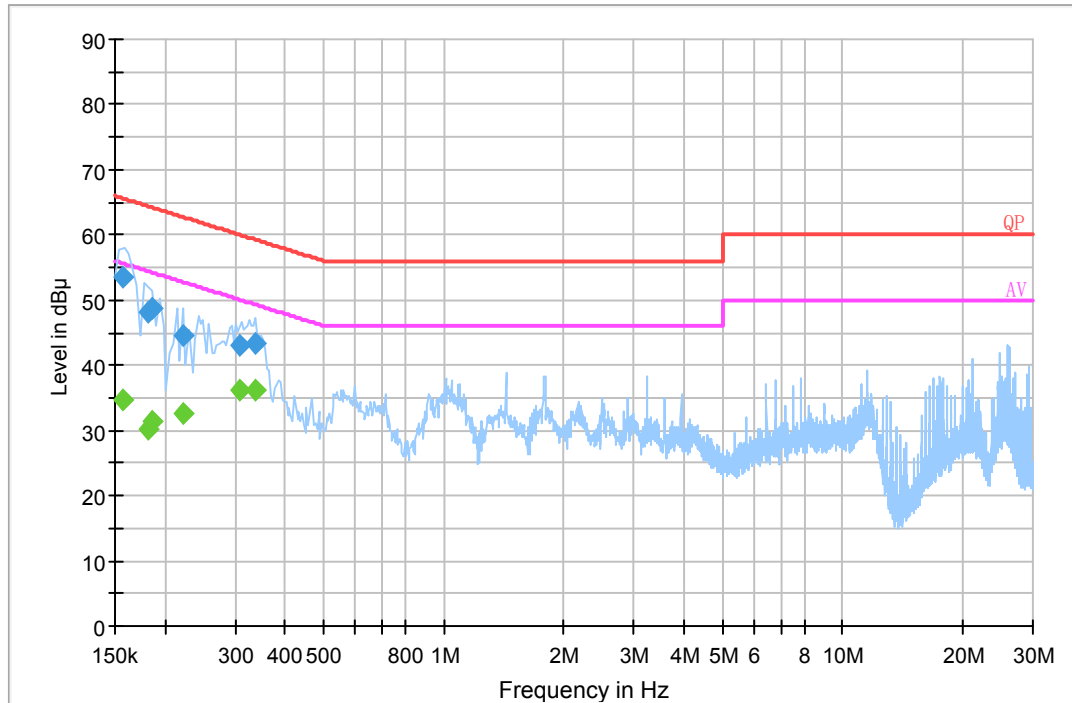AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.157500	53.6	19.7	65.6	12	QP
0.181500	48.2	19.7	64.4	16.2	QP
0.185500	48.7	19.7	64.2	15.5	QP
0.221500	44.6	19.7	62.8	18.2	QP
0.309350	43.0	19.8	60.0	17	QP
0.336930	43.2	19.7	59.3	16.1	QP
0.157500	34.8	19.7	55.6	20.8	Ave.
0.181500	30.1	19.7	54.4	24.3	Ave.
0.185500	31.3	19.7	54.2	22.9	Ave.
0.221500	32.7	19.7	52.8	20.1	Ave.
0.309350	36.3	19.8	50.0	13.7	Ave.
0.336930	36.2	19.7	49.3	13.1	Ave.

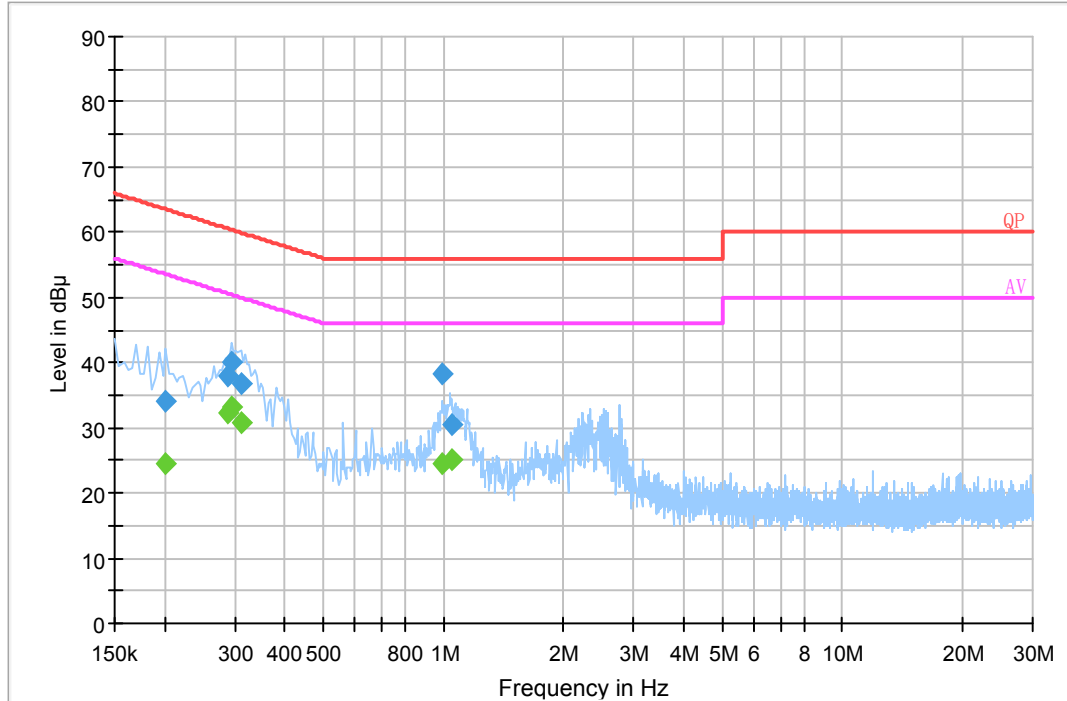Power by adapter:**AC 120V/60 Hz, Line**

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.201500	33.9	19.7	63.5	29.6	QP
0.286500	38.0	19.8	60.6	22.7	QP
0.293500	40.1	19.8	60.4	20.3	QP
0.313230	36.8	19.8	59.9	23.1	QP
0.991090	38.4	19.8	56.0	17.6	QP
1.050430	30.6	19.8	56.0	25.4	QP
0.201500	24.6	19.7	53.5	29.0	Ave.
0.286500	32.4	19.8	50.6	18.2	Ave.
0.293500	33.2	19.8	50.4	17.2	Ave.
0.313230	30.7	19.8	49.9	19.2	Ave.
0.991090	24.4	19.8	46.0	21.6	Ave.
1.050430	25.0	19.8	46.0	21.0	Ave.

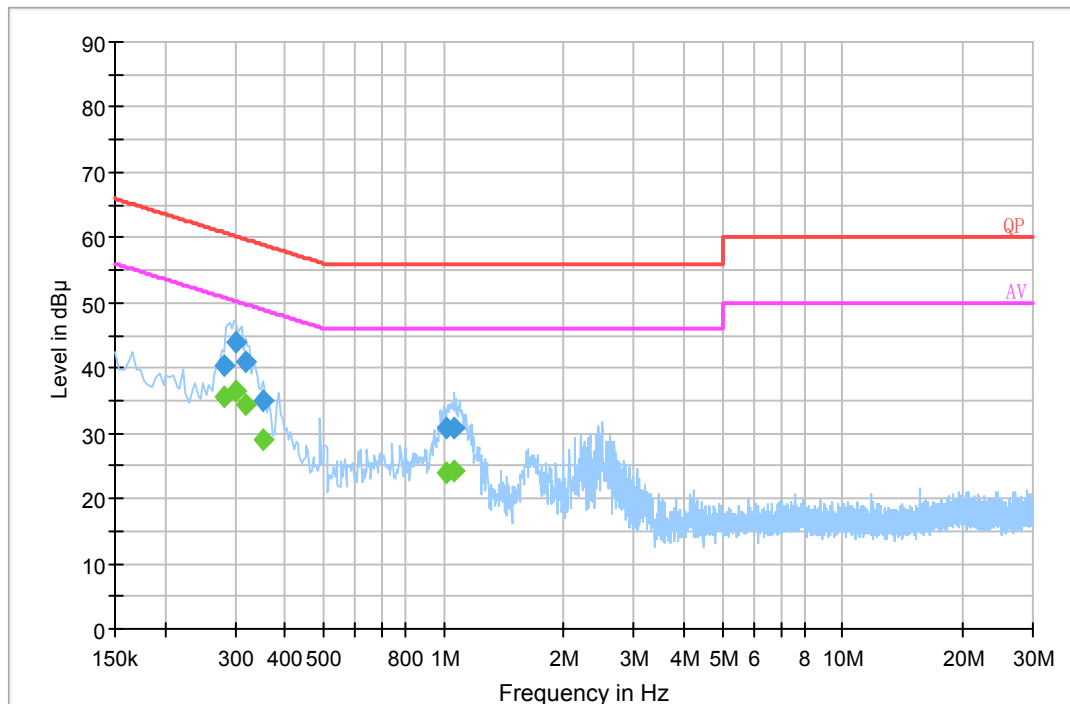AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.281500	40.5	19.7	60.8	20.3	QP
0.302500	43.9	19.8	60.2	16.3	QP
0.317230	40.9	19.8	59.8	18.8	QP
0.352690	35.0	19.7	58.9	23.9	QP
1.017030	30.8	19.8	56.0	25.2	QP
1.062070	30.8	19.8	56.0	25.2	QP
0.281500	35.5	19.7	50.8	15.3	Ave.
0.302500	36.4	19.8	50.2	13.8	Ave.
0.317230	34.4	19.8	49.8	15.4	Ave.
0.352690	29.1	19.7	48.9	19.8	Ave.
1.017030	23.8	19.8	46.0	22.2	Ave.
1.062070	24.2	19.8	46.0	21.8	Ave.

Note:


- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

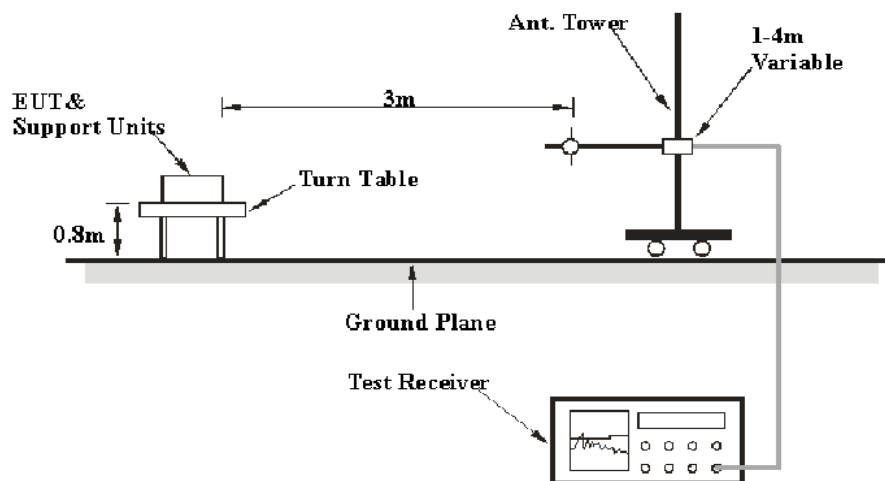

Above 1GHz:

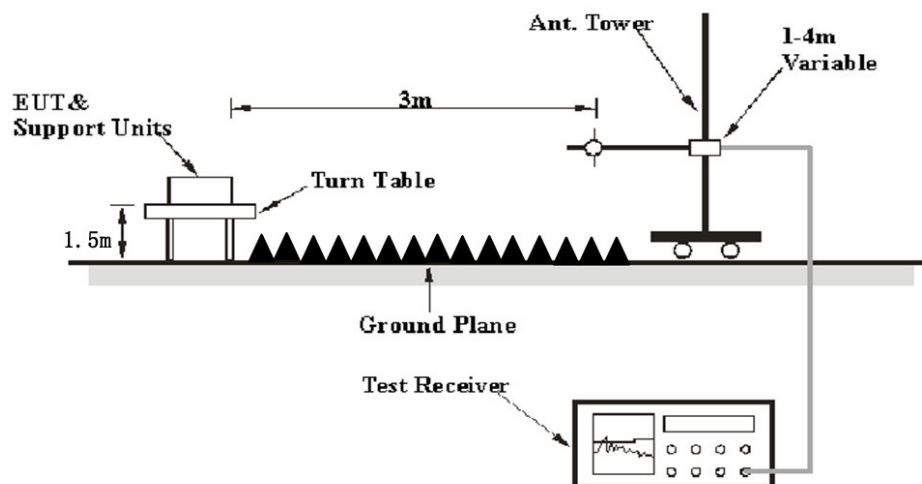

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.


Test Data**Environmental Conditions**

Temperature:	24~25 °C
Relative Humidity:	51~52 %
ATM Pressure:	101.0 kPa

The testing was performed by Andy Yu and Leo Huang on 2019-04-01 and 2019-04-09.

EUT operation mode: Transmitting (Bluetooth Antenna 1, Worst case for powering by POE):

Model RTX8200 DECT + BTLE Location Gateway (WH) (Note: There are four internal bluetooth antennas pointed in internal photos for this model, and the applicant declared that antenna 1 & 4 are identical while antenna 2 & 3 are identical as well):

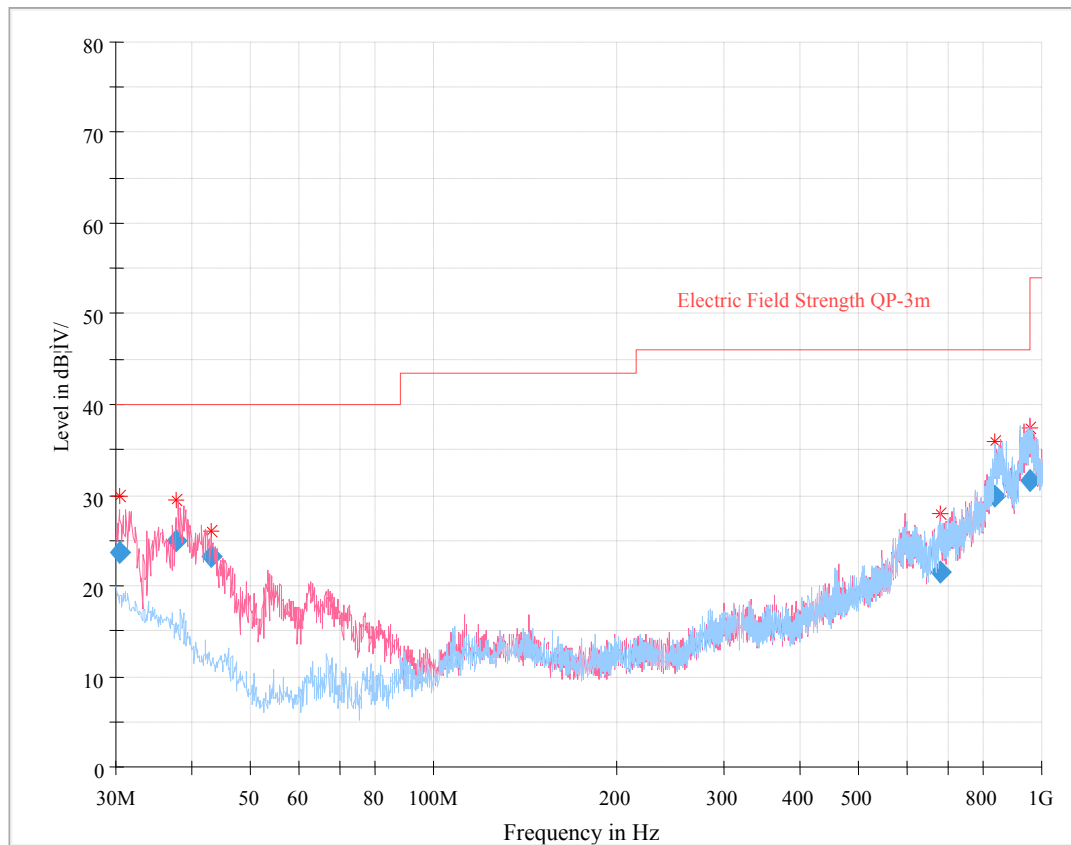
30 MHz~1 GHz

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
30.425505	23.75	100.0	V	0.0	-7.9	40.00	16.25
37.647500	24.84	137.0	V	322.0	-12.3	40.00	15.16
43.073375	23.31	109.0	V	0.0	-15.9	40.00	16.69
680.620250	21.53	100.0	V	191.0	-2.1	46.00	24.47
838.434500	29.84	278.0	H	74.0	5.8	46.00	16.16
955.070375	31.57	205.0	V	356.0	9.6	46.00	14.43


1 GHz – 25 GHz:**Internal Bluetooth Antenna 1:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
2389.63	28.22	PK	149	1.7	H	33.00	61.22	74	12.78
2389.63	14.26	Ave.	149	1.7	H	33.00	47.26	54	6.74
2485.32	27.07	PK	189	1.5	H	33.20	60.27	74	13.73
2485.32	13.53	Ave.	189	1.5	H	33.20	46.73	54	7.27
4804.00	43.62	PK	279	1.1	H	7.88	51.50	74	22.50
4804.00	31.31	Ave.	279	1.1	H	7.88	39.19	54	14.81
Middle Channel (2440 MHz)									
4880.00	43.82	PK	98	2.1	H	9.21	53.03	74	20.97
4880.00	30.96	Ave.	98	2.1	H	9.21	40.17	54	13.83
High Channel (2480 MHz)									
2359.38	28.34	PK	225	1.4	H	32.90	61.24	74	12.76
2359.38	14.16	Ave.	225	1.4	H	32.90	47.06	54	6.94
2483.50	28.70	PK	33	1.5	H	33.20	61.90	74	12.10
2483.50	13.51	Ave.	33	1.5	H	33.20	46.71	54	7.29
4960.00	43.60	PK	93	2.5	H	9.07	52.67	74	21.33
4960.00	30.57	Ave.	93	2.5	H	9.07	39.64	54	14.36

Pre-scan with middle channel Horizontal

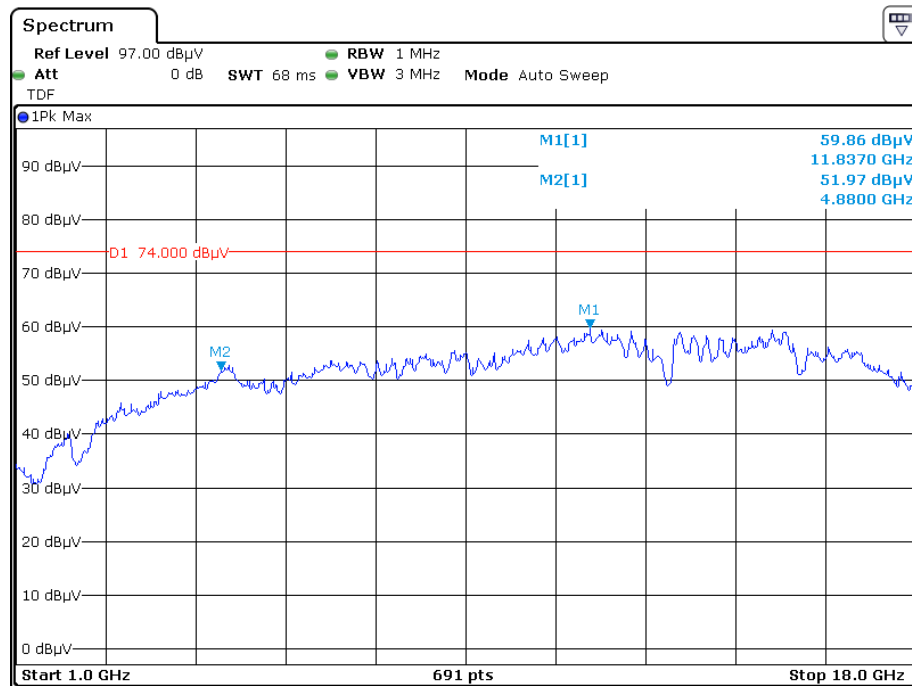


Date: 9.APR.2019 17:28:42

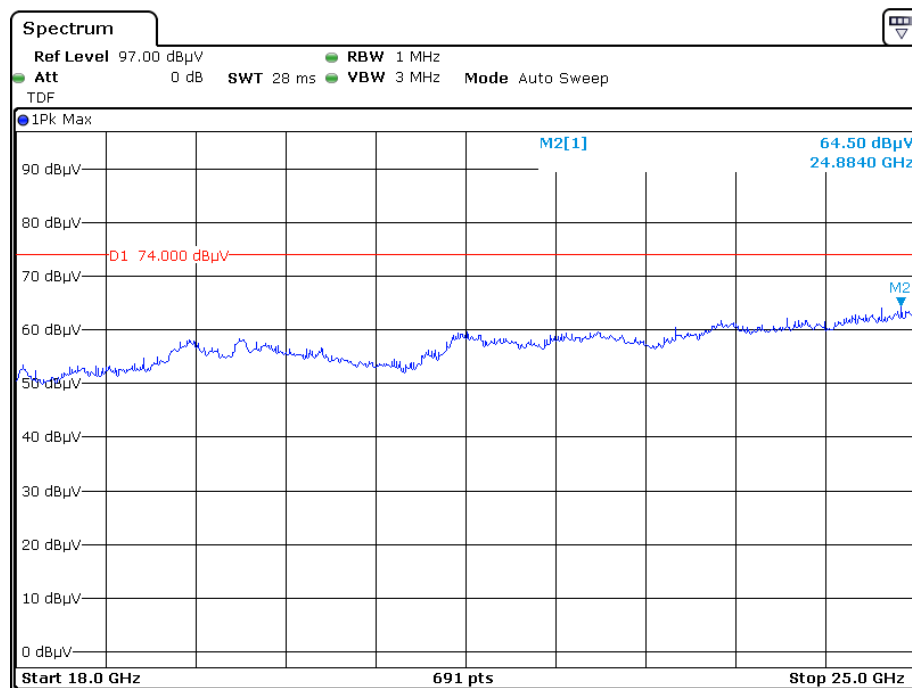


Date: 1.APR.2019 06:12:49

Vertical

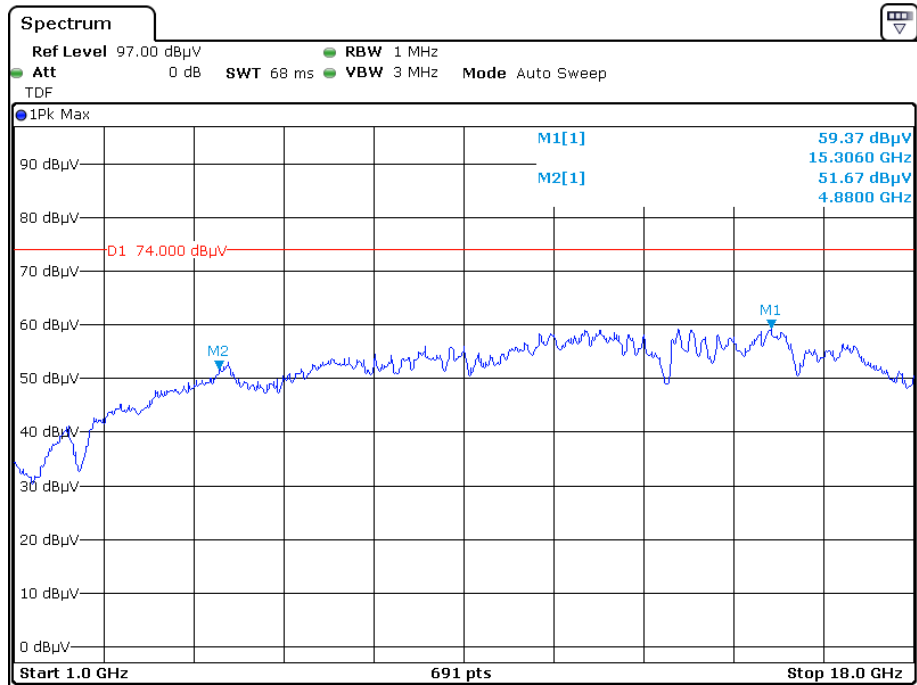


Date: 1.APR.2019 05:25:38

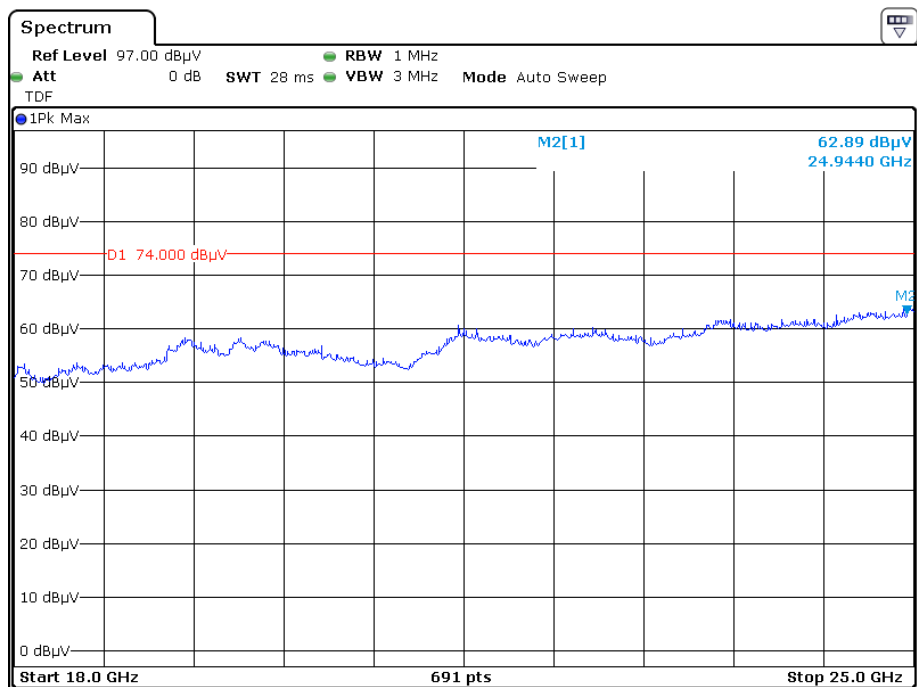


Date: 1.APR.2019 06:19:12

Pre-scan for Average Horizontal

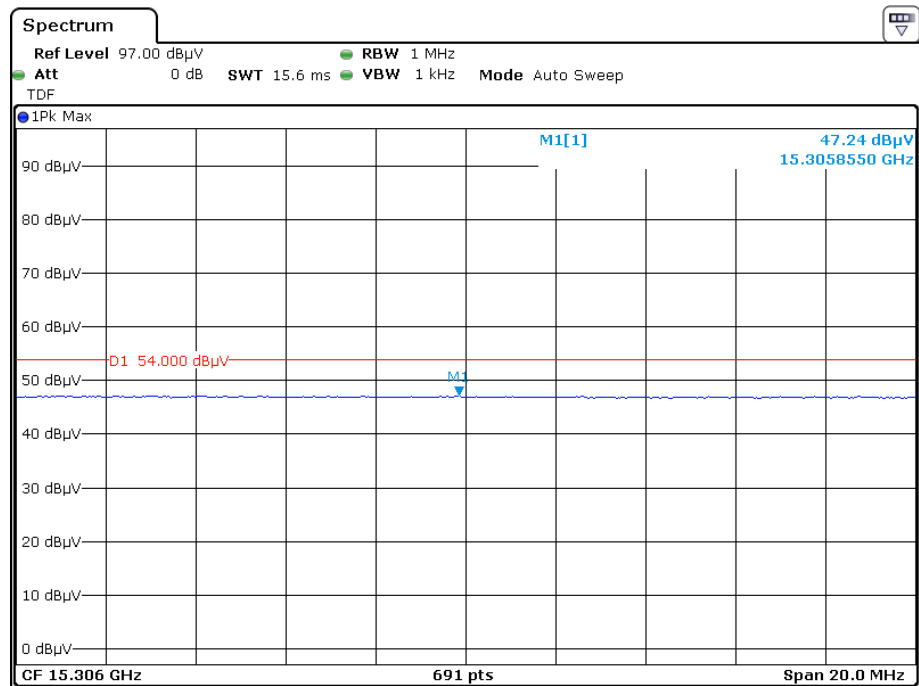


Date: 1.APR.2019 05:28:53

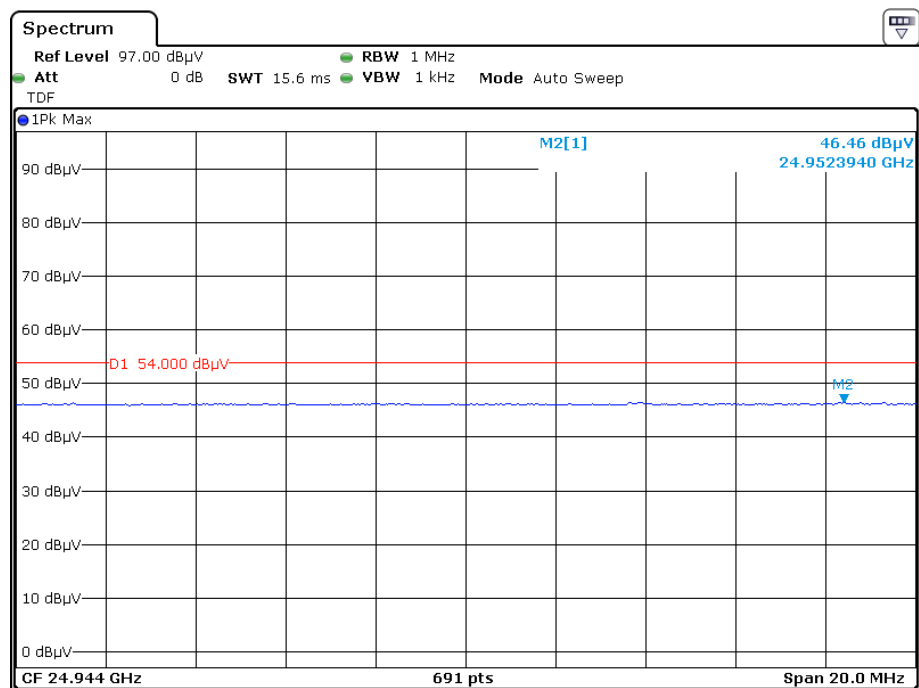


Date: 1.APR.2019 06:15:32

Vertical

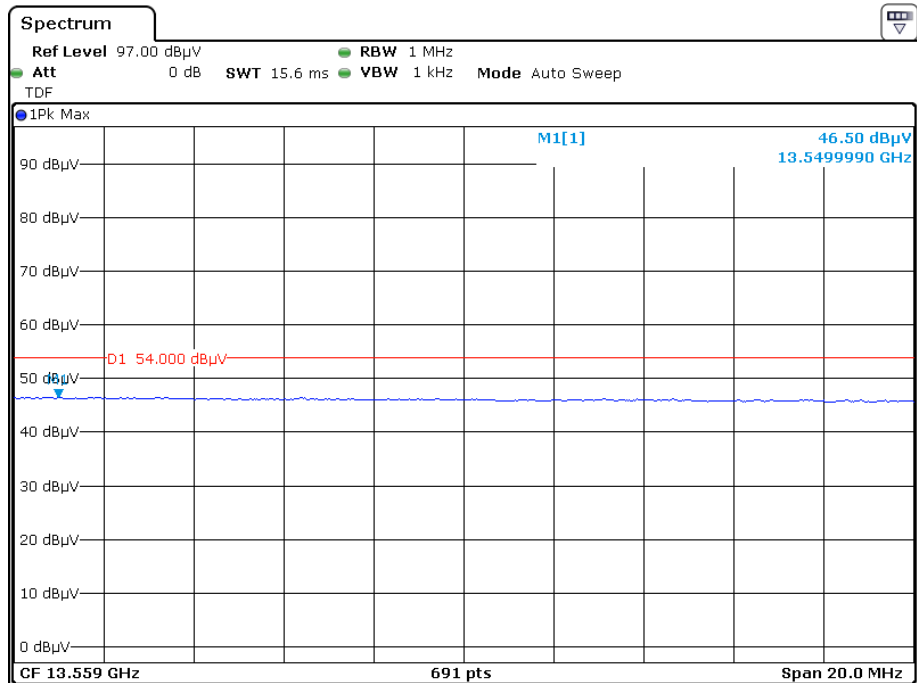

Date: 1.APR.2019 05:36:10

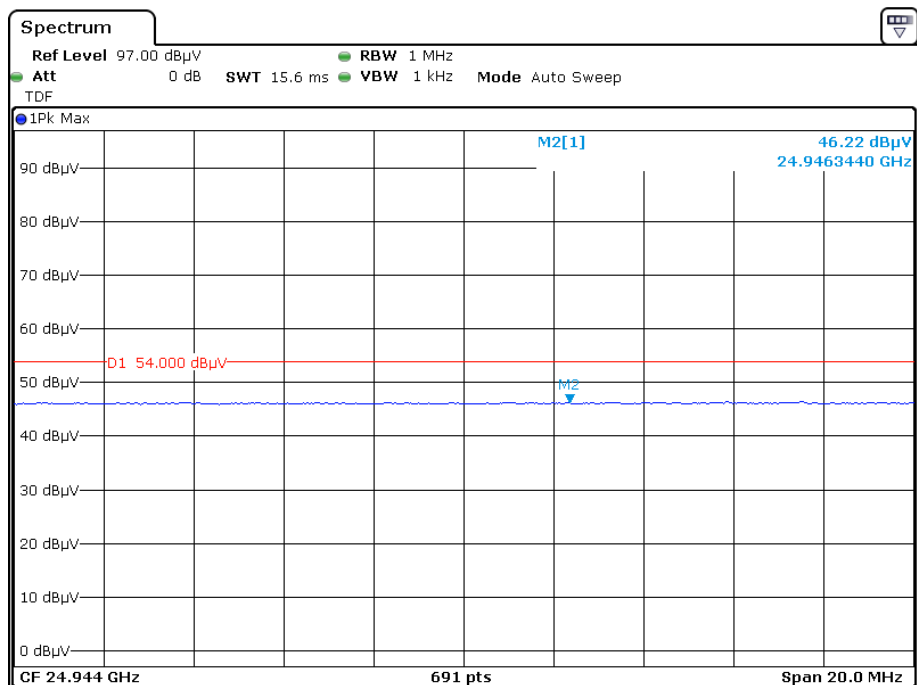

Date: 1.APR.2019 06:22:34

Internal Bluetooth Antenna 2:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
2367.56	28.12	PK	35	1.4	H	33.00	61.12	74	12.88
2367.56	14.32	Ave.	35	1.4	H	33.00	47.32	54	6.68
2491.60	27.02	PK	85	2.0	H	33.20	60.22	74	13.78
2491.60	13.74	Ave.	85	2.0	H	33.20	46.94	54	7.06
4804.00	44.85	PK	285	1.2	H	7.88	52.73	74	21.27
4804.00	32.98	Ave.	285	1.2	H	7.88	40.86	54	13.14
Middle Channel (2440 MHz)									
4880.00	43.87	PK	133	1.7	H	9.21	53.08	74	20.92
4880.00	30.49	Ave.	133	1.7	H	9.21	39.70	54	14.30
High Channel (2480 MHz)									
2387.27	27.98	PK	224	1.8	H	33.00	60.98	74	13.02
2387.27	14.26	Ave.	224	1.8	H	33.00	47.26	54	6.74
2497.62	27.35	PK	152	2.0	H	33.20	60.55	74	13.45
2497.62	13.59	Ave.	152	2.0	H	33.20	46.79	54	7.21
4960.00	44.69	PK	269	1.6	H	9.07	53.76	74	20.24
4960.00	32.65	Ave.	269	1.6	H	9.07	41.72	54	12.28

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.

Pre-scan with high channel Horizontal

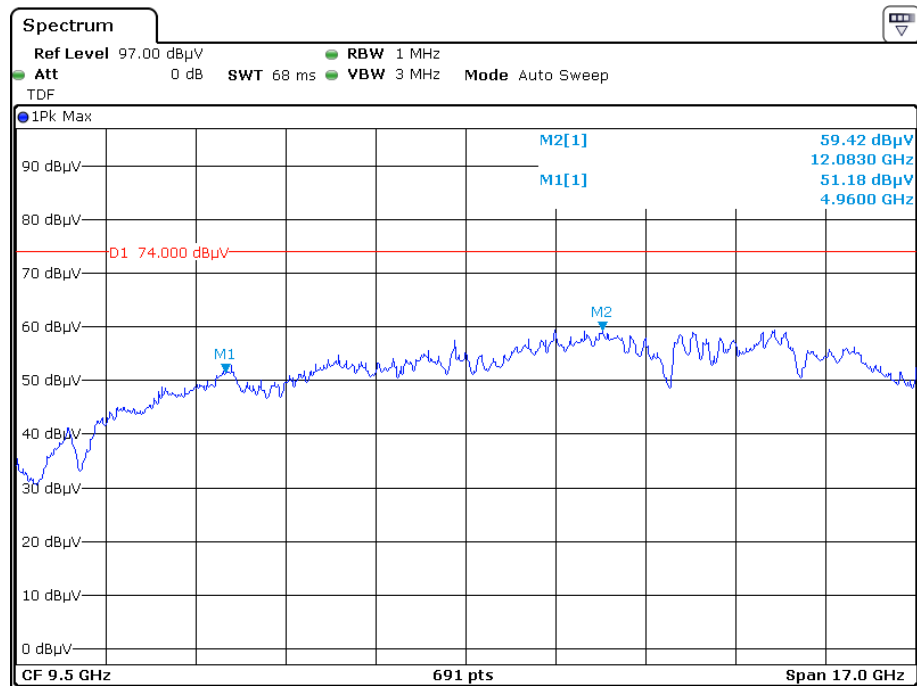


Date: 1.APR.2019 09:59:50

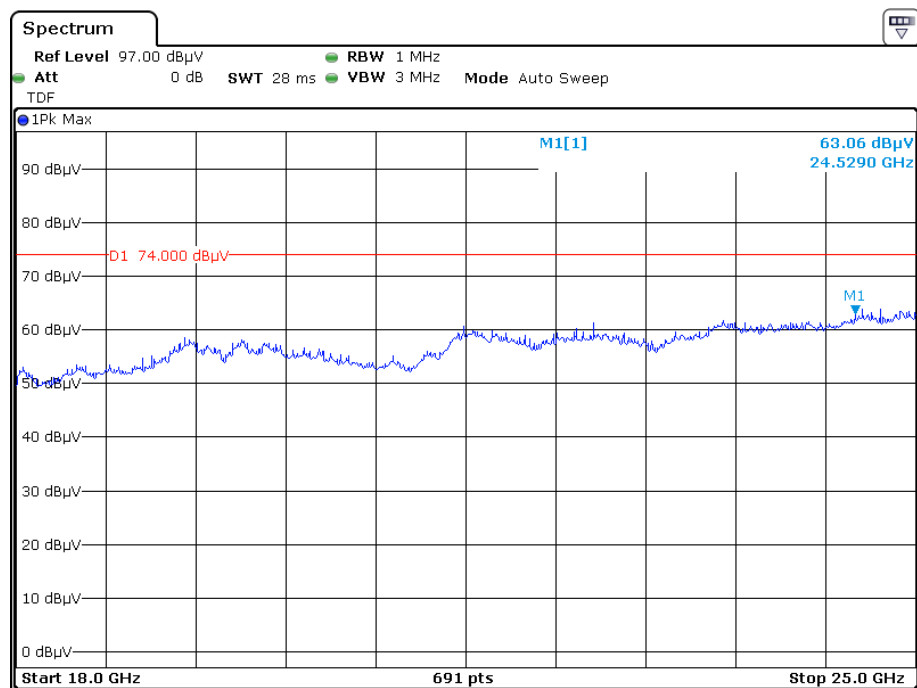


Date: 1.APR.2019 10:40:14

Vertical

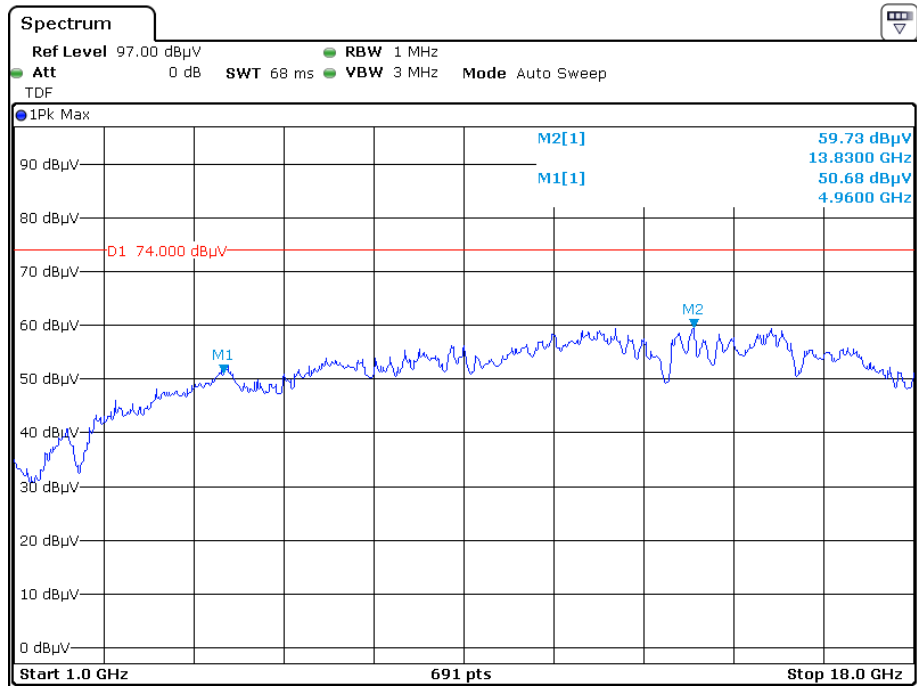


Date: 1.APR.2019 09:51:05

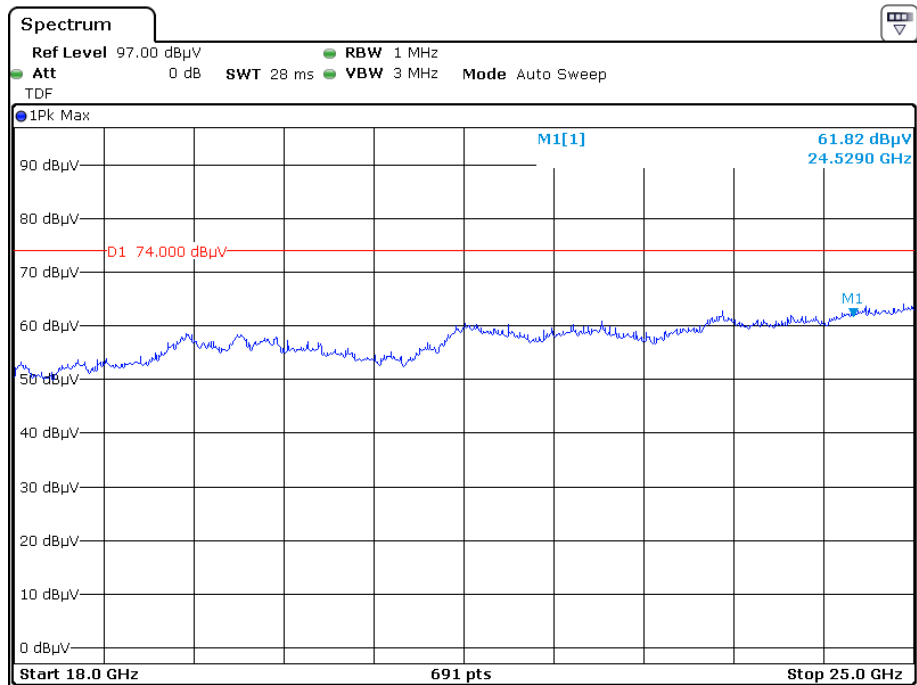


Date: 1.APR.2019 10:47:09

Pre-scan for Average Horizontal

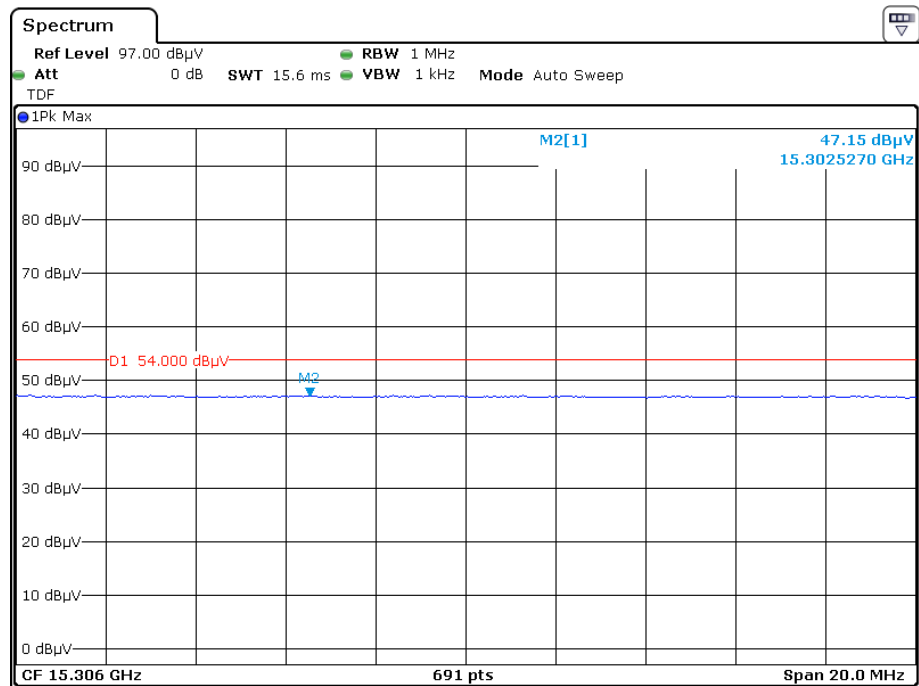


Date: 1.APR.2019 09:56:00

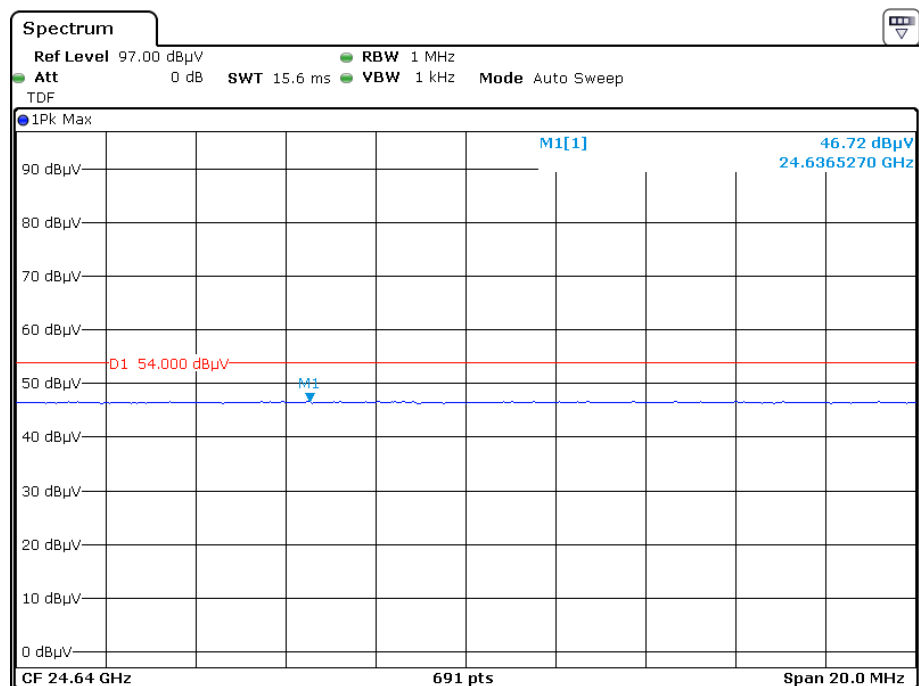


Date: 1.APR.2019 10:43:34


Vertical

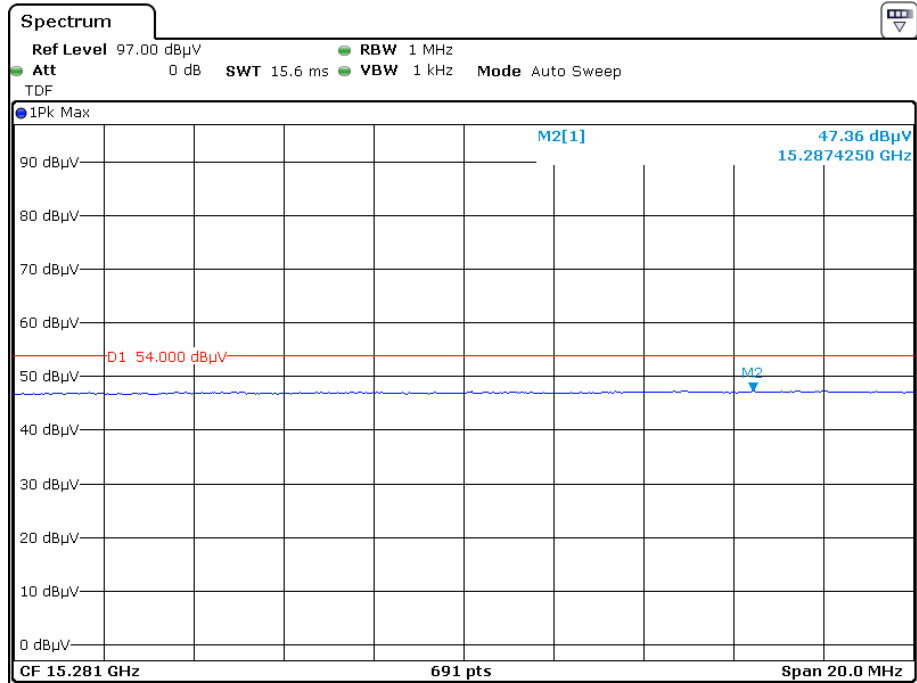

Date: 1.APR.2019 10:03:03

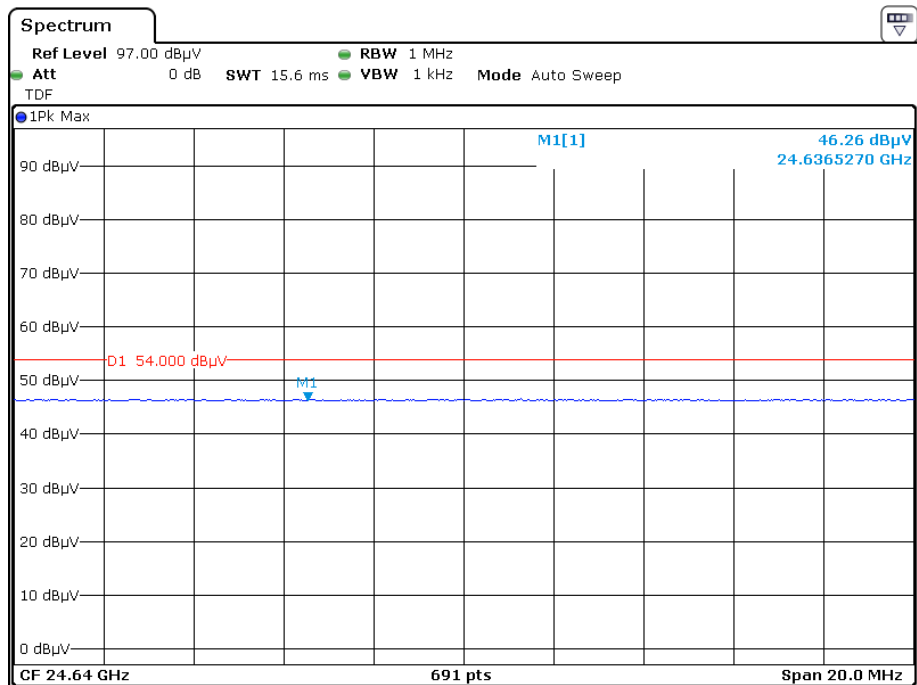

Date: 1.APR.2019 10:50:45

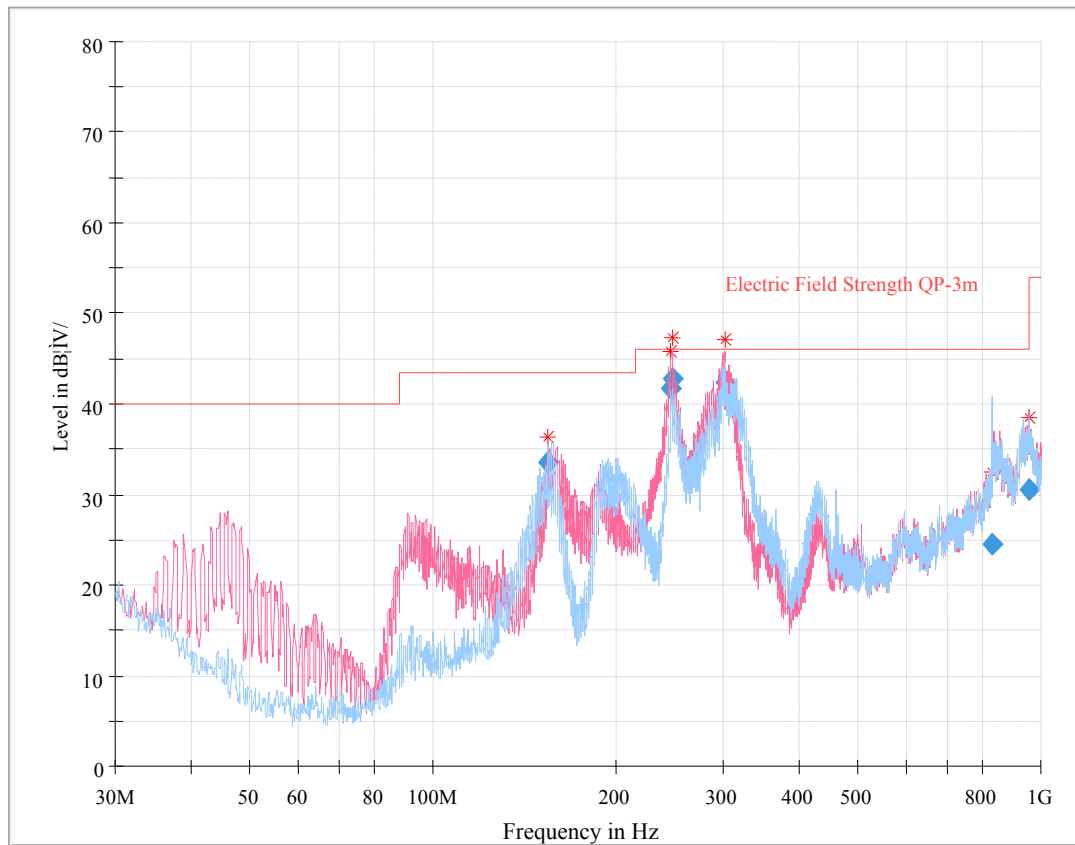Model RTX8200 DECT + BTLE Location Gateway EXT (WH):**30 MHz~1 GHz:**

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
154.291000	33.46	107.0	V	120.0	-14.3	43.50	10.04
245.288000	41.69	100.0	V	112.0	-14.1	46.00	4.31
247.091750	42.77	100.0	V	105.0	-14.1	46.00	3.23
302.229125	42.41	206.0	V	171.0	-10.6	46.00	3.59
828.646000	24.61	272.0	H	45.0	4.8	46.00	21.39
955.169000	30.46	120.0	V	271.0	9.6	46.00	15.54

External Antenna 1:**1 GHz – 25 GHz:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
2387.46	28.20	PK	253	1.3	V	33.00	61.20	74	12.80
2387.46	14.16	Ave.	253	1.3	V	33.00	47.16	54	6.84
2484.10	27.30	PK	67	1.2	V	33.20	60.50	74	13.50
2484.10	13.41	Ave.	67	1.2	V	33.20	46.61	54	7.39
4804.00	42.83	PK	57	1.9	V	7.88	50.71	74	23.29
4804.00	28.50	Ave.	57	1.9	V	7.88	36.38	54	17.62
Middle Channel (2440 MHz)									
4880.00	43.13	PK	34	1.8	V	9.21	52.34	74	21.66
4880.00	28.87	Ave.	34	1.8	V	9.21	38.08	54	15.92
High Channel (2480 MHz)									
2389.42	28.31	PK	88	1.9	V	33.00	61.31	74	12.69
2389.42	14.26	Ave.	88	1.9	V	33.00	47.26	54	6.74
2483.80	32.34	PK	123	1.8	V	33.20	65.54	74	8.46
2483.80	14.51	Ave.	123	1.8	V	33.20	47.71	54	6.29
4960.00	44.13	PK	163	1.2	V	9.07	53.20	74	20.80
4960.00	29.03	Ave.	163	1.2	V	9.07	38.10	54	15.90

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.

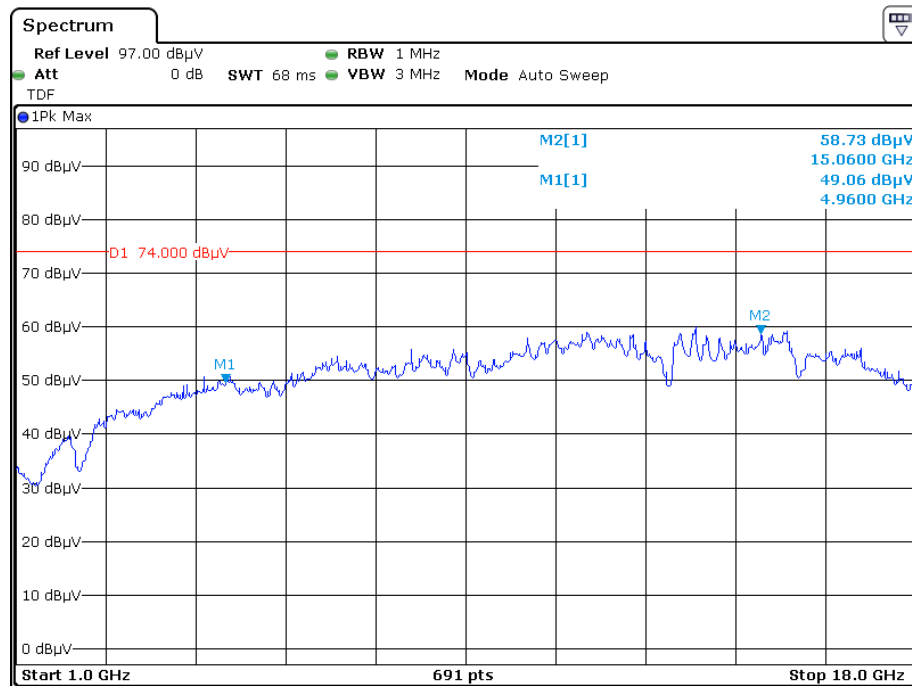
**Pre-scan with high channel
Horizontal**

Date: 1.APR.2019 11:48:29

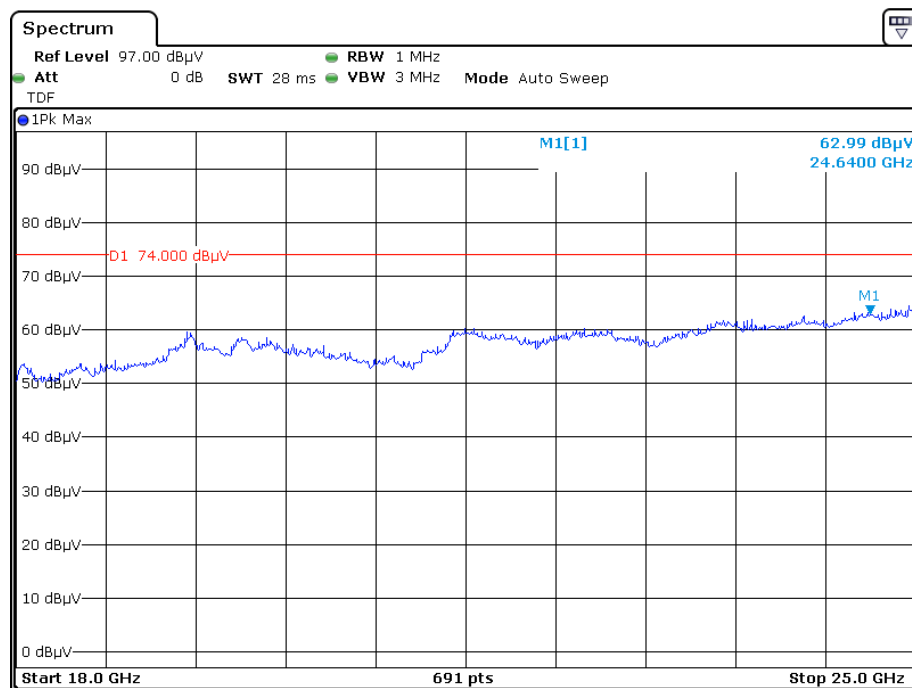


Date: 1.APR.2019 13:10:33

Vertical

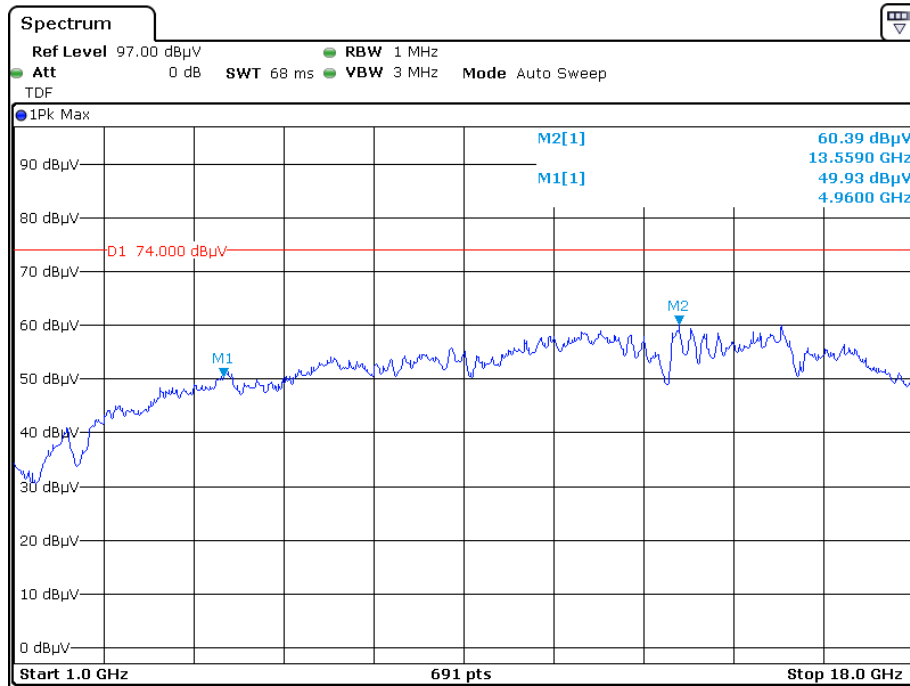


Date: 1.APR.2019 11:53:47

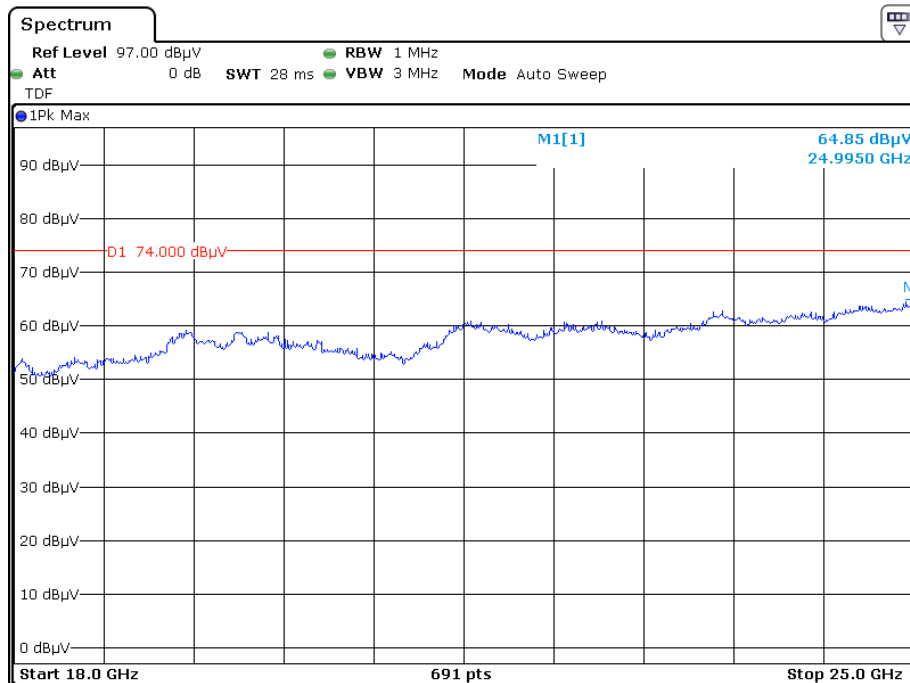


Date: 1.APR.2019 13:04:50

Pre-scan for Average Horizontal

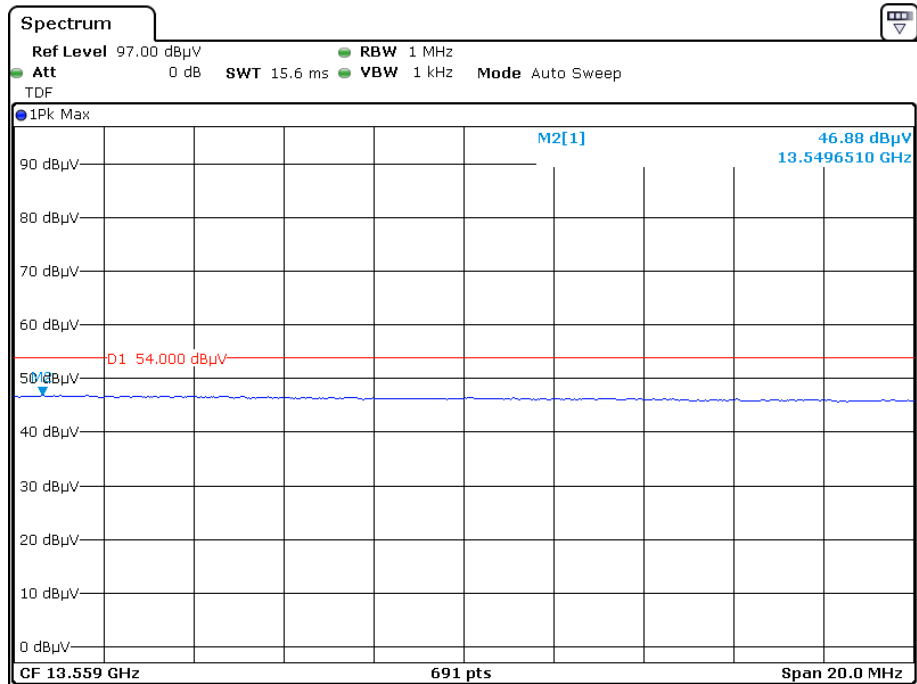


Date: 1.APR.2019 11:50:20

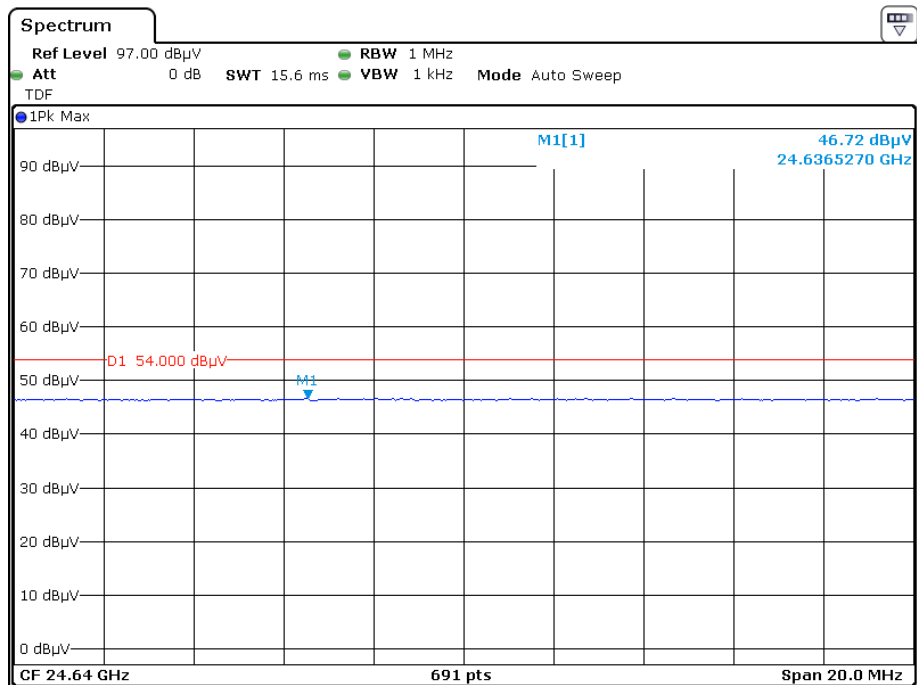


Date: 1.APR.2019 13:14:12

Vertical

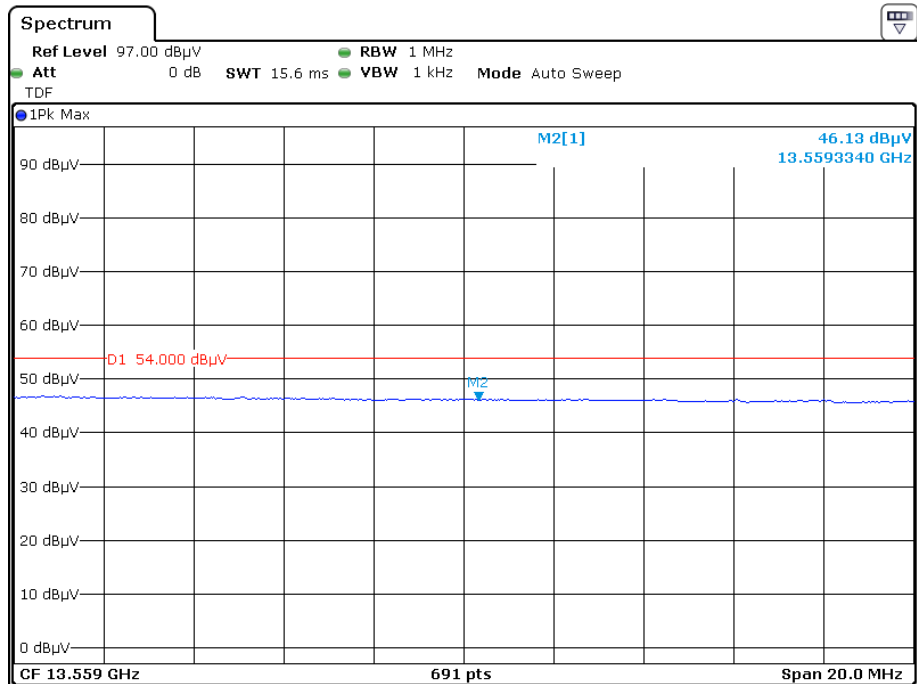

Date: 1.APR.2019 11:54:54

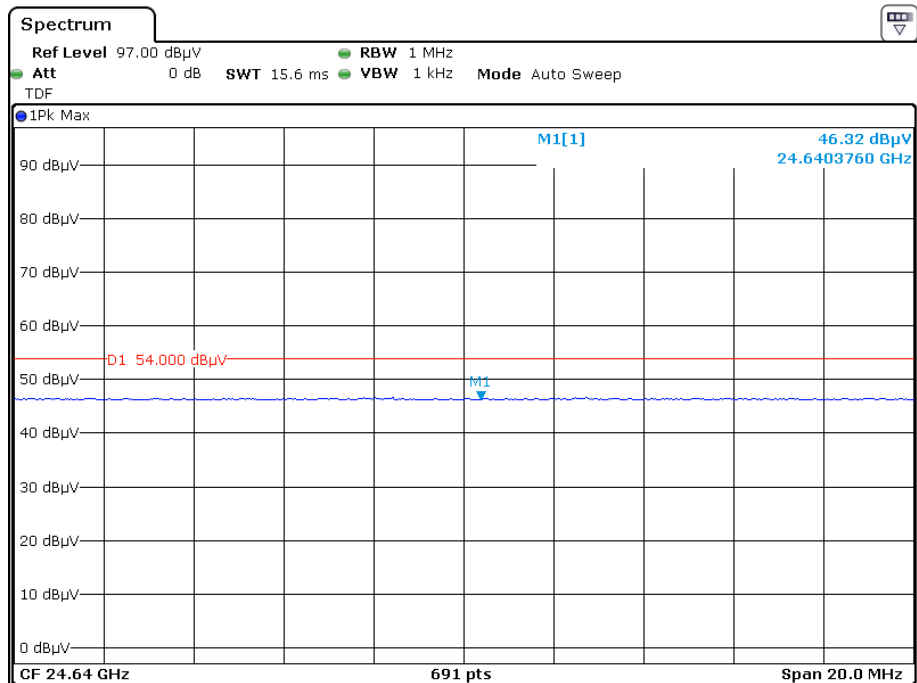

Date: 1.APR.2019 13:07:57

External Antenna 2:**1 GHz – 25 GHz:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
2388.43	28.19	PK	168	1.7	V	33.00	61.19	74	12.81
2388.43	14.25	Ave.	168	1.7	V	33.00	47.25	54	6.75
2483.72	27.42	PK	50	1.3	V	33.20	60.62	74	13.38
2483.72	13.65	Ave.	50	1.3	V	33.20	46.85	54	7.15
4804.00	43.45	PK	314	2.3	V	7.88	51.33	74	22.67
4804.00	28.70	Ave.	314	2.3	V	7.88	36.58	54	17.42
Middle Channel (2440 MHz)									
4880.00	43.52	PK	3	1.2	V	9.21	52.73	74	21.27
4880.00	28.69	Ave.	3	1.2	V	9.21	37.90	54	16.10
High Channel (2480 MHz)									
2389.22	27.80	PK	219	1.6	V	33.00	60.80	74	13.20
2389.22	13.84	Ave.	219	1.6	V	33.00	46.84	54	7.16
2483.53	32.49	PK	131	1.3	V	33.20	65.69	74	8.31
2483.53	14.44	Ave.	131	1.3	V	33.20	47.64	54	6.36
4960.00	43.86	PK	318	1.5	V	9.07	52.93	74	21.07
4960.00	28.89	Ave.	318	1.5	V	9.07	37.96	54	16.04

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is 20dB to the limit was not recorded.

And for the pre-scan is performed with the 2400-2483.5MHz band filter.

Pre-scan with high channel Horizontal

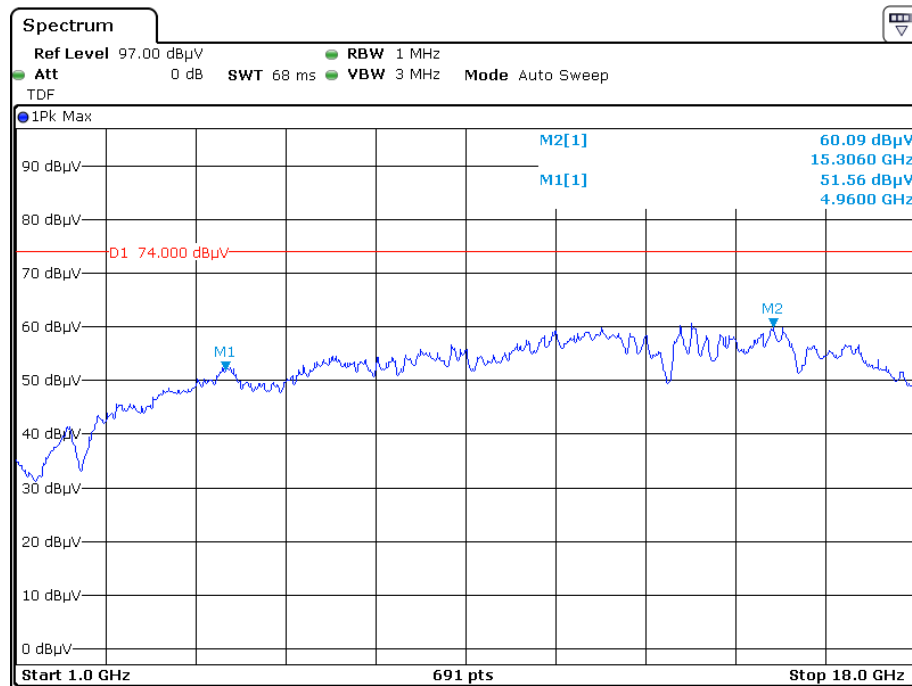


Date: 1.APR.2019 17:56:45

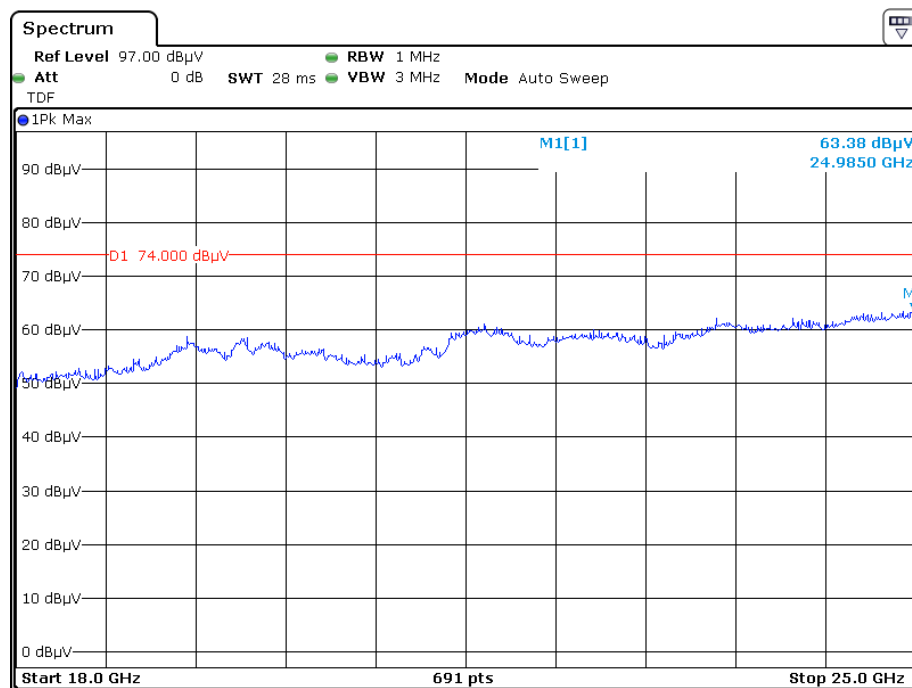


Date: 1.APR.2019 18:50:43

Vertical

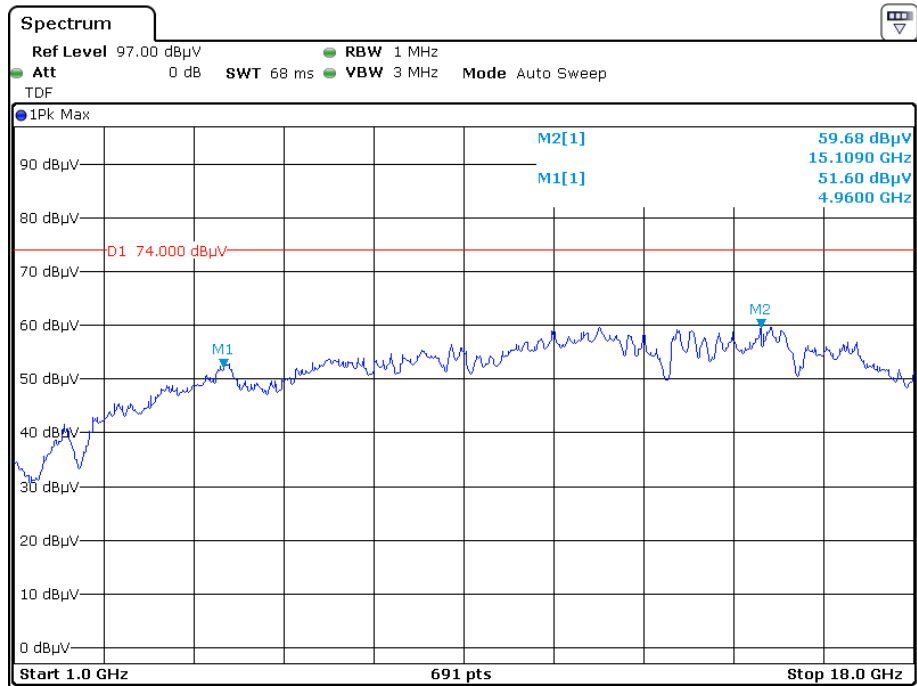


Date: 1.APR.2019 18:04:07

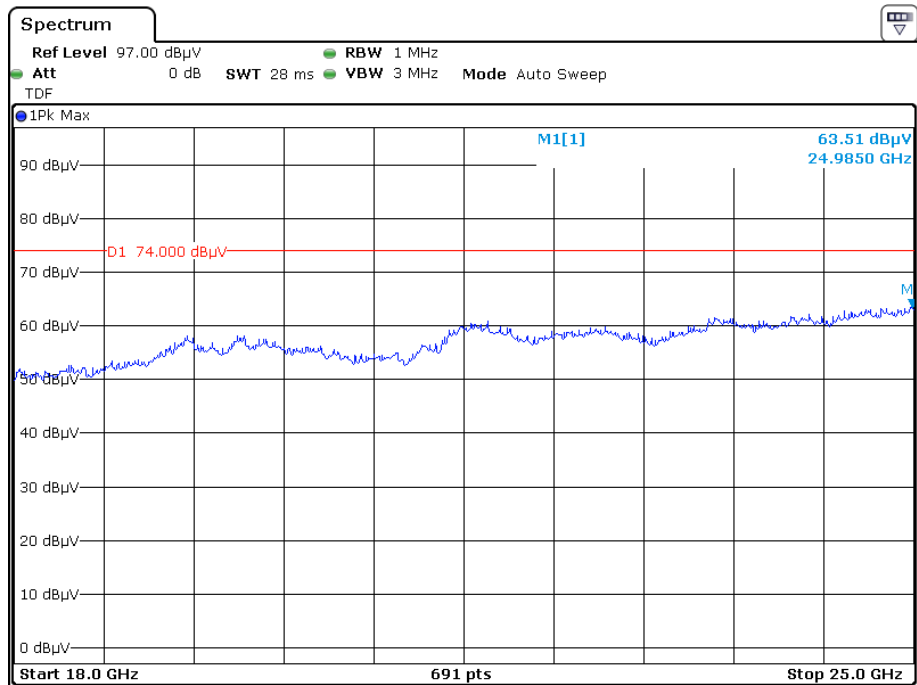


Date: 1.APR.2019 18:59:14

Pre-scan for Average Horizontal

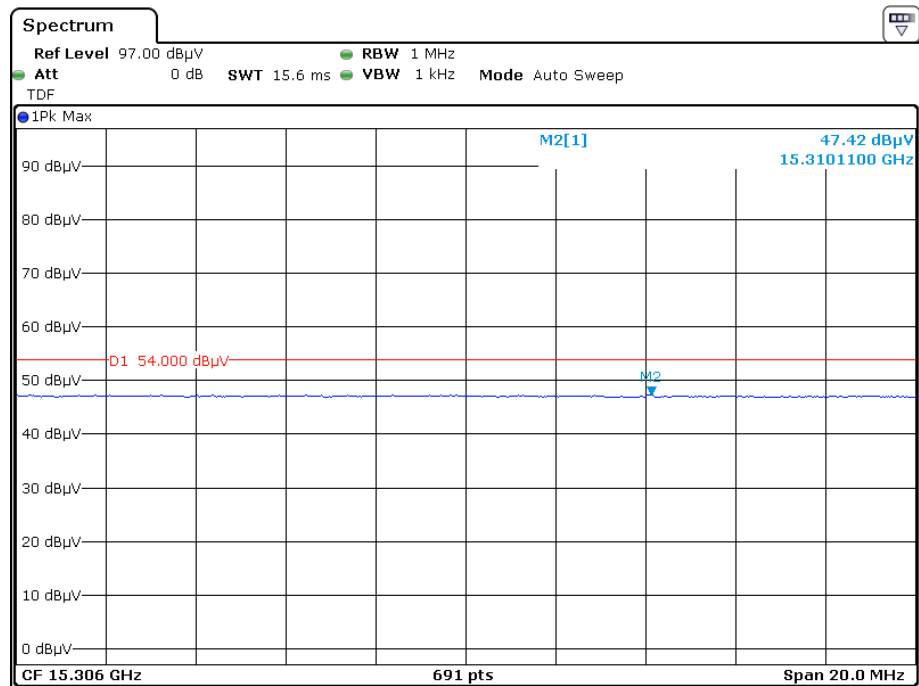


Date: 1.APR.2019 18:00:33

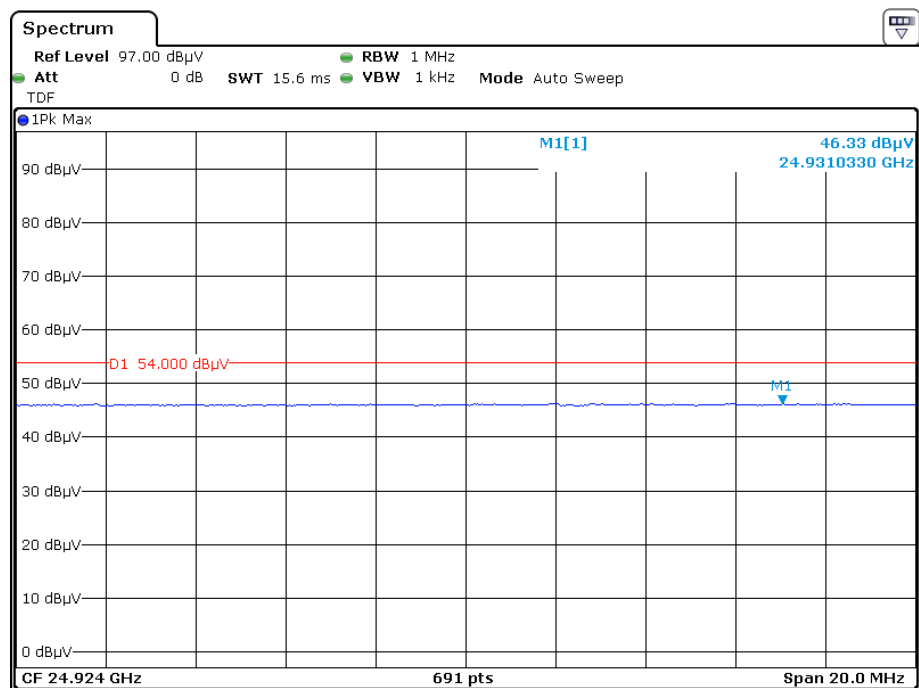


Date: 1.APR.2019 18:55:05

Vertical

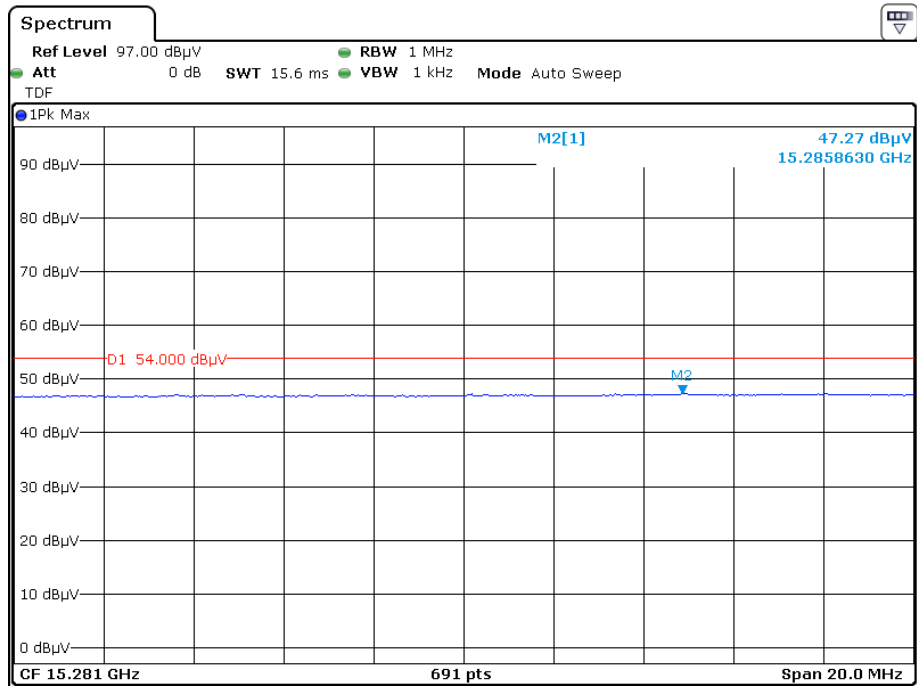

Date: 1.APR.2019 18:07:35

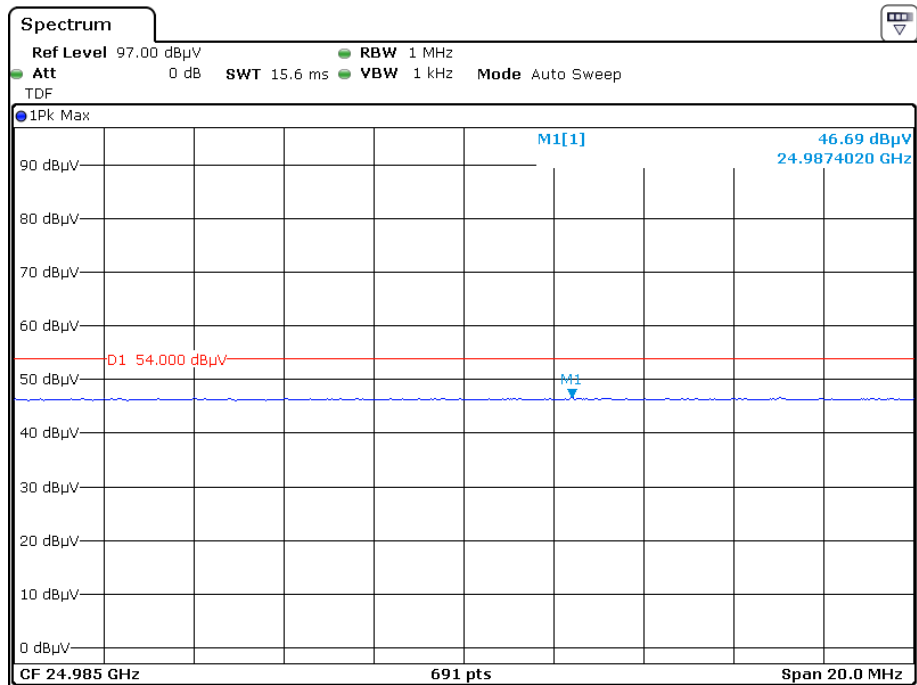

Date: 1.APR.2019 19:03:08


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Moon Tan on 2018-12-12.


Test Result: Pass.

Please refer to the following table and plots.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
BLE mode			
Low	2402	0.68	≥500
Middle	2440	0.68	≥500
High	2480	0.68	≥500

Low Channel

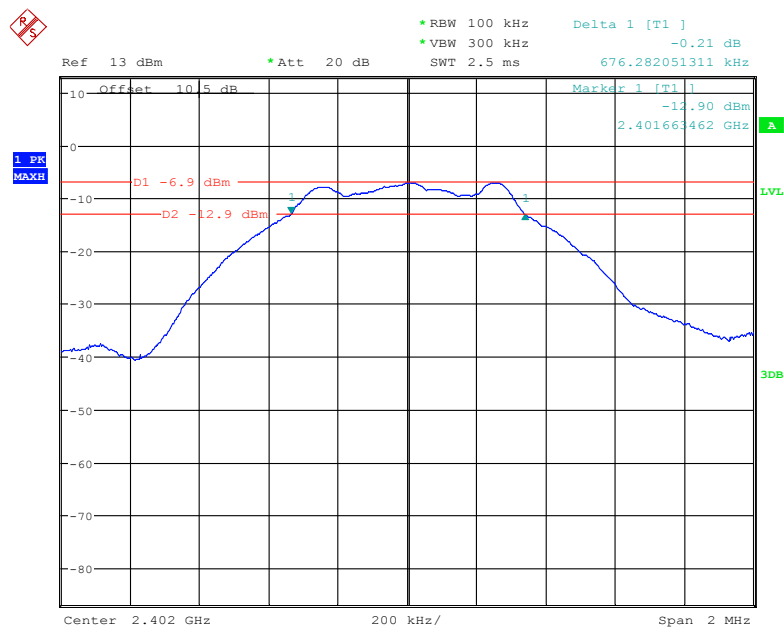


Date: 12.DEC.2018 13:48:20

Middle Channel

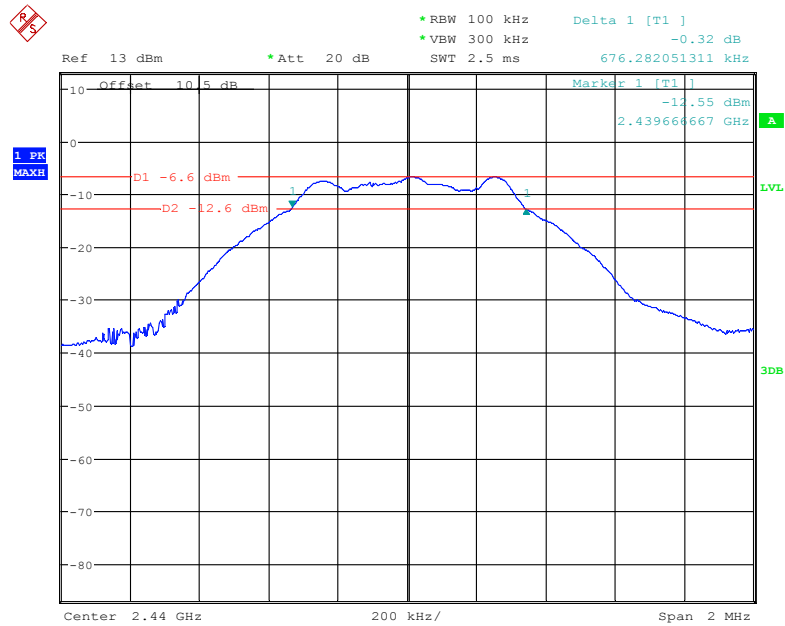

Date: 12.DEC.2018 14:08:33

High Channel

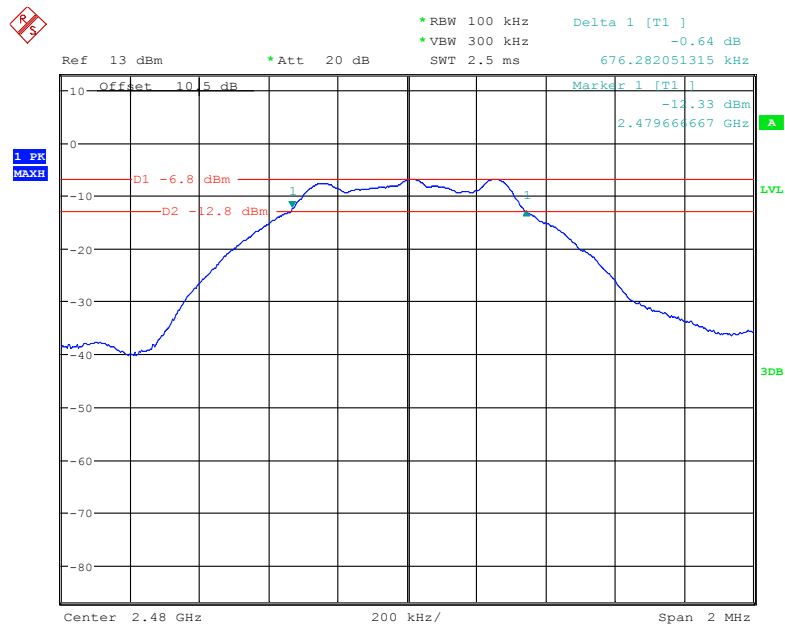

Date: 12.DEC.2018 14:00:56


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Moon Tan on 2018-12-12.

EUT operation mode: Transmitting

BLE mode


Channel	Frequency (MHz)	Max Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	-6.59	30	Pass
Middle	2440	-6.31	30	Pass
High	2480	-6.40	30	Pass

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by Moon Tan on 2018-12-12.

EUT operation mode: Transmitting

Test Result: Compliance


Please refer to the following plots.

BLE: Band Edge, Left Side

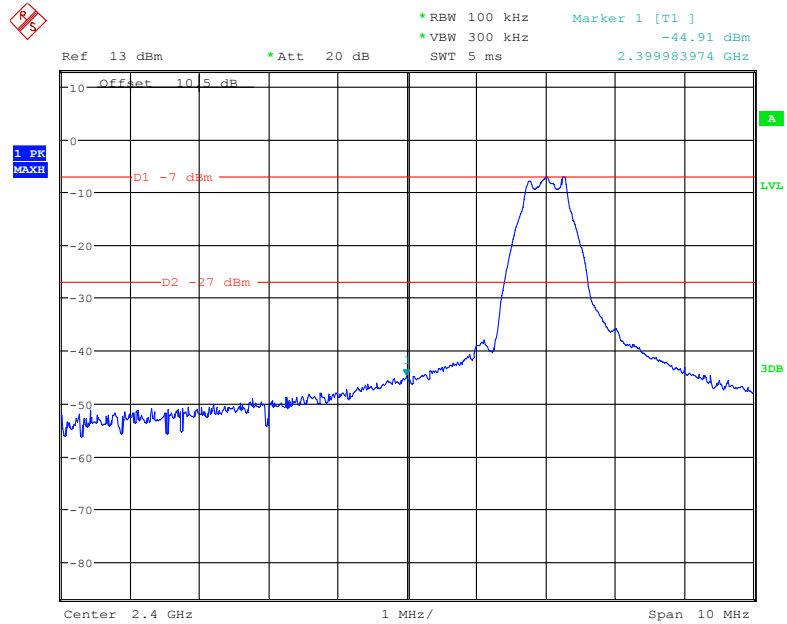

Date: 12.DEC.2018 13:52:46

BLE: Band Edge, Right Side

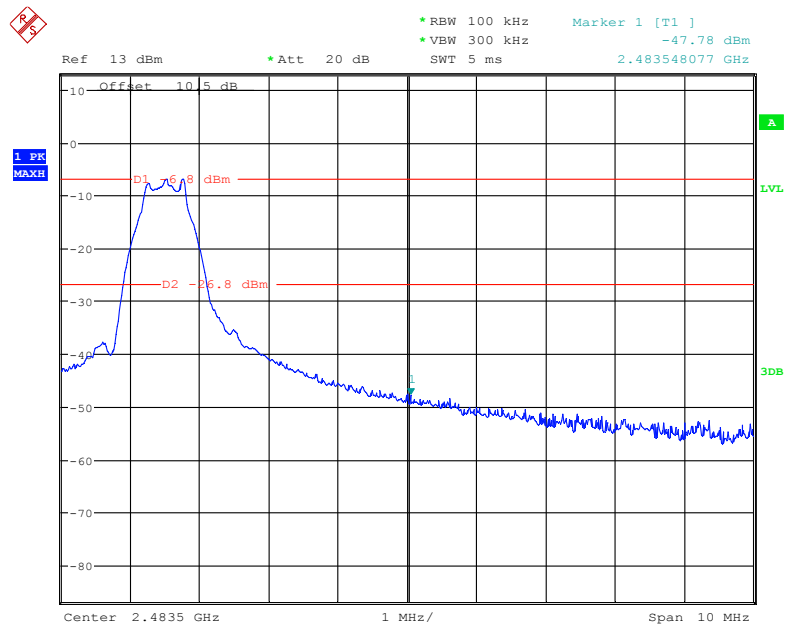

Date: 12.DEC.2018 14:02:13


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by Moon Tan on 2018-12-12.

EUT operation mode: Transmitting

Test Result: Pass


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
BLE mode			
Low	2402	-23.03	≤ 8
Middle	2440	-22.96	≤ 8
High	2480	-22.84	≤ 8

Power Spectral Density, BLE Low Channel

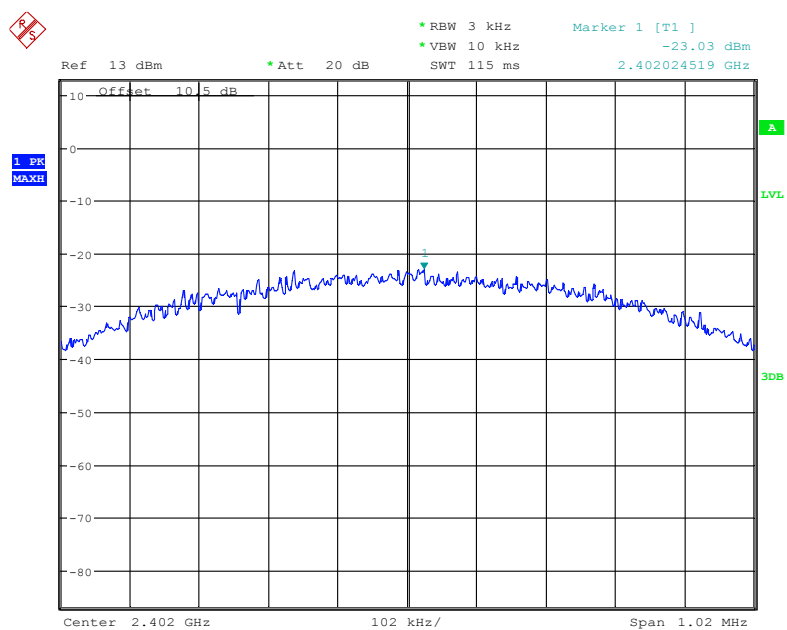


Date: 12.DEC.2018 13:54:02

Power Spectral Density, BLE Middle Channel

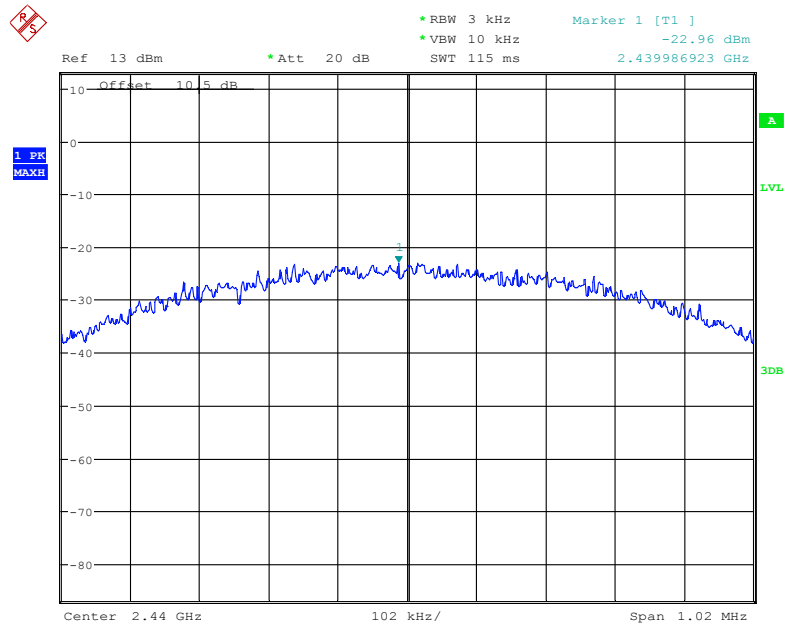

Date: 12.DEC.2018 14:09:32

Power Spectral Density, BLE High Channel

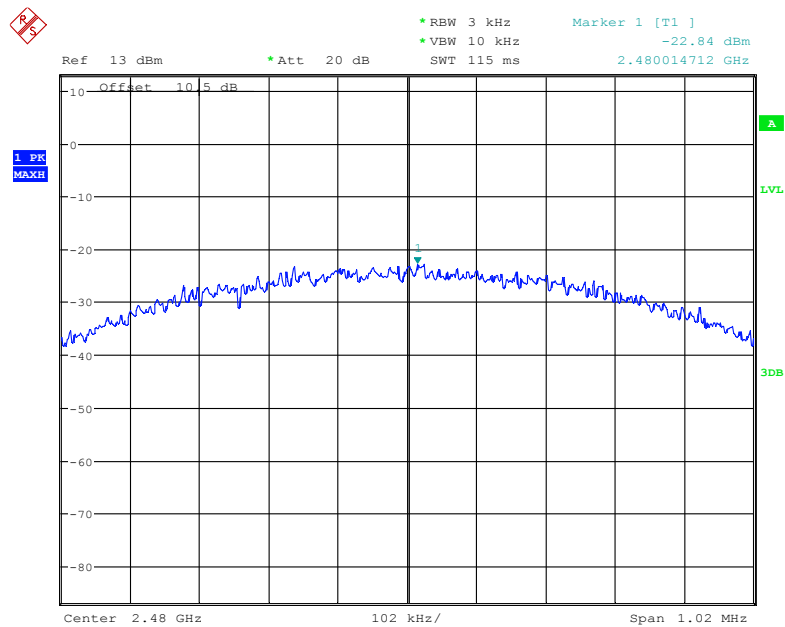

Date: 12.DEC.2018 14:03:21

***** END OF REPORT *****