

STS  
TESTING  
SOLUTIONS  
LAB



## RADIO TEST REPORT

Report No.: STS2008324W12

Issued for

RTX HONG KONG LTD

8TH FL CORPORATION SQUARE, 8 LAM LOK ST., KOW-  
LOON BAY, HK.

<b>Product Name:</b>	DECT Base Station
<b>Brand Name:</b>	Poly
<b>Model Name:</b>	Rove B4, Rove B2
<b>Series Model:</b>	N/A
<b>FCC ID:</b>	T7HX8667
<b>Test Standard:</b>	Title 47 of the CFR, Part 15 Subpart D

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS. All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.  
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,  
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China  
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





## TEST RESULT CERTIFICATION

**Applicant's Name** ..... : RTX HONG KONG LTD  
Address ..... : 8TH FL CORPORATION SQUARE, 8 LAM LOK ST., KOWLOON BAY, HK.  
**Manufacturer's Name** ..... : RTX HONG KONG LTD  
Address ..... : 8TH FL CORPORATION SQUARE, 8 LAM LOK ST., KOWLOON BAY, HK.

### Product Description

Product Name ..... : DECT Base Station  
Brand Name ..... : Poly  
Model Name ..... : Rove B4, Rove B2  
Series Model ..... : N/A

**Test Standards** ..... : Title 47 of the CFR, Part 15. Subpart D

Test procedure ..... : ANSI C63.17-2013

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

**Date of Test** ..... :

Date of receipt of test item ..... : 27 Aug. 2020  
Date of performance of tests ..... : 27 Aug. 2020 ~ 17 Sept. 2020  
Date of Issue ..... : 27 Sept. 2020  
Test Result ..... : **Pass**

Testing Engineer ..... :

(Chris Chen)

Technical Manager ..... :

(Sean She)

Authorized Signatory :

(Vita Li)



**TABLE OF CONTENTS**

	Page
<b>1 INTRODUCTION</b>	<b>7</b>
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2 PRODUCT INFORMATION</b>	<b>8</b>
<b>3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST</b>	<b>9</b>
3.1 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	9
<b>4 MEASUREMENT INSTRUMENTS</b>	<b>10</b>
<b>5 TEST ITEMS</b>	<b>11</b>
5.1 ANTENNA REQUIREMENT	11
5.2 MODULATION TECHNIQUES	11
5.3 EMISSION BANDWIDTH	12
5.4 PEAK TRANSMIT POWER	17
5.5 POWER SPECTRAL DENSITY	21
5.6 POWER ADJUSTMENT FOR ANTENNA GAIN	25
5.7 AUTOMATICALLY DISCONTINUE TRANSMISSION	26
5.8 SYSTEM ACKNOWLEDGE-MENT TEST	27
5.9 MONITORING THRESHOLD	28
5.10 DURATION OF TRANSMISSION	29
5.11 SELECTED CHANNEL CONFIRMATION, POWER ACCURACY, SEGMENT OCCUPANCY	31
5.12 RANDOM WAITING	33
5.13 MONITORING REQUIREMENTS	34
5.14 MONITORING ANTENNA	35
5.15 DUPLEX CONNECTIONS	35
5.16 ALTERNATIVE MONITORING INTERVAL FOR CO-LOCATED DEVICES	36
5.17 FAIR ACCESS	36
5.18 SPURIOUS EMISSIONS	37
5.19 FRAME PERIOD	53
5.20 FREQUENCY STABILITY	55
5.21 CONDUCTED EMISSION MEASUREMENT	59
5.22 RADIATED SPURIOUS EMISSION	65

Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	27 Sept. 2020	STS2008324W12	ALL	Initial Issue





## SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart D.

Requirement	FCC Part	Test Procedure	Result
Emission Bandwidth	15.323 (a)	6.1.3	Compliant
Labeling Requirements	15.19(a)(3)	--	Compliant
Conducted Emissions	15.315 & 15.207	ANSI C63.4	Compliant
Antenna Requirements	15.317 & 15.203	Declaration	Compliant
Use digital modulation	15.319 (b)	6.1.4	Compliant
Peak transmit power	15.319 (c)	6.1.2	Compliant
Power spectral density	15.319 (d)	6.1.5	Compliant
Power adjustment for antenna gain	15.319 (e)	4.3.1	Compliant
Automatically discontinue transmission	15.319 (f)	--	Compliant
Spurious emissions conducted	15.323 (d) (1) & 15.323 (d) (2)	6.1.6	Compliant
RF Exposure	15.319 (i) & 1.1307(b), 2.1091 and 2.1093	ANSI/IEEE C95.1	Compliant (The test data please refer to RF exposure report)
Monitoring time	15.323 (c)(1)	7.3.4	Compliant
Monitoring threshold	15.323 (c)(2)	7.3	Compliant
Duration of transmission	15.323 (c)(3)	8.2.2	Not Applicable
System acknowledgment test	15.323(c)(4)	8.2.1	Compliant
Channel confirmation, Power accuracy, Segment occupancy	15.323 (c)(5)	7.3.3 & 7.3.4	Compliant
Random waiting	15.323 (c)(6)	8.1.3	Not Applicable



Monitoring bandwidth	15.323 (c)(7)	7.4	Compliant
Monitoring reaction time	15.323 (c)(1 )	7.5	Compliant
Monitoring antenna	15.323 (c)(8)	4	Compliant
Monitoring threshold relaxation	15.323 (c)(9)	4	Compliant
Duplex connections	15.323 (c)(10)	8.3	Not Applicable
Alternate monitoring interval	15.323 (c)(11)	8.4	Not Applicable
Fair access	15.323 (c)(12)	Declaration	Not Applicable
Frame period	15.323 (e)	6.2.2 & 6.2.3	Compliant
Frequency stability	15.323 (f)	6.2.1	Compliant
Radiated Out of Band Emissions	15.319 (g), 15.309 (b) & FCC Part 15 Subpart B, 15.109 and 15.209	--	Compliant



## 1 INTRODUCTION

### 1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 30-1GHz	$\pm 5.6\text{dB}$
4	All emissions, radiated 1G-6GHz	$\pm 5.5\text{dB}$
5	All emissions, radiated>6G	$\pm 5.8\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 3.37\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 3.83\text{dB}$




## 2 PRODUCT INFORMATION

Product Name	DECT Base Station
Brand Name	Poly
Model Name	Rove B4, Rove B2
Series Model	N/A
Product Differences	Base have two models: Rove B4 and Rove B2. The only different in hardware is Rove B4 have audio DSP and Rove B2 not. They are share the same PCB layout, with different BOM, same mechanical casing. The software of Rove B4 will support more feather such as for the audio DSP.
Hardware version number	V2RA
Software version number	Rove B4: Version 0731 Subversion 1009 Build 0000 Rove B2: Version 0731 Subversion 1009 Build 0000
EUT Frequency Ranges	1921.536-1928.448MHz
Power setting	Default
Type of Modulations	GFSK
Number of Channels	5 CH
	1921.536MHz, 1923.264MHz, 1924.992MHz, 1926.720MHz, 1928.448MHz
Antenna Type	PCB antenna
Antenna Gain	Ant 0: 1dBi
	Ant 1: 1dBi
Adapter	1. Model: S008ACM0500200 (Multi Plug) Input: AC 100-240V 50/60Hz 0.3A Output: DC 5V 2A 10W 2. Model: S010WU0500200 (US Plug) Input: AC 100-240V 50/60Hz 400mA Output: DC 5V 2000mA
	Extreme Temp. Tolerance: -10°C to 55°C

Note: Antenna 0 and Antenna 1 cannot transmit simultaneously.



### 3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

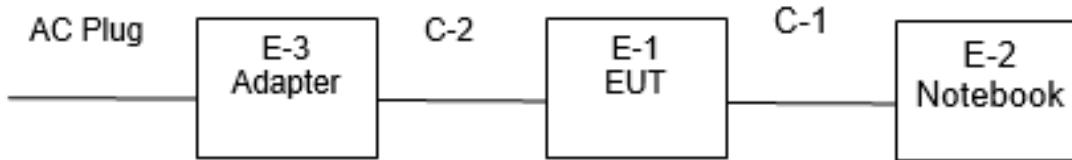

#### 3.1 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

##### Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-3	Adapter	N/A	Multi Plug: S008ACM0500200 US Plug: S010WU0500200	N/A	N/A
C-2	Power Cable	N/A	N/A	190cm	N/A

##### Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-2	Notebook	DELL	Inspiron 13-3467	N/A	N/A
C-1	USB Cable	N/A	N/A	120cm	N/A

##### Note:

(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 4 MEASUREMENT INSTRUMENTS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Signal Analyzer	Agilent	N9020A	MY51110105	2020.03.05	2021.03.04
Signal Analyzer	R&S	FSV 40-N	101823	2019.10.11	2020.10.10
Active loop Antenna	ZHINAN	ZN30900C	16035	2018.03.11	2021.03.10
Test Receiver	R&S	ESCI	101427	2019.10.09	2020.10.08
RF Test Platform for DECT	RTX	RTX 2012 HS	1138-6122	2020.03.05	2021.03.04
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.01
Horn Antenna	SCHWARZBECK	BBHA 9120D	1343	2018.10.19	2021.10.18
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2020.03.05	2021.03.04
Turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N.C.R	N.C.R
Programmable power supply	Agilent	E3642A	MY40002025	2019.10.11	2020.10.10
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Attenuator	HP	8494B	DC-18G	2020.04.30	2021.04.29

Equipment with a calibration date of "NCR" shown in this list was not used to make direct calibrated measurements.



## 5 TEST ITEMS

### 5.1 ANTENNA REQUIREMENT

#### TEST OVERVIEW

§ 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

#### TEST RESULT

The EUT as tested is compliant the criteria of §15.203&RSS-Gen. The antenna is permanently attached to the unit.

### 5.2 MODULATION TECHNIQUES

#### TEST REQUIREMENT

All transmissions must use only digital modulation techniques.

#### TEST PROCEDURES

Attestation of manufacturer supported by reference to relevant DECT specifications.

#### ATTESTATION

This device is compliant with the DECT standards described in European Standards EN 300 175-2 and EN 300 175-3. DECT transmissions are MC/TDMA/TDD (Multi carrier / Time Division Multiple Access / Time Division Duplex) using Digital GFSK modulation. For further details see operational description or relevant portions of the DECT standards.

#### TEST RESULTS

The EUT as tested is compliant the criteria of §15.319(b).



### 5.3 EMISSION BANDWIDTH

#### TEST OVERVIEW

§ 15.323(a): For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

#### TEST PROCEDURE

Operation shall be contained within the 1920-1930 MHz band. The emission bandwidth shall be less than 2.5 MHz. The power level shall be as specified in §15.319(c), but in no event shall the emission bandwidth be less than 50 kHz.

#### TEST RESULTS

The Eut was compliant with this requirement.

Antenna 0

Channel	26dB BW(MHz)	99% BW(MHz)	Limit
LOW(4)	1.271	1.169	<2.5MHz
MID(2)	1.270	1.168	
HIGH(0)	1.271	1.170	
AVG	1.270667	1.169300	


Antenna 1

Channel	26dB BW(MHz)	99% BW(MHz)	Limit
LOW(4)	1.271	1.169	<2.5MHz
MID(2)	1.271	1.168	
HIGH(0)	1.267	1.168	
AVG	1.269667	1.168367	





## Antenna 0

## Plot 1. Emission Bandwidth, Channel 4 @ 1921.536 MHz

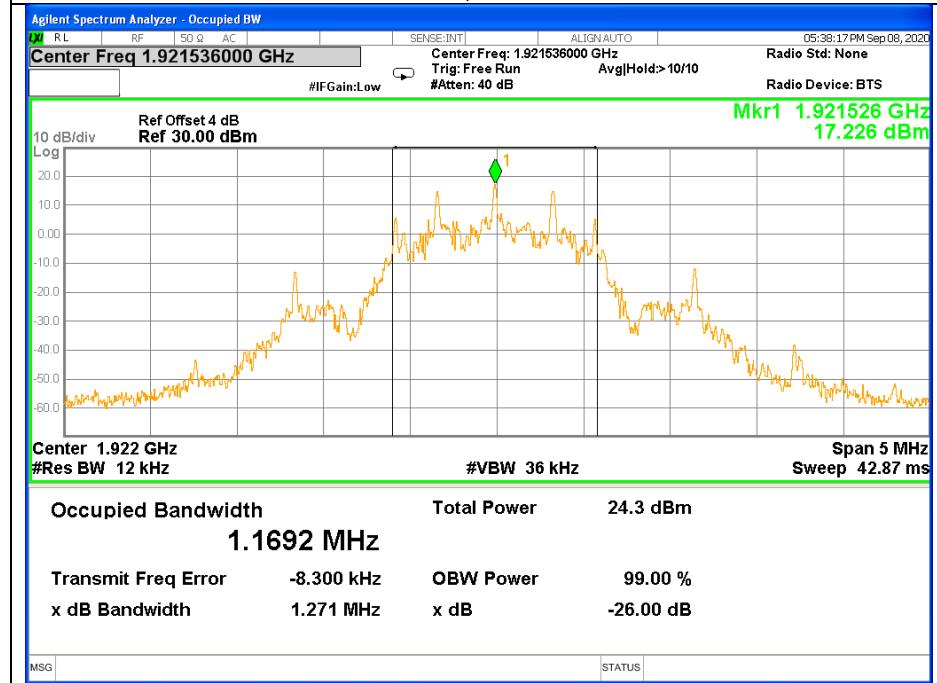

## Plot 2. Emission Bandwidth, Channel 2 @ 1924.992 MHz

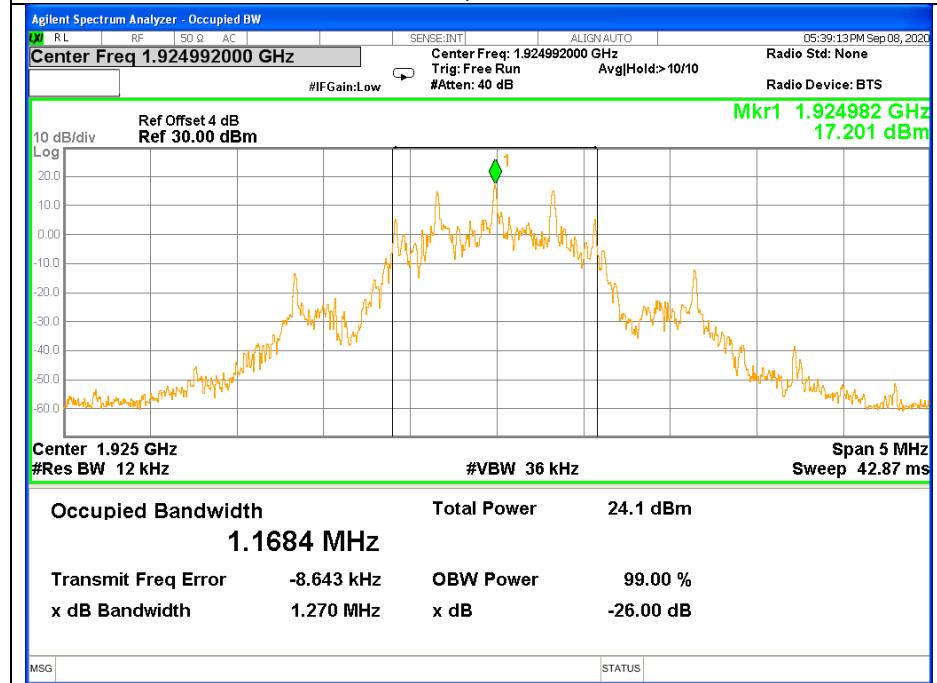


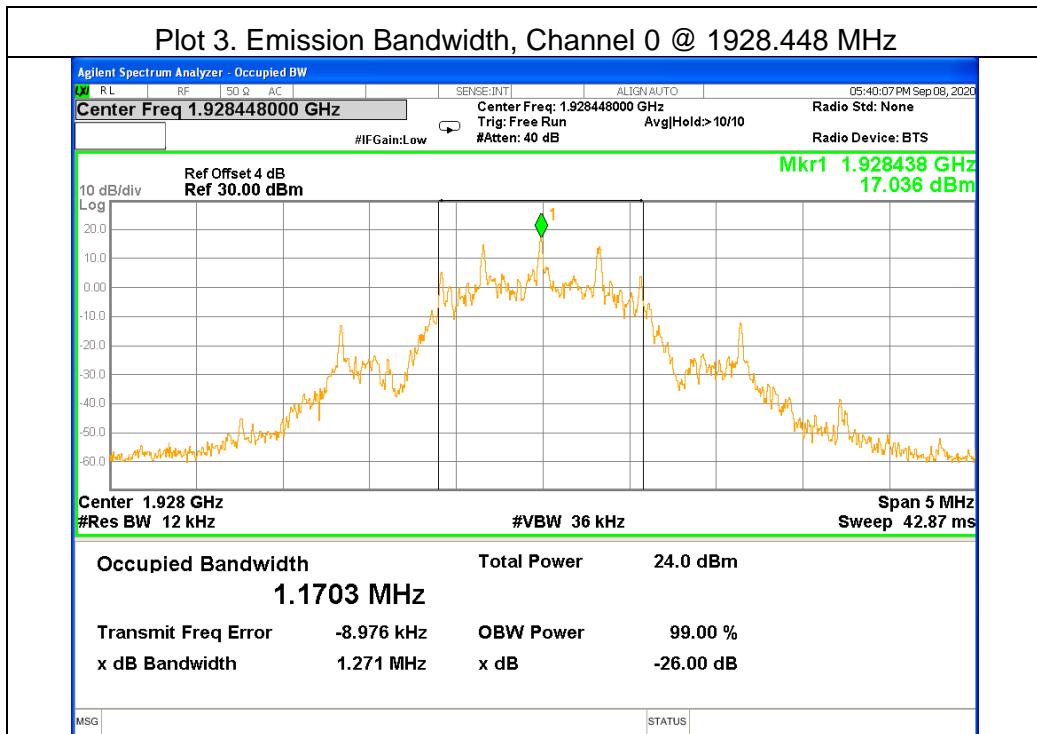





## Antenna 1

## Plot 1. Emission Bandwidth, Channel 4 @ 1921.536 MHz

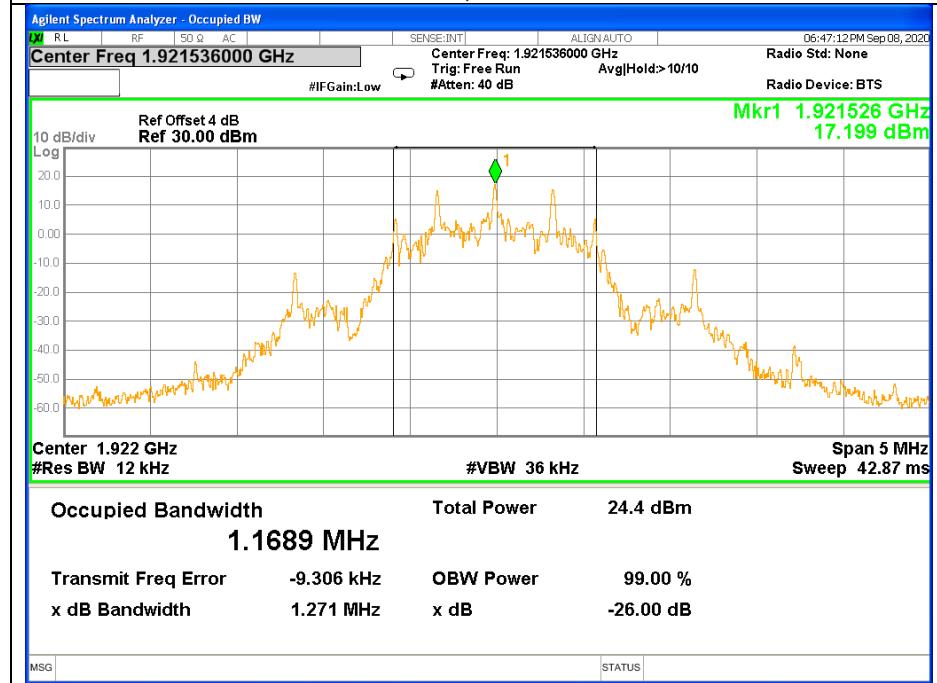

## Plot 2. Emission Bandwidth, Channel 2 @ 1924.992 MHz

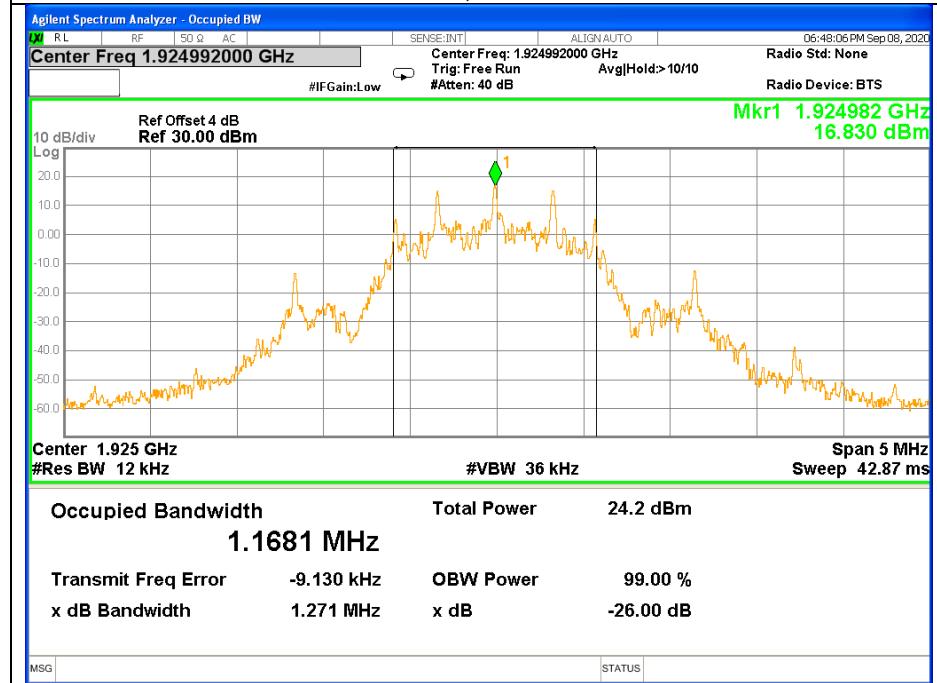

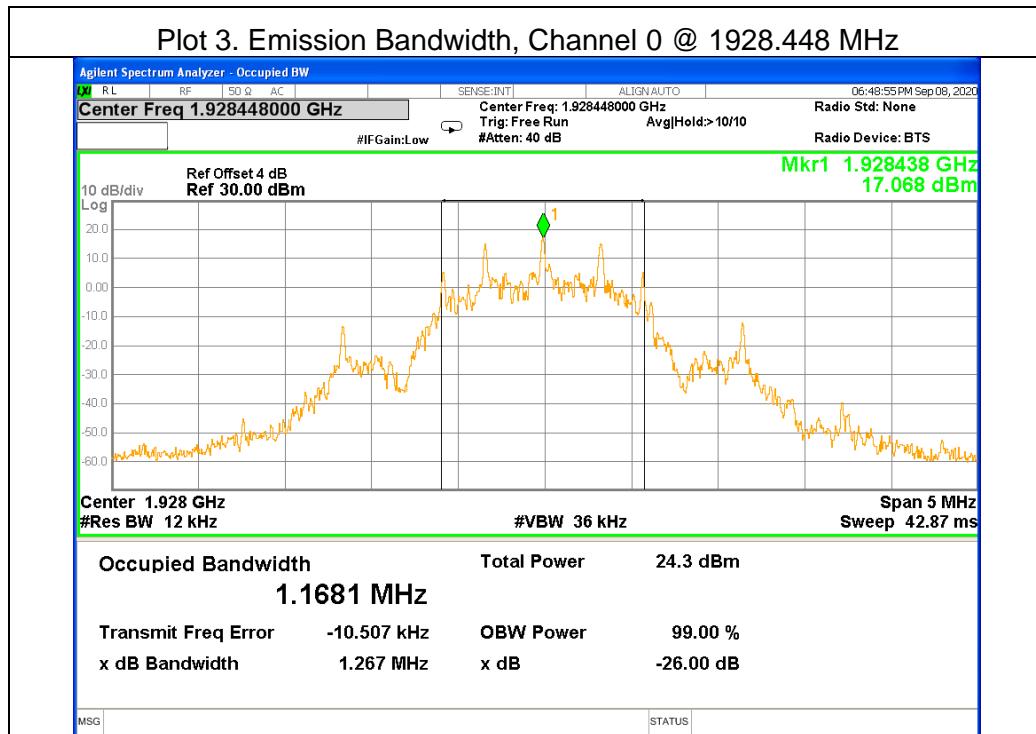



## 5.4 PEAK TRANSMIT POWER

### TEST OVERVIEW

§15.319(c): The peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

### TEST PROCEDURE


Testing to ANSI C63.17-2013 Clause 6.1.2, which provides the test methodology for this provision. The EUT is controlled from a personal computer and set into continuous transmission mode.



### TEST RESULTS

Antenna 0

Carrier Channel	Frequency (MHz)	Measured Peak Output Power (dBm)	Limit(uw)	Limit(dBm)
Low	1921.536	19.4	108130	20.34
Mid	1924.992	19.41	108093	20.34
High	1928.448	19.36	108180	20.34
EBWLow Channel=		1169200		Hz
EBWMid Channel=		1168400		Hz
EBWHigh Channel=		1170300		Hz

Note:Peak Transmitter Power Limit=100(EBW)1/2μW

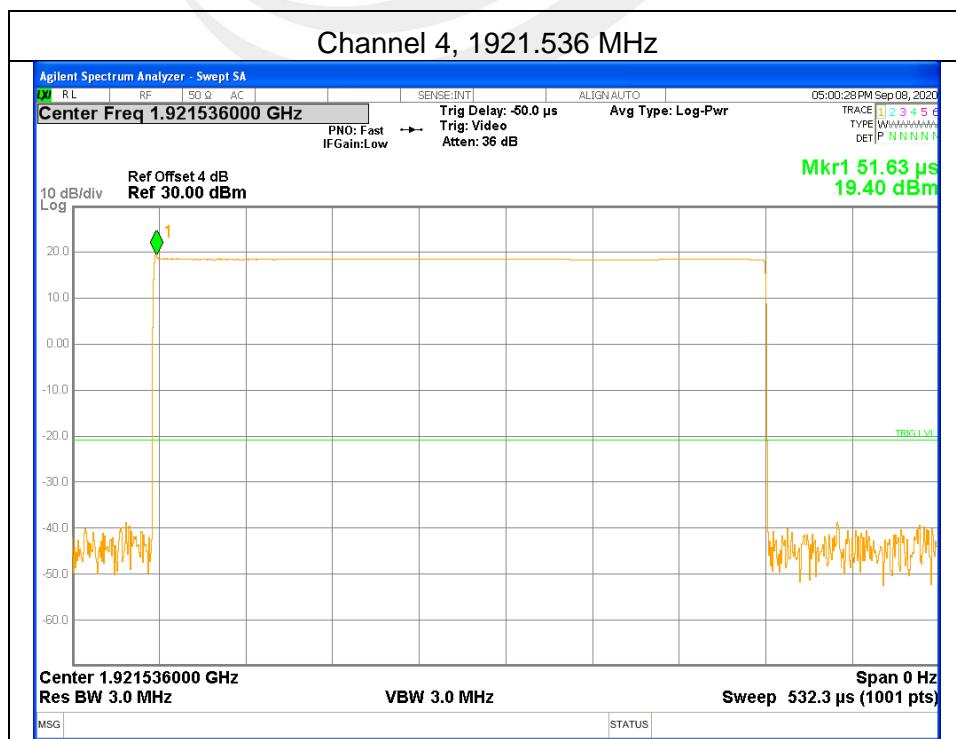

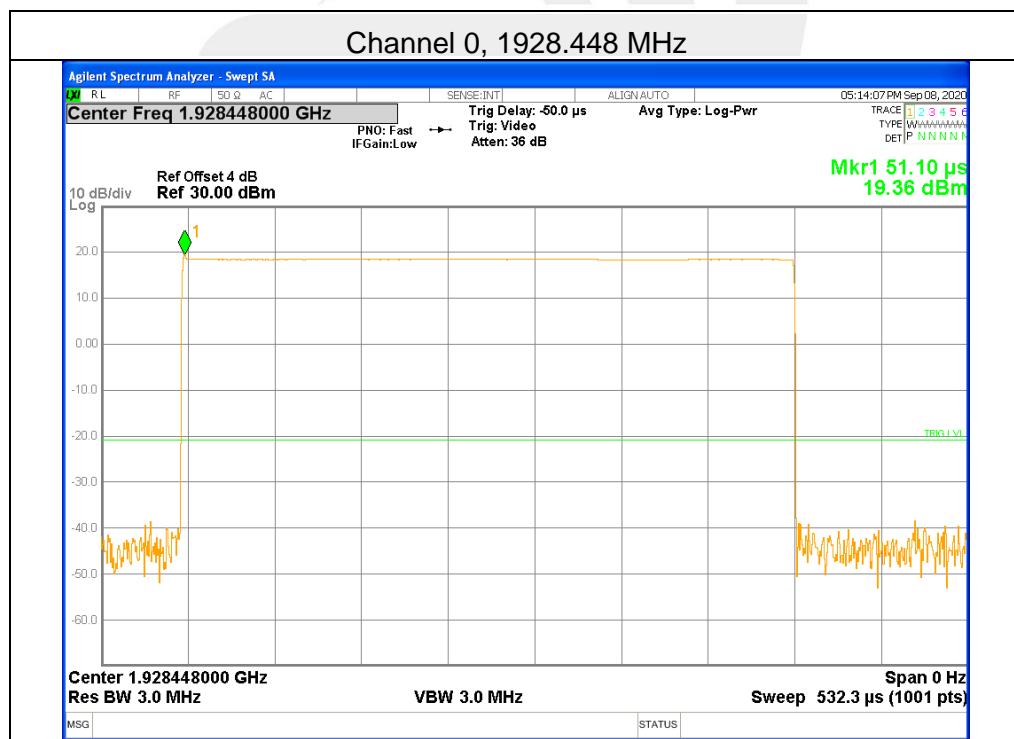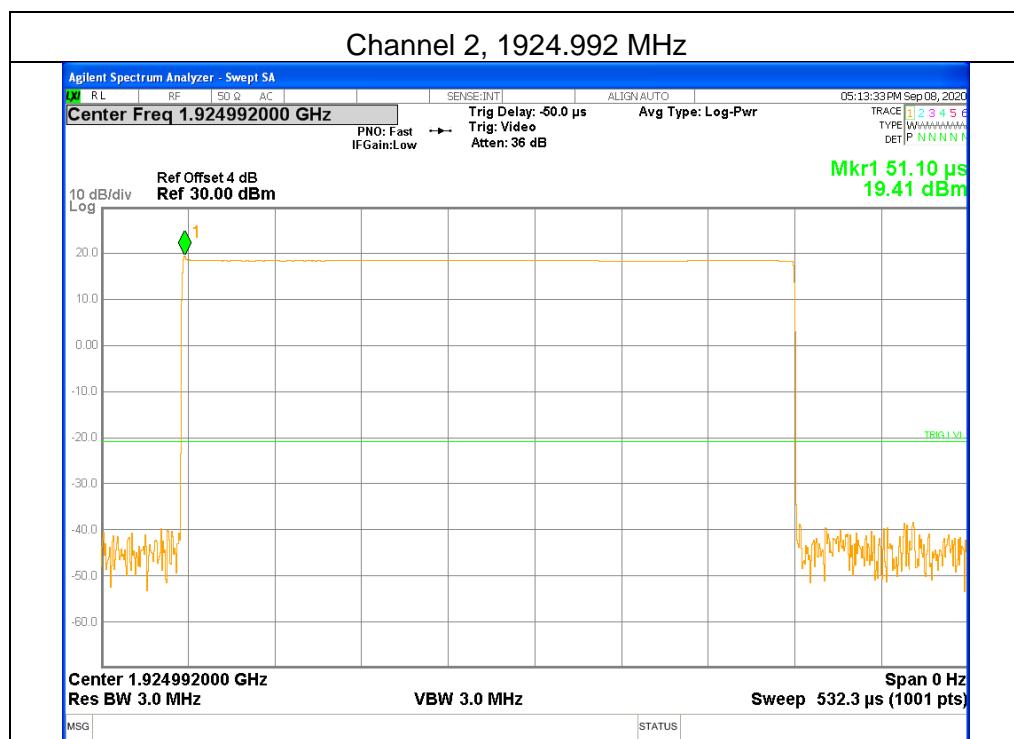






## Antenna 1

Carrier Channel	Frequency (MHz)	Measured Peak Output Power (dBm)	Limit(uw)	Limit(dBm)
Low	1921.536	19.47	108116	20.34
Mid	1924.992	19.41	108079	20.34
High	1928.448	19.34	108079	20.34
EBWLow Channel=	1168900			Hz
EBWMid Channel=	1168100			Hz
EBWHigh Channel=	1168100			Hz

Note:Peak Transmitter Power Limit=100(EBW)1/2μW

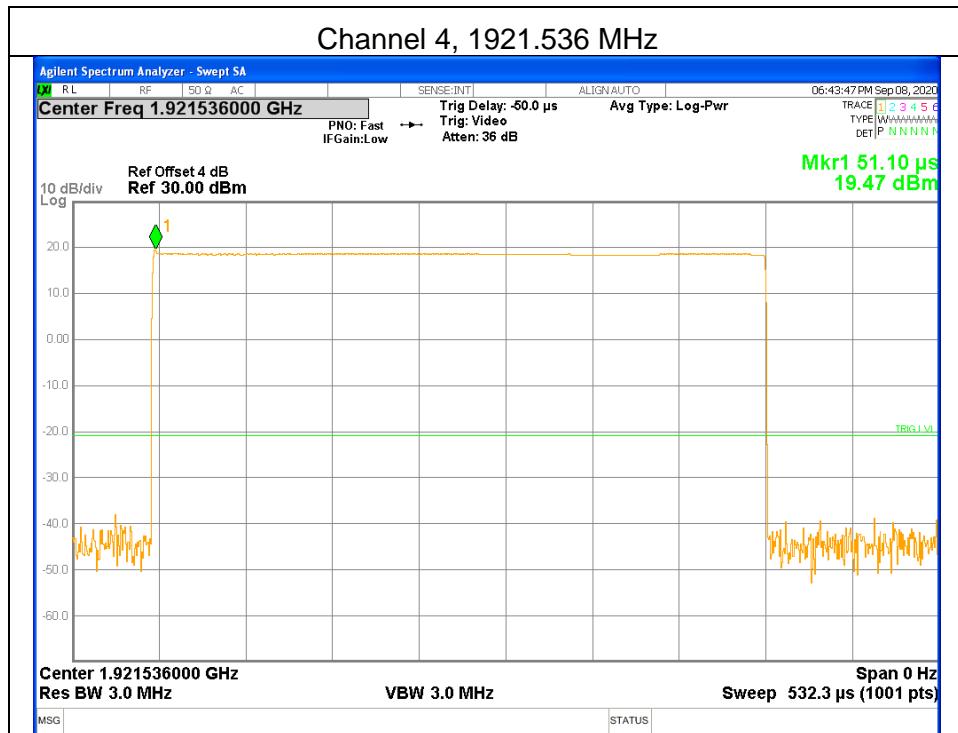

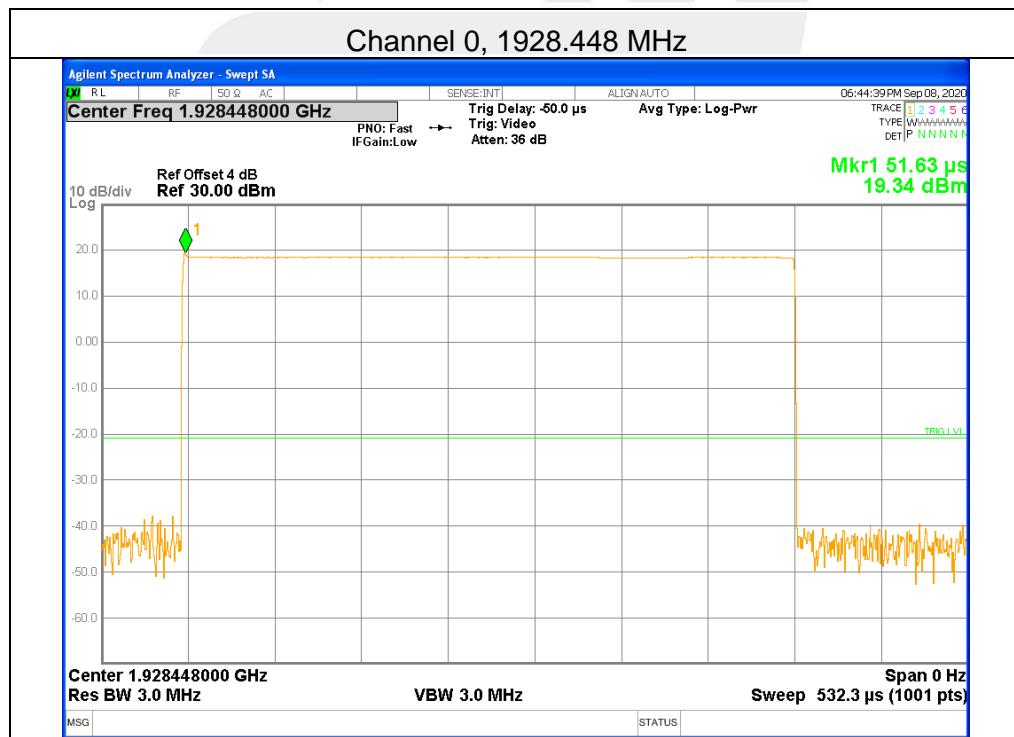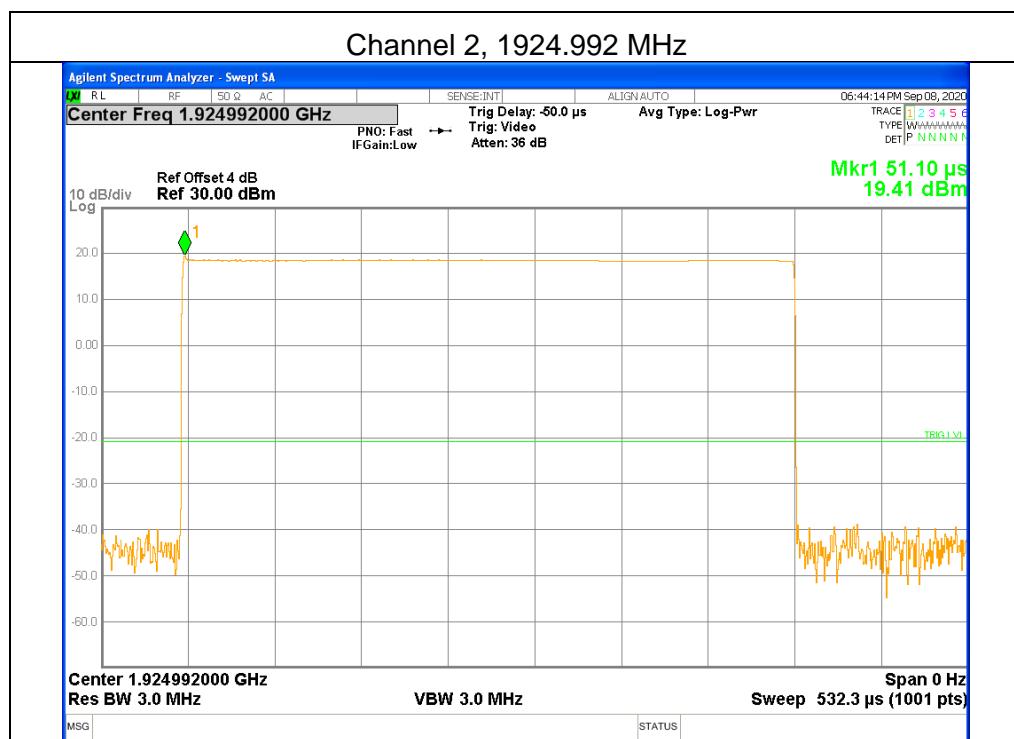



## 5.5 POWER SPECTRAL DENSITY

### TEST OVERVIEW

§15.319(d): Power spectral density shall not exceed 3 milliwatts in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.


### TEST PROCEDURE


Testing to ANSI C63.17-2013 Clause 6.1.5, which provides the test methodology for this provision.

### TEST RESULTS

Antenna 0

Carrier Channel	Frequency (MHz)	Measured Peak Power Spectral Density (dBm)	Limit(mw)	Limit(dBm)
Low(4)	1921.536	-3.26	3	4.77
Mid(2)	1924.992	-3.34		
High(0)	1928.448	-3.01		

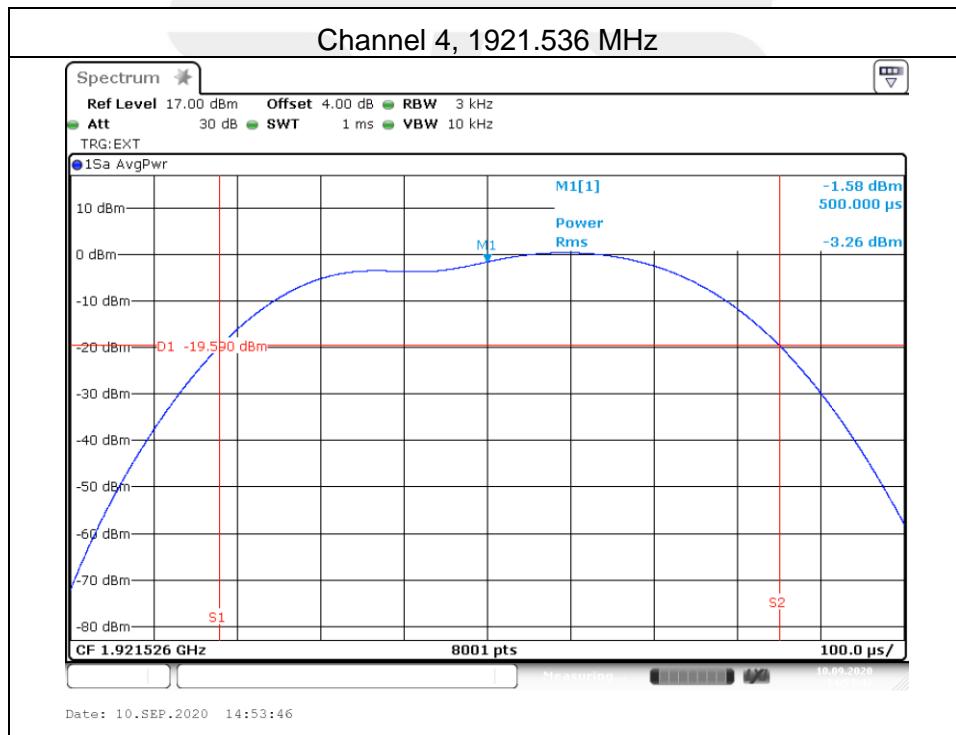


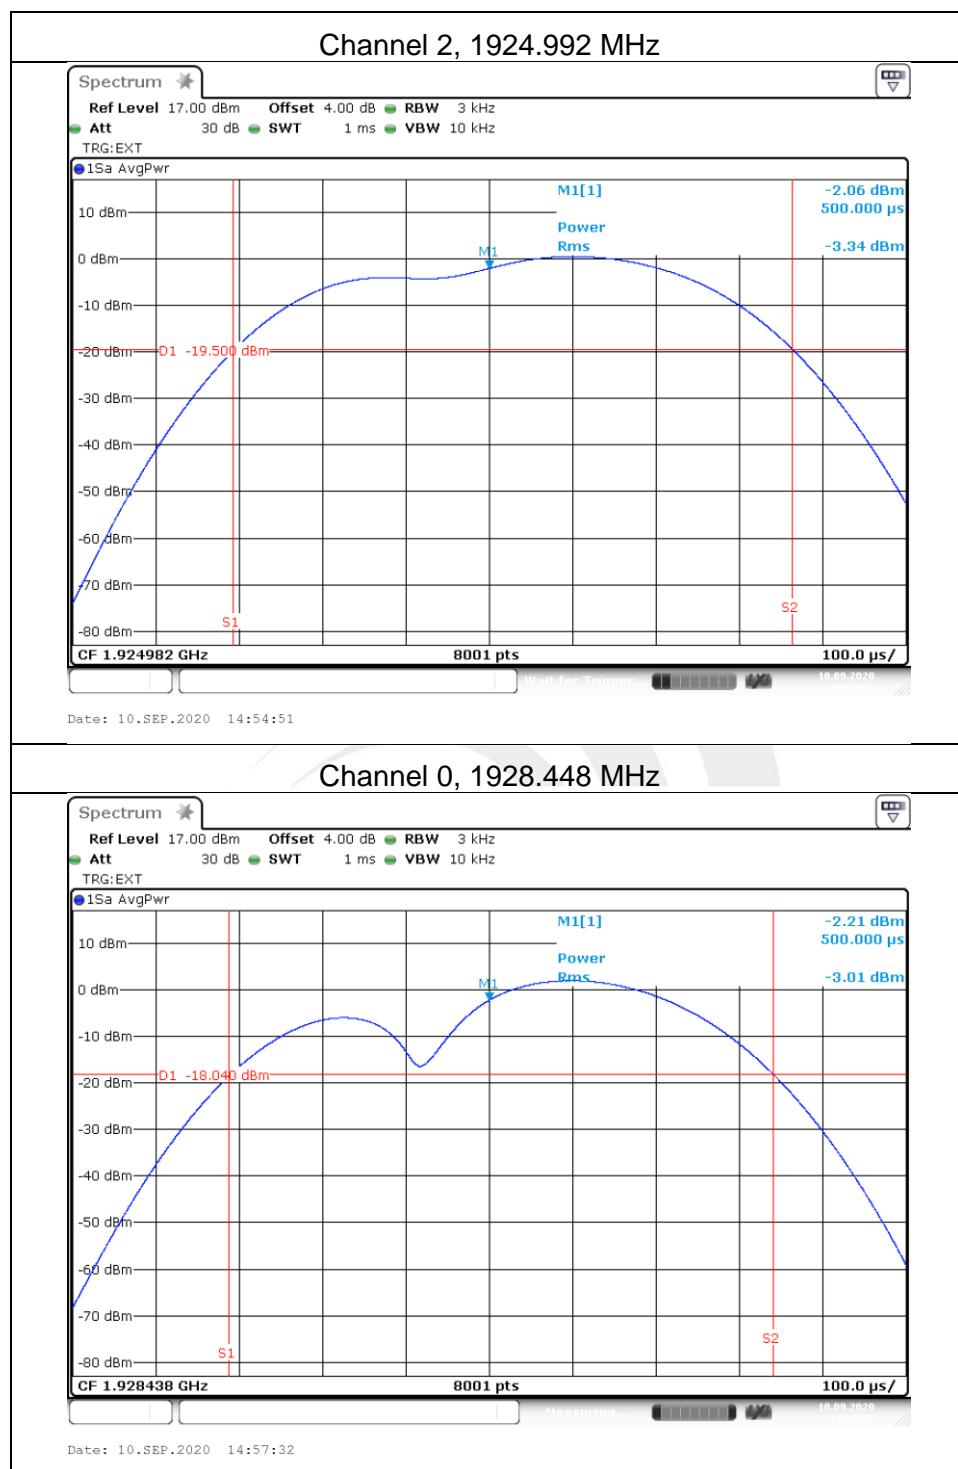




## Antenna 1

Carrier Channel	Frequency (MHz)	Measured Peak Power Spectral Density (dBm)	Limit(mw)	Limit(dBm)
Low(4)	1921.536	-2.58	3	4.77
Mid(2)	1924.992	-2.69		
High(0)	1928.448	-2.79		

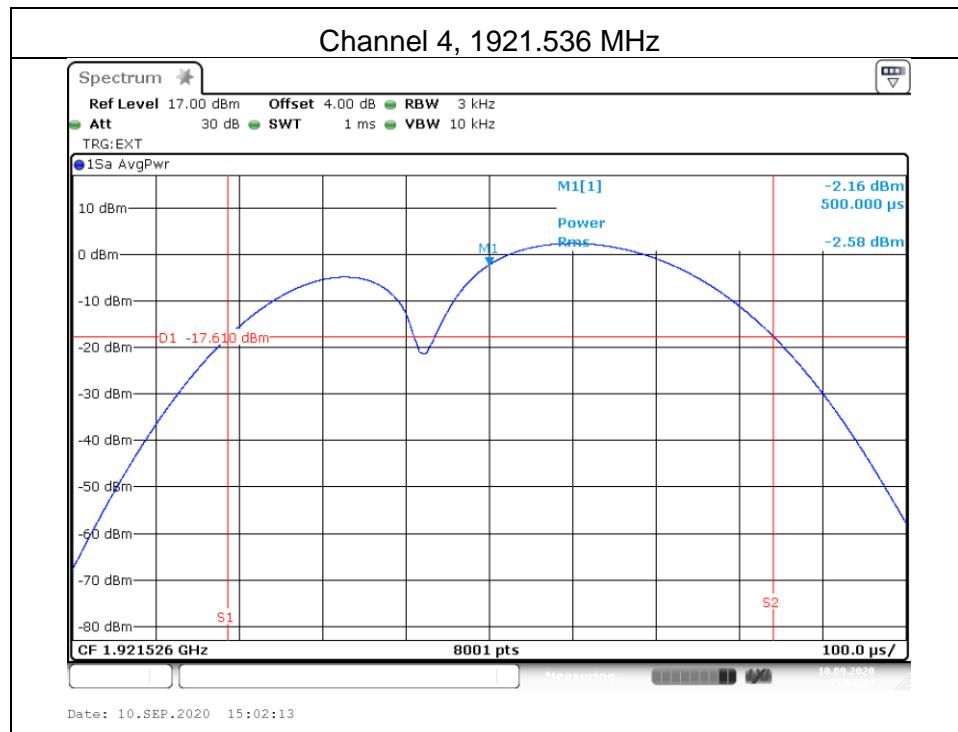

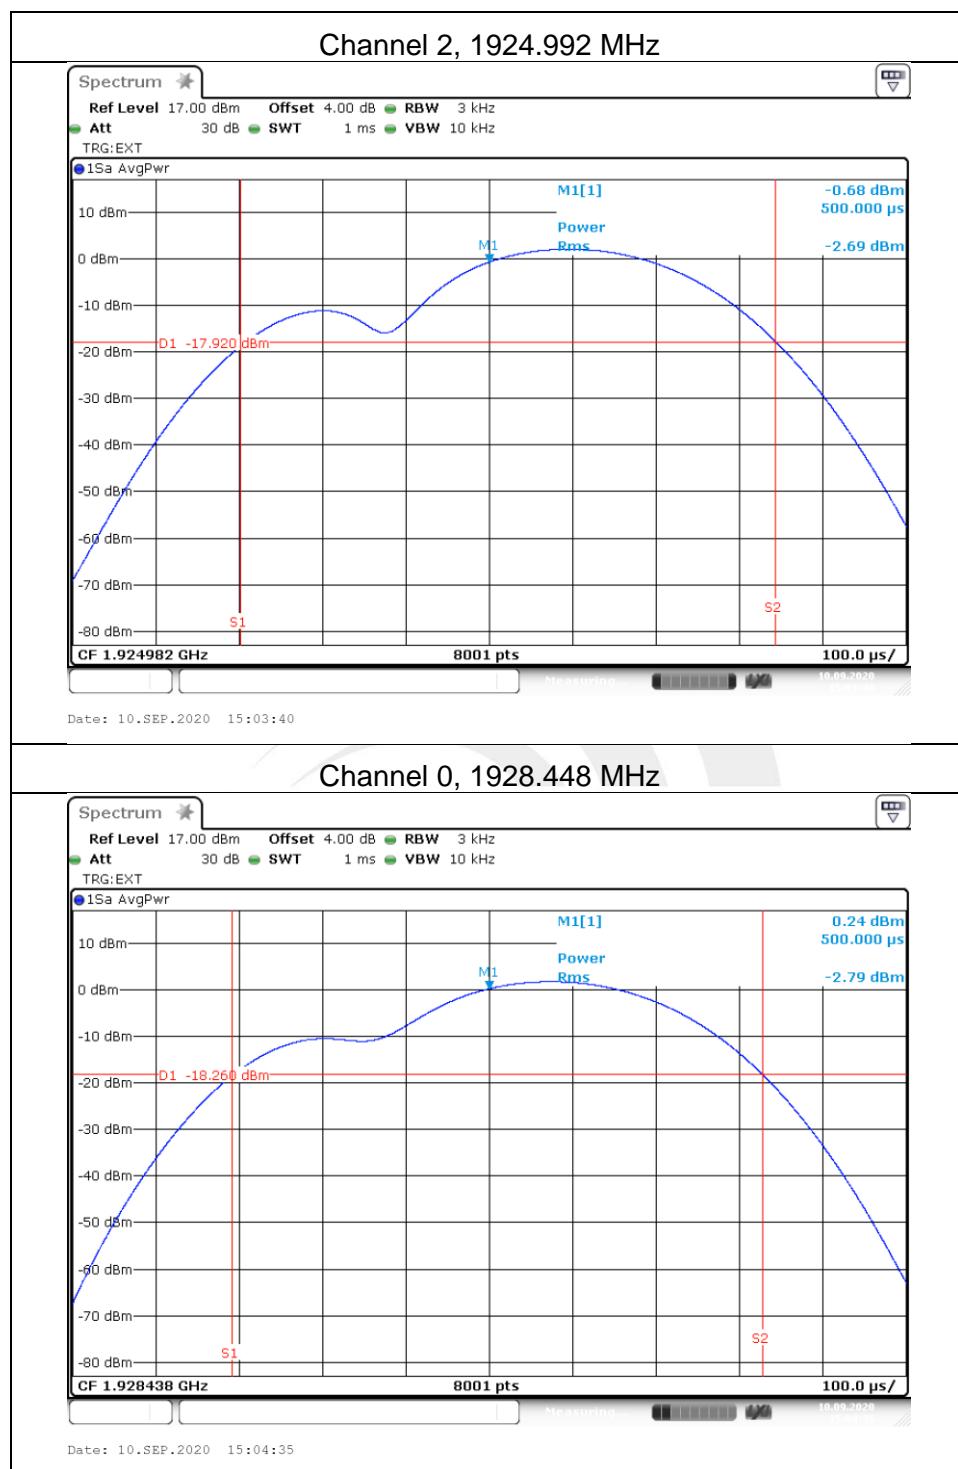



## 5.6 POWER ADJUSTMENT FOR ANTENNA GAIN

### TEST OVERVIEW

§15.319(e): The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

### TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 4.3.1, which provides the test methodology for this provision.

### TEST RESULT

Equipment Employs a 1 dBi Antenna. Max output power allowed with this gain by the EUT is 19.47dBm.

The Max output power does not need to be reduced.

The Output Power complies with the Power Adjustment for Antenna Gain requirements of §15.319(e).





## 5.7 AUTOMATICALLY DISCONTINUE TRANSMISSION

### OVERVIEW

§15.319(f) & RSS 213(5.2): The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

### TEST RESULTS

	Test	Reaction of EUT	Result
1	Remove Power from Companion Device	A	Pass
2	Switch off the companion device	A	Pass
3	Terminate call at the companion device	NA1	Pass
4	Switch off the EUT	NA2	Pass
5	Terminate call at the EUT	NA3	Pass

A - Connection was terminated and transmission ceased.

B - Connection was terminated but the EUT transmits control or signaling information.

C - Connection was terminated but the companion device transmits control or signaling information.

NA 1 - Companion Device does not have an on/off switch for terminate call.

NA 2 - EUT does not have an on/off switch.

NA 3 – EUT does not have a switch for terminate call.



## 5.8 SYSTEM ACKNOWLEDGEMENT TEST

### TEST OVERVIEW

§ 15.323(c)(4): Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.

### TEST PROCEDURE

Measurement method according to ANSI C63.17 2013 clause 8.2.1

During testing initial transmission without acknowledgement, the signal from the EUT to the companion device is blocked by the circulator.

The test of the transmission time after loss of acknowledgements is performed by cutting off the signal from the companion device by a RF switch and measuring the time until the EUT stops transmitting.

### TEST RESULTS

Antenna 0

Test	Time taken (second)	Limit (second)	Result
Initial Connection acknowledgement	0.37	1	Pass
Change of access criteria for control information	N/A	30	N/A
Transmission cease time after loss of acknowledgement	4.06	30	Pass

Antenna 1

Test	Time taken (second)	Limit (second)	Result
Initial Connection acknowledgement	0.77	1	Pass
Change of access criteria for control information	N/A	30	N/A
Transmission cease time after loss of acknowledgement	3.78	30	Pass



## 5.9 MONITORING THRESHOLD

### TEST OVERVIEW

§15.323 (c)(2) The monitoring threshold must not be more than 30 dB above the thermal noise power for a bandwidth equivalent to the emission bandwidth used by the device.

§15.323 (c)(9) Devices that have a power output lower than the maximum permitted under this sub-part may increase their monitoring detection threshold by one decibel for each one decibel that the transmitter power is below the maximum permitted.

### TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 7.3, which provides the test methodology for this provision. The Clause states that the lower threshold is for devices that do not use the LIC procedure. The equation for the lower monitoring threshold is given in ANSI C63.17 Clause 4.3.4.

### TEST RESULTS

#### Antenna 0

Upper Threshold		
B	1169300	MHz
Mu	50	dB
Peut	19.36	dBm
TU	-62.341	dBm
Lower Threshold		
B	1169300	MHz
MI	30	dB
Peut	19.4	dBm
TL	-82.381	dBm

#### Antenna 1

Upper Threshold		
B	1168367	MHz
Mu	50	dB
Peut	19.34	dBm
TU	-62.326	dBm
Lower Threshold		
B	1168367	MHz
MI	30	dB
Peut	19.47	dBm
TL	-82.456	dBm

### ATTESTATION

The sensor will go into hibernation after a few minutes. It is not possible to keep a connection running very long. Therefore, this requirement is not applicable.



## 5.10 DURATION OF TRANSMISSION

### TEST OVERVIEW

§15.323 (c)(3) If no signal above the threshold level is detected, transmission may commence and continue with the same emission bandwidth in the monitored time and spectrum windows without further monitoring. However, occupation of the same combined time and spectrum windows by a device or group of cooperating devices continuously over a period of time longer than 8 hours is not permitted without repeating the access criteria.


### Test Procedure

Testing to ANSI C63.17-2013 Clause 4, which provides the test methodology for this provision. A communication link is established between BS and MS in a conducted mode and in a room without other US DECT devices to prevent influence from other transmissions. According to FCC Part 15.323(c)(3), the access criteria have to be verified at least every 8 hours. The following test is performed:

### Test Result

Antenna 0

Test ref. to ANSI C63.17:2013 clause 8.2.2	Observation result(H)	Limit(H)	Verdict
Transmission duration on same time and frequency window	0.30	8	Pass

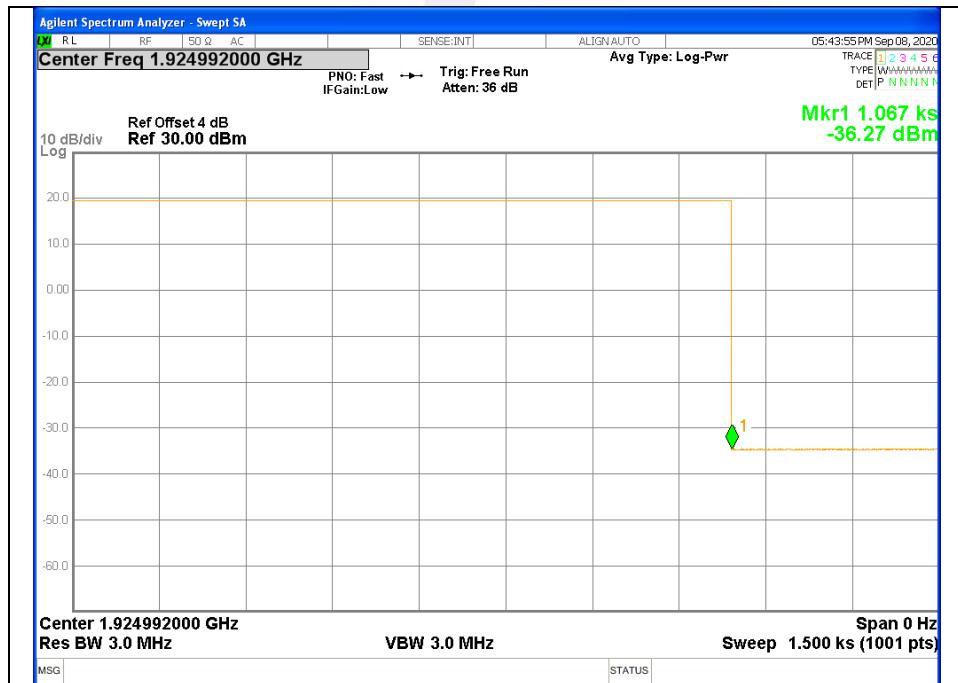



## Antenna 1

Test ref. to ANSI C63.17:2013 clause 8.2.2	Observation result(H)	Limit(H)	Verdict
Transmission duration on same time and frequency window	0.30	8	Pass





## 5.11 SELECTED CHANNEL CONFIRMATION, POWER ACCURACY, SEGMENT OCCUPANCY TEST OVERVIEW

§15.323 (c)(5) If access to spectrum is not available as determined by the above, and a minimum of 40 duplex system access channels are defined for the system, the time and spectrum windows with the lowest power level below a monitoring threshold of 50 dB above the thermal noise power determined for the emission bandwidth may be accessed. A device utilizing the provisions of this paragraph must have monitored all access channels defined for its system within the last 10 seconds and must verify, within the 20 milliseconds (40 milliseconds for devices designed to use a 20 milliseconds frame period) immediately preceding actual channel access that the detected power of the selected time and spectrum windows is no higher than the previously detected value. The power measurement resolution for this comparison must be accurate to within 6 dB. No device or group of co-operating devices located within 1 meter of each other shall during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.

### TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 7.3.2. & 7.3.3, which provides the test methodology for this provision. The current product offers 12 duplex channels per frequency channel and therefore  $12 \times 5 = 60$  duplex channels in total. Hence Part §15.323(c)(5) applies. The equation for the upper monitoring threshold is given in ANSI C63.17 Clause 4.3.3. Max measured interference level (dBm) = -85.02 dBm

### MONITORING LIMIT THRESHOLD

The EUT's monitoring limit threshold power at the monitoring antenna terminals shall be less than a maximum, shown in Equation (3):

$$T_L \leq (-174 + 10 \log B + M_L + P_{MAX} - P_{EUT}) \text{ dBm}$$

$M_L$  is a level specified by the manufacturer and is the maximum amount in decibels by which the limiting threshold may exceed thermal noise for an EUT transmitting the maximum allowed power.

Calculation of monitoring threshold limits for isochroous devices:

Lower threshold:  $T_L = -174 + 10 \log_{10} B + M_L + P_{MAX} - P_{EUT}$  (dBm)

Where:  $B$  = Emission bandwidth (Hz)

$M_L$  = dB the threshold may exceed thermal noise (30 for  $T_L$ )

$P_{MAX} = 5 \log_{10} B - 10$  (dBm)

$P_{EUT}$  = Transmitted power (dBm)

Monitor Threshold	B(MHz)	$M_L$ (dB)	$P_{MAX}$ (dBm)	$P_{EUT}$ (dBm)	Threshold(dBm)
Lower threshold	1.271	30	25.52	19.47	-82.381

Note: 1. The upper threshold is applicable as the EUT utilizes more than 20 duplex system channels



## TEST RESULTS

### 1) LIC procedure test:

Interference (Refer to ANSI C63.17 clause 7.3.3)	Reaction fo EUT	Results
a) Apply the interference on $f_1$ at level $T_L+U_M+7\text{dB}$ and the interference on $f_2$ at level $T_L+U_M$ . Initiate transmission and verify the transmission only on $f_2$ .Repeat 5 times.	EUT transmits on $f_2$	Pass
b) Apply the interference on $f_1$ at level $T_L+U_M$ and the interference on $f_2$ at level $T_L+U_M+7\text{dB}$ . Initiate transmission and verify the transmission only on $f_1$ .Repeat 5 times.	EUT transmits on $f_1$	Pass
c) Apply the interference on $f_1$ at level $T_L+U_M+1\text{dB}$ and the interference on $f_2$ at level $T_L+U_M-6\text{dB}$ . Initiate transmission and verify the transmission only on $f_2$ .Repeat 5 times.	EUT transmits on $f_2$	Pass
d) Apply the interference on $f_1$ at level $T_L+U_M-6\text{dB}$ and the interference on $f_2$ at level $T_L+U_M+1\text{dB}$ . Initiate transmission and verify the transmission only on $f_2$ .Repeat 5 times.	EUT transmits on $f_1$	Pass

### 2) Selected channel confirmation:

Interference (Refer to ANSI C63.17 clause 7.3.4)	Reaction fo EUT	Results
a) Apply the interference on $f_1$ at level $T_L+U_M$ and no interference on $f_2$ . Initiate transmission and verify the transmission only on $f_2$ .Then terminate it.	EUT transmits on $f_2$	Pass
b) Apply the interference on $f_2$ at level $T_L+U_M$ and immediately remove all interference from $f_1$ . The EUT should immediately attempt transmission $f_1$ (but at least 20ms after the interference on $f_2$ is applied), verify the transmission only on $f_1$ .	EUT transmits on $f_1$	Pass



## 5.12 RANDOM WAITING TEST CRITERIA

§15.323 (c)(6) if the selected combined time and spectrum windows are unavailable, the device may either monitor and select different windows or seek to use the same windows after waiting an amount of time, randomly chosen from a uniform random distribution between 10 and 150 milliseconds, commencing when the channel becomes available.

### TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 8.1.3, which provides the test methodology for this provision.

### ATTESTATION

The Manufacturer declared that this provision is not utilized by the EUT.





## 5.13 MONITORING REQUIREMENTS

### TEST CRITERIA

§15.323 (c)(7) The monitoring system bandwidth must be equal to or greater than the emission bandwidth of the intended transmission and have a maximum reaction time less than  $50 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$  microseconds for signals at the applicable threshold level but shall not be required to be less than 50 microseconds. If a signal is detected that is 6 dB or more above the applicable threshold level, the maximum reaction time shall be  $35 \times \text{SQRT}(1.25/\text{emission bandwidth in MHz})$  microseconds but shall not be required to be less than 35 microseconds.

### TEST PROCEDURE

Measurement method according to ANX1 C63.17 2013 clause 7.5

- a) Restrict the EUT to a single transmit carrier frequency  $f_1$ , and verify that the EUT can establish a connection with no interference applied on  $f_1$ .
- b) Apply time-synchronized, pulsed interference on  $f_1$  at the pulsed level  $TL+UM$ , verify that the EUT does not establish a connection when the width of the interference pulse exceeds the largest of  $50\mu\text{s}$  and  $50 \sqrt{1.25 / B} \mu\text{s}$ , where  $B$  is the emission bandwidth of the EUT in megahertz.
- c) With the channel interference level 6dB above  $TL+UM$ , verify that the EUT does not establish a connection when the width of the interference pulse exceeds the largest of  $35\mu\text{s}$  and  $35\sqrt{1.25/B}\mu\text{s}$ , where  $B$  is the emission bandwidth of the EUT in megahertz.

Test pulse width Equation( $\mu\text{s}$ )	$B(\text{bandwidth})(\text{MHz})$	Pulse width( $\mu\text{s}$ )	Limit(Largest)( $\mu\text{s}$ )
$50(1.25/B)^{1/2}$	1.271	49.59	50
$35(1.25/B)^{1/2}$	1.213	34.71	35

### TEST RESULTS

#### 1) Monitoring Bandwidth:

The antenna of the EUT used for monitoring is the same interior antenna that used for transmission, so the monitoring system bandwidth is equal to the emission bandwidth of the intended transmission.

#### 2) Reaction Time Test:

No.	Interference Pulse width( $\mu\text{s}$ )	Reaction of EUT	Observing time( $\mu\text{s}$ )	Result
1	$50 \mu\text{s}$ with level $T_L+U_m$	No transmission	25.2	Pass
2	$35 \mu\text{s}$ with level $T_L+U_M +6\text{dB}$	No transmission	18.71	Pass



## 5.14 MONITORING ANTENNA

### TEST CRITERIA

§15.323 (c)(8) Transmission is intended to occupy. The following criteria must be met: (8) The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

### TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 4, which provides the test methodology for this provision.

### ATTESTATION

The EUT uses the same antennas for transmission and reception as for monitoring

## 5.15 DUPLEX CONNECTIONS

### TEST CRITERIA

§15.323 (c)(10) An initiating device may attempt to establish a duplex connection by monitoring both its intended transmit and receive time and spectrum windows. If both the intended transmit and receive time and spectrum windows meet the access criteria, then the initiating device can initiate a transmission in the intended transmit time and spectrum window. If the power detected by the responding device can be decoded as a duplex connection signal from the initiating device, then the responding device may immediately begin transmitting on the receive time and spectrum window monitored by the initiating device.

### TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 8.3, which provides the test methodology for this provision. The MS is the initiating device and the BS is the companion device.

### TEST RESULTS

The Manufacturer declares that this provision is not utilized by the EUT.



## 5.16 ALTERNATIVE MONITORING INTERVAL FOR CO-LOCATED DEVICES

### TEST CRITERIA

§15.323 (c)(11) an initiating device that is prevented from monitoring during its intended transmit window due to monitoring system blocking from the transmissions of a co-located (within one meter) transmitter of the same system, may monitor the portions of the time and spectrum windows in which they intend to receive over a period of at least 10 milliseconds. The Monitored time and spectrum window must total at least 50 percent of the 10 millisecond frame interval and the monitored spectrum must be within the 1.25 mhz frequency channel(s) already occupied by that device or co-located co-operating devices. If the access criteria is met for the intended receive time and spectrum window under the above conditions, then transmission in The intended transmit window by the initiating device may commence.

### TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 8.4, which provides the test methodology for this provision. The MS is initiating device and the BS is the companion device.

### TEST RESULTS

The Manufacturer declares that this provision is not utilized by the EUT.

## 5.17 FAIR ACCESS

### TEST CRITERIA

§15.323 (c)(12) The provisions of (c)(10) or (c)(11) of this section shall not be used to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.

### TEST PROCEDURE

The manufacturer supplies an attestation.

### ATTESTATION

The manufacturer declares that the EUT does not work in a mode which denies fair access to spectrum for other devices.



## 5.18 SPURIOUS EMISSIONS

### TEST CRITERIA

#### §15.323(d)(1): Out of Band Emissions

Emissions shall be attenuated below a reference power of 112 milliwatts as follows: 30 dB between the band edge and 1.25 MHz above or below the band; 50 dB between 1.25 and 2.5 MHz above or below the band; and 60 dB at 2.5 MHz or greater above or below the band.

#### §15.323(d)(2): In-Band Emissions

Emissions inside the band must comply with the following emission mask: In the bands between 1B and 2B measured from the center of the emission bandwidth, the total power emitted by the device shall be at least 30 dB below the transmit power permitted for that device; in the bands between 2B and 3B measured from the center of the emission bandwidth, the total power emitted by an intentional radiator shall be at least 50 dB below the transmit power permitted for that radiator; in the bands between 3B and the band edge, the total power emitted by an intentional radiator in the measurement bandwidth shall be at least 60 dB below the transmit power permitted for that radiator. "B" is defined as the emission bandwidth of the device in hertz. Compliance with the emission limits is based on the use of measurement instrumentation employing peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

### TEST PROCEDURE


For both in and out of band emissions the EUT was connected directly to a spectrum analyzer. The RBW of the spectrum analyzer was set to a minimum 1% of the emission band width.



### TEST RESULTS

Equipment complies with the Spurious Emission limits of § 15.323(d)(1).

#### In-Band Emissions



Antenna 0

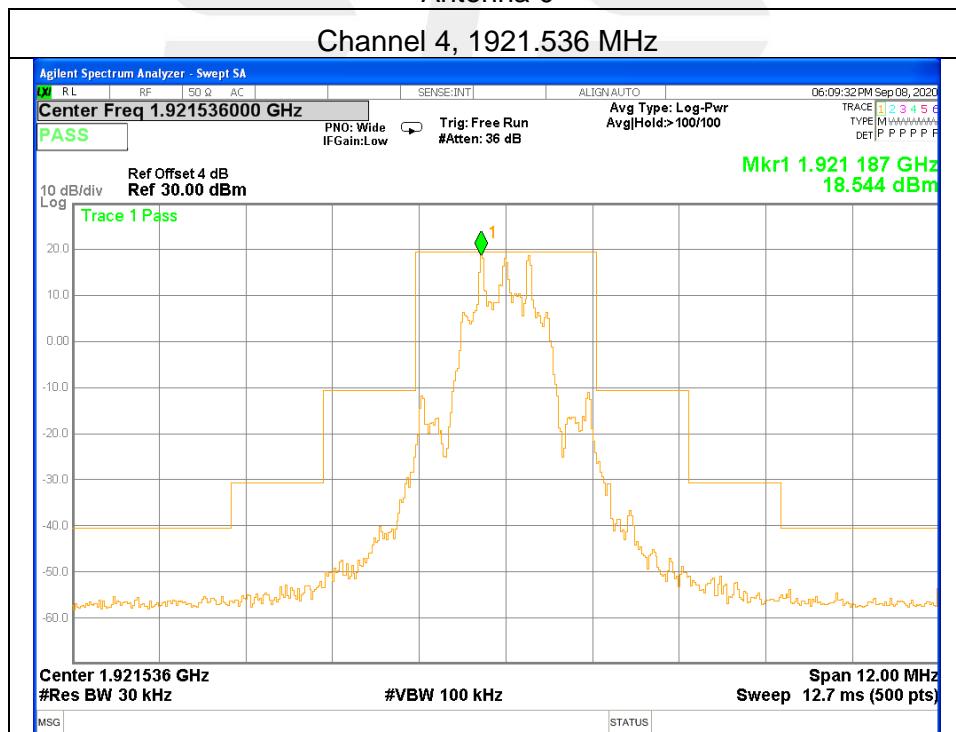


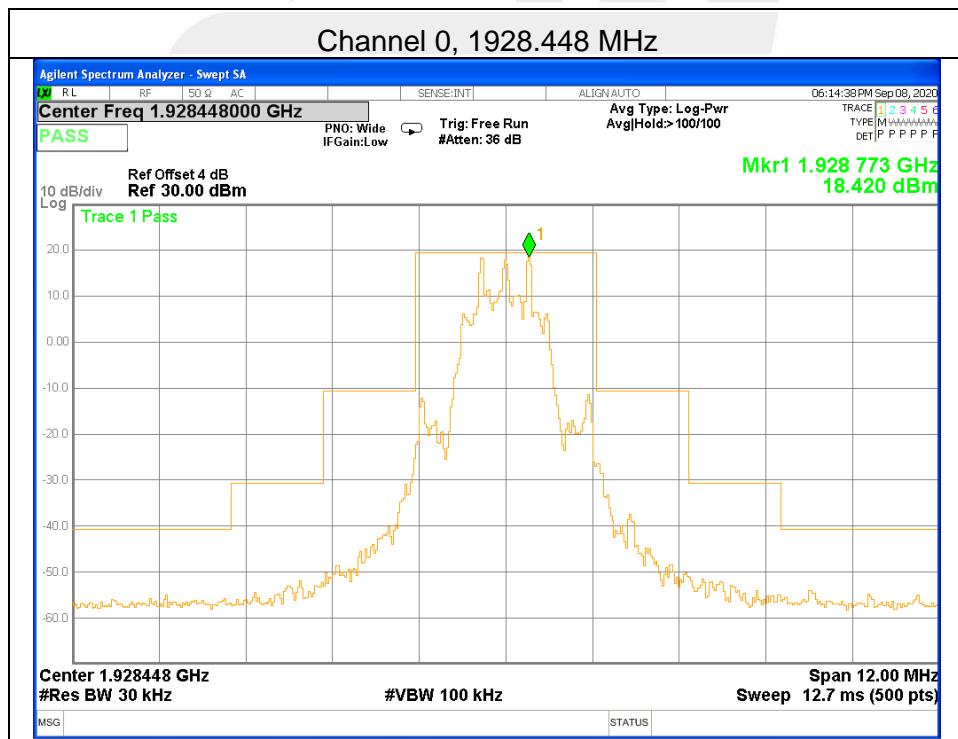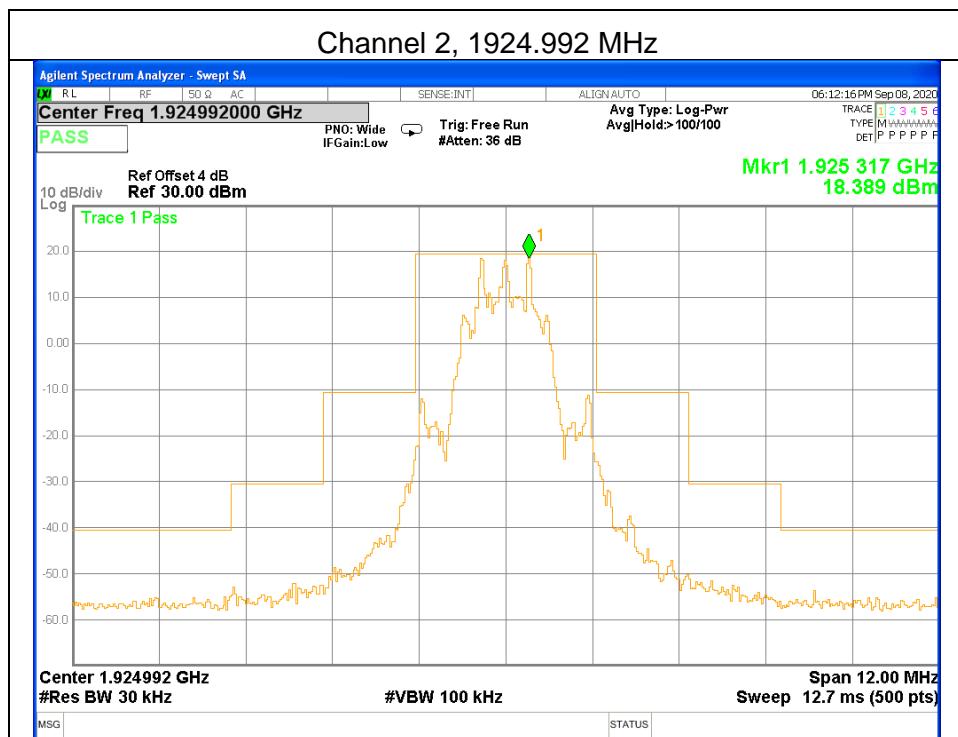



Antenna 1

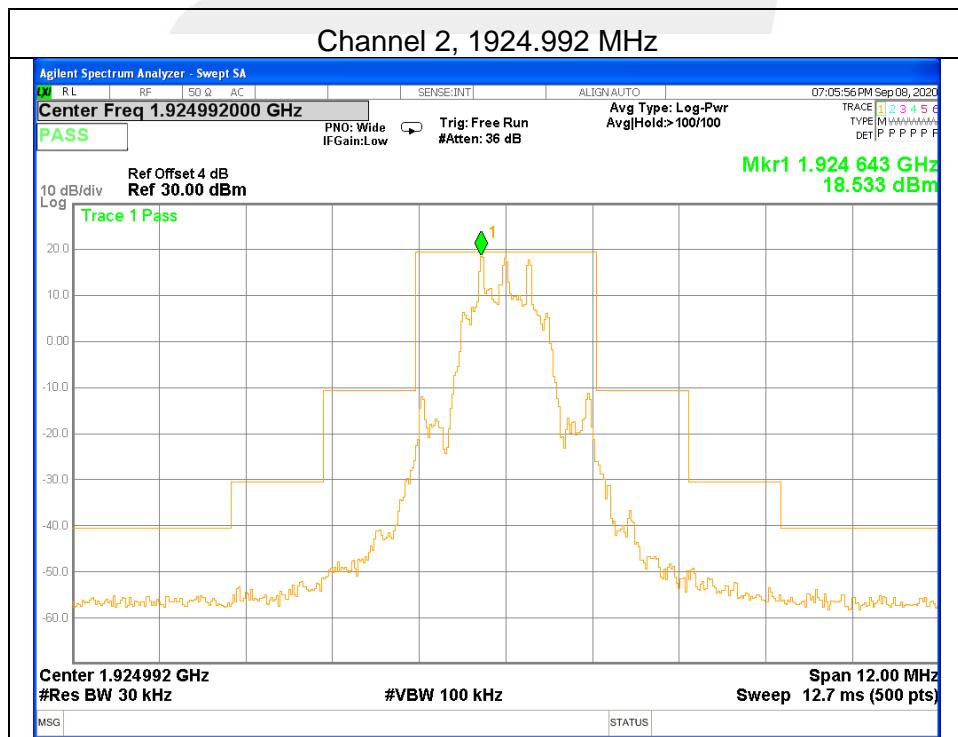
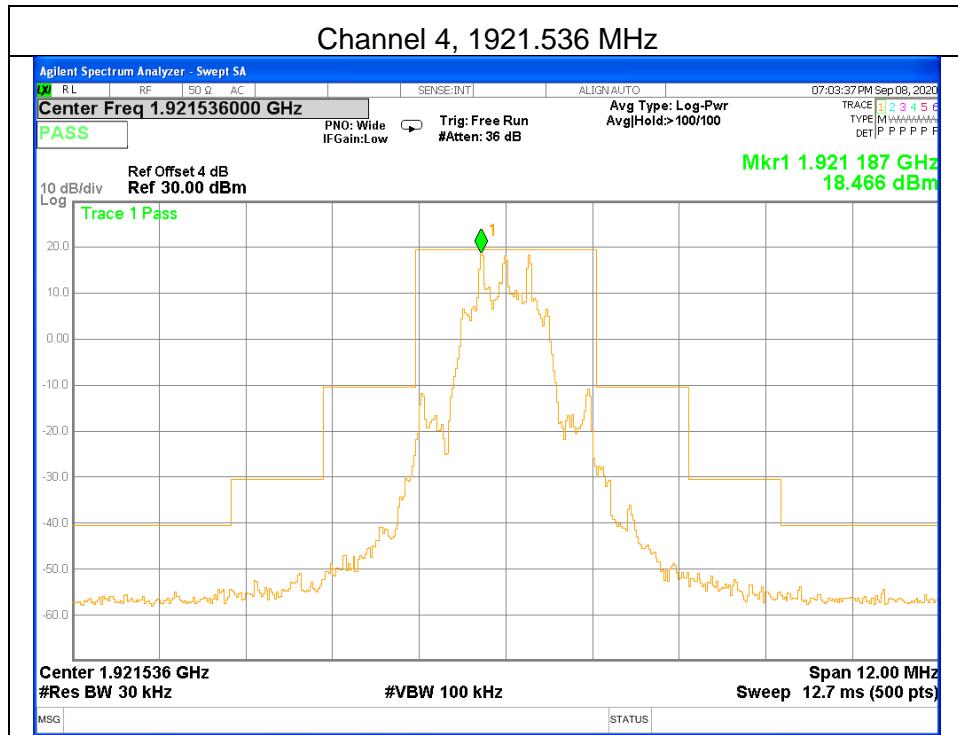



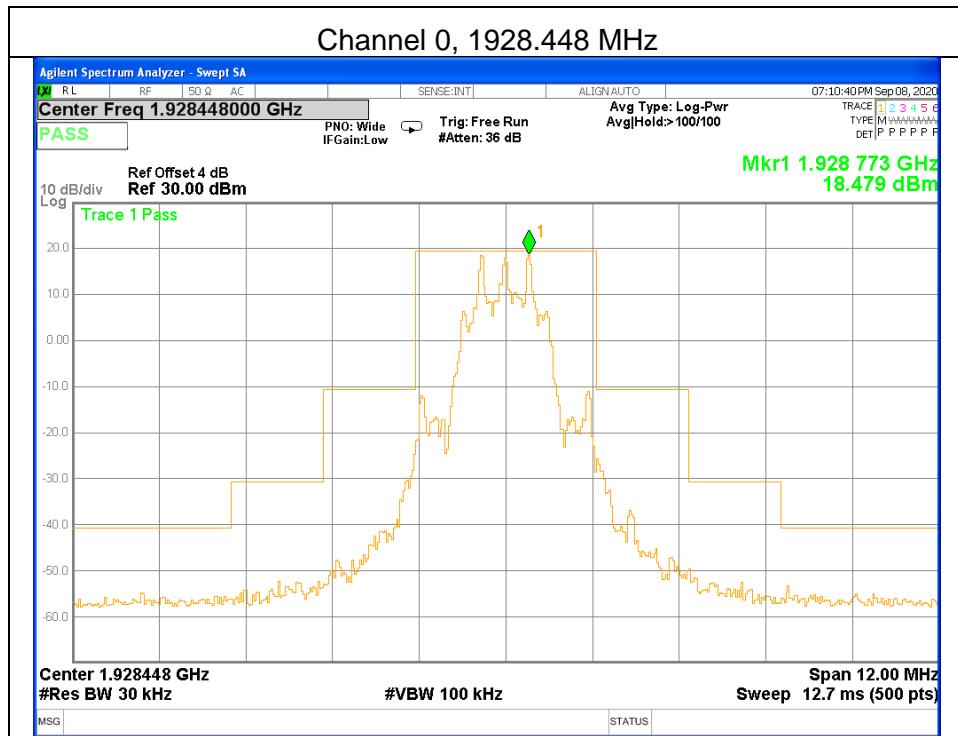








## Out of Band Emissions



Antenna 0

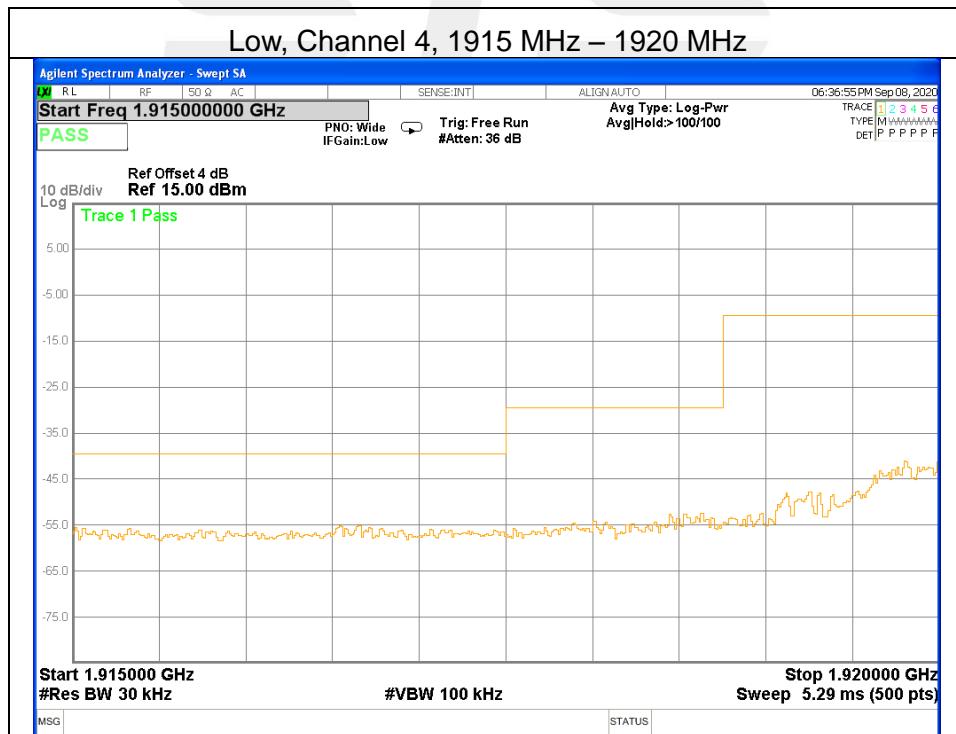
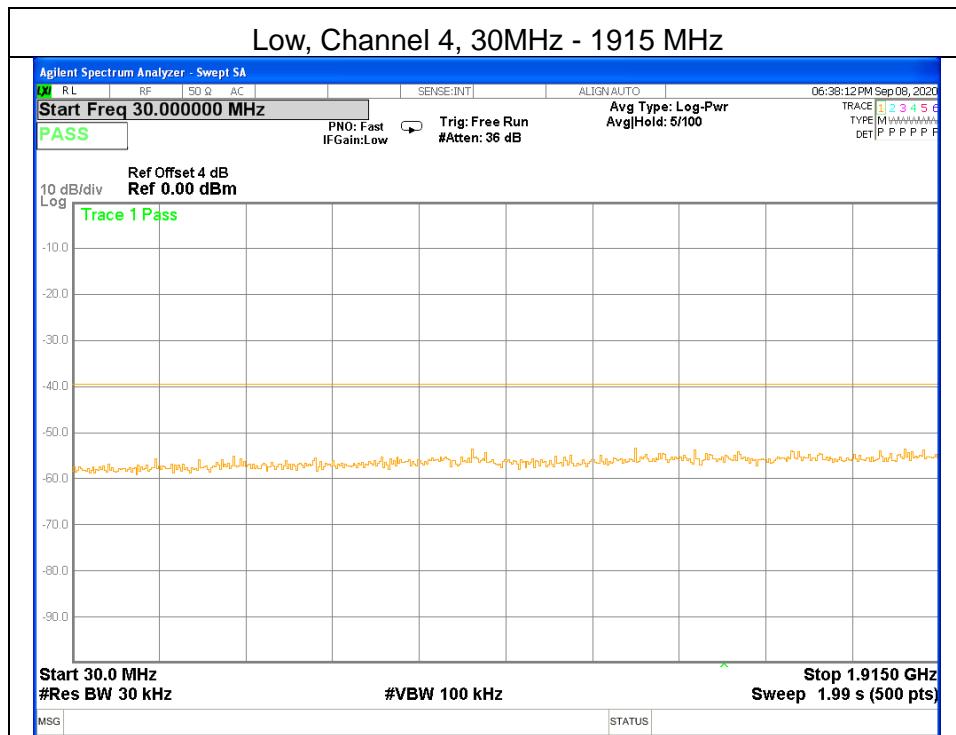


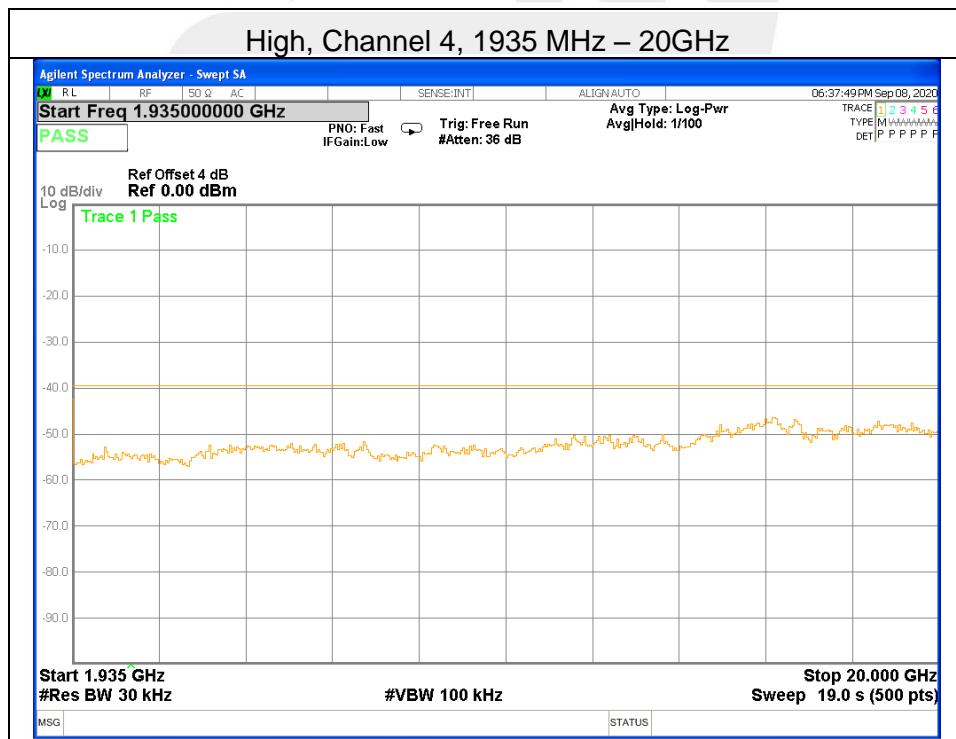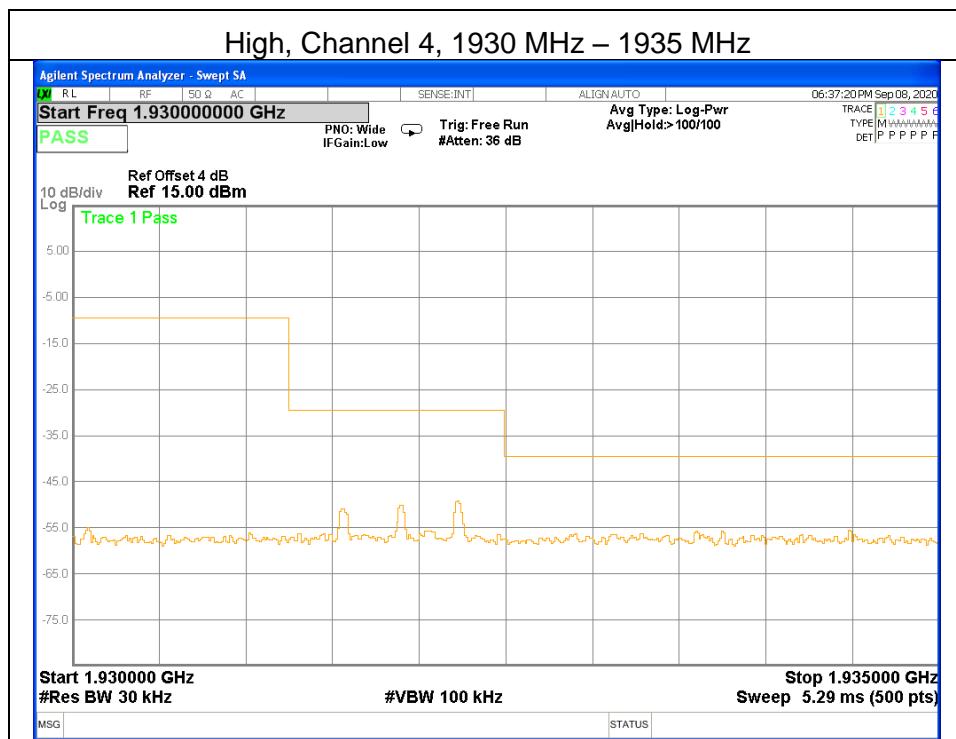

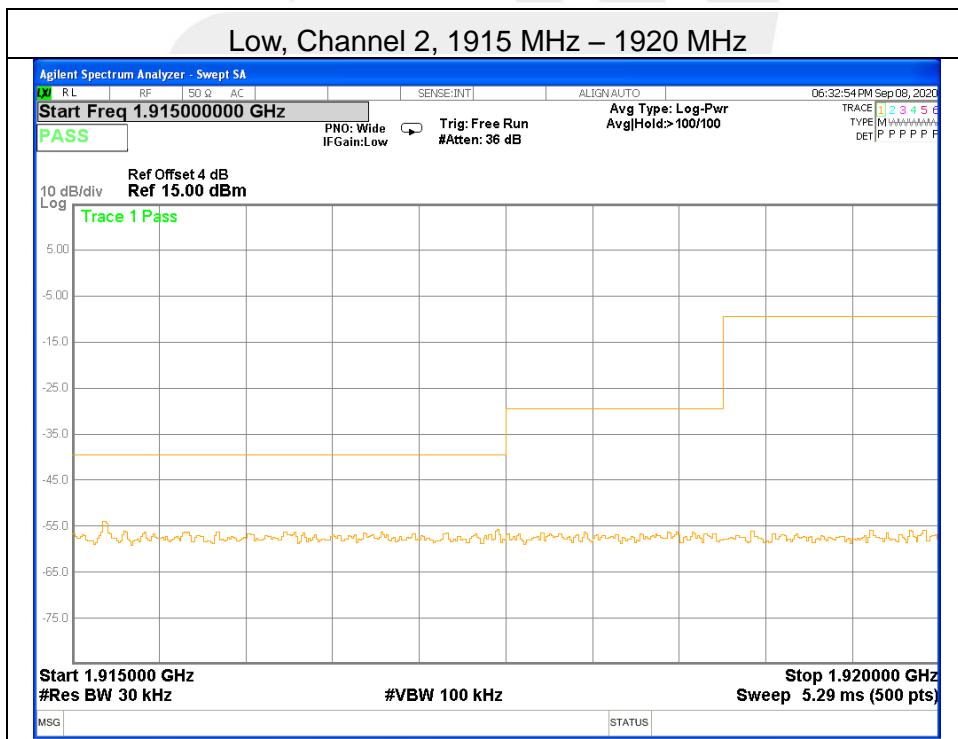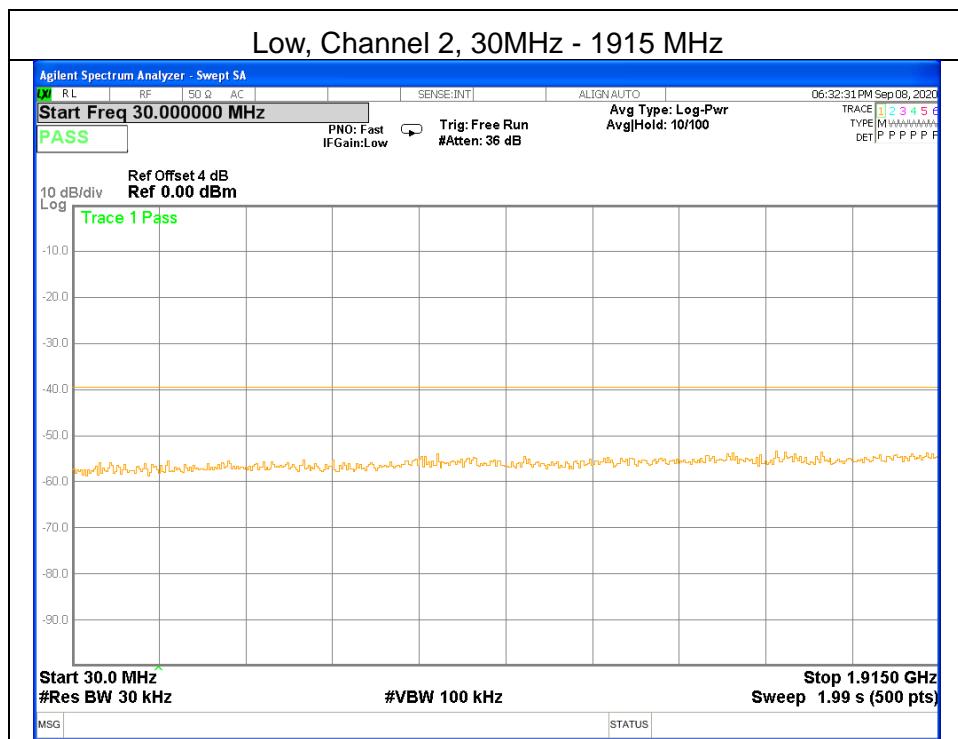

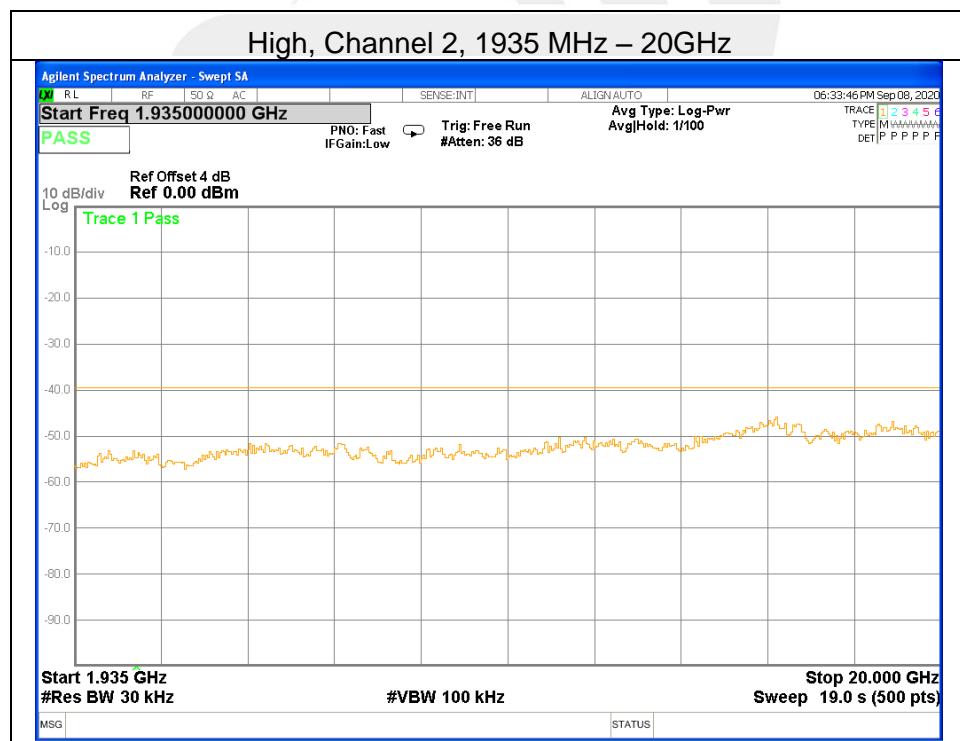
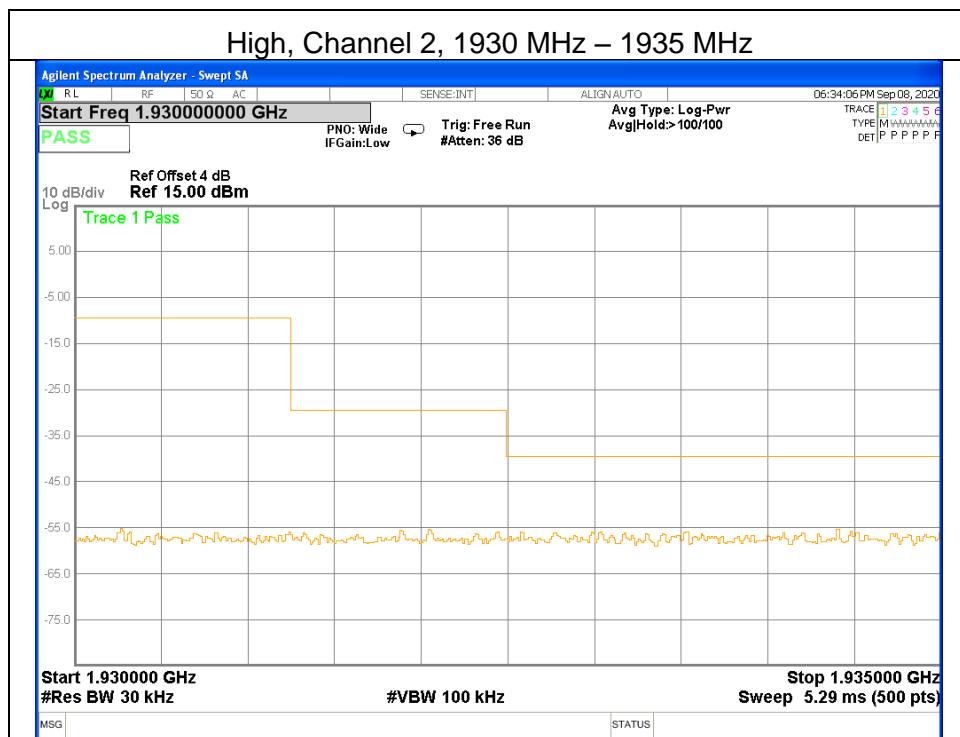


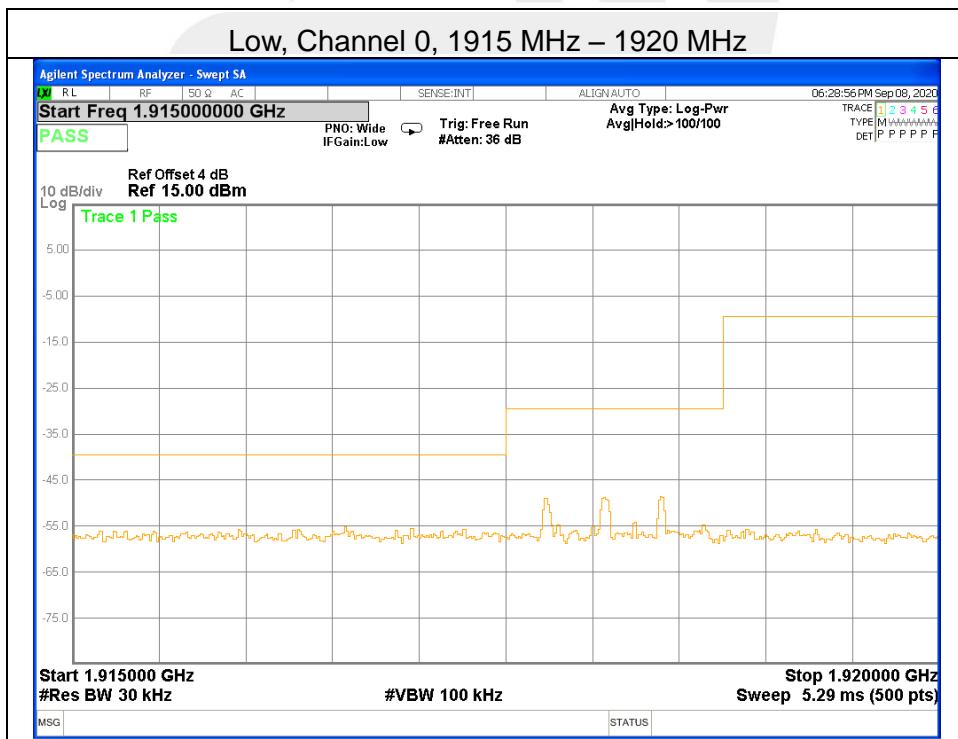
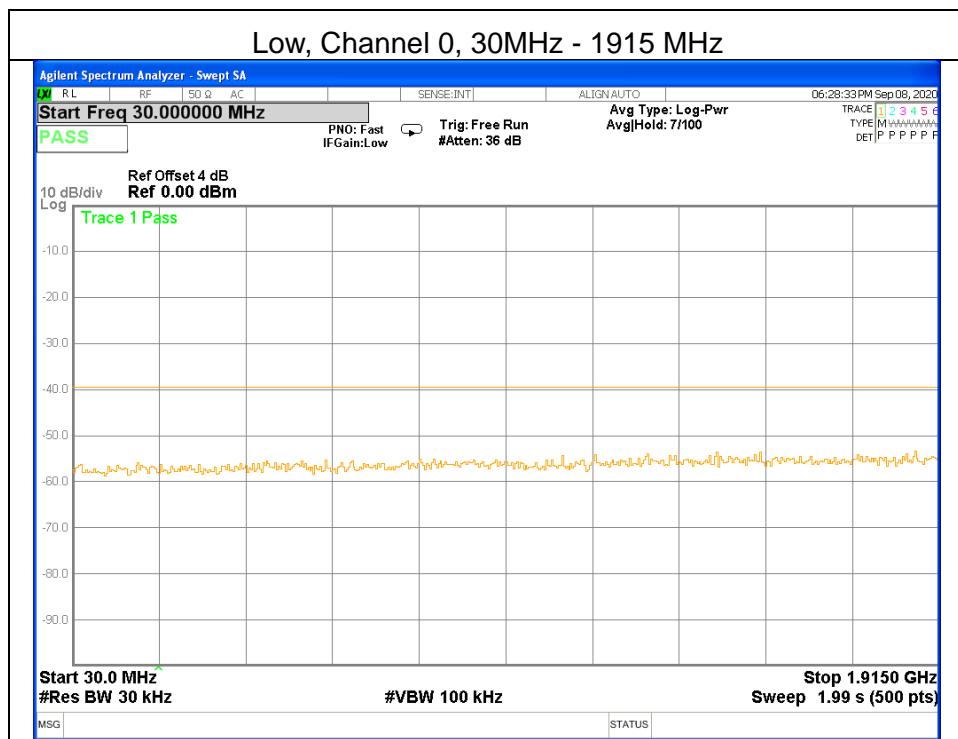


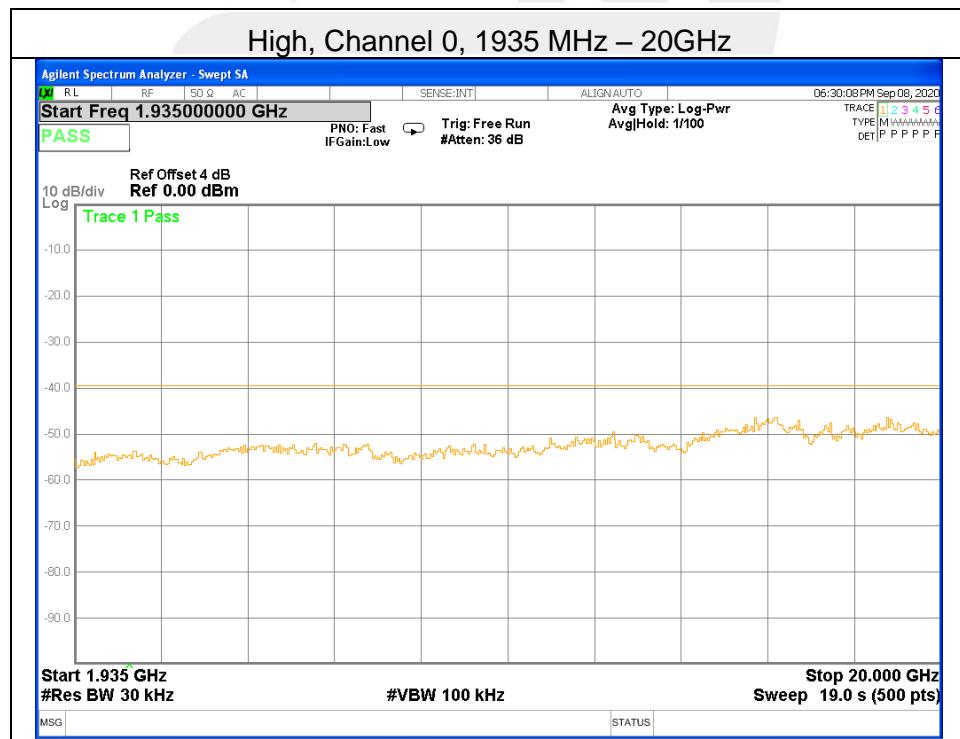
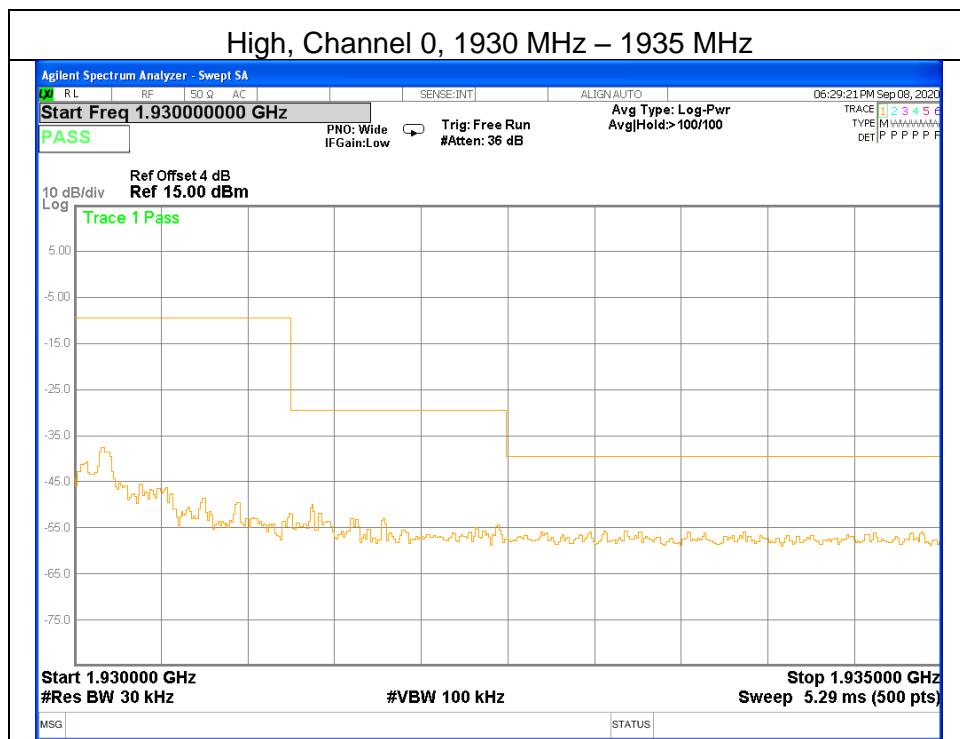








Antenna 1

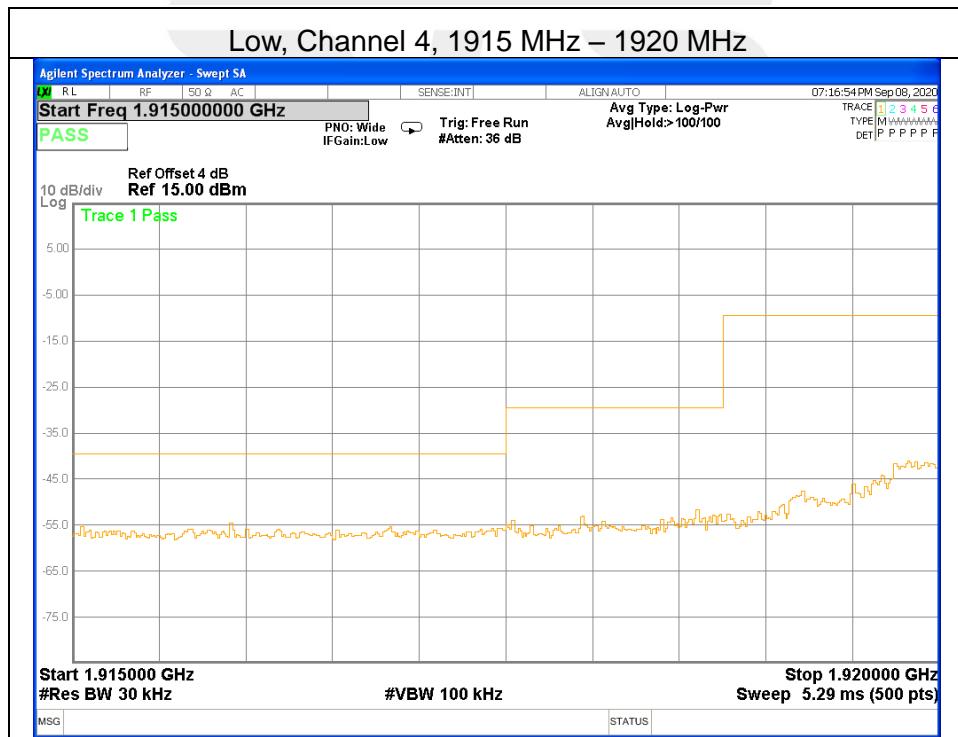
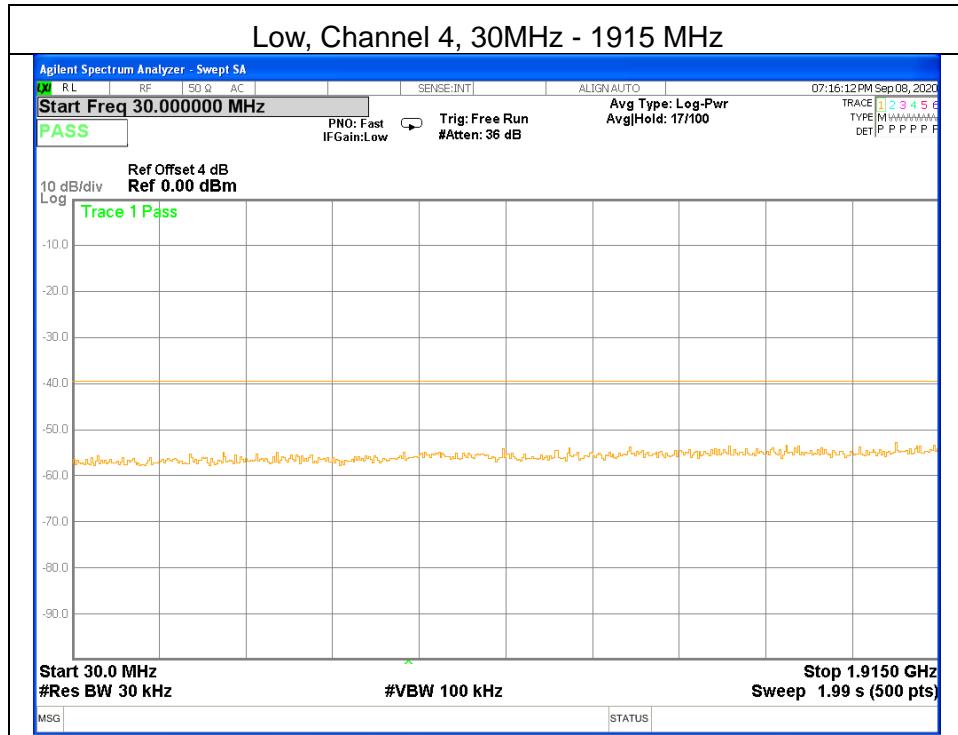


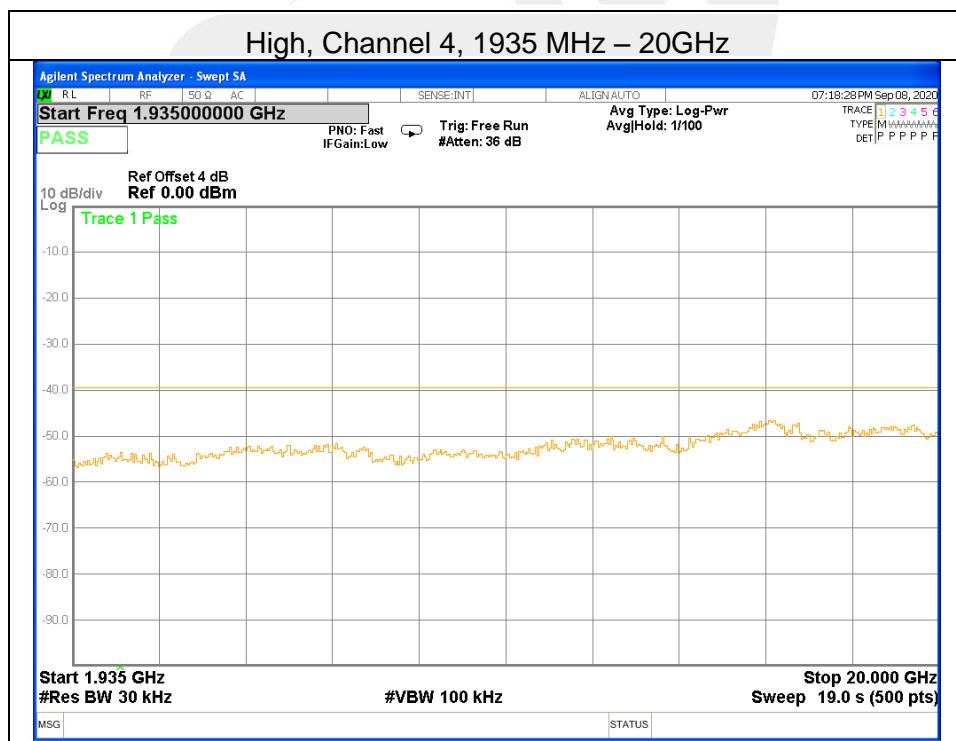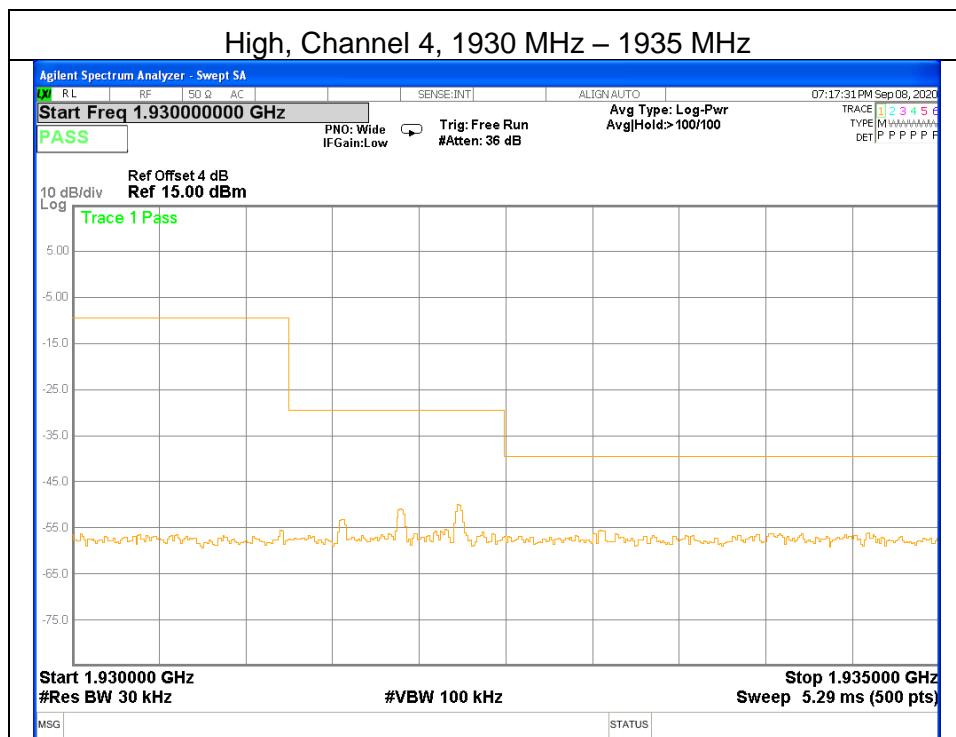

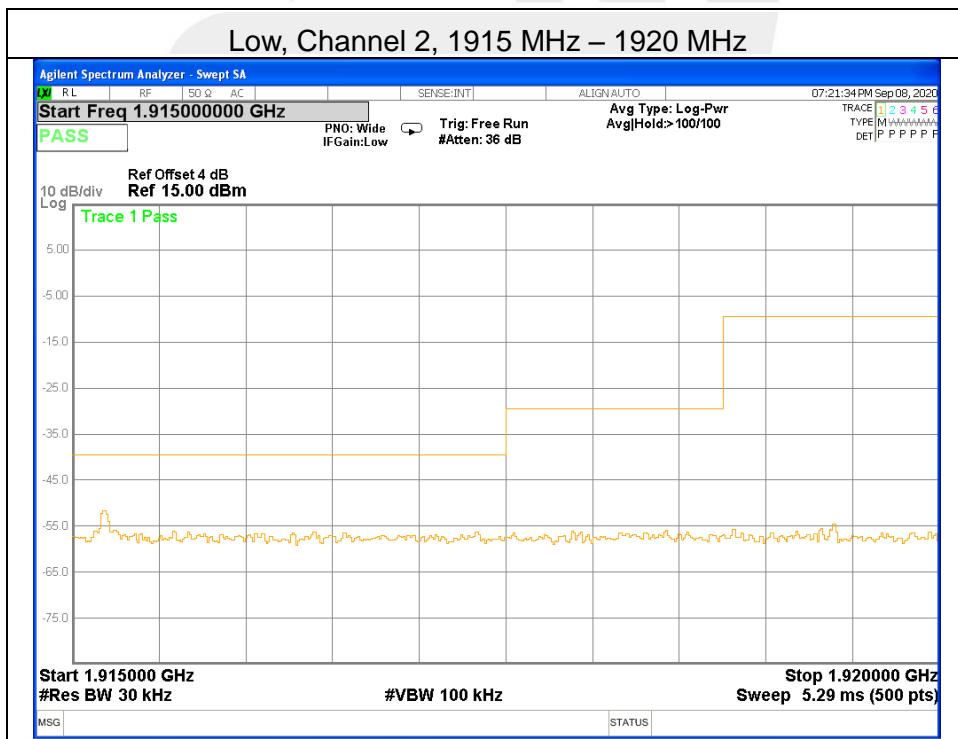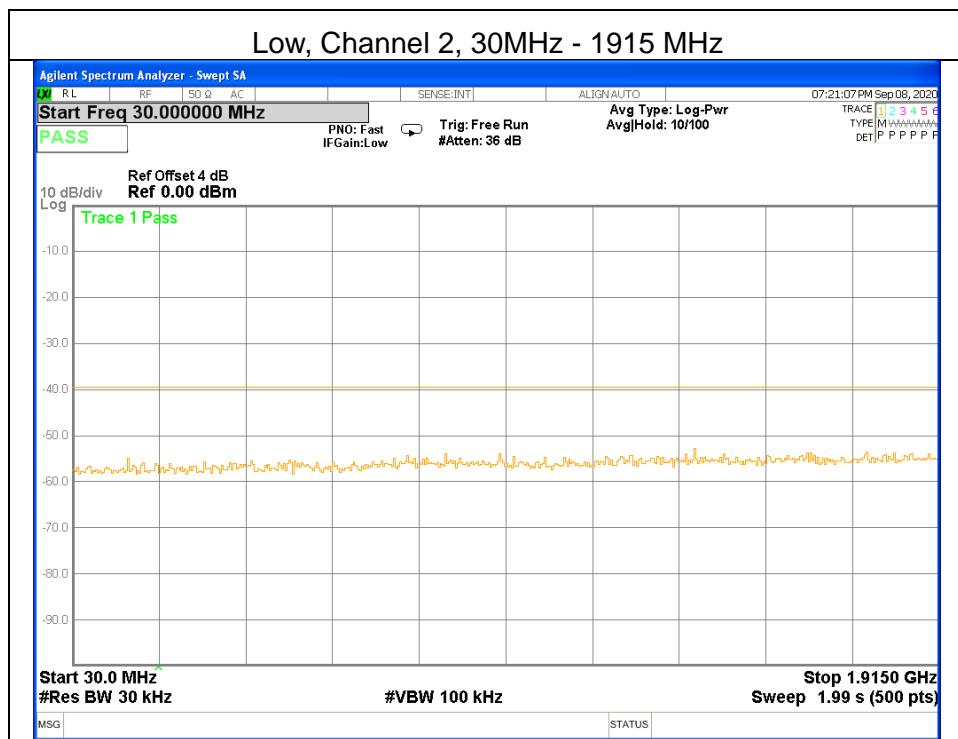

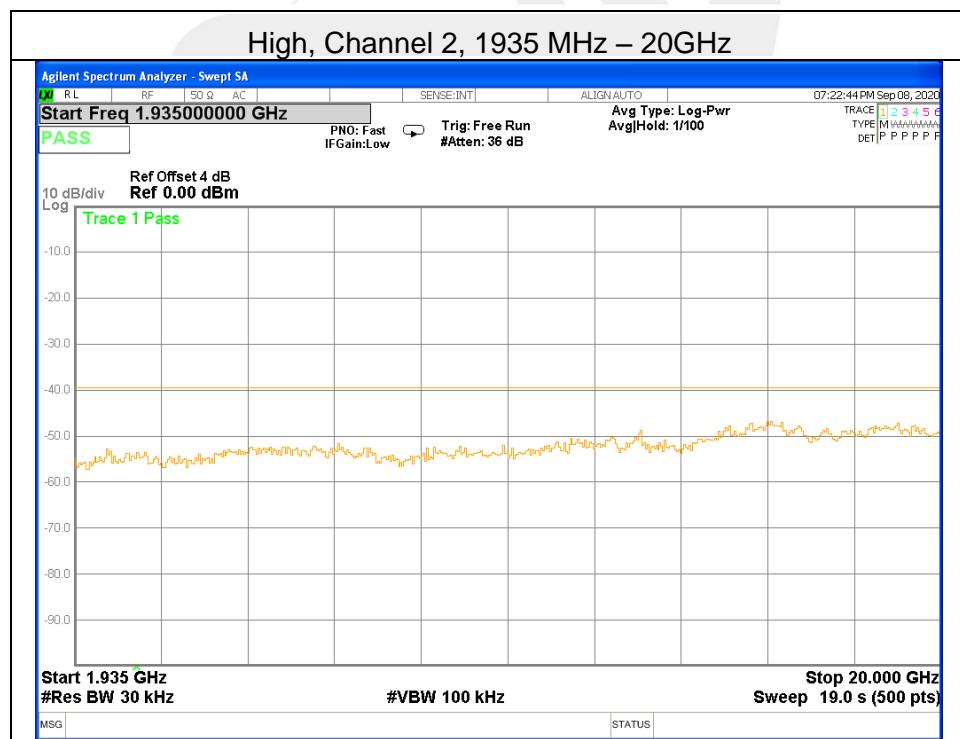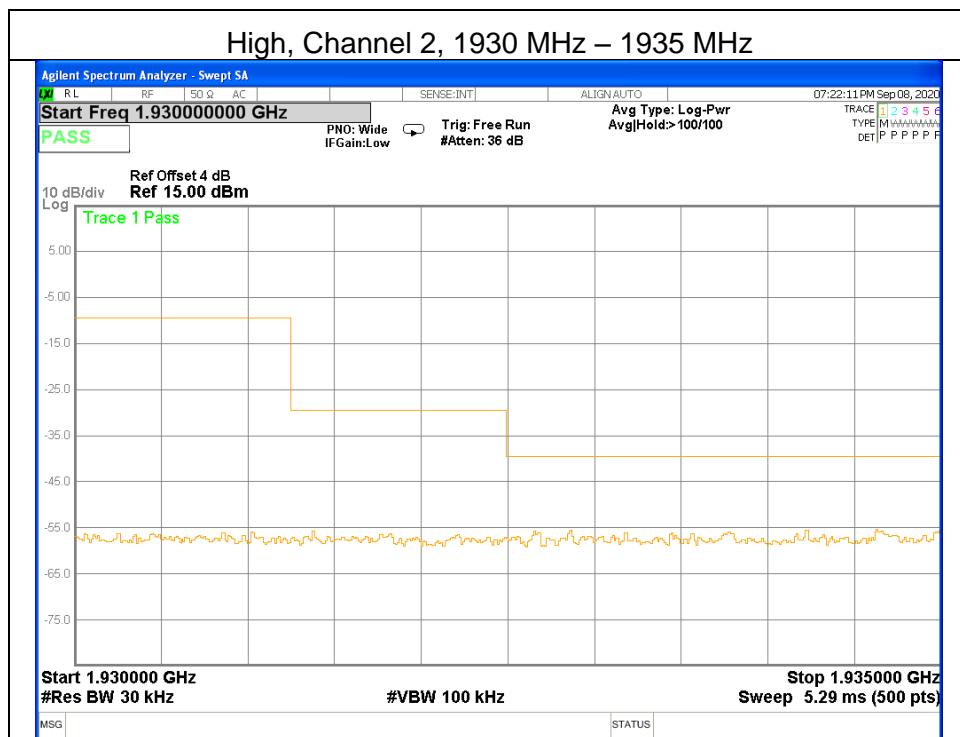

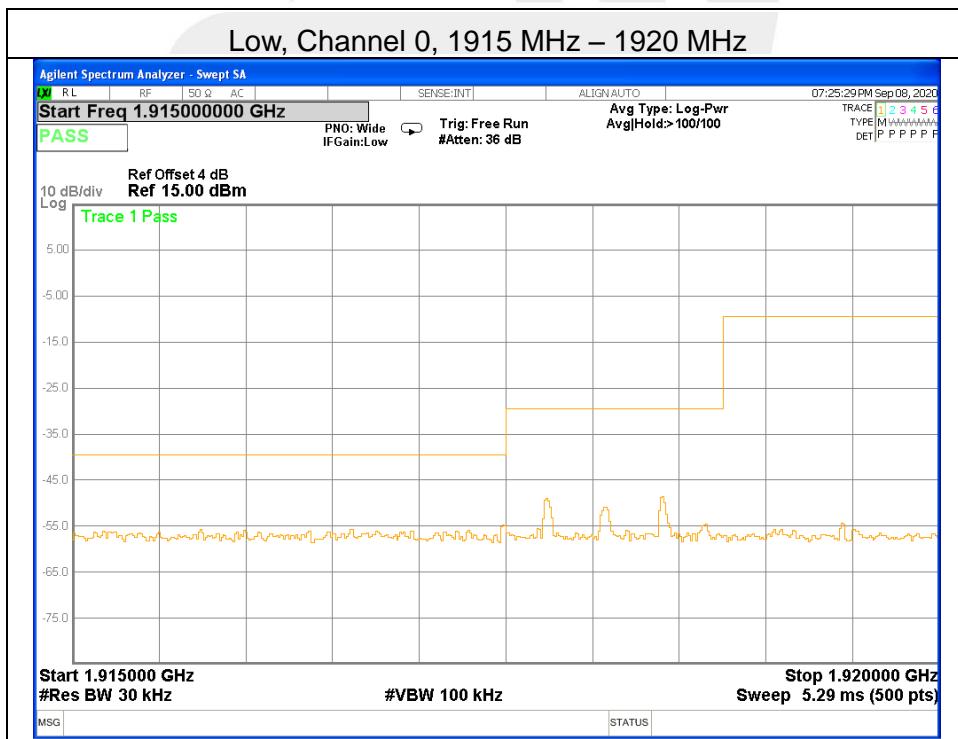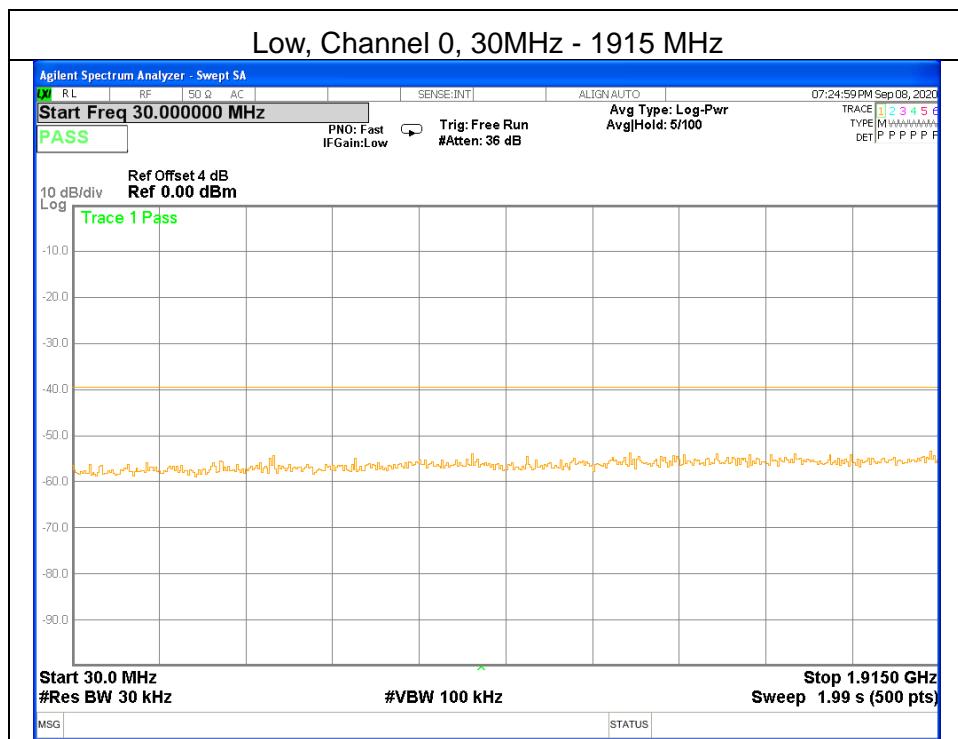

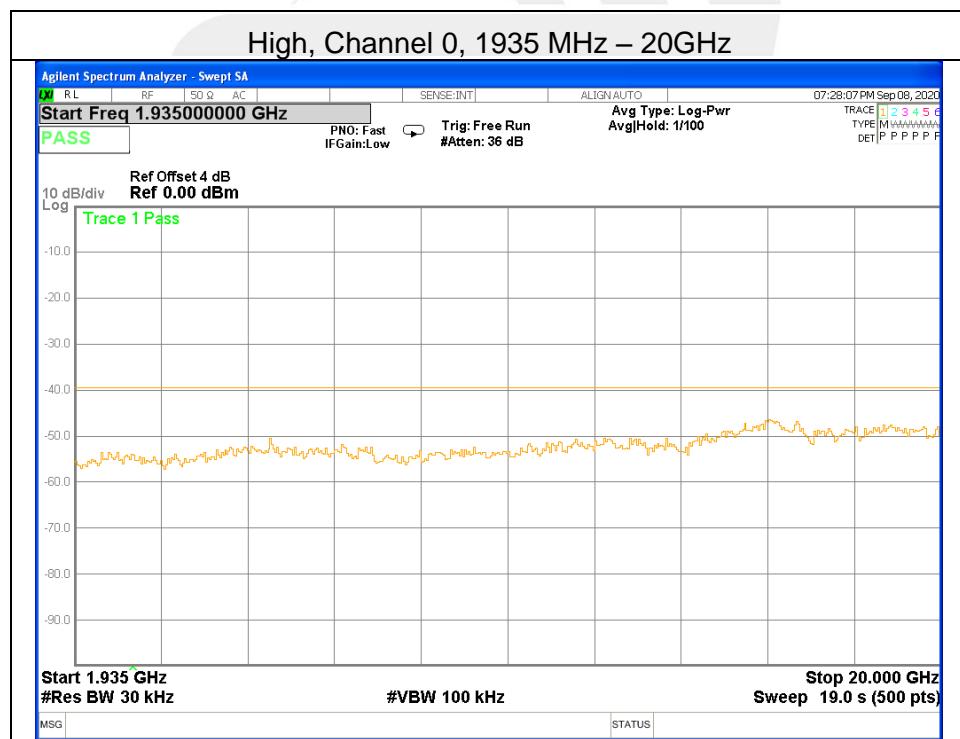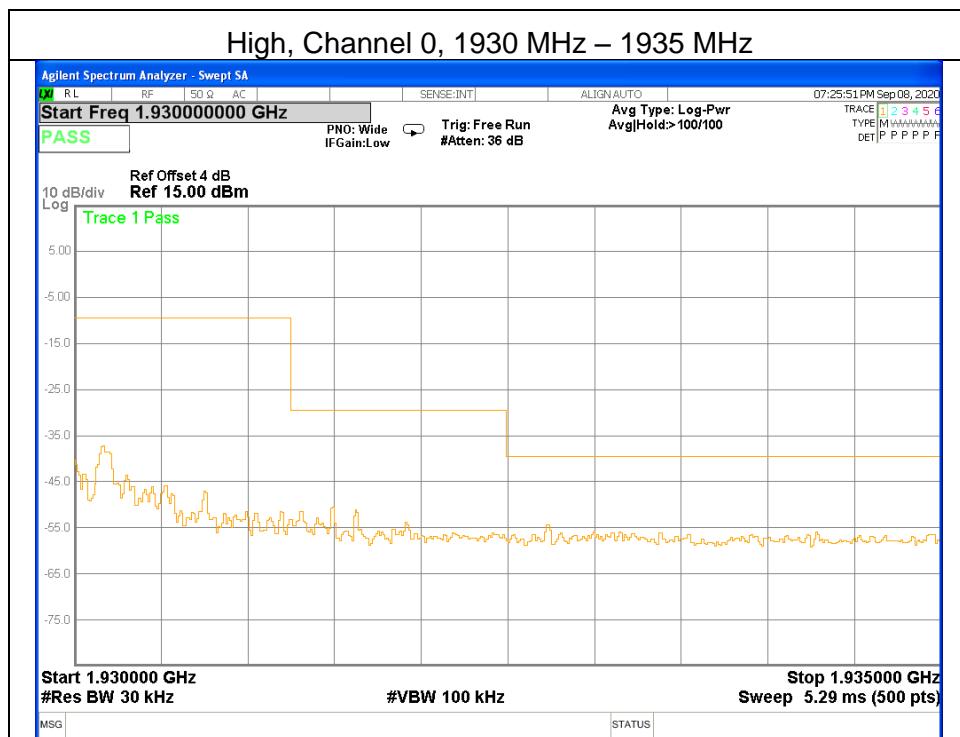



## 5.19 FRAME PERIOD

### TEST CRITERIA

§15.323 (e) The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of an intentional radiator operating in these sub-bands shall be 20 milliseconds or 10 milliseconds/X where X is a positive whole number. Each device that implements time division for the purposes of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per million (ppm). Each device which further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm.

#### Timing Jitter

§ 15.323 (e) Specific requirements for isochronous devices operating in the 1920–1930 MHz sub-band. The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 microseconds for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for the device.

### TEST LIMIT

Frame Period	20 or 10ms
Max Jitter	25μs
3 times St.Dev of Jitter	12.5μs

### TEST PROCEDURE

The manufacturer supplies an attestation

### TEST RESULTS

The Frame Repetition Stability is measured with the RF Test Platform for DECT. The Frame Repetition Stability is 3 times the standard deviation.

Antenna 0

Channel	Standard Deviation(ppm)	Frame Repetition	The limit of Frame Repetition Stability(ppm)	Verdict
Middle	0.3595	1.0785	±10	Pass

Channel	Frame Period(ms)	Max Jitter(μs)	3xStandard Deviation of Jitter(μs)	Limit(μs)		Verdict
				Max Jitter	3 times St.Dev.of Jitter	
Middle	10.0000	-0.5000	1.0785	25	12.5	Pass



## Antenna 1

Channel	Standard Deviation(ppm)	Frame Repetition	The limit of Frame Repetition Stability(ppm)	Verdict
Middle	0.2250	0.6750	±10	Pass

Channel	Frame Period(ms)	Max Jitter(μs)	3xStandard Deviation of Jitter(μs)	Limit(μs)		Verdict
				Max Jitter	3 times St.Dev.of Jitter	
Middle	10.0000	-0.5000	0.6750	25	12.5	Pass

Max Jitter=  $(1/(Frame\ Period+Pk-Pk)/2)-(1/Frame\ Period)$ . When Pk-Pk and Frame period are in Hz.

$3x\ St.Dev.\ Jitter\ 3\ x(1/(Frame\ Period\ +St.\ Dev))-(1/St.Dev))\times 10^6$





## 5.20 FREQUENCY STABILITY

### TEST CRITERIA

§15.323 (f) The frequency stability of the carrier frequency of the intentional radiator shall be maintained within  $\pm 10$  ppm over 1 hour or the interval between channel access monitoring, whichever is shorter. The frequency stability shall be maintained over a temperature variation of -20° to +50° C at normal supply voltage and over a variation in the primary supply voltage of 85% to 115% of the rated supply voltage at a temperature of 200 C. For equipment that is capable only of operating from a battery, the frequency stability tests shall be performed using a new battery without any further requirement to vary supply voltage.

### TEST PROCEDURE

The EUT was placed in the Environmental Chamber and support equipment are outside the chamber on a table. A CW signal was injected into the EUT at the appropriate RF level. The frequency counter option on the Spectrum Analyzer was used to measure frequency deviations.

The frequency drift was investigated for every 10° C increment until the unit is stabilized then recorded the reading in tabular format with the temperature range of -20° to +50° C.

Voltage supplied to EUT is DC 5V reference temperature was done at 20° C. The voltage was varied by  $\pm 15$  % of nominal

### TEST RESULTS

The EUT was compliant with this requirement

Antenna 0

(Low Channel)

Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1921.536	5	50	1921.52692	4.73	$\pm 10$
		40	1921.52901	3.64	
		30	1921.52363	6.44	
		20	1921.53809	-1.09	
		10	1921.53595	0.03	
		0	1921.53393	1.08	
		-10	1921.54643	-5.43	
		-20	1921.54803	-6.26	
		4.5	1921.54752	-6.00	
		5.5	1921.54719	-5.82	



(Mid Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1924.992	5	50	1924.99390	-0.99	±10
		40	1924.99632	-2.24	
		30	1924.99501	-1.56	
		20	1925.00380	-6.13	
		10	1924.99833	-3.29	
		0	1925.00356	-6.01	
		-10	1924.98369	4.32	
		-20	1924.98522	3.52	
		4.5	1924.98563	3.31	
	5.5	20	1924.98599	3.12	

(High Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1928.448	5	50	1928.43996	4.17	±10
		40	1928.44453	1.80	
		30	1928.44067	3.80	
		20	1928.44158	3.33	
		10	1928.44744	0.29	
		0	1928.44776	0.12	
		-10	1928.44767	0.17	
		-20	1928.45040	-1.24	
		4.5	1928.45264	-2.41	
	5.5	20	1928.45395	-3.09	



## Antenna 1

(Low Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1921.536	5	50	1921.52615	5.13	±10
		40	1921.52605	5.18	
		30	1921.53004	3.10	
		20	1921.53310	1.51	
		10	1921.53644	-0.23	
		0	1921.53850	-1.30	
		-10	1921.54500	-4.68	
		-20	1921.54885	-6.69	
		4.5	1921.54693	-5.69	
		5.5	1921.54587	-5.14	

(Mid Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1924.992	5	50	1924.99689	-2.54	±10
		40	1924.99778	-3.00	
		30	1924.99536	-1.75	
		20	1924.99887	-3.57	
		10	1925.00381	-6.14	
		0	1925.00148	-4.92	
		-10	1924.98789	2.14	
		-20	1924.98822	1.96	
		4.5	1924.98271	4.83	
		5.5	1924.98717	2.51	



(High Channel)					
Reference Frequency (MHz)	Voltage (V)	Temperature (°C)	Frequency (MHz)	Deviation (ppm)	Limit (ppm)
1928.448	5	50	1928.444438	1.88	±10
		40	1928.44047	3.90	
		30	1928.43861	4.87	
		20	1928.43931	4.51	
		10	1928.44827	-0.14	
		0	1928.44825	-0.13	
		-10	1928.44746	0.28	
		-20	1928.45070	-1.40	
	4.5	20	1928.45295	-2.57	
	5.5	20	1928.45034	-1.21	



## 5.21 CONDUCTED EMISSION MEASUREMENT

### POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

## TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

## TEST SETUP

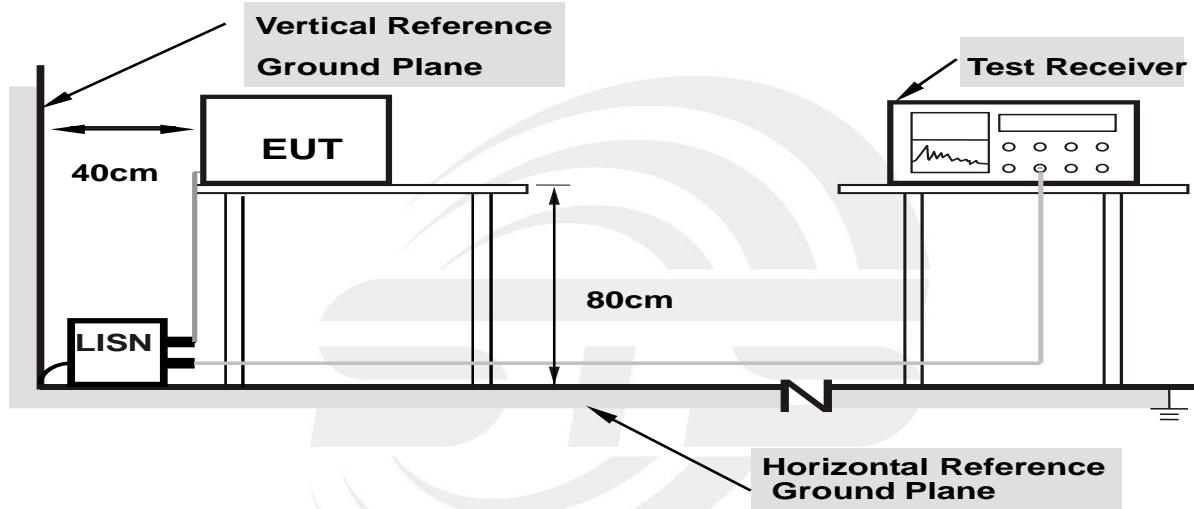

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

## EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



## TEST RESULTS

Note: Both two adapters has been tested, but the worst test mode is the S010WU0500200, only shown the worst case in this report.


Temperature:	27.7(C)	Relative Humidity:	67%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	TX Mode	Test Model:	Rove B4

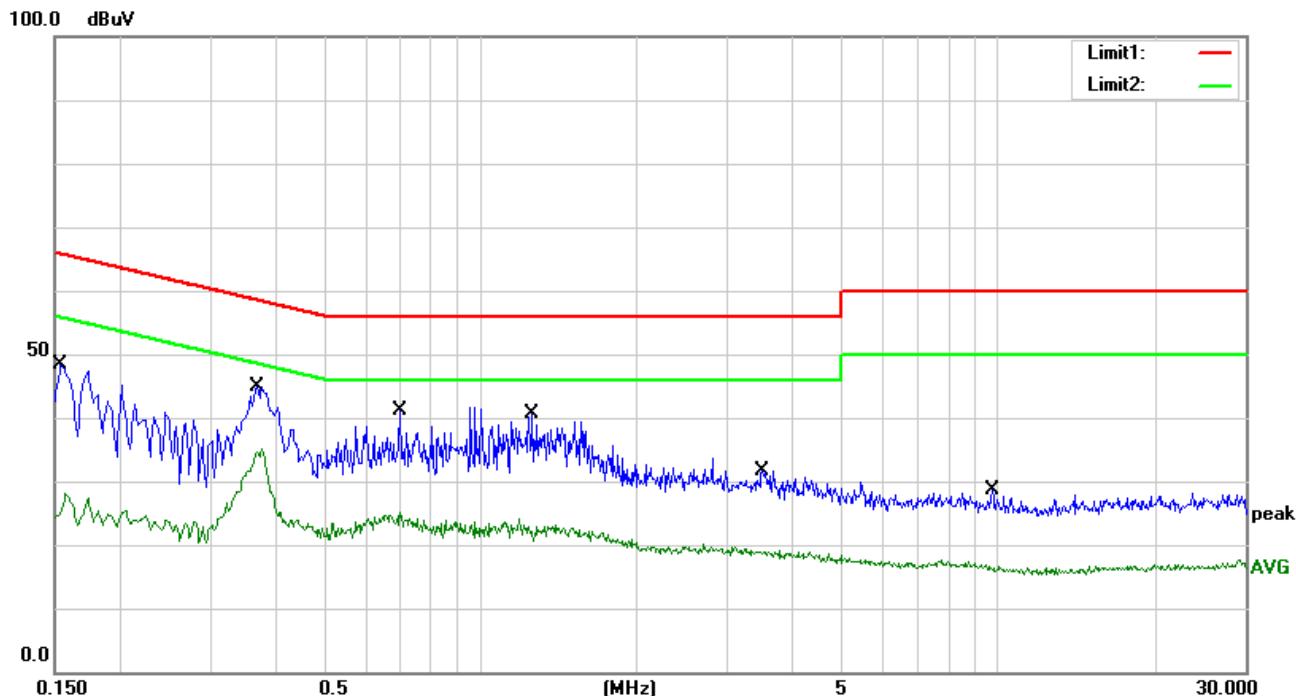

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1540	28.13	20.23	48.36	65.78	-17.42	QP
2	0.1540	7.79	20.23	28.02	55.78	-27.76	AVG
3	0.3700	24.44	20.56	45.00	58.50	-13.50	QP
4	0.3700	14.01	20.56	34.57	48.50	-13.93	AVG
5	0.6980	20.93	20.26	41.19	56.00	-14.81	QP
6	0.6980	4.86	20.26	25.12	46.00	-20.88	AVG
7	1.2620	20.40	20.13	40.53	56.00	-15.47	QP
8	1.2620	2.78	20.13	22.91	46.00	-23.09	AVG
9	3.5020	11.71	19.96	31.67	56.00	-24.33	QP
10	3.5020	-1.10	19.96	18.86	46.00	-27.14	AVG
11	9.7260	8.45	20.11	28.56	60.00	-31.44	QP
12	9.7260	-3.75	20.11	16.36	50.00	-33.64	AVG




Temperature:	27.7(C)	Relative Humidity:	67%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	TX Mode	Test Model:	Rove B4

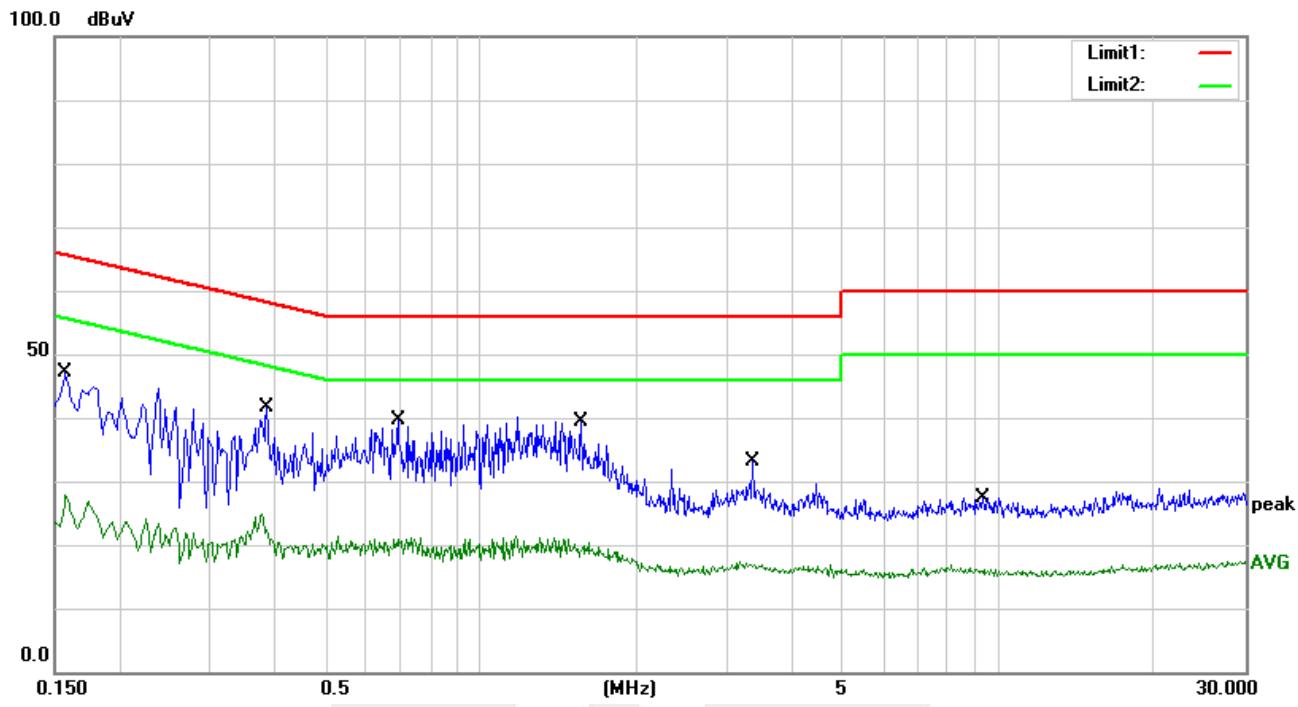

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1580	26.92	20.23	47.15	65.57	-18.42	QP
2	0.1580	7.59	20.23	27.82	55.57	-27.75	AVG
3	0.3860	21.15	20.53	41.68	58.15	-16.47	QP
4	0.3860	1.96	20.53	22.49	48.15	-25.66	AVG
5	0.6900	19.38	20.27	39.65	56.00	-16.35	QP
6	0.6900	0.98	20.27	21.25	46.00	-24.75	AVG
7	1.5660	19.31	20.10	39.41	56.00	-16.59	QP
8	1.5660	0.22	20.10	20.32	46.00	-25.68	AVG
9	3.3460	13.08	19.97	33.05	56.00	-22.95	QP
10	3.3460	-3.02	19.97	16.95	46.00	-29.05	AVG
11	9.3420	7.36	20.09	27.45	60.00	-32.55	QP
12	9.3420	-3.94	20.09	16.15	50.00	-33.85	AVG




Temperature:	27.7(C)	Relative Humidity:	67%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	TX Mode	Test Model:	Rove B2

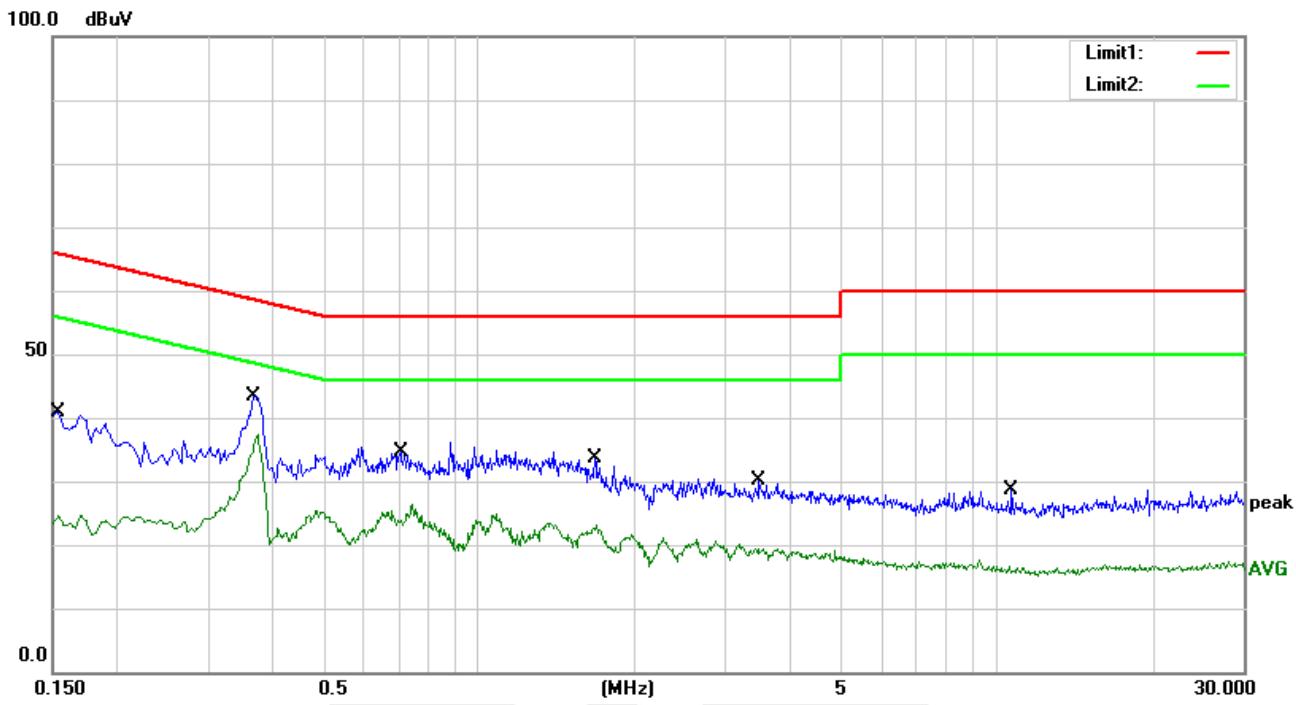

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	20.60	20.23	40.83	65.78	-24.95	QP
2	0.1540	4.41	20.23	24.64	55.78	-31.14	AVG
3	0.3660	22.87	20.57	43.44	58.59	-15.15	QP
4	0.3660	16.77	20.57	37.34	48.59	-11.25	AVG
5	0.7060	14.45	20.26	34.71	56.00	-21.29	QP
6	0.7060	4.65	20.26	24.91	46.00	-21.09	AVG
7	1.6780	13.41	20.10	33.51	56.00	-22.49	QP
8	1.6780	2.92	20.10	23.02	46.00	-22.98	AVG
9	3.4860	10.03	19.97	30.00	56.00	-26.00	QP
10	3.4860	-0.54	19.97	19.43	46.00	-26.57	AVG
11	10.7060	8.40	20.13	28.53	60.00	-31.47	QP
12	10.7060	-3.69	20.13	16.44	50.00	-33.56	AVG



Temperature:	27.7(C)	Relative Humidity:	67%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	TX Mode	Test Model:	Rove B2

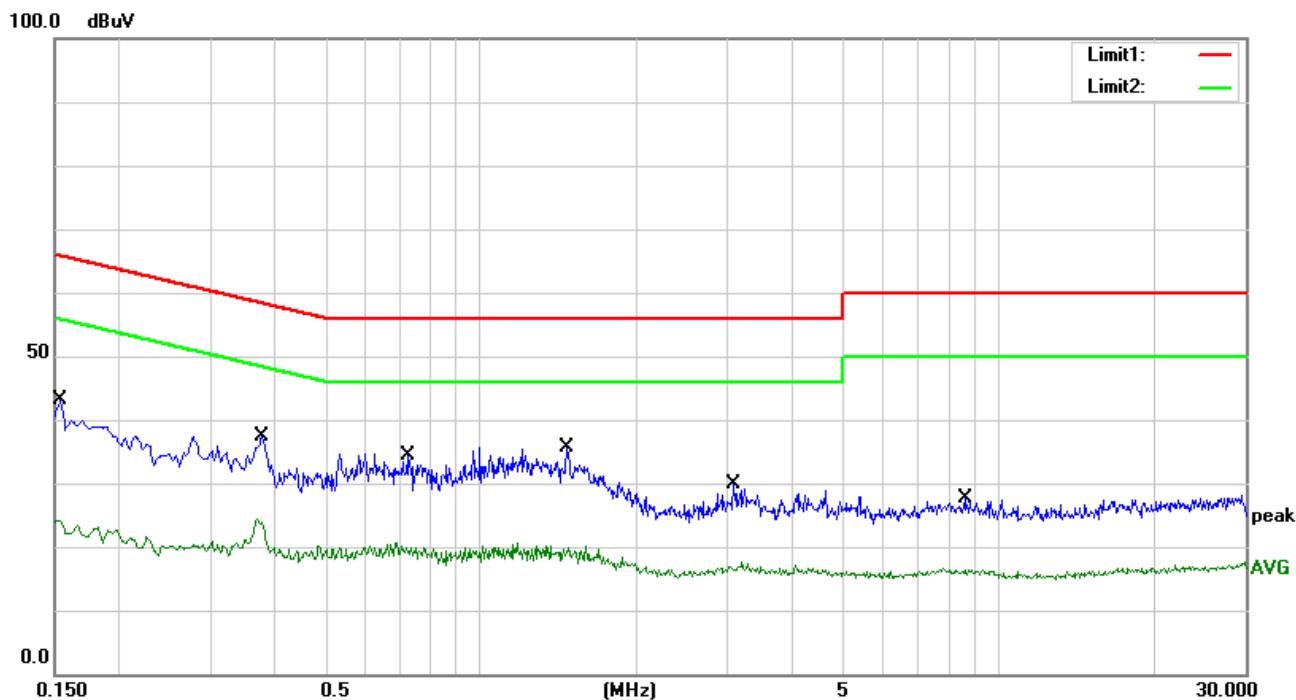

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	22.99	20.23	43.22	65.78	-22.56	QP
2	0.1540	4.02	20.23	24.25	55.78	-31.53	AVG
3	0.3780	16.92	20.55	37.47	58.32	-20.85	QP
4	0.3780	2.83	20.55	23.38	48.32	-24.94	AVG
5	0.7220	14.02	20.25	34.27	56.00	-21.73	QP
6	0.7220	-0.33	20.25	19.92	46.00	-26.08	AVG
7	1.4660	15.48	20.11	35.59	56.00	-20.41	QP
8	1.4660	-0.19	20.11	19.92	46.00	-26.08	AVG
9	3.0780	9.86	19.98	29.84	56.00	-26.16	QP
10	3.0780	-3.07	19.98	16.91	46.00	-29.09	AVG
11	8.6220	7.61	20.03	27.64	60.00	-32.36	QP
12	8.6220	-3.61	20.03	16.42	50.00	-33.58	AVG



## 5.22 RADIATED SPURIOUS EMISSION RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

### LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz

Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP




## TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters(above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarizations of the Antenna are set to make the measurement
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


### Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

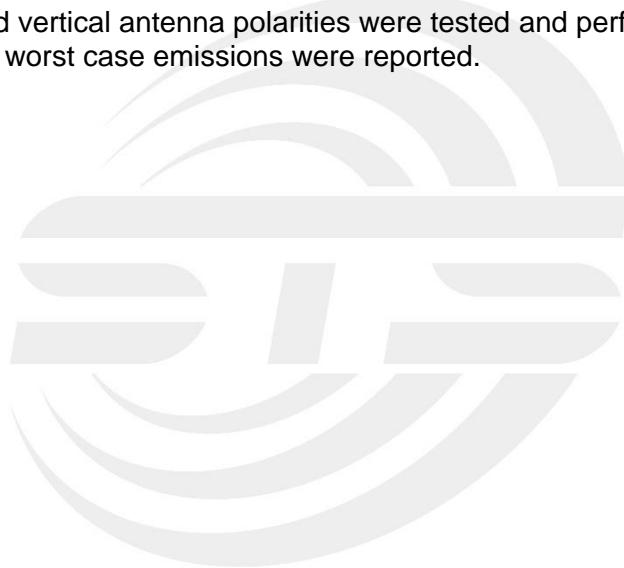


## TEST SETUP


### (A) Radiated Emission Test-Up Frequency Below 30MHz

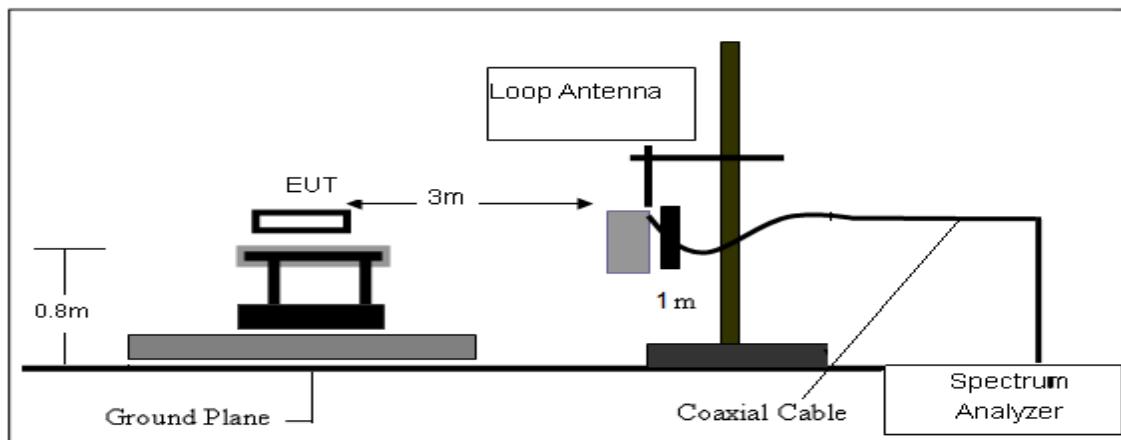

### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

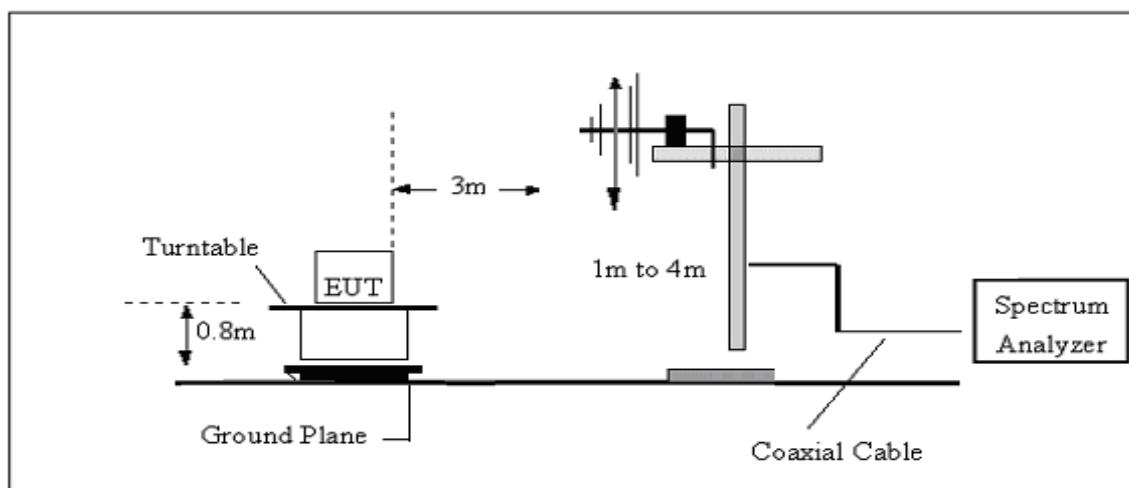

### (C) Radiated Emission Test-Up Frequency Above 1GHz

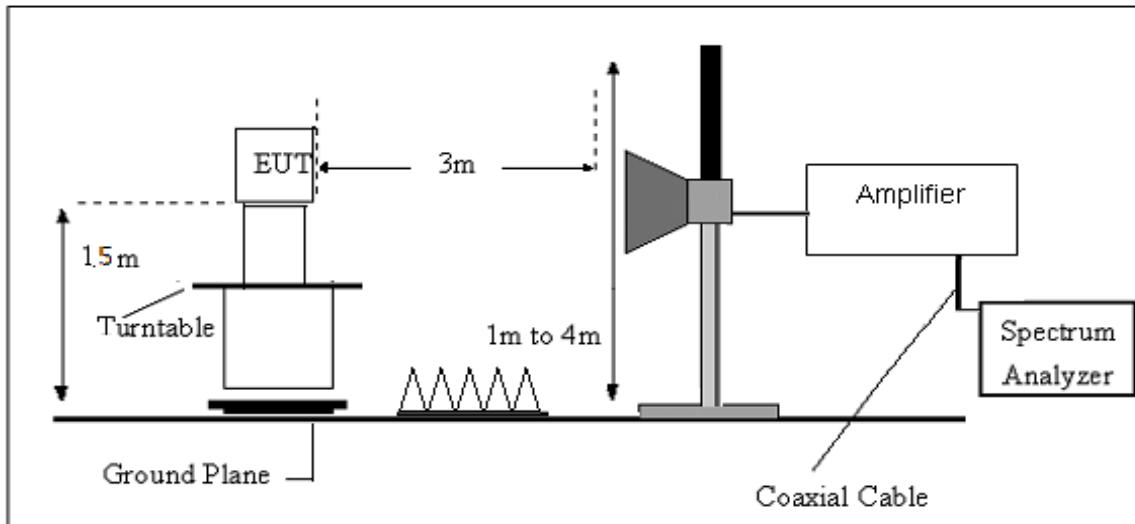

## EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



## FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

Margin=PL-PK L or AL- AV L; Margin only shown the worst case.

Where

PR = Peak Reading

AR = Average Reading

PL = Peak Level

AL = Average Level

AF = Antenna Factor

PK L = Peak Limit

AV L = AV Limit

For example

Frequency (MHz)	PR (dB $\mu$ V/m)	AR (dB $\mu$ V/m)	AF (dB)	PL (dB $\mu$ V/m)	AL (dB $\mu$ V/m)	PK L (dB $\mu$ V/m)	AV L (dB $\mu$ V/m)	Margin (dB)
2178	40.23	30.31	9.83	50.06	40.14	74.00	54.00	-13.86


Factor=AF+CL-AG



## TEST RESULTS(30MHz – 1GHz)

Note: Both two adapters has been tested, but the worst test mode is the S010WU0500200, only shown the worst case in this report.


Temperature:	23.2(C)	Relative Humidity:	61%RH
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX Mode of ANT 0	Test Model:	Rove B4

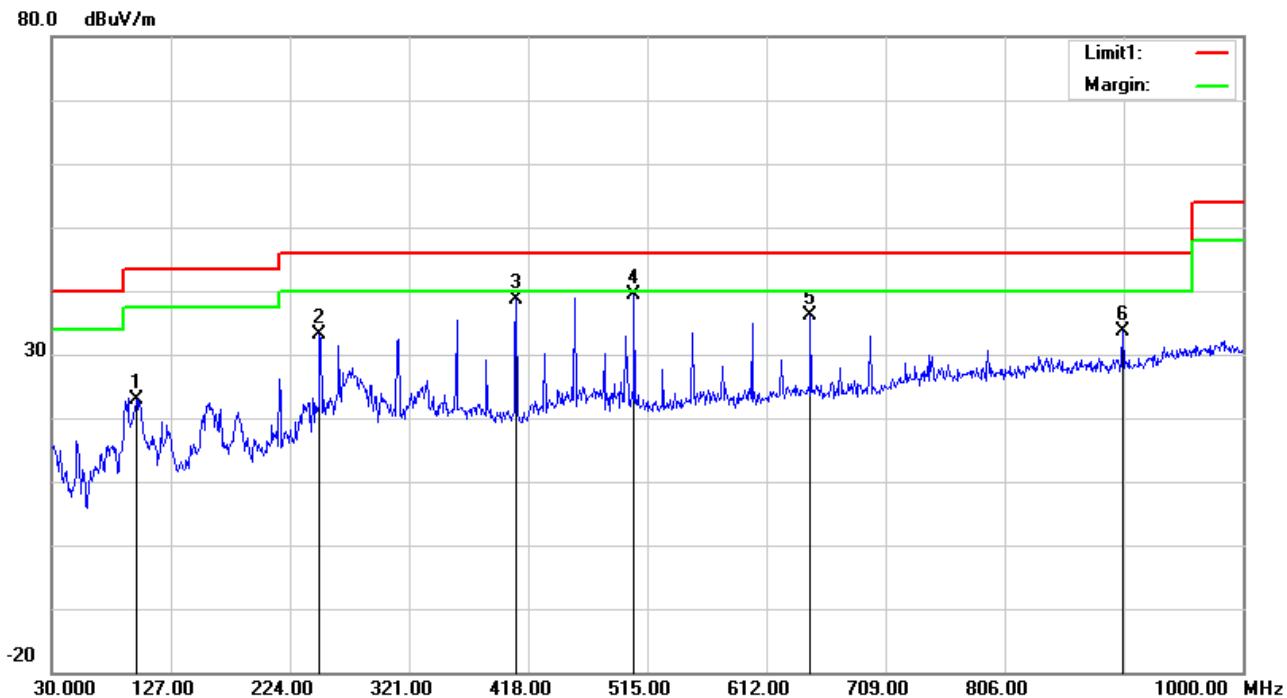

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	98.8700	43.22	-20.31	22.91	43.50	-20.59	QP
2	248.2500	49.49	-16.43	33.06	46.00	-12.94	QP
3	408.3000	49.33	-10.66	38.67	46.00	-7.33	QP
4	504.3300	47.26	-7.98	39.28	46.00	-6.72	QP
5	647.8900	40.94	-4.88	36.06	46.00	-9.94	QP
6	902.0300	33.97	-0.40	33.57	46.00	-12.43	QP




Temperature:	23.0(C)	Relative Humidity:	58%RH
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	TX Mode of ANT 0	Test Model:	Rove B4

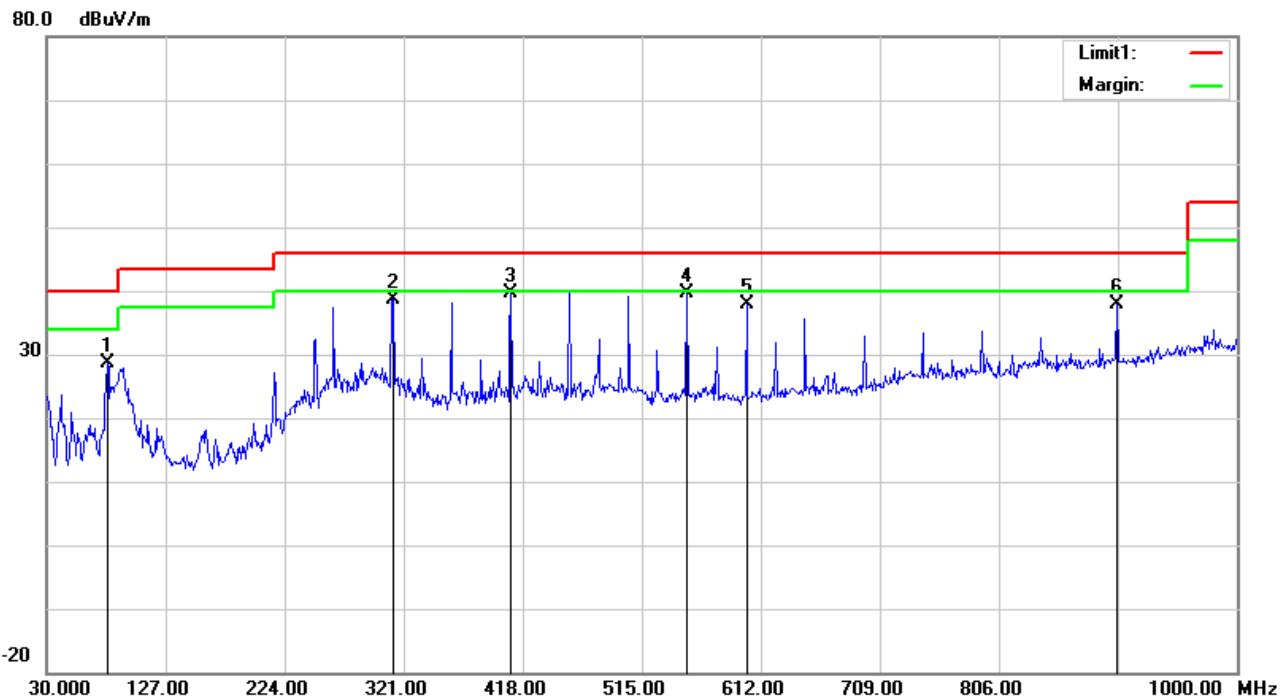

No.	Frequency (MHz)	Reading (dB <sub>UV</sub> )	Correct Factor(dB/m)	Result (dB <sub>UV</sub> /m)	Limit (dB <sub>UV</sub> /m)	Margin (dB)	Remark
1	79.4700	51.78	-23.11	28.67	40.00	-11.33	QP
2	312.2700	53.05	-14.36	38.69	46.00	-7.31	QP
3	408.3000	50.35	-10.66	39.69	46.00	-6.31	QP
4	551.8600	45.29	-5.72	39.57	46.00	-6.43	QP
5	600.3600	43.61	-5.84	37.77	46.00	-8.23	QP
6	902.0300	38.24	-0.40	37.84	46.00	-8.16	QP




Temperature:	23.0(C)	Relative Humidity:	58%RH
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX Mode of ANT 1	Test Model:	Rove B4

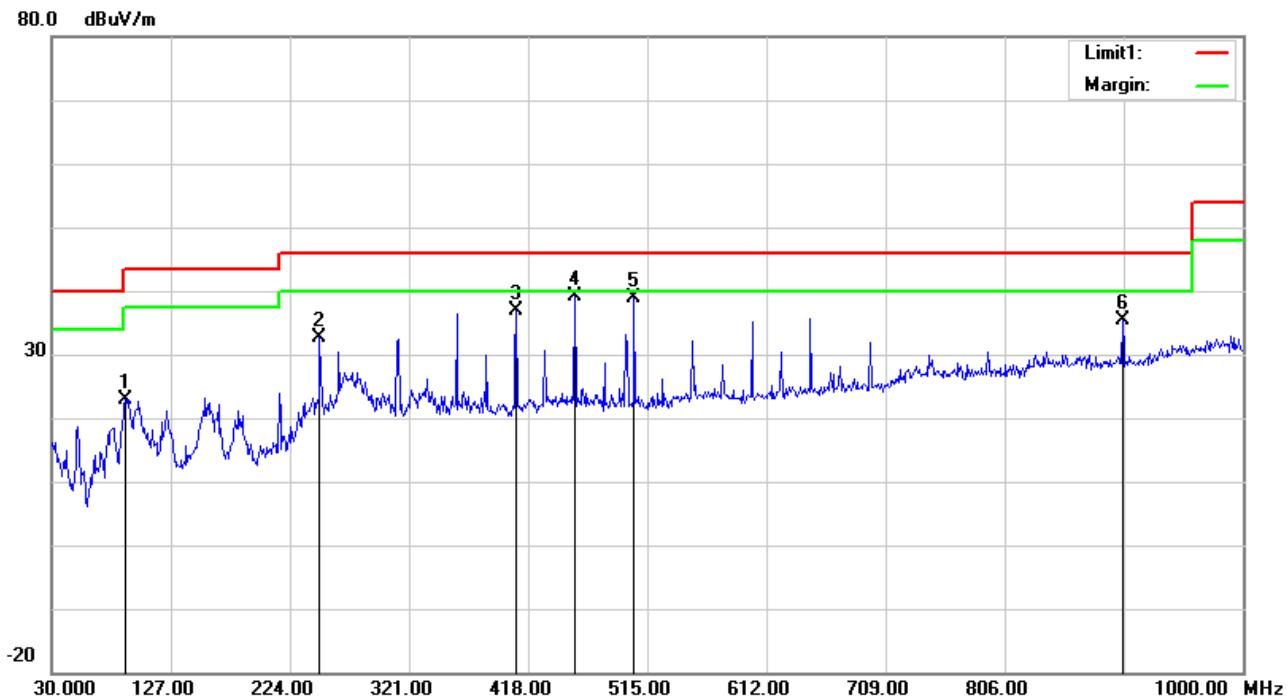

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	90.1400	44.33	-21.42	22.91	43.50	-20.59	QP
2	248.2500	49.03	-16.43	32.60	46.00	-13.40	QP
3	408.3000	47.60	-10.66	36.94	46.00	-9.06	QP
4	455.8300	48.79	-9.55	39.24	46.00	-6.76	QP
5	504.3300	46.86	-7.98	38.88	46.00	-7.12	QP
6	902.0300	35.66	-0.40	35.26	46.00	-10.74	QP




Temperature:	23.0(C)	Relative Humidity:	58%RH
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	TX Mode of ANT 1	Test Model:	Rove B4

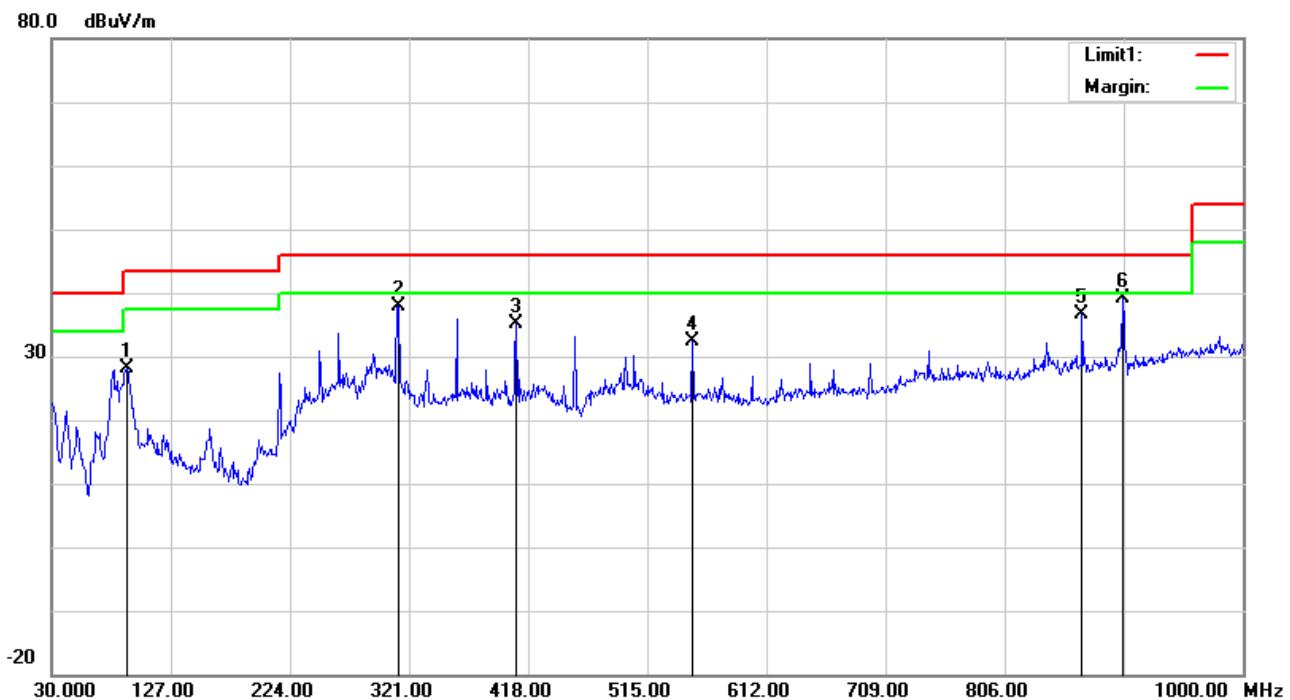

No.	Frequency (MHz)	Reading (dB <sub>uV</sub> )	Correct Factor(dB/m)	Result (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Remark
1	91.1100	49.45	-21.31	28.14	43.50	-15.36	QP
2	312.2700	52.17	-14.36	37.81	46.00	-8.19	QP
3	408.3000	45.89	-10.66	35.23	46.00	-10.77	QP
4	551.8600	37.98	-5.72	32.26	46.00	-13.74	QP
5	869.0500	37.13	-0.52	36.61	46.00	-9.39	QP
6	902.0300	39.51	-0.40	39.11	46.00	-6.89	QP




Temperature:	23.0(C)	Relative Humidity:	58%RH
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX Mode of ANT 0	Test Model:	Rove B2

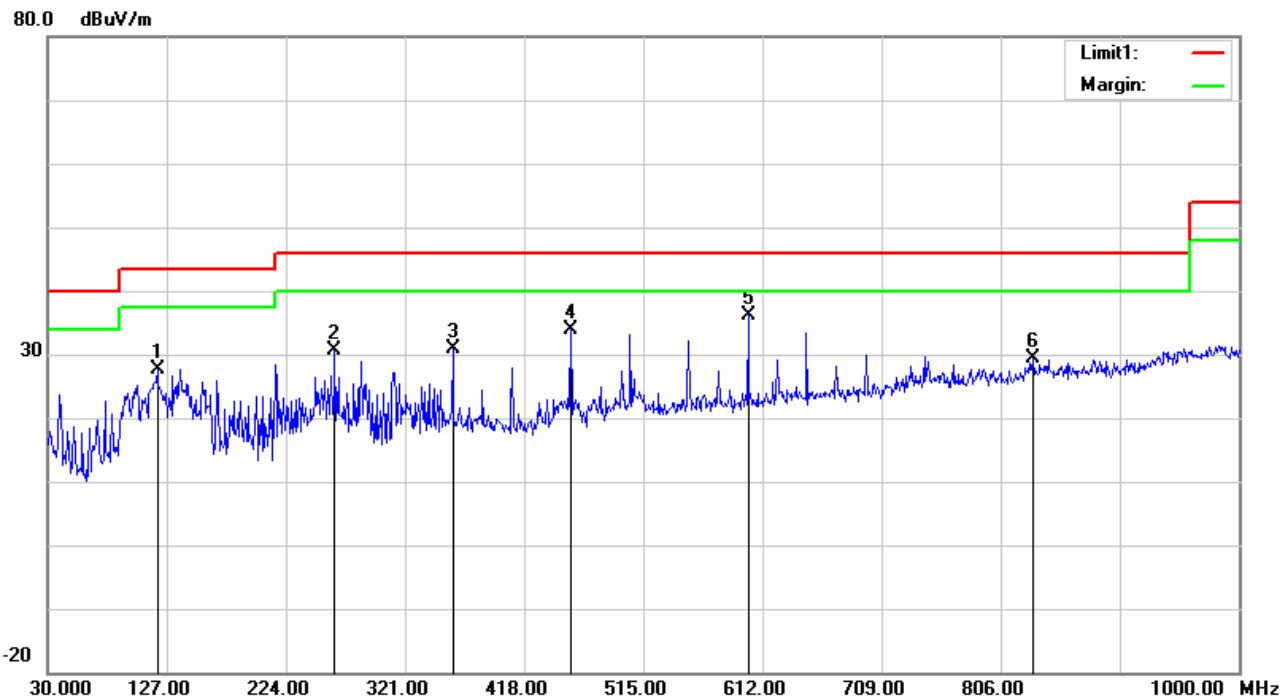

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	119.2400	45.95	-18.38	27.57	43.50	-15.93	QP
2	263.7700	45.44	-14.75	30.69	46.00	-15.31	QP
3	359.8000	43.83	-12.87	30.96	46.00	-15.04	QP
4	455.8300	43.35	-9.55	33.80	46.00	-12.20	QP
5	600.3600	41.91	-5.84	36.07	46.00	-9.93	QP
6	832.1900	29.95	-0.66	29.29	46.00	-16.71	QP




Temperature:	23.0(C)	Relative Humidity:	58%RH
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	TX Mode of ANT 0	Test Model:	Rove B2

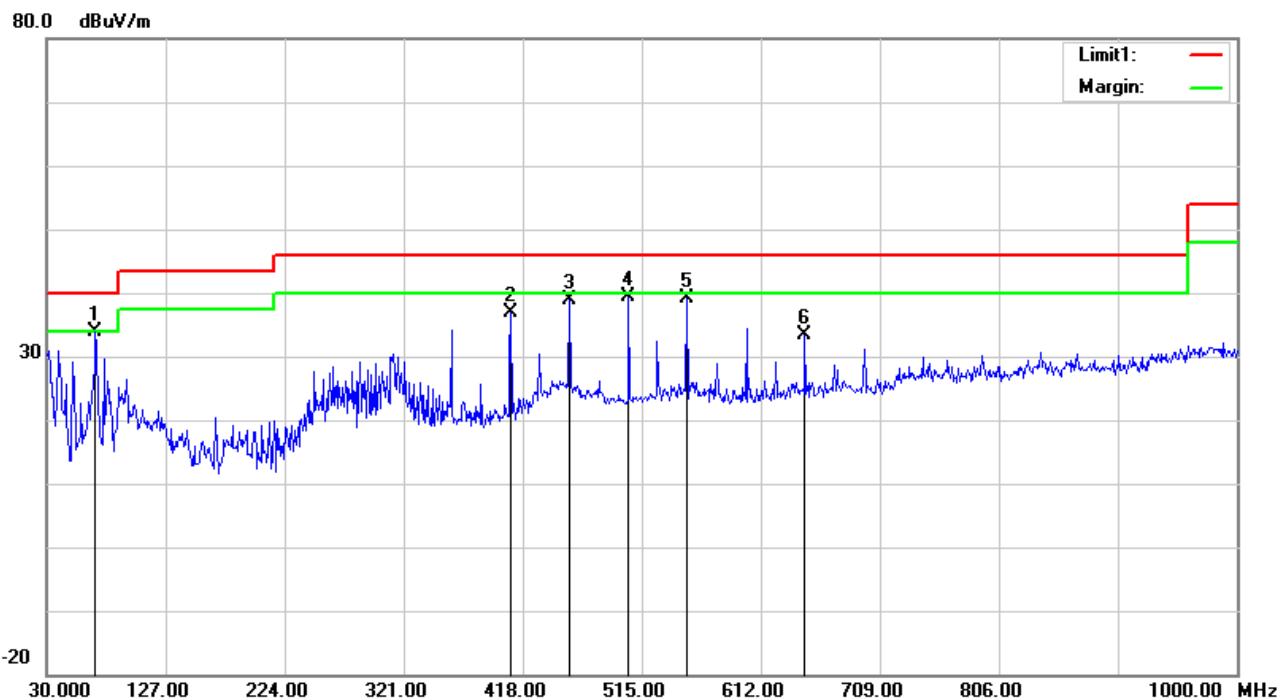

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	69.7700	58.68	-24.91	33.77	40.00	-6.23	QP
2	408.3000	47.64	-10.66	36.98	46.00	-9.02	QP
3	455.8300	48.40	-9.55	38.85	46.00	-7.15	QP
4	504.3300	47.41	-7.98	39.43	46.00	-6.57	QP
5	551.8600	44.75	-5.72	39.03	46.00	-6.97	QP
6	647.8900	38.33	-4.88	33.45	46.00	-12.55	QP




Temperature:	23.0(C)	Relative Humidity:	58%RH
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX Mode of ANT 1	Test Model:	Rove B2

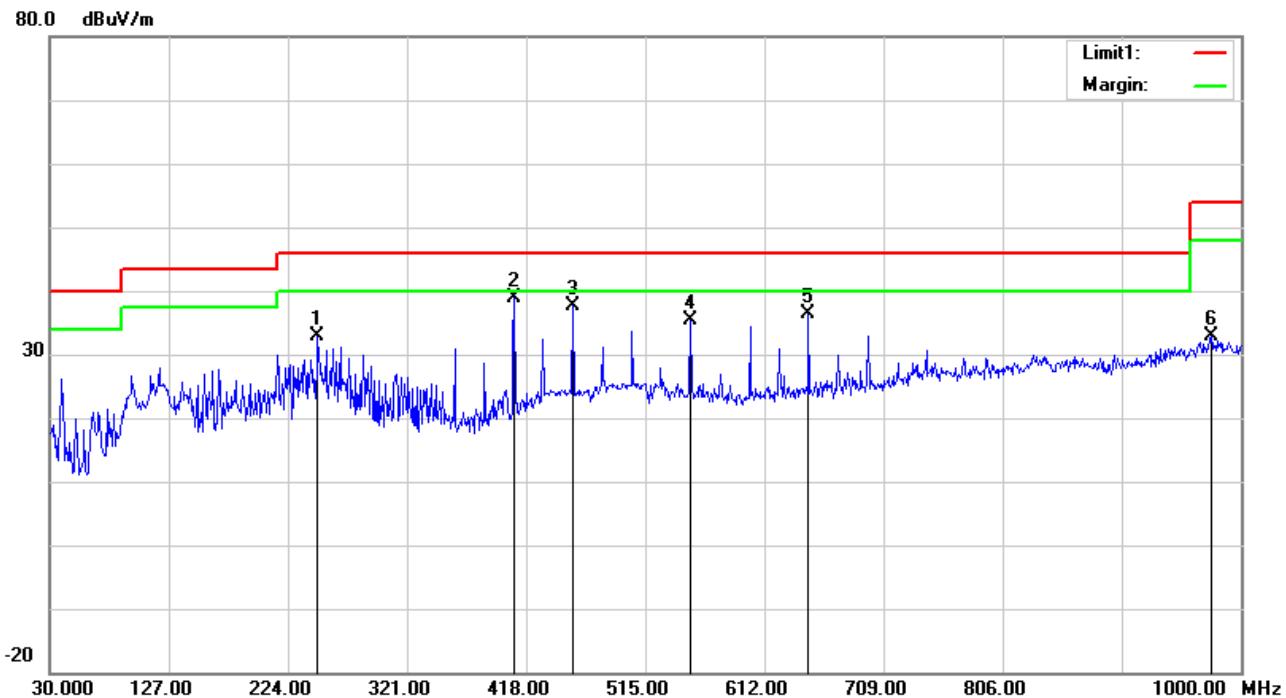

No.	Frequency (MHz)	Reading (dB <sub>uV</sub> )	Correct Factor(dB/m)	Result (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Remark
1	248.2500	49.37	-16.43	32.94	46.00	-13.06	QP
2	408.3000	49.48	-10.66	38.82	46.00	-7.18	QP
3	455.8300	47.29	-9.55	37.74	46.00	-8.26	QP
4	551.8600	41.00	-5.72	35.28	46.00	-10.72	QP
5	647.8900	41.16	-4.88	36.28	46.00	-9.72	QP
6	975.7500	30.48	2.38	32.86	54.00	-21.14	QP



Temperature:	23.0(C)	Relative Humidity:	58%RH
Test Voltage:	AC 120V/60Hz	Phase:	Vertical
Test Mode:	TX Mode of ANT 1	Test Model:	Rove B2

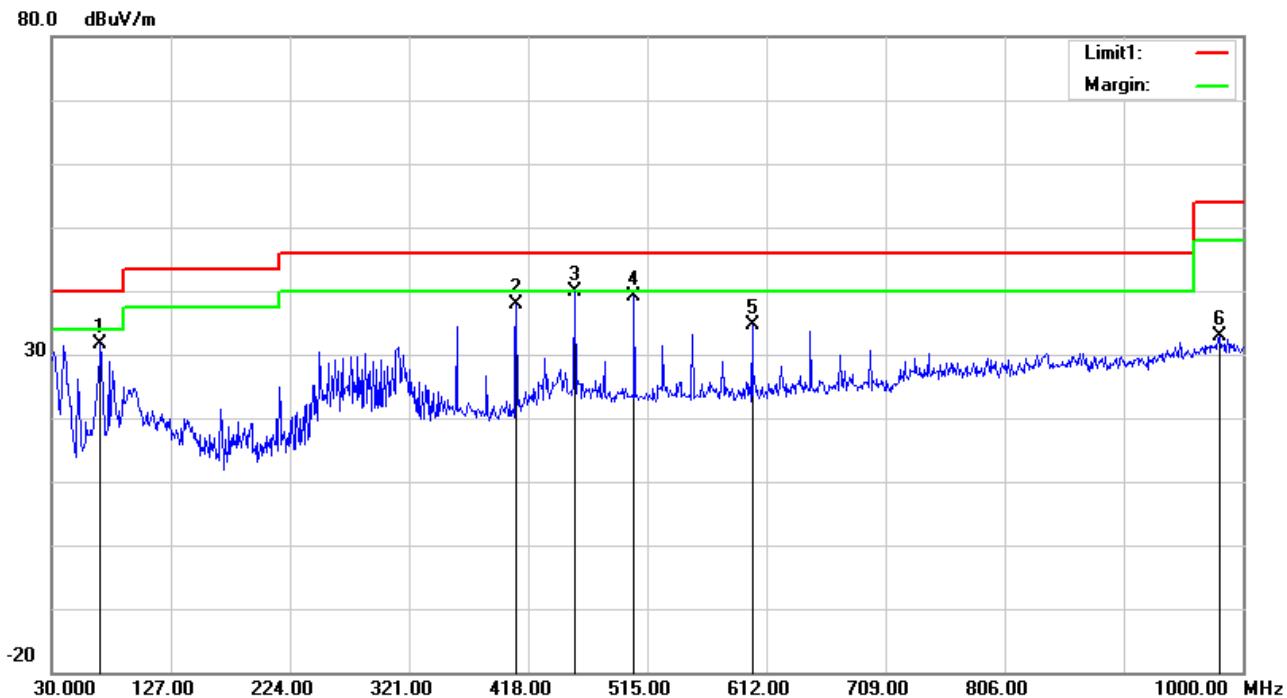

No.	Frequency (MHz)	Reading (dB <sub>UV</sub> )	Correct Factor(dB/m)	Result (dB <sub>UV</sub> /m)	Limit (dB <sub>UV</sub> /m)	Margin (dB)	Remark
1	69.7700	56.42	-24.91	31.51	40.00	-8.49	QP
2	408.3000	48.64	-10.66	37.98	46.00	-8.02	QP
3	455.8300	49.47	-9.55	39.92	46.00	-6.08	QP
4	504.3300	47.18	-7.98	39.20	46.00	-6.80	QP
5	600.3600	40.46	-5.84	34.62	46.00	-11.38	QP
6	980.6000	30.17	2.63	32.80	54.00	-21.20	QP



## TEST RESULTS(Above 1GHz)

Note: Both two adapters has been tested, but the worst test mode is the S010WU0500200, only shown the worst case in this report.

**Test Model: Rove B4****GFSK-Low-ANT 0****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1884	59.30	43.06	0.82	60.12	43.88	74.00	54.00	-10.12	Horizontal
3842	59.82	56.93	-10.95	48.87	45.98	74.00	54.00	-8.02	Horizontal
5376	54.84	51.88	-4.81	50.03	47.07	74.00	54.00	-6.93	Horizontal
8738	51.30	40.80	5.04	56.34	45.84	74.00	54.00	-8.16	Horizontal
11155.25	51.20	40.23	9.64	60.84	49.87	74.00	54.00	-4.13	Horizontal
15434.25	50.67	39.16	10.85	61.52	50.01	74.00	54.00	-3.99	Horizontal

**Vertical**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1883	54.63	42.85	0.82	55.45	43.67	74.00	54.00	-10.33	Vertical
3843	63.61	61.75	-10.95	52.66	50.80	74.00	54.00	-3.20	Vertical
5376	56.97	52.33	-4.81	52.16	47.52	74.00	54.00	-6.48	Vertical
7638	51.69	40.57	3.53	55.22	44.10	74.00	54.00	-9.90	Vertical
11094.75	51.22	40.57	9.71	60.93	50.28	74.00	54.00	-3.72	Vertical
15800.001	51.84	40.45	9.63	61.47	50.08	74.00	54.00	-3.92	Vertical

**GFSK-Mid-ANT 0****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1886.5	54.40	44.00	0.82	55.22	44.82	74.00	54.00	-9.18	Horizontal
3849	63.81	58.76	-10.92	52.89	47.84	74.00	54.00	-6.16	Horizontal
5387	54.59	47.64	-4.78	49.81	42.86	74.00	54.00	-11.14	Horizontal
8735.25	51.33	40.92	5.05	56.38	45.97	74.00	54.00	-8.03	Horizontal
11061.75	51.83	40.15	9.89	61.72	50.04	74.00	54.00	-3.96	Horizontal
14416.75	50.49	40.13	11.23	61.72	51.36	74.00	54.00	-2.64	Horizontal

**Vertical**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1883.5	57.53	43.77	0.82	58.35	44.59	74.00	54.00	-9.41	Vertical
3850	64.65	60.69	-10.92	53.73	49.77	74.00	54.00	-4.23	Vertical
5387	54.78	47.78	-4.78	50.00	43.00	74.00	54.00	-11.00	Vertical
8265	51.64	41.41	4.23	55.87	45.64	74.00	54.00	-8.36	Vertical
11078.25	51.81	40.32	9.8	61.61	50.12	74.00	54.00	-3.88	Vertical
14416.75	49.82	40.13	11.23	61.05	51.36	74.00	54.00	-2.64	Vertical

**GFSK-High-ANT 0****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1889.5	54.71	44.08	0.83	55.54	44.91	74.00	54.00	-9.09	Horizontal
3856	63.22	58.86	-10.9	52.32	47.96	74.00	54.00	-6.04	Horizontal
5418	52.59	45.80	-4.8	47.79	41.00	74.00	54.00	-13.00	Horizontal
8834.25	52.33	40.18	4.64	56.97	44.82	74.00	54.00	-9.18	Horizontal
11391.75	51.25	40.32	9.73	60.98	50.05	74.00	54.00	-3.95	Horizontal
17150.25	51.34	40.50	10.2	61.54	50.70	74.00	54.00	-3.30	Horizontal

**Vertical**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1890.5	57.20	45.63	0.83	58.03	46.46	74.00	54.00	-7.54	Vertical
3856	62.94	58.65	-10.9	52.04	47.75	74.00	54.00	-6.25	Vertical
5397	52.23	46.55	-4.76	47.47	41.79	74.00	54.00	-12.21	Vertical
8809.5	51.41	41.14	4.79	56.20	45.93	74.00	54.00	-8.07	Vertical
11081	50.64	40.85	9.78	60.42	50.63	74.00	54.00	-3.37	Vertical
14691.75	50.81	38.51	11.26	62.07	49.77	74.00	54.00	-4.23	Vertical

**GFSK-Low-ANT 1****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1882	55.43	43.18	0.82	56.25	44.00	74.00	54.00	-10.00	Horizontal
3842	64.02	58.34	-10.95	53.07	47.39	74.00	54.00	-6.61	Horizontal
5376	53.65	50.25	-4.81	48.84	45.44	74.00	54.00	-8.56	Horizontal
8784.75	51.69	40.55	4.9	56.59	45.45	74.00	54.00	-8.55	Horizontal
11378	51.01	40.16	9.7	60.71	49.86	74.00	54.00	-4.14	Horizontal
15335.25	50.62	40.84	10.32	60.94	51.16	74.00	54.00	-2.84	Horizontal

**Vertical**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1883.5	52.92	40.77	0.82	53.74	41.59	74.00	54.00	-12.41	Vertical
3843	65.11	61.94	-10.95	54.16	50.99	74.00	54.00	-3.01	Vertical
5376	55.33	51.97	-4.81	50.52	47.16	74.00	54.00	-6.84	Vertical
7687.5	51.41	40.31	4.06	55.47	44.37	74.00	54.00	-9.63	Vertical
11094.75	50.66	40.65	9.71	60.37	50.36	74.00	54.00	-3.64	Vertical
15200.5	50.50	39.73	11.04	61.54	50.77	74.00	54.00	-3.23	Vertical

**GFSK-Mid-ANT 1****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1887.5	50.40	38.30	0.83	51.23	39.13	74.00	54.00	-14.87	Horizontal
3849	56.95	53.36	-10.92	46.03	42.44	74.00	54.00	-11.56	Horizontal
5386	54.53	50.55	-4.79	49.74	45.76	74.00	54.00	-8.24	Horizontal
8738	51.58	41.30	5.04	56.62	46.34	74.00	54.00	-7.66	Horizontal
11097.5	51.19	40.39	9.69	60.88	50.08	74.00	54.00	-3.92	Horizontal
15841.25	51.95	41.47	9.09	61.04	50.56	74.00	54.00	-3.44	Horizontal

**Vertical**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1887.5	42.79	31.73	0.83	43.62	32.56	74.00	54.00	-21.44	Vertical
3849	64.06	59.28	-10.92	53.14	48.36	74.00	54.00	-5.64	Vertical
5386	54.52	50.73	-4.79	49.73	45.94	74.00	54.00	-8.06	Vertical
8372.25	52.58	40.57	4.26	56.84	44.83	74.00	54.00	-9.17	Vertical
11452.25	51.29	39.74	9.85	61.14	49.59	74.00	54.00	-4.41	Vertical
15401.25	51.52	40.03	10.96	62.48	50.99	74.00	54.00	-3.01	Vertical

**GFSK-High-ANT 1****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1864	51.22	39.27	0.8	52.02	40.07	74.00	54.00	-13.93	Horizontal
3857	62.14	59.92	-10.89	51.25	49.03	74.00	54.00	-4.97	Horizontal
5418	53.67	46.45	-4.8	48.87	41.65	74.00	54.00	-12.35	Horizontal
9593.25	52.40	40.93	5.73	58.13	46.66	74.00	54.00	-7.34	Horizontal
11345	50.94	40.04	9.63	60.57	49.67	74.00	54.00	-4.33	Horizontal
17048.5	52.19	40.59	10.11	62.30	50.70	74.00	54.00	-3.30	Horizontal

**Vertical**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1890	56.58	46.16	0.83	57.41	46.99	74.00	54.00	-7.01	Vertical
3856	62.87	60.96	-10.9	51.97	50.06	74.00	54.00	-3.94	Vertical
5396	52.57	44.51	-4.76	47.81	39.75	74.00	54.00	-14.25	Vertical
8133	50.83	40.74	4.18	55.01	44.92	74.00	54.00	-9.08	Vertical
11026	50.69	40.13	10.08	60.77	50.21	74.00	54.00	-3.79	Vertical
14810	51.73	40.09	10.08	61.81	50.17	74.00	54.00	-3.83	Vertical

**Test Model: Rove B2****GFSK-Low-ANT 0****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1882.5	50.49	38.73	0.82	51.31	39.55	74.00	54.00	-14.45	Horizontal
3842	61.09	54.14	-10.95	50.14	43.19	74.00	54.00	-10.81	Horizontal
5417	53.20	45.79	-4.8	48.40	40.99	74.00	54.00	-13.01	Horizontal
8784.75	51.09	40.66	4.9	55.99	45.56	74.00	54.00	-8.44	Horizontal
11042.5	51.44	39.84	9.99	61.43	49.83	74.00	54.00	-4.17	Horizontal
15178.5	50.72	39.74	10.88	61.60	50.62	74.00	54.00	-3.38	Horizontal

**Vertical**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1883.5	51.86	36.88	0.82	52.68	37.70	74.00	54.00	-16.30	Vertical
3843	62.90	58.74	-10.95	51.95	47.79	74.00	54.00	-6.21	Vertical
5376	54.40	48.94	-4.81	49.59	44.13	74.00	54.00	-9.87	Vertical
7712.25	51.87	40.59	4.1	55.97	44.69	74.00	54.00	-9.31	Vertical
11083.75	50.96	40.47	9.77	60.73	50.24	74.00	54.00	-3.76	Vertical
14405.75	50.68	39.60	11.36	62.04	50.96	74.00	54.00	-3.04	Vertical

**GFSK-Mid-ANT 0****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1886.5	53.29	38.93	0.82	54.11	39.75	74.00	54.00	-14.25	Horizontal
3849	63.44	58.42	-10.92	52.52	47.50	74.00	54.00	-6.50	Horizontal
5386	54.24	49.76	-4.79	49.45	44.97	74.00	54.00	-9.03	Horizontal
8171.5	51.13	40.07	4.19	55.32	44.26	74.00	54.00	-9.74	Horizontal
10979.25	50.07	39.68	10.06	60.13	49.74	74.00	54.00	-4.26	Horizontal
15043.75	51.25	39.93	10.36	61.61	50.29	74.00	54.00	-3.71	Horizontal

**Vertical**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1857	51.35	40.41	0.79	52.14	41.20	74.00	54.00	-12.80	Vertical
3850	62.22	59.18	-10.92	51.30	48.26	74.00	54.00	-5.74	Vertical
5386	54.54	49.51	-4.79	49.75	44.72	74.00	54.00	-9.28	Vertical
8735.25	51.61	40.89	5.05	56.66	45.94	74.00	54.00	-8.06	Vertical
11004	51.31	39.94	10.2	61.51	50.14	74.00	54.00	-3.86	Vertical
15417.75	50.43	40.19	10.91	61.34	51.10	74.00	54.00	-2.90	Vertical

**GFSK-High-ANT 0****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1863	51.26	40.49	0.8	52.06	41.29	74.00	54.00	-12.71	Horizontal
3857	62.26	58.68	-10.89	51.37	47.79	74.00	54.00	-6.21	Horizontal
5397	52.97	47.22	-4.76	48.21	42.46	74.00	54.00	-11.54	Horizontal
8254	52.08	40.87	4.22	56.30	45.09	74.00	54.00	-8.91	Horizontal
11064.5	51.09	40.48	9.87	60.96	50.35	74.00	54.00	-3.65	Horizontal
14936.5	51.67	40.01	10.07	61.74	50.08	74.00	54.00	-3.92	Horizontal

**Vertical**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1861.5	48.89	39.44	0.79	49.68	40.23	74.00	54.00	-13.77	Vertical
3856	58.52	51.42	-10.9	47.62	40.52	74.00	54.00	-13.48	Vertical
5418	52.99	44.03	-4.8	48.19	39.23	74.00	54.00	-14.77	Vertical
8265	51.35	41.51	4.23	55.58	45.74	74.00	54.00	-8.26	Vertical
11078.25	50.67	40.48	9.8	60.47	50.28	74.00	54.00	-3.72	Vertical
14405.75	50.35	39.93	11.36	61.71	51.29	74.00	54.00	-2.71	Vertical

**GFSK-Low-ANT 1****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1883	52.19	38.37	0.82	53.01	39.19	74.00	54.00	-14.81	Horizontal
3842	61.43	57.68	-10.95	50.48	46.73	74.00	54.00	-7.27	Horizontal
5376	53.27	48.76	-4.81	48.46	43.95	74.00	54.00	-10.05	Horizontal
8273.25	51.42	41.17	4.23	55.65	45.40	74.00	54.00	-8.60	Horizontal
10984.75	50.77	40.23	10.1	60.87	50.33	74.00	54.00	-3.67	Horizontal
15131.75	50.61	39.71	10.54	61.15	50.25	74.00	54.00	-3.75	Horizontal

**Vertical**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1882.5	50.94	38.50	0.82	51.76	39.32	74.00	54.00	-14.68	Vertical
3843	62.26	59.95	-10.95	51.31	49.00	74.00	54.00	-5.00	Vertical
5376	53.32	48.50	-4.81	48.51	43.69	74.00	54.00	-10.31	Vertical
8270.5	51.75	41.48	4.23	55.98	45.71	74.00	54.00	-8.29	Vertical
11386.25	51.72	40.23	9.71	61.43	49.94	74.00	54.00	-4.06	Vertical
17103.5	50.49	40.00	10.46	60.95	50.46	74.00	54.00	-3.54	Vertical

**GFSK-Mid-ANT 1****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1886.5	52.21	37.44	0.82	53.03	38.26	74.00	54.00	-15.74	Horizontal
3849	61.64	59.32	-10.92	50.72	48.40	74.00	54.00	-5.60	Horizontal
5386	53.39	47.89	-4.79	48.60	43.10	74.00	54.00	-10.90	Horizontal
8267.75	51.67	41.22	4.23	55.90	45.45	74.00	54.00	-8.55	Horizontal
11097.5	51.90	40.65	9.69	61.59	50.34	74.00	54.00	-3.66	Horizontal
17100.75	50.68	40.14	10.48	61.16	50.62	74.00	54.00	-3.38	Horizontal

**Vertical**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1886.5	53.23	40.90	0.82	54.05	41.72	74.00	54.00	-12.28	Vertical
3849	63.58	58.55	-10.92	52.66	47.63	74.00	54.00	-6.37	Vertical
5386	53.62	48.77	-4.79	48.83	43.98	74.00	54.00	-10.02	Vertical
8410.75	51.57	40.18	4.31	55.88	44.49	74.00	54.00	-9.51	Vertical
10995.75	50.51	39.92	10.19	60.70	50.11	74.00	54.00	-3.89	Vertical
15065.75	51.58	40.67	10.34	61.92	51.01	74.00	54.00	-2.99	Vertical

**GFSK-High-ANT 1****Horizontal**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1890.5	50.34	37.20	0.83	51.17	38.03	74.00	54.00	-15.97	Horizontal
3857	61.21	56.60	-10.89	50.32	45.71	74.00	54.00	-8.29	Horizontal
5397	52.82	47.06	-4.76	48.06	42.30	74.00	54.00	-11.70	Horizontal
8784.75	50.96	40.46	4.9	55.86	45.36	74.00	54.00	-8.64	Horizontal
11103	51.08	40.66	9.68	60.76	50.34	74.00	54.00	-3.66	Horizontal
15417.75	50.56	40.14	10.91	61.47	51.05	74.00	54.00	-2.95	Horizontal

**Vertical**

Frequency (MHz)	Peak Reading (dBuV/m)	Average Reading (dBuV/m)	Factor (dB)	Peak Level (dBuV/m)	Average Level (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Margin(dB)	ANT
1890.5	54.34	39.36	0.83	55.17	40.19	74.00	54.00	-13.81	Vertical
3856	61.49	57.30	-10.9	50.59	46.40	74.00	54.00	-7.60	Vertical
5397	53.03	47.74	-4.76	48.27	42.98	74.00	54.00	-11.02	Vertical
8262.25	51.69	40.81	4.22	55.91	45.03	74.00	54.00	-8.97	Vertical
11111.25	51.94	40.48	9.67	61.61	50.15	74.00	54.00	-3.85	Vertical
14158.25	51.12	39.41	10.9	62.02	50.31	74.00	54.00	-3.69	Vertical

**APENDIX B PHOTOS OF TEST SETUP**

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※ END OF THE REPORT ※※※※

