



FCC PART 18
EMI MEASUREMENT AND TEST REPORT
For
SHENZHEN SHENSCO PHOLIGHTING TECH CO., LTD

Building L, Jingtie Industry Park, Heao. Henggang, Longgang, shenzhen, China

FCC ID: T9NFLF0814

August 1, 2006

This Report Concerns: ☒ Original Report	Equipment Type: T5 Low-Profile Linkable Fluorescent Lamp Fixture
Test Engineer: Louise Lu	
Report Number: RSZ06042782	
Test Date: April 30, 2006	
Reviewed By: Boni Baniqued	
Prepared By:	Bay Area Compliance Lab Corp. (ShenZhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, GuangDong 518038, P.R.China Tel: +86-755-33320018 Fax: +86-755-33320008

Note: The test report is specially limited to the above company and this particular sample only.
It may not be duplicated without prior written consent of Bay Area Compliance Lab
Corp. (ShenZhen). This report **must not** be used by the client to claim product certification,
approval, or endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
EXTERNAL I/O CABLE	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EQUIPMENT MODIFICATIONS	5
CONFIGURATION OF TEST SETUP	5
BLOCK DIAGRAM OF TEST SETUP	5
CONDUCTED EMISSION.....	6
MEASUREMENT UNCERTAINTY.....	6
EUT SETUP.....	6
EMI TEST RECEIVER SETUP	7
TEST EQUIPMENT LIST AND DETAILS.....	7
TEST PROCEDURE	7
TEST RESULTS SUMMARY	7
TEST DATA	8
PLOT(S) OF TEST DATA.....	9

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The SHENZHEN SHENSCO PHOLIGHTING TECH CO., LTD 's model: EDFT5-108L-MEO, EDFT5-113L-MFO, EDFT5-114L-MAO, or the "EUT" as referred to in this report is a T5 Low-Profile Linkable Fluorescent Lamp Fixture which measures approximately:
EDFT5-108L-MEO: 31.5 cm L x 2.3 cm W x 4.0 cm H
EDFT5-113L-MFO: 54.4 cm L x 2.3 cm W x 4.0 cm H
EDFT5-114L-MAO: 51.5 cm L x 2.3 cm W x 4.0 cm H
rated input voltage: AC 120V/60Hz.

* The test data gathered are from production sample, serial number: 0604229 provided by the manufacturer, we received EUT on 2006-4-27.

Objective

The following test report is prepared on behalf of SHENZHEN SHENSCO PHOLIGHTING TECH CO.,LTD in accordance with Part 2, Subpart J, and Part 18, Subparts A, B and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to determine compliance with FCC Part 18 limits.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurements were performed at Bay Area Compliance Lab Corp. (ShenZhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Lab Corp. (ShenZhen) to collect radiated and conducted emission measurement data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, Guangdong 518038, P.R.China.

Test site at Bay Area Compliance Lab Corp. (ShenZhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC Live conducted test site criteria set forth in ANSI C63.4-2003 and FCC MP-5.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Lab Corp. (ShenZhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2007070.htm>

External I/O Cable

Cable Description	Length (M)	From/Port	To
Unshielded detachable Power Cable	1.5	EUT	AC Mains

SYSTEM TEST CONFIGURATION


Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

Equipment Modifications


Bay Area Compliance Lab Corp. (ShenZhen) has not done any modification on the EUT.

Configuration of Test Setup



EUT

Block Diagram of Test Setup

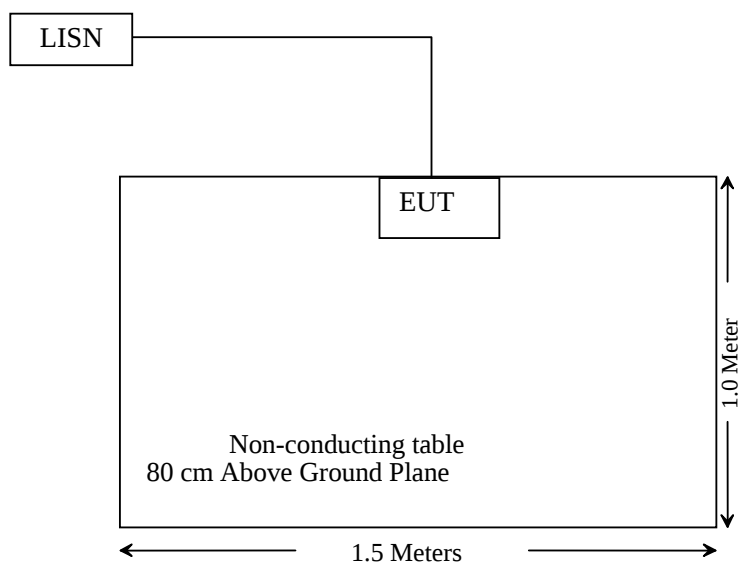


CONDUCTED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Lab Corp. (ShenZhen) is ± 2.4 dB.

EUT Setup

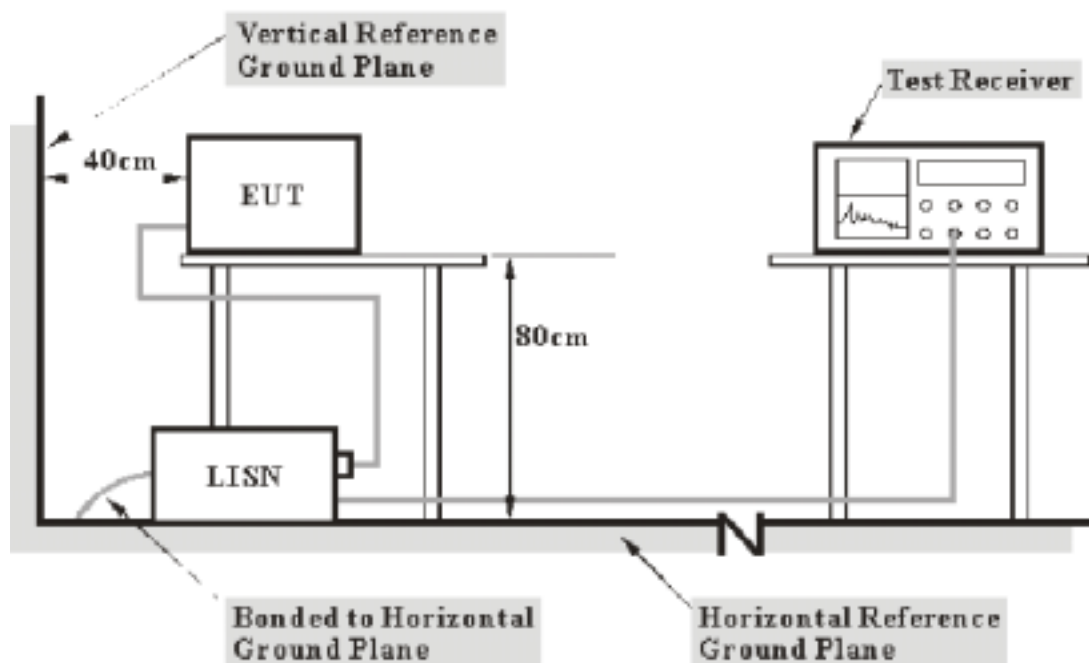

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5: 1986 measurement procedure. Specification used was with the FCC Part 18 limits.

The EUT was connected to a 120 VAC/ 60Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 450 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IFBW</i>
450 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12008	N/A	N/A
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2005-8-17	2006-8-17
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2006-2-28	2007-2-28

* Com-Power's LISN were used as the supporting equipment.

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the EUT power cord was connected to the outlet of the LISN.

Maximizing procedure were performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 18, with the worst margin reading of:

EDFT5-108L-MEO: -15.20 dB at 0.486 MHz in the Neutral conductor mode.
EDFT5-113L-MFO: -10.25 dB at 0.614 MHz in the Neutral conductor mode.
EDFT5-114L-MAO: -10.81 dB at 0.842 MHz in the Neutral conductor mode.

Test Data**Environmental Conditions**

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	940mbar

Testing was performed by Louise Lu on 2006-4-29.

Test mode: On

Model: EDFT5-108L-MEO

LIVE CONDUCTED EMISSIONS					FCC Part 18		
Frequency MHz	Amplitude (dBμV)	Detector		Phase Neutral/Live	Limit (dBμV)		Margin dB
		QP	AV		QP	AV	
0.486	32.80	QP	*	Neutral	48.00	N/A	-15.20
0.486	32.11	QP	*	Live	48.00	N/A	-15.89
0.542	31.21	QP	*	Neutral	48.00	N/A	-16.79
0.542	31.19	QP	*	Live	48.00	N/A	-16.81
0.674	29.20	QP	*	Neutral	48.00	N/A	-18.80
19.686	28.90	QP	*	Neutral	48.00	N/A	-19.10
19.910	28.08	QP	*	Live	48.00	N/A	-19.92
1.122	25.44	QP	*	Neutral	48.00	N/A	-22.56
0.978	25.12	QP	*	Live	48.00	N/A	-22.88
4.094	19.36	QP	*	Live	48.00	N/A	-28.64
4.082	18.25	QP	*	Neutral	48.00	N/A	-29.75
3.486	17.88	QP	*	Live	48.00	N/A	-30.12

Model: EDFT5-113L-MFO

LIVE CONDUCTED EMISSIONS					FCC Part 18		
Frequency MHz	Amplitude (dBμV)	Detector		Phase Neutral/Live	Limit (dBμV)		Margin dB
		QP	AV		QP	AV	
0.614	37.75	QP	*	Neutral	48.00	N/A	-10.25
0.610	37.41	QP	*	Live	48.00	N/A	-10.59
0.818	34.71	QP	*	Neutral	48.00	N/A	-13.29
1.254	34.26	QP	*	Neutral	48.00	N/A	-13.74
19.626	33.71	QP	*	Live	48.00	N/A	-14.29
19.630	33.06	QP	*	Neutral	48.00	N/A	-14.94
1.350	31.37	QP	*	Neutral	48.00	N/A	-16.63
1.578	30.93	QP	*	Live	48.00	N/A	-17.07
1.438	26.32	QP	*	Neutral	48.00	N/A	-21.68
4.082	21.89	QP	*	Live	48.00	N/A	-26.11
4.054	20.29	QP	*	Live	48.00	N/A	-27.71
2.702	19.34	QP	*	Live	69.5	N/A	-50.15

Model: EDFT5-114L-MAO


LIVE CONDUCTED EMISSIONS					FCC Part 18		
Frequency MHz	Amplitude (dBμV)	Detector		Phase Neutral/Live	Limit (dBμV)		Margin dB
		QP	AV		QP	AV	
0.842	37.19	QP	*	Neutral	48.00	N/A	-10.81
0.642	37.12	QP	*	Live	48.00	N/A	-10.88
1.022	36.80	QP	*	Neutral	48.00	N/A	-11.20
1.026	36.69	QP	*	Live	48.00	N/A	-11.31
0.670	35.79	QP	*	Live	48.00	N/A	-12.21
0.670	35.67	QP	*	Neutral	48.00	N/A	-12.33
1.278	34.45	QP	*	Neutral	48.00	N/A	-13.55
19.726	34.17	QP	*	Neutral	48.00	N/A	-13.83
1.206	34.05	QP	*	Neutral	48.00	N/A	-13.95
1.282	33.97	QP	*	Live	48.00	N/A	-14.03
19.762	33.92	QP	*	Live	48.00	N/A	-14.08
1.198	33.81	QP	*	Live	48.00	N/A	-14.19

REMARKS:

1. If the data table appeared symbol “*” means the value was too low and the QP value is under the limit for Average, so the Average level value had been omitted.

Plot(s) of Test Data


Plot(s) of Test Data is presented hereinafter as reference.

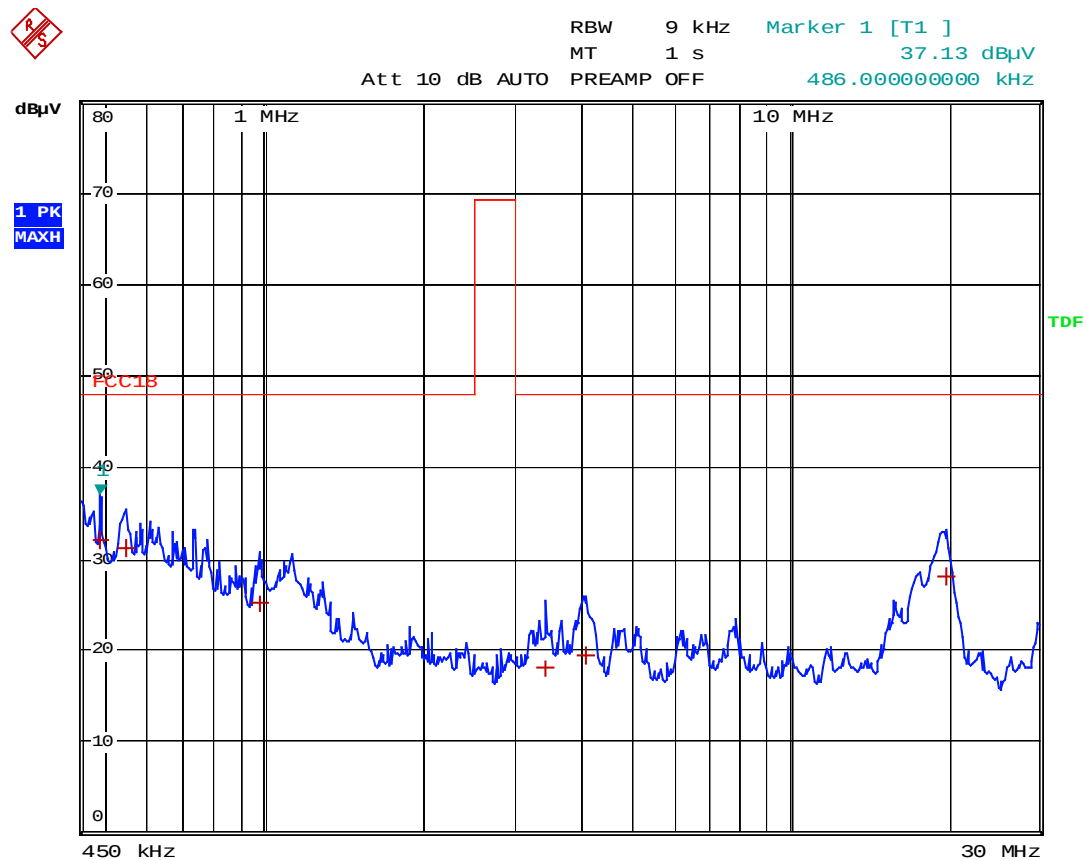

SHENSCO T5 Low-Profile Linkable Fluorescent Lamp Fixture

M/N: EDFT5-108L-ME0 L


Date: 29.APR.2006 11:57:49

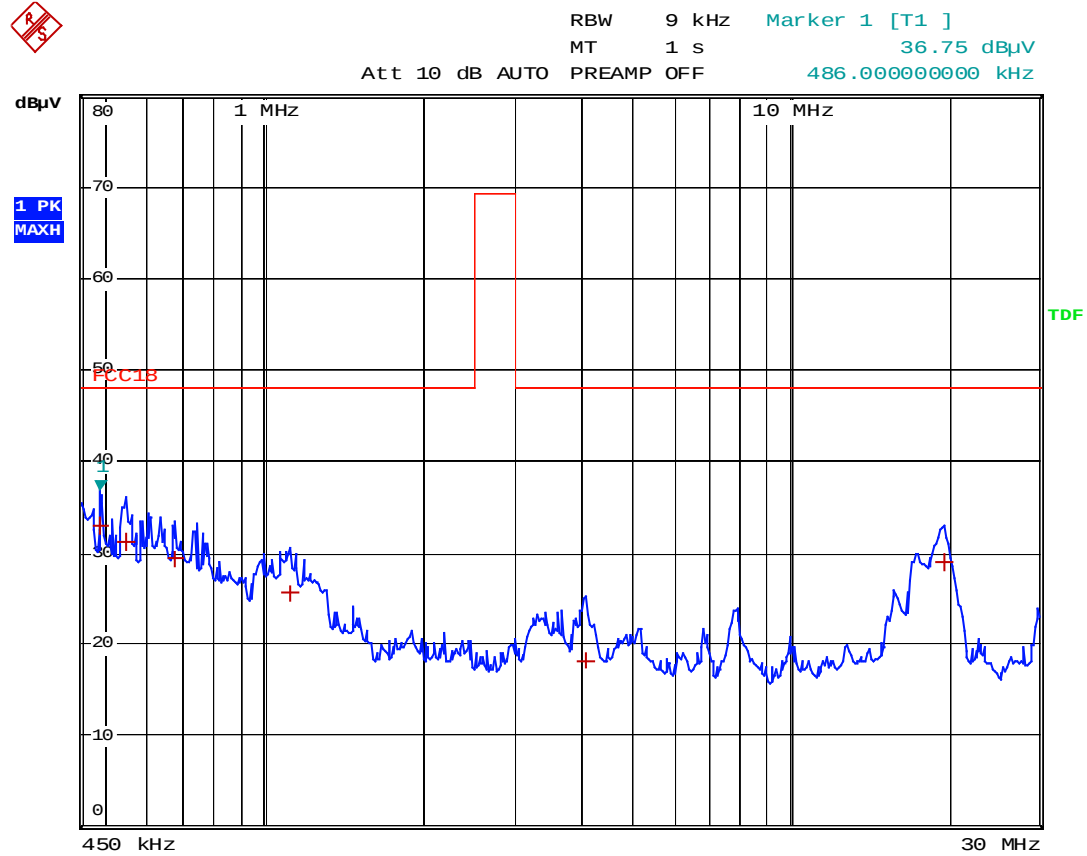

SHENSCO T5 Low-Profile Linkable Fluorescent Lamp Fixture

M/N: EDFT5-108L-ME0 N

Date: 29.APR.2006 12:02:46

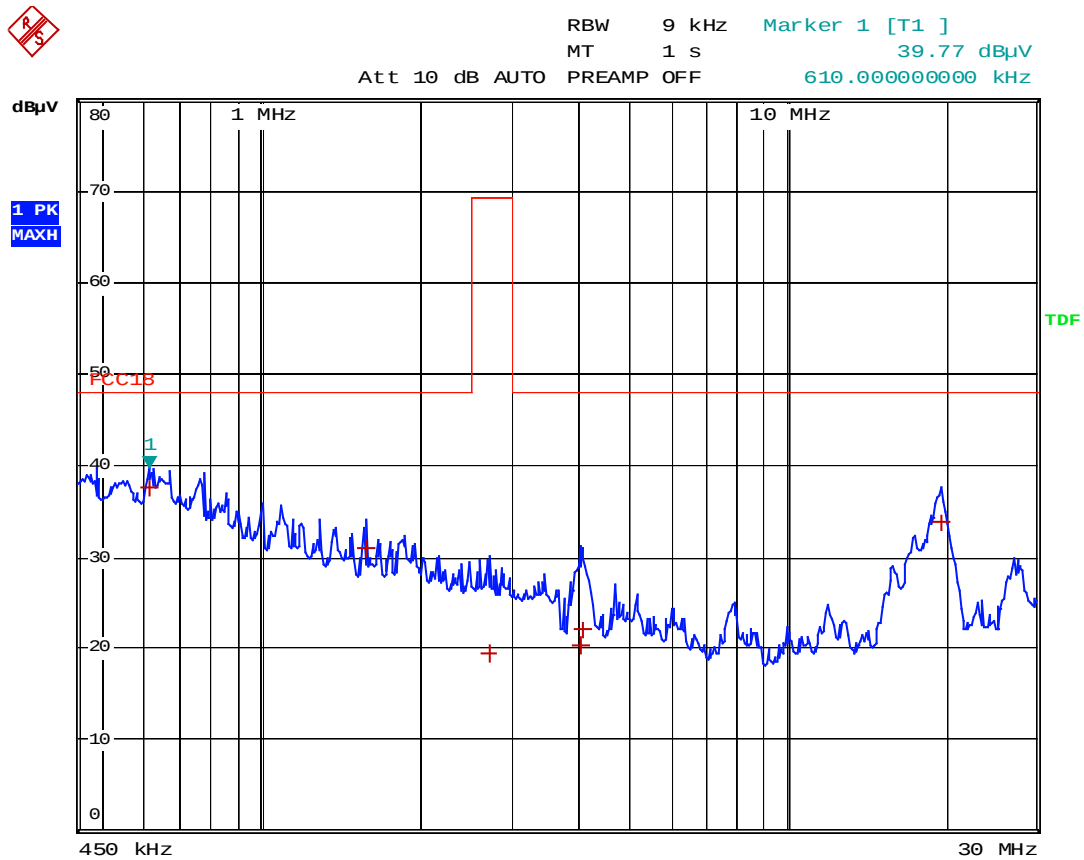

SHENSCO T5 Low-Profile Linkable Fluorescent Lamp Fixture


M/N: EDFT5-113L-MF0 L

Date: 29.APR.2006 12:56:36



M/N: EDF T5-113L-MF0 N


Date: 29.APR.2006 12:11:46

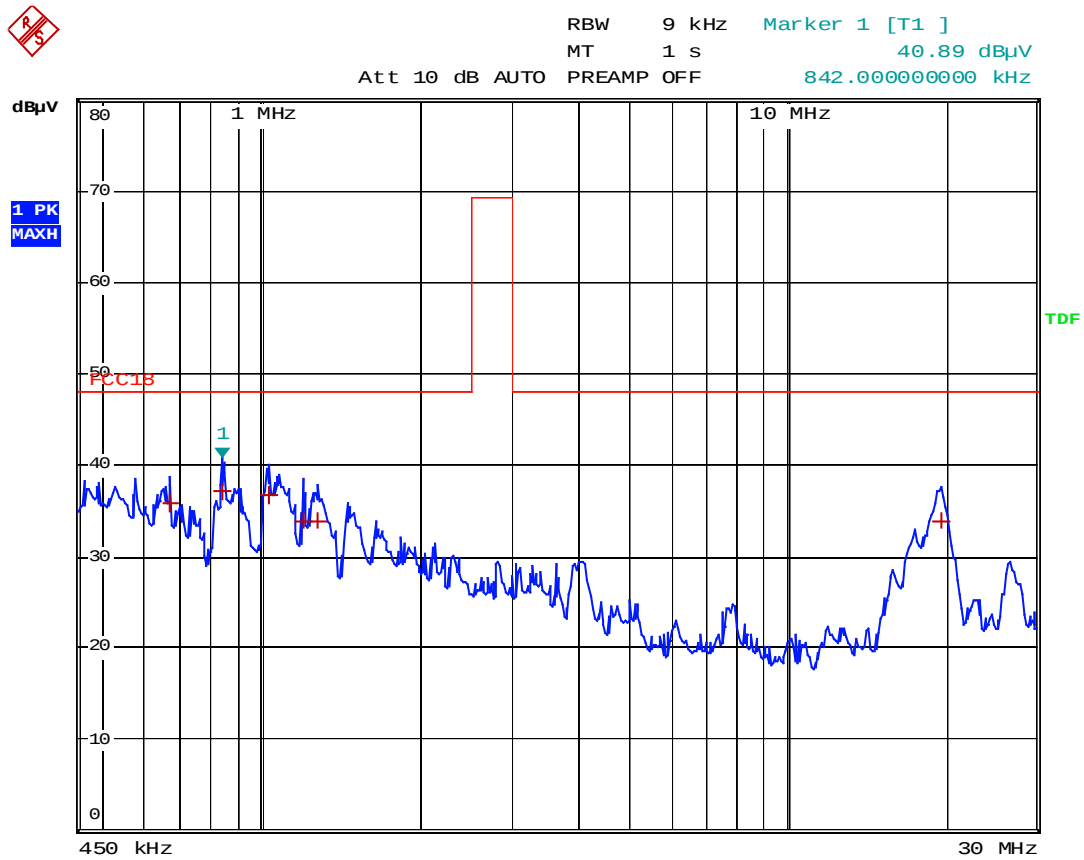

SHENSCO T5 Low-Profile Linkable Fluorescent Lamp Fixture

M/N: EDFT5-114L-MA0 L

Date: 29.APR.2006 12:51:30

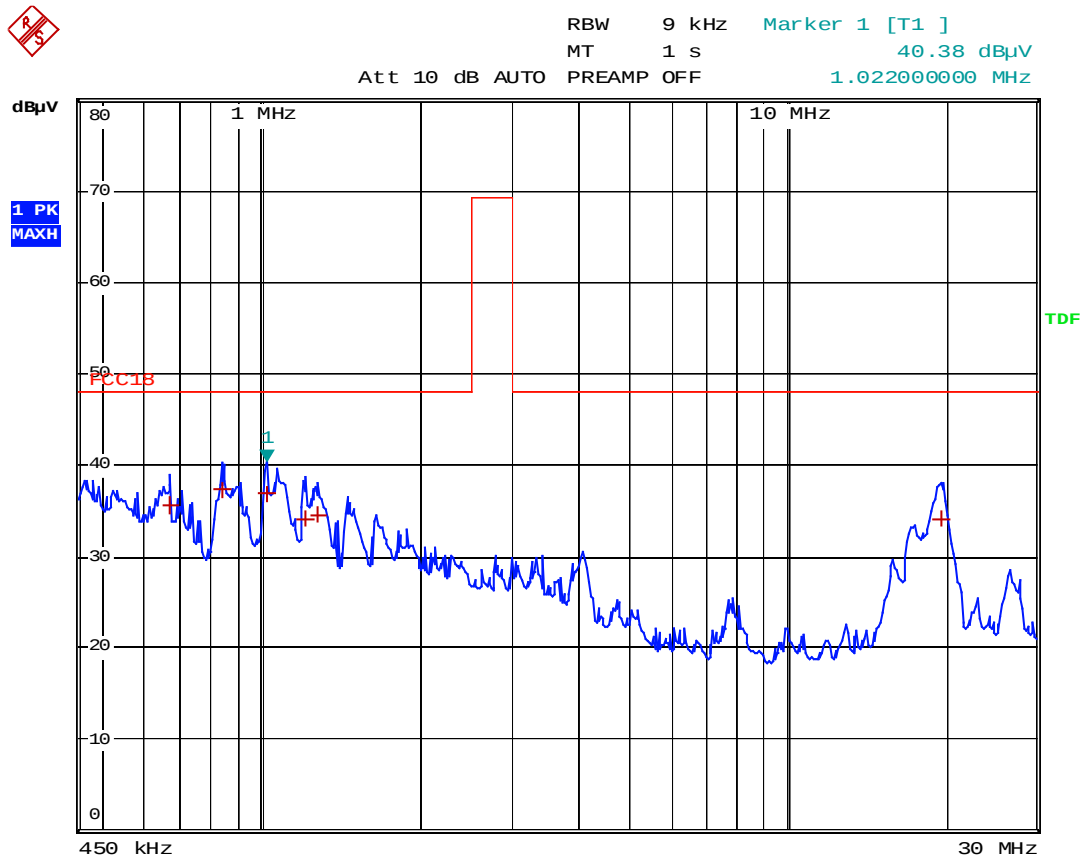

SHENSCO T5 Low-Profile Linkable Fluorescent Lamp Fixture

M/N: EDFT5-114L-MA0 N

Date: 29.APR.2006 12:47:47