

THRU Lab & Engineering.

RM302,Bokjo,29-15 , Chongpa3-Dong
Yongsan-Gu, Seoul, Korea
81221095059F81221095056 email thrukang@kornet.net



Test Report

Product Name: 433-434 MHz Wireless Device - TX

FCC ID: TA9-0100T

Applicant:
T-ink Inc.

244 W 54th ST 9th FL,
NEW YORK, NY 10019,
U.S.A.

Date Receipt: 05/18/2005

Date Tested: 06/21/2005

APPLICANT: T-ink Inc.
FCC ID: TA9-0100T
REPORT #: THRU-505031

THRU Lab & Engineering.

RM302,Bokjo,29-15 , Chongpa3-Dong

Yongsan-Gu, Seoul, Korea

81221095059F81221095056 email thrukang@kornet.net

TABLE OF CONTENTS

APPLICANT: T-ink Inc.

FCC ID: TA9-0100T

REPORT CONTAINING:

PAGE 1.....	TEST EQUIPMENT LIST
PAGE 2.....	TEST PROCEDURE
PAGE 3-5.....	RADIATION INTERFERENCE TEST DATA
PAGE 6.....	OCCUPIED BANDWIDTH
PAGE 7.....	OCCUPIED BANDWIDTH PLOT

APPLICANT: T-ink Inc.

FCC ID: TA9-0100T

REPORT #: THRU-505031

TABLE OF CONTENTS

THRU Lab & Engineering.

RM302,Bokjo,29-15 , Chongpa3-Dong

Yongsan-Gu, Seoul, Korea

81221095059F81221095056 email thrukang@kornet.net

Test Equipment List

DEVICE	MODEL	MFGR	SERNO	DUE.CAL
EMI Test Receiver	ESVS 10	Rohde & Schwarz	830489/001	2006.04.23.
Spectrum Analyzer	8566B	Hewlett Packard	2311A02394	2006.04.23
Spectrum Display	85662A	Hewlett Packard	2542A12429	2006.04.23.
Quasi-Peak Adapter	85650A	Hewlett Packard	2521A00887	2006.04.23.
RF Preselector	85685A	Hewlett Packard	2648A00504	2006.04.23
Pre-Amplifier	8449B	Hewlett Packard	3008A00375	2006.04.23.
Pre-Amplifier	8447F	Hewlett Packard	3113A05367	2006.04.23.
Spectrum Monitor	EZM	Rohde & Schwarz	862304/007	2006.04.23.
Bico-Antenna	94455-1	Eaton	977	2007.04.01.
Log-Periodic Antenna	3146	EMCO	2051	2007.04.01.
Dipole Antenna	TDA25/1/2	Electro Metrics	176/200/200	2007.04.01.
Horn Antenna	SAS-571	A.H Systems	414	2007.04.01.
Spectrum Analyzer	R3261C	Advantest	71720189	2006.04.23
LISN	KNW-242	Kyoritsu	8-923-2	2007.04.25.
LISN	8012-50-R-24	Solar	8379121	2007.04.25..
Loop Ant	6507	EMCO	1435	2005.10.06.
Signal Generator	SMS	Rohde & Schwarz	872165/100	2006.04.23.
Modulation Analyzer	8901B	Hewlett Packard	3438A05094	2006.04.23.
Frequency Counter	CMC251	Tektronic	CMC-251TW52489	2006.04.23.

APPLICANT: T-ink Inc.

FCC ID: TA9-0100T

REPORT #: THRU-505031

THRU Lab & Engineering.

RM302,Bokjo,29-15 , Chongpa3-Dong

Yongsan-Gu, Seoul, Korea

81221095059F81221095056 email thrukang@kornet.net

TEST PROCEDURES

GENERAL: This report shall NOT be reproduced except in full without the written approval of THRU Lab & ENGINEERING.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz. The ambient temperature of the UUT was 28°C with a humidity of 70%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for **radiated measurements** is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the **conducted measurement** except that the table did not rotate. The EUT was setup as described in ANSIC63.4-1992 with the EUT 40 cm from the vertical ground wall. **Not Applicable, battery operated.**

APPLICANT: T-ink Inc.

FCC ID: TA9-0100T

REPORT #: THRU-505031

THRU Lab & Engineering.

RM302,Bokjo,29-15 , Chongpa3-Dong

Yongsan-Gu, Seoul, Korea

81221095059F81221095056 email thrukang@kornet.net

APPLICANT: T-ink Inc.

FCC ID: TA9-0100T

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NO. 15.209

REQUIREMENTS: OUT-OF-BAND EMISSIONS SHALL NOT EXCEED THE LEVEL OF THE FUNDAMENTAL.

9 to 490 KHz: 2400/F (kHz) uV/m @ 300 METERS
490 to 1705 KHz: 24000/F(kHz) uV/m @ 30 METERS
1705 to 30 MHz: 29.54 dBuV/M @ 30 METERS
30 to 88 MHz: 40.00 dBuV/M @ 3 METERS
88 to 216 MHz: 43.50 dBuV/M
216 to 960 MHz: 46.00 dBuV/M
ABOVE 960 MHz: 54.00 dBuV/M

TEST

CONFIGURATION: The INTENTIONAL RADIATOR was located on the wooden table. The device was tested in transmitting modes.

TEST DATA:

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuV/m)	Margin (dBuV)	Limit (dBuV/m)
1	434.01	23.0	H	16.0	4.5	43.5	-2.5	46.0
2	868.04	6.7	H	23.5	7.1	37.3	-8.7	46.0
3	1302.07	7.6	H	23.8	2.4	33.8	-20.2	54.0
4	1736.10	3.0	H	25.1	2.7	30.8	-23.2	54.0
5	2170.14	2.9	H	27.6	3.2	33.7	-20.3	54.0

APPLICANT: T-ink Inc.

FCC ID: TA9-0100T

REPORT #: THRU-505031

THRU Lab & Engineering.

RM302,Bokjo,29-15 , Chongpa3-Dong

Yongsan-Gu, Seoul, Korea

81221095059F81221095056 email thrukang@kornet.net

APPLICANT: T-ink Inc.

FCC ID: TA9-0100T

NAME OF TEST: RADIATION INTERFERENCE CONTD.

RULES PART NO. 15.209

REQUIREMENTS: OUT-OF-BAND EMISSIONS SHALL NOT EXCEED THE LEVEL OF THE FUNDAMENTAL.

9 to 490 KHz: 2400/F (kHz) uV/m @ 300 METERS
490 to 1705 KHz: 24000/F(kHz) uV/m @ 30 METERS
1705 to 30 MHz: 29.54 dBuV/M @ 30 METERS
30 to 88 MHz: 40.00 dBuV/M @ 3 METERS
88 to 216 MHz: 43.50 dBuV/M
216 to 960 MHz: 46.00 dBuV/M
ABOVE 960 MHz: 54.00 dBuV/M

TEST

CONFIGURATION: The INTENTIONAL RADIATOR was located on the wooden table. The device was tested in transmitting modes.

TEST DATA:

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuv/m)	Margin (dBuv)	Limit (dBuv/m)
1	434.01	18.2	V	16.0	4.5	38.7	-7.3	46.0
2	868.04	5.2	V	23.5	7.1	35.8	-10.2	46.0
3	1302.07	4.7	V	23.8	2.4	30.9	-23.1	54.0
4	1736.10	2.2	V	25.1	2.7	30.0	-24.0	54.0
5	2170.14	1.9	V	27.6	3.2	32.7	-21.3	54.0

APPLICANT: T-ink Inc.

FCC ID: TA9-0100T

REPORT #: THRU-505031

THRU Lab & Engineering.

RM302,Bokjo,29-15 , Chongpa3-Dong

Yongsan-Gu, Seoul, Korea

81221095059F81221095056 email thrukang@kornet.net

APPLICANT: T-ink Inc.

FCC ID: TA9-0100T

NAME OF TEST: RADIATION INTERFERENCE CONTD.

RULES PART NO. 15.209

Test data :

No	Emission Frequency (MHz)	Meter Reading dBuV/m	Ant. Polarity	Correction Factor dB	Cable Loss dB	Field Strength (dBuv/m)	Margin (dBuv)	Limit (dBuv/m)
1	67.10	5.5	H	6.0	1.2	12.7	-27.3	40.0
2	86.14	3.9	H	9.5	1.5	14.9	-25.1	40.0
3	92.58	4.5	H	10.6	1.6	16.7	-23.3	40.0
4	129.60	9.1	H	12.6	1.9	23.6	-16.4	40.0
5	141.25	10.1	H	15.3	2.0	27.4	-12.6	40.0
6	200.64	4.6	V	10.9	2.5	18.0	-22.0	40.0
7	233.90	2.5	H	11.1	2.9	16.5	-27.0	43.5
8	275.32	10.3	V	15.8	3.3	29.4	-14.1	43.5
9	300.70	8.4	H	16.2	3.4	28.0	-15.5	43.5

SAMPLE CALCULATION: $FS_{dBuV/m} = MR_{(dBuV)} + ACF_{dB}$.

TEST PROCEDURE: The procedure used was ANSI C63.4-1992 Section 8.2. The frequency was scanned from 9.0 kHz to 1.0 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The EUT was measured in three (3) orthogonal planes. The unit was measured at ThruLab & Engineering 389 Jeam-Rhi HyangNam-Myum HwaSung Kyoungki-do Korea

TEST RESULTS: THE UNIT DOES MEET THE FCC REQUIREMENTS.

PERFORMED BY: S.W. Ahn

DATE: 06/21/05

APPLICANT: T-ink Inc.

FCC ID: TA9-0100T

REPORT #: THRU-505031

THRU Lab & Engineering.

RM302,Bokjo,29-15 , Chongpa3-Dong
Yongsan-Gu, Seoul, Korea
81221095059F81221095056 email thrukang@kornet.net

APPLICANT: T-ink Inc.

FCC ID: TA9-0100T

NAME OF TEST: Occupied Bandwidth

RULES PART NO.: 15.209

REQUIREMENTS: The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits of 15.209, whichever permits the higher emission levels.

THE GRAPH ON THE FOLLOWING PAGE REPRESENTS THE EMISSIONS TAKEN FOR THE DEVICE.

METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the above photo was taken. The vertical scale is set to 10 dB per division. The horizontal scale is set to 10 kHz per division.

TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY: S.W. Ahn

DATE: 06/21/05

APPLICANT: T-ink Inc.
FCC ID: TA9-0100T
REPORT #: THRU-505031


THRU Lab & Engineering.

RM302, Bokjo, 29-15, Chongpa3-Dong

Yongsan-Gu, Seoul, Korea

81221095059F81221095056 email thrukang@kornet.net

OCCUPIED BANDWIDTH PLOT GOES HERE

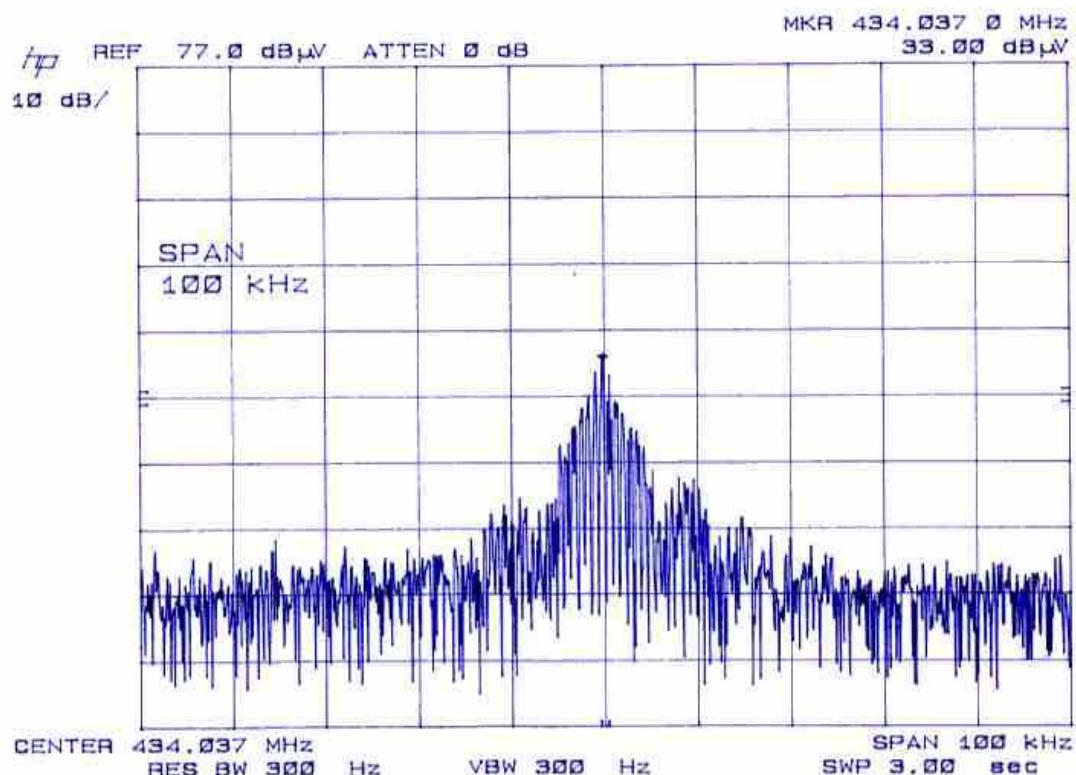

APPLICANT: T-ink Inc.

FCC ID: TA9-0100T

REPORT #: THRU-505031