

TEST REPORT
FROM
SIEMIC

For
Hand Held Reader (HHR)
To
47 CFR 15.247 DSS

Test Report Serial No.:
SL05051108B2_FCC

This report supersedes None

Remarks:

Equipment complied with the specification	☒
Equipment did not comply with the specification	☐

This Test Report is Issued Under the Authority of:


.....
Tested by: Alvin Ilarina, Test Enginner


.....
Reviewed by: Leslie Bai, Lab Manager

Issue date: 25 July 2005

Equipment Details:

Manufacturer: GE Security



Registration No. 783147



Industry Canada
Industrie Canada

Registration No. 4842



Registration No. 2195

This test report may be reproduced in full only.



Title: **GE Security
Hand Held Reader (HHR)**
To: **47 CFR 15.247 DSS**

Serial#**SL05051108B2_FCC**
Issue Date **25 July 2005**
Page **2 of 33**

This page has been left blank intentionally.



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 3 of 33

CONTENTS

EXECUTIVE SUMMARY	5
1 TECHNICAL DETAILS	6
2 TESTS REQUIRED	7
3 MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS	8
4 TEST INSTRUMENTATION.....	26
APPENDIX A: EUT TEST CONDITIONS	27
APPENDIX B: EXTERNAL PHOTOS.....	28
APPENDIX C: CIRCUIT/BLOCK DIAGRAMS	29
APPENDIX D: INTERNAL PHOTOS.....	30
APPENDIX F: PRODUCT DESCRIPTION	31
APPENDIX H: FCC LABEL LOCATION.....	32
APPENDIX I: USER MANUAL	33



Title: **GE Security
Hand Held Reader (HHR)**
To: **47 CFR 15.247 DSS**

Serial#**SL05051108B2_FCC**
Issue Date **25 July 2005**
Page **4 of 33**

This page has been left blank intentionally.



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 5 of 33

Executive Summary

The purpose of this test programme was to demonstrate compliance of the GE Security, Hand Held Reader (HHR) against the current 47 CFR 15.247 DSS. The Hand Held Reader (HHR) demonstrated compliance with the 47 CFR 15.247 DSS.

GE Security is the applicant and claimed manufacturer of this tested product. For the detailed description of this product, please refer to the Hand Held Reader (HHR) User Manual.

The test has demonstrated that this unit complies with stipulated standards.



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 6 of 33

1 Technical Details

Purpose	Compliance testing of Hand Held Reader (HHR) with 47 CFR 15.247 DSS
Applicant / Client	GE Security 4001 Fairview Industrial Dr SE Salem, OR 97302
Manufacturer	GE Security
Laboratory performing the tests	SIEMIC Labs 2206 Ringwood Avenue San Jose, CA 95131
Test location(s)	SIEMIC Labs 2206 Ringwood Avenue San Jose, CA 95131
Test report reference number	SL05051108B2_FCC
Date EUT received	17 May 2005
Standard applied	47 CFR 15.247 DSS
No of Units:	1
Equipment Category:	FHSS
Trade/Product Name:	Hand Held Reader (HHR)
Type/Model Name/No:	ATR20105/1 R1B
Technical Variants:	None
FCC ID No.	TCZ-ATT20105-1



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 7 of 33

2 Tests Required

The product was tested in accordance with the following specifications.
The test results recorded in this Test Report are exclusively referred to the tested sample(s).

Test Standard	Description	Pass / Fail
47CFR Part 15, General Conditions		
15.207	Power Line Conducted Emissions	N/A
15.209, 15.205	Radiated Spurious Emissions	Pass
47CFR Part 15, §15.247		
15.247(a)1	Carrier Frequency Separation	Pass
15.247(a)1	20 dB Bandwidth	Pass
15.247(a)1	Number of Hopping Frequencies	Pass
15.247(a)1	Time of Occupancy	Pass
15.247(b)(1)	Power Output	Pass
15.247(c)	Conducted Spurious Emissions	Pass
15.247(c)	Radiated Spurious Emissions	Pass
ANSI C63.4: 2001		

Notes: Deviations to above standards are outlined in specific test sections if applicable.
Cable loss and external attenuation are compensated for in the measurement system when applicable.



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 8 of 33

3 Measurements, Examinations and Derived Results

3.1 General observations

Equipment serial number(s)		
Module:	Part number:	Serial number:
Hand Held Reader (HHR)	ATR20105/1 R1B	None



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 9 of 33

3.2 Test Results

3.2.1 Power Line Conducted Emissions

Requirement(s): 47 CFR §15.207

Results: Not Applicable – the equipment is battery powered.




3.2.2 Radiated Spurious Emissions < 1 GHz

Requirement(s): 47 CFR §15.209

Procedures: Radiated emissions were measured according to ANSI C63.4. Equipment was tested in three orthogonal axis at hi mid and low with the worse case reported

Results:

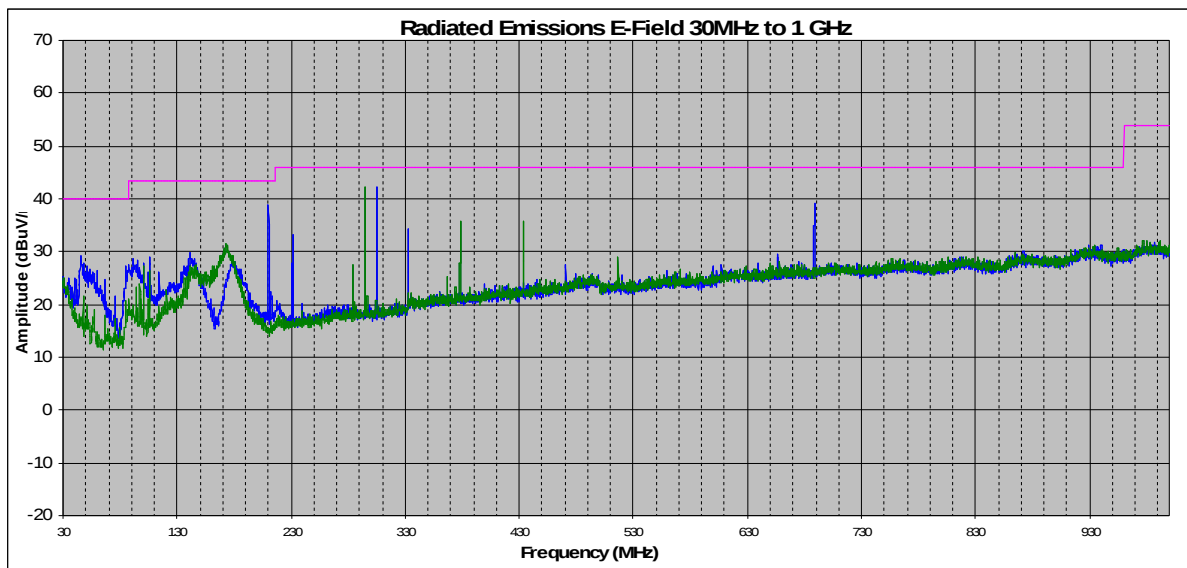

Frequency	Azimuth	Measure	Antenna Polarity	Antenna Height	Raw Amplitude @ 3m	ACF	CBL loss	Corrected Amplitude @ 3m	Limit @3m	Delta
(MHz)	(degrees)	(Avg/QP)	(H/V)	(m)	(dBuV/m)	(dBm)	(dBm)	(dBuV/m)	(dBuV/m)	(dBuV/m)
52.79	0	qp	h	1	16.10	7.92	0.76	24.78	40.00	-15.21
57.21	0	qp	h	1	17.00	7.8	0.77	25.57	40.00	-14.42
97.69	30	qp	h	1	13.10	9.75	0.89	23.74	43.50	-19.75
100.31	0	qp	h	1	14.70	10.48	0.90	26.08	43.50	-17.41
169.18	0	qp	h	2	17.40	11.96	0.96	30.33	43.50	-13.17
46.06	0	qp	v	1	19.70	8.1	0.74	28.54	40.00	-11.45
56.19	0	qp	v	1	18.40	7.63	0.77	26.81	40.00	-13.19
87.11	0	qp	v	1	18.70	6.95	0.86	26.51	40.00	-13.48
145.39	0	qp	v	1	12.20	13.76	0.94	26.90	43.50	-16.59
174.91	0	qp	v	1	11.40	12.2	0.97	24.57	43.50	-18.93

Sample Calculation: Corrected Amplitude = Raw + ACF + Cable Loss



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 11 of 33


3.2.3 Carrier Frequency Separation

Requirement(s): 47 CFR §15.247(a)(1)

Procedures: The carrier frequency separation measurement was taken conducted using a spectrum analyzer.

Results:

Plot #	Carrier Frequency Separation (MHz)
1	1.0 MHz

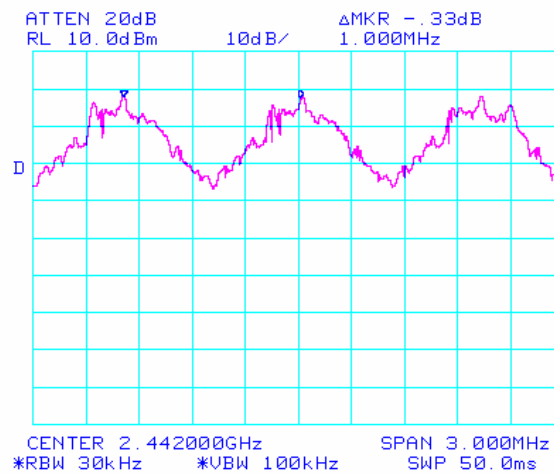

Plot 1: Carrier Frequency Separation



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 12 of 33


3.2.4 20dB Bandwidth

Requirement(s): 47 CFR §15.247(a)(1)

Procedures: The 20dB bandwidths were measured conducted using a spectrum analyzer for the low, mid, and hi channels.

Results:

Plot #	Channel	Channel Bandwidth (MHz)
2	Low	0.893
3	Mid	0.880
4	Hi	0.890

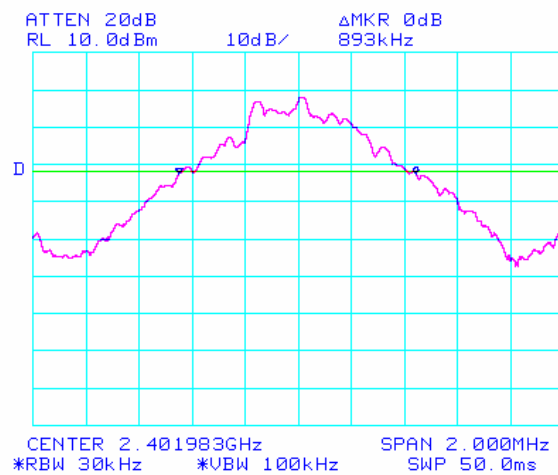


Plot 1: 20dB Bandwidth Low




Title: **GE Security
Hand Held Reader (HHR)**
To: **47 CFR 15.247 DSS**

Serial#**SL05051108B2_FCC**
Issue Date **25 July 2005**
Page **13 of 33**

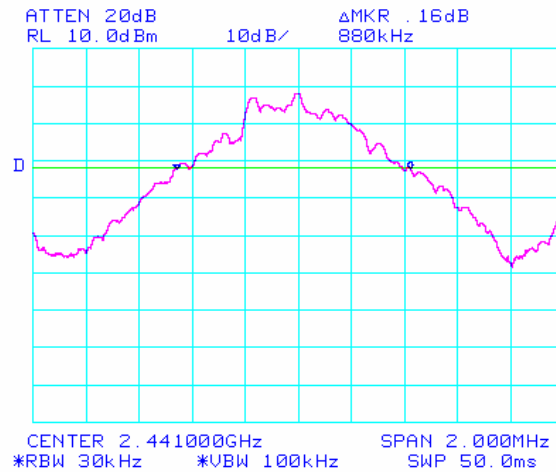

Plot 2: 20dB Bandwidth Mid

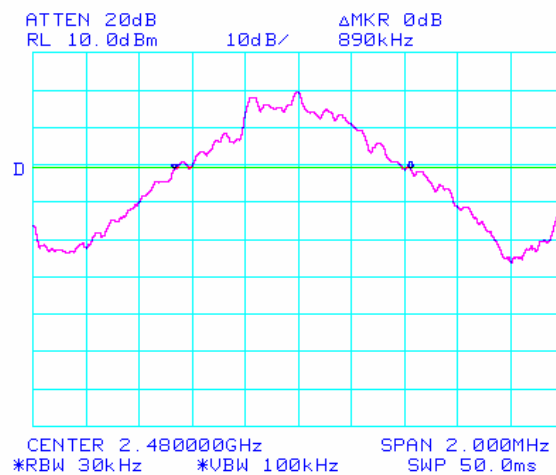

Plot 3: 20dB Bandwidth Hi



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 14 of 33


3.2.5 Number of Hopping Frequencies

Requirement(s): 47 CFR §15.247(a)(1)

Procedures: The number of hopping channels was measured conducted with a spectrum analyzer.

Results:

Plot #	Number of Hopping Channels
4	78

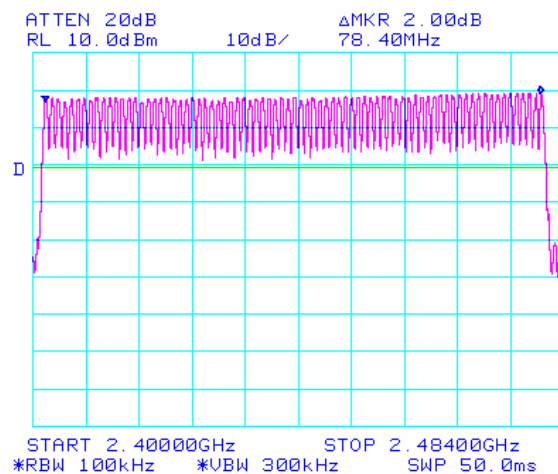

Plot 4: Number of Hopping Channels

3.2.6 Time of Occupancy

Requirement(s): 47 CFR §15.247(a)1

Time of occupancy shall not be greater than 0.4 seconds within a period of 0.4 second multiplied by the number of hopping channels (78) = 31.2 seconds


Procedures: The time of occupancy was measured conducted with a spectrum analyzer.

Results:


Plot #	Time of Occupancy (ms)
5 and 6	275.8

Time of occupancy per period = 1.75 ms

Number of periods per 31.2 seconds = 31.2 seconds/ 0.198 seconds = 157.6 periods
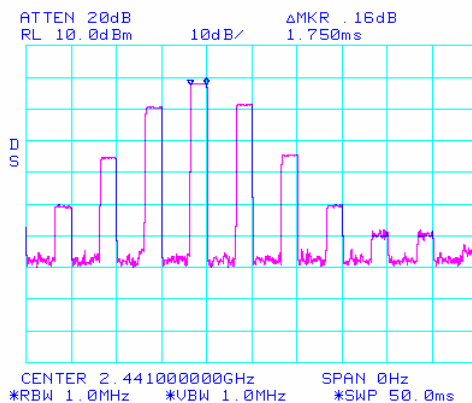
$$\text{Time of occupancy} = 1.75\text{ms} * 157.6 = 275.8\text{ms}$$


Plot 5: Time of occupancy (1 of 2)

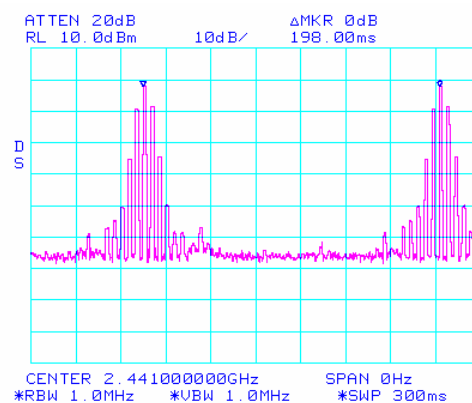

Plot 6: Time of occupancy (2 of 2)



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 16 of 33


3.2.7 Peak Output Power

Requirement(s): 47 CFR §15.247(b)(1)

Procedures: The peak output power was measured conducted using a spectrum analyzer for the low, mid, and hi channels.

Results:

Plot #	Channel	Peak Power (dBm)
7	Low	-1.67
8	Mid	-1.67
9	Hi	-0.67

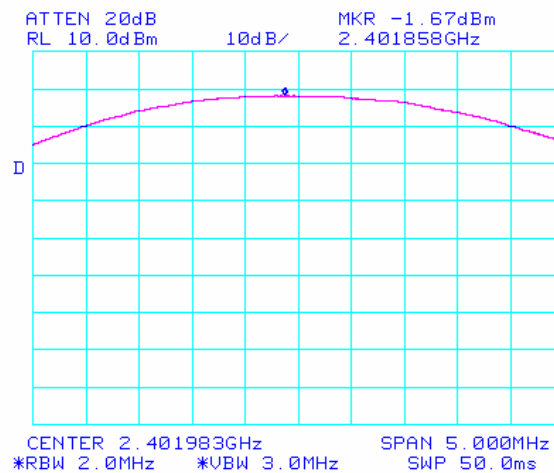


Plot 7: Peak Power Low




SIEMIC

Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 17 of 33

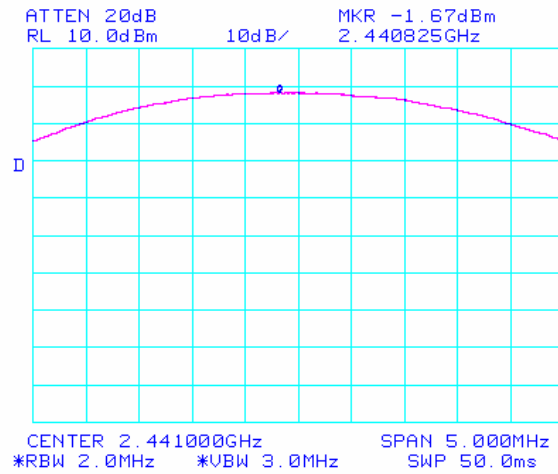

Plot 8: Peak Power Mid

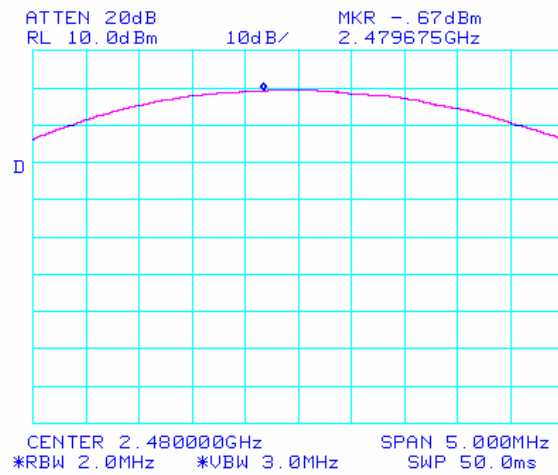

Plot 9: Peak Power Hi



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 18 of 33


3.2.8 Conducted Spurious Emissions

Requirement(s): 47 CFR §15.247(c)

Procedures: The conducted spurious emissions were measured conducted using a spectrum analyzer for the low, mid, and hi channels.

Results:

Plots #	Channel	Pass/Fail
10 to 13	Hi	Pass
14 to 17	Mid	Pass
18 to 22	Low	Pass

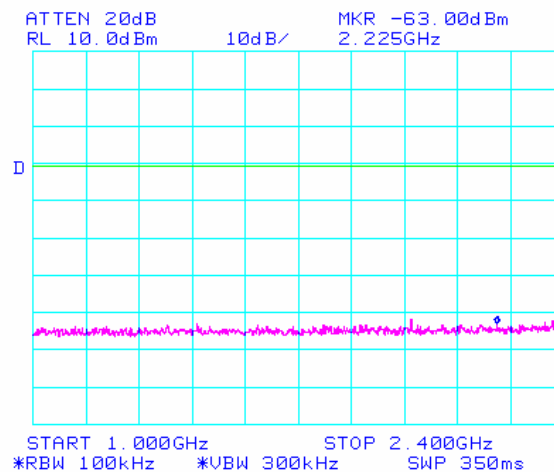


Plot 10: Conducted Spurious Emissions Hi (1/4)




Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 19 of 33

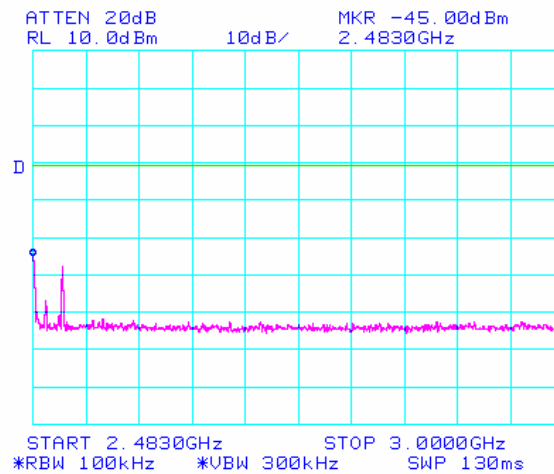

Plot 11: Conducted Spurious Emissions Hi (2/4)

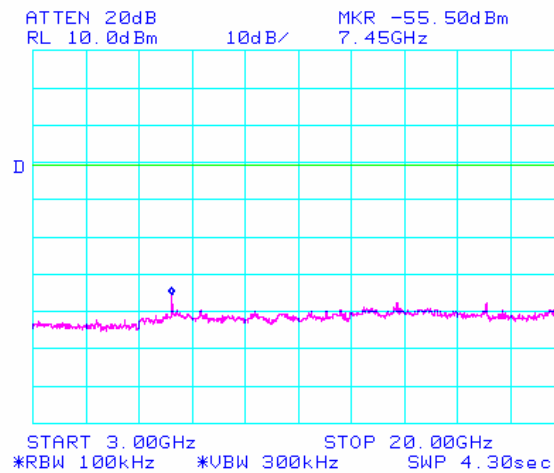


Plot 12: Conducted Spurious Emissions Hi (3/4)




Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 20 of 33

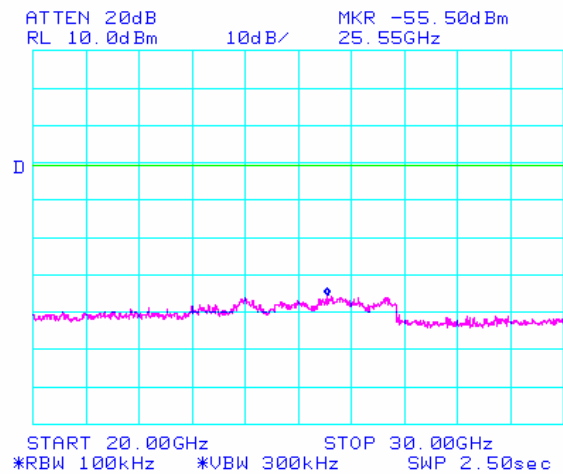

Plot 13: Conducted Spurious Emissions Hi (4/4)

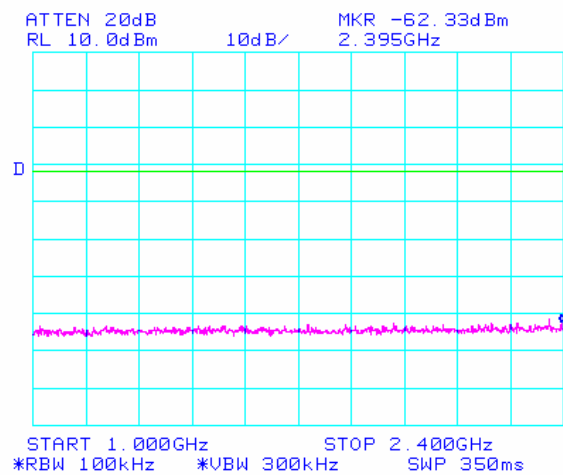


Plot 14: Conducted Spurious Emissions Mid (1/4)




Title: **GE Security
Hand Held Reader (HHR)**
To: **47 CFR 15.247 DSS**

Serial#**SL05051108B2_FCC**
Issue Date **25 July 2005**
Page **21 of 33**

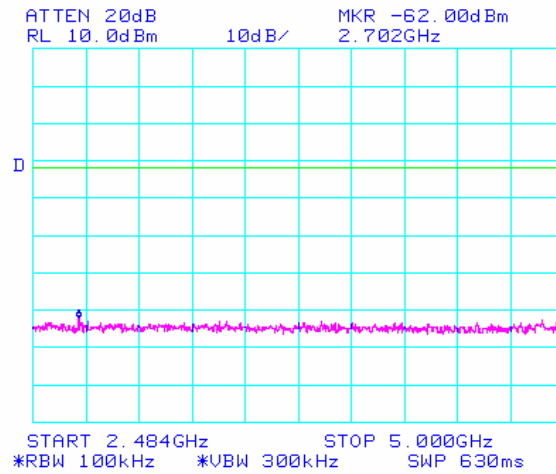

Plot 15: Conducted Spurious Emissions Mid (2/4)

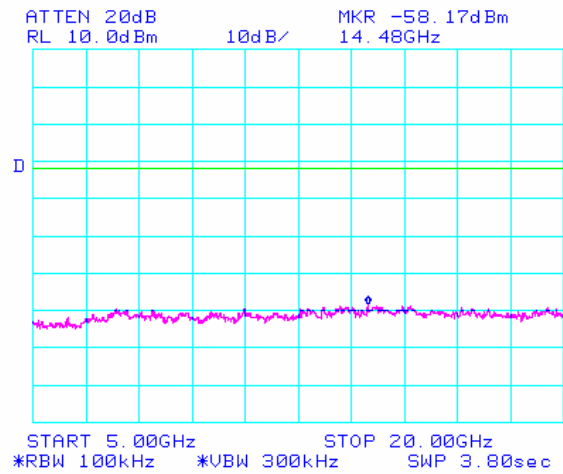


Plot 16: Conducted Spurious Emissions Mid (3/4)




Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 22 of 33

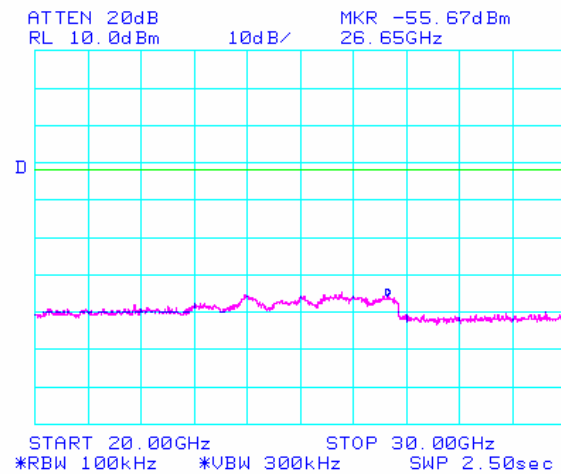

Plot 17: Conducted Spurious Emissions Mid (4/4)

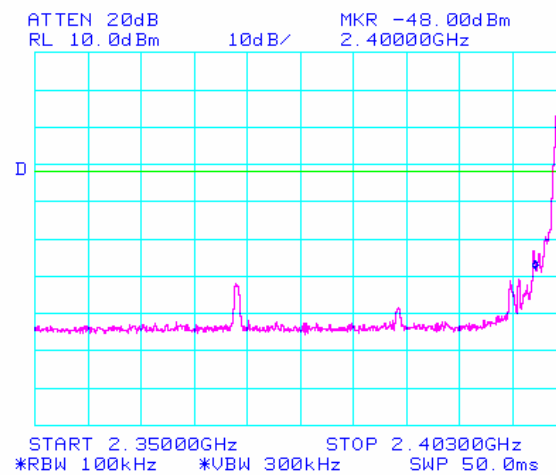


Plot 18: Conducted Spurious Emissions Low (1/5)




Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 23 of 33

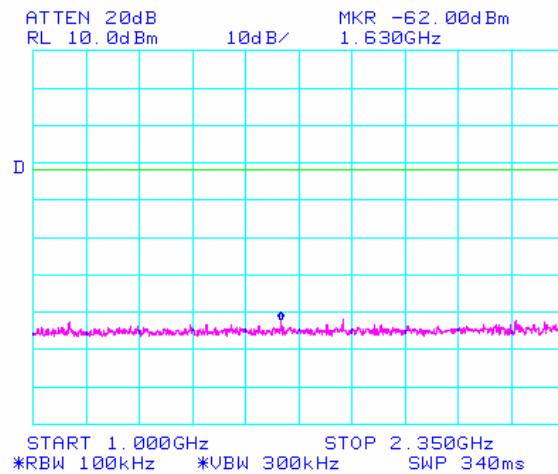

Plot 19: Conducted Spurious Emissions Low (2/5)

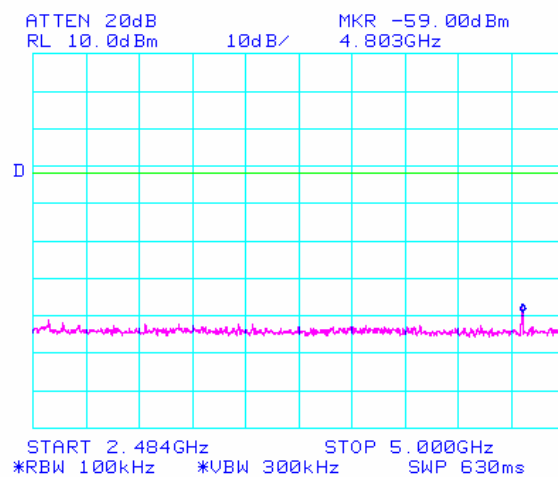


Plot 20: Conducted Spurious Emissions Low (3/5)




Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 24 of 33

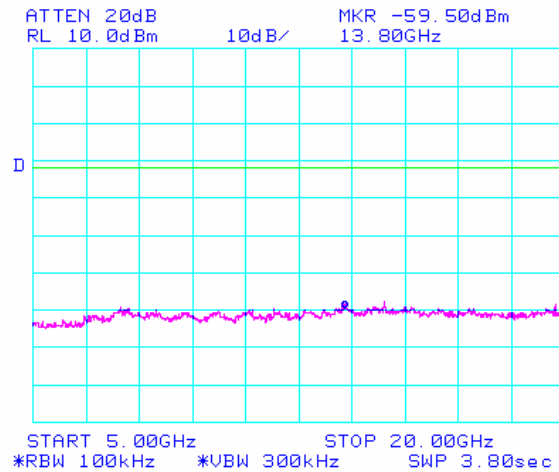

Plot 21: Conducted Spurious Emissions Low (4/5)

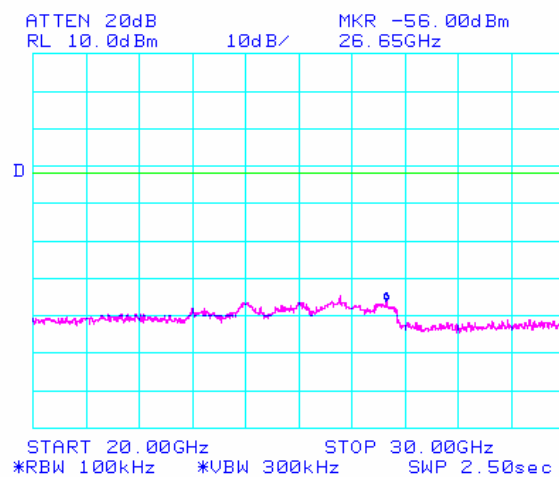

Plot 22: Conducted Spurious Emissions Low (5/5)



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 25 of 33

3.2.9 Radiated Spurious Emissions > 1 GHz

Requirement(s): 47 CFR §15.247(c)


Procedures: Equipment was setup in a semi-anechoic chamber. For measurements above 1 GHz an average measurement was taken with a 1MHz resolution bandwidth was used.

Results:

Channel	Frequency (GHz)	Detector	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	EUT Field Strength Final Amp. (dBuV/m)	FS Limit @ 3m (dBuV/m)	Margin (dBuV/m)
hi	4.96	Pk	0	H/V		noise floor		
hi	7.44	Pk	0	H/V		noise floor		
hi	9.92	Pk	0	H/V		noise floor		
lo	1.8	Pk	0	H/V		noise floor		
lo	1.8	Pk	0	H/V		noise floor		
lo	2.7	Pk	0	H/V		noise floor		
mid	1.83	Pk	0	H/V		noise floor		
mid	1.83	Pk	0	H/V		noise floor		
mid	2.74	Pk	0	H/V		noise floor		

Sample Calculation:

EUT Field Strength = Antenna Factor(dB) + Cable Loss(dB) – Amplifier Gain(dB) + Filter Attenuation(dB, if used)

[illegible]



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 27 of 33

APPENDIX A: EUT TEST CONDITIONS

The following is the description of supporting equipment and details of cables used with the EUT.

Equipment Description (Including Brand Name)	Cable Description
PC Laptop Custom Test Fixture	None

EUT Description	: Hand Held Reader (HHR)
Model No	: Hand Held Reader (HHR)

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
	The EUT was controlled and monitored via custom programming box.



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 28 of 33

APPENDIX B: External Photos

See Attachment



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 29 of 33

APPENDIX C: CIRCUIT/BLOCK DIAGRAMS

See Attachment



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 30 of 33

APPENDIX D: Internal Photos

See Attachment



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 31 of 33

APPENDIX F: PRODUCT DESCRIPTION

Detail description of this product is shown in the User's Guide.



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 32 of 33

APPENDIX H: FCC LABEL LOCATION

See Attachment



Title: GE Security
Hand Held Reader (HHR)
To: 47 CFR 15.247 DSS

Serial#SL05051108B2_FCC
Issue Date 25 July 2005
Page 33 of 33

APPENDIX I: USER MANUAL

See Attachment