



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372
3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372
13301 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

December 5, 2012

Murata Wireless
4441 Sigma Road
Dallas, TX 75244

Dear Bob Nelson,

Enclosed is the EMC Wireless test report for compliance testing of the Murata Wireless, DR-WLS1271L-102 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15, Subpart B and ICES-003, Issue 5 August 2012 for a Class B Digital Device, and FCC Part 15 Subpart C and RSS-210, Issue 8, Dec. 2010 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\Murata Wireless\EMCS36587C-FCC247)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.

Electromagnetic Compatibility Criteria Test Report

for the

**Murata Wireless
DR-WLS1271L-102**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class B Digital Devices
&
15.247 Subpart C & RSS-210, Issue 8, Dec. 2010
for Intentional Radiators

MET Report: EMCS36587C-FCC247

December 5, 2012

Prepared For:

**Murata Wireless
4441 Sigma Road
Dallas, TX 75244**

Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Ave.
Baltimore, MD 21230

Electromagnetic Compatibility Criteria Test Report

for the

Murata Wireless
DR-WLS1271L-102

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class B Digital Devices
&
15.247 Subpart C & RSS-210, Issue 8, Dec. 2010
for Intentional Radiators




Anderson Soungpanya, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Parts 15B, 15.247 and Industry Canada standards ICES-003, Issue 5 August 2012, RSS-210, Issue 8, Dec. 2010 under normal use and maintenance.

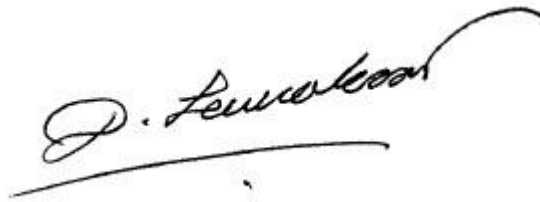

Dusmantha Tennakoon,
Wireless Manager, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	December 5, 2012	Initial Issue.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	5
	C. Test Site	5
	D. Description of Test Sample.....	6
	E. Equipment Configuration.....	8
	F. Support Equipment	8
	G. Ports and Cabling Information.....	8
	H. Mode of Operation.....	8
	I. Method of Monitoring EUT Operation	8
	J. Modifications	9
	a) Modifications to EUT	9
	b) Modifications to Test Standard.....	9
	K. Disposition of EUT	9
III.	Electromagnetic Compatibility Criteria for Unintentional Radiators	10
	§ 15.107(a) Conducted Emissions Limits.....	11
	§ 15.109(a) Radiated Emissions Limits.....	15
IV.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	20
	§ 15.203 Antenna Requirement	21
	§ 15.207(a) Conducted Emissions Limits.....	22
	§ 15.247(a)(a) 6 dB and 99% Bandwidth	26
	§ 15.247(b) Peak Power Output	34
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge.....	39
	§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge.....	58
	§ 15.247(e) Peak Power Spectral Density	71
	§ 15.247(i) Maximum Permissible Exposure	76
	RSS-GEN Receiver Spurious Emissions	77
V.	Test Equipment	79
VI.	Certification & User's Manual Information	81
	A. Certification Information	82
	B. Label and User's Manual Information	86
VII.	ICES-003 Procedural & Labeling Requirements.....	88

List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing	2
Table 2. EUT Summary Table.....	4
Table 3. References	5
Table 4. Equipment Configuration	8
Table 5. Support Equipment.....	8
Table 6. Ports and Cabling Information	8
Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b)	11
Table 8. Conducted Emissions - Voltage, AC Power, Phase Line	12
Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line.....	13
Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	15
Table 11. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, FCC Limits	16
Table 12. Radiated Emissions Limits, Test Results, ICES-003 Limits	17
Table 13. Antenna List	21
Table 14. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	22
Table 15. Conducted Emissions, 15.207(a), Phase Line, Test Results	23
Table 16. Conducted Emissions, 15.207(a), Neutral Line, Test Results	24
Table 17. 6 dB Occupied Bandwidth, Test Results	27
Table 18. 99% Occupied Bandwidth, Test Results	27
Table 19. Output Power Requirements from §15.247(b)	34
Table 20. Peak Power Output, Test Results	35
Table 21. Restricted Bands of Operation.....	39
Table 22. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)	40
Table 23. Peak Power Spectral Density, Test Results	72
Table 24. Spurious Emission Limits for Receivers	77
Table 25. Test Equipment List	80

List of Plots

Plot 1. Conducted Emission, Phase Line Plot	12
Plot 2. Conducted Emission, Neutral Line Plot.....	13
Plot 3. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits	16
Plot 4. Radiated Emissions, ICES-003 Limits	17
Plot 5. Conducted Emissions, 15.207(a), Phase Line	23
Plot 6. Conducted Emissions, 15.207(a), Neutral Line	24
Plot 7. 6 dB Occupied Bandwidth, Low Channel, 802.11b.....	28
Plot 8. 6 dB Occupied Bandwidth, Mid Channel, 802.11b	28
Plot 9. 6 dB Occupied Bandwidth, High Channel, 802.11b	28
Plot 10. 6 dB Occupied Bandwidth, Low Channel, 802.11g.....	29
Plot 11. 6 dB Occupied Bandwidth, Mid Channel, 802.11g	29
Plot 12. 6 dB Occupied Bandwidth, High Channel, 802.11g	29
Plot 13. 6 dB Occupied Bandwidth, Low Channel, 802.11n 20 MHz.....	30
Plot 14. 6 dB Occupied Bandwidth, Mid Channel, 802.11n 20 MHz	30
Plot 15. 6 dB Occupied Bandwidth, High Channel, 802.11n 20 MHz	30
Plot 16. 99% Occupied Bandwidth, Low Channel, 802.11b	31
Plot 17. 99% Occupied Bandwidth, Mid Channel, 802.11b.....	31
Plot 18. 99% Occupied Bandwidth, High Channel, 802.11b	31
Plot 19. 99% Occupied Bandwidth, Low Channel, 802.11g	32
Plot 20. 99% Occupied Bandwidth, Mid Channel, 802.11g.....	32
Plot 21. 99% Occupied Bandwidth, High Channel, 802.11g	32
Plot 22. 99% Occupied Bandwidth, Low Channel, 802.11n 20 MHz	33

Plot 23. 99% Occupied Bandwidth, Mid Channel, 802.11n 20 MHz.....	33
Plot 24. 99% Occupied Bandwidth, High Channel, 802.11n 20 MHz	33
Plot 25. Peak Power Output, Low Channel, 802.11b	36
Plot 26. Peak Power Output, Mid Channel, 802.11b.....	36
Plot 27. Peak Power Output, High Channel, 802.11b	36
Plot 28. Peak Power Output, Low Channel, 802.11g.....	37
Plot 29. Peak Power Output, Mid Channel, 802.11g.....	37
Plot 30. Peak Power Output, High Channel, 802.11g	37
Plot 31. Peak Power Output, Low Channel, 802.11n 20 MHz	38
Plot 32. Peak Power Output, Mid Channel, 802.11n 20 MHz.....	38
Plot 33. Peak Power Output, High Channel, 802.11n 20 MHz	38
Plot 34. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, 802.11b.....	41
Plot 35. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, 802.11b.....	41
Plot 36. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, 802.11b.....	42
Plot 37. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, 802.11b	42
Plot 38. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, 802.11b	43
Plot 39. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, 802.11b.....	43
Plot 40. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, 802.11g.....	44
Plot 41. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, 802.11g.....	44
Plot 42. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, 802.11g.....	45
Plot 43. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, 802.11g	45
Plot 44. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, 802.11g	46
Plot 45. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, 802.11g.....	46
Plot 46. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, 802.11n 20 MHz.....	47
Plot 47. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, 802.11n 20 MHz	47
Plot 48. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, 802.11n 20 MHz	48
Plot 49. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, 802.11n 20 MHz	48
Plot 50. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, 802.11n 20 MHz	49
Plot 51. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, 802.11n 20 MHz.....	49
Plot 52. Radiated Restricted Band Edge, Low Channel, Average, 802.11b.....	50
Plot 53. Radiated Restricted Band Edge, Low Channel, Peak, 802.11b.....	50
Plot 54. Radiated Restricted Band Edge, High Channel, Average, 802.11b	51
Plot 55. Radiated Restricted Band Edge, High Channel, Peak, 802.11b.....	51
Plot 56. Radiated Restricted Band Edge, Low Channel, Average, 802.11g.....	52
Plot 57. Radiated Restricted Band Edge, Low Channel, Peak, 802.11g.....	52
Plot 58. Radiated Restricted Band Edge, High Channel, Average, 802.11g	53
Plot 59. Radiated Restricted Band Edge, High Channel, Peak, 802.11g.....	53
Plot 60. Radiated Restricted Band Edge, Low Channel, Average, 802.11n 20 MHz.....	54
Plot 61. Radiated Restricted Band Edge, Low Channel, Peak, 802.11n 20 MHz	54
Plot 62. Radiated Restricted Band Edge, High Channel, Average, 802.11n 20 MHz	55
Plot 63. Radiated Restricted Band Edge, High Channel, Peak, 802.11n 20 MHz.....	55
Plot 64. Conducted Spurious Emissions, Low Channel, 30 MHz – 1 GHz, 802.11b.....	59
Plot 65. Conducted Spurious Emissions, Low Channel, 1 GHz – 26 GHz, 802.11b	59
Plot 66. Conducted Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, 802.11b	60
Plot 67. Conducted Spurious Emissions, Mid Channel, 1 GHz – 26 GHz, 802.11b	60
Plot 68. Conducted Spurious Emissions, High Channel, 30 MHz – 1 GHz, 802.11b	61
Plot 69. Conducted Spurious Emissions, High Channel, 1 GHz – 26 GHz, 802.11b.....	61
Plot 70. Conducted Spurious Emissions, Low Channel, 30 MHz – 1 GHz, 802.11g.....	62
Plot 71. Conducted Spurious Emissions, Low Channel, 1 GHz – 26 GHz, 802.11g	62
Plot 72. Conducted Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, 802.11g	63
Plot 73. Conducted Spurious Emissions, Mid Channel, 1 GHz – 26 GHz, 802.11g	63
Plot 74. Conducted Spurious Emissions, High Channel, 30 MHz – 1 GHz, 802.11g	64
Plot 75. Conducted Spurious Emissions, High Channel, 1 GHz – 26 GHz, 802.11g.....	64

Plot 76. Conducted Spurious Emissions, Low Channel, 30 MHz – 1 GHz, 802.11n 20 MHz.....	65
Plot 77. Conducted Spurious Emissions, Low Channel, 1 GHz – 26 GHz, 802.11n 20 MHz	65
Plot 78. Conducted Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, 802.11n 20 MHz	66
Plot 79. Conducted Spurious Emissions, Mid Channel, 1 GHz – 26 GHz, 802.11n 20 MHz	66
Plot 80. Conducted Spurious Emissions, High Channel, 30 MHz – 1 GHz, 802.11n 20 MHz	67
Plot 81. Conducted Spurious Emissions, High Channel, 1 GHz – 26 GHz, 802.11n 20 MHz.....	67
Plot 82. Conducted Band Edge, Low Channel, 802.11b	68
Plot 83. Conducted Band Edge, High Channel, 802.11b.....	68
Plot 84. Conducted Band Edge, Low Channel, 802.11g	69
Plot 85. Conducted Band Edge, High Channel, 802.11g.....	69
Plot 86. Conducted Band Edge, Low Channel, 802.11n 20 MHz	70
Plot 87. Conducted Band Edge, High Channel, 802.11n 20 MHz.....	70
Plot 88. Peak Power Spectral Density, Low Channel, 802.11b	73
Plot 89. Peak Power Spectral Density, Mid Channel, 802.11b	73
Plot 90. Peak Power Spectral Density, High Channel, 802.11b	73
Plot 91. Peak Power Spectral Density, Low Channel, 802.11g	74
Plot 92. Peak Power Spectral Density, Mid Channel, 802.11g	74
Plot 93. Peak Power Spectral Density, High Channel, 802.11g	74
Plot 94. Peak Power Spectral Density, Low Channel, 802.11n 20 MHz.....	75
Plot 95. Peak Power Spectral Density, Mid Channel, 802.11n 20 MHz	75
Plot 96. Peak Power Spectral Density, High Channel, 802.11n 20 MHz	75
Plot 97. Receiver Spurious Emission, 30 MHz – 1 GHz.....	78
Plot 98. Receiver Spurious Emission, 1 GHz – 18 GHz	78

List of Figures

Figure 1. Block Diagram of Test Configuration.....	7
Figure 2. Block Diagram, Occupied Bandwidth Test Setup.....	26
Figure 3. Peak Power Output Test Setup.....	34
Figure 4. Block Diagram, Conducted Spurious Emissions Test Setup.....	58
Figure 5. Block Diagram, Peak Power Spectral Density Test Setup	71
Figure 6. Block Diagram, Conducted Receiver Spurious Emissions Test Setup	77

List of Photographs

Photograph 1. Murata Wireless DR-WLS1271L-102	6
Photograph 2. Conducted Emissions, Test Setup	14
Photograph 3. Conducted Emissions, Test Setup, Side View	14
Photograph 4. Radiated Emissions, Test Setup	18
Photograph 5. Radiated Emissions, Test Setup, 30 MHz – 1 GHz.....	18
Photograph 6. Radiated Emissions, Test Setup, Rear View	19
Photograph 7. Conducted Emissions, 15.207(a), Test Setup.....	25
Photograph 8. Conducted Emissions, 15.207(a), Test Setup, Side View	25
Photograph 9. Radiated Spurious Emissions, Test Setup	56
Photograph 10. Radiated Spurious Emissions, Test Setup 30MHz – 1GHz	56
Photograph 11. Radiated Spurious Emissions, Test Setup above 1 GHz (1 Meter Distance for Radiated Spurious)	57
Photograph 12. Radiated Spurious Emissions, Test Setup above 1 GHz (3 Meter Distance for Radiated Band Edge)	57

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
d	Measurement Distance
dB	Decibels
dBμA	Decibels above one microamp
dBμV	Decibels above one microvolt
dBμA/m	Decibels above one microamp per meter
dBμV/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
f	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	microhenry
μ	microfarad
μs	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Murata Wireless DR-WLS1271L-102, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the DR-WLS1271L-102. Murata Wireless should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the DR-WLS1271L-102, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Murata Wireless, purchase order number 30835. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference 47 CFR Part 15.247:2005	IC Reference RSS-210 Issue 8: 2010; RSS-GEN Issue 3: 2010	Description	Compliance
47 CFR Part 15.107 (a)	ICES-003 Issue 5 August 2012	Conducted Emission Limits for a Class B Digital Device	Compliant
47 CFR Part 15.109 (a)	ICES-003 Issue 5 August 2012	Radiated Emission Limits for a Class B Digital Device	Compliant
Title 47 of the CFR, Part 15 §15.203	N/A	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-GEN (7.2.4)	Conducted Emission Limits	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(2)	RSS-Gen(4.6)	6dB Occupied Bandwidth	Compliant
		99% Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	RSS-210(A8.4)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	RSS-210(A8.5)	Radiated Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	RSS-210(A8.5)	RF Conducted Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	RSS-210(A8.5)	RF Conducted Band Edge	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	RSS-210(A8.2)	Peak Power Spectral Density	Compliant
Title 47 of the CFR, Part 15 §15.247(i)	RSS-Gen(5.6)	Maximum Permissible Exposure (MPE)	Compliant
N/A	RSS-Gen(4.10)	Receiver Spurious Emissions	Compliant

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by Murata Wireless to perform testing on the DR-WLS1271L-102, under Murata Wireless's purchase order number 30835.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Murata Wireless, DR-WLS1271L-102.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	DR-WLS1271L-102	
Model(s) Covered:	DR-WLS1271L-102	
EUT Specifications:	Primary Power: 5VDC (Supplied from USB Laptop)	
	FCC ID: TE6-DRWLS1271L IC: 10748A-DRWLS1271L	
	Type of Modulations:	DSSS & OFDM
	Equipment Code:	DTS
	Peak RF Output Power:	21.73dBm
	EUT Frequency Ranges:	2412MHz-2462MHz
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Anderson Soungpanya	
Report Date(s):	December 5, 2012	

Table 2. EUT Summary Table

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
RSS-210, Issue 8, Dec. 2010	Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
RSS-GEN, Issue 3, Dec. 2010	General Requirements and Information for the Certification of Radio Apparatus
ICES-003, Issue 5 August 2012	Information Technology Equipment (ITE) — Limits and methods of measurement
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2009	American National Standard for Testing Unlicensed Wireless Devices

Table 3. References


C. Test Site

All testing was performed at MET Laboratories, Inc., 3162 Belick St., Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The Murata Wireless DR-WLS1271L-102, Equipment Under Test (EUT), is a WiFi Bluetooth combo module - WiFi 802.11b/g/n - Bluetooth core 4.0.

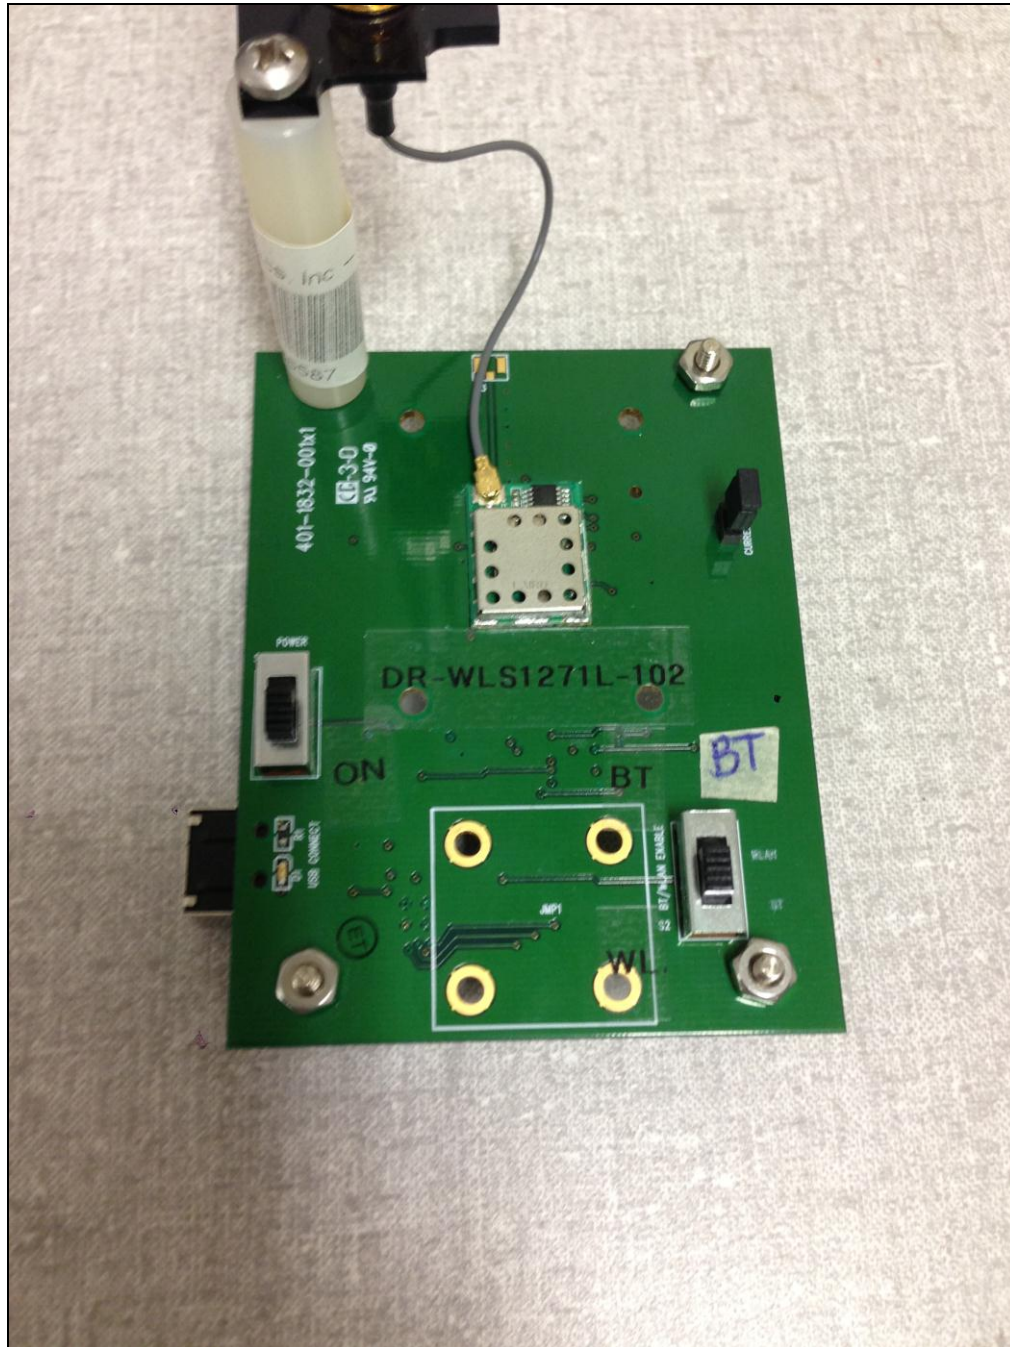

Photograph 1. Murata Wireless DR-WLS1271L-102

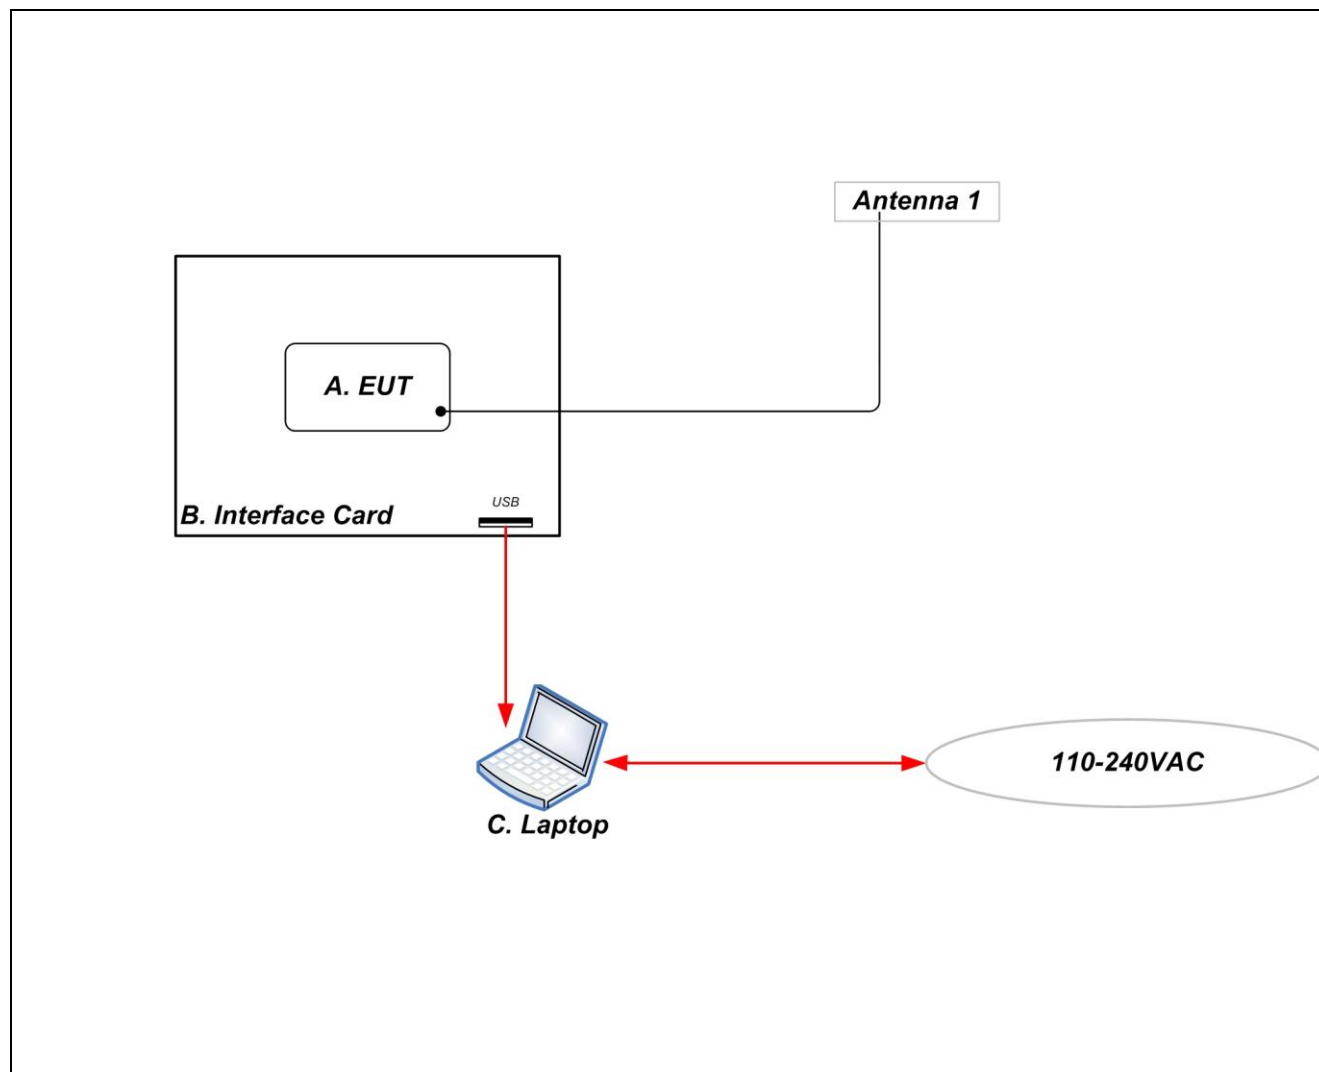


Figure 1. Block Diagram of Test Configuration

E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
A	802.11b/g/n & Bluetooth Module	1271	001

Table 4. Equipment Configuration

F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number
C	Laptop	Dell	Latitude D600

Table 5. Support Equipment

G. Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description	Qty.	Length (m)	Shielded (Y/N)	Termination Point
1	USB	Com Port/Power Supply	1	1.5	Y	USB, Laptop

Table 6. Ports and Cabling Information

H. Mode of Operation

Both modules are a WiFi/Bluetooth combo module.

The WiFi I/O interface is 4 bit SDIO.

The Bluetooth I/O interface is Uart.

Module does not transmit WIFI and Bluetooth simultaneously. Only one modulation/Band can transmit at a time.

I. Method of Monitoring EUT Operation

None.

J. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Murata Wireless upon completion of testing.

III. Electromagnetic Compatibility Criteria for Unintentional Radiators

Electromagnetic Compatibility Criteria

§ 15.107 Conducted Emissions Limits

Test Requirement(s): **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

15.107 (b) For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

Frequency range (MHz)	Class A Conducted Limits (dBμV)		*Class B Conducted Limits (dBμV)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50
Note 1 — The lower limit shall apply at the transition frequencies. Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.				

Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b)

Test Procedures: The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a 50Ω/50μH LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were re-measured using a quasi-peak and/or average detector as appropriate.

Test Results: The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.


Test Engineer(s): Jonathan Chao

Test Date(s): 10/31/12

Conducted Emissions - Voltage, AC Power, Phase Line

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120VAC Line	.152	52.33	65.89	-13.56	Pass	39.87	55.89	-16.02	Pass
120VAC Line	.280	45.29	60.83	-15.54	Pass	39.64	50.83	-11.19	Pass
120VAC Line	.422	39	57.432	-18.432	Pass	25.1	47.432	-22.332	Pass

Table 8. Conducted Emissions - Voltage, AC Power, Phase Line

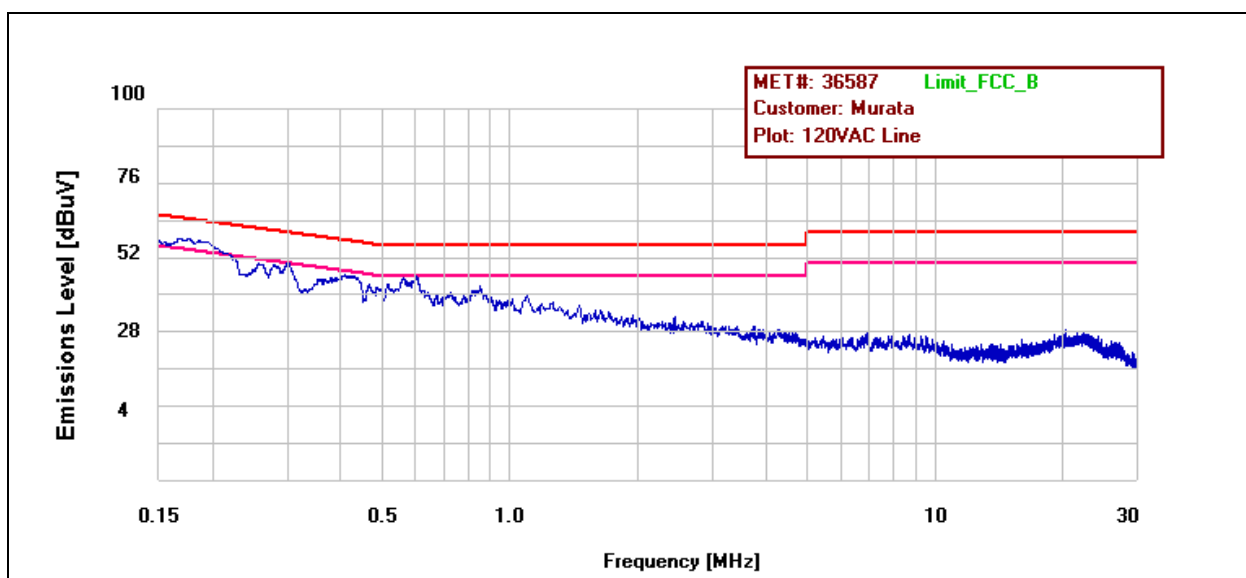


Plot 1. Conducted Emission, Phase Line Plot

Conducted Emissions - Voltage, AC Power, Neutral Line

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120VAC Neutral	.188	48.96	64.13	-15.17	Pass	40.12	54.13	-14.01	Pass
120VAC Neutral	.256	45.61	61.572	-15.962	Pass	42.34	51.572	-9.232	Pass
120VAC Neutral	.423	50.31	57.413	-7.103	Pass	36.43	47.413	-10.983	Pass

Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line

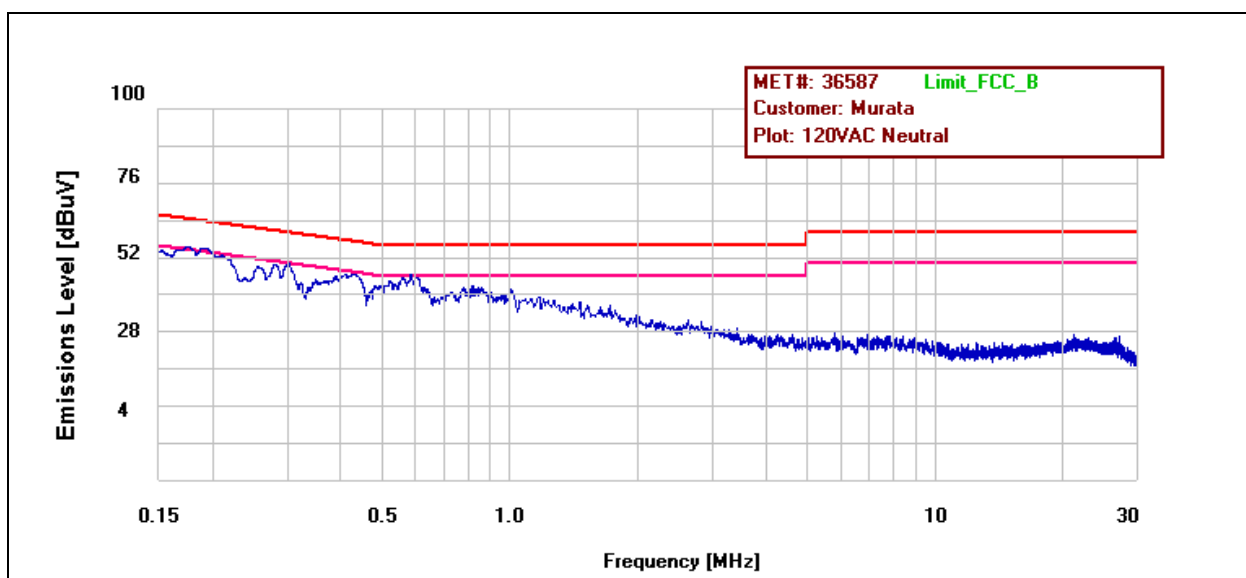

Plot 2. Conducted Emission, Neutral Line Plot

Conducted Emission Limits Test Setup



Photograph 2. Conducted Emissions, Test Setup



Photograph 3. Conducted Emissions, Test Setup, Side View

Radiated Emission Limits

§ 15.109 Radiated Emissions Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 10.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 10.

Frequency (MHz)	Field Strength (dBμV/m)	
	§15.109 (b), Class A Limit (dBμV) @ 10m	§15.109 (a), Class B Limit (dBμV) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures: The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results: The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.


Test Engineer(s): Anderson Soungpanya

Test Date(s): 10/29/12

Radiated Emissions Limits Test Results, Class B

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
250	H	90	100	26.55	12.9	0	2.39	0	41.84	46	-4.16
730.19	H	143	100	10.89	22.004	0	4.146	0	37.04	46	-8.96
276.4	V	118	100	13.22	13	0	2.514	0	28.734	46	-17.266
44.35	V	155	100	25.45	9.895	0	0.925	0	36.27	40	-3.73
96.1	V	75	105	21.64	10.91	0	1.41	0	33.96	43.5	-9.54
250	V	122	100	23.45	12.5	0	2.39	0	38.34	46	-7.66

Table 11. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, FCC Limits

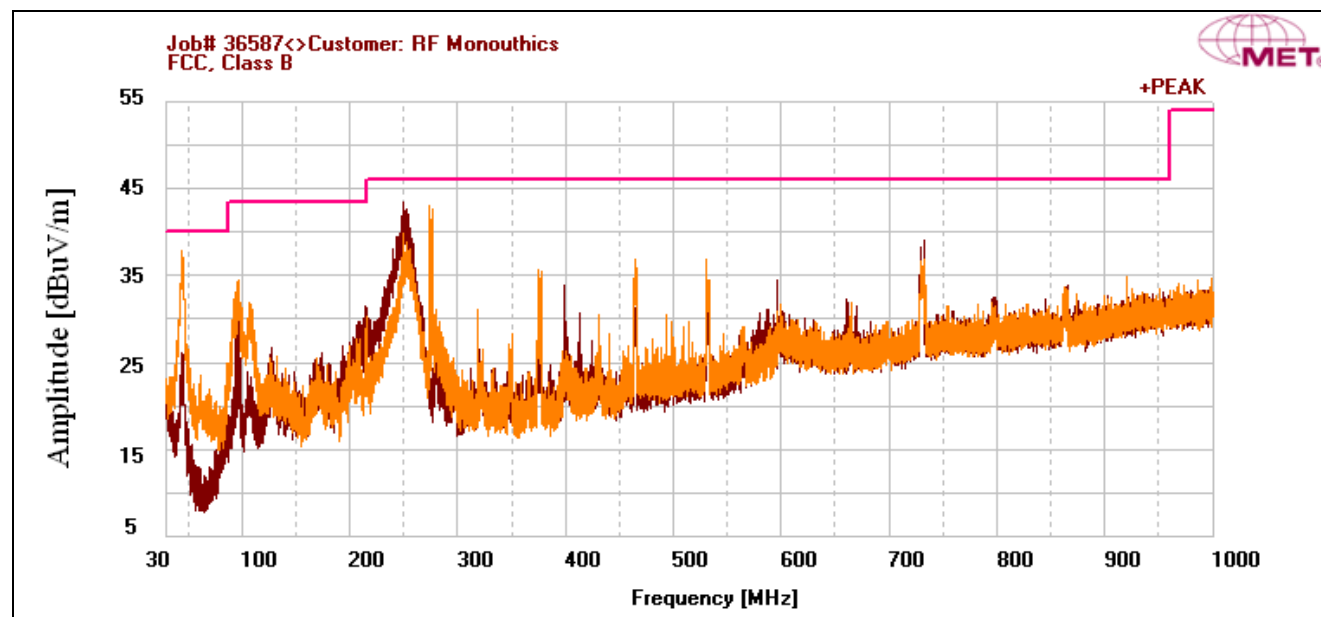


Plot 3. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits

Radiated Emissions Limits Test Results, Class B

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
250	H	90	100	26.55	12.9	0	2.39	-10.46	31.38	37	-5.62
730.19	H	143	100	10.89	22.004	0	4.146	-10.46	26.58	37	-10.42
276.4	V	118	100	13.22	13	0	2.514	-10.46	18.274	37	-18.726
44.35	V	155	100	25.45	9.895	0	0.925	-10.46	25.81	30	-4.19
96.1	V	75	105	21.64	10.91	0	1.41	-10.46	23.5	30	-6.5
250	V	122	100	23.45	12.5	0	2.39	-10.46	27.88	37	-9.12

Table 12. Radiated Emissions Limits, Test Results, ICES-003 Limits

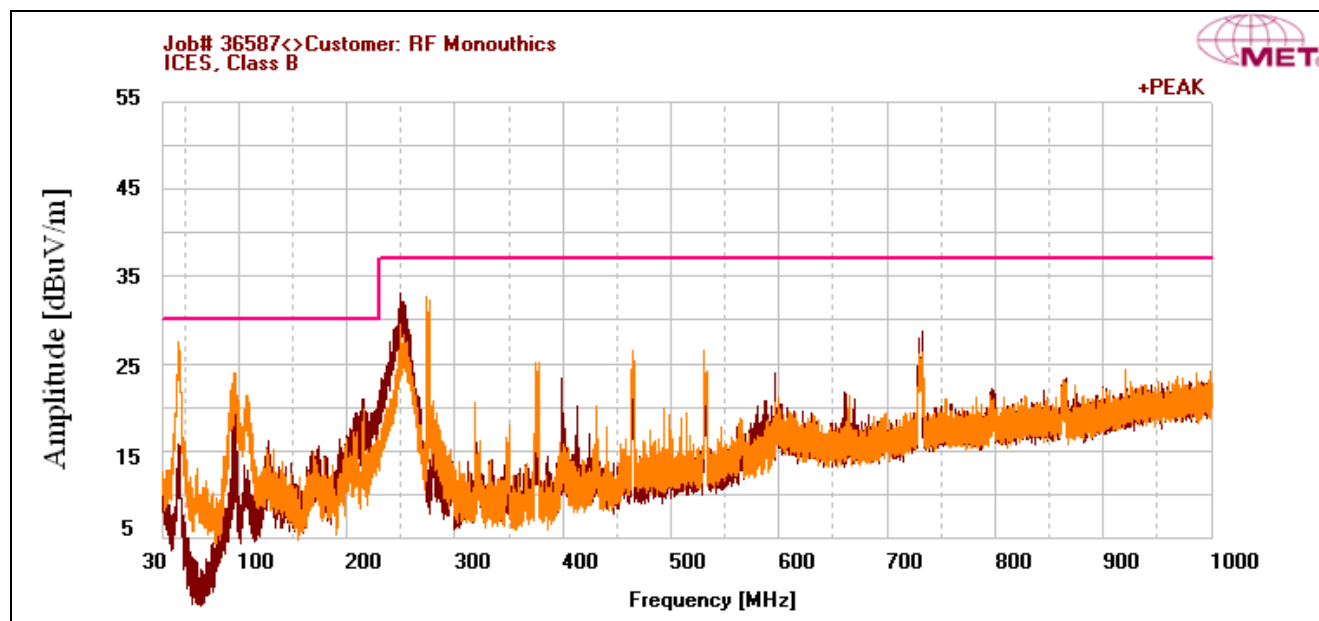

Plot 4. Radiated Emissions, ICES-003 Limits

Radiated Emissions Limits Test Setup



Photograph 4. Radiated Emissions, Test Setup



Photograph 5. Radiated Emissions, Test Setup, 30 MHz – 1 GHz



Photograph 6. Radiated Emissions, Test Setup, Rear View

IV. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. There is an U.FL connector on module which is a unique type of connector.

Test Engineer(s): Anderson Soungpanya

Test Date(s): 10/23/12

Gain	Type
3dBi	Omni

Table 13. Antenna List

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207(a) Conducted Emissions Limits

Test Requirement(s): § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 14. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2003 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

Test Results: The EUT was compliant with this requirement.


Test Engineer(s): Jonathan Chao

Test Date(s): 10/31/12

15.207(a) Conducted Emissions Test Results

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120VAC Line	.169	51.89	65.012	-13.122	Pass	42.98	55.012	-12.032	Pass
120VAC Line	.256	47.22	61.572	-14.352	Pass	42.65	51.572	-8.922	Pass
120VAC Line	.42	40.44	57.471	-17.031	Pass	26.55	47.471	-20.921	Pass

Table 15. Conducted Emissions, 15.207(a), Phase Line, Test Results

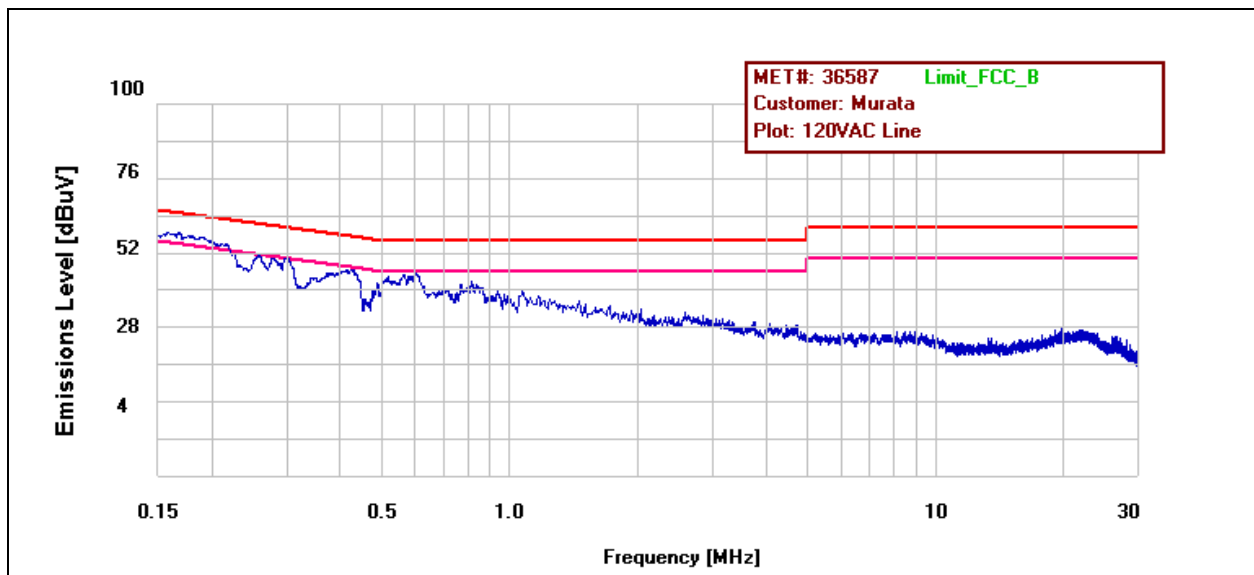


Plot 5. Conducted Emissions, 15.207(a), Phase Line

15.207(a) Conducted Emissions Test Results

Line	Freq. (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
120VAC Neutral	.157	47.85	65.622	-17.772	Pass	36.43	55.622	-19.192	Pass
120VAC Neutral	.298	46.45	60.314	-13.864	Pass	43.49	50.314	-6.824	Pass
120VAC Neutral	.423	40.31	57.413	-17.103	Pass	26.43	47.413	-20.983	Pass

Table 16. Conducted Emissions, 15.207(a), Neutral Line, Test Results

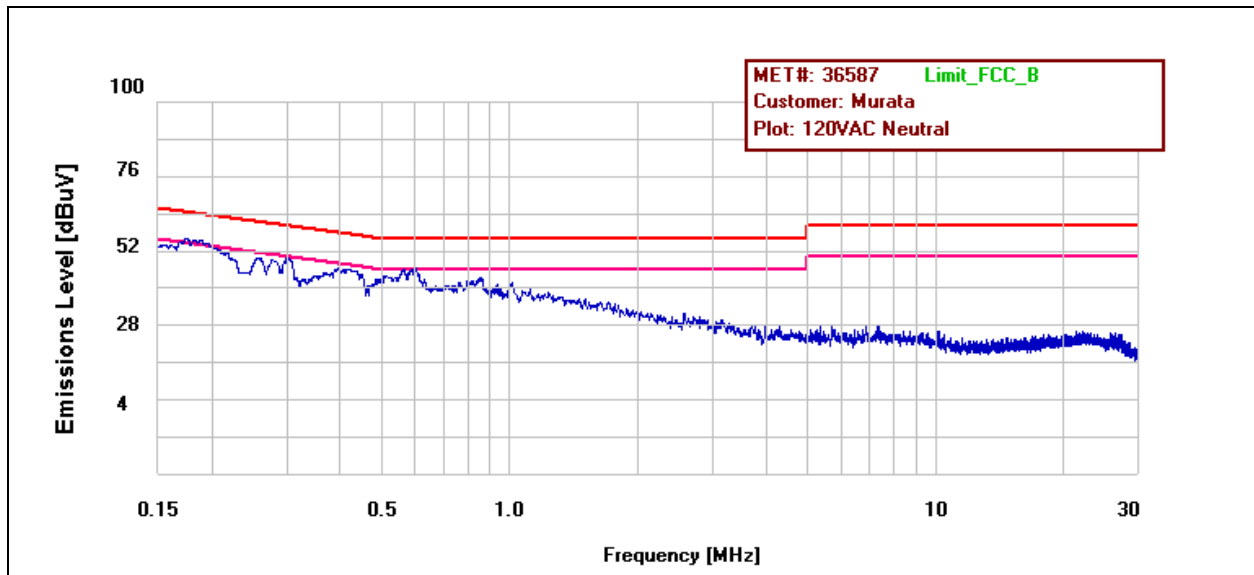

Plot 6. Conducted Emissions, 15.207(a), Neutral Line

15.207(a) Conducted Emissions Test Setup Photo



Photograph 7. Conducted Emissions, 15.207(a), Test Setup



Photograph 8. Conducted Emissions, 15.207(a), Test Setup, Side View

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a)(2) 6 dB and 99% Bandwidth

Test Requirements: § 15.247(a)(2): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure: The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, VBW > RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

Test Results The EUT was compliant with § 15.247 (a)(2).

The 6 dB and 99% Bandwidth was determined from the plots on the following pages.

Test Engineer(s): Anderson Soungpanya

Test Date(s): 10/23/12



Figure 2. Block Diagram, Occupied Bandwidth Test Setup

Occupied Bandwidth Test Results


Occupied Bandwidth			
Mode	Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)
802.11b	Low	2412	8.101
	Mid	2437	6.880
	High	2462	7.793
802.11g	Low	2412	16.348
	Mid	2437	16.096
	High	2462	15.533
802.11n 20 MHz	Low	2412	17.220
	Mid	2437	17.600
	High	2462	17.100

Table 17. 6 dB Occupied Bandwidth, Test Results


Occupied Bandwidth			
Mode	Carrier Channel	Frequency (MHz)	Measured 99% Bandwidth (MHz)
802.11b	Low	2412	13.7080
	Mid	2437	13.3243
	High	2462	14.0296
802.11g	Low	2412	16.4828
	Mid	2437	16.3118
	High	2462	16.4099
802.11n 20 MHz	Low	2412	17.4740
	Mid	2437	17.3929
	High	2462	17.5001

Table 18. 99% Occupied Bandwidth, Test Results


6 dB Occupied Bandwidth Test Results, 802.11b

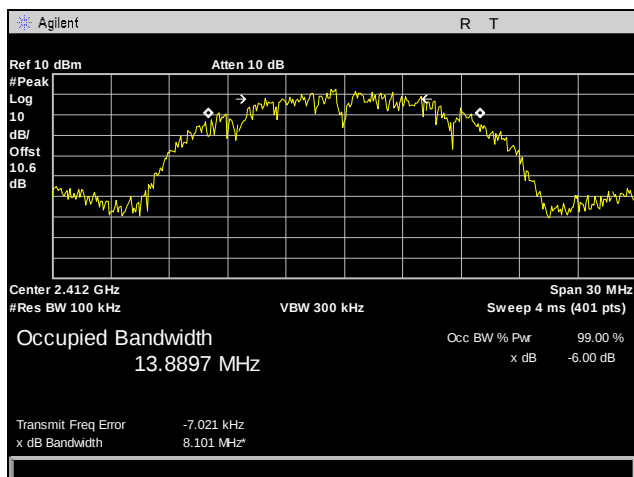

Plot 7. 6 dB Occupied Bandwidth, Low Channel, 802.11b

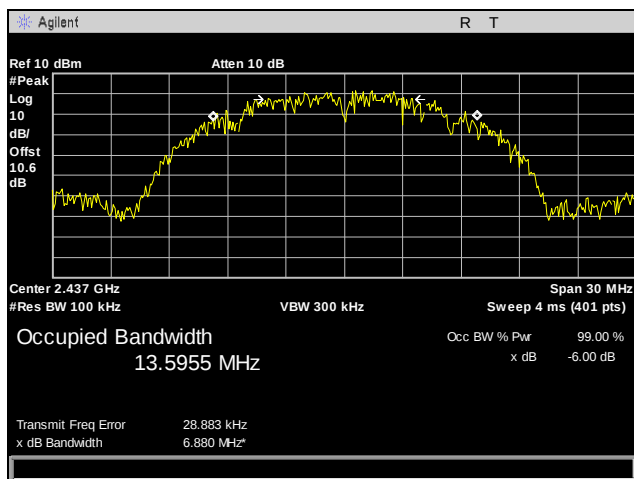


Plot 8. 6 dB Occupied Bandwidth, Mid Channel, 802.11b

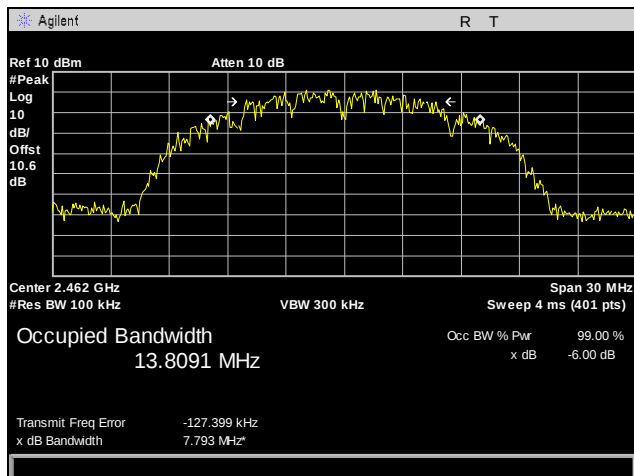


Plot 9. 6 dB Occupied Bandwidth, High Channel, 802.11b


6 dB Occupied Bandwidth Test Results, 802.11g

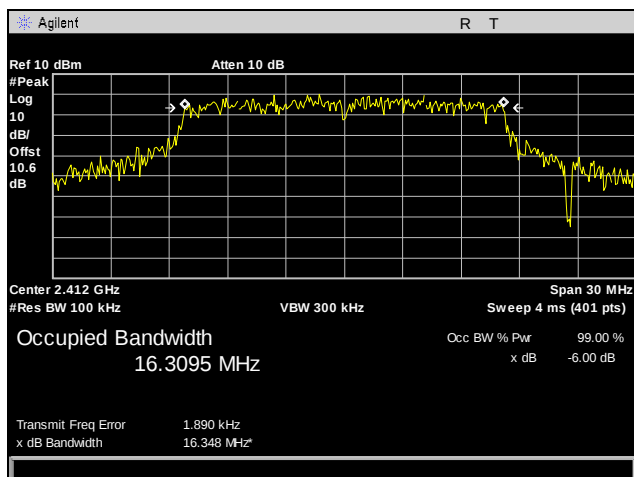

Plot 10. 6 dB Occupied Bandwidth, Low Channel, 802.11g

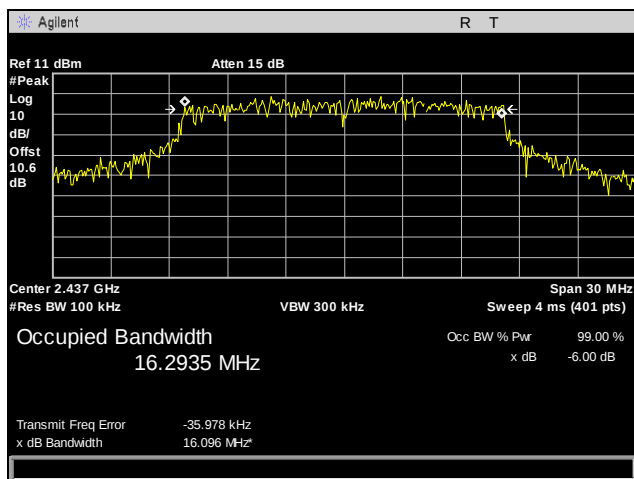


Plot 11. 6 dB Occupied Bandwidth, Mid Channel, 802.11g

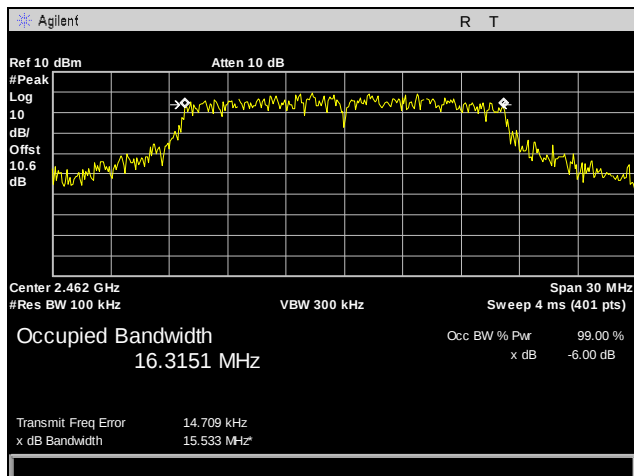


Plot 12. 6 dB Occupied Bandwidth, High Channel, 802.11g


6 dB Occupied Bandwidth Test Results, 802.11n 20 MHz

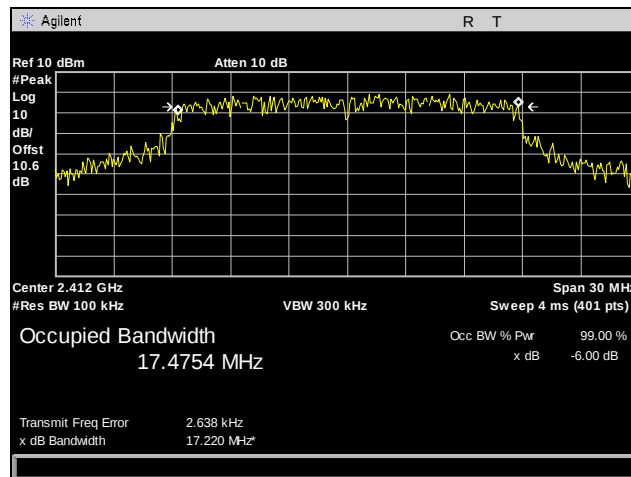

Plot 13. 6 dB Occupied Bandwidth, Low Channel, 802.11n 20 MHz

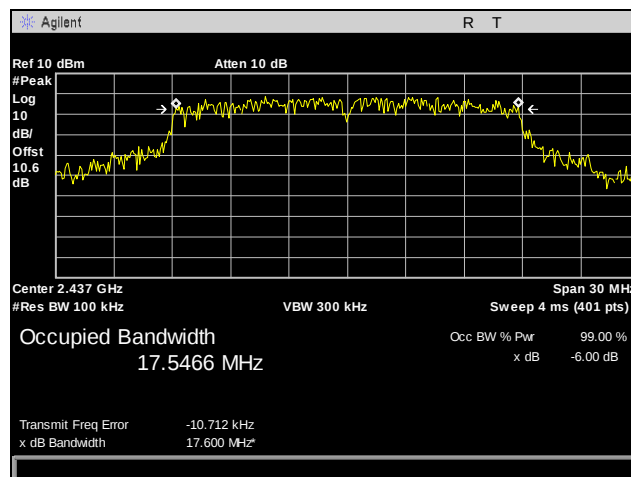


Plot 14. 6 dB Occupied Bandwidth, Mid Channel, 802.11n 20 MHz

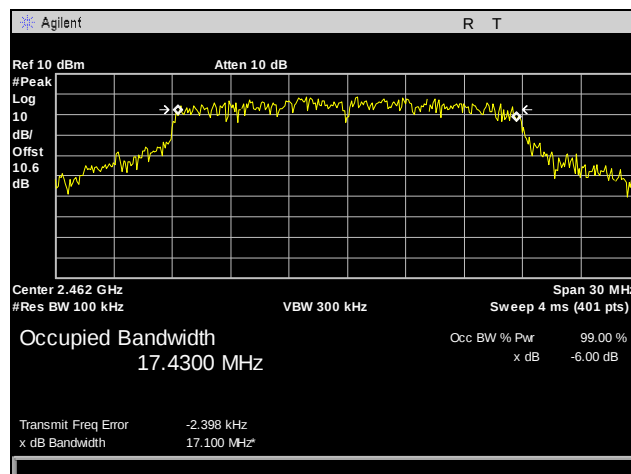


Plot 15. 6 dB Occupied Bandwidth, High Channel, 802.11n 20 MHz


99% Occupied Bandwidth Test Results, 802.11b

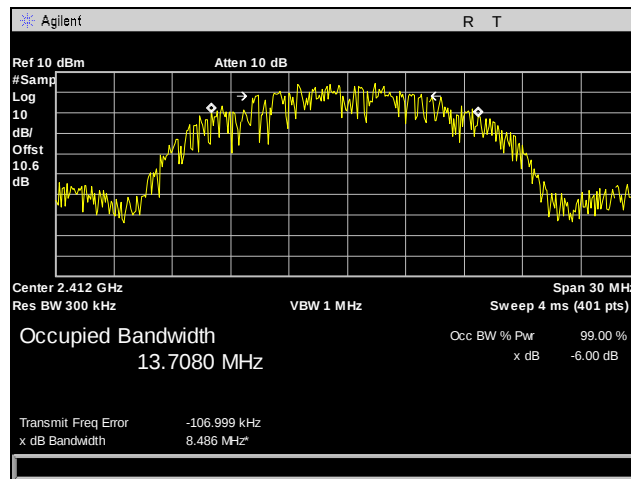

Plot 16. 99% Occupied Bandwidth, Low Channel, 802.11b

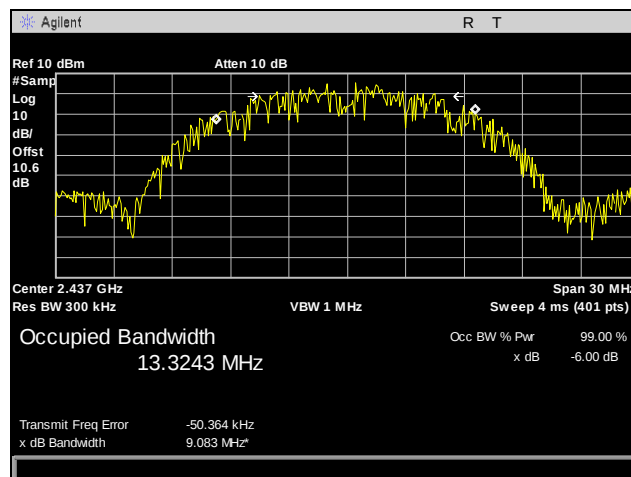


Plot 17. 99% Occupied Bandwidth, Mid Channel, 802.11b

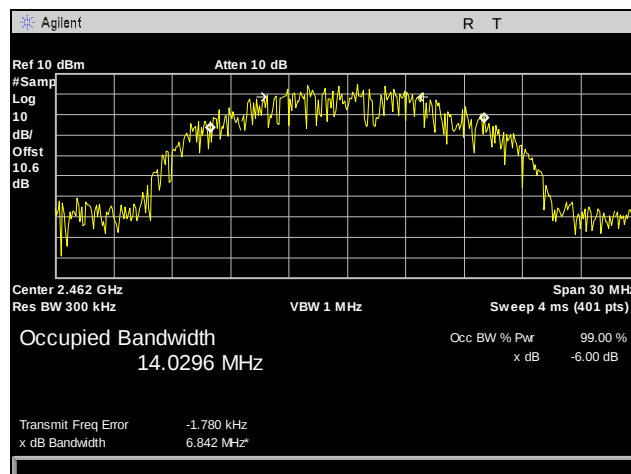


Plot 18. 99% Occupied Bandwidth, High Channel, 802.11b


99% Occupied Bandwidth Test Results, 802.11g

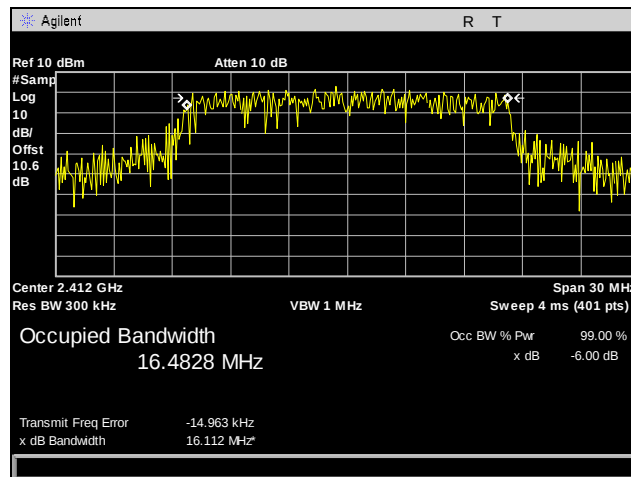

Plot 19. 99% Occupied Bandwidth, Low Channel, 802.11g

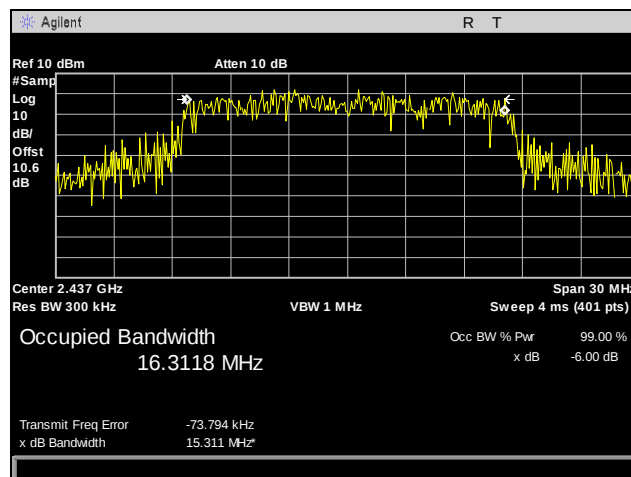


Plot 20. 99% Occupied Bandwidth, Mid Channel, 802.11g

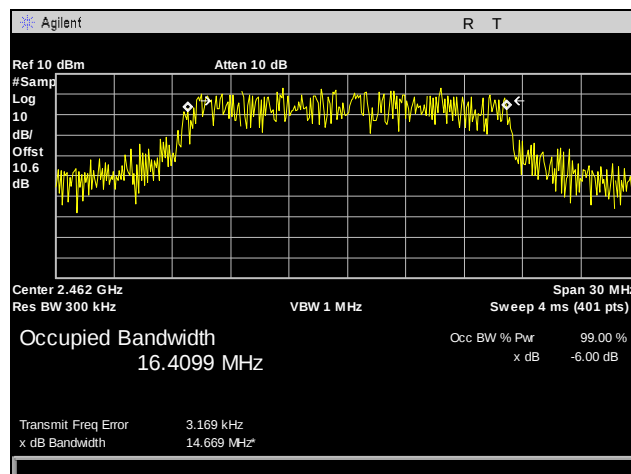


Plot 21. 99% Occupied Bandwidth, High Channel, 802.11g


99% Occupied Bandwidth Test Results, 802.11n 20 MHz

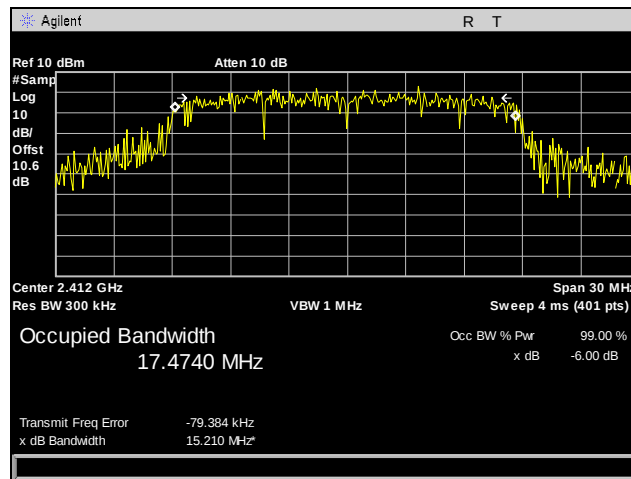

Plot 22. 99% Occupied Bandwidth, Low Channel, 802.11n 20 MHz

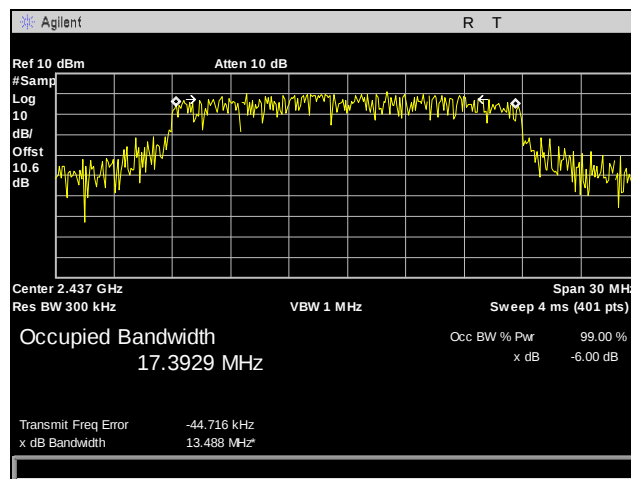

Plot 23. 99% Occupied Bandwidth, Mid Channel, 802.11n 20 MHz

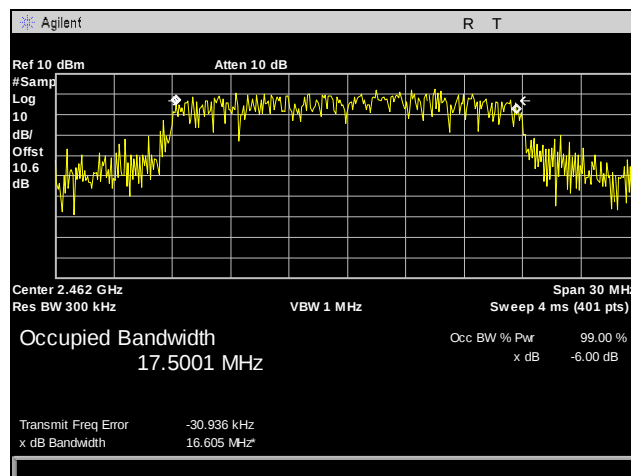

Plot 24. 99% Occupied Bandwidth, High Channel, 802.11n 20 MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output

Test Requirements: §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

Table 19. Output Power Requirements from §15.247(b)

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 19, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band and using a point to point application may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, Omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

Test Procedure: The transmitter was connected to a calibrated spectrum analyzer. The EUT was measured at the low, mid and high channels of each band. The EUT was utilizes a 3dBi Omni Antenna, so the maximum power allowed is 30dBm.

Test Results: The EUT was compliant with the Peak Power Output limits of §15.247(b).

Test Engineer(s): Anderson Soungpanya

Test Date(s): 10/23/12





Figure 3. Peak Power Output Test Setup

Peak Power Output Test Results


Peak Conducted Output Power			
Mode	Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
802.11b	Low	2412	17.07
	Mid	2437	16.86
	High	2462	16.91
802.11g	Low	2412	21.73
	Mid	2437	21.50
	High	2462	21.40
802.11n 20 MHz	Low	2412	21.70
	Mid	2437	21.44
	High	2462	21.25

Table 20. Peak Power Output, Test Results


Peak Power Output Test Results, 802.11b

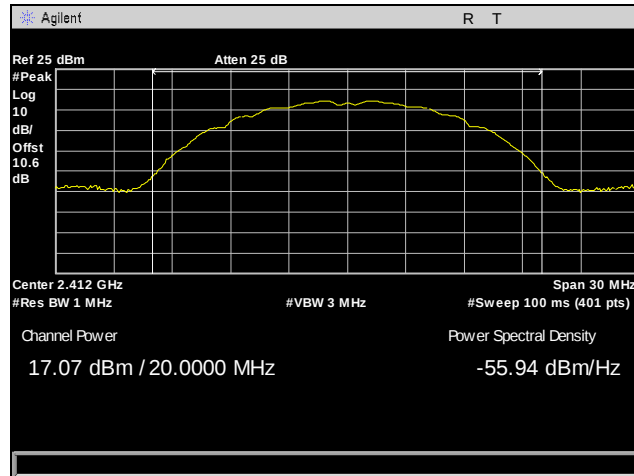

Plot 25. Peak Power Output, Low Channel, 802.11b

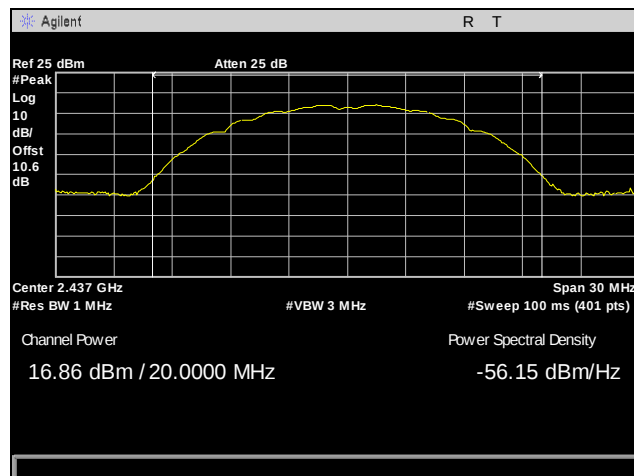


Plot 26. Peak Power Output, Mid Channel, 802.11b

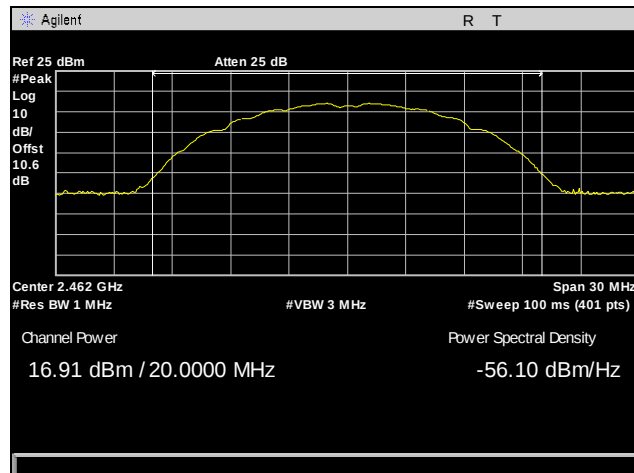


Plot 27. Peak Power Output, High Channel, 802.11b


Peak Power Output Test Results, 802.11g

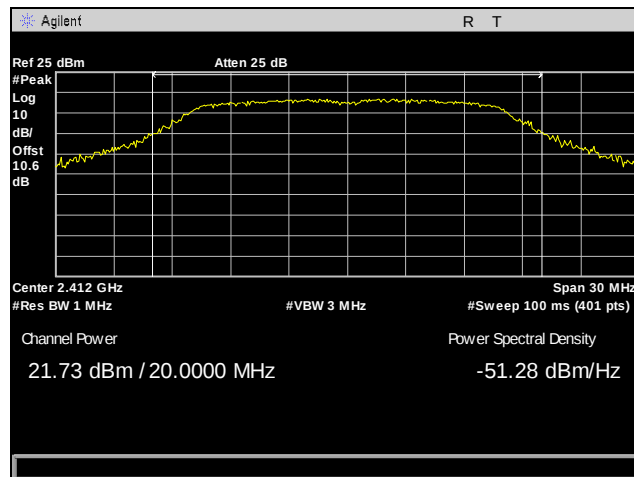

Plot 28. Peak Power Output, Low Channel, 802.11g

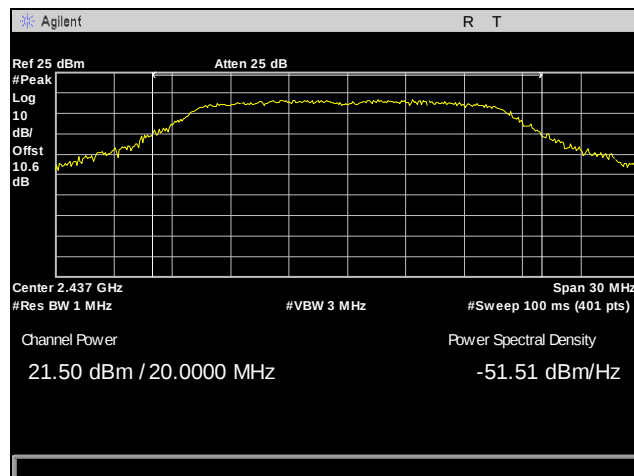


Plot 29. Peak Power Output, Mid Channel, 802.11g

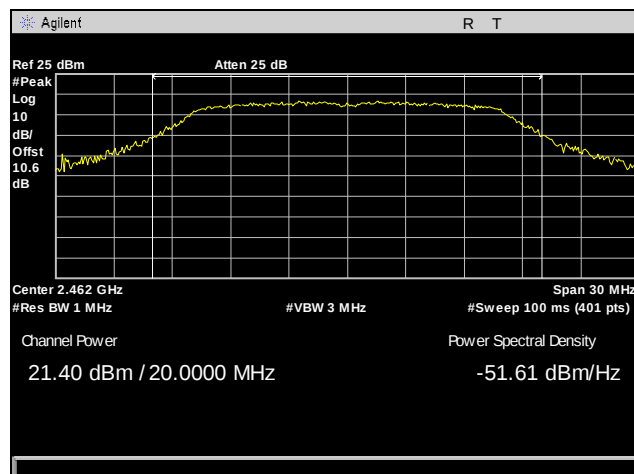


Plot 30. Peak Power Output, High Channel, 802.11g


Peak Power Output Test Results, 802.11n 20 MHz

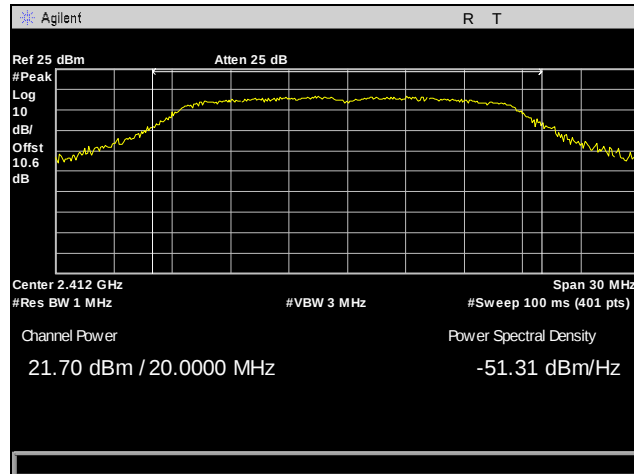

Plot 31. Peak Power Output, Low Channel, 802.11n 20 MHz

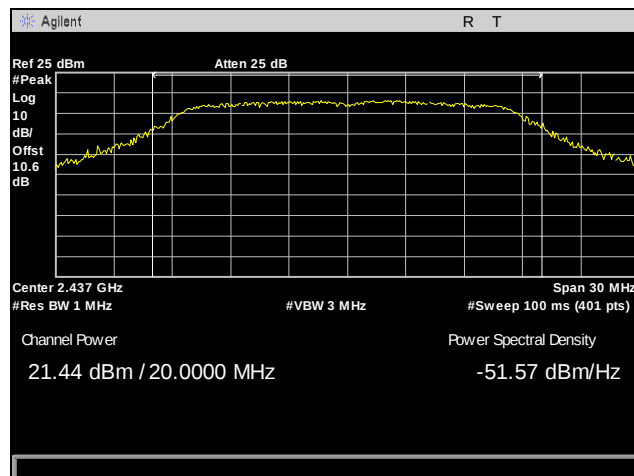

Plot 32. Peak Power Output, Mid Channel, 802.11n 20 MHz

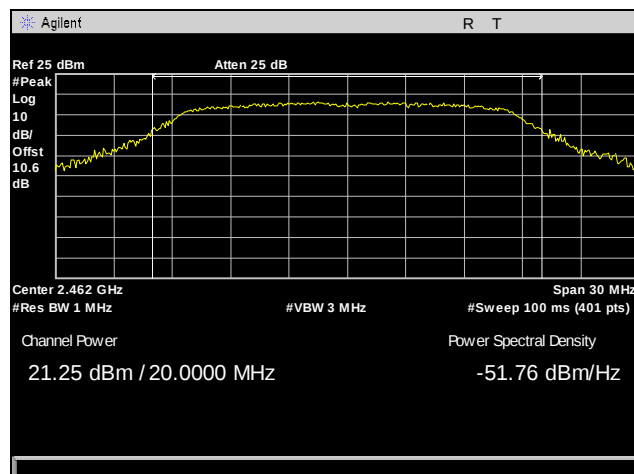

Plot 33. Peak Power Output, High Channel, 802.11n 20 MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge

Test Requirements: §15.247(d); §15.205: Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358 36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Table 21. Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6

Test Requirement(s): § 15.209 (a): Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 22.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dB μ V) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

Table 22. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)


Test Procedures: The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. A filter was used to notch out the 2.4GHz carrier. Peak measurements were made using a Peak Detector, 1 MHz RBW and 3 MHz VBW and compared to the average limit. Plots shown are corrected for antenna correction factor, preamplifier, cable loss and distance and compared to a 3 m limit line. Only noise floor was measured above 18 GHz.

Test Results: The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d).


Test Engineer(s): Anderson Soungpanya

Test Date(s): 11/05/12 – 11/06/12


Radiated Spurious Emissions Test Results, 802.11b

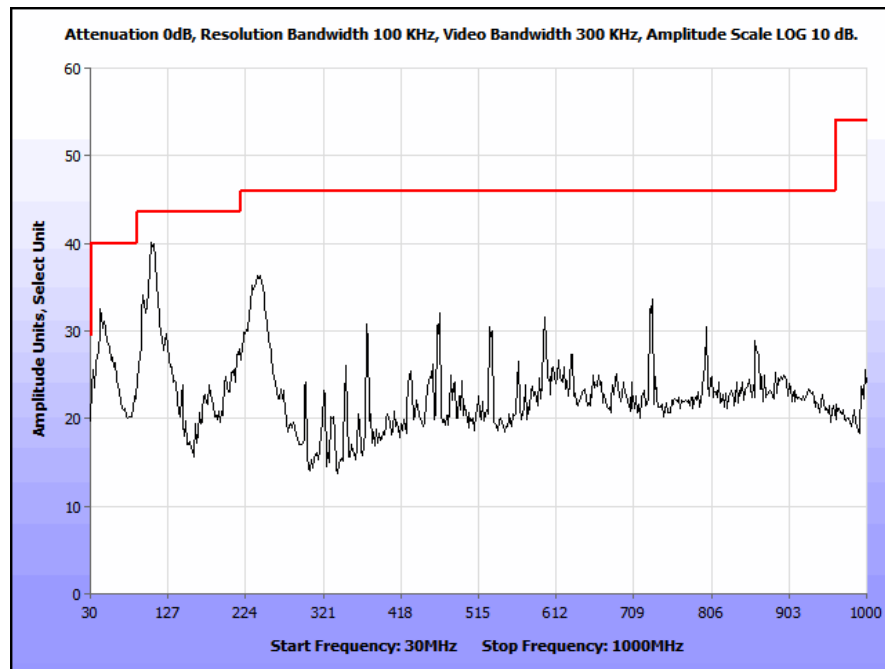


Plot 34. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, 802.11b

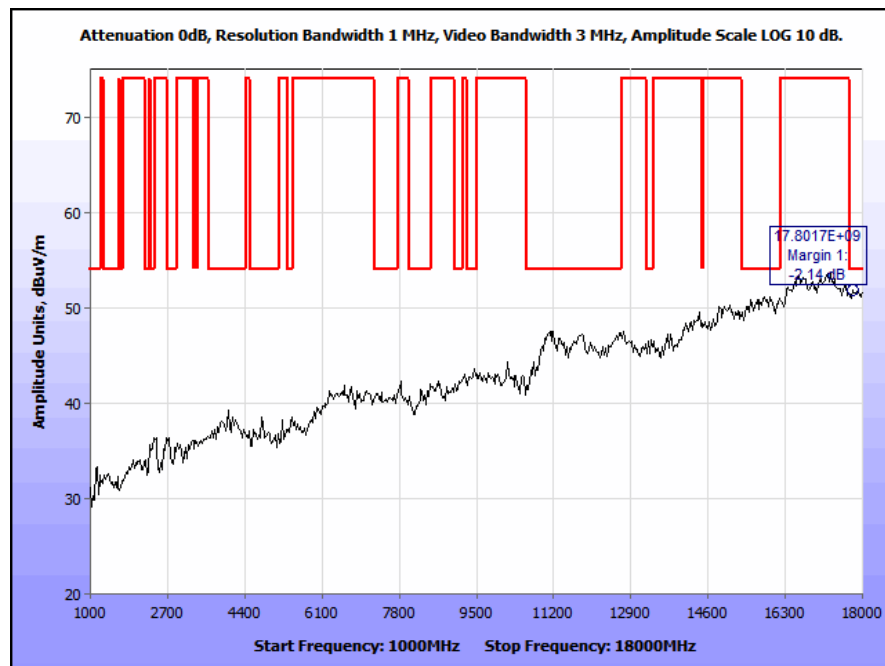


Plot 35. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, 802.11b

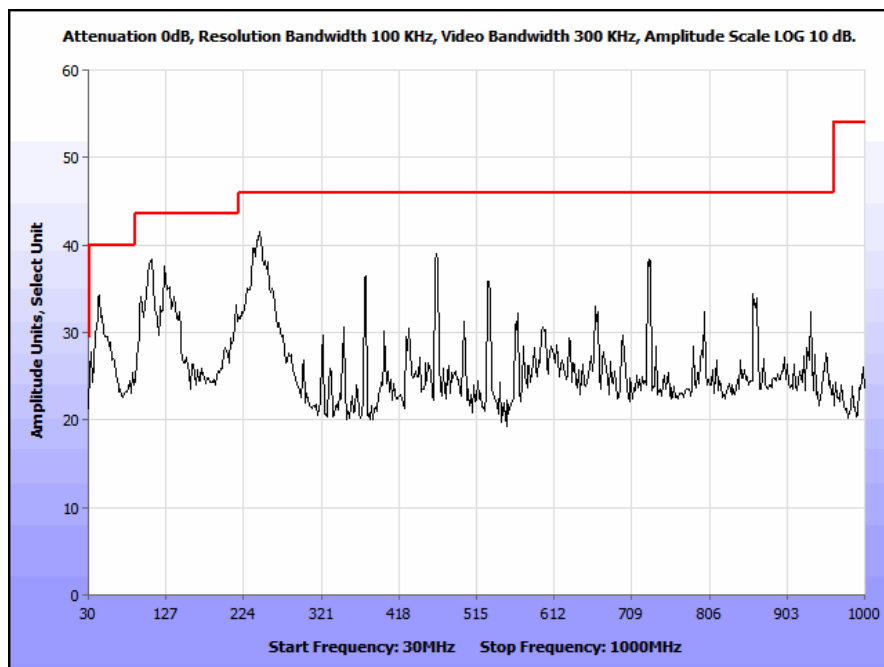


Plot 36. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, 802.11b

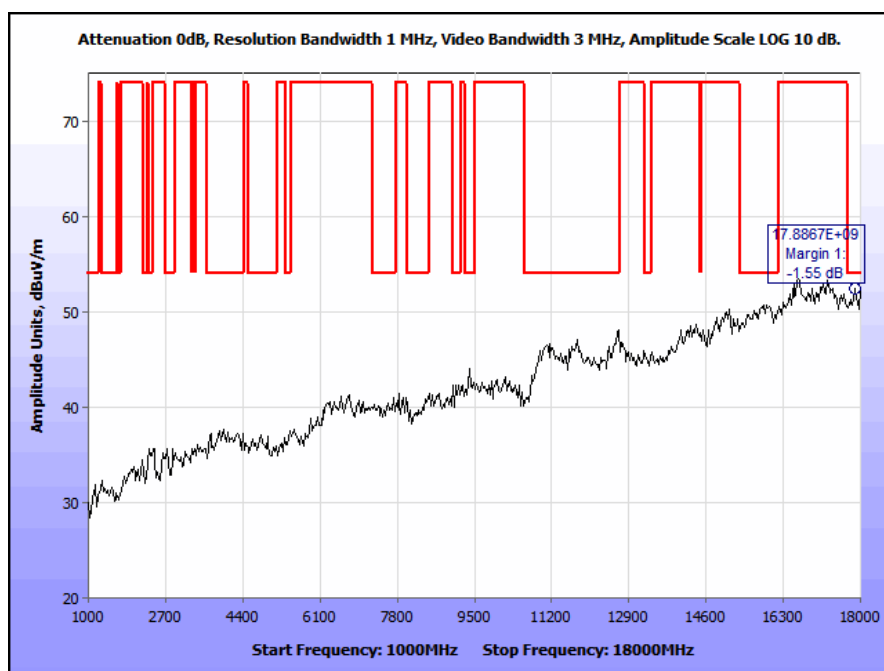

Plot 37. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, 802.11b

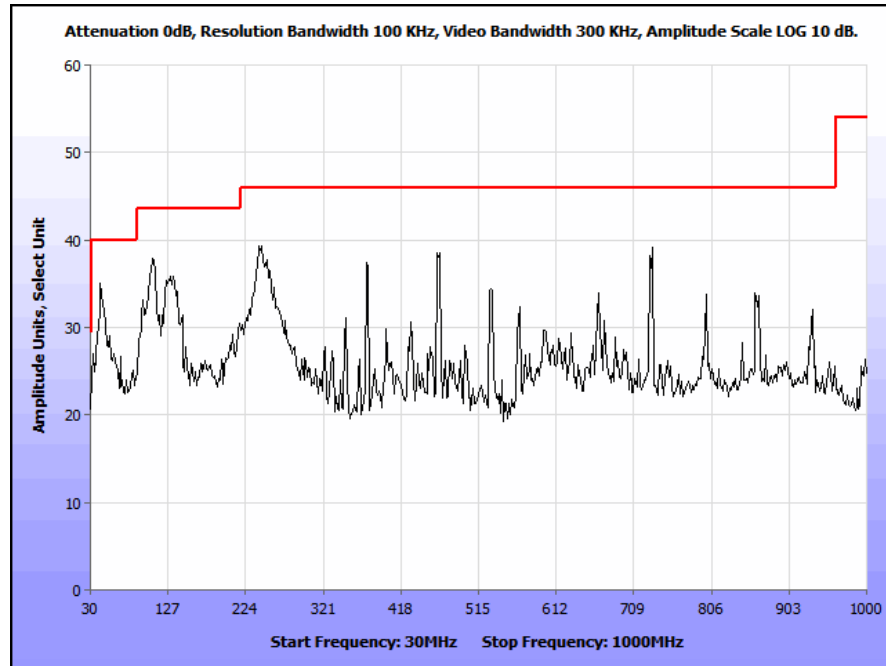


Plot 38. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, 802.11b

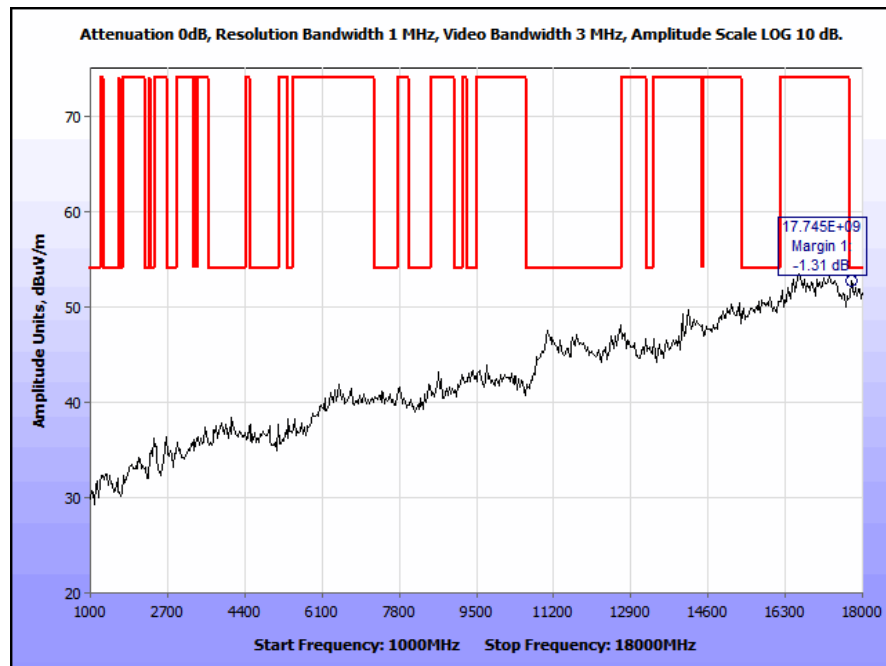


Plot 39. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, 802.11b


Radiated Spurious Emissions Test Results, 802.11g

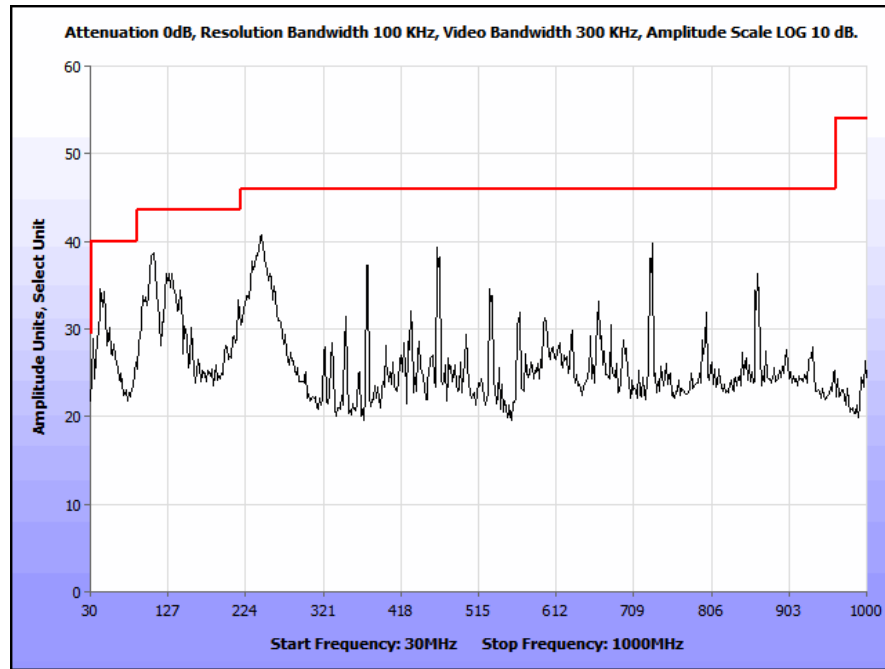


Plot 40. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, 802.11g

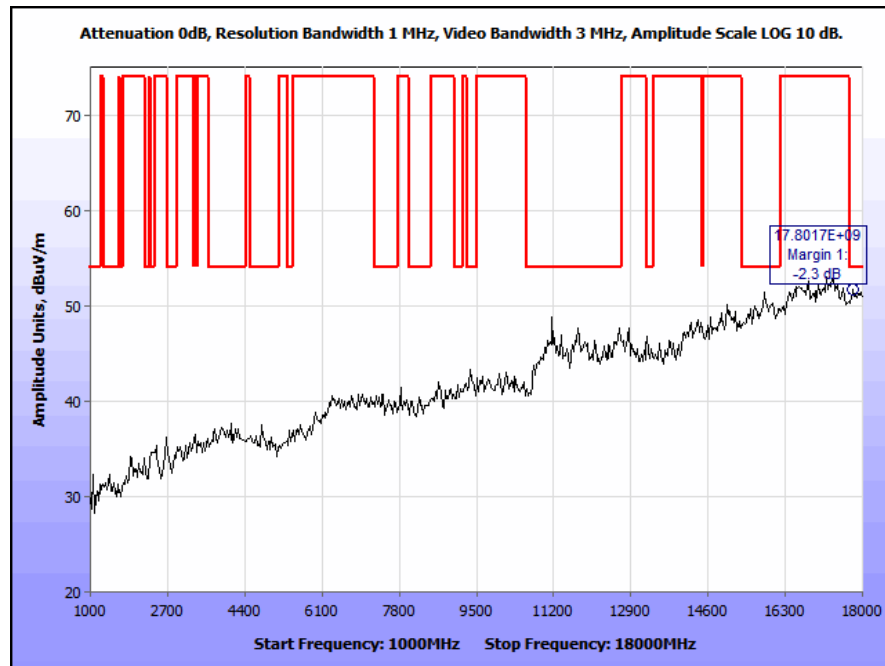


Plot 41. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, 802.11g

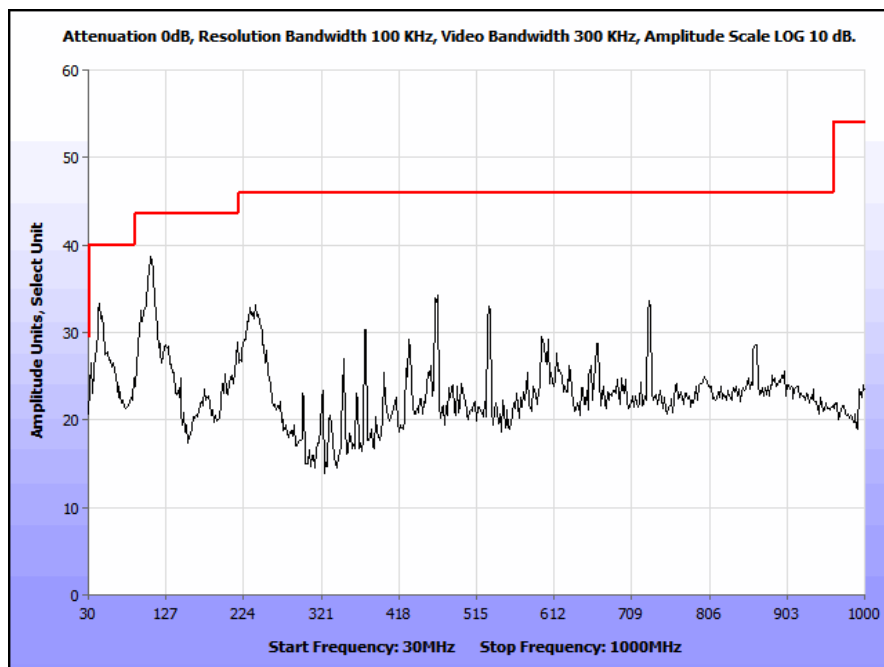


Plot 42. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, 802.11g

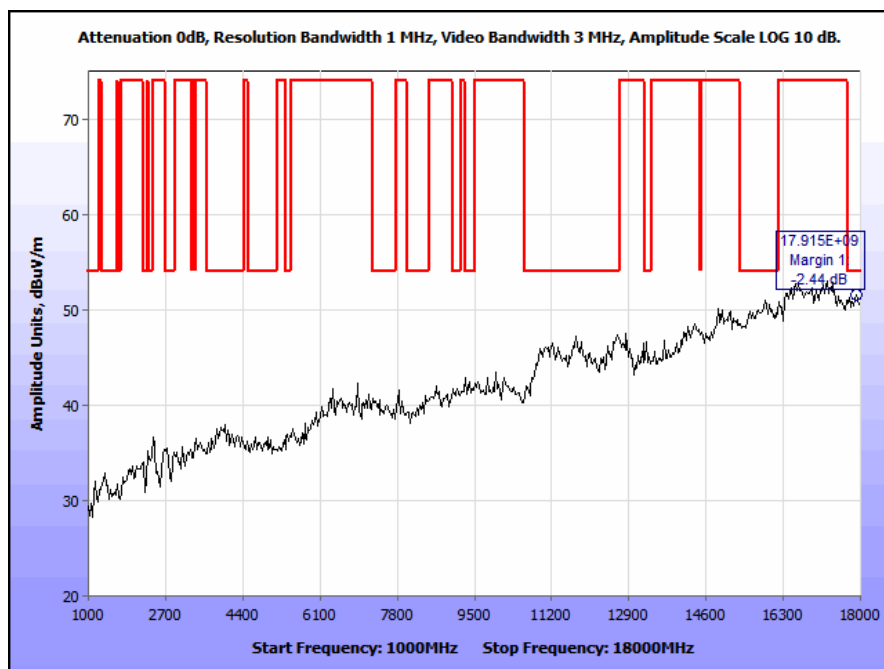

Plot 43. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, 802.11g

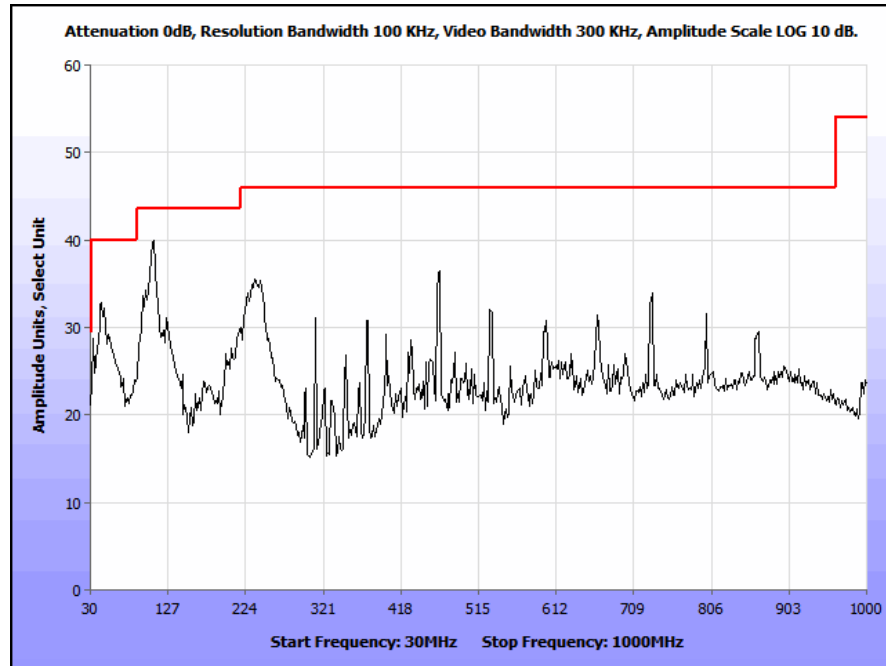


Plot 44. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, 802.11g

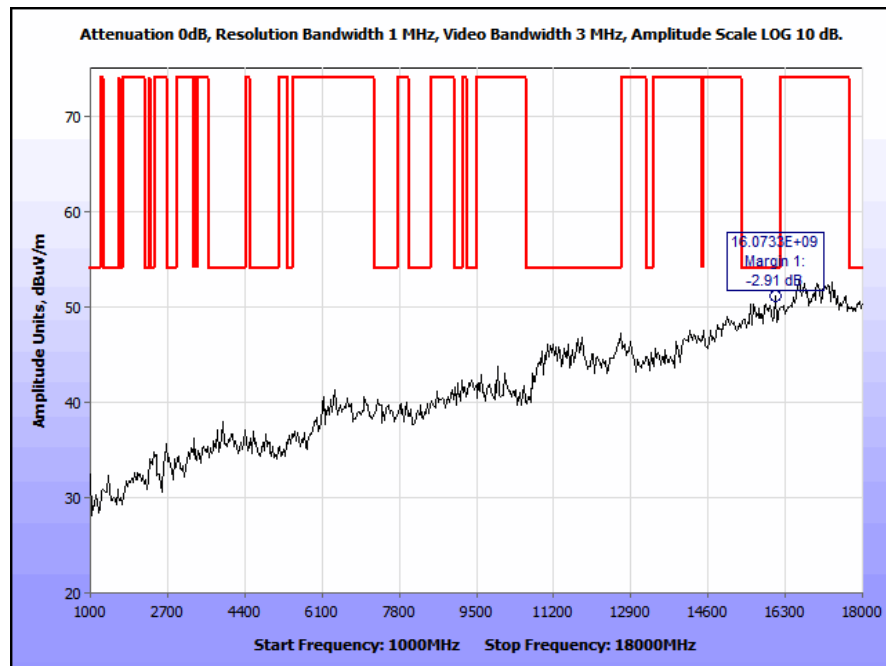


Plot 45. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, 802.11g


Radiated Spurious Emissions Test Results, 802.11n 20 MHz

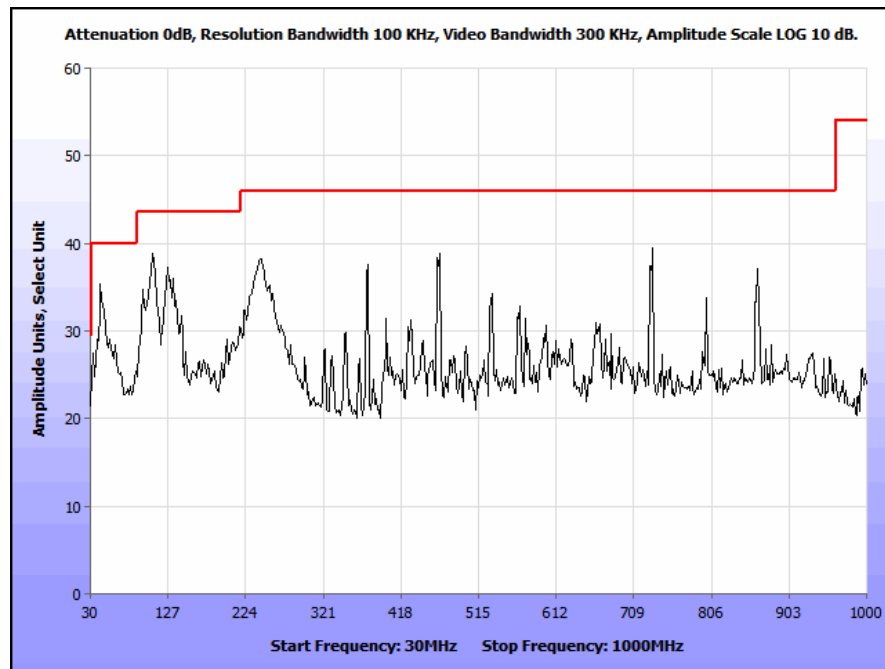


Plot 46. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, 802.11n 20 MHz

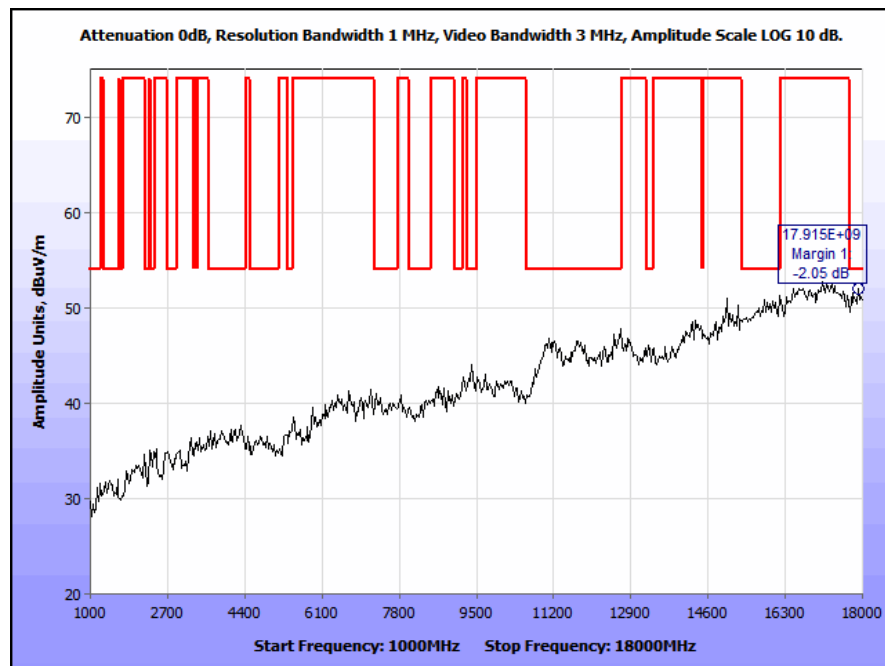


Plot 47. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, 802.11n 20 MHz

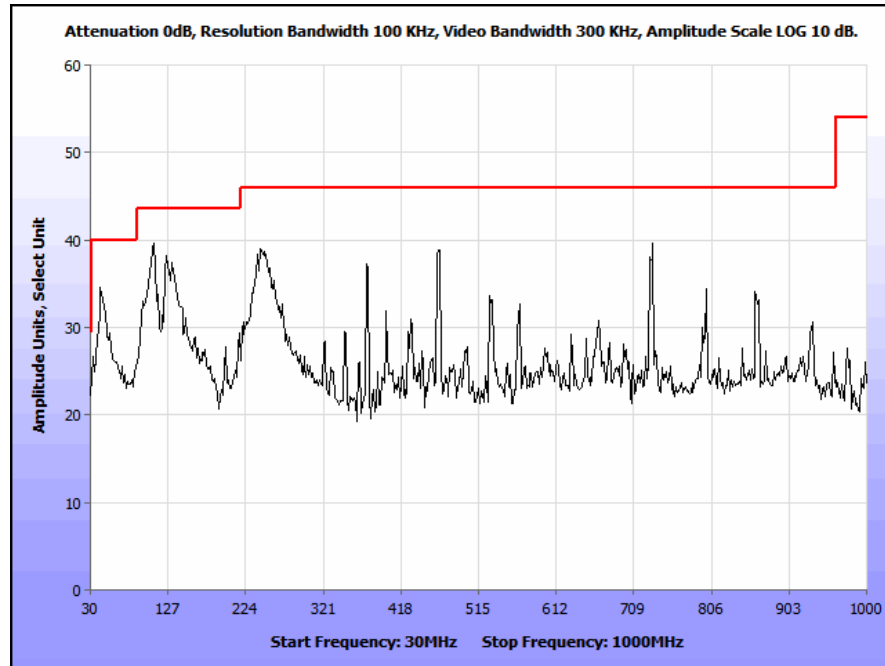


Plot 48. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, 802.11n 20 MHz

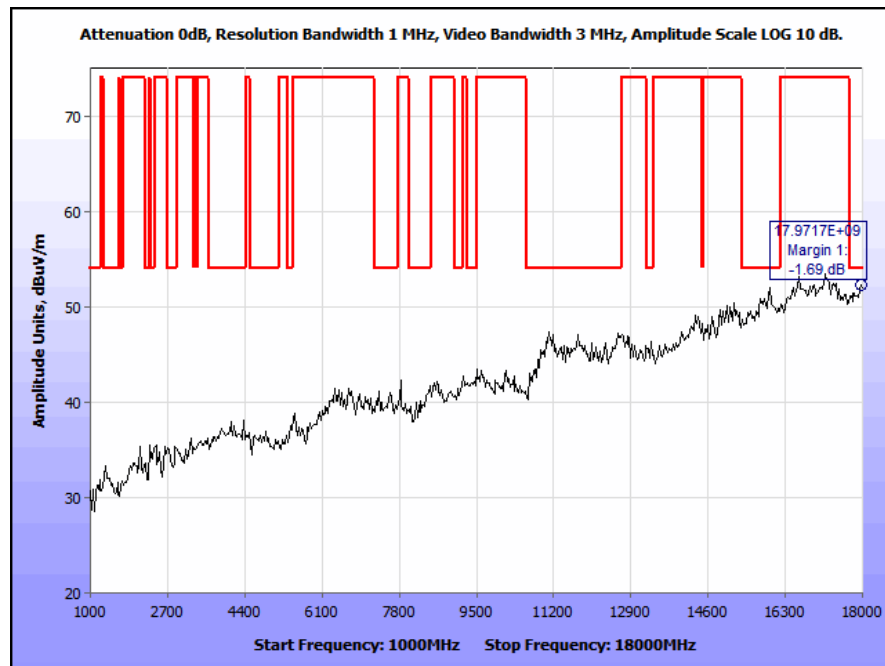

Plot 49. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, 802.11n 20 MHz

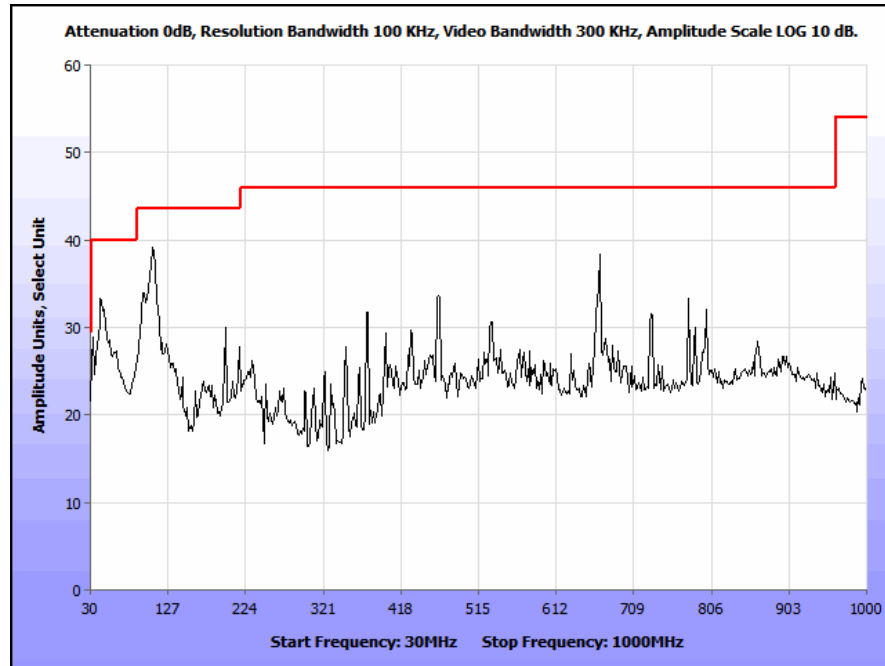


Plot 50. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, 802.11n 20 MHz

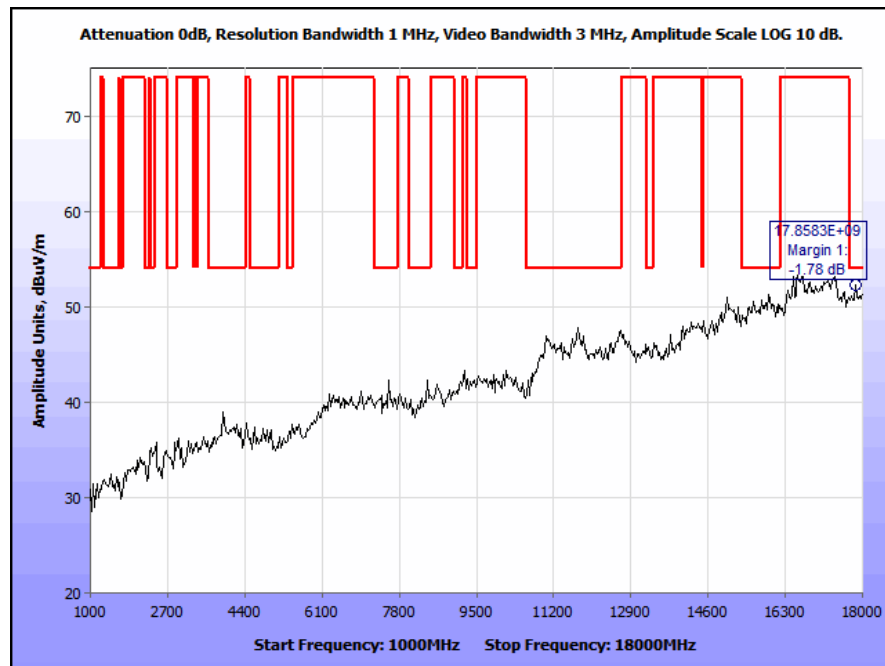


Plot 51. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, 802.11n 20 MHz

Radiated Band Edge Measurements


Test Procedures: The transmitter was turned on. Measurements were performed of the low and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor, cable loss and compared to a 3 m limit line.

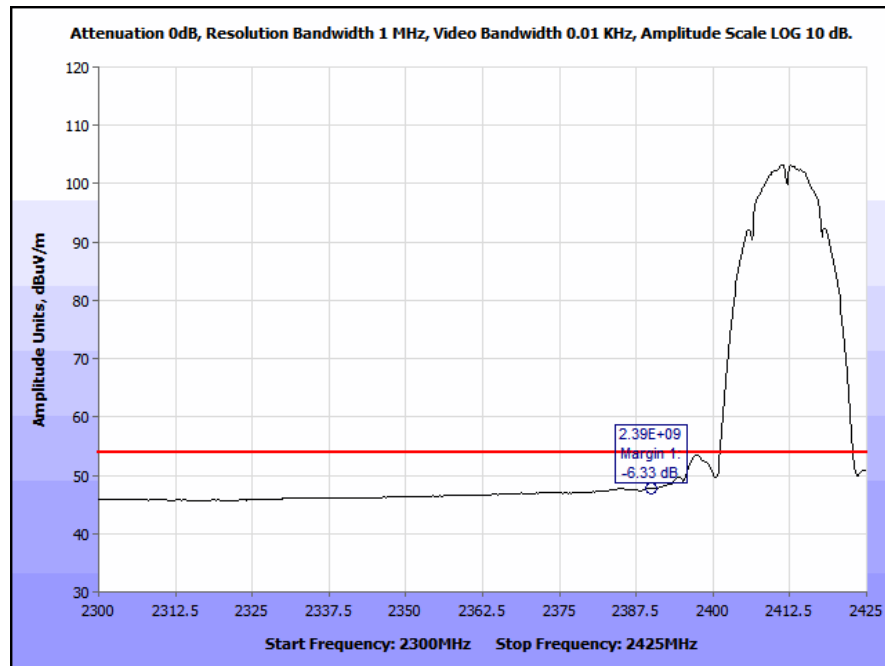


Plot 52. Radiated Restricted Band Edge, Low Channel, Average, 802.11b

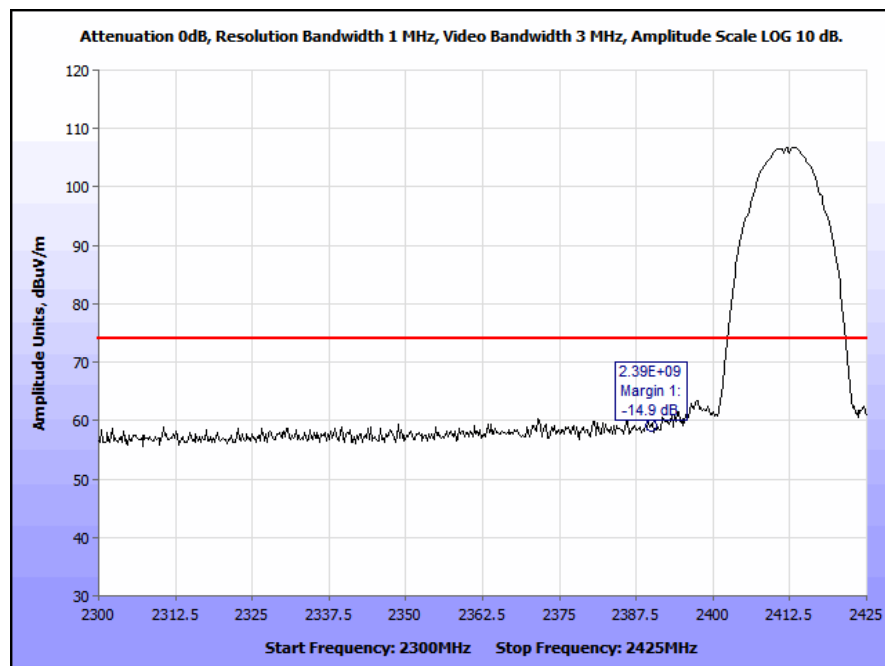


Plot 53. Radiated Restricted Band Edge, Low Channel, Peak, 802.11b

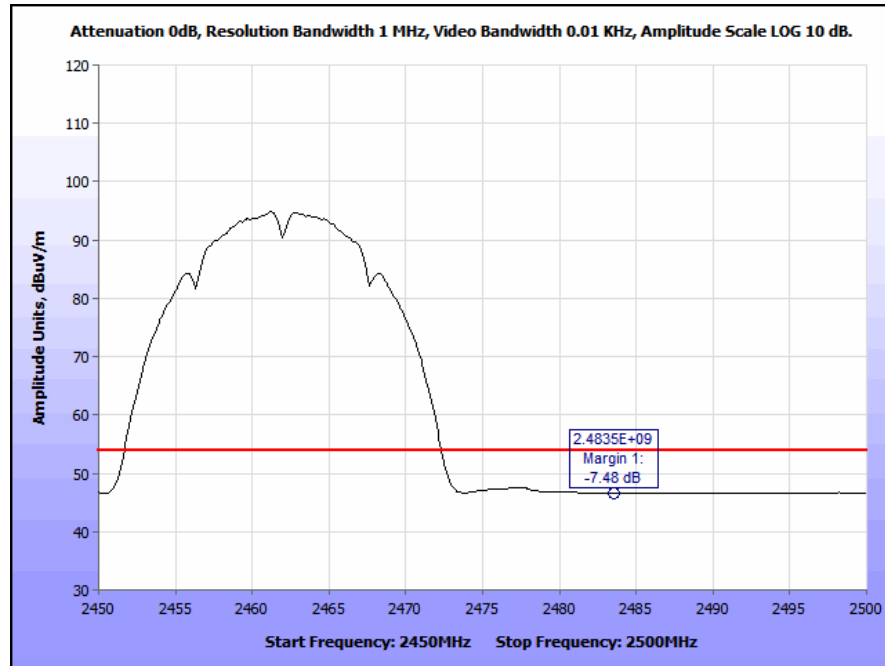


Plot 54. Radiated Restricted Band Edge, High Channel, Average, 802.11b

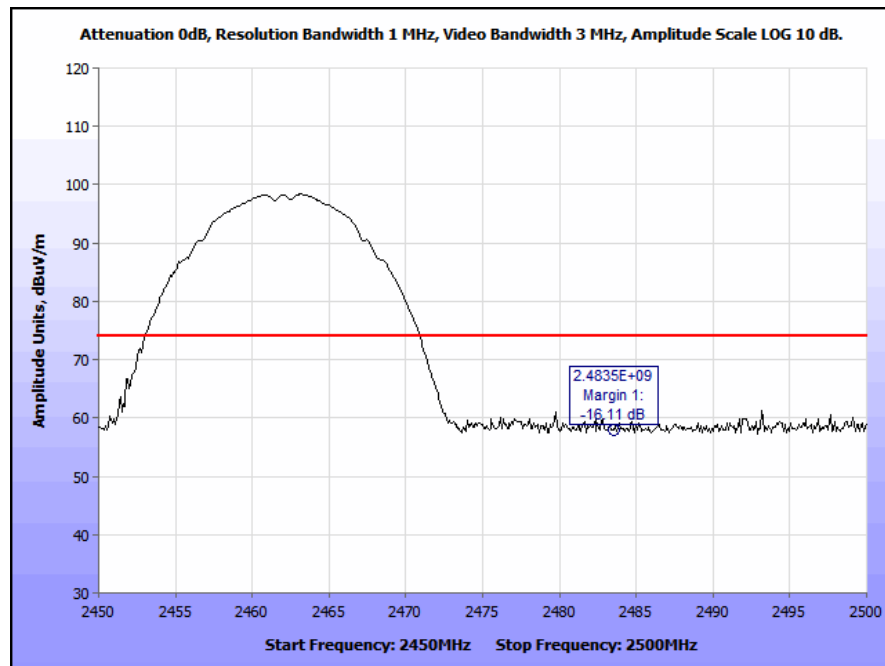


Plot 55. Radiated Restricted Band Edge, High Channel, Peak, 802.11b

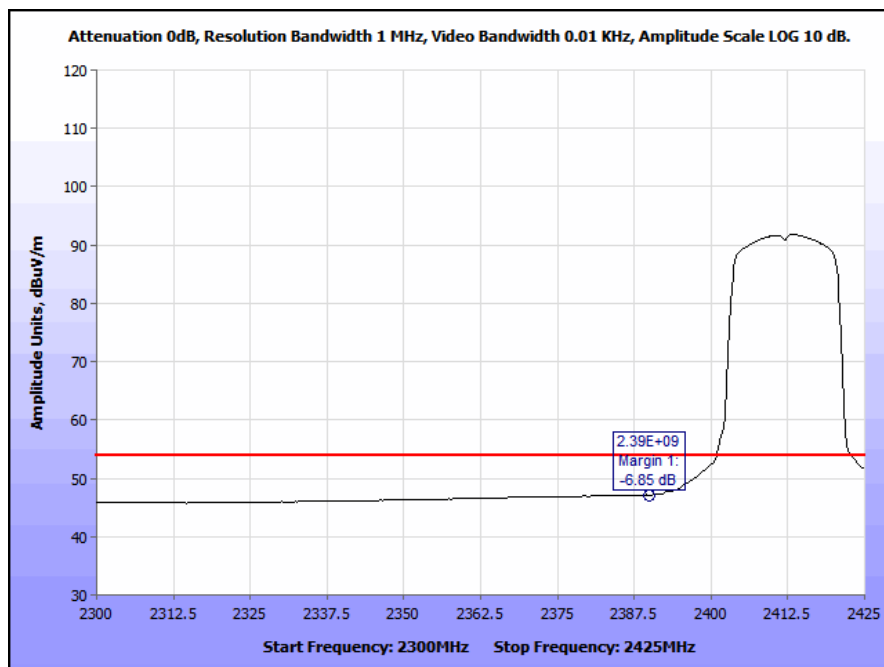


Plot 56. Radiated Restricted Band Edge, Low Channel, Average, 802.11g

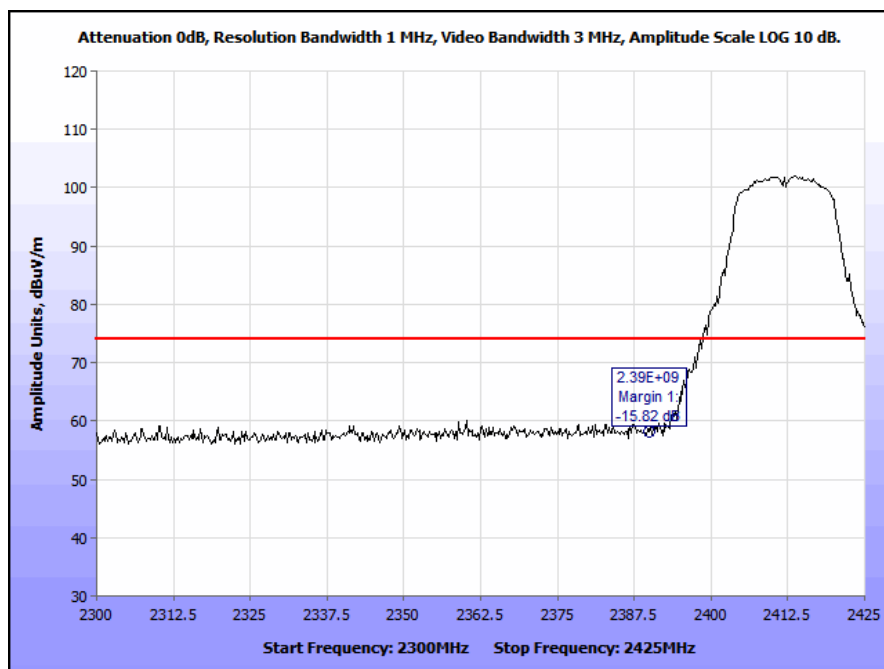


Plot 57. Radiated Restricted Band Edge, Low Channel, Peak, 802.11g

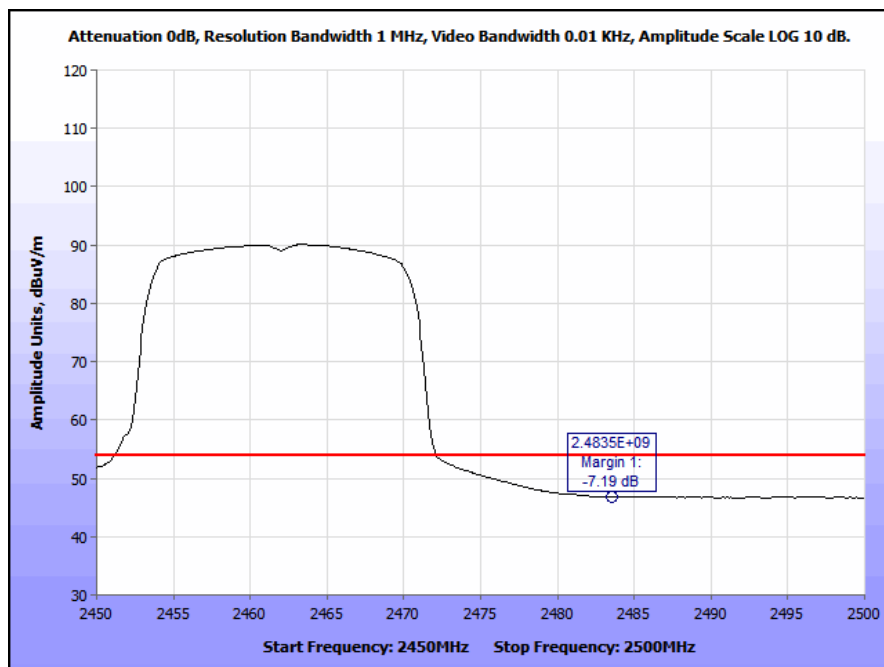


Plot 58. Radiated Restricted Band Edge, High Channel, Average, 802.11g

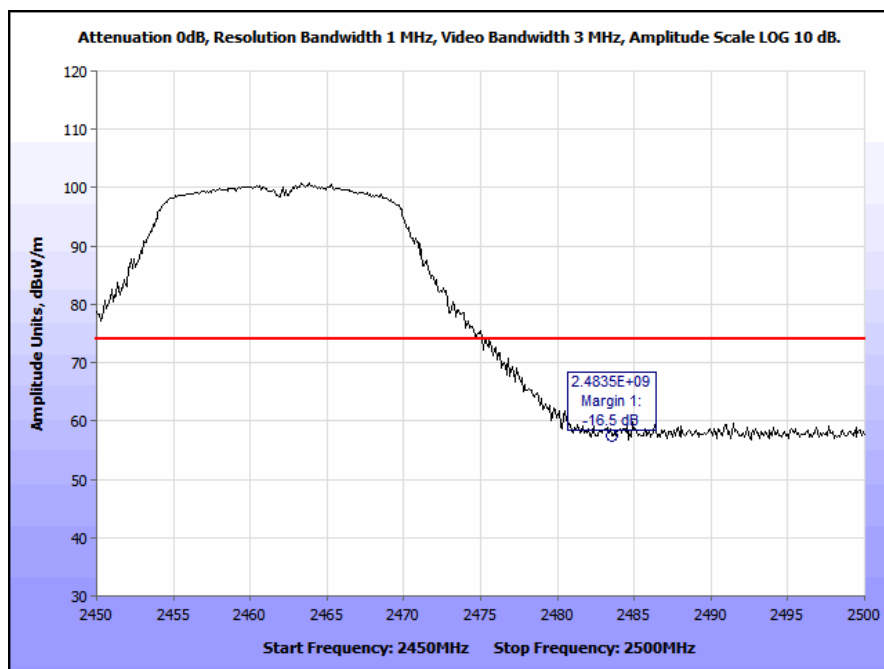


Plot 59. Radiated Restricted Band Edge, High Channel, Peak, 802.11g

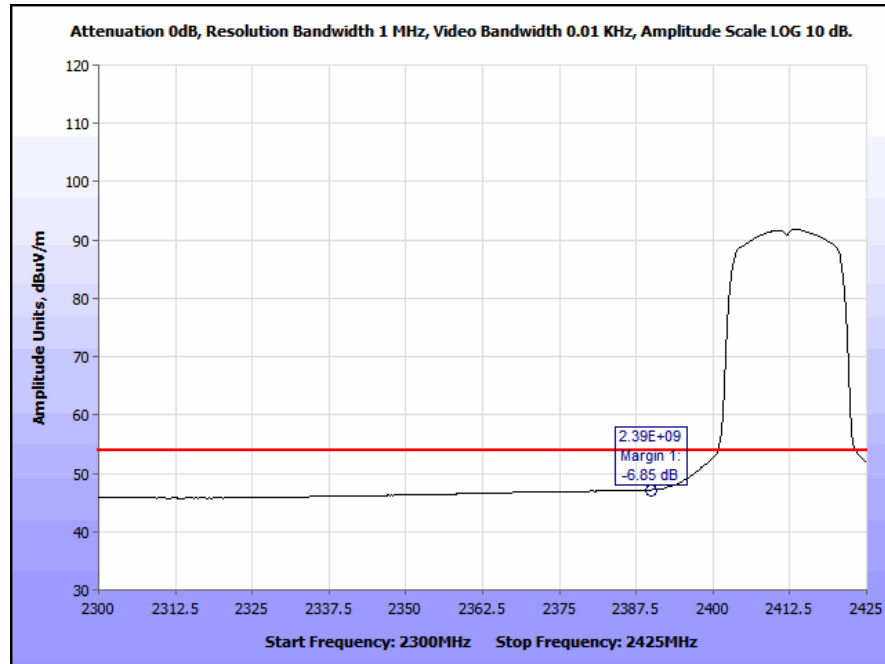


Plot 60. Radiated Restricted Band Edge, Low Channel, Average, 802.11n 20 MHz

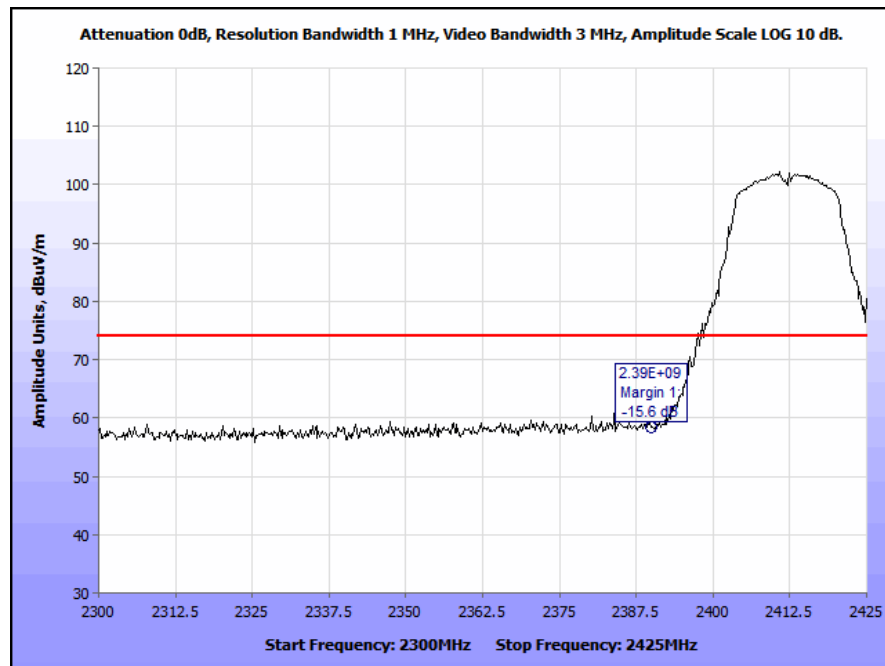

Plot 61. Radiated Restricted Band Edge, Low Channel, Peak, 802.11n 20 MHz

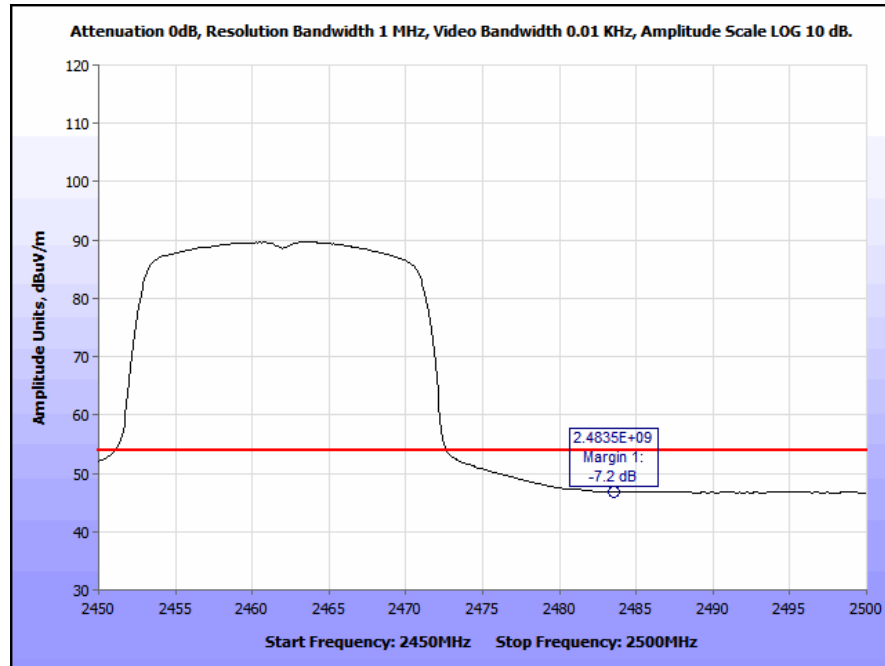

Plot 62. Radiated Restricted Band Edge, High Channel, Average, 802.11n 20 MHz

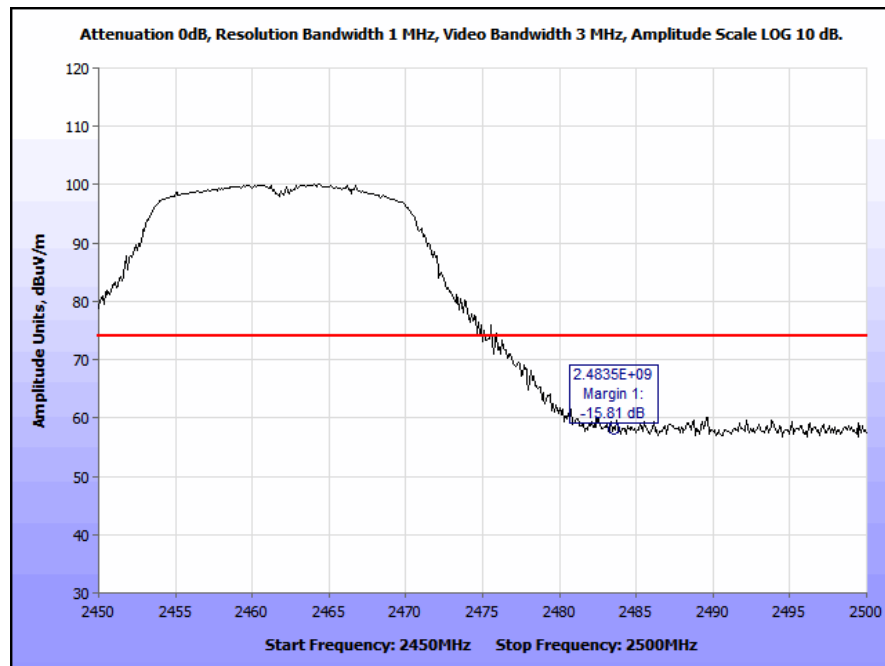

Plot 63. Radiated Restricted Band Edge, High Channel, Peak, 802.11n 20 MHz


Radiated Spurious Emissions Test Setup



Photograph 9. Radiated Spurious Emissions, Test Setup



Photograph 10. Radiated Spurious Emissions, Test Setup 30MHz – 1GHz

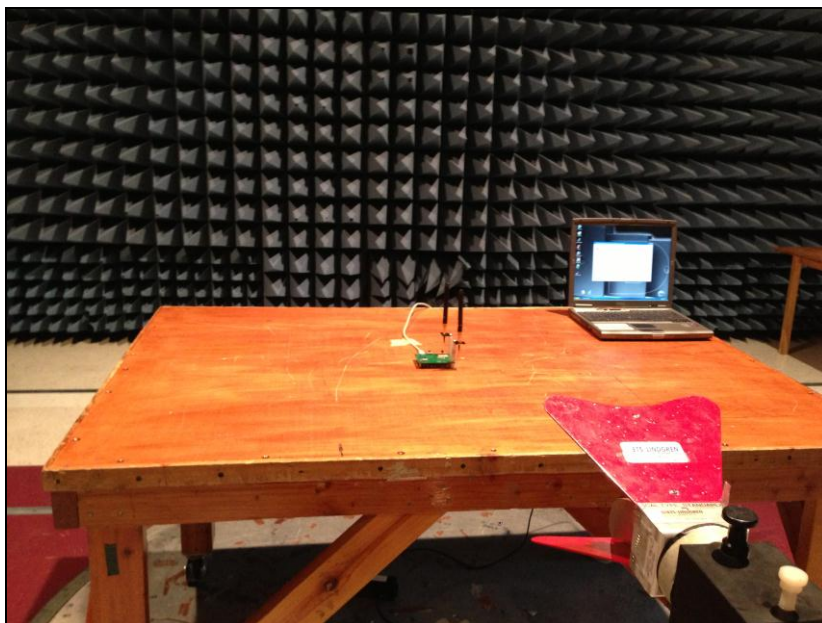

Photograph 11. Radiated Spurious Emissions, Test Setup above 1 GHz (1 Meter Distance for Radiated Spurious)



Photograph 12. Radiated Spurious Emissions, Test Setup above 1 GHz (3 Meter Distance for Radiated Band Edge)

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge

Test Requirement: **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

A sample was provided fitted with a SMA connector. The EUT was connected from the SMA connector to a spectrum analyzer using a 10 dB Attenuator. Testing was performed on Low, Mid and High Channels. A resolution bandwidth of 100kHz and video bandwidth of 300kHz were utilized.

For conducted band edge, a delta measurement was taken from the peak of the fundamental to the Band edge then compared to the limit. The plots were corrected for both attenuator and cable loss.

See following pages for detailed test results with RF Conducted Spurious Emissions.

Test Results: The EUT was compliant with the Conducted Spurious Emission limits of **§15.247(d)**.


Test Engineer(s): Anderson Soungpanya

Test Date(s): 10/23/12




Figure 4. Block Diagram, Conducted Spurious Emissions Test Setup


Conducted Spurious Emissions Test Results, 802.11b

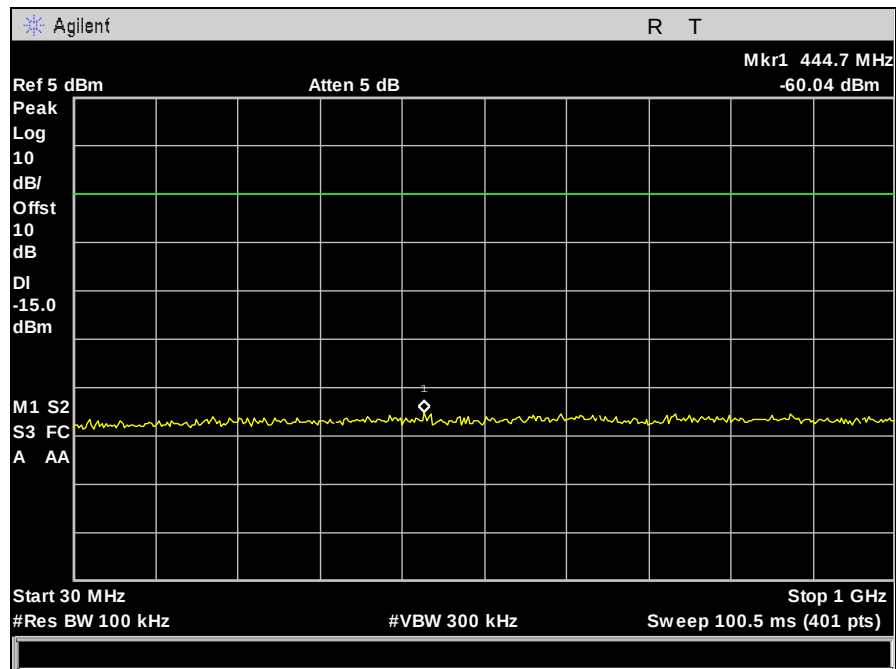


Plot 64. Conducted Spurious Emissions, Low Channel, 30 MHz – 1 GHz, 802.11b

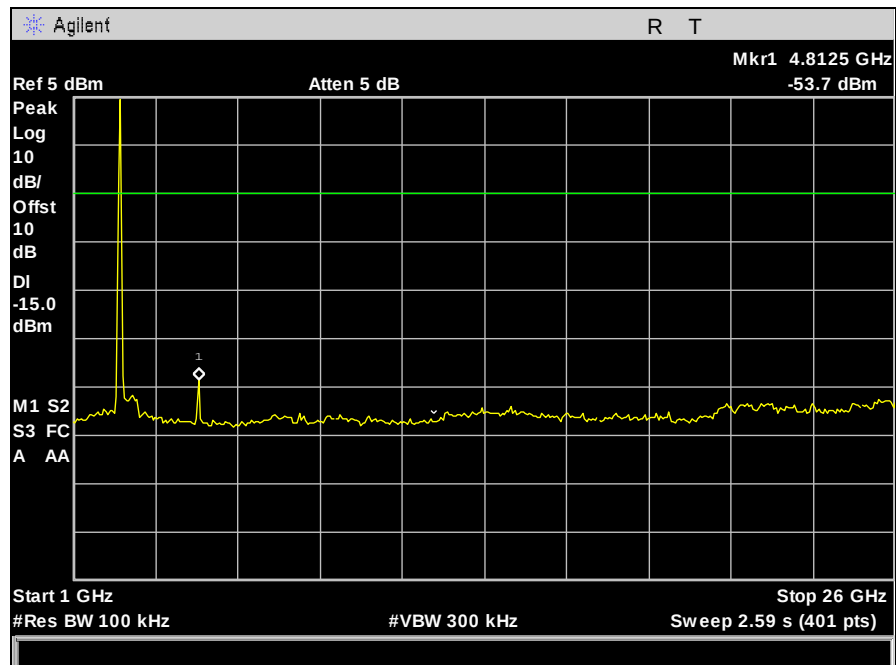


Plot 65. Conducted Spurious Emissions, Low Channel, 1 GHz – 26 GHz, 802.11b

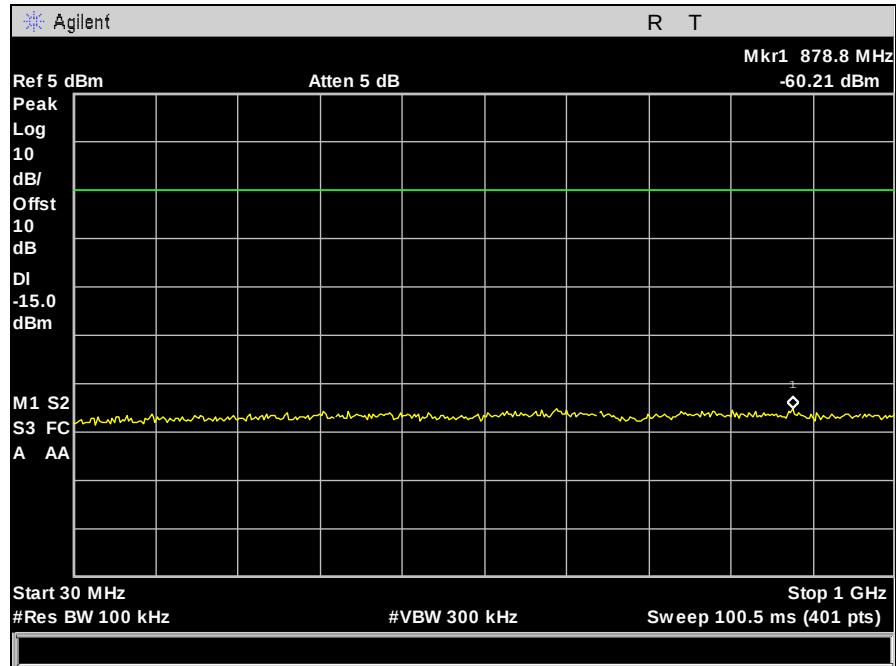


Plot 66. Conducted Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, 802.11b

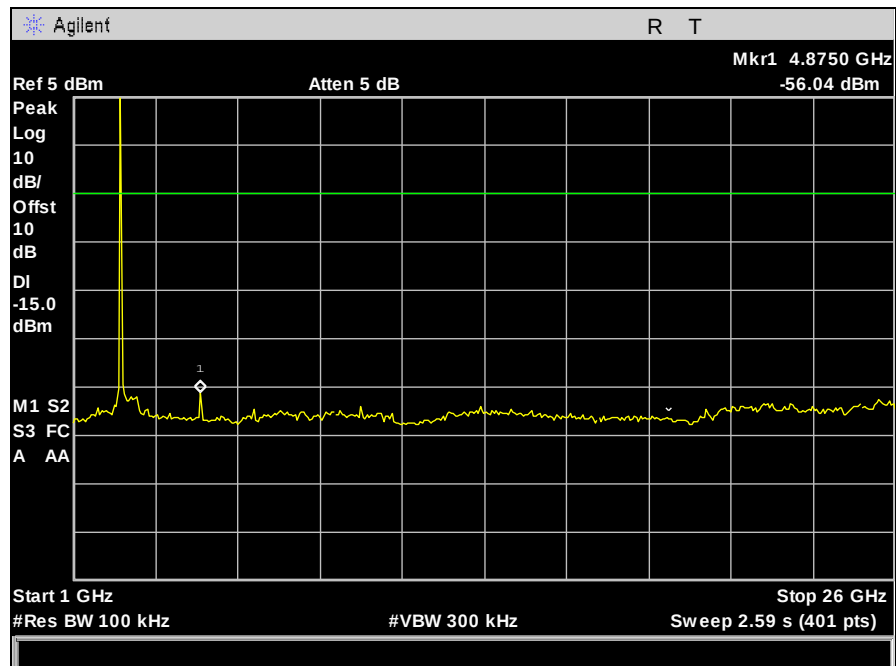

Plot 67. Conducted Spurious Emissions, Mid Channel, 1 GHz – 26 GHz, 802.11b

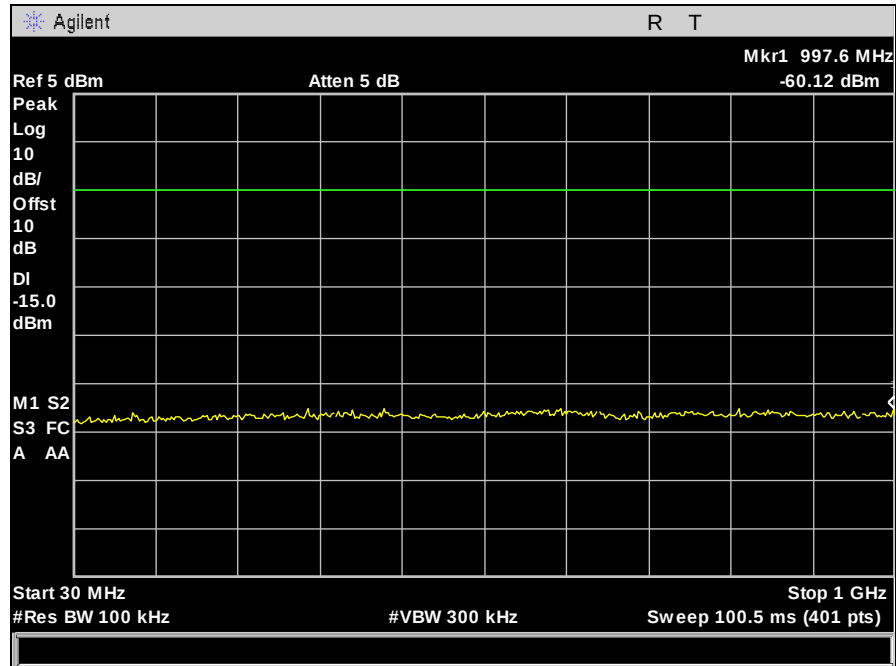


Plot 68. Conducted Spurious Emissions, High Channel, 30 MHz – 1 GHz, 802.11b

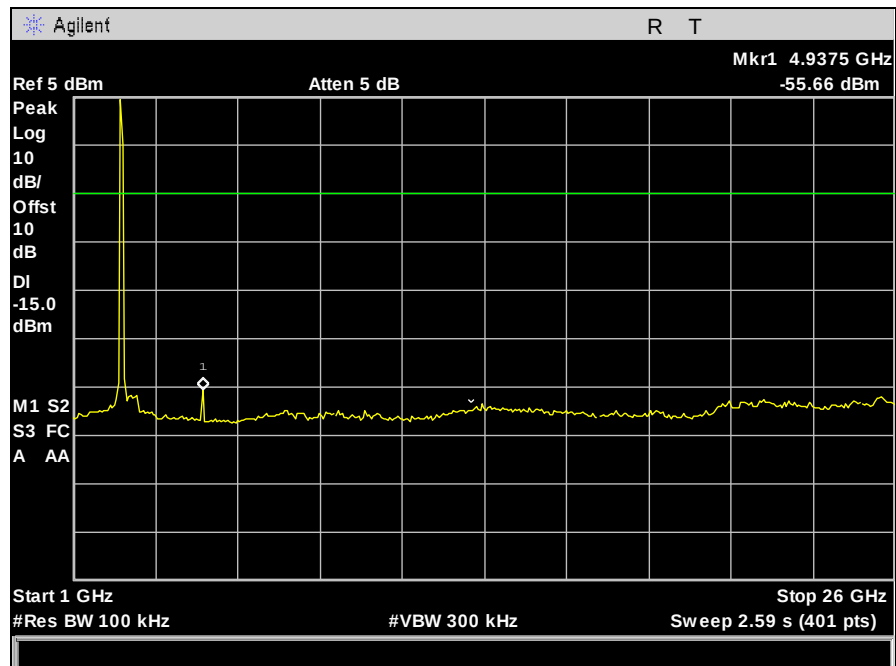


Plot 69. Conducted Spurious Emissions, High Channel, 1 GHz – 26 GHz, 802.11b


Conducted Spurious Emissions Test Results, 802.11g

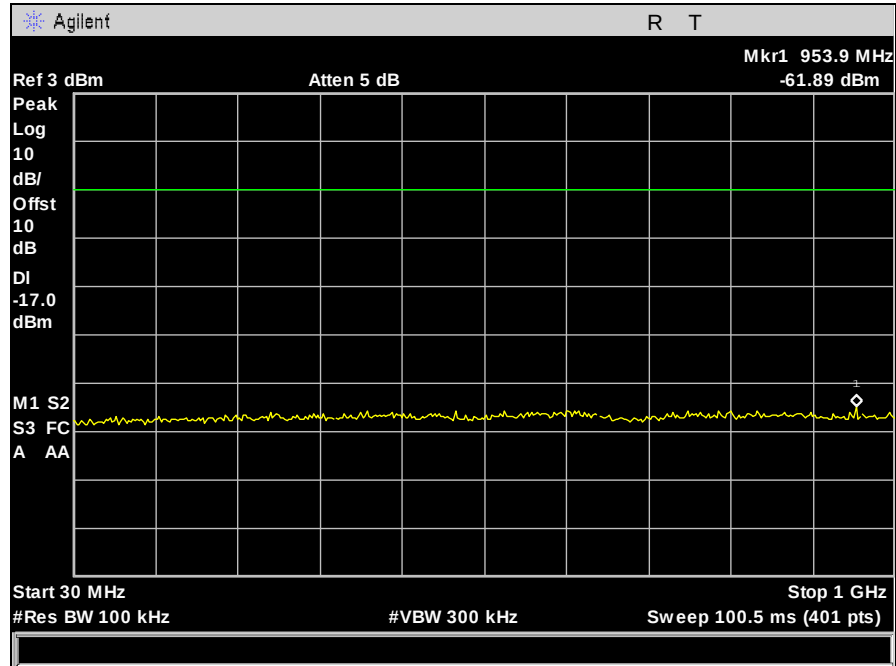


Plot 70. Conducted Spurious Emissions, Low Channel, 30 MHz – 1 GHz, 802.11g

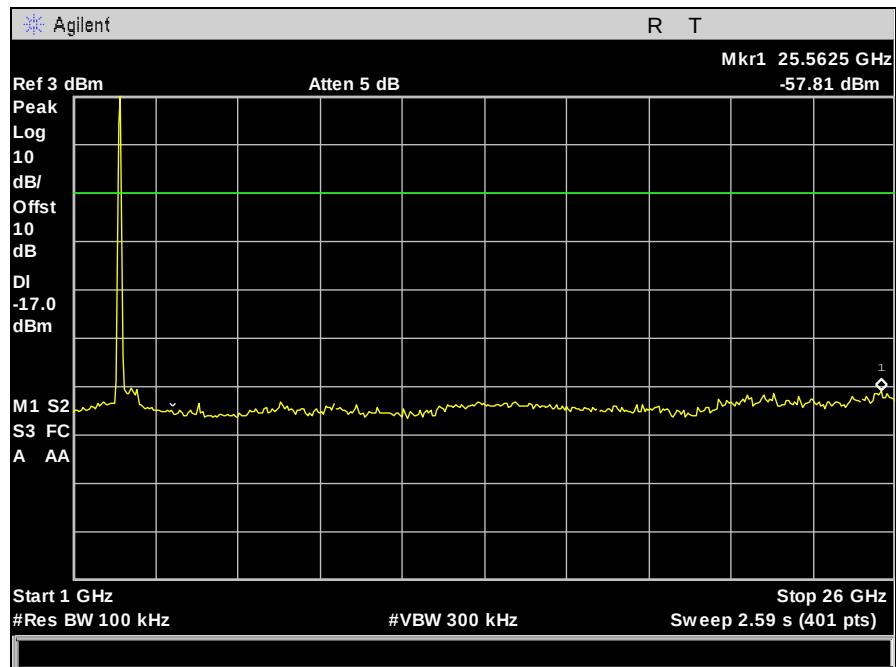


Plot 71. Conducted Spurious Emissions, Low Channel, 1 GHz – 26 GHz, 802.11g

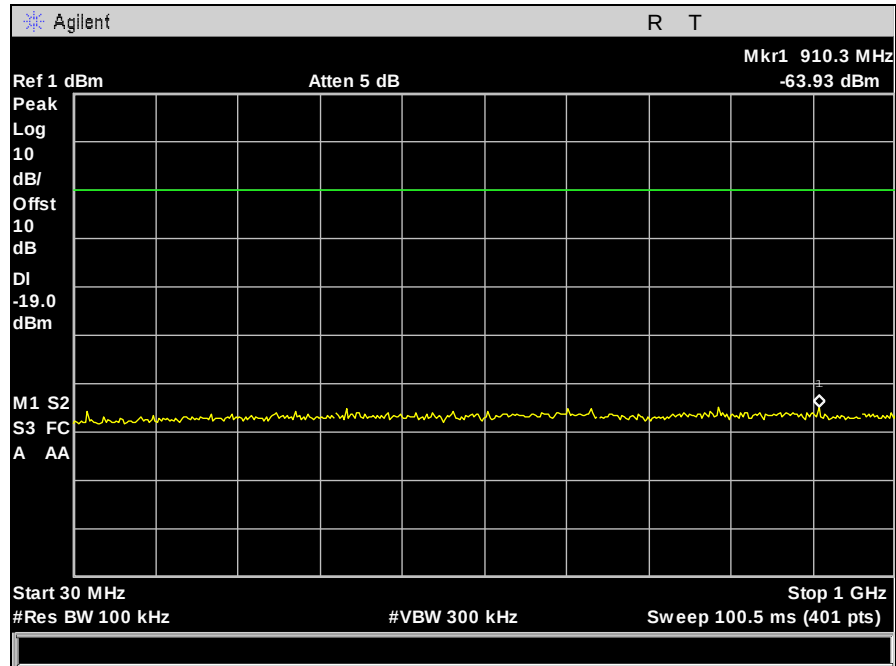


Plot 72. Conducted Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, 802.11g

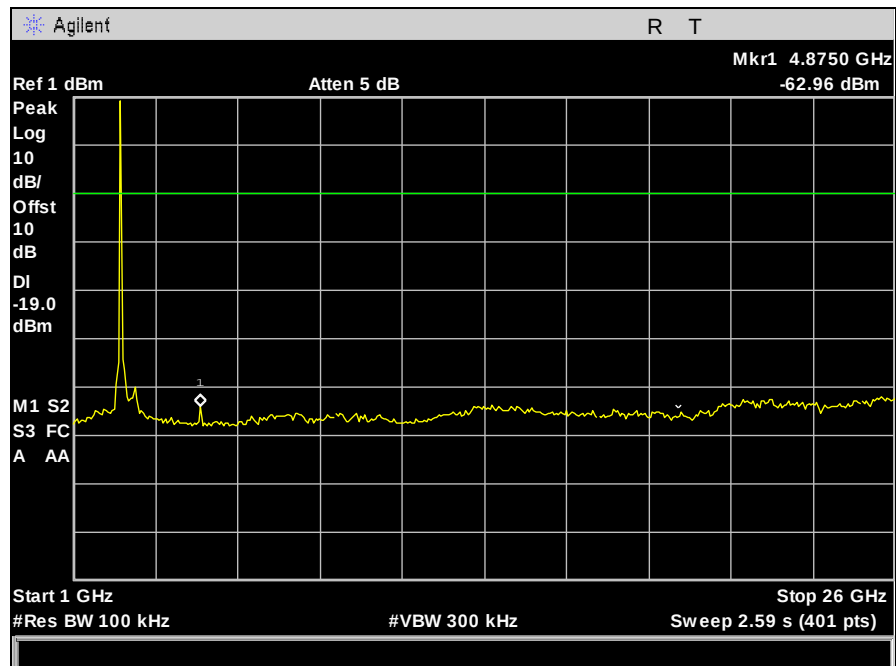

Plot 73. Conducted Spurious Emissions, Mid Channel, 1 GHz – 26 GHz, 802.11g

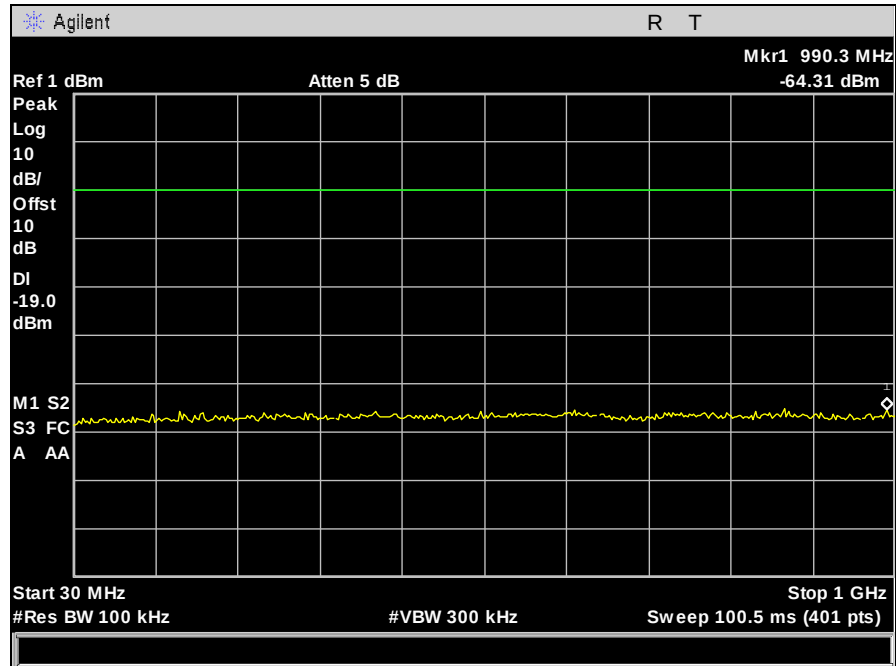


Plot 74. Conducted Spurious Emissions, High Channel, 30 MHz – 1 GHz, 802.11g

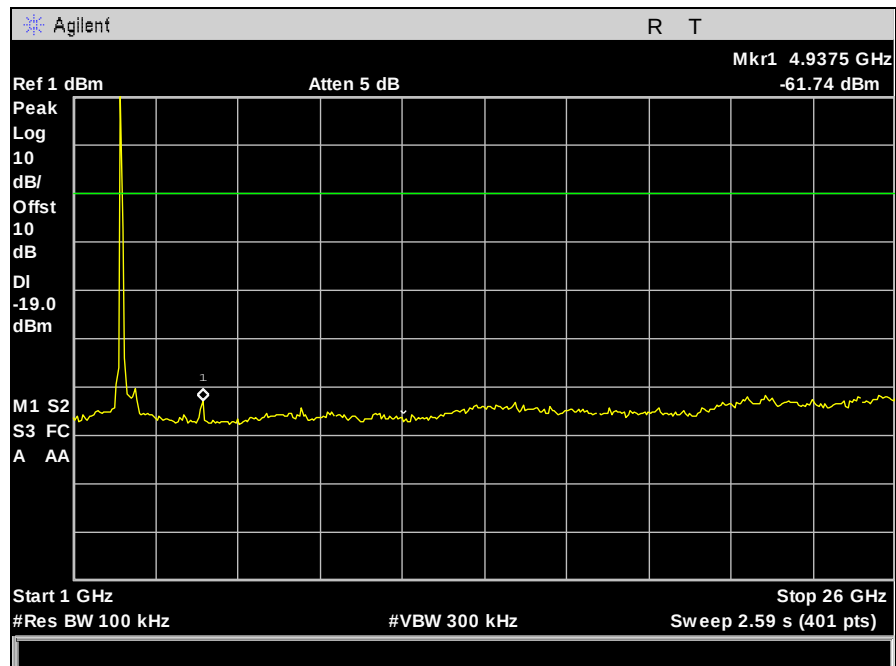


Plot 75. Conducted Spurious Emissions, High Channel, 1 GHz – 26 GHz, 802.11g


Conducted Spurious Emissions Test Results, 802.11n 20 MHz

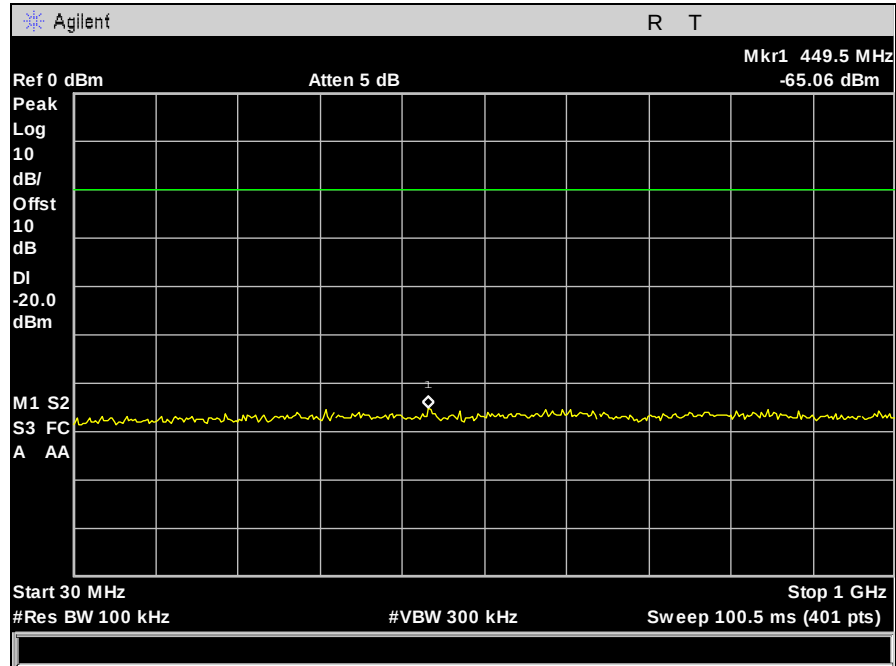


Plot 76. Conducted Spurious Emissions, Low Channel, 30 MHz – 1 GHz, 802.11n 20 MHz

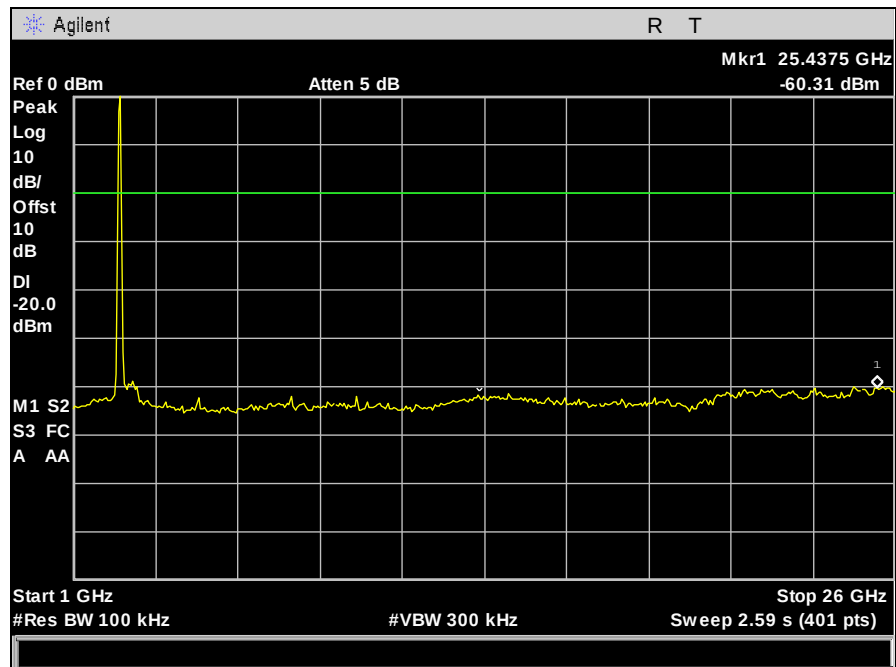


Plot 77. Conducted Spurious Emissions, Low Channel, 1 GHz – 26 GHz, 802.11n 20 MHz

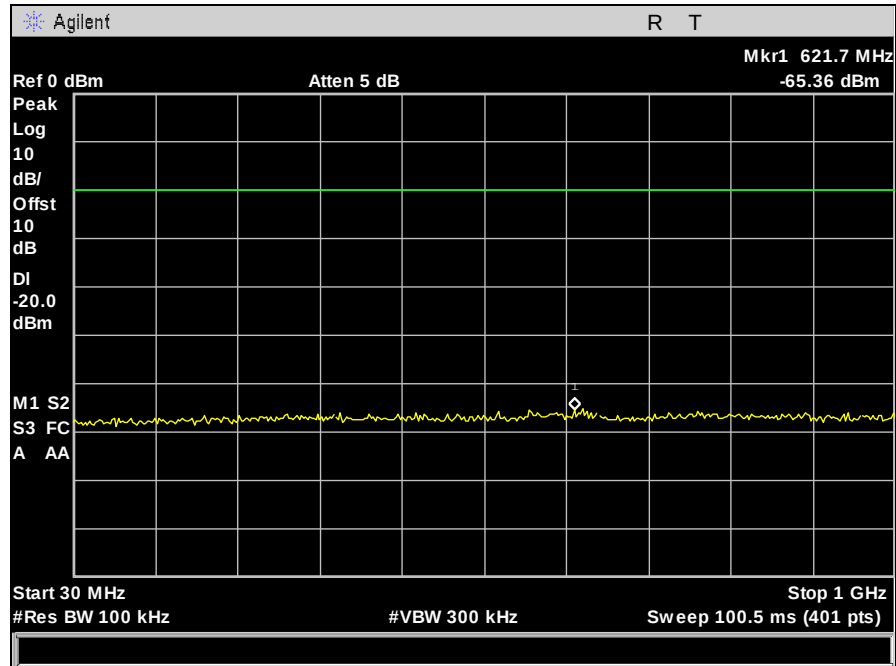


Plot 78. Conducted Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, 802.11n 20 MHz

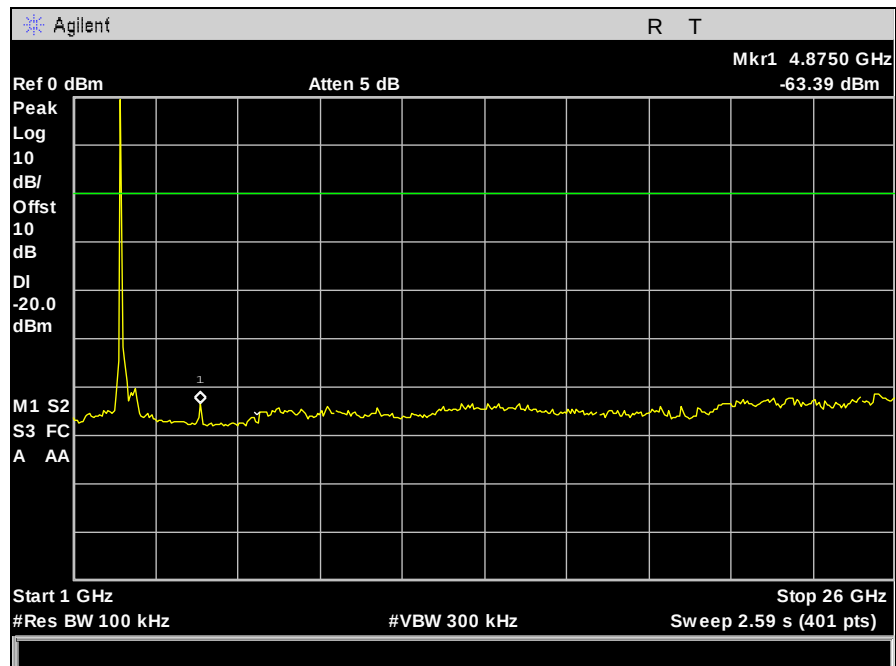

Plot 79. Conducted Spurious Emissions, Mid Channel, 1 GHz – 26 GHz, 802.11n 20 MHz

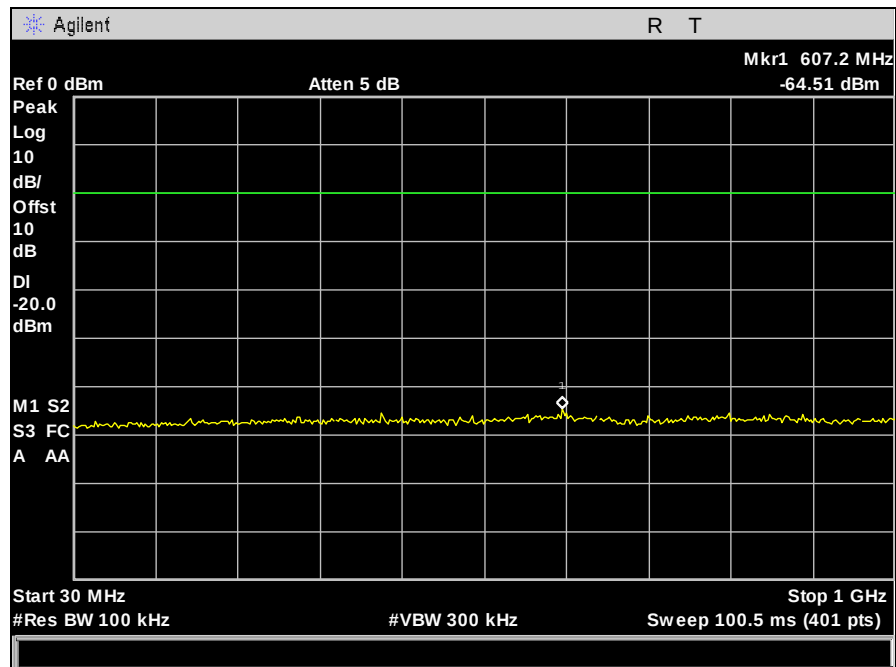


Plot 80. Conducted Spurious Emissions, High Channel, 30 MHz – 1 GHz, 802.11n 20 MHz

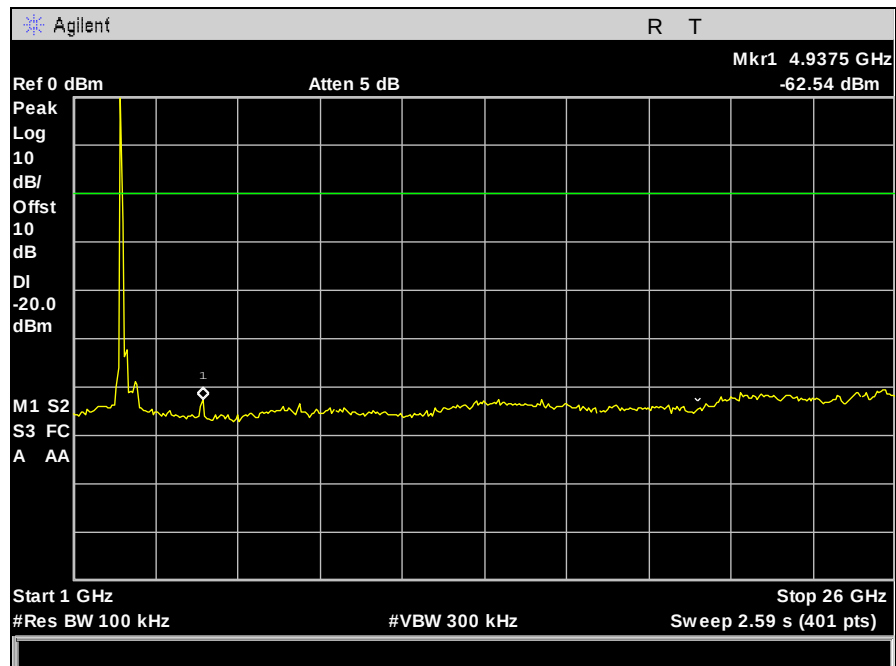


Plot 81. Conducted Spurious Emissions, High Channel, 1 GHz – 26 GHz, 802.11n 20 MHz

Conducted Band Edge Test Results, 802.11b

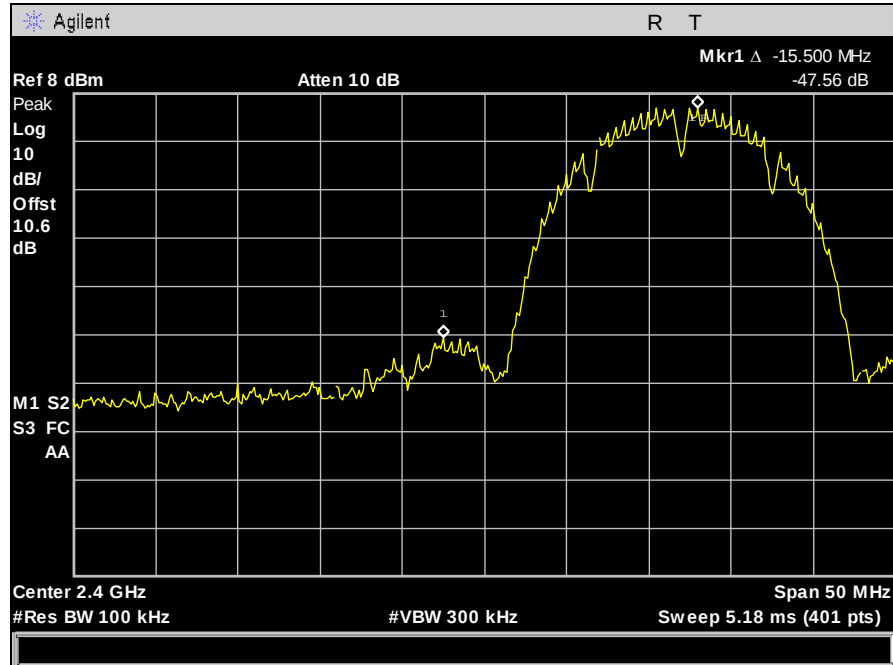


Plot 82. Conducted Band Edge, Low Channel, 802.11b

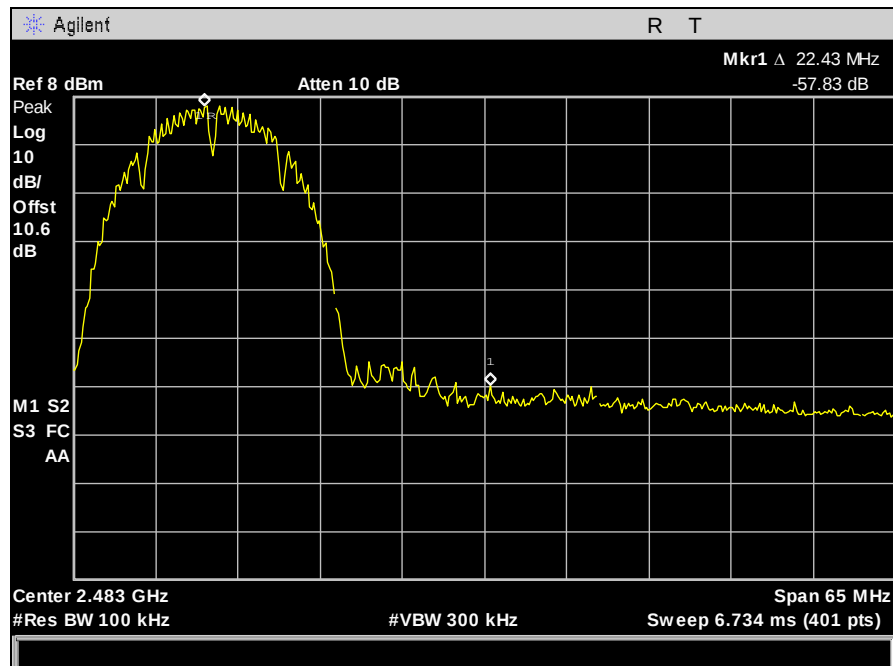


Plot 83. Conducted Band Edge, High Channel, 802.11b

Conducted Band Edge Test Results, 802.11g

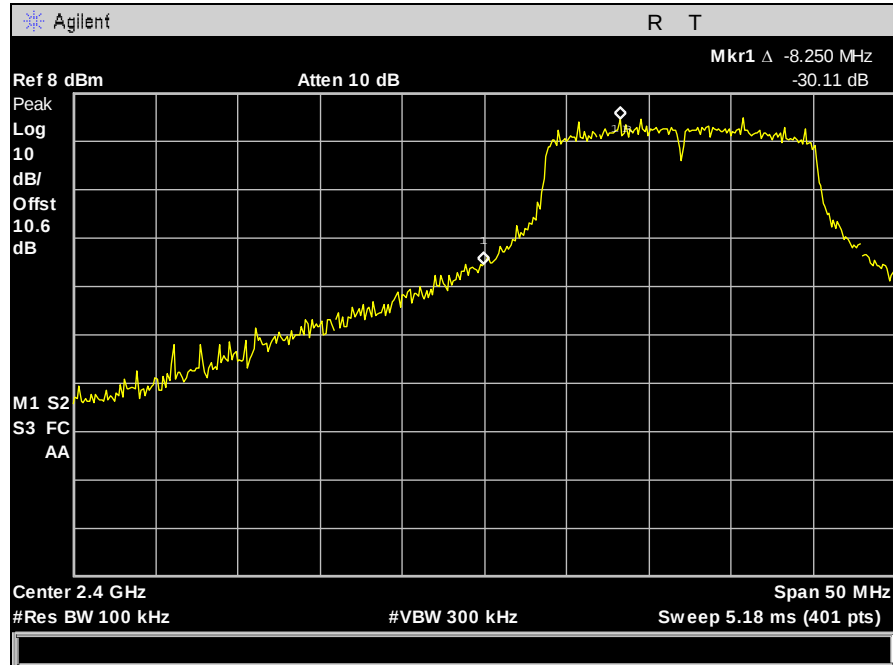


Plot 84. Conducted Band Edge, Low Channel, 802.11g

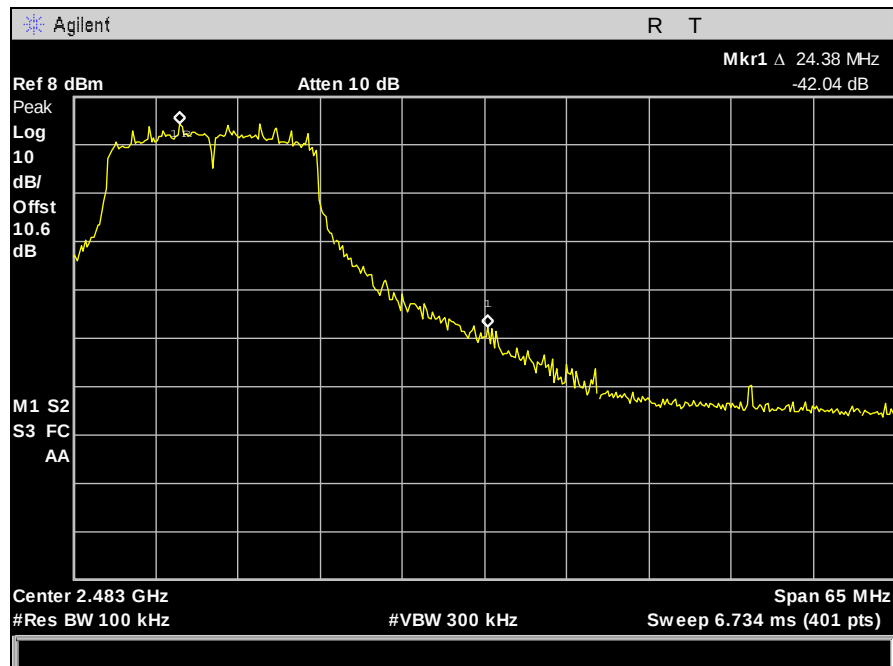


Plot 85. Conducted Band Edge, High Channel, 802.11g

Conducted Band Edge Test Results, 802.11n 20 MHz

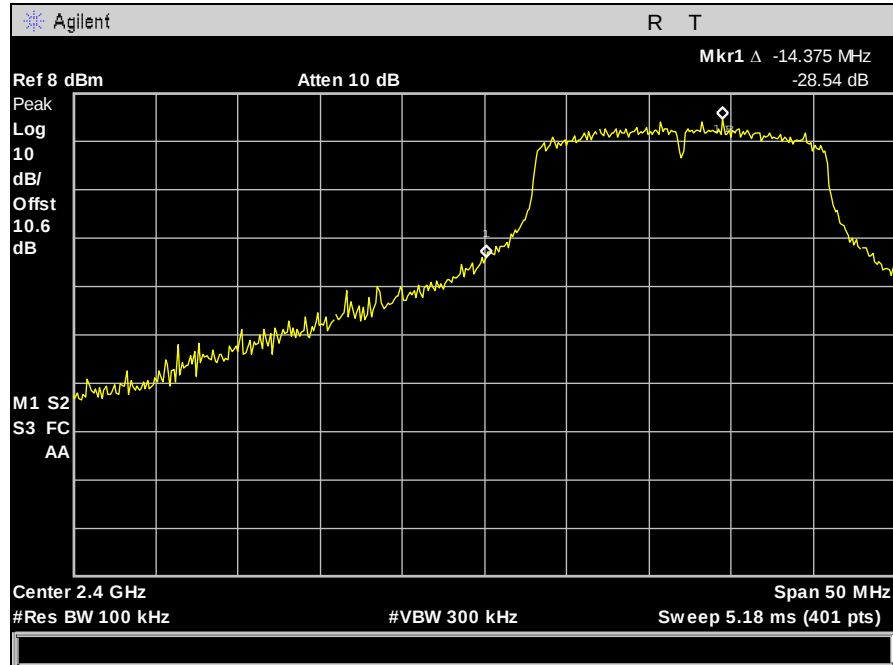

Plot 86. Conducted Band Edge, Low Channel, 802.11n 20 MHz

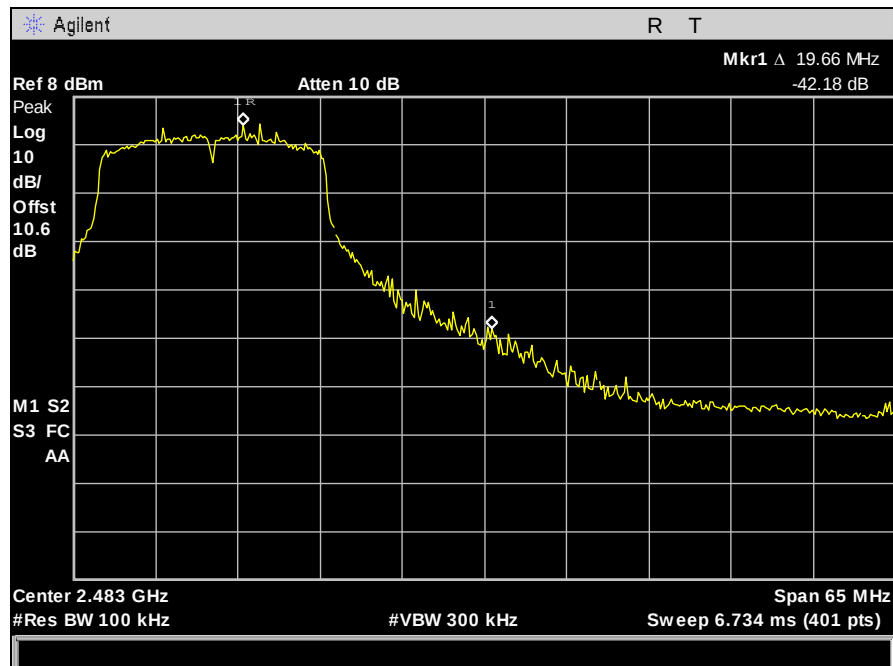

Plot 87. Conducted Band Edge, High Channel, 802.11n 20 MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: §15.247(e): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level. A RBW of 1 MHz and VBW of 3 MHz were used to determine the peak emissions within the band. The Spectrum analyzer was then set to a RBW of 3 kHz and VBW was set to 10 kHz. The SPAN of the analyzer was set to 1 MHz with a 333.3 second sweep. Measurements were carried out at the low, mid and high channels.

Test Results: The EUT was compliant with the peak power spectral density limits of § 15.247 (e).

The peak power spectral density was determined from plots on the following page(s).

Test Engineer: Anderson Soungpanya

Test Date: 10/23/12




Figure 5. Block Diagram, Peak Power Spectral Density Test Setup

Peak Power Spectral Density Test Results


Peak Power Spectral Density					
Mode	Carrier Channel	Frequency (MHz)	Measured PPSP (dBm)	Limit (dBm)	Margin (dB)
802.11b	Low	2412	-7.598	8	-15.598
	Mid	2437	-6.62	8	-14.62
	High	2462	-7.078	8	-15.078
802.11g	Low	2412	-10.54	8	-18.54
	Mid	2437	-10.52	8	-18.52
	High	2462	-9.619	8	-17.619
802.11n 20 MHz	Low	2412	-9.362	8	-17.362
	Mid	2437	-10.5	8	-18.5
	High	2462	-9.631	8	-17.631

Table 23. Peak Power Spectral Density, Test Results


Peak Power Spectral Density, 802.11b

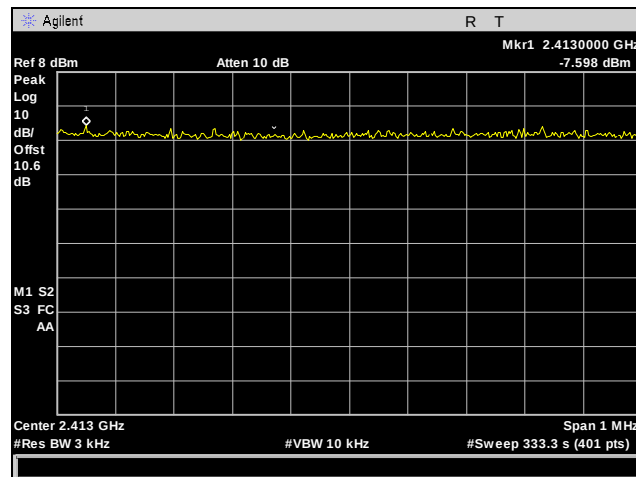

Plot 88. Peak Power Spectral Density, Low Channel, 802.11b

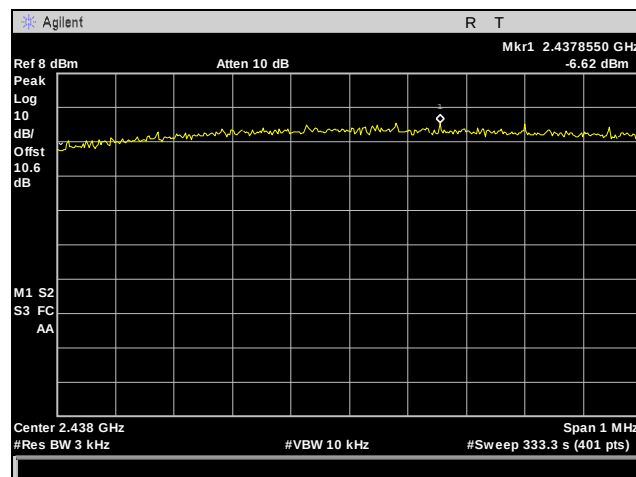


Plot 89. Peak Power Spectral Density, Mid Channel, 802.11b

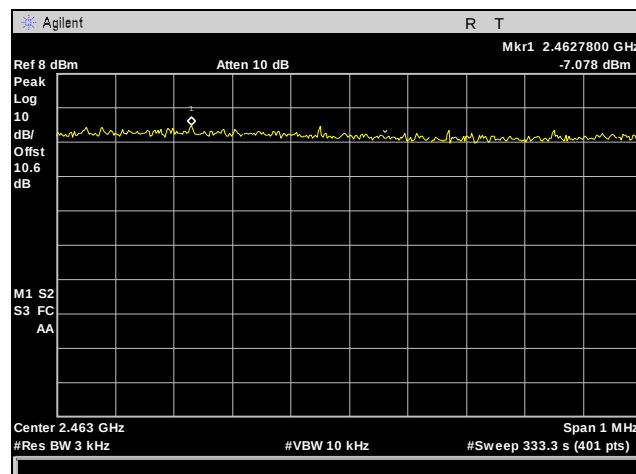


Plot 90. Peak Power Spectral Density, High Channel, 802.11b


Peak Power Spectral Density, 802.11g

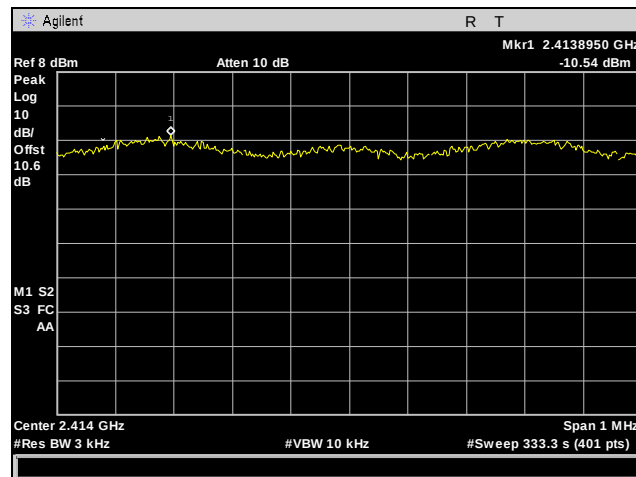

Plot 91. Peak Power Spectral Density, Low Channel, 802.11g

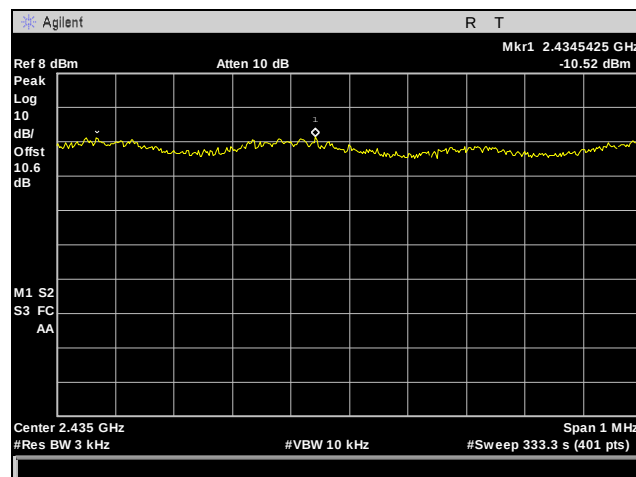


Plot 92. Peak Power Spectral Density, Mid Channel, 802.11g

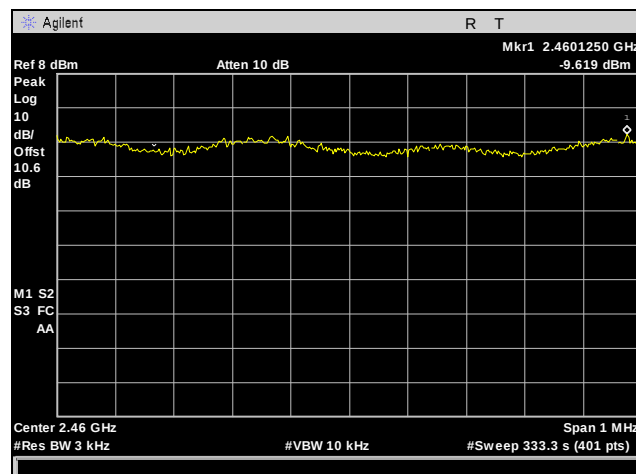


Plot 93. Peak Power Spectral Density, High Channel, 802.11g


Peak Power Spectral Density, 802.11n 20 MHz

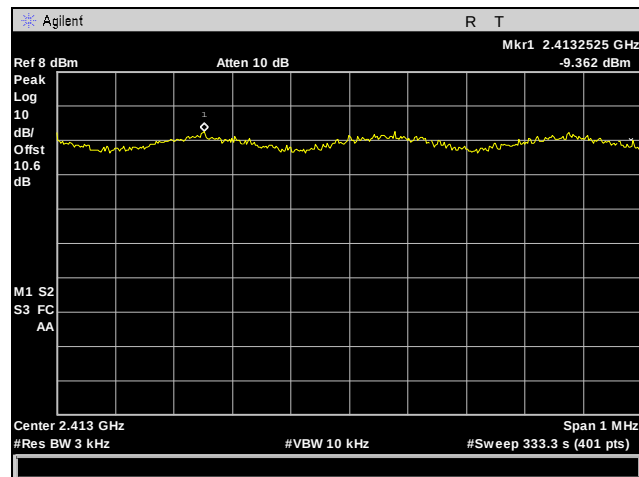

Plot 94. Peak Power Spectral Density, Low Channel, 802.11n 20 MHz

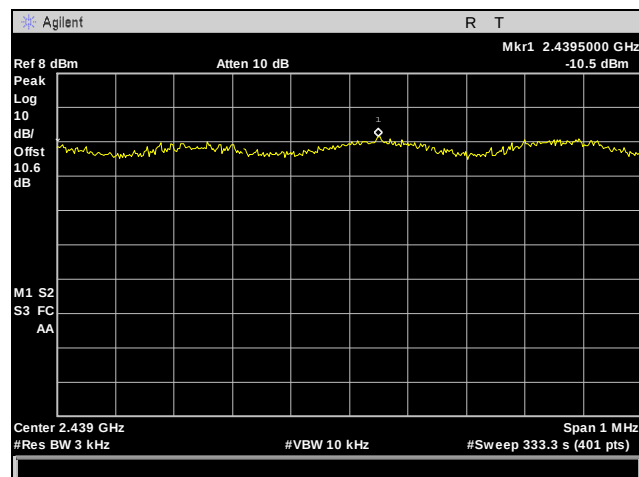

Plot 95. Peak Power Spectral Density, Mid Channel, 802.11n 20 MHz

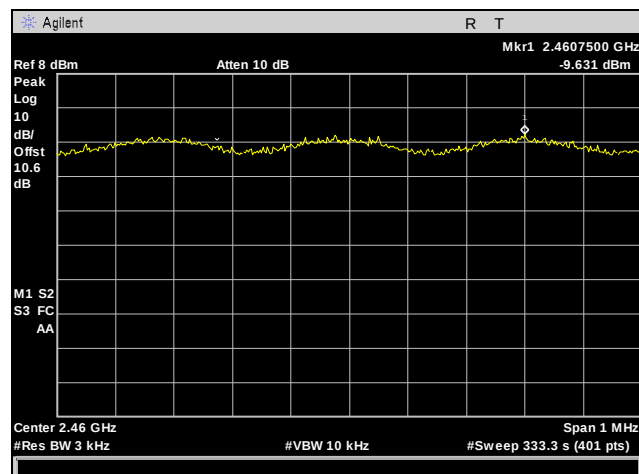

Plot 96. Peak Power Spectral Density, High Channel, 802.11n 20 MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(i) Maximum Permissible Exposure

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 2400-2483.5 MHz; highest conducted power = 21.73dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = 3 dBi.

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm²)
P = Power Input to antenna (148.94mW)
G = Antenna Gain (2.00 numeric)

$$S = (148.94 * 2.00 / 4 * 3.14 * 20.0^2) = (297.167 / 5024) = \mathbf{0.059 \text{ mW/cm}^2 @ 20\text{cm separation}}$$

Electromagnetic Compatibility Criteria for Intentional Radiators

RSS-GEN Receiver Spurious Emissions Requirements

Test Requirements: The following receiver spurious emission limits shall be complied with:

- (a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 24.

Spurious Frequency (MHz)	Field Strength (microvolt/m at 3 metres)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 24. Spurious Emission Limits for Receivers

- (b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

Test Procedures: The EUT was programmed for receive mode only. Conducted measurements were taken at the antenna port of the EUT. 300 kHz resolution bandwidth was used from 30 MHz - 1 GHz and 1 MHz resolution was used for measurements done above 1 GHz. All plots are corrected for cable loss.

Test Results: Equipment is compliant with the Receiver Spurious Emissions Requirements of RSS-GEN.

Test Engineer(s): Anderson Soungpanya

Test Date(s): 10/23/12






Figure 6. Block Diagram, Conducted Receiver Spurious Emissions Test Setup

Conducted Receiver Spurious Emissions

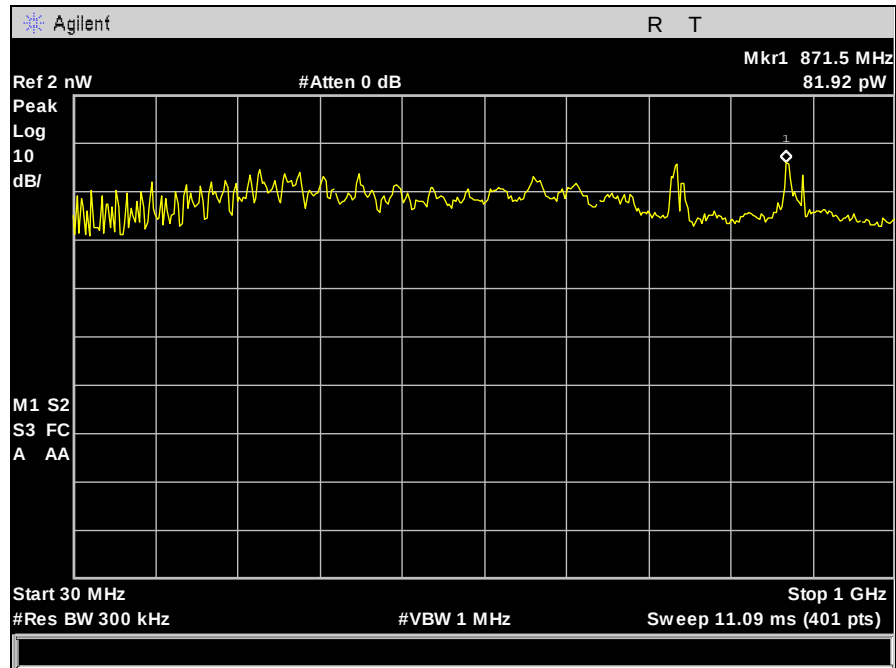

Plot 97. Receiver Spurious Emission, 30 MHz – 1 GHz

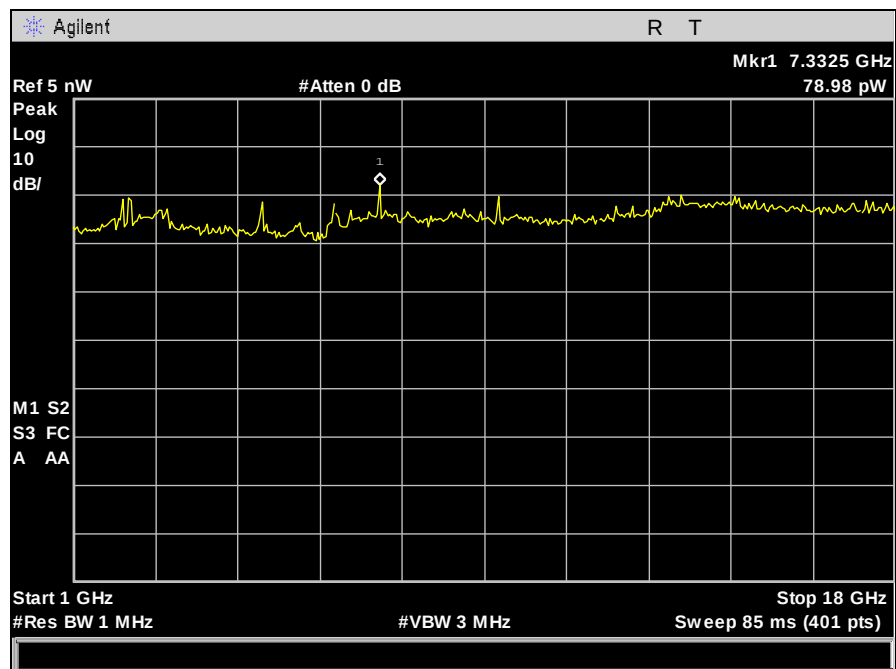

Plot 98. Receiver Spurious Emission, 1 GHz – 18 GHz

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2600	BILOG ANTENNA	TESEQ	CBL6112D	4/14/2010	4/14/2013
1S2482	5 METER CHAMBER (NSA)	PANASHIELD	5 METER SEMI-ANECHOIC CHAMBER	11/22/2011	5/22/2013
1S2583	SPECTRUM ANALYZER	AGILENT/HP	E4447A	3/27/2012	9/27/2013
1S2460	1-26GHZ SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	7/27/2012	1/27/2014
1S2202	HORN ANTENNA (1 METER)	EMCO	3116	4/23/2010	4/23/2013
1S2523	PREAMPLIFIER	AGILENT TECHNOLOGIES	8449B	SEE NOTE	SEE NOTE
1S2603	DOUBLE RIDGED WAVEGUIDE HORN	ETS-LINDGREN	3117	4/15/2011	4/15/2013
1S2729	SONOMA AMPLIFIER	SONOMA INSTRUMENT	310N	4/18/2012	10/18/2013
1S2229	TEMPERATURE CHAMBER	TENNY ENGINEERING	T63C	2/18/2012	8/18/2013
1S2710	DRG HORN ANTENNA	AH SYSTEMS, INC	SAS-574	11/30/2011	11/30/2012
NA	NOTCH FILTER	MICRO-TRONICS	BRM50702	SEE NOTE	

Table 25. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

V. Certification & User's Manual Information

Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing*;
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

1. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.
- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The user's manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

ICES-003 Procedural & Labeling Requirements

From the Industry Canada Electromagnetic Compatibility Advisory Bulletin entitled, "Implementation and Interpretation of the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003" (EMCAB-3, Issue 2, July 1995):

"At present, CISPR 22: 2002 and ICES technical requirements are essentially equivalent. Therefore, if you have CISPR 22: 2002 approval by meeting CISPR Publication 22, the only additional requirements are: to attach a note to the report of the test results for compliance, indicating that these results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations; to maintain these records on file for the requisite five year period; and to provide the device with a notice of compliance in accordance with ICES-003."

Procedural Requirements:

According to Industry Canada's Interference Causing Equipment Standard for Digital Apparatus ICES-003 Issue 5 August 2012:

- Section 6.1: A record of the measurements and results, showing the date that the measurements were completed, shall be retained by the manufacturer or importer for a period of at least five years from the date shown in the record and made available for examination on the request of the Minister.
- Section 6.2: A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement in the users' manual.

Labeling Requirements:

The suggested text for the notice, in English and in French, is provided below, from the Annex of ICES-003:

This Class [²] digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [¹] est conforme à la norme NMB-003 du Canada.

² Insert either A or B but not both as appropriate for the equipment requirements.

End of Report