

## FCC RADIO TEST REPORT

|                        |                                                                           |
|------------------------|---------------------------------------------------------------------------|
| Applicant's company    | Wistron NeWeb Corporation                                                 |
| Applicant Address      | No.10-1,Li-hsin Road I,Hsinchu Science Park,Hsinchu 300,Taiwan,<br>R.O.C. |
| FCC ID                 | NKR-DNMA83                                                                |
| Manufacturer's company | Wistron NeWeb Corporation                                                 |
| Manufacturer Address   | No.10-1,Li-hsin Road I,Hsinchu Science Park,Hsinchu 300,Taiwan,<br>R.O.C. |

|                  |                                       |
|------------------|---------------------------------------|
| Product Name     | WLAN a/b/g/n mini-PCI Module          |
| Brand Name       | WNC                                   |
| Model Name       | DNMA-83                               |
| Test Rule        | 47 CFR FCC Part 15 Subpart C § 15.247 |
| Test Freq. Range | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz     |
| Received Date    | Nov. 29, 2007                         |
| Final Test Date  | Feb. 28, 2008                         |
| Submission Type  | Original Equipment                    |



### Statement

**Test result included is only for the Draft n part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

## Table of Contents

|                                                          |                 |
|----------------------------------------------------------|-----------------|
| <b>1. CERTIFICATE OF COMPLIANCE .....</b>                | <b>1</b>        |
| <b>2. SUMMARY OF THE TEST RESULT .....</b>               | <b>2</b>        |
| <b>3. GENERAL INFORMATION .....</b>                      | <b>3</b>        |
| 3.1. Product Details.....                                | 3               |
| 3.2. Accessories.....                                    | 5               |
| 3.3. Table for Filed Antenna.....                        | 5               |
| 3.4. Table for Carrier Frequencies .....                 | 6               |
| 3.5. Table for Test Modes .....                          | 7               |
| 3.6. Table for Testing Locations.....                    | 8               |
| 3.7. Table for Supporting Units .....                    | 8               |
| 3.8. Table for Parameters of Test Software Setting ..... | 9               |
| 3.9. Test Configurations .....                           | 11              |
| <b>4. TEST RESULT .....</b>                              | <b>14</b>       |
| 4.1. AC Power Line Conducted Emissions Measurement.....  | 14              |
| 4.2. Maximum Peak Output Power Measurement .....         | 18              |
| 4.3. Power Spectral Density Measurement .....            | 60              |
| 4.4. 6dB Spectrum Bandwidth Measurement .....            | 74              |
| 4.5. Radiated Emissions Measurement .....                | 88              |
| 4.6. Band Edge Emissions Measurement .....               | 140             |
| 4.7. Antenna Requirements .....                          | 157             |
| <b>5. LIST OF MEASURING EQUIPMENTS .....</b>             | <b>158</b>      |
| <b>6. TEST LOCATION.....</b>                             | <b>160</b>      |
| <b>7. TAF CERTIFICATE OF ACCREDITATION .....</b>         | <b>161</b>      |
| <b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>               | <b>A1 ~ A13</b> |
| <b>APPENDIX B. TEST PHOTOS.....</b>                      | <b>B1 ~ B16</b> |
| <b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....</b>     | <b>C1 ~ C5</b>  |

## History of This Test Report

Original Issue Date: Feb. 28, 2008

Report No.: FR7D1412AD

☒ No additional attachment.

☐ Additional attachment were issued as following record:

| Attachment No. | Issue Date | Description |
|----------------|------------|-------------|
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |

## 1. CERTIFICATE OF COMPLIANCE

Product Name : WLAN a/b/g/n mini-PCI Module  
Brand Name : WNC  
Model Name : DNMA-83  
Applicant : Wistron NeWeb Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 29, 2007 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart C |              |                                     |          |             |
|------------------------------------------------|--------------|-------------------------------------|----------|-------------|
| Part                                           | Rule Section | Description of Test                 | Result   | Under Limit |
| 4.1                                            | 15.207       | AC Power Line Conducted Emissions   | Complies | 13.16 dB    |
| 4.2                                            | 15.247(b)(3) | Maximum Peak Conducted Output Power | Complies | 2.20 dB     |
| 4.3                                            | 15.247(e)    | Power Spectral Density              | Complies | 4.21 dB     |
| 4.4                                            | 15.247(a)(2) | 6dB Spectrum Bandwidth              | Complies | -           |
| 4.5                                            | 15.247(d)    | Radiated Emissions                  | Complies | 4.01 dB     |
| 4.6                                            | 15.247(d)    | Band Edge Emissions                 | Complies | 0.28 dB     |
| 4.7                                            | 15.203       | Antenna Requirements                | Complies | -           |

| Test Items                                  | Uncertainty               | Remark                   |
|---------------------------------------------|---------------------------|--------------------------|
| AC Power Line Conducted Emissions           | $\pm 2.3\text{dB}$        | Confidence levels of 95% |
| Maximum Peak Conducted Output Power         | $\pm 0.8\text{dB}$        | Confidence levels of 95% |
| Power Spectral Density                      | $\pm 0.5\text{dB}$        | Confidence levels of 95% |
| 6dB Spectrum Bandwidth                      | $\pm 8.5 \times 10^{-8}$  | Confidence levels of 95% |
| Radiated Emissions (9kHz~30MHz)             | $\pm 0.8\text{dB}$        | Confidence levels of 95% |
| Radiated Emissions (30MHz~1000MHz)          | $\pm 1.9\text{dB}$        | Confidence levels of 95% |
| Radiated / Band Edge Emissions (1GHz~18GHz) | $\pm 1.9\text{dB}$        | Confidence levels of 95% |
| Radiated Emissions (18GHz~40GHz)            | $\pm 1.9\text{dB}$        | Confidence levels of 95% |
| Temperature                                 | $\pm 0.7^{\circ}\text{C}$ | Confidence levels of 95% |
| Humidity                                    | $\pm 3.2\%$               | Confidence levels of 95% |
| DC / AC Power Source                        | $\pm 1.4\%$               | Confidence levels of 95% |

### 3. GENERAL INFORMATION

#### 3.1. Product Details

| Items                    | Description                                                                                                                                          |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Type             | WLAN (3TX, 3RX)                                                                                                                                      |
| Radio Type               | Intentional Transceiver                                                                                                                              |
| Power Type               | From Host System                                                                                                                                     |
| Modulation               | see the below table for draft n                                                                                                                      |
| Data Modulation          | OFDM (BPSK / QPSK / 16QAM / 64QAM)                                                                                                                   |
| Data Rate (Mbps)         | see the below table for Draft n                                                                                                                      |
| Frequency Range          | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz                                                                                                                    |
| Channel Number           | For 2.4GHz Band: 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth<br>For 5GHz Band: 3 for 20MHz bandwidth ; 2 for 40MHz bandwidth                      |
| Channel Band Width (99%) | For 2.4GHz Band:<br>MCS16 (20MHz) : 17.64 MHz ; MCS16 (40MHz) : 36.32 MHz<br>For 5GHz Band:<br>MCS16 (20MHz) : 17.76 MHz ; MCS16 (40MHz) : 36.40 MHz |
| Conducted Output Power   | For 2.4GHz Band:<br>MCS16 (20MHz) : 22.75 dBm ; MCS16 (40MHz) : 21.55 dBm<br>For 5GHz Band:<br>MCS16 (20MHz) : 27.43 dBm ; MCS16 (40MHz) : 27.80 dBm |
| Carrier Frequencies      | Please refer to section 3.4                                                                                                                          |
| Antenna                  | Please refer to section 3.3                                                                                                                          |

#### Antenna & Band width

| Antenna | Single (TX) |        | Three (TX) |        |
|---------|-------------|--------|------------|--------|
|         | 20 MHz      | 40 MHz | 20 MHz     | 40 MHz |
| 802.11a | X           | X      | V          | X      |
| 802.11b | X           | X      | V          | X      |
| 802.11g | X           | X      | V          | X      |
| Draft n | X           | X      | V          | V      |

## Draft n spec

| MCS Index |   | Modulation |               | NBPSC | NCBPS |       | NDBPS |       | Data rate(Mbps) |       |
|-----------|---|------------|---------------|-------|-------|-------|-------|-------|-----------------|-------|
|           |   |            |               |       |       |       |       |       | 800nsGI         |       |
|           |   |            |               |       | 20MHz | 40MHz | 20MHz | 40MHz | 20MHz           | 40MHz |
| 0         | 1 | BPSK       | $\frac{1}{2}$ | 1     | 52    | 108   | 26    | 54    | 6.5             | 13.5  |
| 1         | 1 | QPSK       | $\frac{1}{2}$ | 2     | 104   | 216   | 52    | 108   | 13.0            | 27.0  |
| 2         | 1 | QPSK       | $\frac{3}{4}$ | 2     | 104   | 216   | 78    | 162   | 19.5            | 40.5  |
| 3         | 1 | 16-QAM     | $\frac{1}{2}$ | 4     | 208   | 432   | 104   | 216   | 26.0            | 54.0  |
| 4         | 1 | 16-QAM     | $\frac{3}{4}$ | 4     | 208   | 432   | 156   | 324   | 39.0            | 81.0  |
| 5         | 1 | 64-QAM     | $\frac{2}{3}$ | 6     | 312   | 648   | 208   | 432   | 52.0            | 108.0 |
| 6         | 1 | 64-QAM     | $\frac{3}{4}$ | 6     | 312   | 648   | 234   | 486   | 58.5            | 121.5 |
| 7         | 1 | 64-QAM     | $\frac{5}{6}$ | 6     | 312   | 648   | 260   | 540   | 65.0            | 135.0 |
| 8         | 2 | BPSK       | $\frac{1}{2}$ | 1     | 104   | 216   | 52    | 108   | 13.0            | 27.0  |
| 9         | 2 | QPSK       | $\frac{1}{2}$ | 2     | 208   | 432   | 104   | 216   | 26.0            | 54.0  |
| 10        | 2 | QPSK       | $\frac{3}{4}$ | 2     | 208   | 432   | 156   | 324   | 39.0            | 81.0  |
| 11        | 2 | 16-QAM     | $\frac{1}{2}$ | 4     | 416   | 864   | 208   | 432   | 52.0            | 108.0 |
| 12        | 2 | 16-QAM     | $\frac{3}{4}$ | 4     | 416   | 864   | 312   | 648   | 78.0            | 162.0 |
| 13        | 2 | 64-QAM     | $\frac{2}{3}$ | 6     | 624   | 1296  | 416   | 864   | 104.0           | 216.0 |
| 14        | 2 | 64-QAM     | $\frac{3}{4}$ | 6     | 624   | 1296  | 468   | 972   | 117.0           | 243.0 |
| 15        | 2 | 64-QAM     | $\frac{5}{6}$ | 6     | 624   | 1296  | 520   | 1080  | 130.0           | 270.0 |
| 16        | 3 | BPSK       | $\frac{1}{2}$ | 1     | 156   | 324   | 78    | 162   | 19.5            | 40.5  |
| 17        | 3 | QPSK       | $\frac{1}{2}$ | 2     | 312   | 648   | 156   | 324   | 39              | 81    |
| 18        | 3 | QPSK       | $\frac{3}{4}$ | 2     | 312   | 648   | 234   | 486   | 58.5            | 121.5 |
| 19        | 3 | 16-QAM     | $\frac{1}{2}$ | 4     | 624   | 1296  | 312   | 648   | 78              | 162   |
| 20        | 3 | 16-QAM     | $\frac{3}{4}$ | 4     | 624   | 1296  | 468   | 972   | 117             | 243   |
| 21        | 3 | 64-QAM     | $\frac{2}{3}$ | 6     | 936   | 1944  | 624   | 1296  | 156             | 324   |
| 22        | 3 | 64-QAM     | $\frac{3}{4}$ | 6     | 936   | 1944  | 702   | 1458  | 175.5           | 364.5 |
| 23        | 3 | 64-QAM     | $\frac{5}{6}$ | 6     | 936   | 1944  | 780   | 1620  | 195             | 405.5 |

| Symbol | Explanation                             |
|--------|-----------------------------------------|
| NSS    | Number of spatial streams               |
| R      | Code rate                               |
| NBPSC  | Number of coded bits per single carrier |
| NCBPS  | Number of coded bits per symbol         |
| NDBPS  | Number of data bits per symbol          |
| GI     | guard interval                          |

### 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

#### For 2.4GHz Band

| Ant. | Brand             | Model Name    | Antenna Type    | Connector    | Gain (dBi) | Remark       |
|------|-------------------|---------------|-----------------|--------------|------------|--------------|
| A-1  | Colubris Networks | XS7-RU        | Dipole Antenna  | Reversed-SMA | 4.09       | TX / RX Ant. |
| A-2  | Colubris Networks | XS7-RU        | Dipole Antenna  | Reversed-SMA | 4.09       | TX / RX Ant. |
| A-3  | Colubris Networks | XS7-RU        | Dipole Antenna  | Reversed-SMA | 4.09       | TX / RX Ant. |
| B-1  | LCU               | F1B-294405-32 | Dipole Antenna  | Reversed-SMA | 1.82       | TX / RX Ant. |
| B-2  | LCU               | F1B-294405-32 | Dipole Antenna  | Reversed-SMA | 1.82       | TX / RX Ant. |
| B-3  | LCU               | F1B-294405-32 | Dipole Antenna  | Reversed-SMA | 1.82       | TX / RX Ant. |
| C-1  | Centurion         | WTS2450-RPSMA | Dipole Antenna  | Reversed-SMA | 2.1        | TX / RX Ant. |
| C-2  | Centurion         | WTS2450-RPSMA | Dipole Antenna  | Reversed-SMA | 2.1        | TX / RX Ant. |
| C-3  | Centurion         | WTS2450-RPSMA | Dipole Antenna  | Reversed-SMA | 2.1        | TX / RX Ant. |
| D-1  | Centurion         | NanoBlade     | Emdeded Antenna | Reversed-SMA | 3.8        | TX / RX Ant. |
| D-2  | Centurion         | NanoBlade     | Emdeded Antenna | Reversed-SMA | 3.8        | TX / RX Ant. |
| D-3  | Centurion         | NanoBlade     | Emdeded Antenna | Reversed-SMA | 3.8        | TX / RX Ant. |

Note:

The EUT has 12 antennas.

Due to Ant. A ~ Ant. C is the same type antenna, only the higher gain antenna "Ant. A" was tested.

Both Ant. A and Ant. D were tested and recorded in the report.

#### For 5GHz Band

| Ant. | Brand             | Model Name    | Antenna Type    | Connector    | Gain (dBi) | Remark       |
|------|-------------------|---------------|-----------------|--------------|------------|--------------|
| A-1  | Colubris Networks | XS7-RU        | Dipole Antenna  | Reversed-SMA | 1.23       | TX / RX Ant. |
| A-2  | Colubris Networks | XS7-RU        | Dipole Antenna  | Reversed-SMA | 1.23       | TX / RX Ant. |
| A-3  | Colubris Networks | XS7-RU        | Dipole Antenna  | Reversed-SMA | 1.23       | TX / RX Ant. |
| B-1  | LCU               | F1B-294405-32 | Dipole Antenna  | Reversed-SMA | 4.28       | TX / RX Ant. |
| B-2  | LCU               | F1B-294405-32 | Dipole Antenna  | Reversed-SMA | 4.28       | TX / RX Ant. |
| B-3  | LCU               | F1B-294405-32 | Dipole Antenna  | Reversed-SMA | 4.28       | TX / RX Ant. |
| C-1  | Centurion         | WTS2450-RPSMA | Dipole Antenna  | Reversed-SMA | 3.4        | TX / RX Ant. |
| C-2  | Centurion         | WTS2450-RPSMA | Dipole Antenna  | Reversed-SMA | 3.4        | TX / RX Ant. |
| C-3  | Centurion         | WTS2450-RPSMA | Dipole Antenna  | Reversed-SMA | 3.4        | TX / RX Ant. |
| D-1  | Centurion         | NanoBlade     | Emdeded Antenna | Reversed-SMA | 5.1        | TX / RX Ant. |
| D-2  | Centurion         | NanoBlade     | Emdeded Antenna | Reversed-SMA | 5.1        | TX / RX Ant. |
| D-3  | Centurion         | NanoBlade     | Emdeded Antenna | Reversed-SMA | 5.1        | TX / RX Ant. |

Note:

The EUT has 12 antennas.


Due to Ant. A ~ Ant. C is the same type antenna, only the higher gain antenna “Ant. B” was tested.

Both Ant. B and Ant. D were tested and recorded in the report.

Port 1: Ant. A-1 (2.4GHz) / Ant. B-1 (5GHz) / Ant. D-1

Port 2: Ant. A-2 (2.4GHz) / Ant. B-2 (5GHz) / Ant. D-2

Port 3: Ant. A-3 (2.4GHz) / Ant. B-3 (5GHz) / Ant. D-3

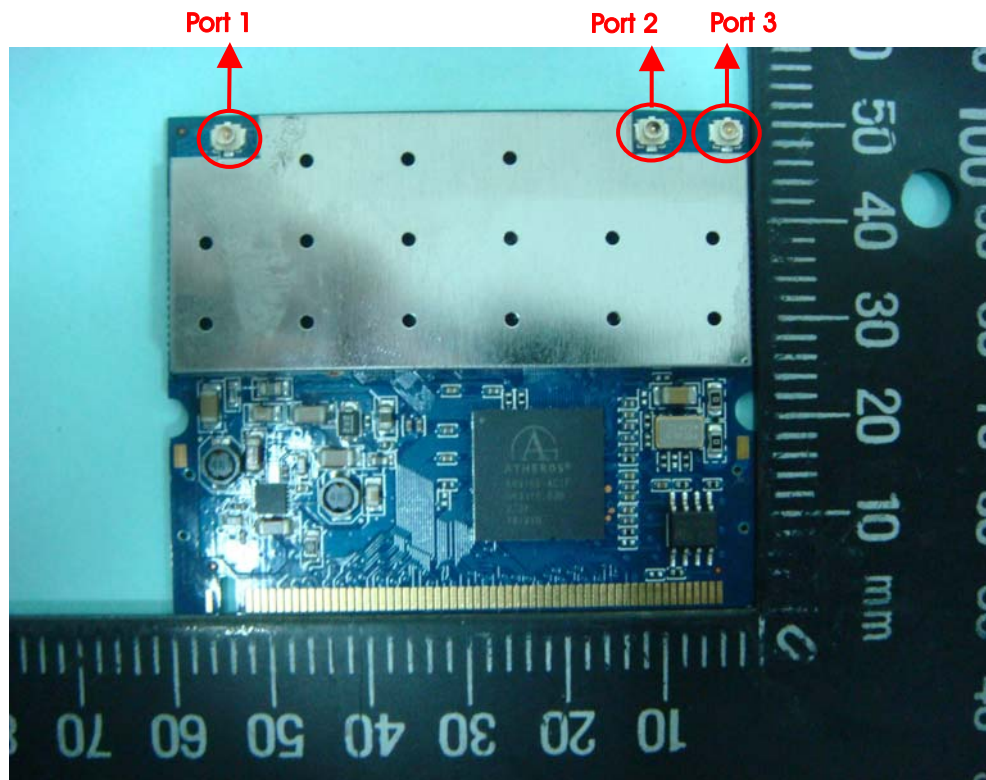

### 3.4. Table for Carrier Frequencies

There are two bandwidth systems for draft n.

**For 2.4GHz Band**

**Frequency Allocation for 802.11b/g**

For 20MHz bandwidth syetems, use Channel 1~Channel 13.

For 40MHz bandwidth syetems, use Channel 3~Channel 11.

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|----------------|-------------|-----------|-------------|-----------|
| 2400~2483.5MHz | 1           | 2412 MHz  | 7           | 2442 MHz  |
|                | 2           | 2417 MHz  | 8           | 2447 MHz  |
|                | 3           | 2422 MHz  | 9           | 2452 MHz  |
|                | 4           | 2427 MHz  | 10          | 2457 MHz  |
|                | 5           | 2432 MHz  | 11          | 2462 MHz  |
|                | 6           | 2437 MHz  |             |           |

### For 5GHz Band

#### Frequency Allocation for 802.11a

For 20MHz bandwidth systems, use Channel 149, 157, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|----------------|-------------|-----------|-------------|-----------|
| 5725~5850 MHz  | 149         | 5745 MHz  | 161         | 5805 MHz  |
|                | 151         | 5755 MHz  | 165         | 5825 MHz  |
|                | 153         | 5765 MHz  |             |           |
|                | 157         | 5785 MHz  |             |           |
|                | 159         | 5795 MHz  |             |           |

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

#### For 2.4GHz Band

| Test Items                                        | Mode        | Data Rate | Channel | Antenna                                                     |
|---------------------------------------------------|-------------|-----------|---------|-------------------------------------------------------------|
| AC Power Line Conducted Emissions                 | Normal Link | Auto      | -       | -                                                           |
| Maximum Peak Conducted Output Power               | MCS16/20MHz | 13 Mbps   | 1/6/11  | A-1/A-2/A-3/<br>A-1+A-2+A-3/<br>D-1/D-2/D-3/<br>D-1+D-2+D-3 |
|                                                   | MCS16/40MHz | 27 Mbps   | 3/6/9   | A-1/A-2/A-3/<br>A-1+A-2+A-3/<br>D-1/D-2/D-3/<br>D-1+D-2+D-3 |
| Power Spectral Density<br>6dB Spectrum Bandwidth  | MCS16/20MHz | 13 Mbps   | 1/6/11  | A-1+A-2+A-3/<br>D-1+D-2+D-3                                 |
|                                                   | MCS16/40MHz | 27 Mbps   | 3/6/9   | A-1+A-2+A-3/<br>D-1+D-2+D-3                                 |
| Radiated Emissions 9kHz~1GHz                      | Normal Link | Auto      | -       | -                                                           |
| Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic | MCS16/20MHz | 13 Mbps   | 1/6/11  | A/D                                                         |
|                                                   | MCS16/40MHz | 27 Mbps   | 3/6/9   | A/D                                                         |
| Band Edge Emissions                               | MCS16/20MHz | 13 Mbps   | 1/11    | A/D                                                         |
|                                                   | MCS16/40MHz | 27 Mbps   | 3/9     | A/D                                                         |

### For 5GHz Band

| Test Items                                           | Mode        | Data Rate | Channel     | Antenna                                                     |
|------------------------------------------------------|-------------|-----------|-------------|-------------------------------------------------------------|
| AC Power Line Conducted Emissions                    | Normal Link | Auto      | -           | -                                                           |
| Maximum Peak Conducted Output Power                  | MCS16/20MHz | 13 Mbps   | 149/157/165 | B-1/B-2/B-3/<br>B-1+B-2+B-3/<br>D-1/D-2/D-3/<br>D-1+D-2+D-3 |
|                                                      | MCS16/40MHz | 27 Mbps   | 151/159     | B-1/B-2/B-3/<br>B-1+B-2+B-3/<br>D-1/D-2/D-3/<br>D-1+D-2+D-3 |
| Power Spectral Density<br>6dB Spectrum Bandwidth     | MCS16/20MHz | 13 Mbps   | 149/157/165 | B-1+B-2+B-3/<br>D-1+D-2+D-3                                 |
|                                                      | MCS16/40MHz | 27 Mbps   | 151/159     | B-1+B-2+B-3/<br>D-1+D-2+D-3                                 |
| Radiated Emissions 9kHz~1GHz                         | Normal Link | Auto      | -           | -                                                           |
| Radiated Emissions 1GHz~10 <sup>th</sup><br>Harmonic | MCS16/20MHz | 13 Mbps   | 149/157/165 | B/D                                                         |
|                                                      | MCS16/40MHz | 27 Mbps   | 151/159     | B/D                                                         |
| Band Edge Emissions                                  | MCS16/20MHz | 13 Mbps   | 149/165     | B/D                                                         |
|                                                      | MCS16/40MHz | 27 Mbps   | 151/159     | B/D                                                         |

### 3.6. Table for Testing Locations

| Test Site No. | Site Category | Location | FCC Reg. No. | IC File No. | VCCI Reg. No |
|---------------|---------------|----------|--------------|-------------|--------------|
| 03CH03-HY     | SAC           | Hwa Ya   | 101377       | IC 4088     | -            |
| CO04-HY       | Conduction    | Hwa Ya   | 101377       | IC 4088     | -            |
| TH01-HY       | OVEN Room     | Hwa Ya   | -            | -           | -            |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

| Support Unit | Brand  | Model      | FCC ID     |
|--------------|--------|------------|------------|
| Notebook     | DELL   | D400       | E2K24GBRL  |
| Modem        | ACEEX  | DM1414     | IFAXDM1414 |
| Mouse        | QSKY   | Lx-619B    | DoC        |
| Printer      | EPSON  | LQ-300+    | DOC        |
| AP           | PLANEX | GW-AP54SGX | DOC        |

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### For 2.4GHz Band

##### Power Parameters of Draft n MCS16 20MHz Ant. A

| Test Software Version | ART      |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 2412 MHz | 2437 MHz | 2462 MHz |
| Draft n               | 12.5     | 15.5     | 11.5     |

##### Power Parameters of Draft n MCS16 40MHz Ant. A

| Test Software Version | ART      |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 2422 MHz | 2437 MHz | 2452 MHz |
| Draft n               | 9.5      | 13       | 9        |

##### Power Parameters of Draft n MCS16 20MHz Ant. D

| Test Software Version | ART      |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 2412 MHz | 2437 MHz | 2462 MHz |
| Draft n               | 13.5     | 15.5     | 12       |

##### Power Parameters of Draft n MCS16 40MHz Ant. D

| Test Software Version | ART      |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 2422 MHz | 2437 MHz | 2452 MHz |
| Draft n               | 10.5     | 14.5     | 9        |

#### For 5GHz Band

##### Power Parameters of Draft n MCS16 20MHz Ant. B

| Test Software Version | ART      |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 5745 MHz | 5785 MHz | 5825 MHz |
| Draft n               | 20       | 20       | 20       |

##### Power Parameters of Draft n MCS16 40MHz Ant. B

| Test Software Version | ART      |          |
|-----------------------|----------|----------|
| Frequency             | 5755 MHz | 5795 MHz |
| Draft n               | 20       | 20       |

##### Power Parameters of Draft n MCS16 20MHz Ant. D

| Test Software Version | ART      |          |          |
|-----------------------|----------|----------|----------|
| Frequency             | 5745 MHz | 5785 MHz | 5825 MHz |
| Draft n               | 21.5     | 21.5     | 21.5     |

**Power Parameters of Draft n MCS16 40MHz Ant. D**

| Test Software Version | ART      |          |
|-----------------------|----------|----------|
| Frequency             | 5755 MHz | 5795 MHz |
| Draft n               | 21       | 21.5     |

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows:

- Turn on the power of all equipment.
- The NB sends " H " messages to the panel, and the panel displays " H " patterns on the screen.
- The NB sends " H " messages to the printer, then the printer prints them on the paper.
- The NB sends " H " messages to the modem.
- Repeat the steps from b to d.

At the same time, the following programs were executed:


Executed "ping.exe" to link with the remote workstation to receive and transmit signal by LAN and WLAN.

### 3.9. Test Configurations

#### 3.9.1. Radiation Emissions Test Configuration


Test Configuration: 9KHz~1GHz

Ant. A / Ant. B / Ant. D

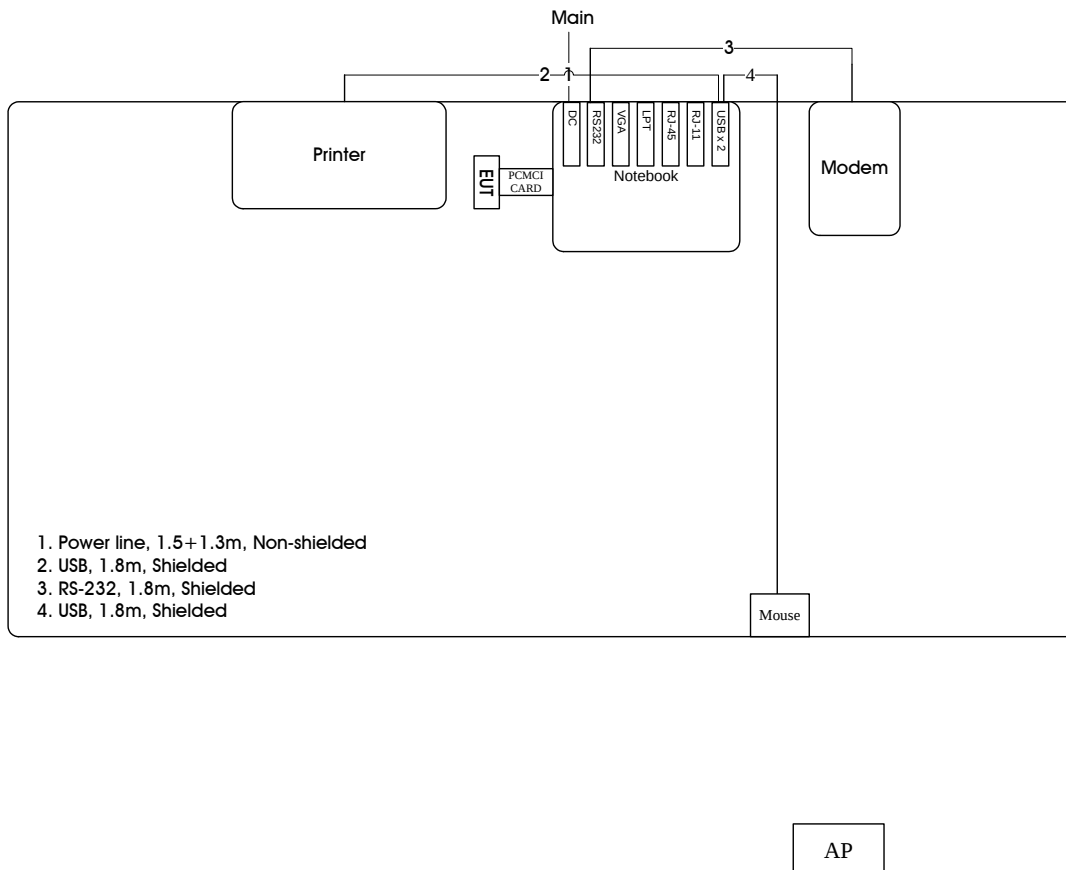


Test Configuration: above 1GHz

Ant. A / Ant. B / Ant. D

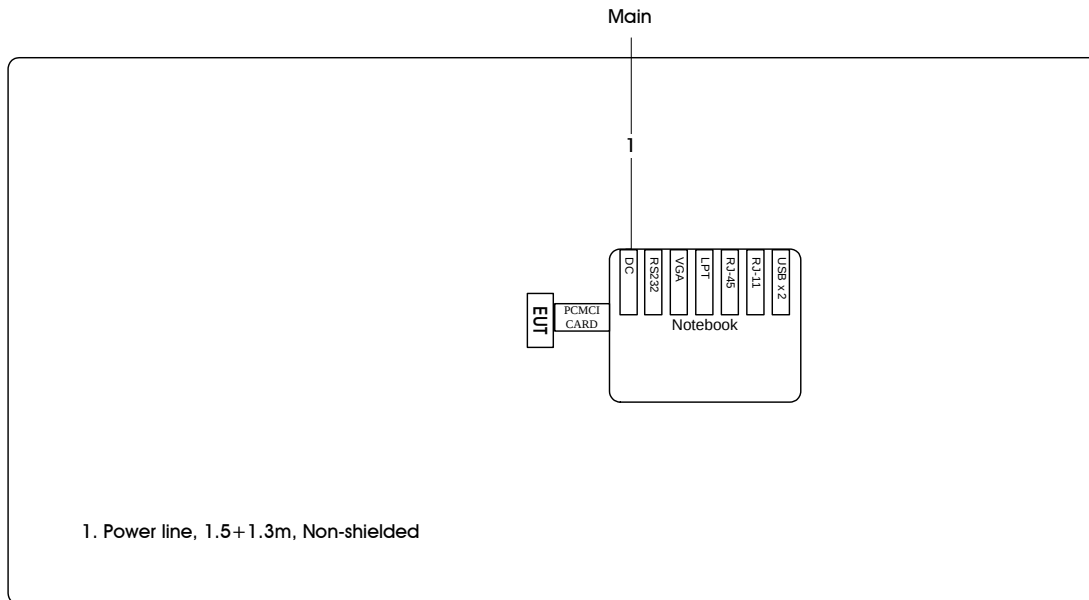

### 3.9.2. AC Power Line Conduction Emissions Test Configuration

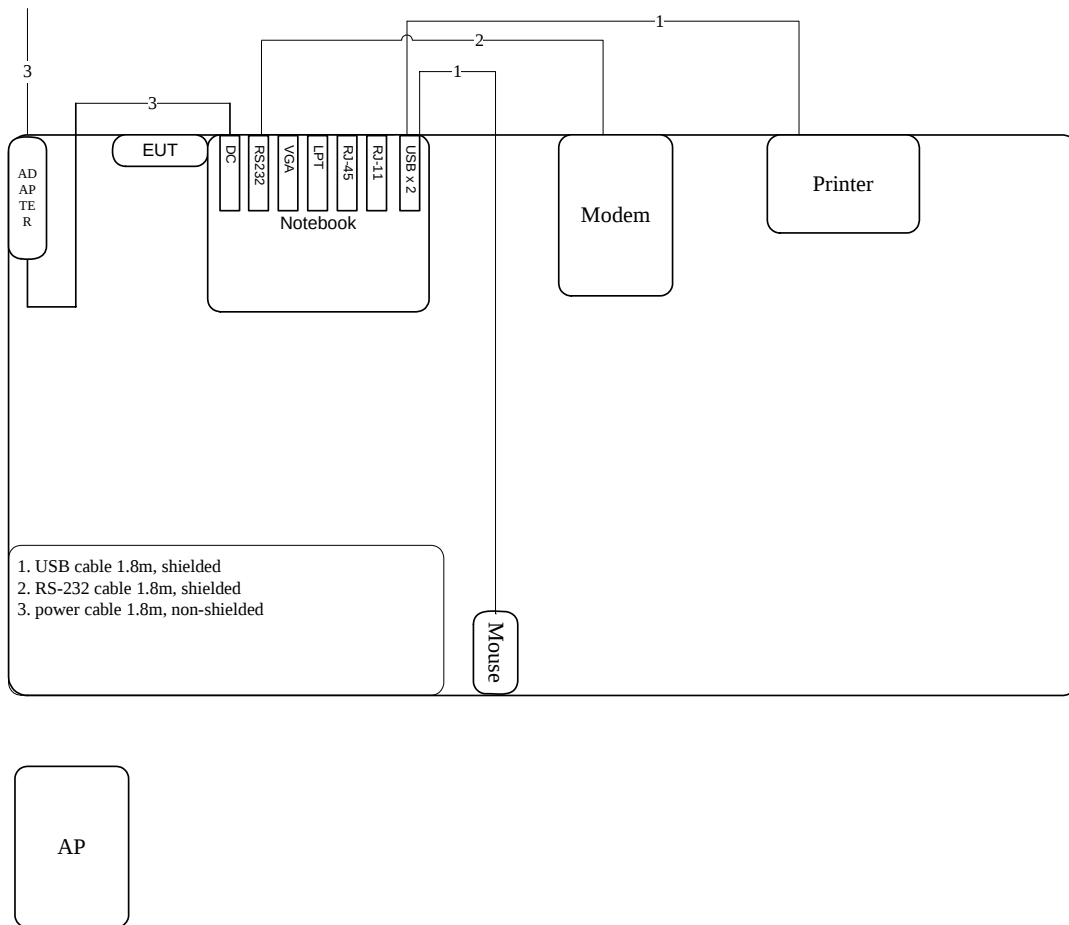

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5        | 66~56           | 56~46           |
| 0.5~5           | 56              | 46              |
| 5~30            | 60              | 50              |

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.


| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 KHz    |

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.



#### 4.1.4. Test Setup Layout

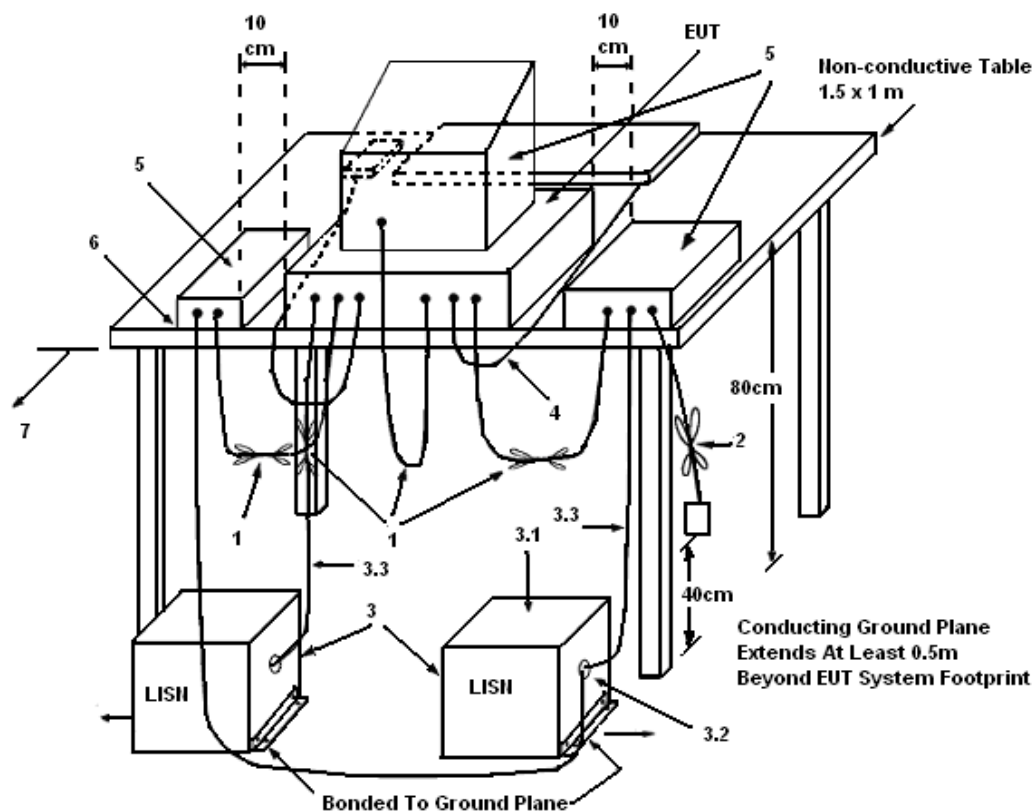

**LEGEND:**

(1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

(2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

(3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50\ \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.

(3.1) All other equipment powered from additional LISN(s).

(3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.

(3.3) LISN at least 80 cm from nearest part of EUT chassis.

(4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.

(5) Non-EUT components of EUT system being tested.

(6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.

(7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

|               |             |          |      |
|---------------|-------------|----------|------|
| Temperature   | 20°C        | Humidity | 61%  |
| Test Engineer | Andy Tsai   | Phase    | Line |
| Configuration | Normal Link |          |      |

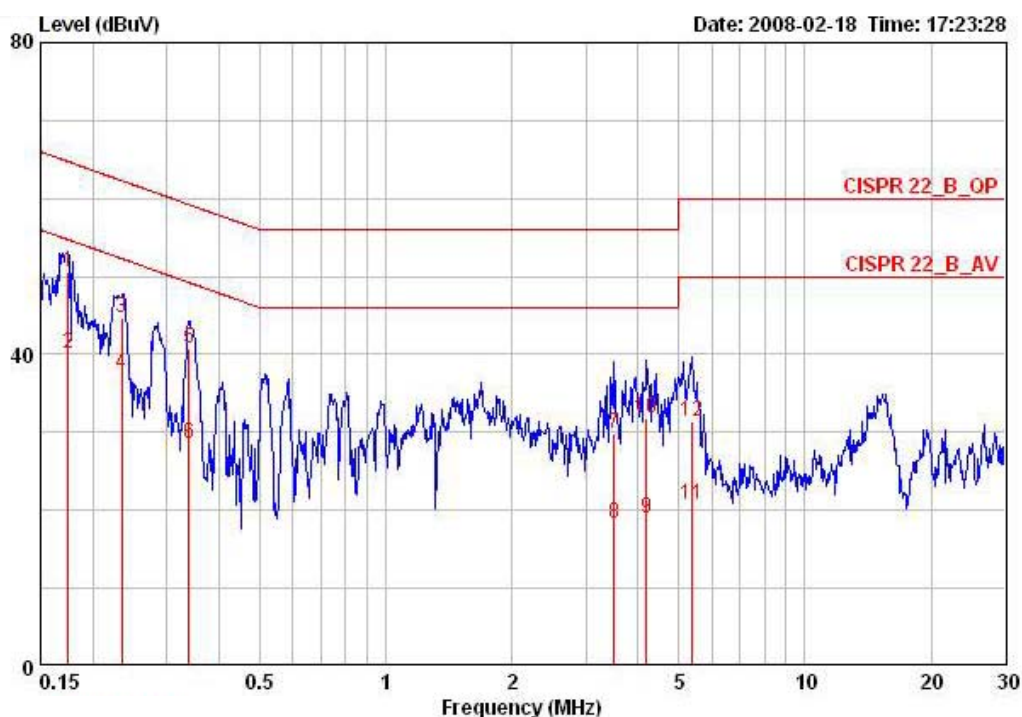

|    | Freq    | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  | Pol/Phase |
|----|---------|-------|------------|------------|------------|-------------|------------|---------|-----------|
|    | MHz     | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |           |
| 1  | 0.17491 | 50.53 | -14.19     | 64.72      | 50.18      | 0.15        | 0.20       | QP      | LINE      |
| 2  | 0.17491 | 40.11 | -14.61     | 54.72      | 39.76      | 0.15        | 0.20       | AVERAGE | LINE      |
| 3  | 0.23409 | 44.71 | -17.59     | 62.30      | 44.41      | 0.10        | 0.20       | QP      | LINE      |
| 4  | 0.23409 | 37.49 | -14.81     | 52.30      | 37.19      | 0.10        | 0.20       | AVERAGE | LINE      |
| 5  | 0.33920 | 40.71 | -18.51     | 59.22      | 40.41      | 0.10        | 0.20       | QP      | LINE      |
| 6  | 0.33920 | 28.64 | -20.58     | 49.22      | 28.34      | 0.10        | 0.20       | AVERAGE | LINE      |
| 7  | 3.509   | 29.77 | -26.23     | 56.00      | 29.47      | 0.00        | 0.30       | QP      | LINE      |
| 8  | 3.509   | 18.21 | -27.79     | 46.00      | 17.91      | 0.00        | 0.30       | AVERAGE | LINE      |
| 9  | 4.180   | 18.93 | -27.07     | 46.00      | 18.63      | 0.00        | 0.30       | AVERAGE | LINE      |
| 10 | 4.180   | 31.72 | -24.28     | 56.00      | 31.42      | 0.00        | 0.30       | QP      | LINE      |
| 11 | 5.390   | 20.71 | -29.29     | 50.00      | 20.39      | 0.02        | 0.30       | AVERAGE | LINE      |
| 12 | 5.390   | 31.43 | -28.57     | 60.00      | 31.11      | 0.02        | 0.30       | QP      | LINE      |

|               |             |          |         |
|---------------|-------------|----------|---------|
| Temperature   | 20°C        | Humidity | 61%     |
| Test Engineer | Andy Tsai   | Phase    | Neutral |
| Configuration | Normal Link |          |         |

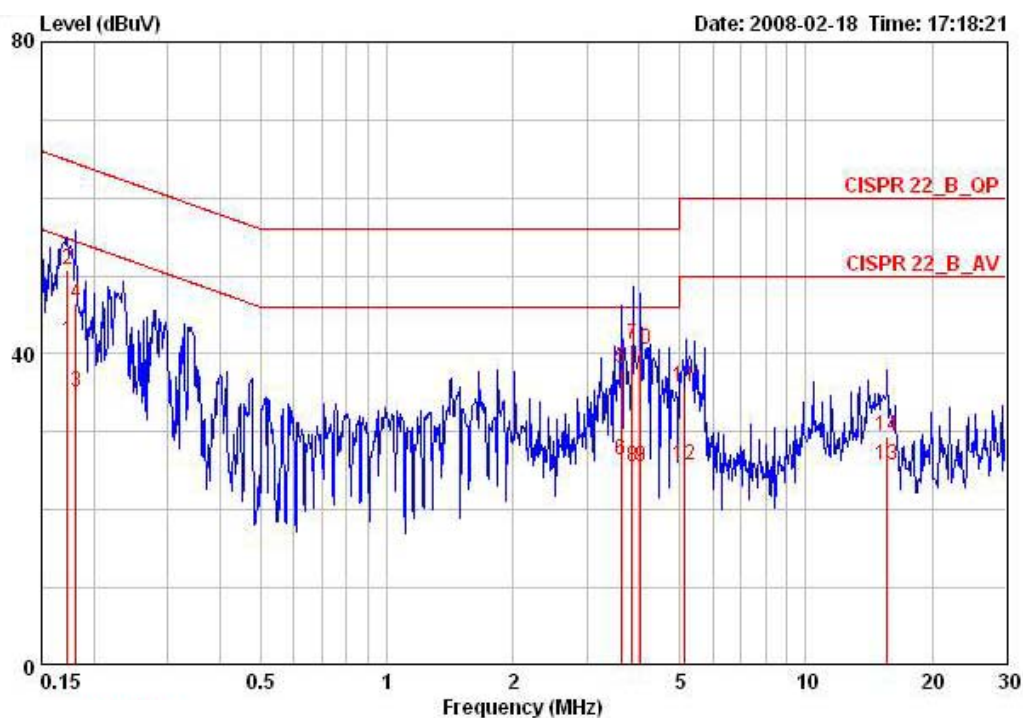

|    | Freq    | Level | Over   | Limit | Read  | LISN   | Cable |         |           |
|----|---------|-------|--------|-------|-------|--------|-------|---------|-----------|
|    | MHz     | dBuV  | Limit  | Line  | Level | Factor | Loss  | Remark  | Pol/Phase |
|    |         |       | dB     | dBuV  | dBuV  | dB     | dB    |         |           |
| 1  | 0.17307 | 41.65 | -13.16 | 54.81 | 41.20 | 0.25   | 0.20  | AVERAGE | NEUTRAL   |
| 2  | 0.17307 | 50.83 | -13.98 | 64.81 | 50.38 | 0.25   | 0.20  | QP      | NEUTRAL   |
| 3  | 0.18152 | 35.08 | -19.34 | 54.42 | 34.63 | 0.25   | 0.20  | AVERAGE | NEUTRAL   |
| 4  | 0.18152 | 46.39 | -18.03 | 64.42 | 45.94 | 0.25   | 0.20  | QP      | NEUTRAL   |
| 5  | 3.615   | 38.23 | -17.77 | 56.00 | 37.83 | 0.10   | 0.30  | QP      | NEUTRAL   |
| 6  | 3.615   | 26.47 | -19.53 | 46.00 | 26.07 | 0.10   | 0.30  | AVERAGE | NEUTRAL   |
| 7  | 3.854   | 41.18 | -14.82 | 56.00 | 40.78 | 0.10   | 0.30  | QP      | NEUTRAL   |
| 8  | 3.854   | 25.51 | -20.49 | 46.00 | 25.11 | 0.10   | 0.30  | AVERAGE | NEUTRAL   |
| 9  | 4.027   | 25.40 | -20.60 | 46.00 | 25.00 | 0.10   | 0.30  | AVERAGE | NEUTRAL   |
| 10 | 4.027   | 40.51 | -15.49 | 56.00 | 40.11 | 0.10   | 0.30  | QP      | NEUTRAL   |
| 11 | 5.153   | 35.68 | -24.32 | 60.00 | 35.28 | 0.10   | 0.30  | QP      | NEUTRAL   |
| 12 | 5.153   | 25.79 | -24.21 | 50.00 | 25.39 | 0.10   | 0.30  | AVERAGE | NEUTRAL   |
| 13 | 15.639  | 25.69 | -24.31 | 50.00 | 25.19 | 0.10   | 0.40  | AVERAGE | NEUTRAL   |
| 14 | 15.639  | 29.51 | -30.49 | 60.00 | 29.01 | 0.10   | 0.40  | QP      | NEUTRAL   |

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Peak Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting                                                      |
|--------------------|--------------------------------------------------------------|
| Attenuation        | Auto                                                         |
| Span Frequency     | Encompass the entire emissions bandwidth (EBW) of the signal |
| RB                 | 1000 kHz                                                     |
| VB                 | 3000 kHz                                                     |
| Detector           | Sample                                                       |
| Trace              | Average 100 traces.                                          |
| Sweep Time         | 20ms                                                         |

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

### 4.2.4. Test Setup Layout

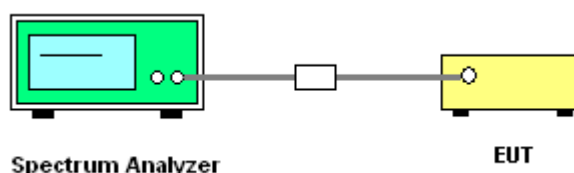

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Peak Output Power

|               |          |                |         |
|---------------|----------|----------------|---------|
| Temperature   | 23°C     | Humidity       | 61%     |
| Test Engineer | Sam Chen | Configurations | Draft n |

##### For 2.4GHz Band

##### Configuration Draft n MCS16 20MHz Ant. A-1

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 1       | 2412 MHz  | 14.70                 | 30.00            | Complies |
| 6       | 2437 MHz  | 17.60                 | 30.00            | Complies |
| 11      | 2462 MHz  | 13.82                 | 30.00            | Complies |

##### Configuration Draft n MCS16 20MHz Ant. A-2

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 1       | 2412 MHz  | 15.15                 | 30.00            | Complies |
| 6       | 2437 MHz  | 18.44                 | 30.00            | Complies |
| 11      | 2462 MHz  | 14.28                 | 30.00            | Complies |

##### Configuration Draft n MCS16 20MHz Ant. A-3

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 1       | 2412 MHz  | 14.58                 | 30.00            | Complies |
| 6       | 2437 MHz  | 17.86                 | 30.00            | Complies |
| 11      | 2462 MHz  | 13.17                 | 30.00            | Complies |

##### Configuration Draft n MCS16 20MHz Ant. A-1 + Ant. A-2 + Ant. A-3

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 1       | 2412 MHz  | 19.59                 | 30.00            | Complies |
| 6       | 2437 MHz  | 22.75                 | 30.00            | Complies |
| 11      | 2462 MHz  | 18.55                 | 30.00            | Complies |

**Configuration Draft n MCS16 20MHz Ant. D-1**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 1       | 2412 MHz  | 16.09                 | 30.00            | Complies |
| 6       | 2437 MHz  | 17.81                 | 30.00            | Complies |
| 11      | 2462 MHz  | 14.08                 | 30.00            | Complies |

**Configuration Draft n MCS16 20MHz Ant. D-2**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 1       | 2412 MHz  | 15.91                 | 30.00            | Complies |
| 6       | 2437 MHz  | 18.14                 | 30.00            | Complies |
| 11      | 2462 MHz  | 15.13                 | 30.00            | Complies |

**Configuration Draft n MCS16 20MHz Ant. D-3**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 1       | 2412 MHz  | 15.76                 | 30.00            | Complies |
| 6       | 2437 MHz  | 17.53                 | 30.00            | Complies |
| 11      | 2462 MHz  | 14.19                 | 30.00            | Complies |

**Configuration Draft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 1       | 2412 MHz  | 20.69                 | 30.00            | Complies |
| 6       | 2437 MHz  | 22.61                 | 30.00            | Complies |
| 11      | 2462 MHz  | 19.26                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. A-1**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 3       | 2422 MHz  | 11.95                 | 30.00            | Complies |
| 6       | 2437 MHz  | 15.38                 | 30.00            | Complies |
| 9       | 2452 MHz  | 10.77                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. A-2**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 3       | 2422 MHz  | 11.80                 | 30.00            | Complies |
| 6       | 2437 MHz  | 15.68                 | 30.00            | Complies |
| 9       | 2452 MHz  | 11.93                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. A-3**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 3       | 2422 MHz  | 11.91                 | 30.00            | Complies |
| 6       | 2437 MHz  | 14.78                 | 30.00            | Complies |
| 9       | 2452 MHz  | 11.22                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. A-1 + Ant. A-2 + Ant. A-3**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 3       | 2422 MHz  | 16.66                 | 30.00            | Complies |
| 6       | 2437 MHz  | 20.07                 | 30.00            | Complies |
| 9       | 2452 MHz  | 16.10                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. D-1**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 3       | 2422 MHz  | 13.15                 | 30.00            | Complies |
| 6       | 2437 MHz  | 16.54                 | 30.00            | Complies |
| 9       | 2452 MHz  | 11.30                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. D-2**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 3       | 2422 MHz  | 12.84                 | 30.00            | Complies |
| 6       | 2437 MHz  | 17.28                 | 30.00            | Complies |
| 9       | 2452 MHz  | 12.49                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. D-3**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 3       | 2422 MHz  | 12.51                 | 30.00            | Complies |
| 6       | 2437 MHz  | 16.48                 | 30.00            | Complies |
| 9       | 2452 MHz  | 11.60                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 3       | 2422 MHz  | 17.61                 | 30.00            | Complies |
| 6       | 2437 MHz  | 21.55                 | 30.00            | Complies |
| 9       | 2452 MHz  | 16.60                 | 30.00            | Complies |

### For 5GHz Band

#### Configuration Draft n MCS16 20MHz Ant. B-1

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 149     | 5745 MHz  | 23.84                 | 30.00            | Complies |
| 157     | 5785 MHz  | 18.84                 | 30.00            | Complies |
| 165     | 5825 MHz  | 23.16                 | 30.00            | Complies |

#### Configuration Draft n MCS16 20MHz Ant. B-2

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 149     | 5745 MHz  | 23.81                 | 30.00            | Complies |
| 157     | 5785 MHz  | 23.36                 | 30.00            | Complies |
| 165     | 5825 MHz  | 23.14                 | 30.00            | Complies |

#### Configuration Draft n MCS16 20MHz Ant. B-3

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 149     | 5745 MHz  | 18.53                 | 30.00            | Complies |
| 157     | 5785 MHz  | 19.42                 | 30.00            | Complies |
| 165     | 5825 MHz  | 19.72                 | 30.00            | Complies |

#### Configuration Draft n MCS16 20MHz Ant. B-1 + Ant. B-2 + Ant. B-3

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 149     | 5745 MHz  | 27.43                 | 30.00            | Complies |
| 157     | 5785 MHz  | 25.81                 | 30.00            | Complies |
| 165     | 5825 MHz  | 27.05                 | 30.00            | Complies |

**Configuration Draft n MCS16 20MHz Ant. D-1**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 149     | 5745 MHz  | 23.55                 | 30.00            | Complies |
| 157     | 5785 MHz  | 19.54                 | 30.00            | Complies |
| 165     | 5825 MHz  | 23.13                 | 30.00            | Complies |

**Configuration Draft n MCS16 20MHz Ant. D-2**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 149     | 5745 MHz  | 24.07                 | 30.00            | Complies |
| 157     | 5785 MHz  | 23.15                 | 30.00            | Complies |
| 165     | 5825 MHz  | 23.05                 | 30.00            | Complies |

**Configuration Draft n MCS16 20MHz Ant. D-3**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 149     | 5745 MHz  | 19.52                 | 30.00            | Complies |
| 157     | 5785 MHz  | 23.40                 | 30.00            | Complies |
| 165     | 5825 MHz  | 22.91                 | 30.00            | Complies |

**Configuration Draft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 149     | 5745 MHz  | 27.57                 | 30.00            | Complies |
| 157     | 5785 MHz  | 27.12                 | 30.00            | Complies |
| 165     | 5825 MHz  | 27.80                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. B-1**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 151     | 5755 MHz  | 17.59                 | 30.00            | Complies |
| 159     | 5795 MHz  | 18.20                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. B-2**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 151     | 5755 MHz  | 18.08                 | 30.00            | Complies |
| 159     | 5795 MHz  | 18.93                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. B-3**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 151     | 5755 MHz  | 18.38                 | 30.00            | Complies |
| 159     | 5795 MHz  | 18.56                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. B-1 + Ant. B-2 + Ant. B-3**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 151     | 5755 MHz  | 22.80                 | 30.00            | Complies |
| 159     | 5795 MHz  | 23.34                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. D-1**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 151     | 5755 MHz  | 18.94                 | 30.00            | Complies |
| 159     | 5795 MHz  | 22.58                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. D-2**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 151     | 5755 MHz  | 23.22                 | 30.00            | Complies |
| 159     | 5795 MHz  | 22.90                 | 30.00            | Complies |


**Configuration Draft n MCS16 40MHz Ant. D-3**

| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 151     | 5755 MHz  | 23.10                 | 30.00            | Complies |
| 159     | 5795 MHz  | 22.85                 | 30.00            | Complies |

**Configuration Draft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3**


| Channel | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
| 151     | 5755 MHz  | 26.92                 | 30.00            | Complies |
| 159     | 5795 MHz  | 27.55                 | 30.00            | Complies |

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. A-1 / 2412 MHz

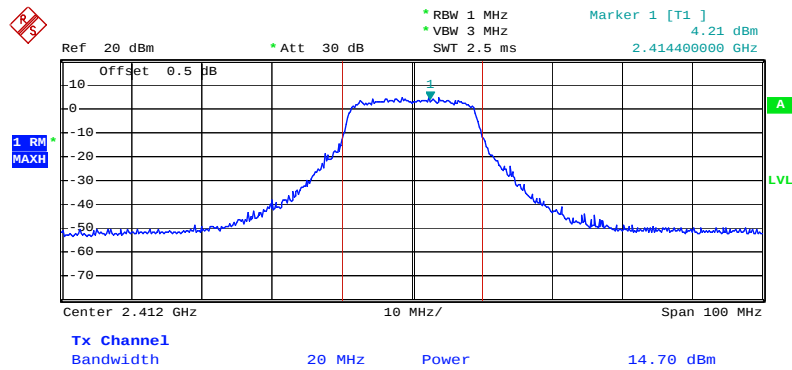


Date: 14.FEB.2008 03:37:21

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. A-1 / 2437 MHz

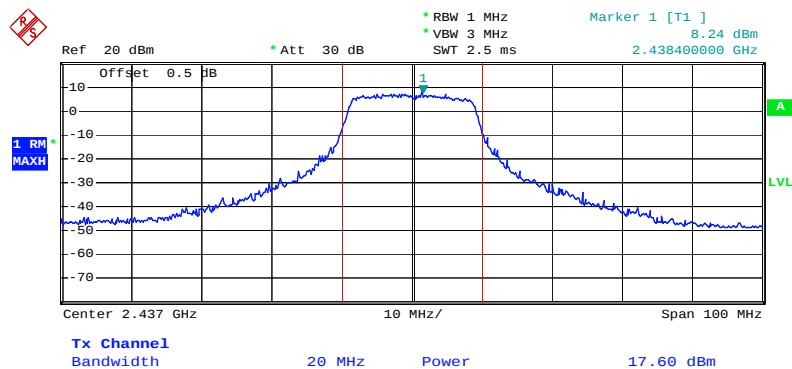


Date: 14.FEB.2008 03:41:03

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. A-1 / 2462 MHz

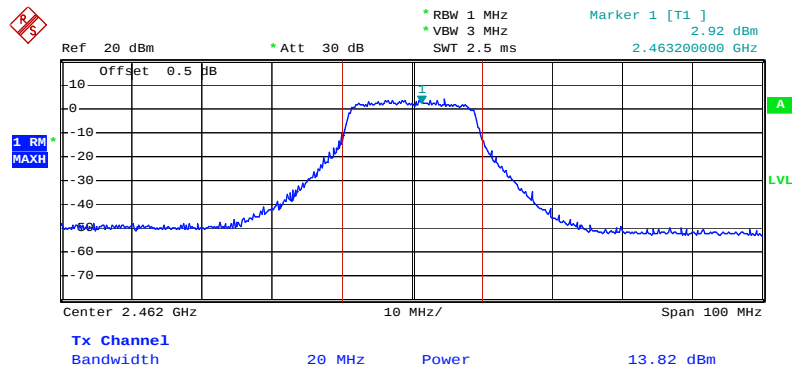


Date: 14.FEB.2008 03:44:17

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. A-2 / 2412 MHz

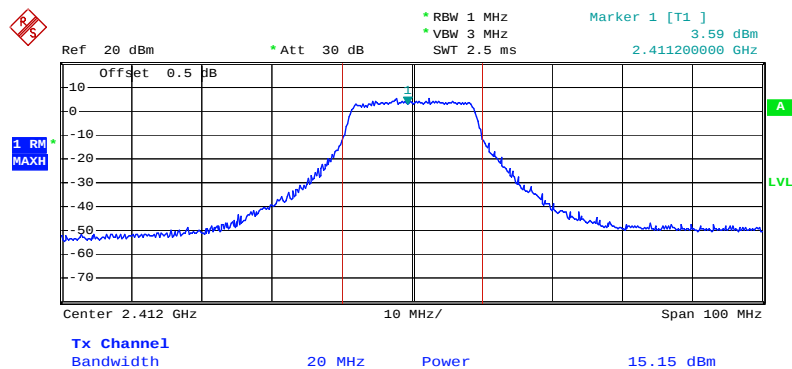


Date: 14.FEB.2008 03:38:39

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. A-2 / 2437 MHz

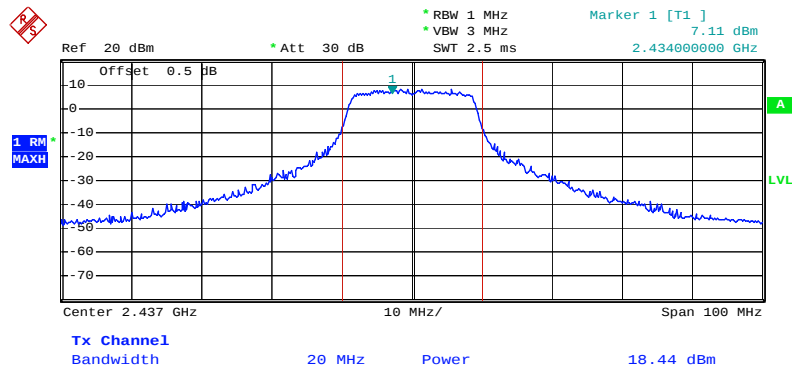


Date: 14.FEB.2008 03:41:44

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. A-2 / 2462 MHz

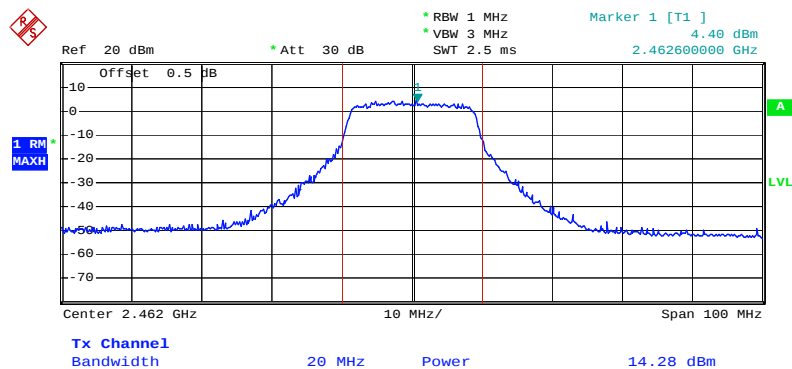


Date: 14.FEB.2008 03:44:48

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. A-3 / 2412 MHz

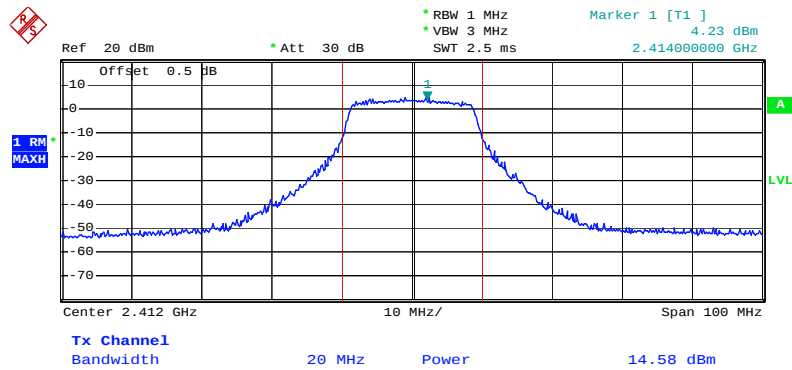


Date: 14.FEB.2008 03:39:49

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. A-3 / 2437 MHz

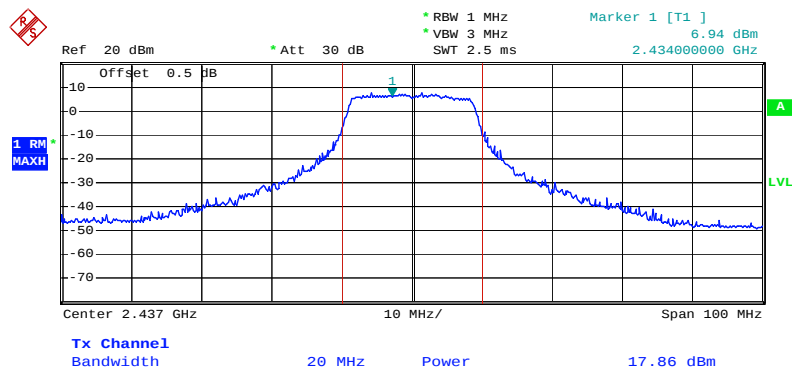


Date: 14.FEB.2008 03:42:42

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. A-3 / 2462 MHz

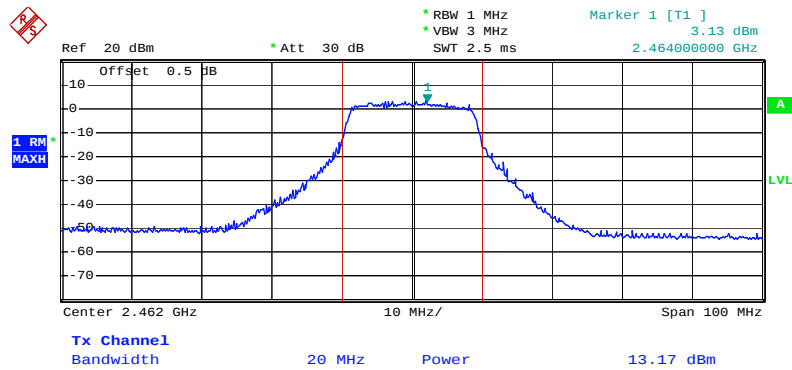


Date: 14.FEB.2008 03:45:23

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. D-1 / 2412 MHz

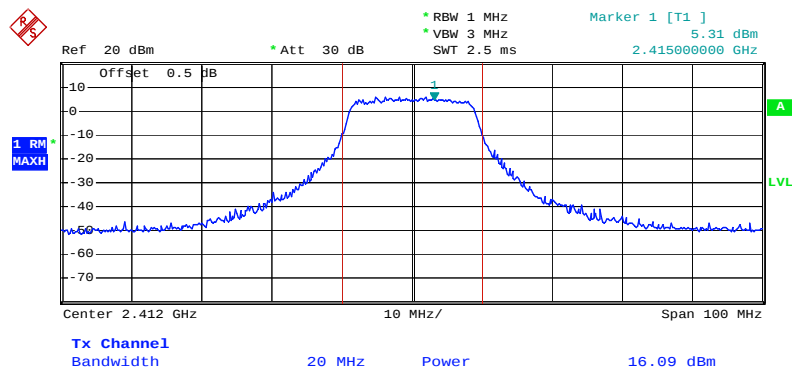


Date: 14.FEB.2008 04:30:27

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. D-1 / 2437 MHz

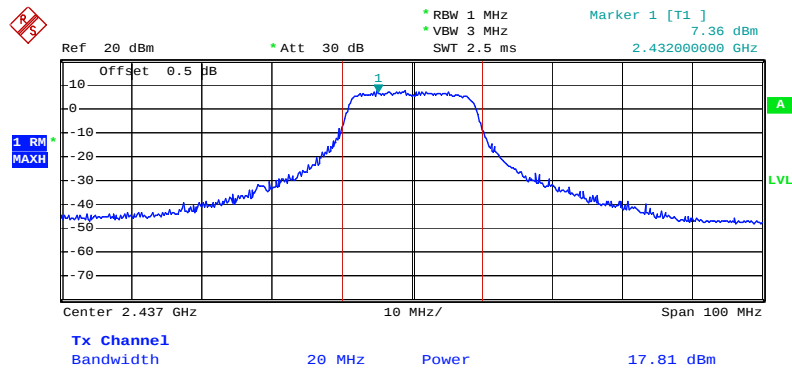


Date: 14.FEB.2008 04:35:17

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. D-1 / 2462 MHz

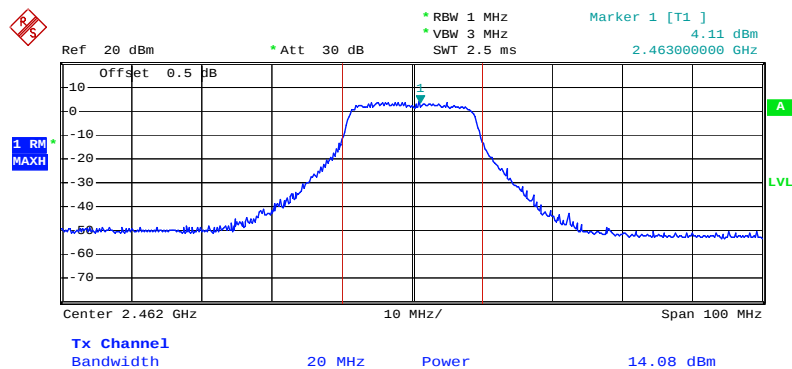


Date: 14.FEB.2008 04:37:21

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. D-2 / 2412 MHz

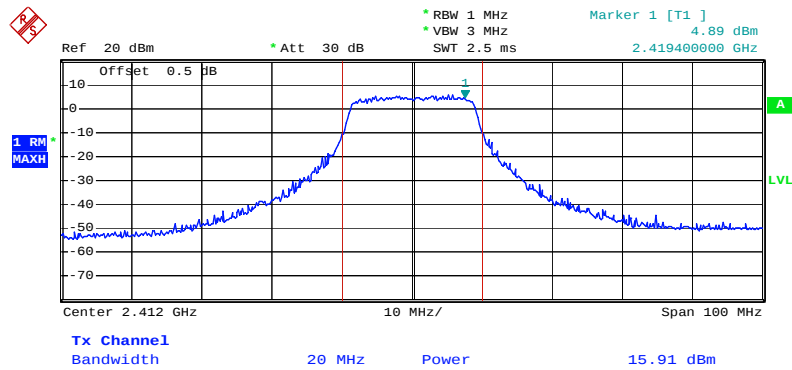


Date: 14.FEB.2008 04:31:08

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. D-2 / 2437 MHz

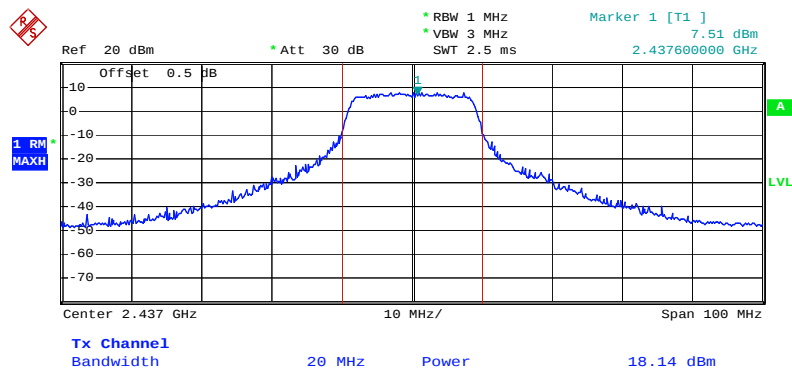


Date: 14.FEB.2008 04:34:19

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. D-2 / 2462 MHz

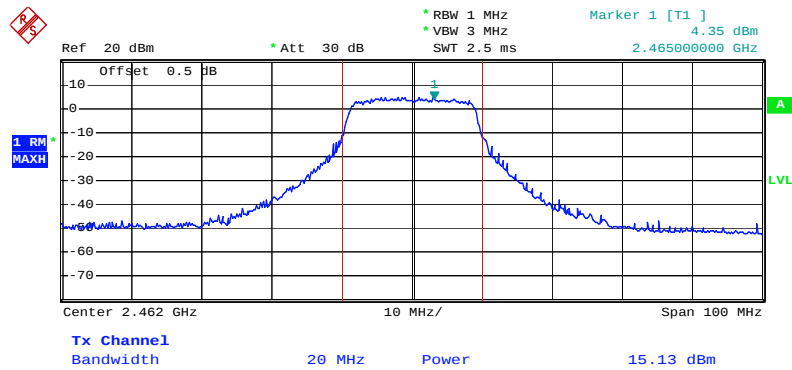


Date: 14.FEB.2008 04:38:26

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. D-3 / 2412 MHz

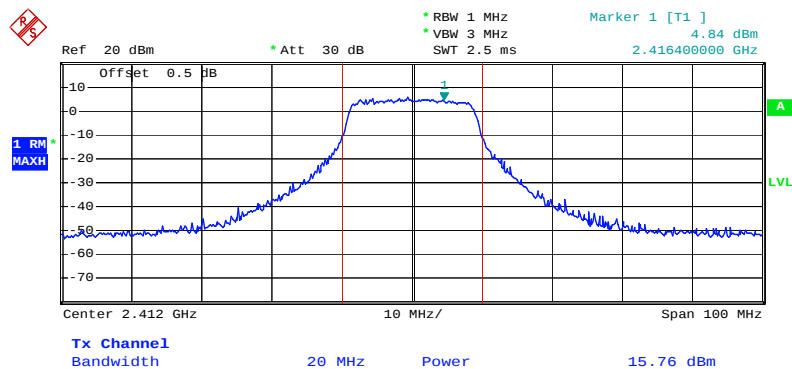


Date: 14.FEB.2008 04:32:04

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. D-3 / 2437 MHz

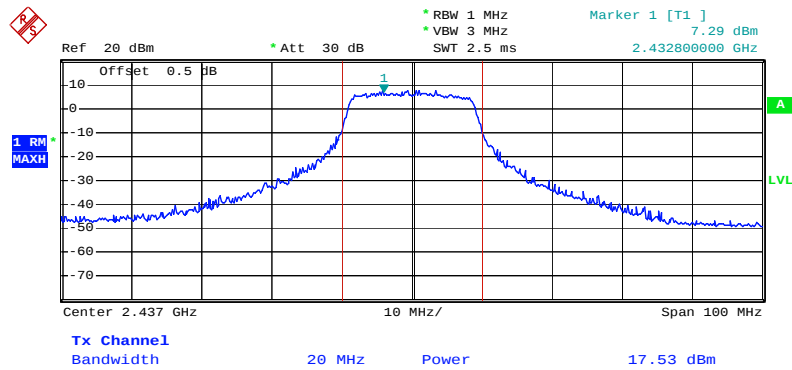


Date: 14.FEB.2008 04:33:47

### Channel Output Power Plot on Configuration Draft n MCS16 20MHz Ant. D-3 / 2462 MHz

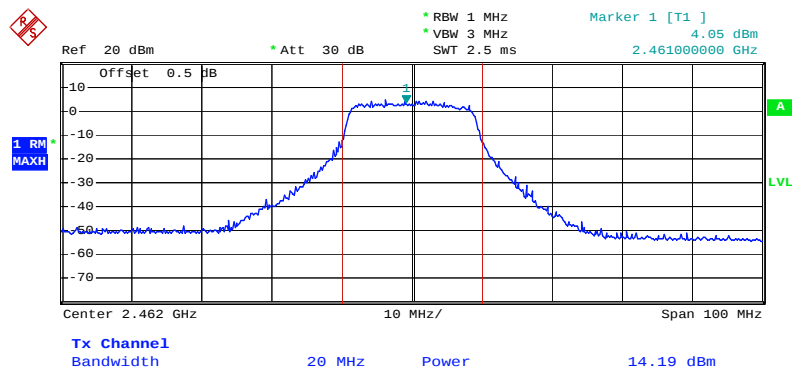


Date: 14.FEB.2008 04:39:13

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. A-1 / 2422 MHz

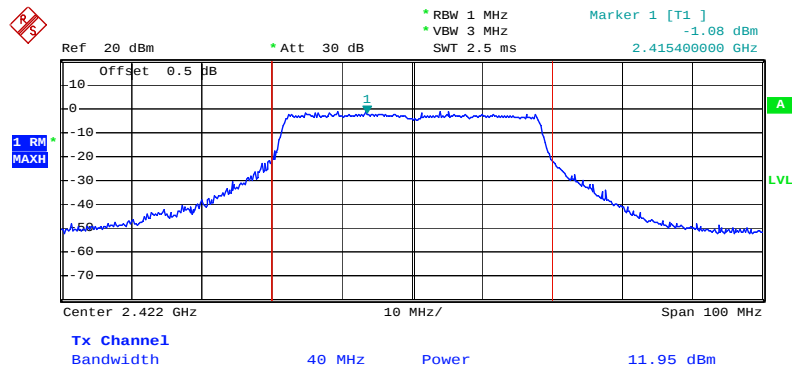


Date: 14.FEB.2008 03:48:43

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. A-1 / 2437 MHz

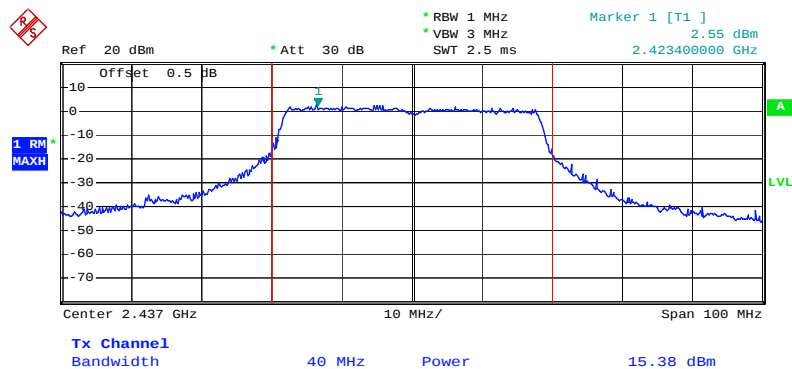


Date: 14.FEB.2008 03:54:15

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. A-1 / 2452 MHz

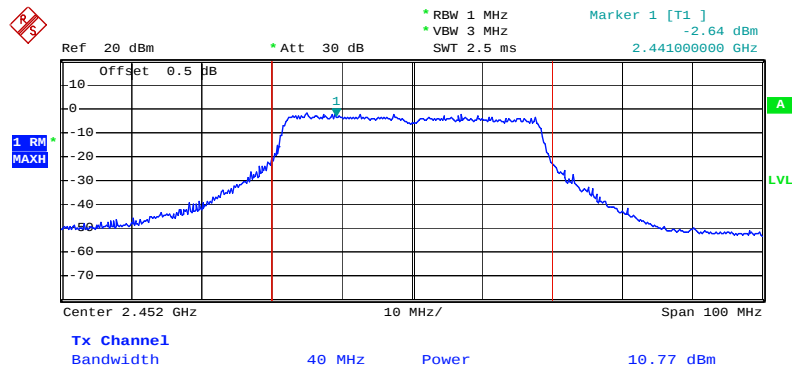


Date: 14.FEB.2008 03:56:51

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. A-2 / 2422 MHz

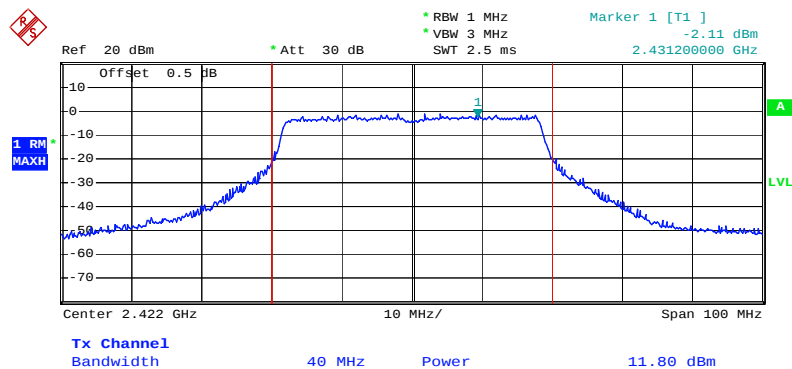


Date: 14.FEB.2008 03:49:39

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. A-2 / 2437 MHz

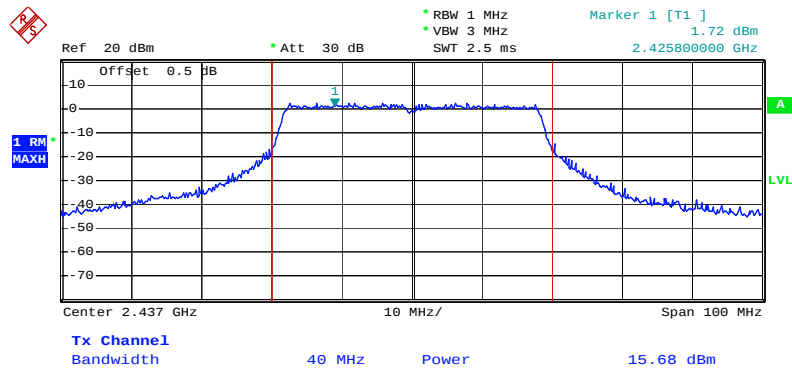


Date: 14.FEB.2008 03:53:06

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. A-2 / 2452 MHz

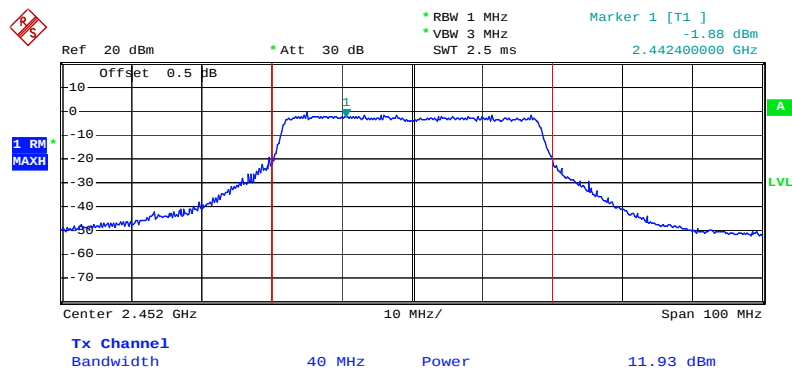


Date: 14.FEB.2008 03:57:24

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. A-3 / 2422 MHz

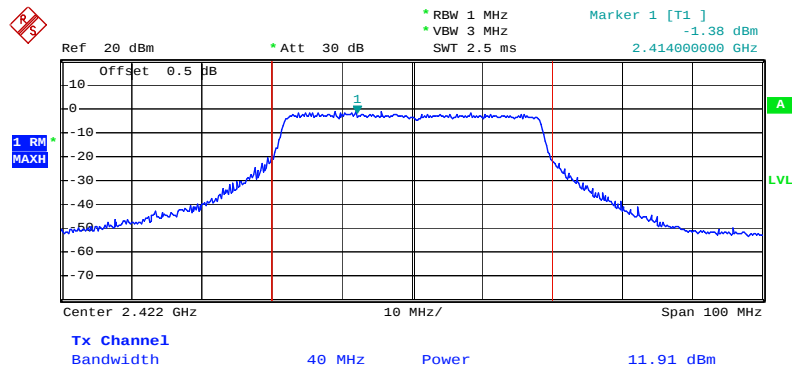


Date: 14.FEB.2008 03:50:11

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. A-3 / 2437 MHz

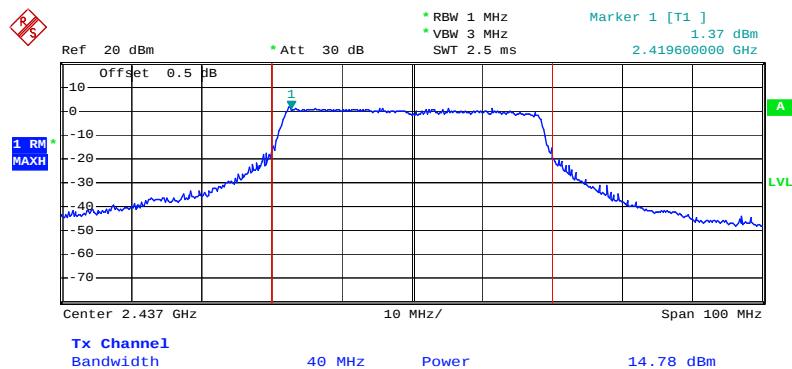


Date: 14.FEB.2008 03:52:15

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. A-3 / 2452 MHz

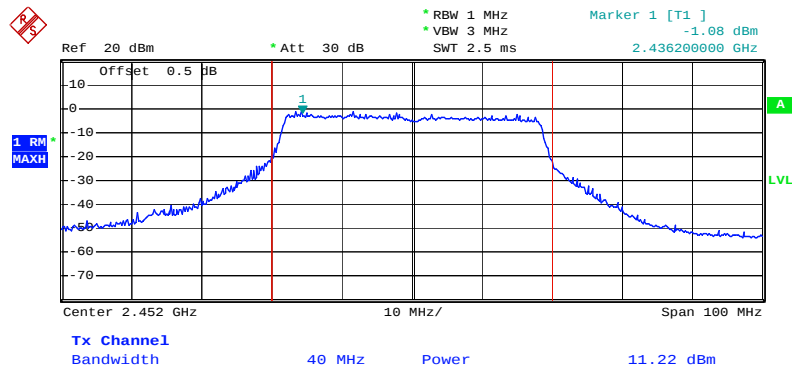


Date: 14.FEB.2008 03:57:58

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. D-1 / 2422 MHz

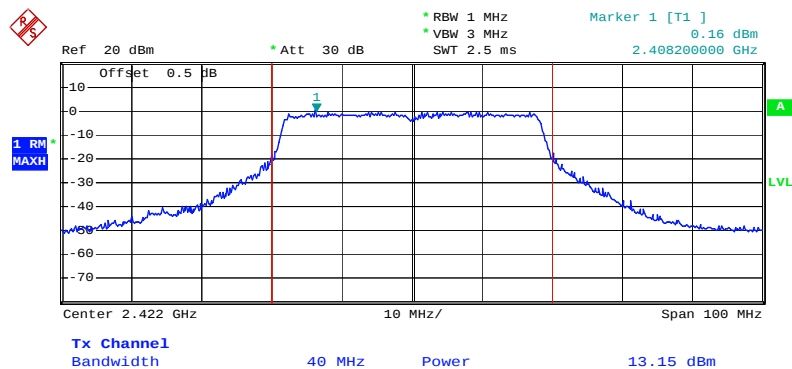


Date: 14.FEB.2008 04:44:38

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. D-1 / 2437 MHz

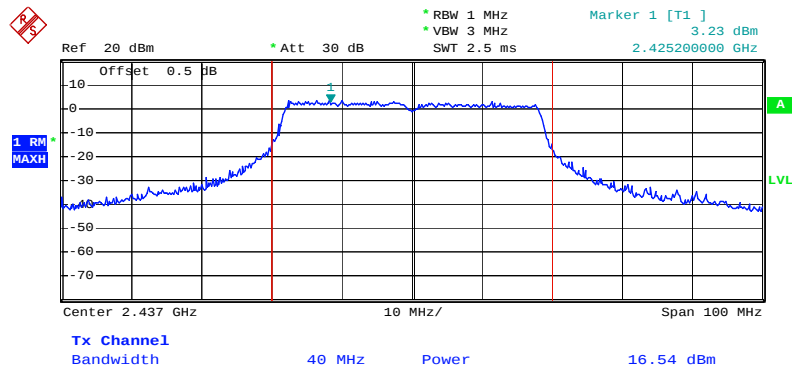


Date: 14.FEB.2008 04:48:55

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. D-1 / 2452 MHz

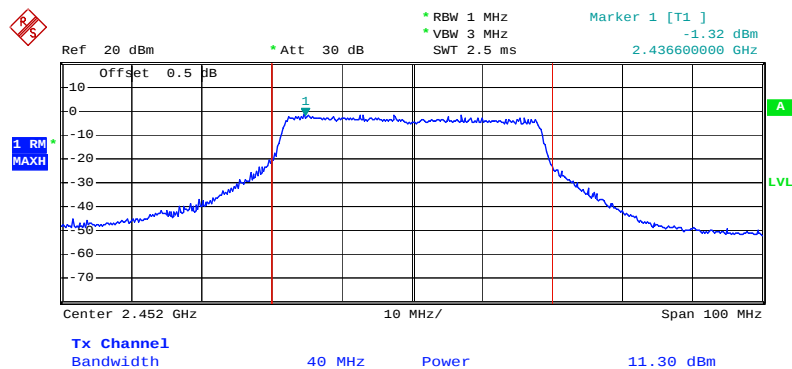


Date: 14.FEB.2008 06:23:50

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. D-2 / 2422 MHz

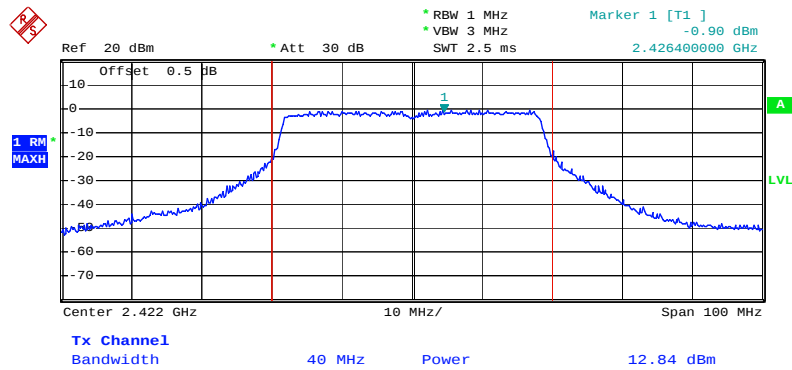


Date: 14.FEB.2008 04:44:02

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. D-2 / 2437 MHz

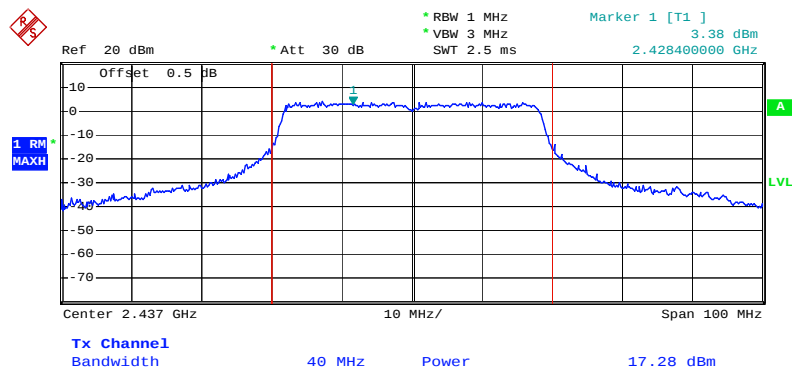


Date: 14.FEB.2008 04:49:36

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. D-2 / 2452 MHz

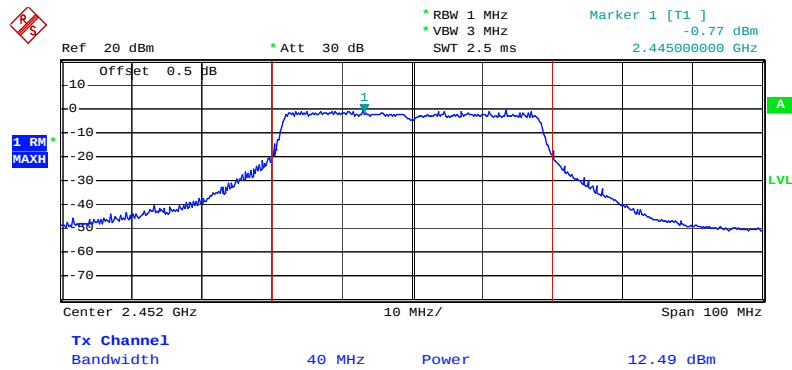


Date: 14.FEB.2008 06:25:10

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. D-3 / 2422 MHz

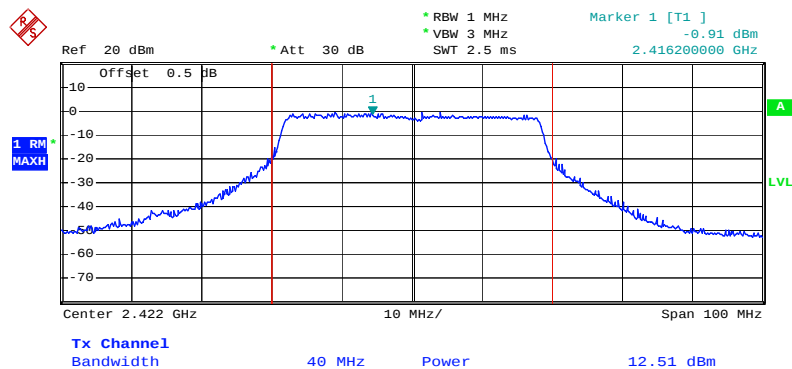


Date: 14.FEB.2008 04:43:25

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. D-3 / 2437 MHz

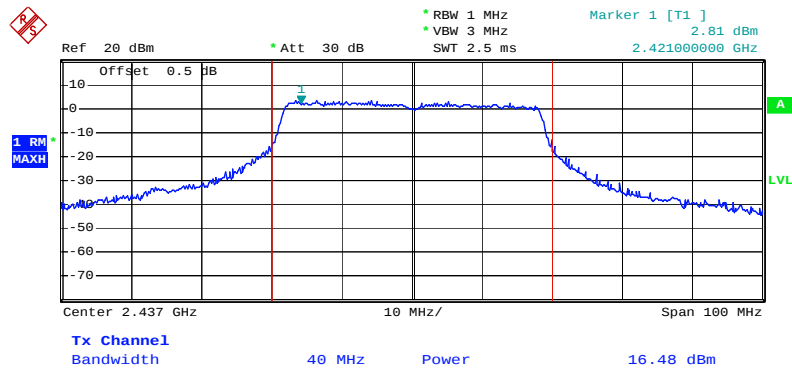


Date: 14.FEB.2008 04:50:22

### Channel Output Power Plot on Configuration Draft n MCS16 40MHz Ant. D-3 / 2452 MHz

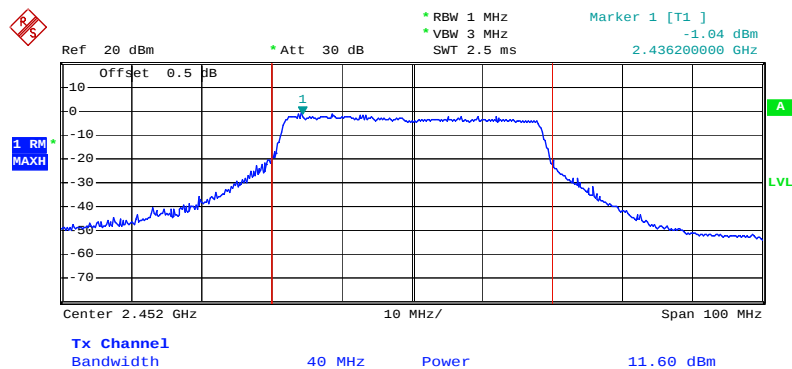


Date: 14.FEB.2008 06:26:34

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. B-1 / 5745 MHz

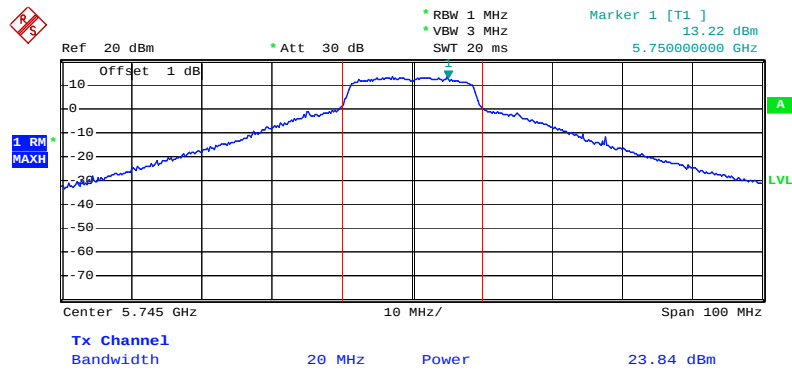


Date: 15.FEB.2008 07:57:10

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. B-1 / 5785MHz

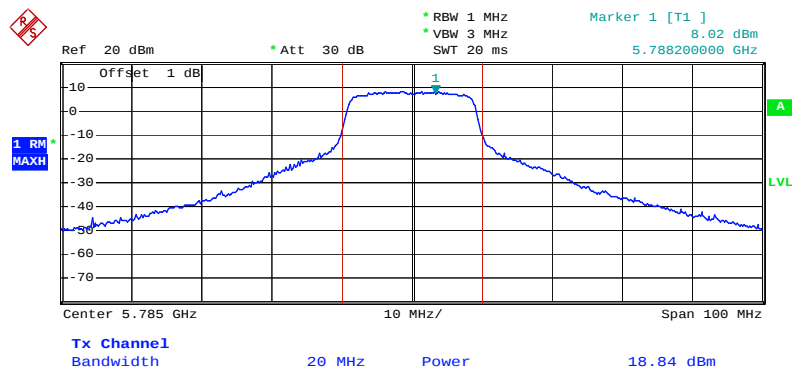


Date: 15.FEB.2008 07:57:32

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. B-1 / 5825 MHz

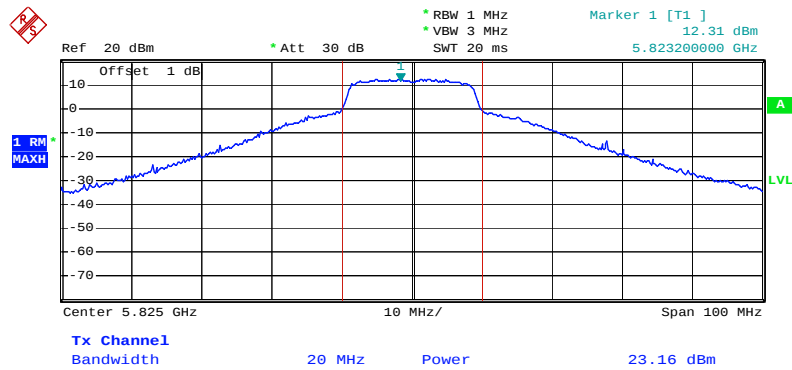


Date: 15.FEB.2008 07:59:15

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. B-2 / 5745 MHz

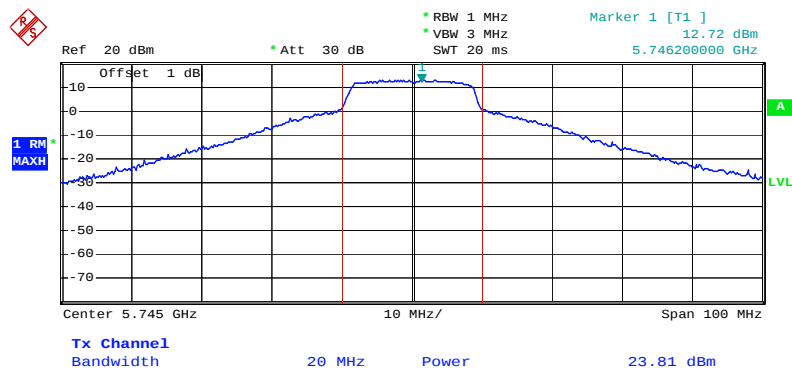


Date: 15.FEB.2008 07:56:53

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. B-2 / 5785MHz

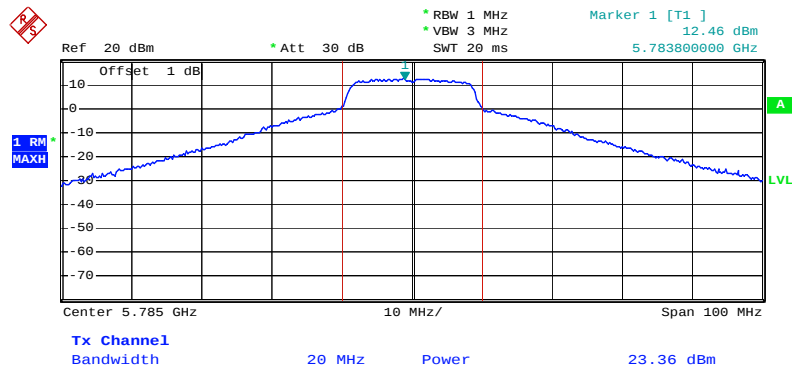


Date: 15.FEB.2008 07:57:49

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. B-2 / 5825 MHz

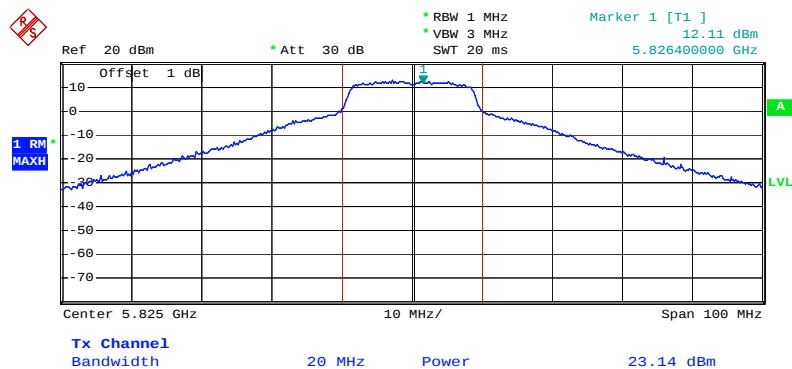


Date: 15.FEB.2008 07:58:58

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. B-3 / 5745 MHz

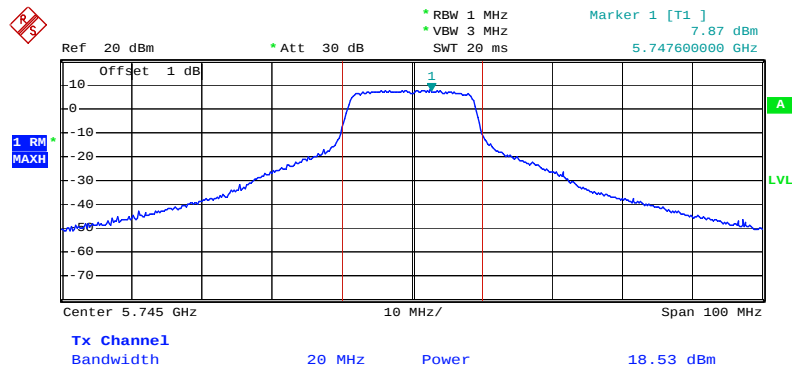


Date: 15.FEB.2008 07:56:32

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. B-3 / 5785MHz

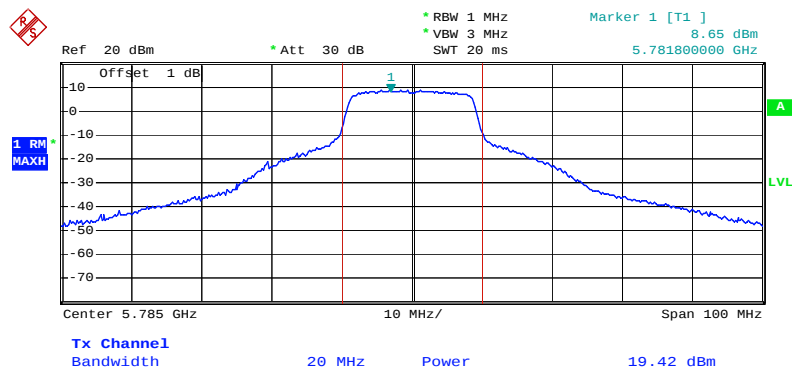


Date: 15.FEB.2008 07:58:06

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. B-3 / 5825 MHz

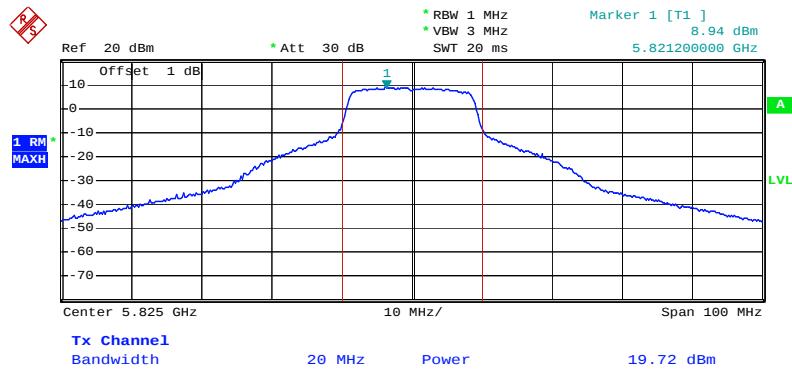


Date: 15.FEB.2008 07:58:40

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. D-1 / 5745 MHz

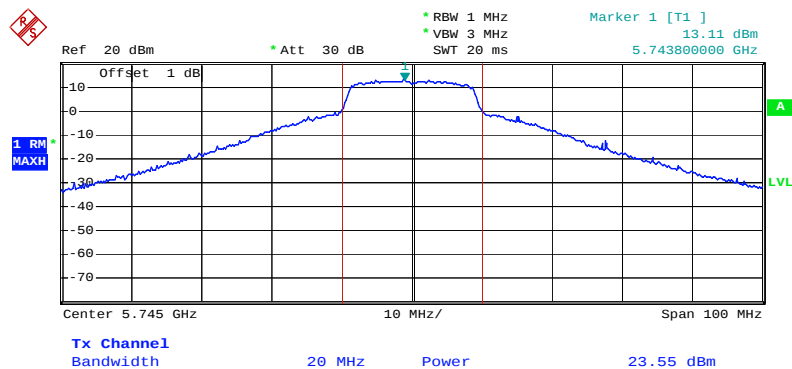


Date: 15.FEB.2008 10:09:02

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. D-1 / 5785MHz

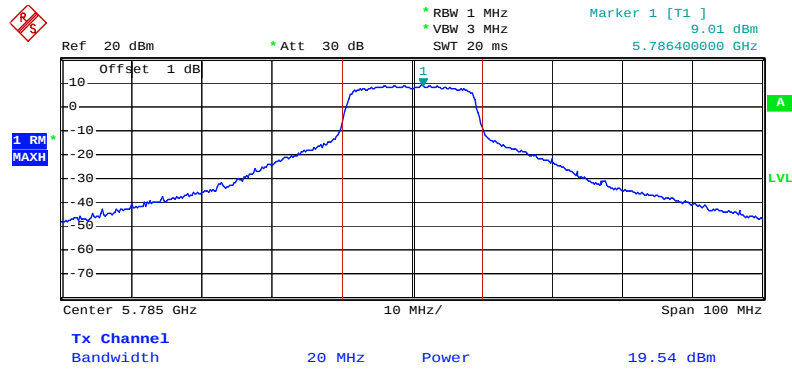


Date: 15.FEB.2008 10:09:34

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. D-1 / 5825 MHz

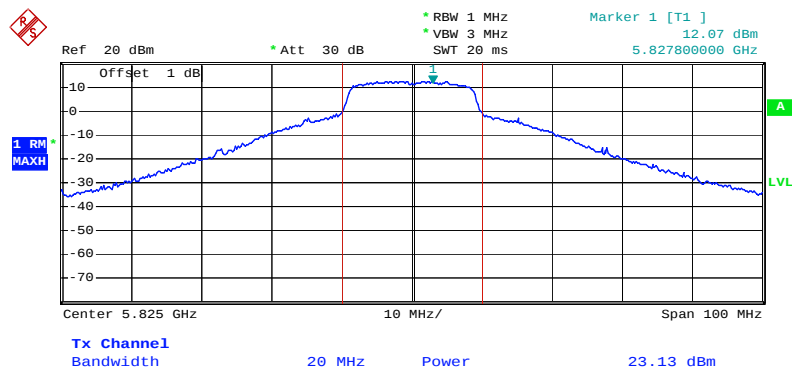


Date: 15.FEB.2008 10:12:12

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. D-2 / 5745 MHz

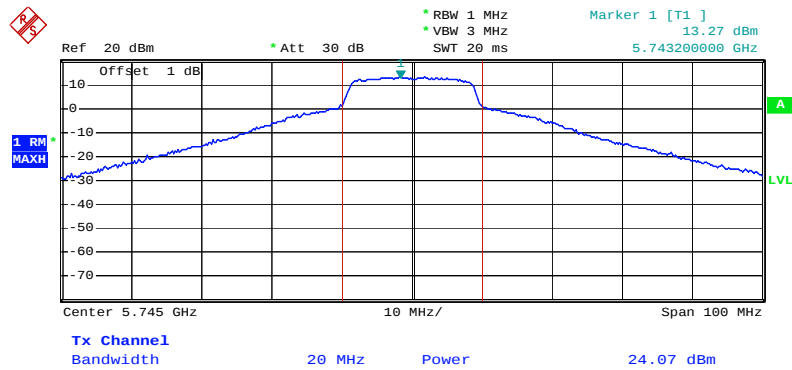


Date: 15.FEB.2008 10:08:46

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. D-2 / 5785MHz

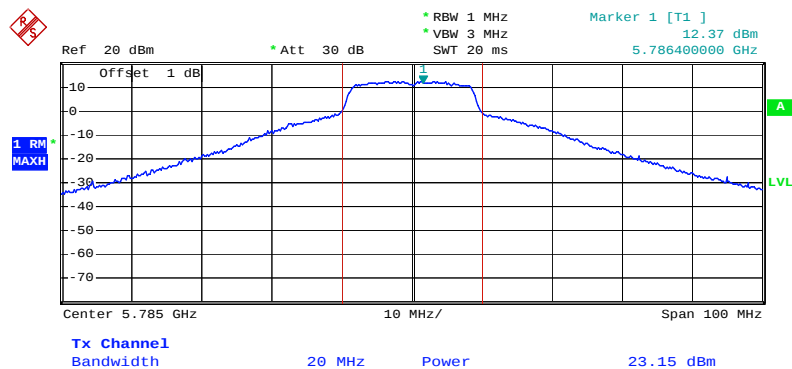


Date: 15.FEB.2008 10:09:49

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. D-2 / 5825 MHz

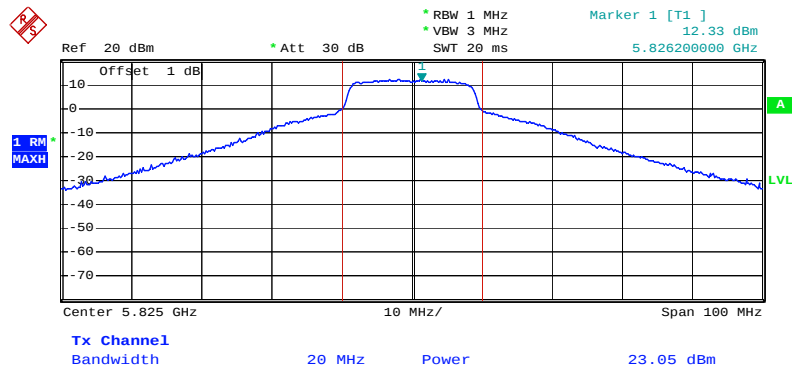


Date: 15.FEB.2008 10:11:43

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. D-3 / 5745 MHz

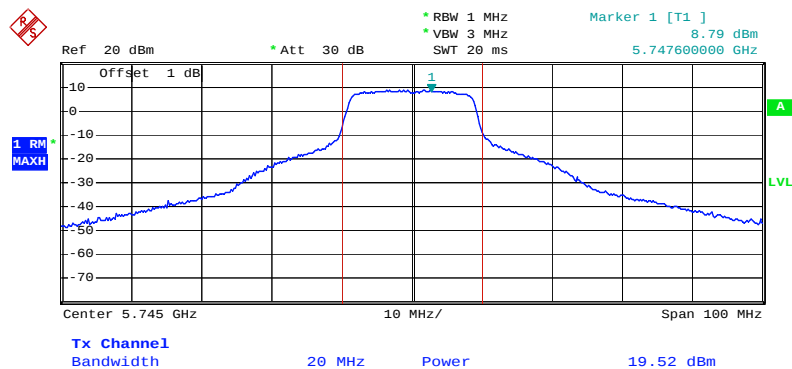


Date: 15.FEB.2008 10:08:22

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. D-3 / 5785MHz

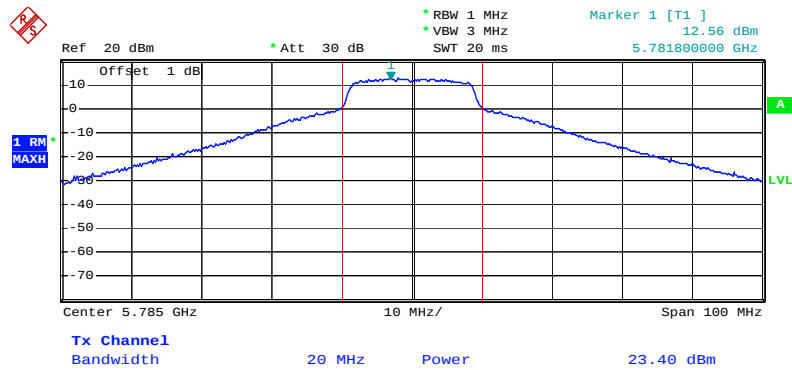


Date: 15.FEB.2008 10:10:09

### Channel Output Power Plot on Configuration 11a Draft n MCS16 20MHz Ant. D-3 / 5825 MHz

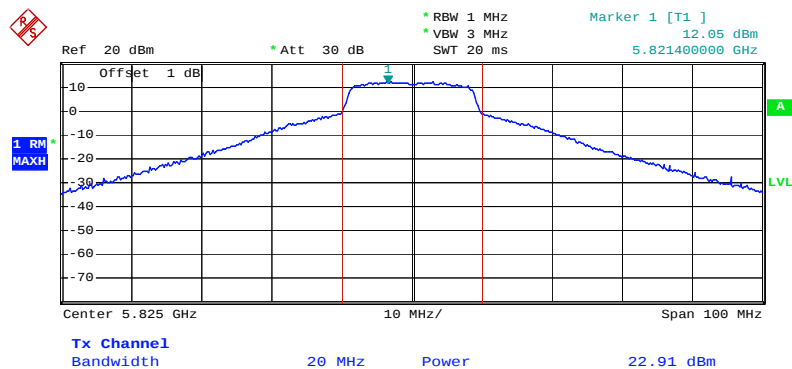


Date: 15.FEB.2008 10:10:50

### Channel Output Power Plot on Configuration 11a Draft n MCS16 40MHz Ant. B-1 / 5755 MHz

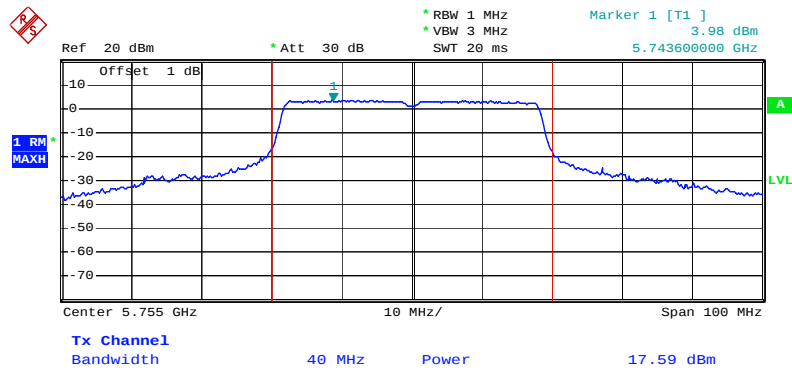


Date: 15.FEB.2008 08:26:53

### Channel Output Power Plot on Configuration 11a Draft n MCS16 40MHz Ant. B-1 / 5795 MHz

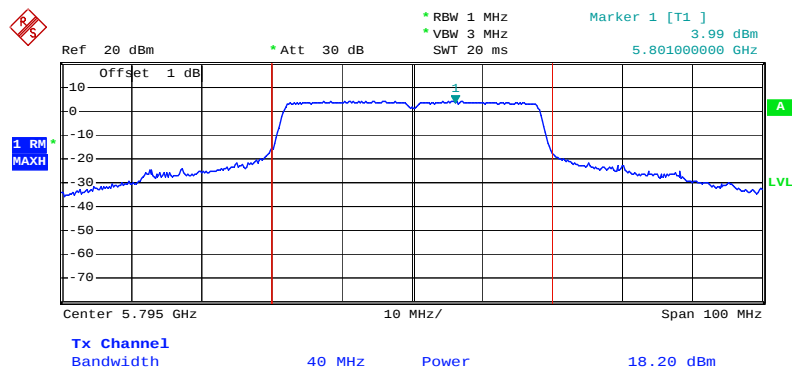


Date: 15.FEB.2008 08:28:54

### Channel Output Power Plot on Configuration 11a Draft n MCS16 40MHz Ant. B-2 / 5755 MHz

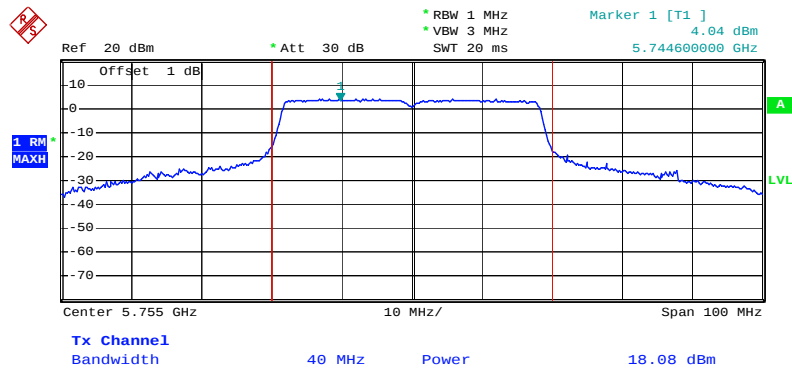


Date: 15.FEB.2008 08:27:16

### Channel Output Power Plot on Configuration 11a Draft n MCS16 40MHz Ant. B-2 / 5795 MHz

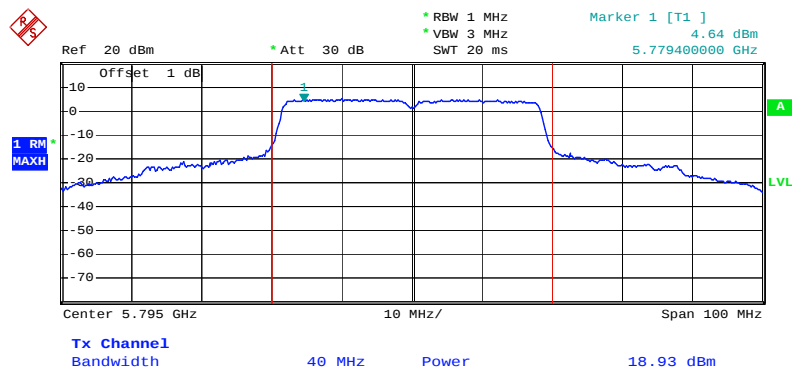


Date: 15.FEB.2008 08:28:32

### Channel Output Power Plot on Configuration 11a Draft n MCS16 40MHz Ant. B-3 / 5755 MHz

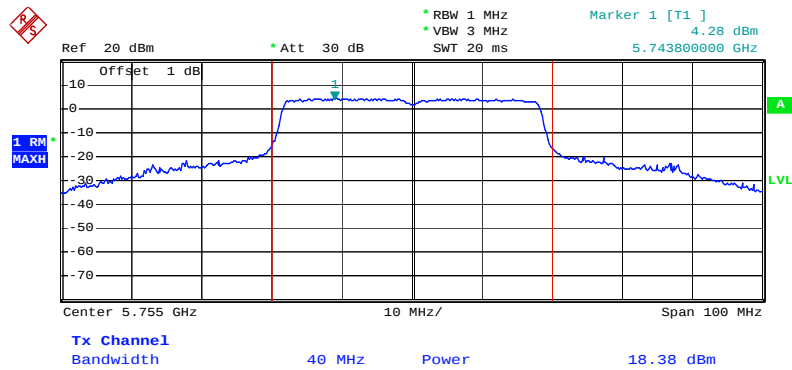


Date: 15.FEB.2008 08:27:38

### Channel Output Power Plot on Configuration 11a Draft n MCS16 40MHz Ant. B-3 / 5795 MHz

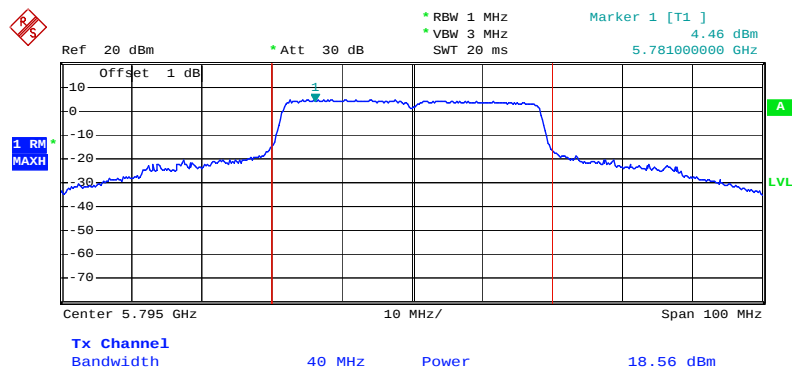


Date: 15.FEB.2008 08:28:09

### Channel Output Power Plot on Configuration 11a Draft n MCS16 40MHz Ant. D-1 / 5755 MHz

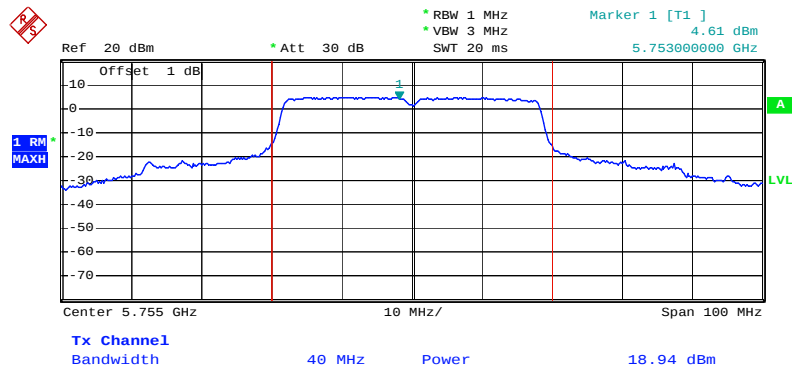


Date: 15.FEB.2008 10:26:57

### Channel Output Power Plot on Configuration 11a Draft n MCS16 40MHz Ant. D-1 / 5795 MHz

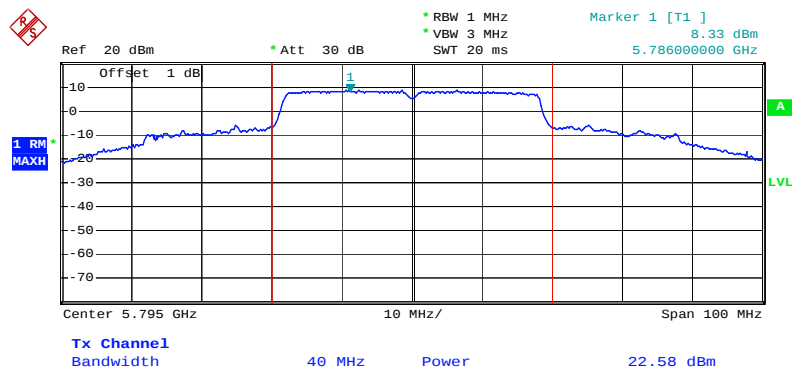


Date: 15.FEB.2008 10:28:55

### Channel Output Power Plot on Configuration 11a Draft n MCS16 40MHz Ant. D-2 / 5755 MHz

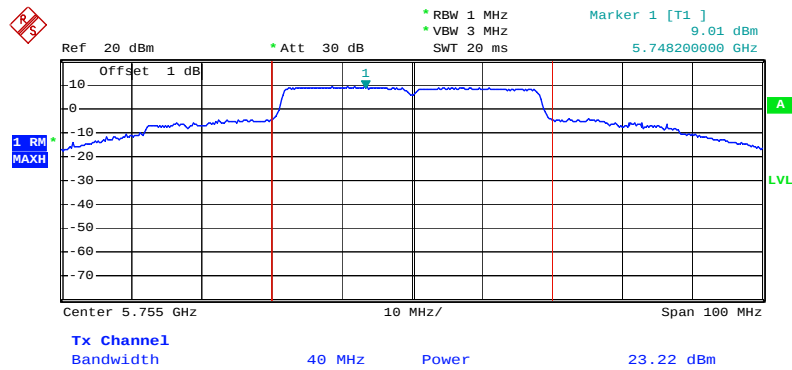


Date: 15.FEB.2008 10:27:20

### Channel Output Power Plot on Configuration 11a Draft n MCS16 40MHz Ant. D-2 / 5795 MHz

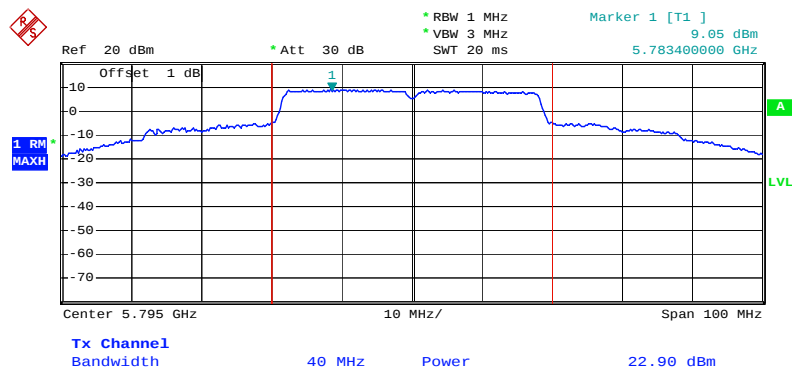


Date: 15.FEB.2008 10:28:29

### Channel Output Power Plot on Configuration 11a Draft n MCS16 40MHz Ant. D-3 / 5755 MHz

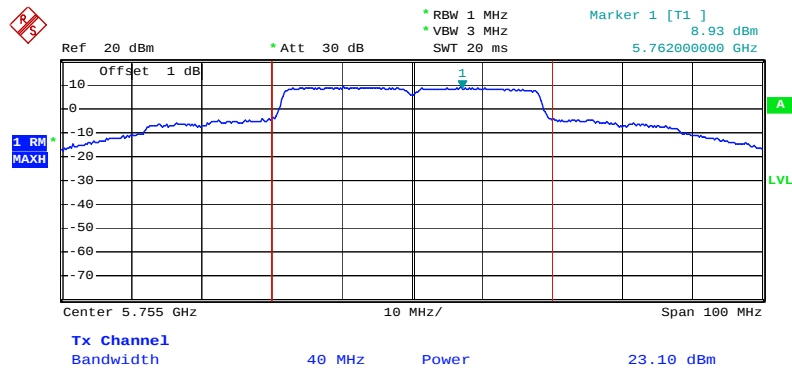

Date: 15.FEB.2008 10:27:35

### Channel Output Power Plot on Configuration 11a Draft n MCS16 40MHz Ant. D-3 / 5795 MHz

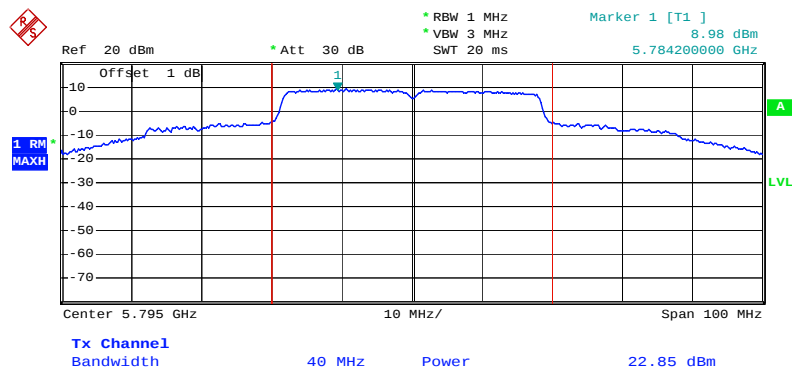

Date: 15.FEB.2008 10:28:03

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

| Spectrum Parameter | Setting  |
|--------------------|----------|
| Attenuation        | Auto     |
| Span Frequency     | 1.5MHz   |
| RB                 | 3 kHz    |
| VB                 | 30 kHz   |
| Detector           | Peak     |
| Trace              | Max Hold |
| Sweep Time         | 500s     |

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Measuring multiple antennas, the connector is required to link with spectrum analyser through a combiner.

#### 4.3.4. Test Setup Layout

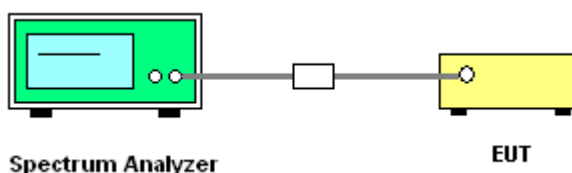

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

|               |          |                |         |
|---------------|----------|----------------|---------|
| Temperature   | 23°C     | Humidity       | 61%     |
| Test Engineer | Sam Chen | Configurations | Draft n |

For 2.4GHz Band

Configuration Draft n MCS16 20MHz Ant. A-1 + Ant. A-2 + Ant. A-3

| Channel | Frequency | Power Density (dBm/3kHz) | Max. Limit (dBm) | Result   |
|---------|-----------|--------------------------|------------------|----------|
| 1       | 2412 MHz  | 1.23                     | 8.00             | Complies |
| 6       | 2437 MHz  | 2.27                     | 8.00             | Complies |
| 11      | 2462 MHz  | -1.18                    | 8.00             | Complies |

Configuration Draft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3

| Channel | Frequency | Power Density (dBm/3kHz) | Max. Limit (dBm) | Result   |
|---------|-----------|--------------------------|------------------|----------|
| 1       | 2412 MHz  | 1.46                     | 8.00             | Complies |
| 6       | 2437 MHz  | 2.35                     | 8.00             | Complies |
| 11      | 2462 MHz  | 0.19                     | 8.00             | Complies |

Configuration Draft n MCS16 40MHz Ant. A-1 + Ant. A-2 + Ant. A-3

| Channel | Frequency | Power Density (dBm/3kHz) | Max. Limit (dBm) | Result   |
|---------|-----------|--------------------------|------------------|----------|
| 3       | 2422 MHz  | 0.66                     | 8.00             | Complies |
| 6       | 2437 MHz  | 2.23                     | 8.00             | Complies |
| 9       | 2452 MHz  | -0.53                    | 8.00             | Complies |

Configuration Draft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3

| Channel | Frequency | Power Density (dBm/3kHz) | Max. Limit (dBm) | Result   |
|---------|-----------|--------------------------|------------------|----------|
| 3       | 2422 MHz  | 0.08                     | 8.00             | Complies |
| 6       | 2437 MHz  | 3.79                     | 8.00             | Complies |
| 9       | 2452 MHz  | 0.37                     | 8.00             | Complies |

### For 5GHz Band

#### Configuration Draft n MCS16 20MHz Ant. B-1 + Ant. B-2 + Ant. B-3

| Channel | Frequency | Power Density (dBm/3kHz) | Max. Limit (dBm) | Result   |
|---------|-----------|--------------------------|------------------|----------|
| 149     | 5745 MHz  | -7.35                    | 8.00             | Complies |
| 157     | 5785 MHz  | -5.63                    | 8.00             | Complies |
| 165     | 5827 MHz  | -3.67                    | 8.00             | Complies |

#### Configuration Draft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3

| Channel | Frequency | Power Density (dBm/3kHz) | Max. Limit (dBm) | Result   |
|---------|-----------|--------------------------|------------------|----------|
| 149     | 5745 MHz  | -6.01                    | 8.00             | Complies |
| 157     | 5785 MHz  | -4.30                    | 8.00             | Complies |
| 165     | 5827 MHz  | -2.38                    | 8.00             | Complies |


#### Configuration Draft n MCS16 40MHz Ant. B-1 + Ant. B-2 + Ant. B-3

| Channel | Frequency | Power Density (dBm/3kHz) | Max. Limit (dBm) | Result   |
|---------|-----------|--------------------------|------------------|----------|
| 151     | 5755 MHz  | -4.49                    | 8.00             | Complies |
| 159     | 5795 MHz  | -3.42                    | 8.00             | Complies |

#### Configuration Draft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3


| Channel | Frequency | Power Density (dBm/3kHz) | Max. Limit (dBm) | Result   |
|---------|-----------|--------------------------|------------------|----------|
| 151     | 5755 MHz  | -2.69                    | 8.00             | Complies |
| 159     | 5795 MHz  | -1.70                    | 8.00             | Complies |

### Power Density Plot on Configuration Drafft n MCS16 20MHz Ant. A-1 + Ant. A-2 + Ant. A-3 / 2412 MHz

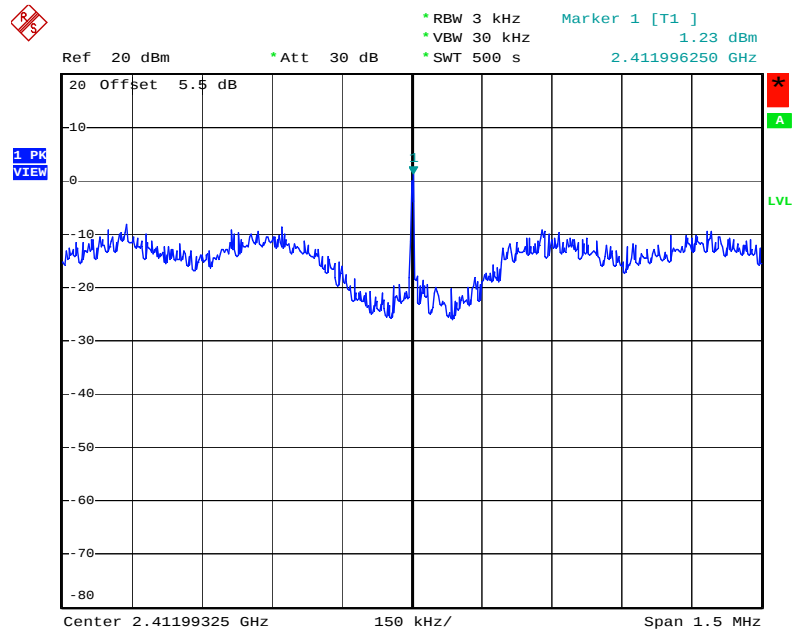


Date: 14.FEB.2008 07:01:23

### Power Density Plot on Configuration Drafft n MCS16 20MHz Ant. A-1 + Ant. A-2 + Ant. A-3 / 2437 MHz

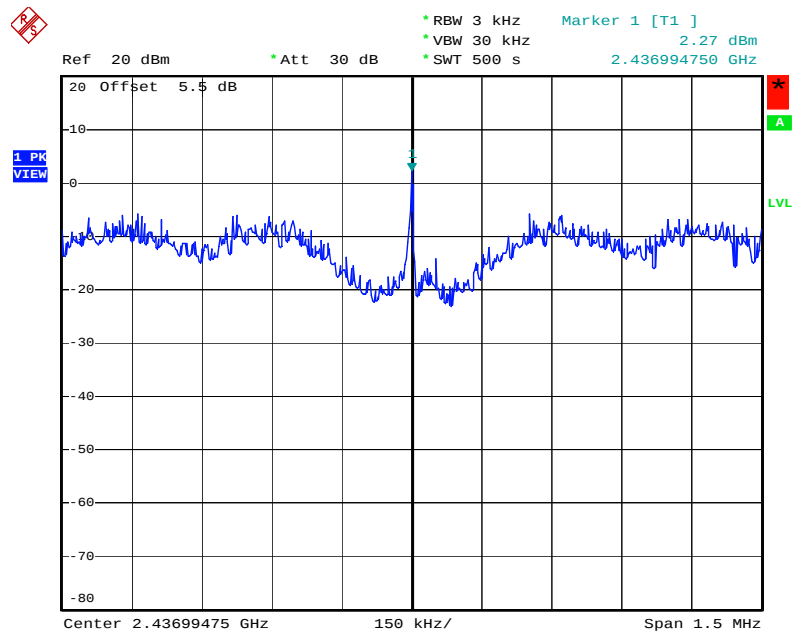


Date: 14.FEB.2008 07:02:21

### Power Density Plot on Configuration Drafft n MCS16 20MHz Ant. A-1 + Ant. A-2 + Ant. A-3 / 2462 MHz

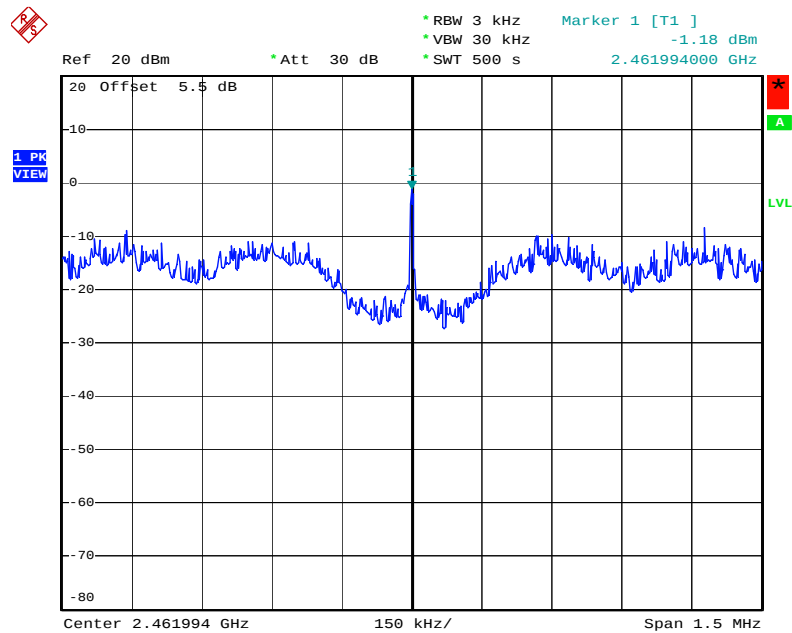


Date: 14.FEB.2008 07:03:16

### Power Density Plot on Configuration Drafft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 2412 MHz

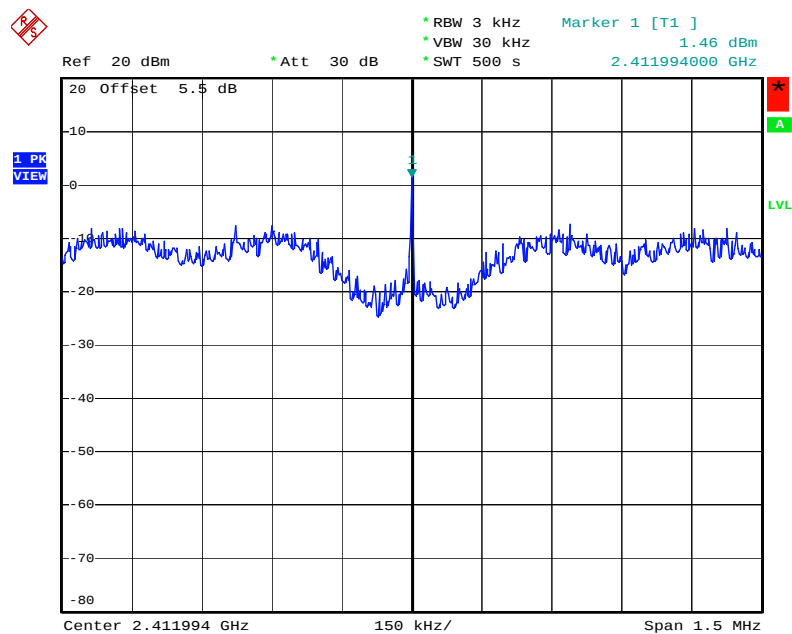


Date: 14.FEB.2008 07:20:47

### Power Density Plot on Configuration Drafft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 2437 MHz

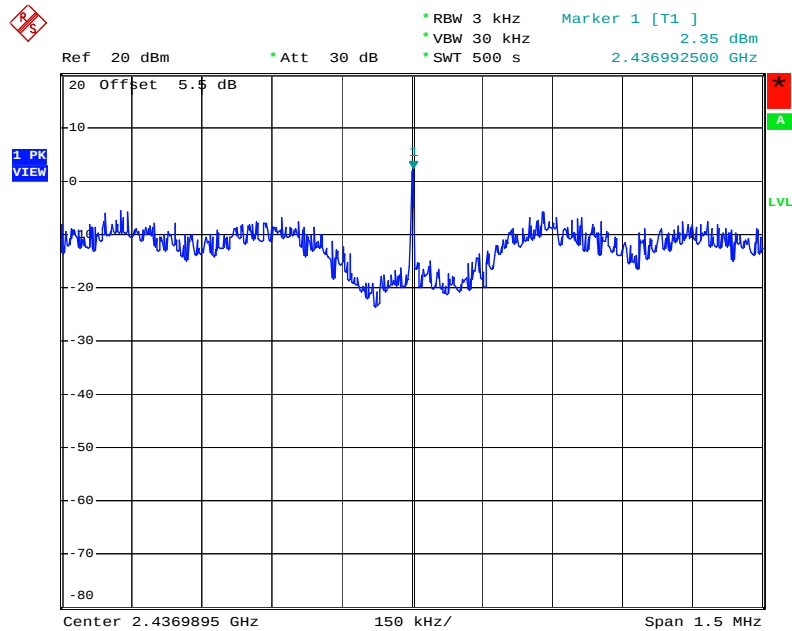


Date: 15.FEB.2008 04:01:52

### Power Density Plot on Configuration Drafft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 2462 MHz

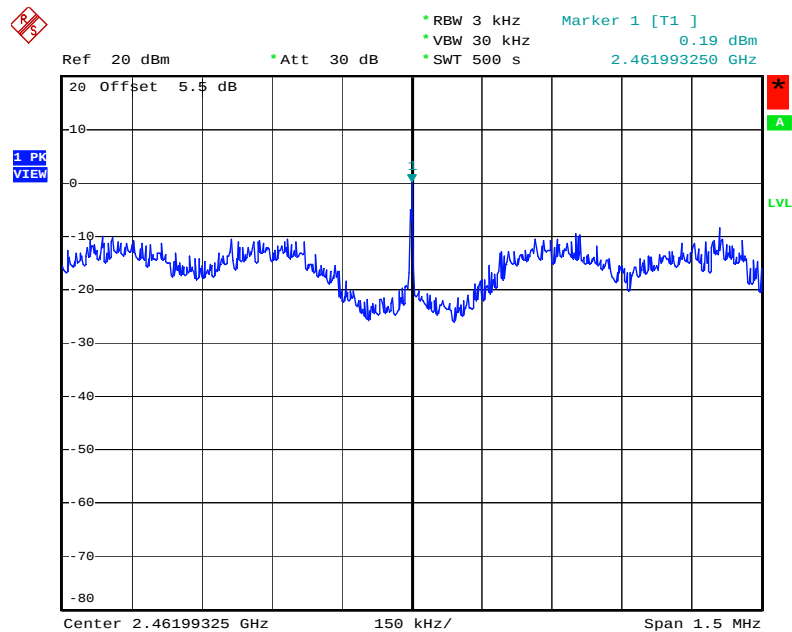


Date: 14.FEB.2008 07:22:40

### Power Density Plot on Configuration Drafft n MCS16 40MHz Ant. A-1 + Ant. A-2 + Ant. A-3 / 2422 MHz

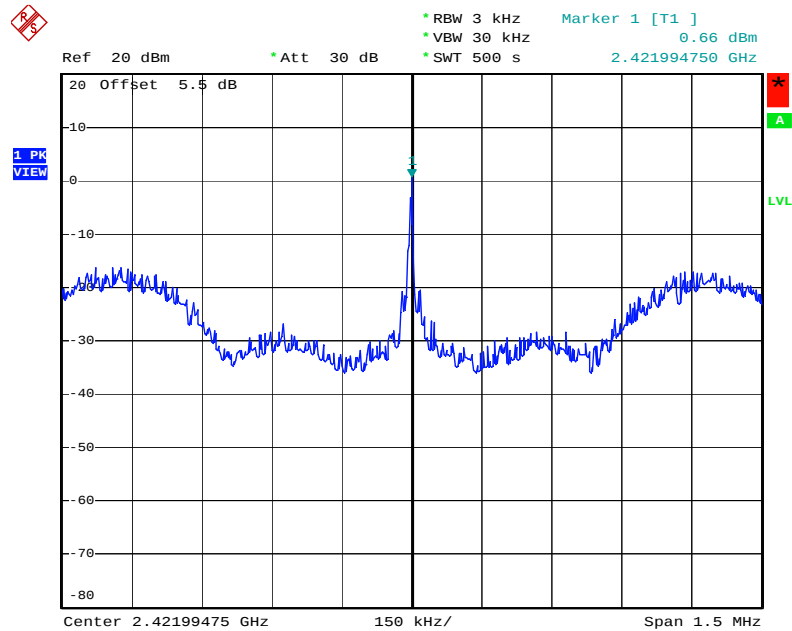


Date: 14.FEB.2008 07:05:37

### Power Density Plot on Configuration Drafft n MCS16 40MHz Ant. A-1 + Ant. A-2 + Ant. A-3 / 2437 MHz

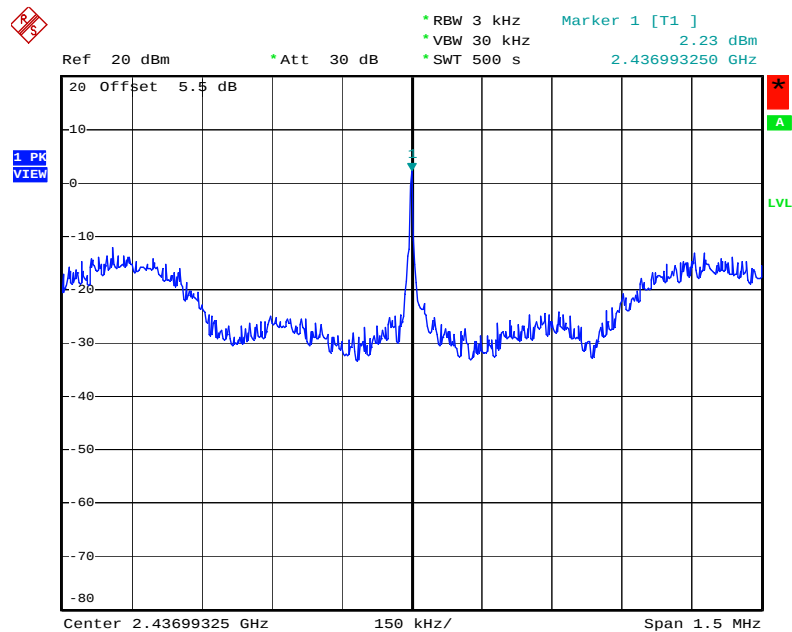


Date: 14.FEB.2008 07:08:05

### Power Density Plot on Configuration Drafft n MCS16 40MHz Ant. A-1 + Ant. A-2 + Ant. A-3 / 2452 MHz

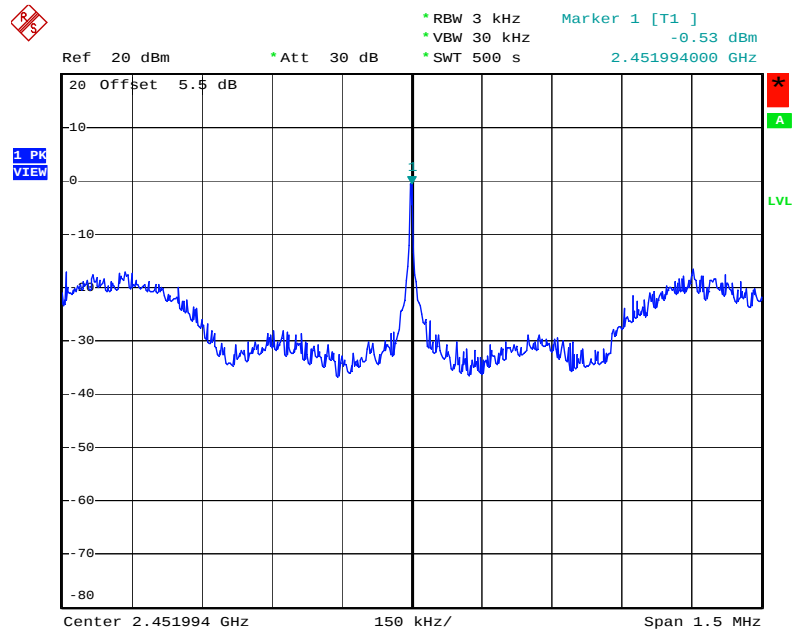


Date: 14.FEB.2008 07:09:14

### Power Density Plot on Configuration Drafft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 2422 MHz

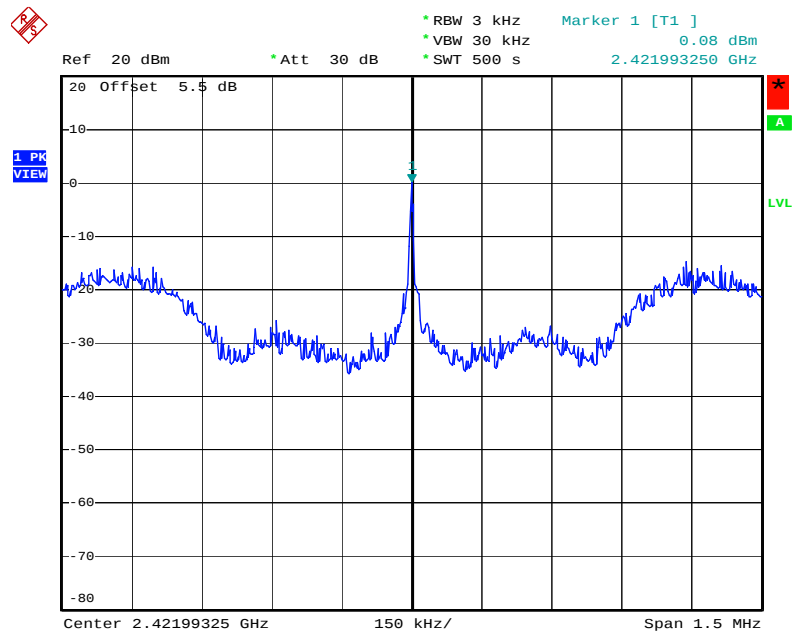


Date: 14.FEB.2008 07:19:00

### Power Density Plot on Configuration Drafft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 2437 MHz

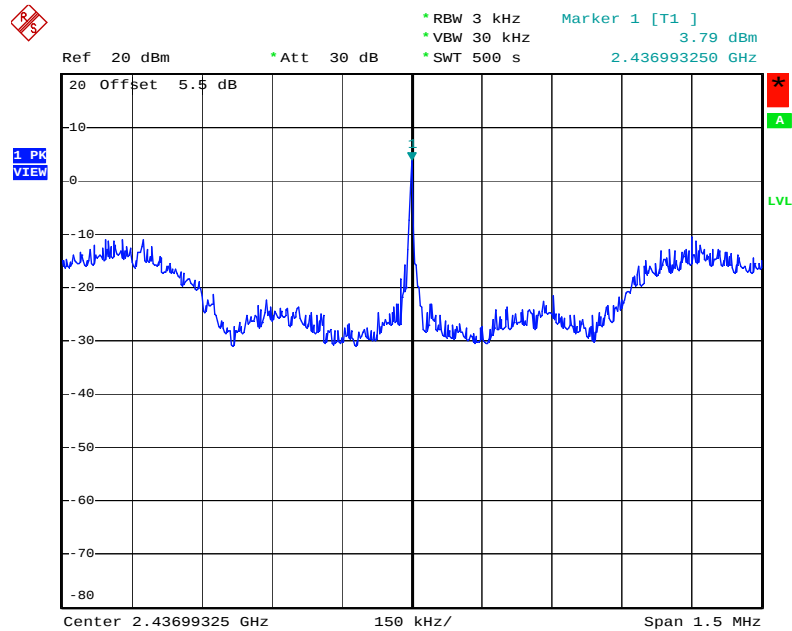


Date: 14.FEB.2008 07:18:03

### Power Density Plot on Configuration Drafft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 2452 MHz

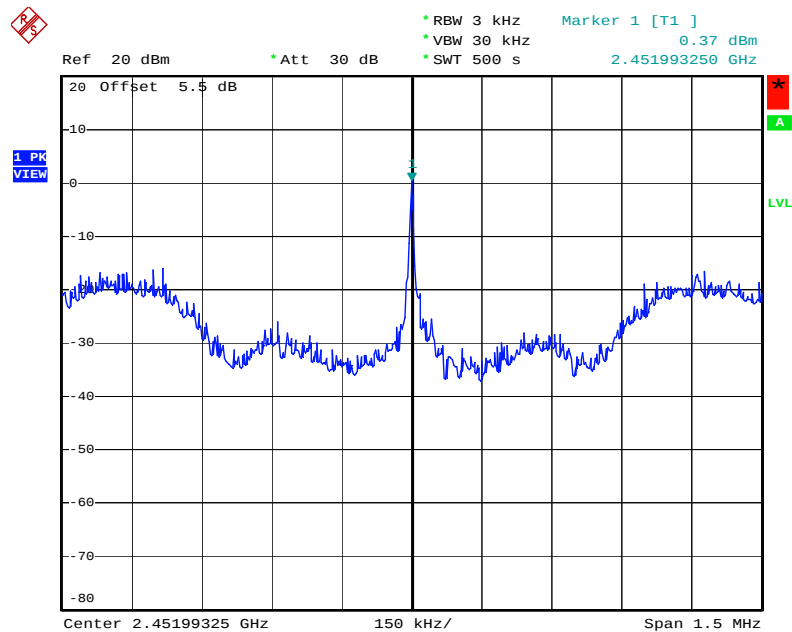


Date: 14.FEB.2008 07:16:37

### Power Density Plot on Configuration Drafft n MCS16 20MHz Ant. B-1 + Ant. B-2 + Ant. B-3 / 5745 MHz

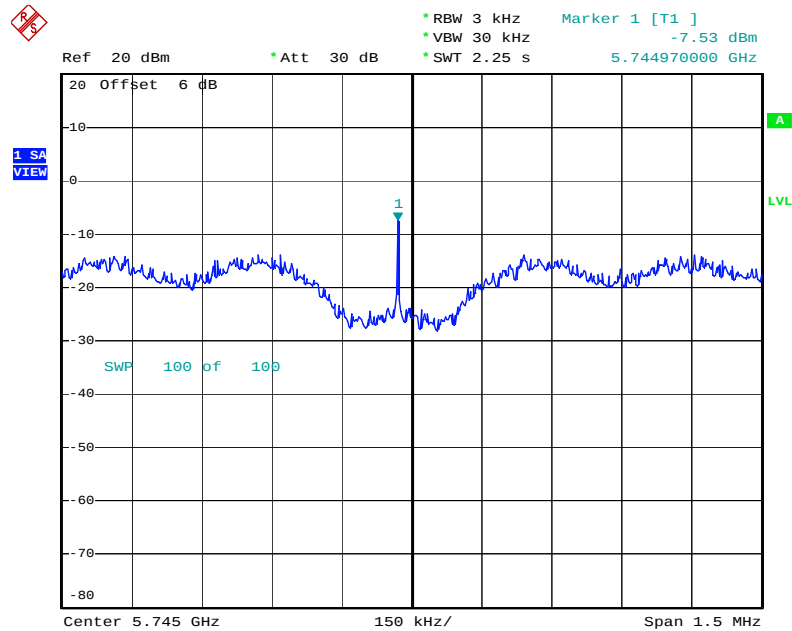


Date: 15.FEB.2008 08:54:30

### Power Density Plot on Configuration Drafft n MCS16 20MHz Ant. B-1 + Ant. B-2 + Ant. B-3 / 5785 MHz

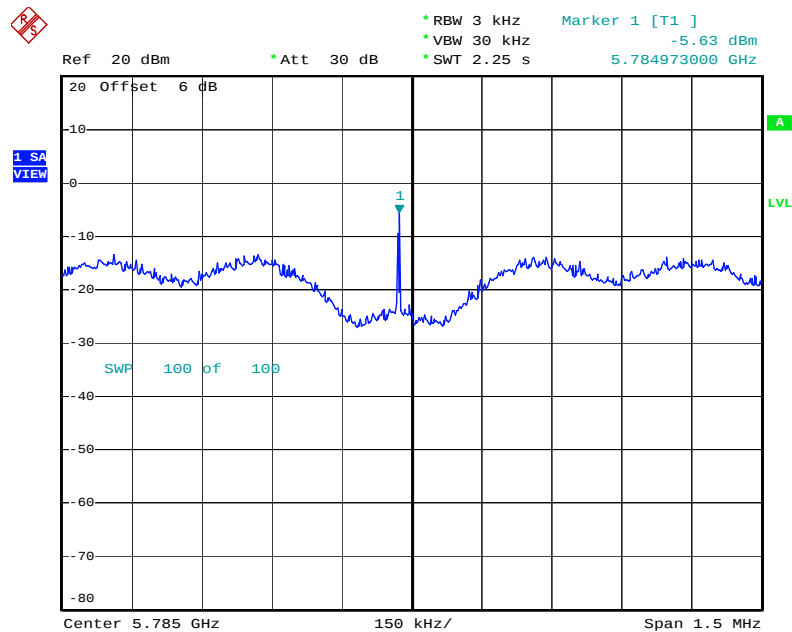


Date: 15.FEB.2008 09:01:16

### Power Density Plot on Configuration Drafft n MCS16 20MHz Ant. B-1 + Ant. B-2 + Ant. B-3 / 5825 MHz

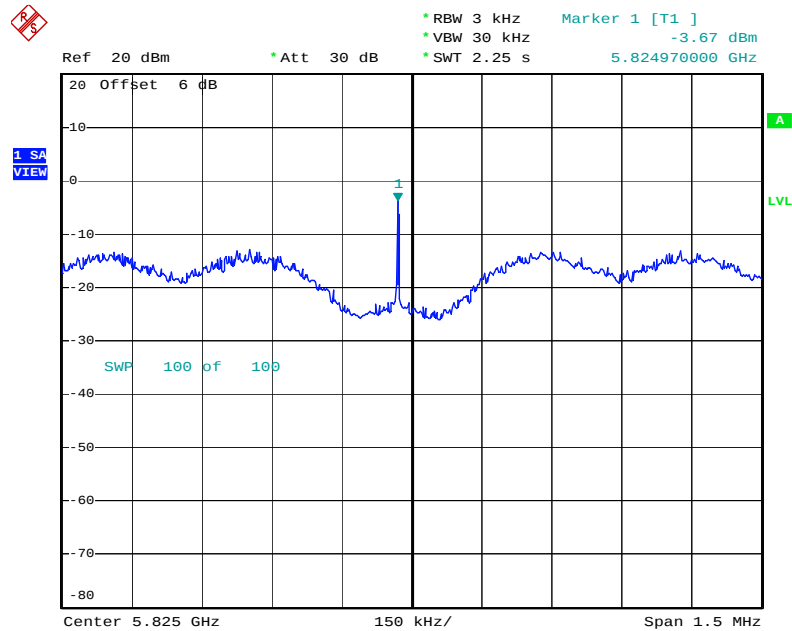


Date: 15.FEB.2008 09:05:33

### Power Density Plot on Configuration Drafft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 5745 MHz

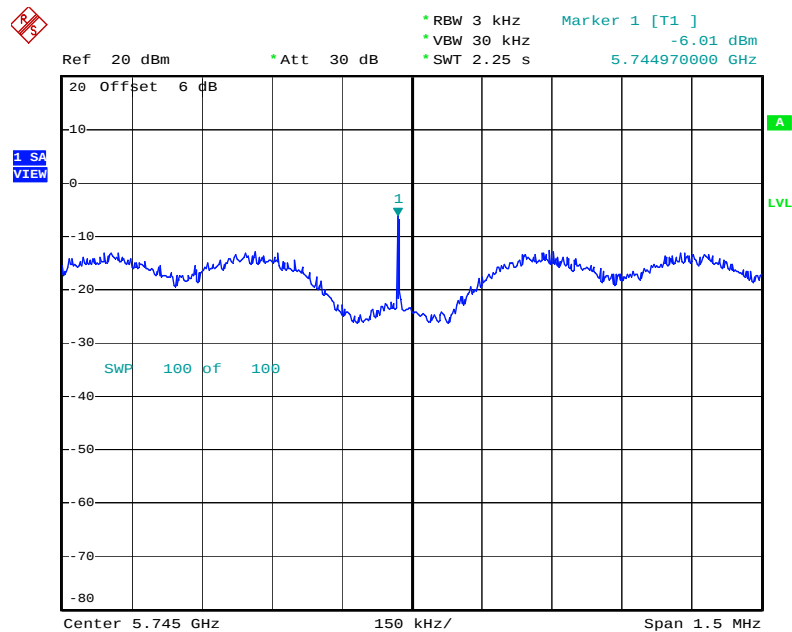


Date: 15.FEB.2008 10:54:14

### Power Density Plot on Configuration Drafft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 5785 MHz

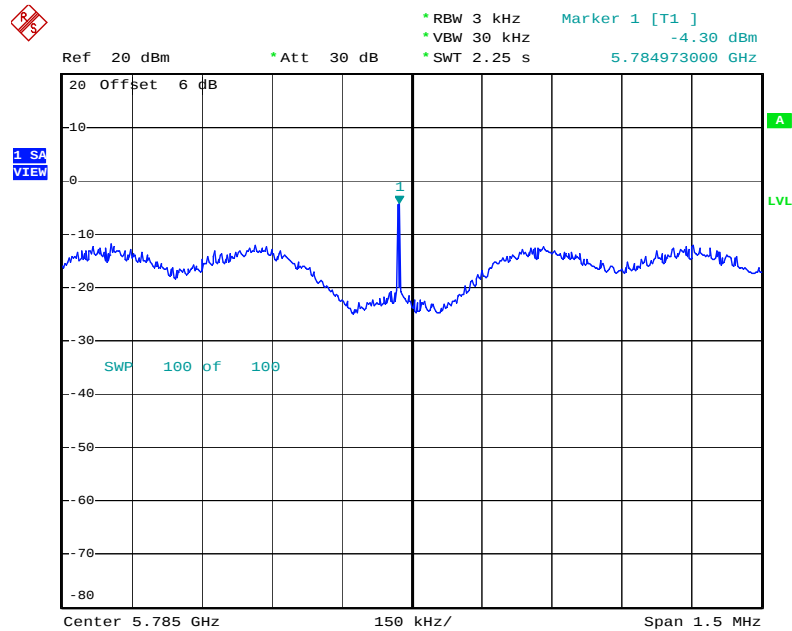


Date: 15.FEB.2008 10:58:38

### Power Density Plot on Configuration Drafft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 5825 MHz

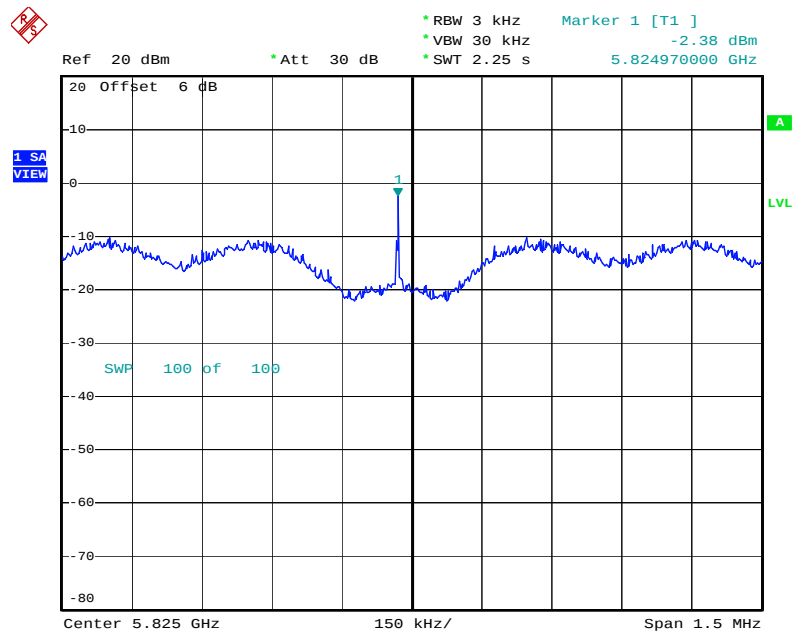


Date: 15.FEB.2008 11:02:54

### Power Density Plot on Configuration Drafft n MCS16 40MHz Ant. B-1 + Ant. B-2 + Ant. B-3 / 5755MHz

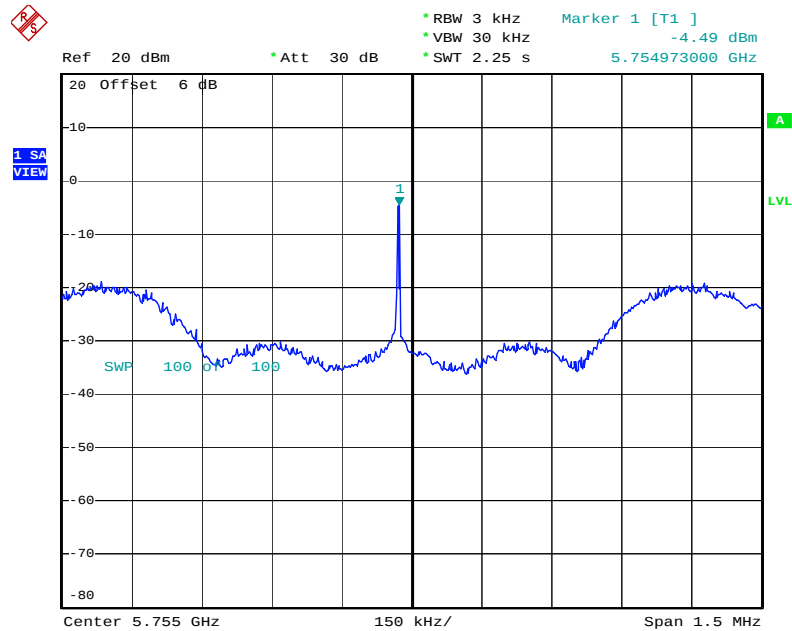


Date: 15.FEB.2008 09:10:23

### Power Density Plot on Configuration Drafft n MCS16 40MHz Ant. B-1 + Ant. B-2 + Ant. B-3 / 5795 MHz

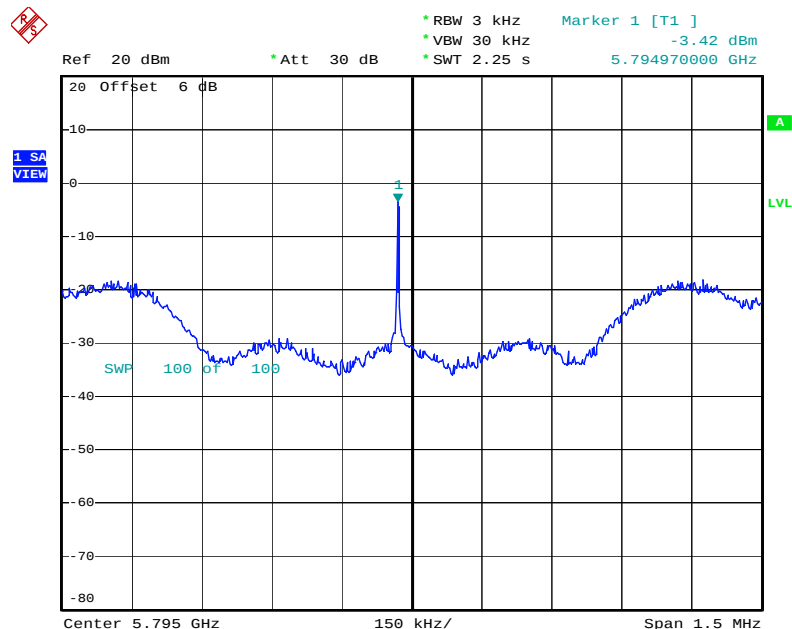


Date: 15.FEB.2008 09:15:04

### Power Density Plot on Configuration Drafft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 5755MHz

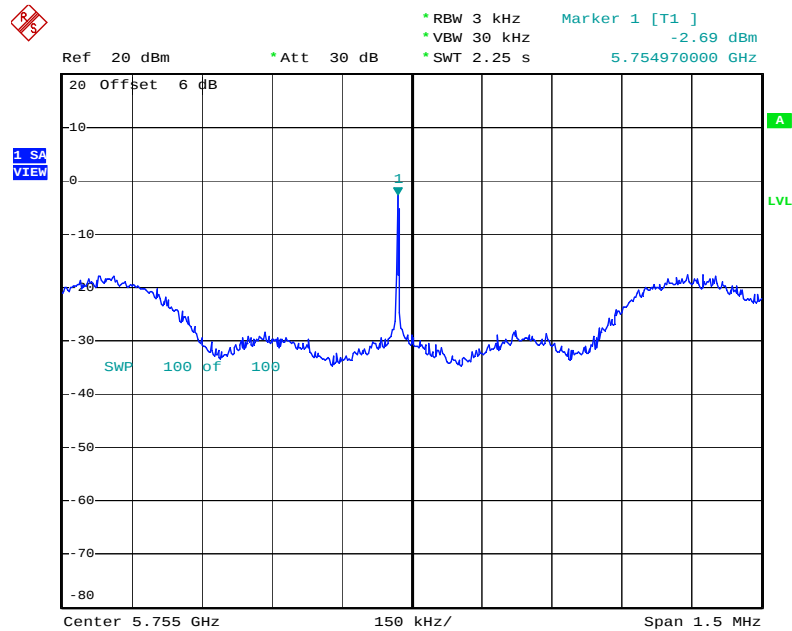

Date: 15.FEB.2008 10:49:01

### Power Density Plot on Configuration Drafft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 5795 MHz

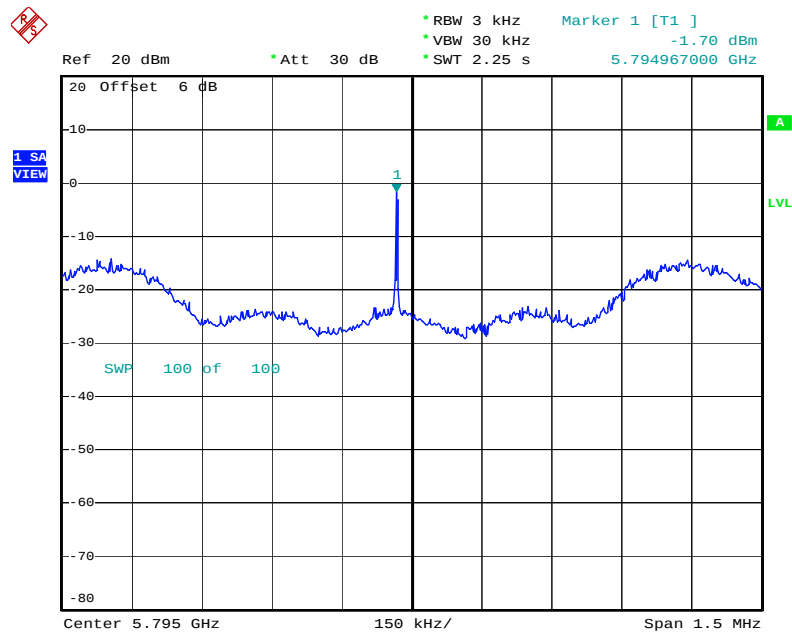

Date: 15.FEB.2008 10:35:14

#### 4.4. 6dB Spectrum Bandwidth Measurement

##### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

##### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

| Spectrum Parameters | Setting         |
|---------------------|-----------------|
| Attenuation         | Auto            |
| Span Frequency      | > 6dB Bandwidth |
| RB                  | 100 kHz         |
| VB                  | 100 kHz         |
| Detector            | Peak            |
| Trace               | Max Hold        |
| Sweep Time          | Auto            |

##### 4.4.3. Test Procedures

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
- Measured the spectrum width with power higher than 6dB below carrier.
- Measuring multiple antennas, the connector is required to link with spectrum analyse through a combiner.

##### 4.4.4. Test Setup Layout

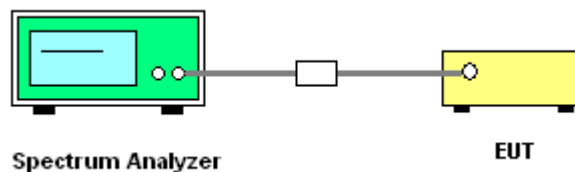

##### 4.4.5. Test Deviation

There is no deviation with the original standard.

##### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

|               |          |                |         |
|---------------|----------|----------------|---------|
| Temperature   | 23°C     | Humidity       | 61%     |
| Test Engineer | Sam Chen | Configurations | Draft n |

For 2.4GHz Band

Configuration Draft n MCS16 20MHz Ant. A-1 + Ant. A-2 + Ant. A-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1       | 2412 MHz  | 17.36               | 17.64                        | 500              | Complies    |
| 6       | 2437 MHz  | 15.88               | 17.60                        | 500              | Complies    |
| 11      | 2462 MHz  | 16.32               | 17.60                        | 500              | Complies    |

Configuration Draft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 1       | 2412 MHz  | 16.80               | 17.64                        | 500              | Complies    |
| 6       | 2437 MHz  | 17.28               | 17.60                        | 500              | Complies    |
| 11      | 2462 MHz  | 16.32               | 17.60                        | 500              | Complies    |

Configuration Draft n MCS16 40MHz Ant. A-1 + Ant. A-2 + Ant. A-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 3       | 2422 MHz  | 36.32               | 36.24                        | 500              | Complies    |
| 6       | 2437 MHz  | 36.08               | 36.32                        | 500              | Complies    |
| 9       | 2452 MHz  | 35.68               | 36.32                        | 500              | Complies    |

Configuration Draft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 3       | 2422 MHz  | 36.32               | 36.32                        | 500              | Complies    |
| 6       | 2437 MHz  | 36.40               | 36.32                        | 500              | Complies    |
| 9       | 2452 MHz  | 35.76               | 36.32                        | 500              | Complies    |

### For 5GHz Band

#### Configuration Draft n MCS16 20MHz Ant. B-1 + Ant. B-2 + Ant. B-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 149     | 5745 MHz  | 16.64               | 17.60                        | 500              | Complies    |
| 157     | 5785 MHz  | 15.00               | 17.64                        | 500              | Complies    |
| 165     | 5825 MHz  | 14.96               | 17.64                        | 500              | Complies    |

#### Configuration Draft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 149     | 5745 MHz  | 14.44               | 17.64                        | 500              | Complies    |
| 157     | 5785 MHz  | 15.12               | 17.64                        | 500              | Complies    |
| 165     | 5825 MHz  | 15.12               | 17.76                        | 500              | Complies    |


#### Configuration Draft n MCS16 40MHz Ant. B-1 + Ant. B-2 + Ant. B-3

| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 151     | 5755 MHz  | 36.32               | 36.32                        | 500              | Complies    |
| 159     | 5795 MHz  | 35.12               | 36.24                        | 500              | Complies    |

#### Configuration Draft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3


| Channel | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
| 151     | 5755 MHz  | 35.12               | 36.32                        | 500              | Complies    |
| 159     | 5795 MHz  | 31.44               | 36.40                        | 500              | Complies    |

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 20MHz Ant. A-1 + Ant. A-2 + Ant. A-3 / 2412 MHz

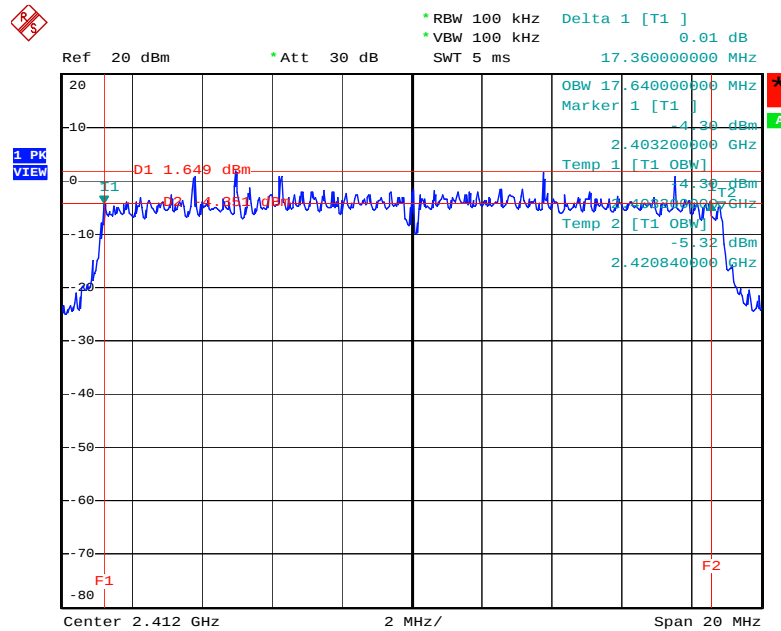


Date: 14.FEB.2008 07:00:57

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 20MHz Ant. A-1 + Ant. A-2 + Ant. A-3 / 2437 MHz

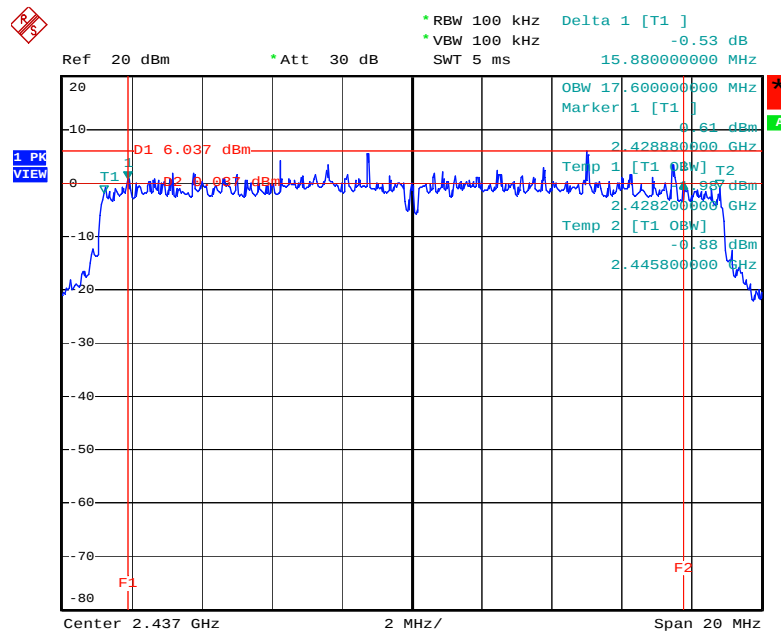


Date: 14.FEB.2008 07:02:05

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 20MHz Ant. A-1 + Ant. A-2 + Ant. A-3 / 2462 MHz

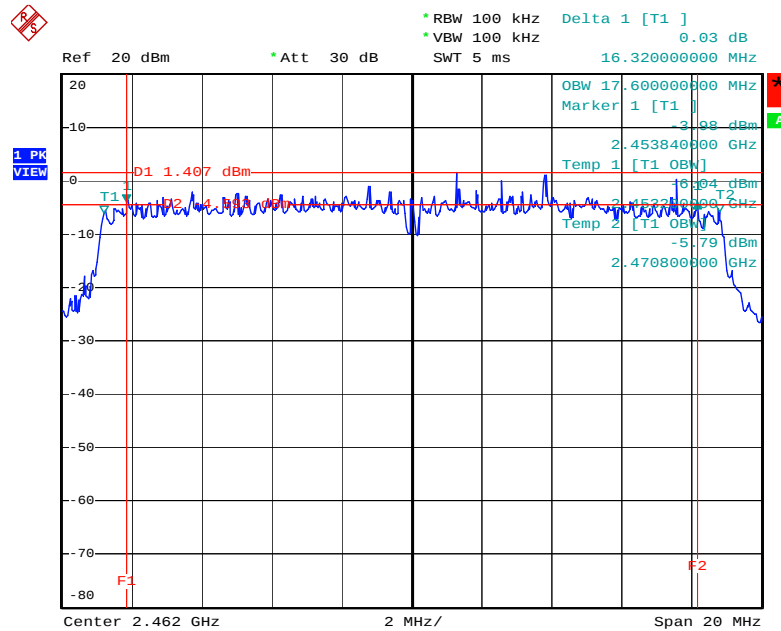


Date: 14.FEB.2008 07:03:01

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 2412 MHz

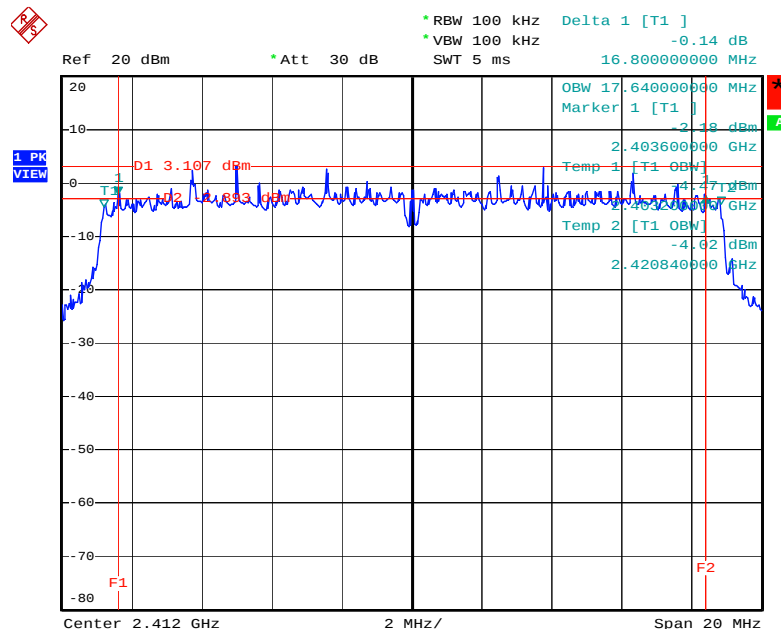


Date: 14.FEB.2008 07:20:21

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 2437 MHz

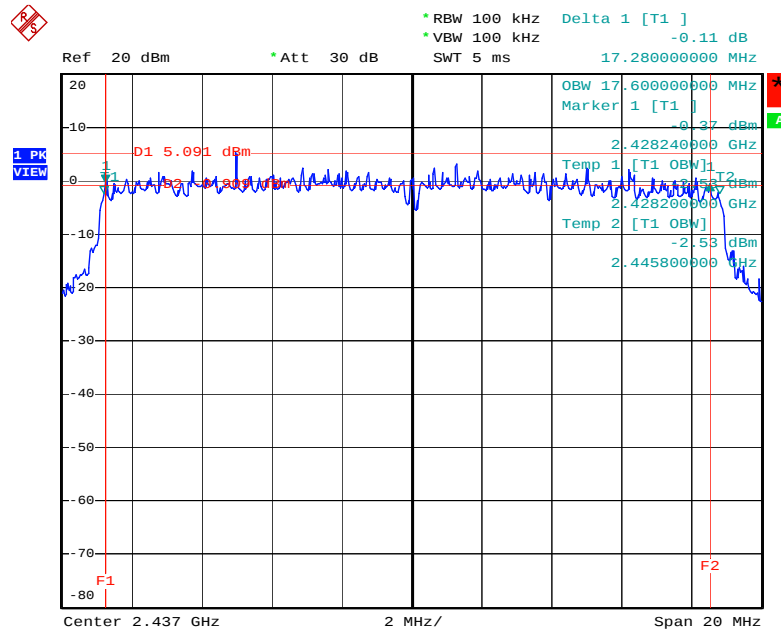


Date: 14.FEB.2008 07:21:37

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 2462 MHz

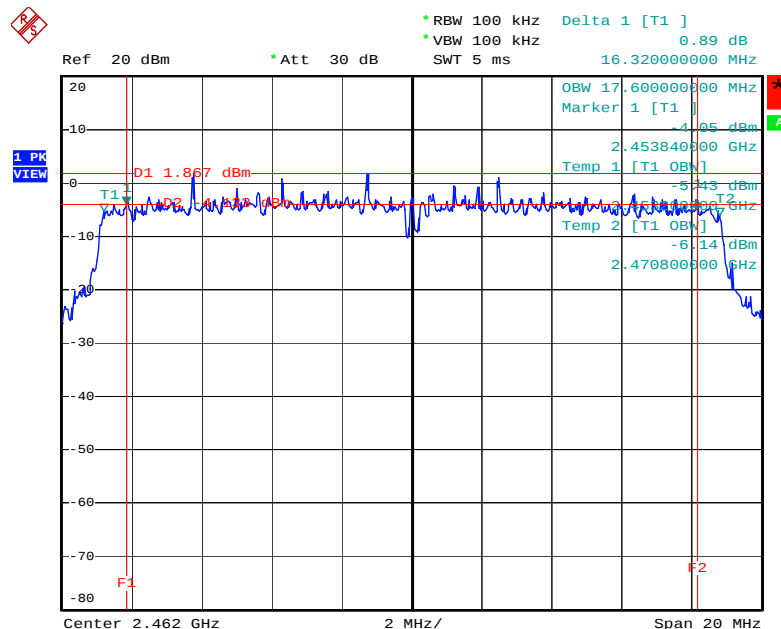


Date: 14.FEB.2008 07:22:24

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 40MHz Ant. A-1 + Ant. A-2 + Ant. A-3 / 2422 MHz

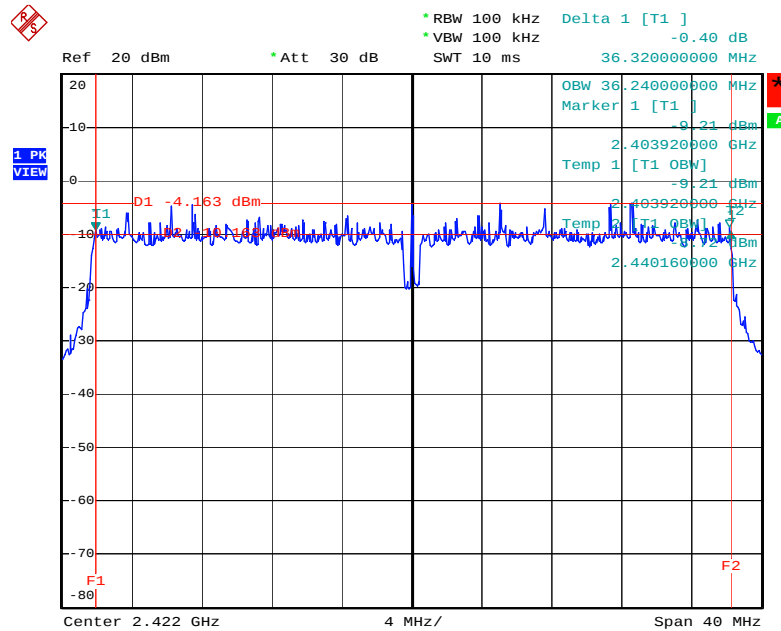


Date: 14.FEB.2008 07:05:11

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 40MHz Ant. A-1 + Ant. A-2 + Ant. A-3 / 2437 MHz

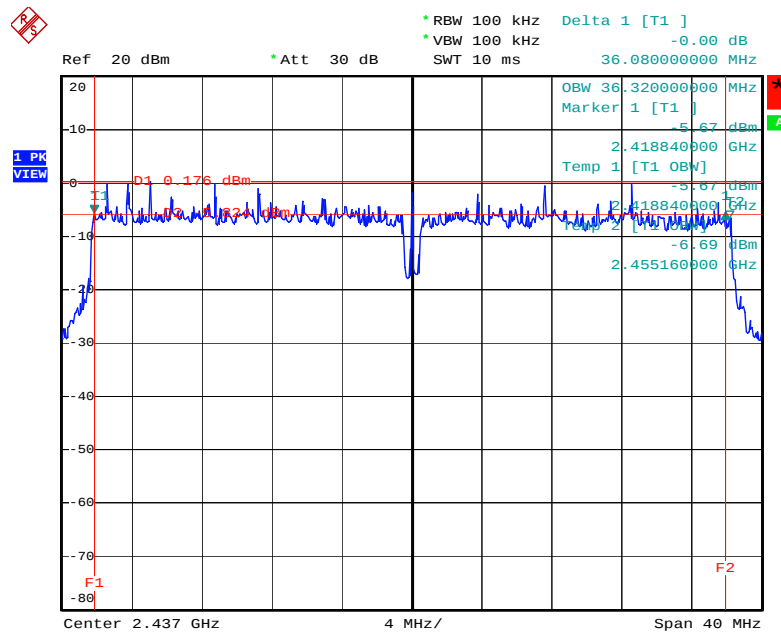


Date: 14.FEB.2008 07:07:40

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 40MHz Ant. A-1 + Ant. A-2 + Ant. A-3 / 2452 MHz

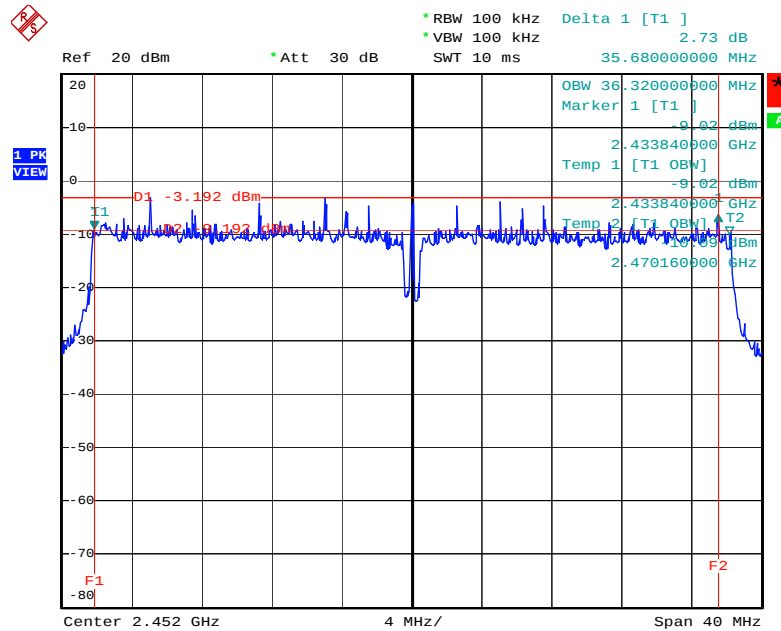


Date: 14.FEB.2008 07:08:49

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 2422 MHz

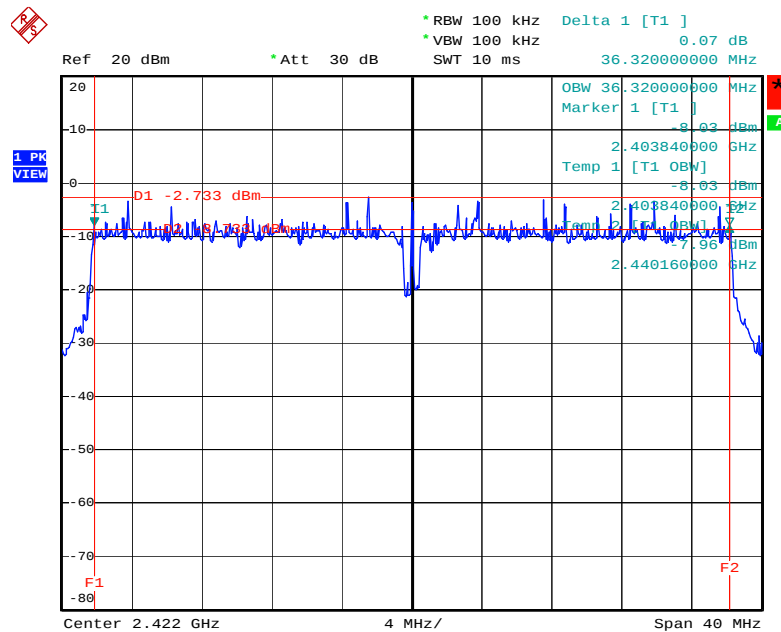


Date: 14.FEB.2008 07:18:35

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 2437 MHz

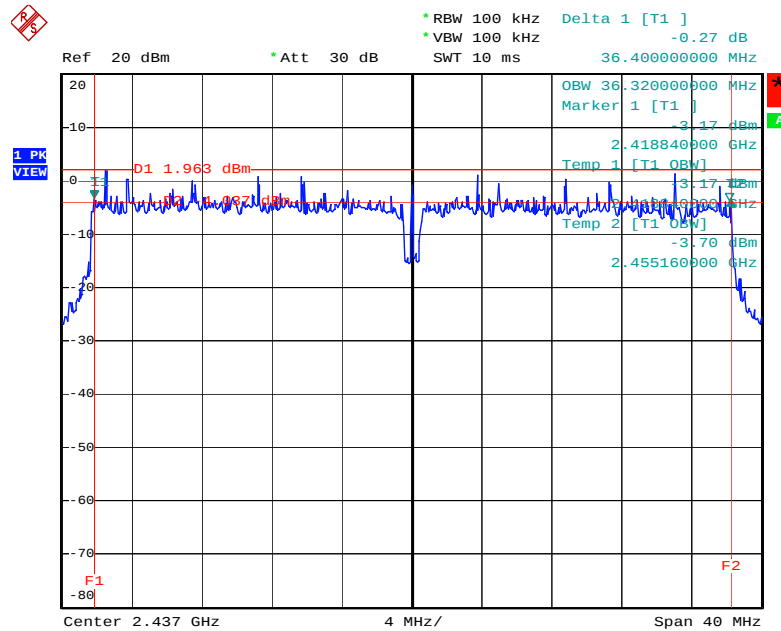


Date: 14.FEB.2008 07:17:38

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 2452 MHz

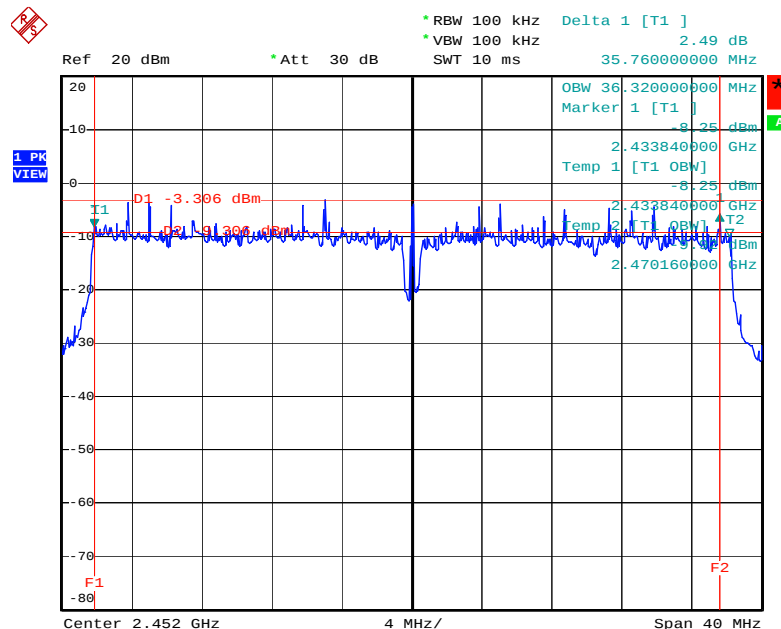


Date: 14.FEB.2008 07:16:11

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 20MHz Ant. B-1 + Ant. B-2 + Ant. B-3 / 5745 MHz

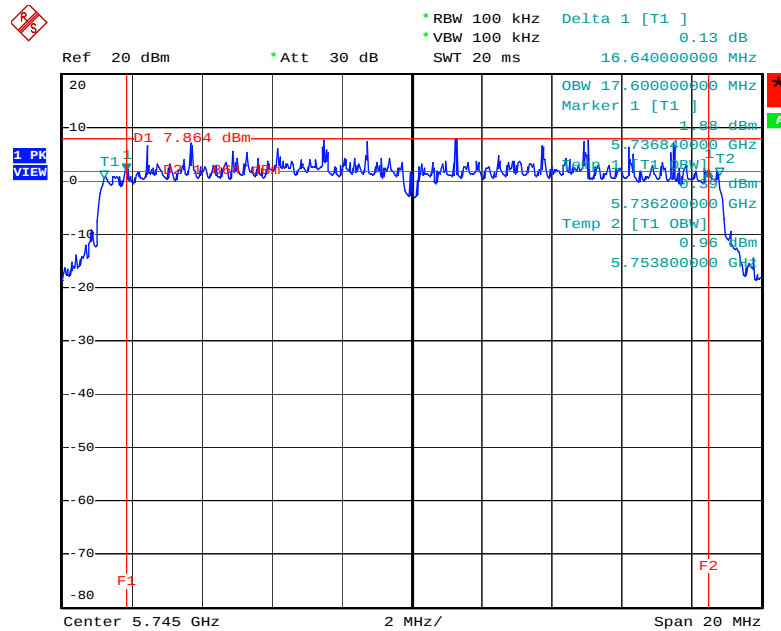


Date: 15.FEB.2008 08:50:40

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 20MHz Ant. B-1 + Ant. B-2 + Ant. B-3 / 5785MHz

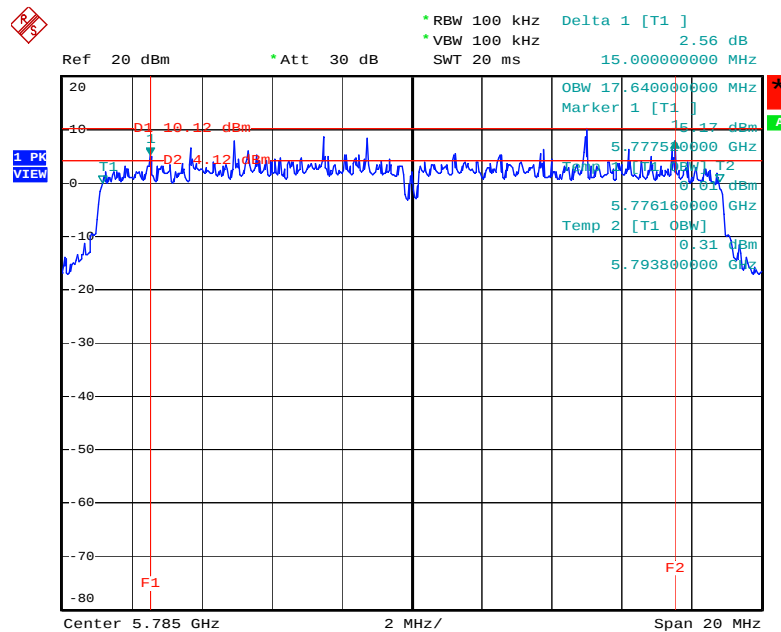


Date: 15.FEB.2008 08:57:26

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 20MHz Ant. B-1 + Ant. B-2 + Ant. B-3 / 5825 MHz

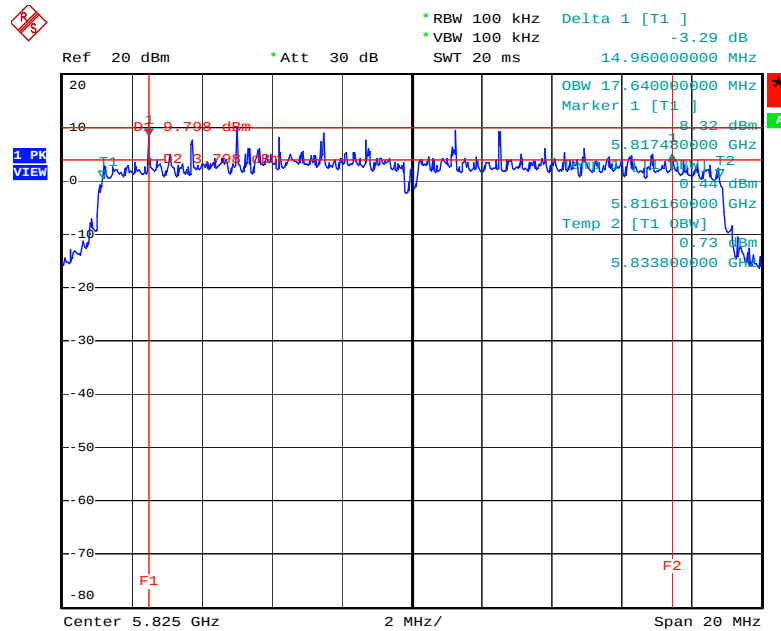


Date: 15.FEB.2008 09:01:43

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 5745 MHz

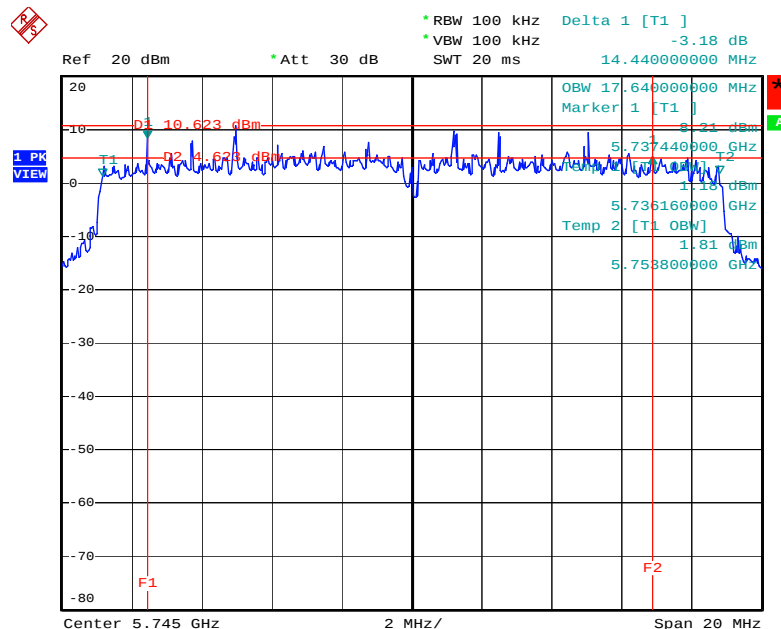


Date: 15.FEB.2008 10:50:24

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 5785MHz

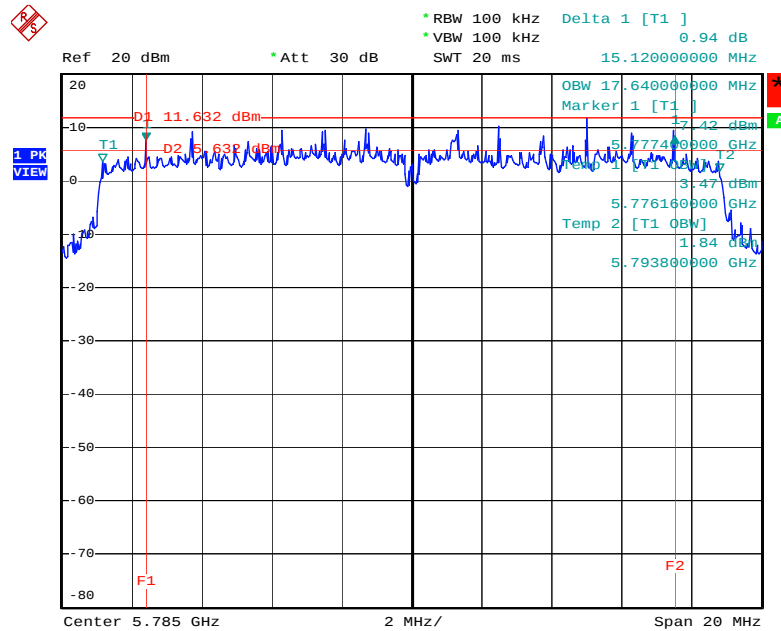


Date: 15.FEB.2008 10:54:47

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 20MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 5825 MHz

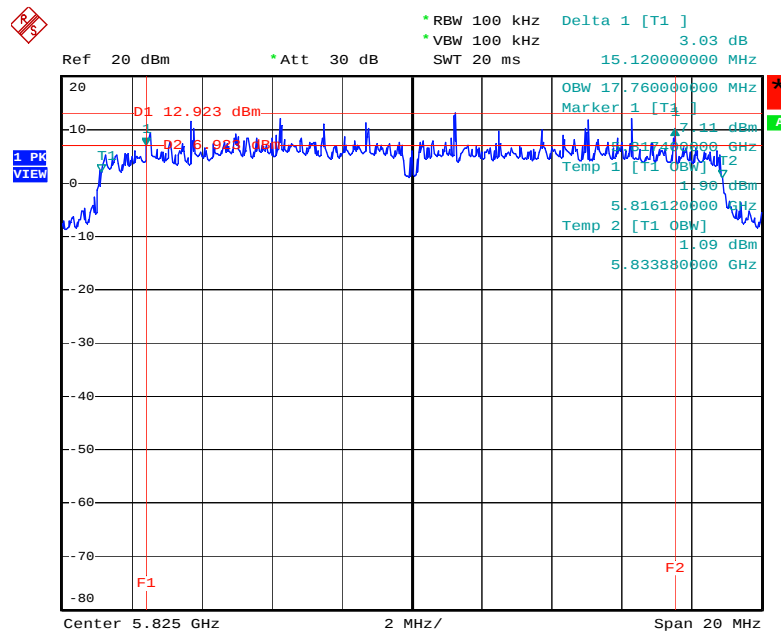


Date: 15.FEB.2008 10:59:04

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 40MHz Ant. B-1 + Ant. B-2 + Ant. B-3 / 5755MHz

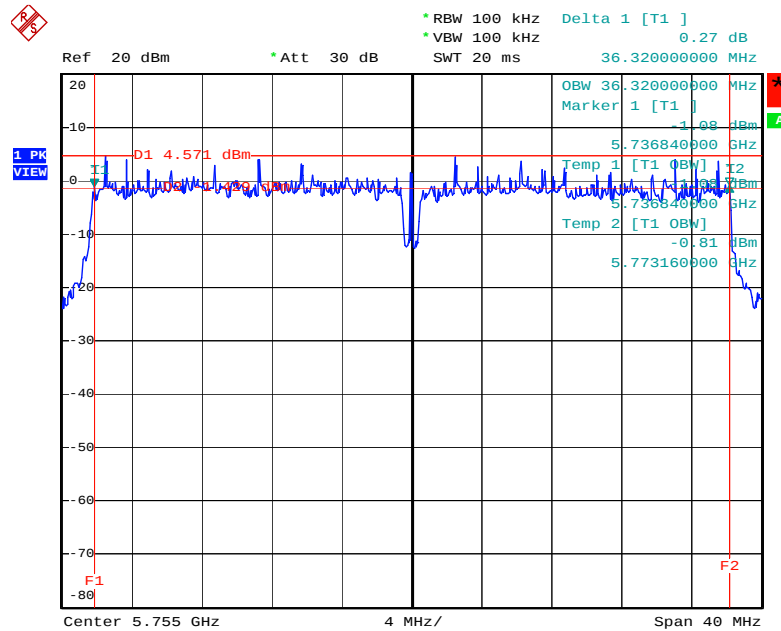


Date: 15.FEB.2008 09:06:33

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 40MHz Ant. B-1 +Ant. B-2+Ant. B-3 / 5795 MHz

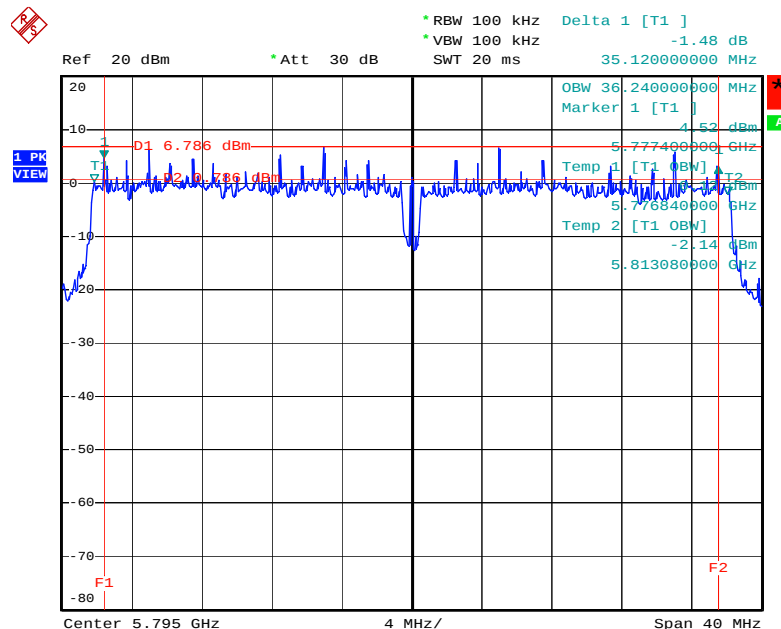


Date: 15.FEB.2008 09:11:14

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 5755MHz

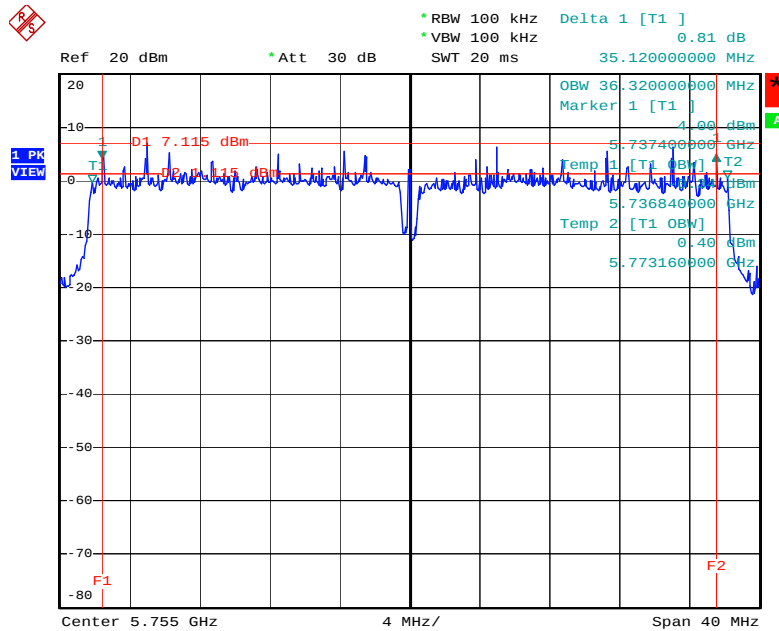

Date: 15.FEB.2008 10:45:10

### 6 dB Bandwidth Plot on Configuration Draft n MCS16 40MHz Ant. D-1 + Ant. D-2 + Ant. D-3 / 5795 MHz

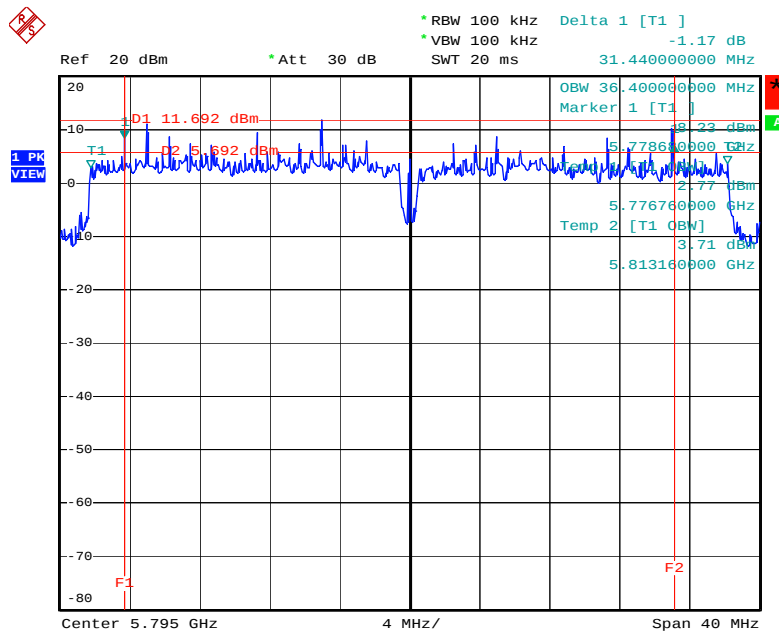

Date: 15.FEB.2008 10:31:24

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                        | Setting                                        |
|-------------------------------------------|------------------------------------------------|
| Attenuation                               | Auto                                           |
| Start Frequency                           | 1000 MHz                                       |
| Stop Frequency                            | 10th carrier harmonic                          |
| RB / VB (Emission in restricted band)     | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1000KHz / 1000KHz for peak                     |


| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout

For radiated emissions below 30MHz

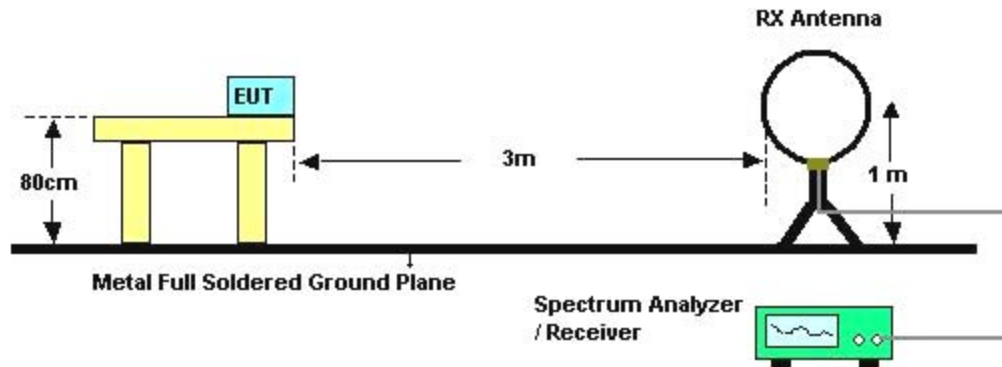

For radiated emissions above 30MHz

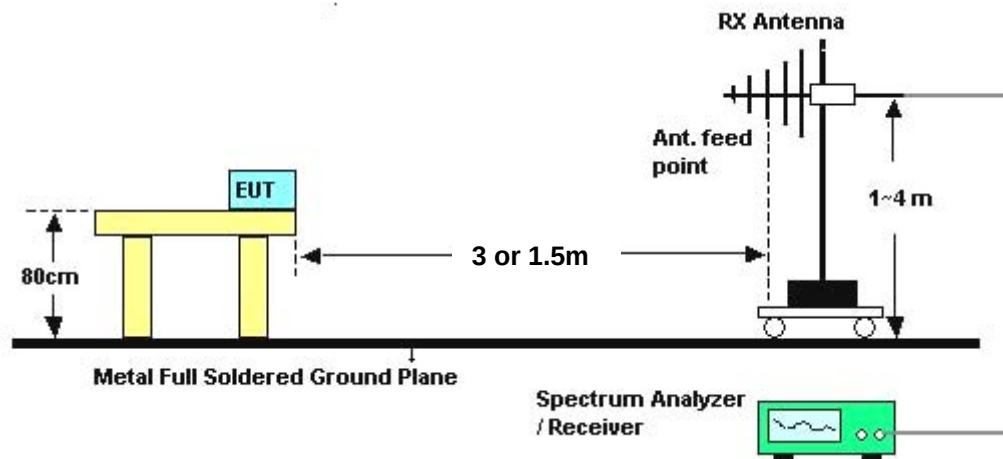

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

|               |           |          |     |
|---------------|-----------|----------|-----|
| Temperature   | 26°C      | Humidity | 56% |
| Test Engineer | Roy Huang |          |     |

| Freq.<br>(MHz) | Level<br>(dBuV) | Over Limit<br>(dB) | Limit Line<br>(dBuV) | Remark   |
|----------------|-----------------|--------------------|----------------------|----------|
| -              | -               | -                  | -                    | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.5.8. Results of Radiated Emissions (30MHz~1GHz)


|               |           |                |        |
|---------------|-----------|----------------|--------|
| Temperature   | 26℃       | Humidity       | 56%    |
| Test Engineer | Roy Huang | Configurations | Ant. A |

##### Horizontal

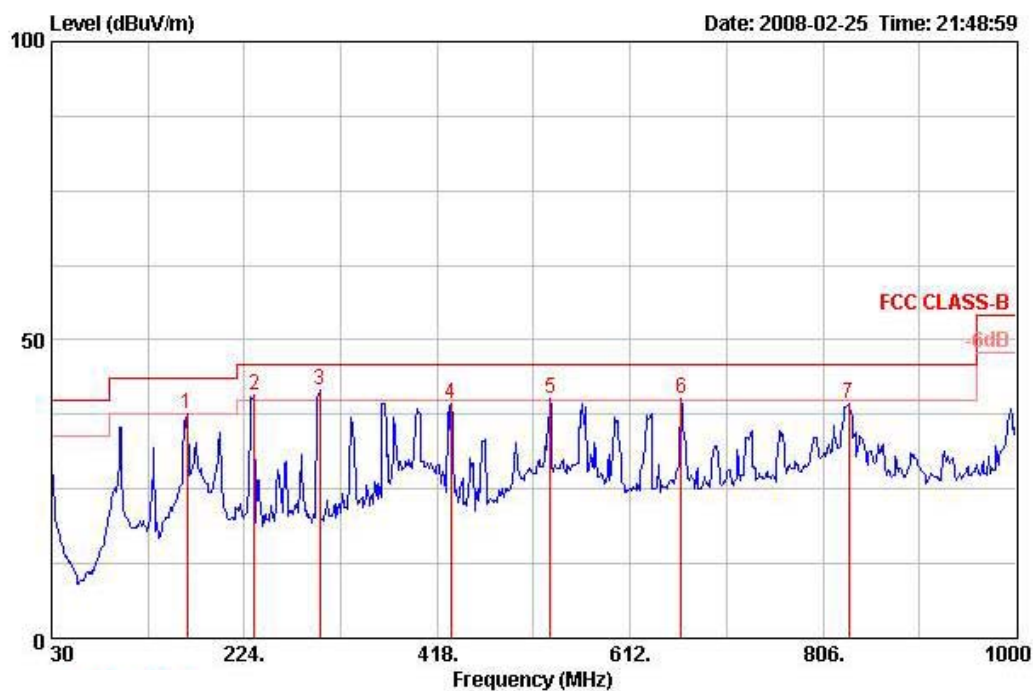

|   | Freq    | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Preamp Factor | Cable Loss | Remark | Table Pos | Ant Pos | Pol/Phase  |
|---|---------|--------|------------|------------|-------------------|----------------|---------------|------------|--------|-----------|---------|------------|
|   | MHz     | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB            | dB         |        | deg       | cm      |            |
| 1 | 166.770 | 37.61  | -5.89      | 43.50      | 54.55             | 8.79           | 27.27         | 1.53       | Peak   | 0         | 100     | HORIZONTAL |
| 2 | 233.700 | 40.69  | -5.31      | 46.00      | 55.85             | 10.04          | 27.03         | 1.83       | Peak   | 0         | 100     | HORIZONTAL |
| 3 | 299.660 | 41.55  | -4.45      | 46.00      | 53.45             | 12.90          | 26.90         | 2.10       | Peak   | 152       | 255     | HORIZONTAL |
| 4 | 431.580 | 39.35  | -6.65      | 46.00      | 48.24             | 16.38          | 27.76         | 2.49       | Peak   | 0         | 100     | HORIZONTAL |
| 5 | 531.490 | 40.13  | -5.87      | 46.00      | 47.60             | 17.87          | 28.10         | 2.76       | Peak   | 0         | 100     | HORIZONTAL |
| 6 | 663.410 | 40.06  | -5.94      | 46.00      | 45.75             | 18.90          | 28.04         | 3.45       | Peak   | 0         | 100     | HORIZONTAL |
| 7 | 832.190 | 39.45  | -6.55      | 46.00      | 43.02             | 20.60          | 27.54         | 3.36       | Peak   | 0         | 100     | HORIZONTAL |

### Vertical

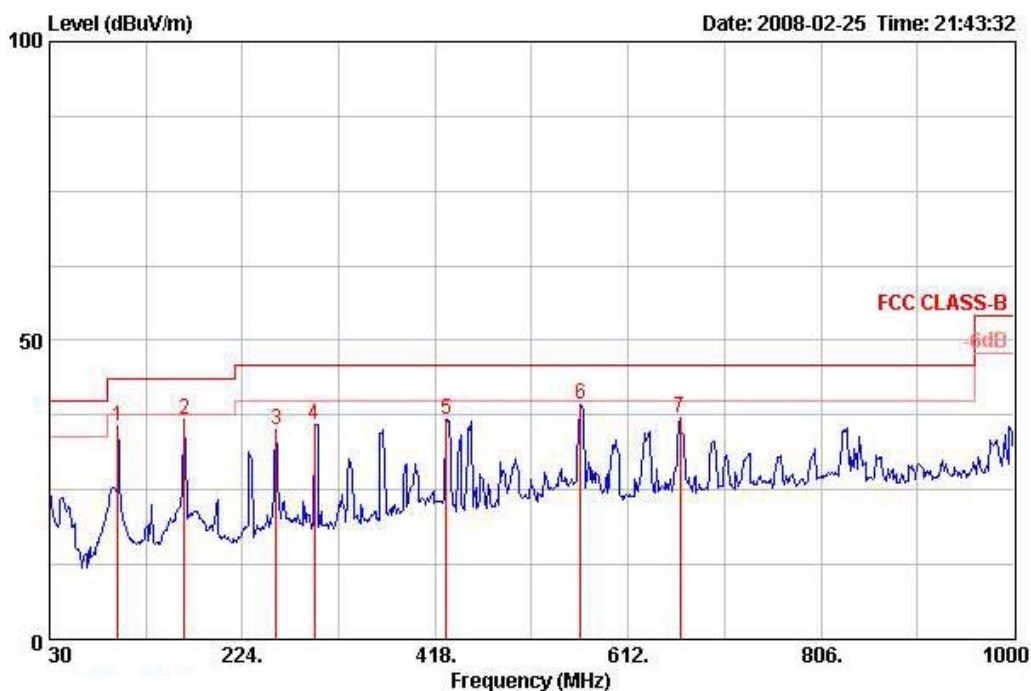

|   | Freq    | Level  | Over Limit | Limit Line | Read Level | Antenna Factor | Preamp Factor | Cable Loss | Remark | Table Pos | Ant Pos | Pol/Phase |
|---|---------|--------|------------|------------|------------|----------------|---------------|------------|--------|-----------|---------|-----------|
|   | MHz     | dBuV/m | dB         | dBuV/m     | dBuV       | dB/m           | dB            | dB         |        | deg       | cm      |           |
| 1 | 98.870  | 35.66  | -7.84      | 43.50      | 51.98      | 10.10          | 27.61         | 1.18       | Peak   | 0         | 400     | VERTICAL  |
| 2 | 165.800 | 36.84  | -6.66      | 43.50      | 53.76      | 8.82           | 27.27         | 1.53       | Peak   | 0         | 400     | VERTICAL  |
| 3 | 257.950 | 34.94  | -11.06     | 46.00      | 47.51      | 12.48          | 26.98         | 1.93       | Peak   | 0         | 400     | VERTICAL  |
| 4 | 296.750 | 35.89  | -10.11     | 46.00      | 47.87      | 12.84          | 26.91         | 2.09       | Peak   | 0         | 400     | VERTICAL  |
| 5 | 428.670 | 36.88  | -9.12      | 46.00      | 45.73      | 16.42          | 27.75         | 2.47       | Peak   | 0         | 400     | VERTICAL  |
| 6 | 564.470 | 39.30  | -6.70      | 46.00      | 45.97      | 18.60          | 28.10         | 2.83       | Peak   | 0         | 400     | VERTICAL  |
| 7 | 664.380 | 36.90  | -9.10      | 46.00      | 42.61      | 18.89          | 28.04         | 3.44       | Peak   | 0         | 400     | VERTICAL  |

### Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


|               |           |                |        |
|---------------|-----------|----------------|--------|
| Temperature   | 26°C      | Humidity       | 56%    |
| Test Engineer | Roy Huang | Configurations | Ant. D |

### Horizontal

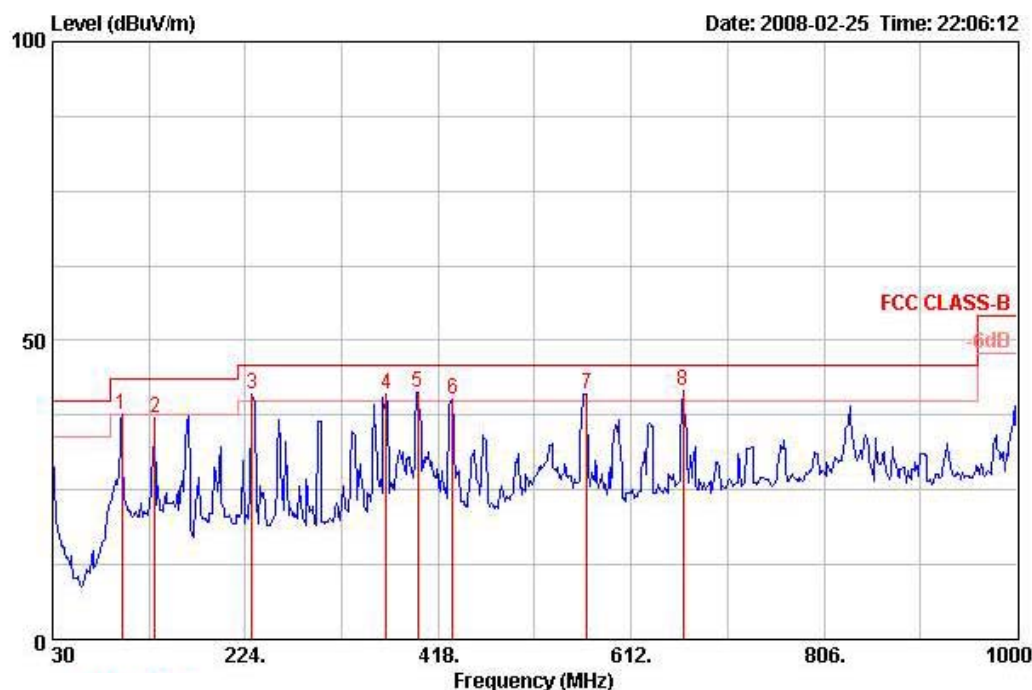

|   | Freq    | Level  | Over Limit | Limit Line | Read Level | Antenna Factor | Preamp Factor | Cable Loss | Remark | Table Pos | Ant Pos | Pol/Phase  |
|---|---------|--------|------------|------------|------------|----------------|---------------|------------|--------|-----------|---------|------------|
|   | MHz     | dBuV/m | dB         | dBuV/m     | dBuV       | dB/m           | dB            | dB         |        | deg       | cm      |            |
| 1 | 99.840  | 37.65  | -5.85      | 43.50      | 53.80      | 10.25          | 27.60         | 1.20       | Peak   | 0         | 100     | HORIZONTAL |
| 2 | 132.820 | 37.17  | -6.33      | 43.50      | 51.91      | 11.37          | 27.43         | 1.33       | Peak   | 0         | 100     | HORIZONTAL |
| 3 | 230.790 | 40.93  | -5.07      | 46.00      | 56.43      | 9.71           | 27.04         | 1.82       | Peak   | 0         | 100     | HORIZONTAL |
| 4 | 365.620 | 41.04  | -4.96      | 46.00      | 51.59      | 14.58          | 27.36         | 2.23       | Peak   | 0         | 100     | HORIZONTAL |
| 5 | 397.630 | 41.28  | -4.72      | 46.00      | 50.78      | 15.79          | 27.58         | 2.30       | Peak   | 0         | 100     | HORIZONTAL |
| 6 | 432.550 | 40.05  | -5.95      | 46.00      | 48.94      | 16.37          | 27.76         | 2.50       | Peak   | 0         | 100     | HORIZONTAL |
| 7 | 567.380 | 41.16  | -4.84      | 46.00      | 47.80      | 18.62          | 28.10         | 2.83       | Peak   | 0         | 100     | HORIZONTAL |
| 8 | 664.380 | 41.69  | -4.31      | 46.00      | 47.39      | 18.89          | 28.04         | 3.44       | Peak   | 339       | 158     | HORIZONTAL |

# Vertical

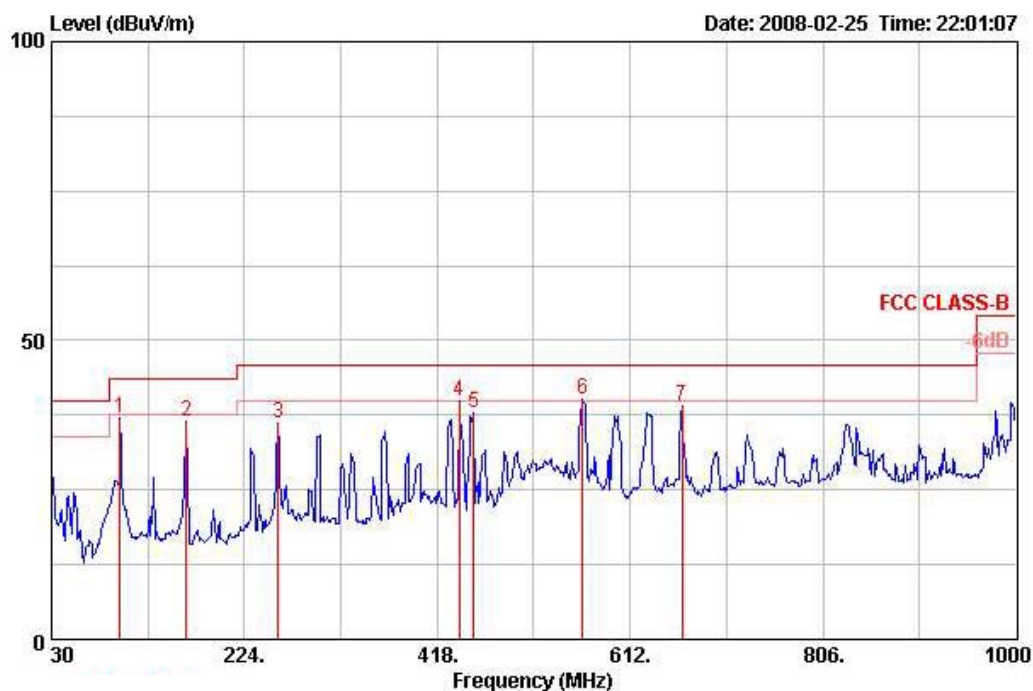

|   | Freq    | Level  | Over Limit | Limit Line | ReadAntenna | Preamp | Cable | Remark    | Table Pos | Ant Pos | Pol/Phase |
|---|---------|--------|------------|------------|-------------|--------|-------|-----------|-----------|---------|-----------|
|   | MHz     | dBuV/m | dB         | dBuV/m     | dBuV        | dB/m   | dB    | dB        | deg       | cm      |           |
| 1 | 98.870  | 37.05  | -6.45      | 43.50      | 53.37       | 10.10  | 27.61 | 1.18 Peak | 0         | 400     | VERTICAL  |
| 2 | 165.800 | 36.55  | -6.95      | 43.50      | 53.47       | 8.82   | 27.27 | 1.53 Peak | 0         | 400     | VERTICAL  |
| 3 | 257.950 | 36.23  | -9.77      | 46.00      | 48.80       | 12.48  | 26.98 | 1.93 Peak | 0         | 400     | VERTICAL  |
| 4 | 440.310 | 40.03  | -5.97      | 46.00      | 48.99       | 16.30  | 27.80 | 2.54 Peak | 0         | 400     | VERTICAL  |
| 5 | 454.860 | 37.80  | -8.20      | 46.00      | 46.76       | 16.30  | 27.87 | 2.61 Peak | 0         | 400     | VERTICAL  |
| 6 | 564.470 | 40.05  | -5.95      | 46.00      | 46.73       | 18.60  | 28.10 | 2.83 Peak | 0         | 400     | VERTICAL  |
| 7 | 664.380 | 39.00  | -7.00      | 46.00      | 44.71       | 18.89  | 28.04 | 3.44 Peak | 0         | 400     | VERTICAL  |

## Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)


|               |           |                |                                   |
|---------------|-----------|----------------|-----------------------------------|
| Temperature   | 26°C      | Humidity       | 56%                               |
| Test Engineer | Roy Huang | Configurations | Draft n MCS16 20MHz Ch 1 / Ant. A |

##### Horizontal

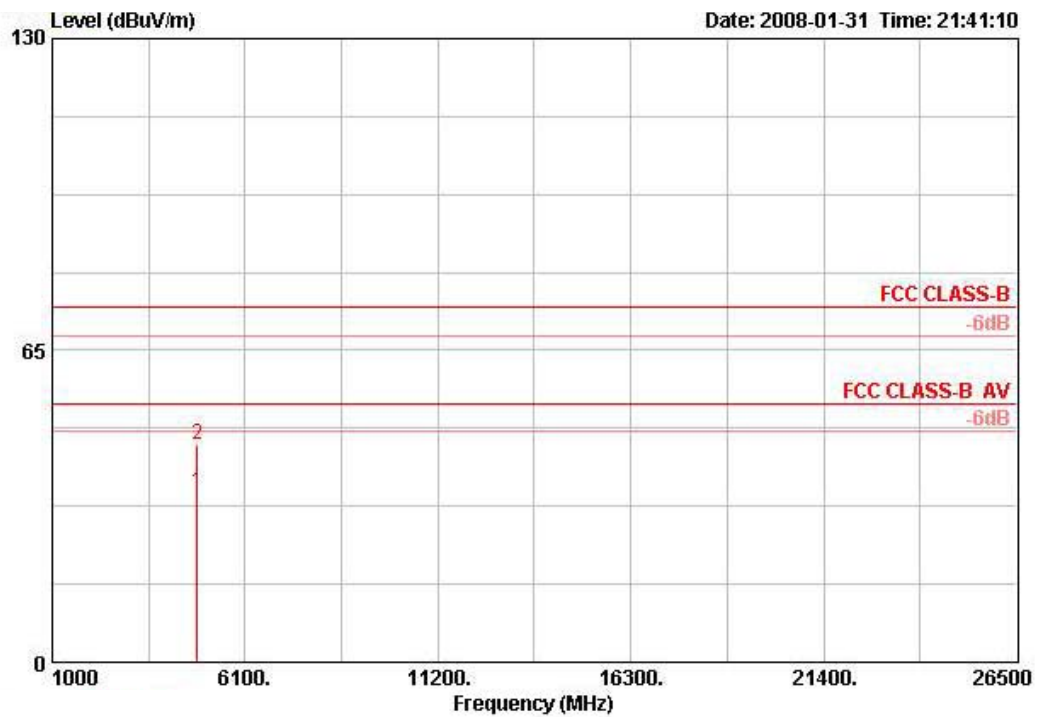

|     | Freq     | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  | Ant Pos | Table Pos | Pol/Phase  |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|------------|
|     | MHz      | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         | cm      | deg       |            |
| 1 @ | 4823.960 | 35.54  | -18.46     | 54.00      | 29.49             | 33.39          | 7.91       | 35.25         | AVERAGE | 100     | 83        | HORIZONTAL |
| 2   | 4823.960 | 45.25  | -28.75     | 74.00      | 39.19             | 33.39          | 7.91       | 35.25         | PEAK    | 100     | 83        | HORIZONTAL |


### Vertical

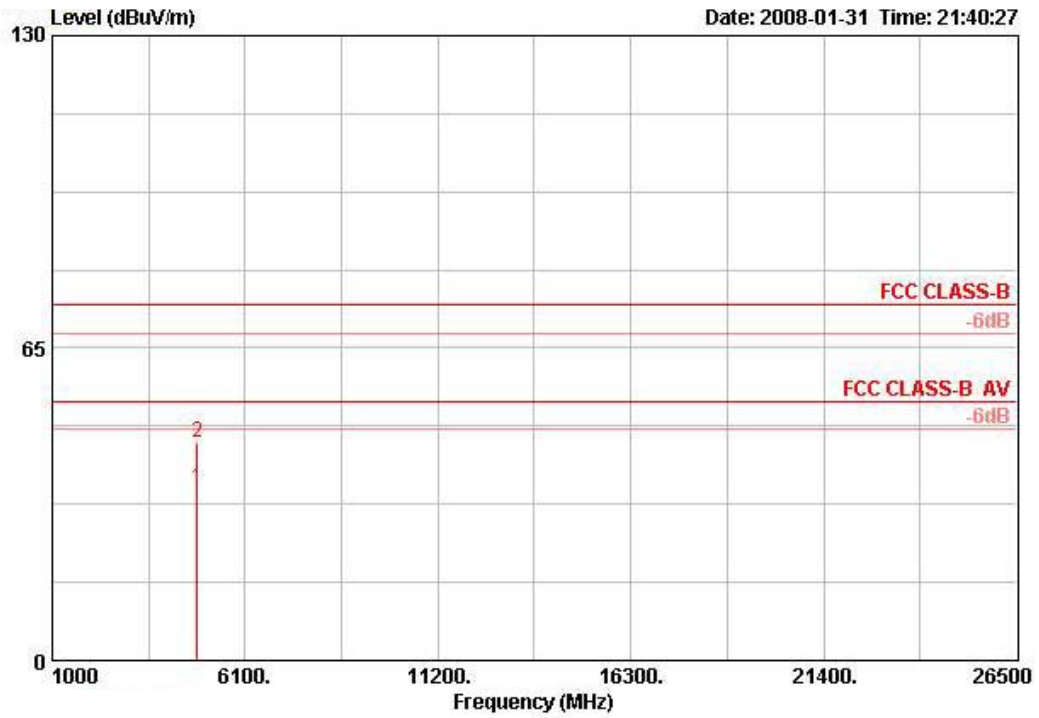

|     | Freq     | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  | Ant Pos | Table Pos | Pol/Phase |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|-----------|
|     | MHz      | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         | cm      | deg       |           |
| 1 @ | 4823.960 | 35.60  | -18.40     | 54.00      | 29.55             | 33.39          | 7.91       | 35.25         | AVERAGE | 100     | 171       | VERTICAL  |
| 2   | 4823.960 | 45.31  | -28.69     | 74.00      | 39.26             | 33.39          | 7.91       | 35.25         | PEAK    | 100     | 171       | VERTICAL  |


|               |           |                |                                   |
|---------------|-----------|----------------|-----------------------------------|
| Temperature   | 26°C      | Humidity       | 56%                               |
| Test Engineer | Roy Huang | Configurations | Draft n MCS16 20MHz Ch 6 / Ant. A |

### Horizontal

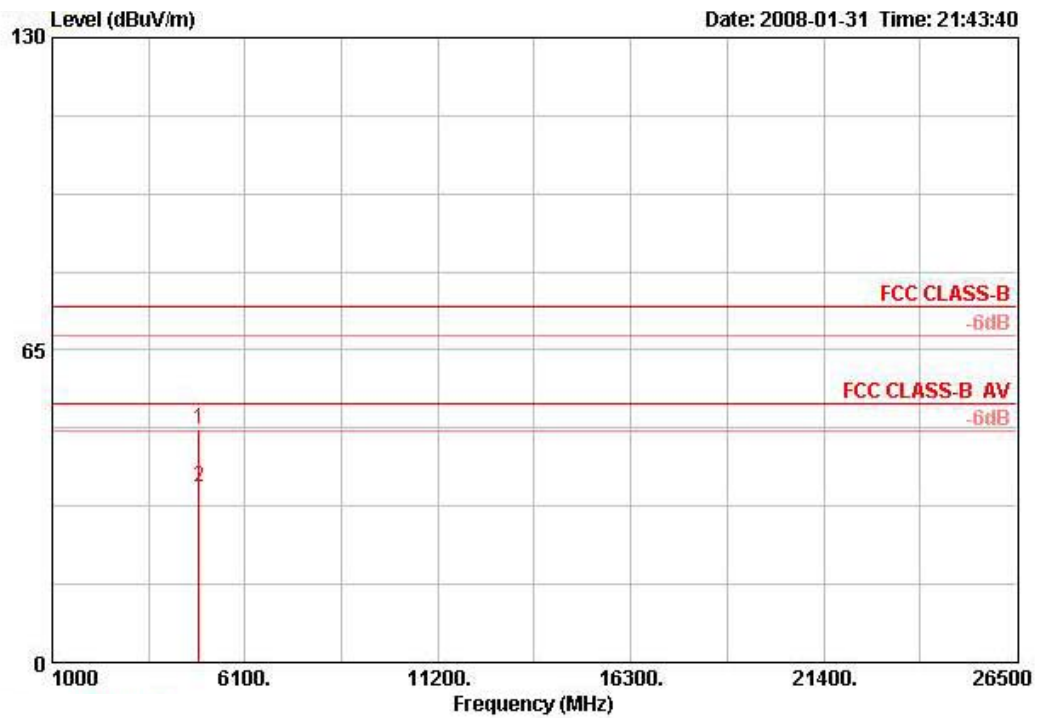

|     | Freq     | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  | Ant Pos | Table Pos | Pol/Phase  |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|------------|
|     | MHz      | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         | cm      | deg       |            |
| 1   | 4872.780 | 48.42  | -25.58     | 74.00      | 42.22             | 33.48          | 7.96       | 35.25         | PEAK    | 100     | 83        | HORIZONTAL |
| 2 @ | 4873.980 | 36.43  | -17.57     | 54.00      | 30.23             | 33.48          | 7.96       | 35.25         | AVERAGE | 100     | 83        | HORIZONTAL |


### Vertical

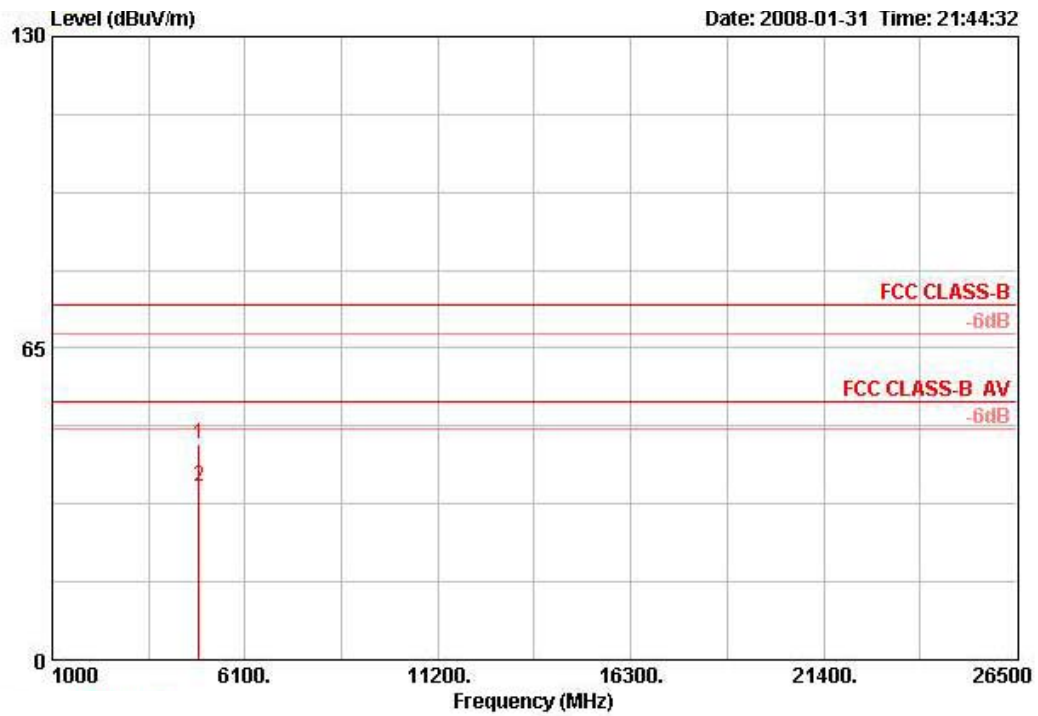

|     | Freq     | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  | Ant Pos | Table Pos | Pol/Phase |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|-----------|
|     | MHz      | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         | cm      | deg       |           |
| 1   | 4869.240 | 44.92  | -29.08     | 74.00      | 38.72             | 33.48          | 7.96       | 35.25         | PEAK    | 100     | 197       | VERTICAL  |
| 2 @ | 4873.860 | 36.21  | -17.79     | 54.00      | 30.01             | 33.48          | 7.96       | 35.25         | AVERAGE | 100     | 197       | VERTICAL  |


|               |           |                |                                   |
|---------------|-----------|----------------|-----------------------------------|
| Temperature   | 26°C      | Humidity       | 56%                               |
| Test Engineer | Roy Huang | Configurations | Draft n MCS16 20MHz Ch11 / Ant. A |

### Horizontal

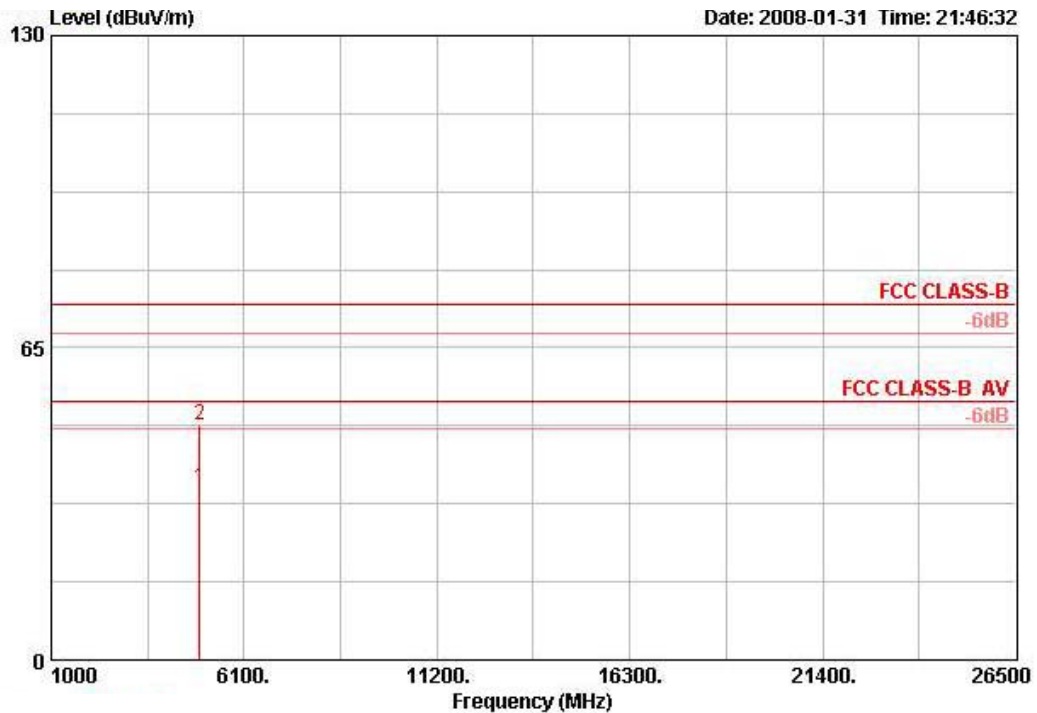

|     | Freq     | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  | Ant Pos | Table Pos | Pol/Phase  |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|------------|
|     | MHz      | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         | cm      | deg       |            |
| 1 @ | 4924.040 | 35.83  | -18.17     | 54.00      | 29.48             | 33.58          | 8.01       | 35.24         | AVERAGE | 100     | 62        | HORIZONTAL |
| 2   | 4925.140 | 48.78  | -25.22     | 74.00      | 42.44             | 33.58          | 8.01       | 35.24         | PEAK    | 100     | 50        | HORIZONTAL |


### Vertical

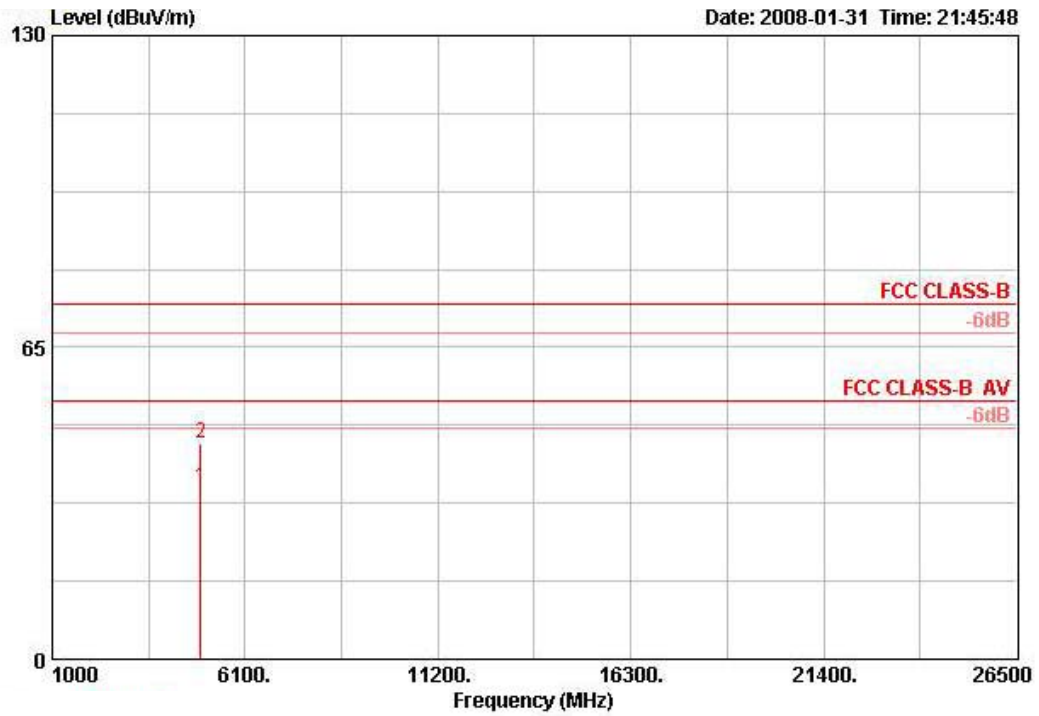

|     | Freq     | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  | Ant Pos | Table Pos | Pol/Phase |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|-----------|
|     | MHz      | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         | cm      | deg       |           |
| 1 @ | 4924.040 | 35.95  | -18.05     | 54.00      | 29.61             | 33.58          | 8.01       | 35.24         | AVERAGE | 100     | 197       | VERTICAL  |
| 2   | 4924.040 | 44.83  | -29.17     | 74.00      | 38.48             | 33.58          | 8.01       | 35.24         | PEAK    | 100     | 197       | VERTICAL  |


|               |           |                |                                   |
|---------------|-----------|----------------|-----------------------------------|
| Temperature   | 26°C      | Humidity       | 56%                               |
| Test Engineer | Roy Huang | Configurations | Draft n MCS16 20MHz Ch 1 / Ant. D |

### Horizontal

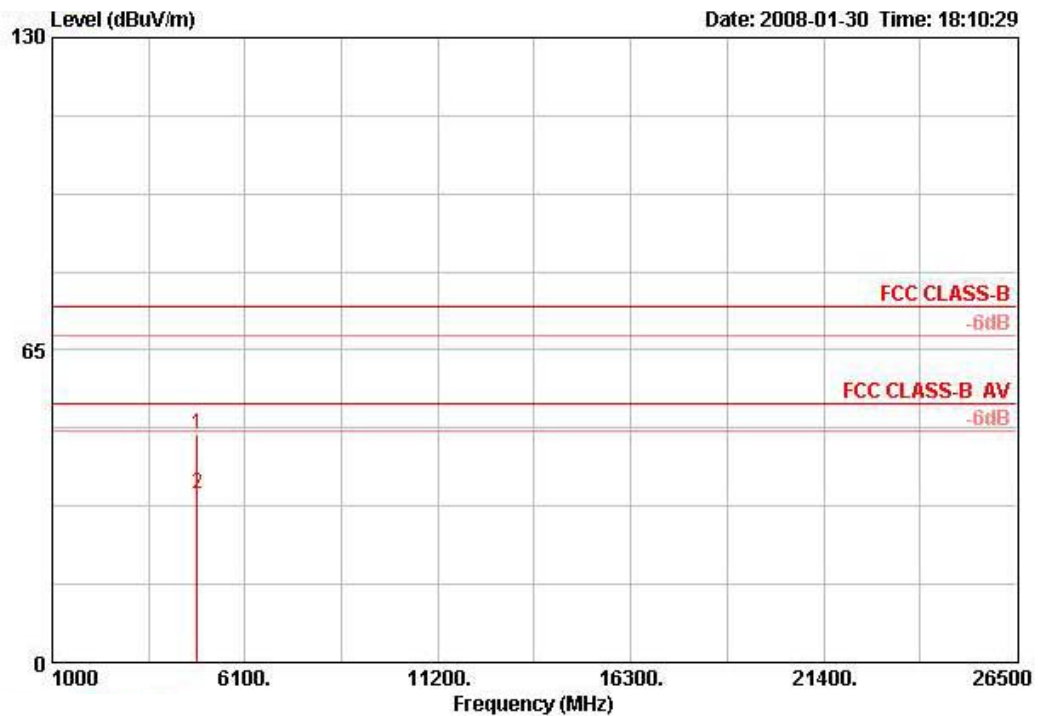

|   | Freq     | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  | Ant Pos | Table Pos | Pol/Phase  |
|---|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|------------|
|   | MHz      | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         | cm      | deg       |            |
| 1 | 4828.140 | 47.41  | -26.59     | 74.00      | 41.36             | 33.39          | 7.91       | 35.25         | PEAK    | 100     | 156       | HORIZONTAL |
| 2 | 4828.940 | 34.94  | -19.06     | 54.00      | 28.89             | 33.39          | 7.91       | 35.25         | AVERAGE | 100     | 156       | HORIZONTAL |


# Vertical

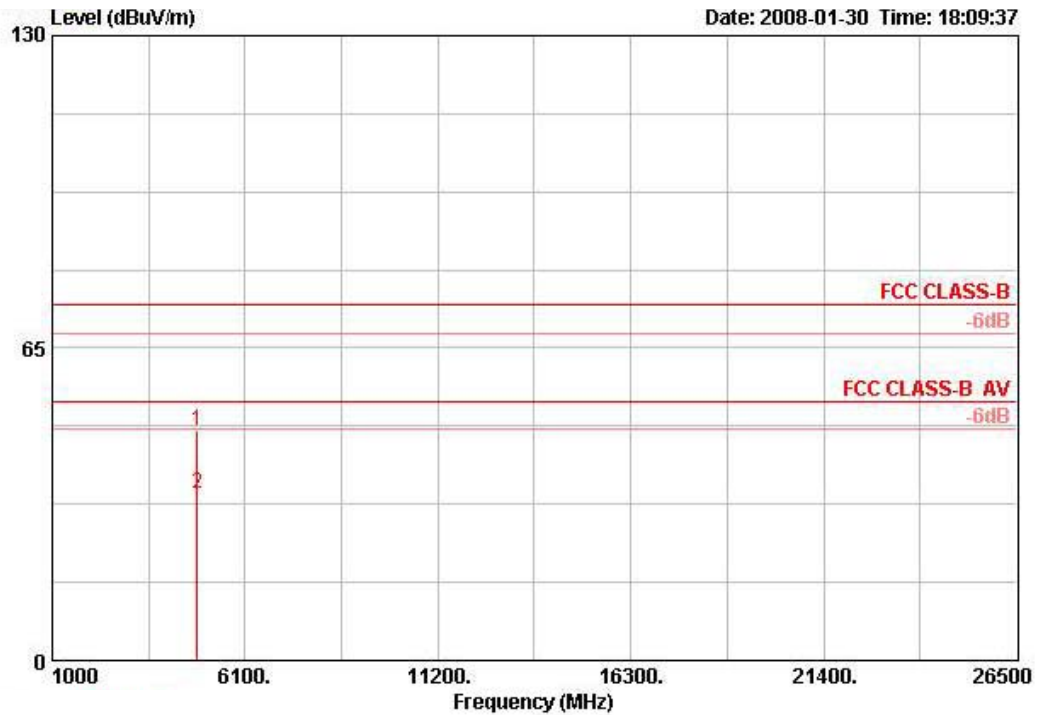

|     | Freq     | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  | Ant Pos | Table Pos | Pol/Phase |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|-----------|
|     | MHz      | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         | cm      | deg       |           |
| 1   | 4824.620 | 47.72  | -26.28     | 74.00      | 41.66             | 33.39          | 7.91       | 35.25         | PEAK    | 100     | 50        | VERTICAL  |
| 2 @ | 4826.440 | 34.61  | -19.39     | 54.00      | 28.55             | 33.39          | 7.91       | 35.25         | AVERAGE | 100     | 50        | VERTICAL  |


|               |           |                |                                   |
|---------------|-----------|----------------|-----------------------------------|
| Temperature   | 26°C      | Humidity       | 56%                               |
| Test Engineer | Roy Huang | Configurations | Draft n MCS16 20MHz Ch 6 / Ant. D |

### Horizontal

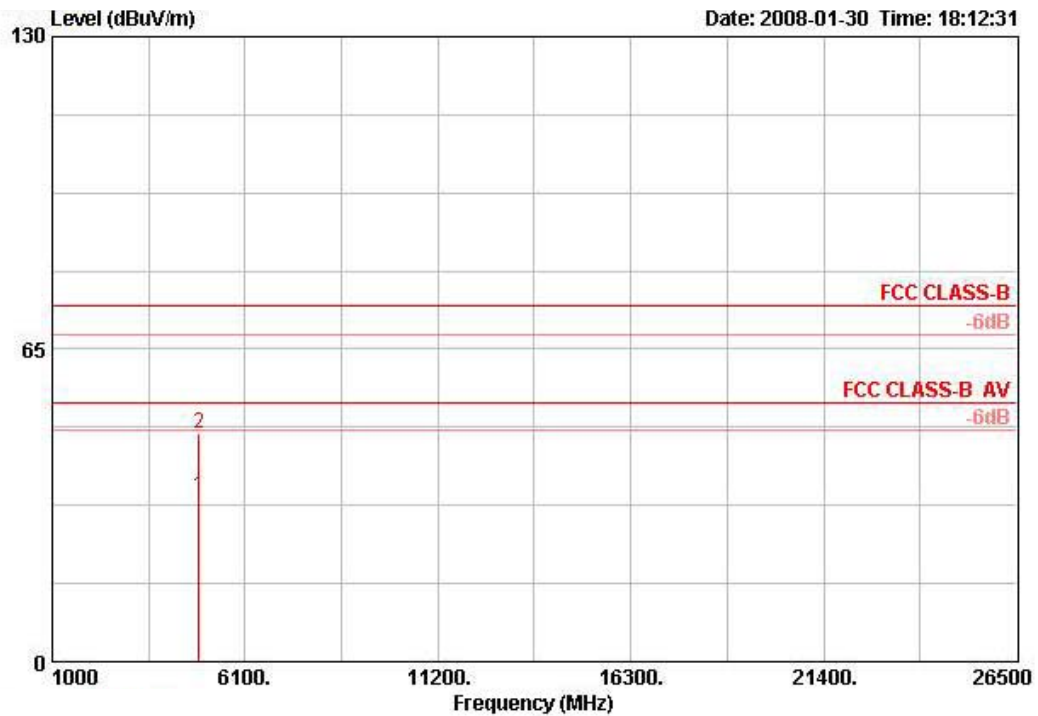

|     | Freq     | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  | Ant Pos | Table Pos | Pol/Phase  |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|------------|
|     | MHz      | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         | cm      | deg       |            |
| 1 @ | 4871.960 | 34.50  | -19.50     | 54.00      | 28.30             | 33.48          | 7.96       | 35.25         | AVERAGE | 100     | 249       | HORIZONTAL |
| 2   | 4875.460 | 47.40  | -26.60     | 74.00      | 41.20             | 33.48          | 7.96       | 35.25         | PEAK    | 100     | 249       | HORIZONTAL |


# Vertical

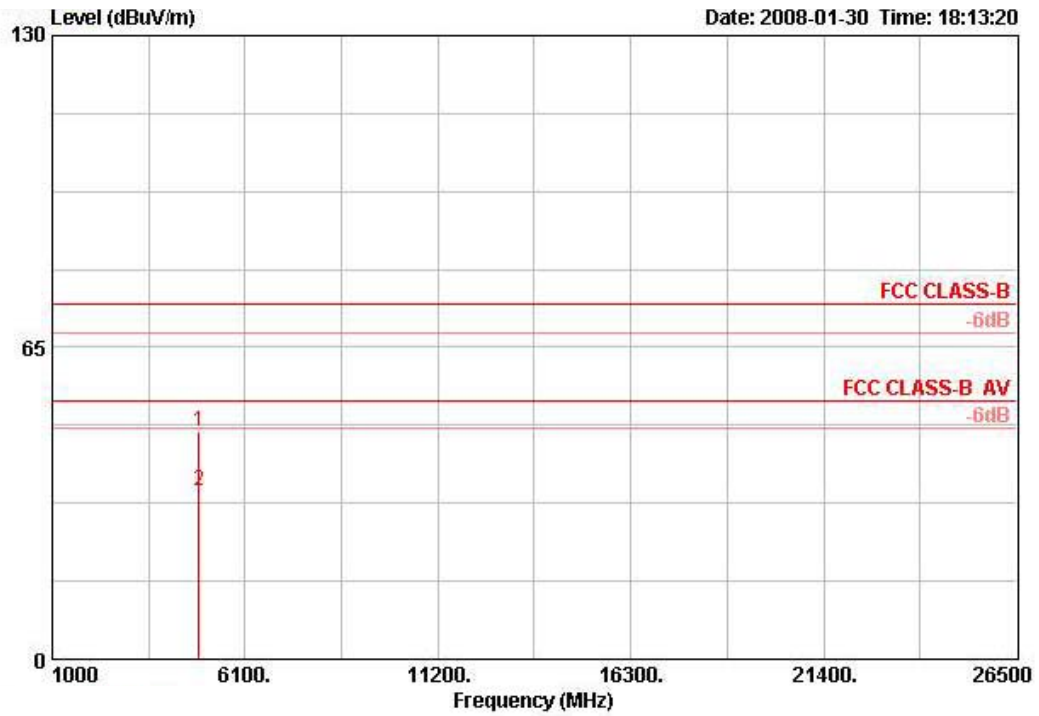

|     | Freq     | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  | Ant Pos | Table Pos | Pol/Phase |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|-----------|
|     | MHz      | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         | cm      | deg       |           |
| 1   | 4870.800 | 47.64  | -26.36     | 74.00      | 41.44             | 33.48          | 7.96       | 35.25         | PEAK    | 100     | 357       | VERTICAL  |
| 2 @ | 4878.880 | 35.18  | -18.82     | 54.00      | 28.98             | 33.48          | 7.96       | 35.25         | AVERAGE | 100     | 357       | VERTICAL  |

|               |           |                |                                   |
|---------------|-----------|----------------|-----------------------------------|
| Temperature   | 26°C      | Humidity       | 56%                               |
| Test Engineer | Roy Huang | Configurations | Draft n MCS16 20MHz Ch11 / Ant. D |

### Horizontal

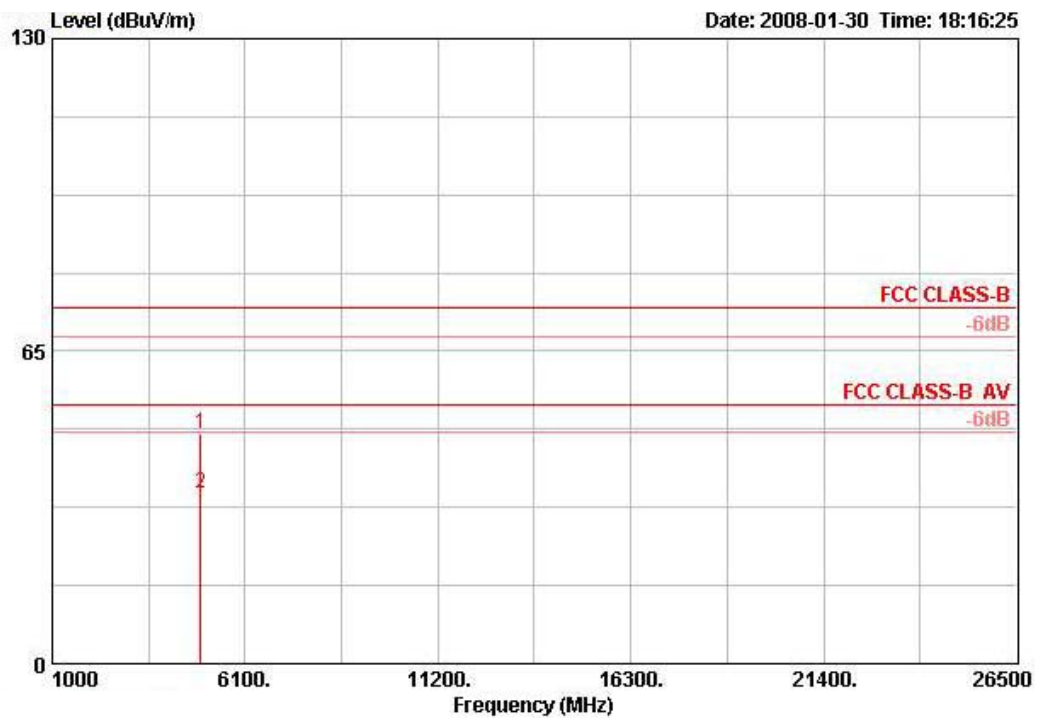

|     | Freq     | Level  | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamp Factor | Remark  | Ant Pos | Table Pos | Pol/Phase  |
|-----|----------|--------|------------|------------|-------------------|----------------|------------|---------------|---------|---------|-----------|------------|
|     | MHz      | dBuV/m | dB         | dBuV/m     | dBuV              | dB/m           | dB         | dB            |         | cm      | deg       |            |
| 1   | 4926.220 | 47.69  | -26.31     | 74.00      | 41.34             | 33.58          | 8.01       | 35.24         | PEAK    | 100     | 46        | HORIZONTAL |
| 2 @ | 4926.660 | 35.30  | -18.70     | 54.00      | 28.95             | 33.58          | 8.01       | 35.24         | AVERAGE | 100     | 46        | HORIZONTAL |