



Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 60090

FCC Rules and Regulations / Intentional Radiators

Operational in the 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz Bands

Part 15, Subpart C, Section 15.249

THE FOLLOWING **"MEETS"** THE ABOVE TEST SPECIFICATION

Formal Name: Classroom Response System - Renaissance Responder
Kind of Equipment: IEEE 802.15.4 transceiver
Test Configuration: NA (Tested at 3.3 vdc)
Model Number(s): RES-1001
Model(s) Tested: RES-1001
Serial Number(s): RES-1001.00002
Date of Tests: February 27, 2006
Test Conducted For: Renaissance Learning, Inc.
2911 Peach Street
Wisconsin Rapids, Wisconsin 54494

NOTICE: "This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government". Please see the "Additional Description of Equipment Under Test" page listed inside of this report. This report must not be reproduced (except in full), without the approval of D.L.S. Electronic Systems.



Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 60090

SIGNATURE PAGE

Report By:

Arnom C. Rowe
Test Engineer
EMC-001375-NE

Reviewed By:

William Stumpf
OATS Manager

Approved By:

Brian Mattson
General Manager

Company Official:

Renaissance Learning, Inc.



Company: Renaissance Learning, Inc.
 Model Tested: RES-1001
 Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009

TABLE OF CONTENTS

i. Cover Page1

ii. Signature Page2

iii. Table of Contents.....3

iv. NVLAP Certificate of Accreditation4

v. NVLAP Scope of Accreditation5

1.0 Summary of Test Report.....13

2.0 Introduction.....13

3.0 Object.....13

4.0 Test Set-Up14

5.0 Test Equipment15

6.0 Ambient Measurements16

7.0 Description of Test Sample.....17

8.0 Additional Description of Test Sample.....18

9.0 Photo Information and Test Set-Up19

10.0 Radiated Photos Taken During Testing20

11.0 Results of Tests.....23

12.0 Conclusion23

TABLE 1 – EQUIPMENT LIST24

Appendix A – Electric Field Radiated Emissions Test.....26

1.0 Conducted Emission Measurements27

2.0 Band Edge and Restrict Band Compliance28

2.0 Data and Graph(s) taken showing the Band Edge and Restrict Band Compliance29

3.0 Field Strength of Spurious Emission Measurements34

3.0 Radiated Data and Graph(s) taken for Fundamental Emission Measurements36

3.0 Radiated Data and Graph(s) taken for Field Strength Spurious Emission Measurements40



Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:1999

NVLAP LAB CODE: 100276-0

D.L.S. Electronic Systems, Inc.
Wheeling, IL

is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in
NIST Handbook 150:2001 and all requirements of ISO/IEC Guide 17025:1999.
Accreditation is granted for specific services, listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS



For the National Institute of Standards and Technology

2005-10-01 through 2006-09-30


Effective dates

NVLAP-01C (REV. 2005-05-19)



Company: Renaissance Learning, Inc.
 Model Tested: RES-1001
 Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009



SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999

D.L.S. Electronic Systems, Inc.
 1250 Peterson Drive
 Wheeling, IL 60090-6454
 Mr. Brian J. Mattson
 Phone: 847-537-6400 Fax: 847-537-6488
 E-Mail: bmattson@dlsemc.com
 URL: <http://www.dlsemc.com>

**ELECTROMAGNETIC COMPATIBILITY
 AND TELECOMMUNICATIONS**

NVLAP LAB CODE 100276-0

NVLAP Code Designation / Description

Emissions Test Methods:

- 12/160D21 RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 21 - Emission of Radio Frequency Energy
- 12/300220a EN 300 220-1 V1.3.1 (2000-09): Electromagnetic compatibility and Radio spectrum Matters; Short Range Devices; Radio equipment to be used in the 25 MHz to 1000 MHz frequency range with power levels ranging up to 500 mW; Part 1: Technical characteristics and test methods
- 12/300386a EN 300 386 V.1.2.1: Electromagnetic compatibility and radio spectrum matter (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements
- 12/C63.17 ANSI C63.17-1998: American National Standard for Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices
- 12/C6317a ANSI C63.17-1998: American National Standard for Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices
- 12/CIS11 IEC/CISPR 11 + A1 (1997), EN 55011 (1998), AS/NZS CISPR 11 (2002), and CNS 13803 (1997): Limits and Methods of Measurement of Electromagnetic Disturbance Characteristics of Industrial, Scientific, and Medical Radio-Frequency Equipment

2005-10-01 through 2006-09-30


Effective dates

For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.
 Model Tested: RES-1001
 Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY
 AND TELECOMMUNICATIONS**

NVLAP LAB CODE 100276-0

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/CIS13	IEC/CISPR 13 (2001-04), EN 55013 (2001), AS/NZS CISPR 13 (2003), and CNS 13439 (2001): Sound and television broadcast receivers and associated equipment - Radio disturbance characteristics - Limits and methods of measurement
12/CIS14	CISPR 14-1 (March 30, 2000): Limits and Methods of Measurement of Radio interference Characteristics of Household Electrical Appliances, Portable Tools and Similiar Electrical Apparatus - Part 1: Emissions
12/CIS14a	EN 55014-1 (1993), A1 (1997), A2 (1999):
12/CIS14d	IEC/CISPR 14-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emissions
12/CIS14e	EN 55014-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission
12/CIS14f	AS/NZS 1044 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission
12/CIS14g	CNS 13783-1 (2001) and A1 (2001): Electromagnetic Compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission
12/CIS15	IEC/CISPR 15 (2000) + A1 (2001): Limits and methods of measurements of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS15a	AS/NZS CISPR 15 (2002): Limits and methods of measurements of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS15b	CNS 13439 (2000) + A1 (2001): Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS15c	EN 55015 (2000) + A1 (2001): Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
12/CIS22	IEC/CISPR 22 (1997) & EN 55022 (1998) + A1(2000): Limits and methods of measurement of radio disturbance characteristics of information technology equipment

2005-10-01 through 2006-09-30


Effective dates

For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.
 Model Tested: RES-1001
 Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY
 AND TELECOMMUNICATIONS**

NVLAP LAB CODE 100276-0

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/CIS22a	IEC/CISPR 22 (1993) and EN 55022 (1994): Limits and methods of measurement of radio disturbance characteristics of information technology equipment, Amendment 1 (1995) and Amendment 2 (1996)
12/CIS22b	CNS 13438 (1997): Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment
12/EM02a	IEC 61000-3-2, Edition 2.1 (2001-10), EN 61000-3-2 (2000), and AS/NZS 2279.1 (2000): Electromagnetic compatibility (EMC) Part 3-2: Limits - Limits for harmonic current emissions (equipment input current <= 16 A)
12/EM03	IEC 61000-3-3(1995); EN 61000-3-3(1995); AS/NZS 2279.3(1995): EMC - Part 3: Limits - Section 3. Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current up to 16A
12/F18	FCC OST/MP-5 (1986): FCC Methods of Measurement of Radio Noise Emissions for ISM Equipment (cited in FCC Method 47 CFR Part 18 - Industrial, Scientific, and Medical Equipment)
12/FCC15b	ANSI C63.4 (2003) with FCC Method 47 CFR Part 15, Subpart B: Unintentional Radiators
12/FCC15c	ANSI C63.4 (2003) with FCC Method 47 CFR Part 15, Subpart C: Intentional Radiators
12/FCC15d	ANSI C63.17(1998) and ANSI C63.4 (2003): with FCC Method - 47 CFR Part 15, Subpart D: Unlicensed Personal Communications Service Devices
12/FCC15e	ANSI C63.4 (2003) with FCC Method 47 CFR Part 15, Subpart E: Unlicensed National Information Infrastructure Service Devices
12/T51a	AS/NZS CISPR 22 (2004): Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement
12/VCCIa	VCCI: Agreement of Voluntary Control Council for Interference by Information Technology Equipment - Technical Requirements: V-3/2005.04

2005-10-01 through 2006-09-30


Effective dates

For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.
 Model Tested: RES-1001
 Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY
 AND TELECOMMUNICATIONS**

NVLAP LAB CODE 100276-0

NVLAP Code Designation / Description

Immunity Test Methods:

12/1089a	GR-1089-CORE, Issue 3, October 2002: Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment (sections 2, 3.3, and 3.5)
12/160D16	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 16 - Power Input
12/160D17	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 17 - Voltage Spike
12/160D18	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 18 - Audio Frequency Conducted Susceptibility - Power Inputs
12/160D19	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 19 - Induced Signal Susceptibility
12/160D20	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 20 - Radio Frequency Susceptibility (Radiated and Conducted)
12/160D22	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 22 - Lightning Induced Transient Susceptibility
12/160D25	RTCA/DO-160D (1997): Environmental Conditions and Test Procedures for Airborne Equipment - Section 25 - Electrostatic Discharge (ESD)
12/101	IEC 61000-4-2, Ed. 1.2 (2001) + A1, A2; EN 61000-4-2: Electrostatic Discharge Immunity Test
12/102	IEC 61000-4-3, Ed. 2.0 (2002-03); EN 61000-4-3 (2002): Radiated Radio-Frequency Electromagnetic Field Immunity Test
12/103	IEC 61000-4-4(1995), A1(2000), A2(2001); EN 61000-4-4: Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical Fast Transient/Burst Immunity Test

2005-10-01 through 2006-09-30


Effective dates

For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.
 Model Tested: RES-1001
 Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY
AND TELECOMMUNICATIONS**

NVLAP LAB CODE 100276-0

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/I04	IEC 61000-4-5, Ed. 1.1 (2001-04); EN 61000-4-5: Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test
12/I05	IEC 61000-4-6, Ed. 2.0 (2003-05); EN 61000-4-6: Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields
12/I06	IEC 61000-4-8, Ed. 1.1 (2001); EN 61000-4-8: Electromagnetic compatibility (EMC) - Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test
12/I07	IEC 61000-4-11, Ed. 1.1 (2001-03); EN 61000-4-11: Voltage Dips, Short Interruptions and Voltage Variations Immunity Tests
12/J111324	SAE J1113/24: Immunity to radiated electromagnetic fields; 10 kHz to 200 MHz - Crawford TEM cell and 10 kHz to 5 GHz - Wideband TEM cell
12/J111341	SAE J1113/41 (1995-07): Limits and methods of measurement of radio disturbance characteristics of components and modules for the protection of receivers used on board vehicles

Radio Test Methods

12/RSS119	RSS-119, Issue 6 (March 25, 2000): Land Mobile and Fixed Radio Transmitters and Receivers, 27.41 to 960 MHz
12/RSS123	RSS-123, Issue 1, Rev. 2 (November 6, 1999): Low Power Licensed Radiocommunication Devices
12/RSS125	RSS-125 (March 25, 2000): Land Mobile and Fixed Radio Transmitters and Receivers, 1.705 to 50.0 MHz, Primarily Amplitude Modulated
12/RSS131	RSS-131, Issue 2 (July 2003): Zone Enhancers for the Land Mobile Service
12/RSS132	RSS-132, Issue 1 (August 2002): 800 MHz Cellular Telephones Employing New Technologies
12/RSS133	RSS-133, Issue 3 (June 2005): 2GHz Personal Communications Services

2005-10-01 through 2006-09-30


Effective dates

For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.
 Model Tested: RES-1001
 Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY
 AND TELECOMMUNICATIONS**

NVLAP LAB CODE 100276-0

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/RSS134	RSS-134, Issue 1, Rev. 1 (March 25, 2000): 900 MHz Narrowband Personal Communication Service
12/RSS135	RSS-135, Issue 1 (October 26, 1996): Digital Scanner Receivers
12/RSS136	RSS-136, Issue 5 (October 2002): Land and Mobile Station Radiotelephone Transmitters and Receivers Operating in the 26.960 - 27.410 MHz General Radio Service Band
12/RSS137	RSS-137, Issue 1, Rev. 1 (September 25, 1999): Location and Monitoring Service (902 - 928 MHz)
12/RSS139	RSS-139, Issue 1 (February 5, 2000): Licensed Radiocommunications Devices in the Band 2400 - 2483.5 MHz
12/RSS141	RSS-141, Issue 1, Revision 1 (February 7, 2004): Aeronautical Radiocommunication Equipment in the Frequency Band 117.975 - 137 MHz
12/RSS142	RSS-142, Issue 2 (August 2002): Narrowband Multipoint Communication Systems in the 1,427 - 1,430 MHz and 1,493.5 - 1,496.5 MHz Bands
12/RSS170	RSS-170, Issue 1, Rev. 1 (November 6, 1999): Satellite Mobile Earth Stations
12/RSS191	RSS-191, Issue 2 (August 2002): Local Multipoint Communication Systems in the 28 GHz Band; Point-to-Point and Point-to-Multipoint Broadband Communication Systems in the 24 GHz and 38 GHz Bands
12/RSS192	RSS-192, Issue 2 (2004): Fixed Wireless Access Systems in the Band 3450 - 3650 MHz
12/RSS193	RSS-193, Issue 1 (July 2003): Multipoint and Point-to-Point Communication Systems (MCS) in the Fixed Service Operating in the 2,150 - 2,160 MHz, 2,500 - 2,596 MHz and 2,686 - 2,690 MHz Bands
12/RSS210	RSS-210, Issue 6 (Sept. 2005): Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
12/RSS212	RSS-212, Issue 1 (February 27, 1999): Test Facilities and Test Methods for Radio Equipment

2005-10-01 through 2006-09-30


Effective dates

For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.
 Model Tested: RES-1001
 Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY
AND TELECOMMUNICATIONS**

NVLAP LAB CODE 100276-0

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/RSS213	RSS-213, Issue 1 (April 24, 1999): 2 GHz Licence-Exempt Personal Communications Service Devices (PCS)
12/RSS215	RSS-215, Issue 1 (November 6, 1999): Analogue Scanner Receivers
12/RSS310	RSS-310, Issue 1 (Sept. 2005): Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment
12/RSSgen	RSS-Gen, Issue 1 (Sept. 2005): General Requirements and Information for the Certification of Radiocommunication Equipment

Telecommunications Test Methods:

12/FCC2a2	TIA/EIA 603-B (2002) with 47 CFR Part 2: Public Mobile Services in 47 CFR Part 22
12/FCC2b2	TIA/EIA 603-B (2002) with 47 CFR Part 2: Private Land Mobile Radio Services in 47 CFR Part 90
12/FCC2d1	TIA/EIA 603-B (2002) with 47 CFR Part 2: Experimental Radio, Auxiliary, Special Broadcast and Other Program Distributional Services in 47 CFR Part 74
12/FCC2e1	TIA/EIA 603-B (2002) with 47 CFR Part 2: International Fixed Public Radiocommunication Services in 47 CFR Part 23

MIL-STD-462 : Conducted Emissions:

12/A13	MIL-STD-462 Version D Method CE101
12/A14	MIL-STD-462 Version D Method CE102
12/A16	MIL-STD-461 Version E Method CE101
12/A17	MIL-STD-461 Version E Method CE102
12/A18	MIL-STD-461 Version E Method CE106

MIL-STD-462 : Conducted Susceptibility:

12/B12	MIL-STD-462 Version D Method CS101
--------	------------------------------------

2005-10-01 through 2006-09-30


Effective dates

For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.
 Model Tested: RES-1001
 Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009



**ELECTROMAGNETIC COMPATIBILITY
AND TELECOMMUNICATIONS**

NVLAP LAB CODE 100276-0

<i>NVLAP Code</i>	<i>Designation / Description</i>
12/B13	MIL-STD-462 Version D Method CS103
12/B25	MIL-STD-461 Version E Method CS114
12/B26	MIL-STD-461 Version E Method CS115
12/B27	MIL-STD-461 Version E Method CS116

MIL-STD-462 : Radiated Emissions:

12/D04	MIL-STD-462 Version D Method RE101
12/D05	MIL-STD-462 Version D Method RE102
12/D06	MIL-STD-462 Version D Method RE103

MIL-STD-462 : Radiated Susceptibility:

12/E08	MIL-STD-462 Version D Method RS101
12/E09	MIL-STD-462 Version D Method RS103

2005-10-01 through 2006-09-30

Effective dates

For the National Institute of Standards and Technology



Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009

1.0 SUMMARY OF TEST REPORT

It was found that the Classroom Response System - Renaissance Responder, Model Number(s) RES-1001, "meets" the radio interference radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.249 for operational in the 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz Bands. The conducted emissions test was not required because the Classroom Response System - Renaissance Responder is powered from a D.C. power source. It does not have a line cord to plug into the A.C. power line.

This test report relates only to the items tested and contains the following number of pages.

Text: 46

2.0 INTRODUCTION

On February 27, 2006, a series of radio frequency interference measurements was performed on Classroom Response System - Renaissance Responder, Model Number(s) RES-1001, Serial Number: RES-1001.00002. The tests were performed according to the procedures of the FCC as stated in the "Methods of Measurement of Radio-Noise Emissions for Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz" found in the American National Standards Institute, ANSI C63.4-2003. Tests were performed by personnel of D.L.S. Electronic Systems, Inc. who are responsible to Donald L. Sweeney, Senior EMC Engineer.

3.0 OBJECT

The purpose of this series of tests was to determine if the test sample could meet the radio frequency interference emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Sections 15.35(b), 15.37(d), 15.209 & 15.249 for Intentional Radiators operating in the Bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24-24.25 GHz.



Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009

4.0 TEST SET-UP

All emission tests were performed at D.L.S. Electronic Systems, Inc. and set up according to the American National Standards Institute, ANSI C63.4-2003, Section 8, (Figures 11a and 11b). The conducted tests were performed with the test item placed on a non-conductive table (table top equipment), located in the test room. Equipment normally operated on the floor was tested by placing it on the metal ground plane. The ground plane has an electrical isolation layer over its surface approximately 7mm thick. The power line supplied was connected to a dual line impedance stabilization network electrically bonded to the ground plane, located on the floor. The networks were constructed per the requirements of the American National Standards Institute, ANSI C63.4-2003, Section 4, (Figure 2).

All radiated emissions tests were performed with the test item placed on a 80 cm high rotating non-conductive table, located in the test room. Equipment normally operated on the floor was placed on a metal covered turntable which is flush with the surrounding conducting ground plane. The ground plane has an electrical isolation layer over its surface approximately 7 mm thick. The EUT is separated from the turntable ground plane by a non-conductive layer. The equipment under test was set up according to ANSI C63.4-2003, Sections 6 and 8.



Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009

5.0 TEST EQUIPMENT (Bandwidths and Detector Function)

All preliminary data below 1000 MHz was automatically plotted using the HP Spectrum Analyzer or ESI 26/40 Fixed Tuned Receiver. The data was taken using Peak, Quasi-Peak or the Average Detector Functions as required. This information was then used to determine the frequencies of maximum emissions. Above 1000 MHz, final data was taken using the Average Detector.

Below 1000 MHz, final data was taken using the HP Spectrum Analyzer and/or ESI 26/40 Fixed Tuned Receiver. These plots were made using the Peak or Quasi-Peak Detector functions, with manual measurements performed on the questionable frequencies using the Quasi-Peak or the Average Detector Function of the Analyzer or ESI 26/40 Fixed Tuned Receiver as required. Above 1000 MHz, final data was taken using the Average Detector on the Spectrum Analyzer.

The bandwidths shown below are specified by ANSI C63.4-2003, Section 4.2.

Frequency Range	Bandwidth (-6 dB)
10 to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz
Above 1 GHz	1 MHz

A list of the equipment used can be found in Table 1. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.



Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009

6.0 AMBIENT MEASUREMENTS

For emissions measurements, broadband antennas and an EMI Test Receiver with a panoramic spectrum display are used. First the frequency range is scanned and displayed on the test receiver display. Next the scanned frequency range is divided into smaller ranges, and then it is manually tuned through to determine the emissions from the EUT. A headset or loudspeaker is connected to the test receiver's AM/FM demodulated output as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT. If there is any doubt as to the source of the emission, it is further investigated by rotating the EUT, or by disconnecting the power from the EUT.

The EUT is set up in its typical configuration and operated in its various modes. For tabletop systems, cables are manipulated within the range of likely configurations. For floor-standing equipment, the cables are located in the same manner as the user would install them and no further manipulation is made. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions. For each mode of operation, the frequency spectrum is monitored. Variations in antenna height, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) are explored to produce the emissions that have the highest amplitude relative to the limit. These methods are performed to the specifications in MP-5 or ANSI C63.4-2003, as appropriate.



Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 6009

7.0 DESCRIPTION OF TEST SAMPLE: (See also Paragraph 8.0)

7.1 Description:

The device will be used in a classroom environment as a "Student Response System". In essence, it will act like a remote control and will send responses to a host and receive questions from the host. The device uses an IEEE 802.15.4 radio (CC2420, manufactured by Chipcon - www.chipcon.com).

7.2 PHYSICAL DIMENSIONS OF EQUIPMENT UNDER TEST

RES-1001: Length: 15 cm x Width: 6.6 cm x Height: 2 cm

7.3 LINE FILTER USED:

NA

7.4 INTERNAL CLOCK FREQUENCIES:

Switching Power Supply Frequencies:

NA

Clock Frequencies:

RES-1001: 0.032768, 16 MHz

7.5 DESCRIPTION OF ALL CIRCUIT BOARDS:

1. Responder PCB

PN: PCB-0001 Rev. 6



Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 60090

8.0 ADDITIONAL DESCRIPTION OF TEST SAMPLE:
(See also Paragraph 7.0)

1: There were no additional descriptions noted at the time of test.

I certify that the above, as described in paragraph 7.0, describes the equipment tested and will be manufactured as stated.

By: _____
Signature Title

For: _____
Company Date



Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 60090

9.0 PHOTO INFORMATION AND TEST SET-UP

Item 0 Classroom Response System - Renaissance Responder
Model Number: RES-1001 Serial Number: RES-1001.00002



Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING





Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING





Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING





Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 60090

11.0 RESULTS OF TESTS

The radio interference emission charts results can be seen on the pages at the end of this report. Data sheets indicating the test measurements taken during testing can also be found at the end of this report. Points on the emission charts shown with a yellow mark are background frequencies that were verified during testing.

12.0 CONCLUSION

It was found that the Classroom Response System - Renaissance Responder, Model Number(s) RES-1001 "meets" the radio interference radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.249 for operational in the 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz Bands. The conducted emissions test was not required because the Classroom Response System - Renaissance Responder is powered from a D.C. power source. It does not have a line cord to plug into the A.C. power line.



Company: Renaissance Learning, Inc.
 Model Tested: RES-1001
 Report Number: 12006

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Receiver	Rohde & Schwarz	ESI 26	837491/010	20 Hz – 26 GHz	11/06
Receiver	Rohde & Schwarz	ESI 40	837808/006	20 Hz – 40 GHz	12/06
Receiver	Rohde & Schwarz	ESI 40	837808/005	20 Hz – 40 GHz	12/06
Antenna	EMCO	3104C	00054891	20 MHz – 200 MHz	2/07
Antenna	Electrometrics	LPA-25	1114	200 MHz – 1 GHz	3/06
Antenna	EMCO	3104C	00054892	20 MHz – 200 MHz	3/06
Antenna	Electrometrics	3146	1205	200 MHz – 1 GHz	3/06
Antenna	EMCO	3104C	97014785	20 MHz – 200 MHz	2/07
Antenna	EMCO	3146	97024895	200 MHz – 1 GHz	3/06
Antenna	EMCO	3115	2479	1 GHz – 18 GHz	8/06
Antenna	EMCO	3115	99035731	1 GHz – 18 GHz	4/06
Antenna	Rohde & Schwarz	HUF-Z1	829381001	20 MHz – 1 GHz	2/07
Antenna	Rohde & Schwarz	HUF-Z1	829381005	20 MHz – 1 GHz	8/06

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



Company: Renaissance Learning, Inc.
 Model Tested: RES-1001
 Report Number: 12006

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
LISN	Solar	8012-50-R-24-BNC	8305116	10 MHz – 30 MHz	8/06
LISN	Solar	8012-50-R-24-BNC	814548	10 MHz – 30 MHz	8/06
LISN	Solar	9252-50-R-24-BNC	961019	10 MHz – 30 MHz	12/06
LISN	Solar	9252-50-R-24-BNC	971612	10 MHz – 30 MHz	10/06
LISN	Solar	9252-50-R-24-BNC	92710620	10 MHz – 30 MHz	7/06

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



Company: Renaissance Learning, Inc.
Model Tested: RES-1001
Report Number: 12006

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

TEST PROCEDURE

Part 15, Subpart C, Section 15.249a-e

OPERATION WITHIN THE BANDS 902-928 MHz,
2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz MHz



Company: Renaissance Learning, Inc.
Model Tested: RES-1000
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

1.0 CONDUCTED EMISSION MEASUREMENTS

Conducted emissions were measured over the frequency range from 150 kHz to 30 MHz in accordance with the power line measurements as specified in FCC Part 15, Subpart C, Section 15.207 & ANSI C63.4-2003. Since the device is operated from the public utility lines, the 120 Vac, 60 Hz power leads, high (hot) and low (neutral) sides, were measured by connecting the measuring equipment to the appropriate meter terminal of the LISN. During the test, the cables were placed and items moved (when appropriate) to maximize emissions. All signals were then recorded. The allowed levels for Intentional Radiators which is designed to connected to the public utility (AC) power line shall not exceed 250 uV (47.96 dBuV) from 150 kHz to 30 MHz

NOTE:

This test was not run because the device is battery operated.



Company: Renaissance Learning, Inc.
 Model Tested: RES-1000
 Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

2.0 BAND EDGE AND RESTRICT BAND COMPLIANCE

The field strength of any emissions appearing outside the 902 to 928 MHz band shall not exceed the general radiated emissions limits as stated Section 15.209. The fundamental from the Classroom Response System - Renaissance Responder transmitter shall not be inside the restrict band 960 to 1240 MHz.

As stated in Section 15.205a, the fundamental emission from the Classroom Response System - Renaissance Responder shall not fall within any of the bands listed below:

Frequency in MHz	Frequency in MHz	Frequency in MHz	Frequency in GHz
.0900 to .1100	162.0125 to 167.17	2310.0 to 2390	9.30 to 9.50
.4900 to .5100	167.7200 to 173.20	2483.5 to 2500	10.60 to 12.70
2.1735 to 2.1905	240.000 to 285.00	2655.0 to 2900	13.25 to 13.40
8.362 to 8.3660	322.200 to 335.40	3260.0 to 3267	14.47 to 14.50
13.36 to 13.410	399.900 to 410.00	3332.0 to 3339	15.35 to 16.20
25.50 to 25.670	608.000 to 614.00	3345.8 to 3358	17.70 to 21.40
37.50 to 38.250	960.000 to 1240.00	3600.0 to 4400	22.01 to 23.13
73.00 to 75.500	1300.000 to 1427.00	4500.0 to 5250	23.60 to 24.00
108.00 to 121.94	1435.000 to 1626.50	5350.0 to 5450	31.20 to 31.80
123.00 to 138.00	1660.000 to 1710.00	7250.0 to 7750	36.43 to 36.50
149.90 to 150.00	1718.800 to 1722.20	8025.0 to 8500	ABOVE 38.60
156.70 to 156.90	2200.000 to 2300.00	9000.0 to 9200	

NOTE:

The noise floor within the Restricted Bands for the EMC Receiver and HP Spectrum Analyzer will typically lay 20 dB below the limit.

See the following page (s) for the graph (s) made showing compliance for Band Edge and Restrict Band: Also see the table of measurements made for the Fundamental and Spurious emissions in paragraph 3 of this section.



Company: Renaissance Learning, Inc.
Model Tested: RES-1000
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

DATA AND GRAPH(S) TAKEN SHOWING THE BAND EDGE AND RESTRICT BAND COMPLIANCE

PART 15.249




Company: Renaissance Learning, Inc.
 Model Tested: RES-1000
 Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 09-06-2005
 Company: Renaissance Learning
 EUT: RES-1001
 Test: Low Band-Edge Compliance - Radiated
 Operator: Craig Brandt
 Comment: **Low Channel:** Frequency – 2.405 GHz
 Worst Case Orientation - Horizontal
 Band-Edge Frequency - 2.400 GHz
Peak Radiated Peak Out of Band Limit = 74 dB μ V/m @ 3 Meters

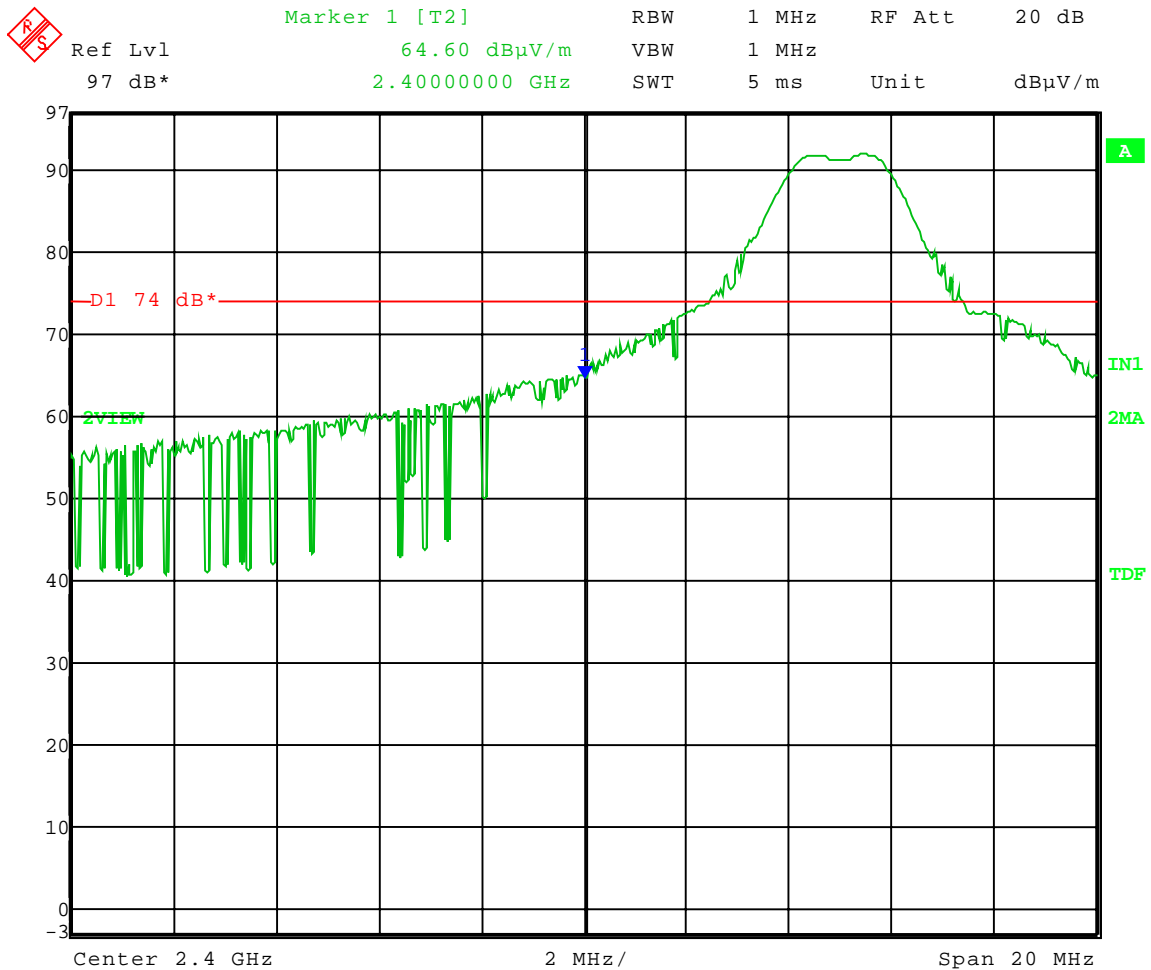

Date: 6.SEP.2005 11:01:46




Company: Renaissance Learning, Inc.
 Model Tested: RES-1000
 Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 09-06-2005
 Company: Renaissance Learning
 EUT: RES-1001
 Test: Low Band-Edge Compliance - Radiated
 Operator: Craig Brandt
 Comment: **Low Channel:** Frequency – 2.405 GHz
 Worst Case Orientation - Horizontal
 Band-Edge Frequency - 2.400 GHz
Average Radiated Peak Out of Band Limit = 54 dB μ V/m @ 3 Meters

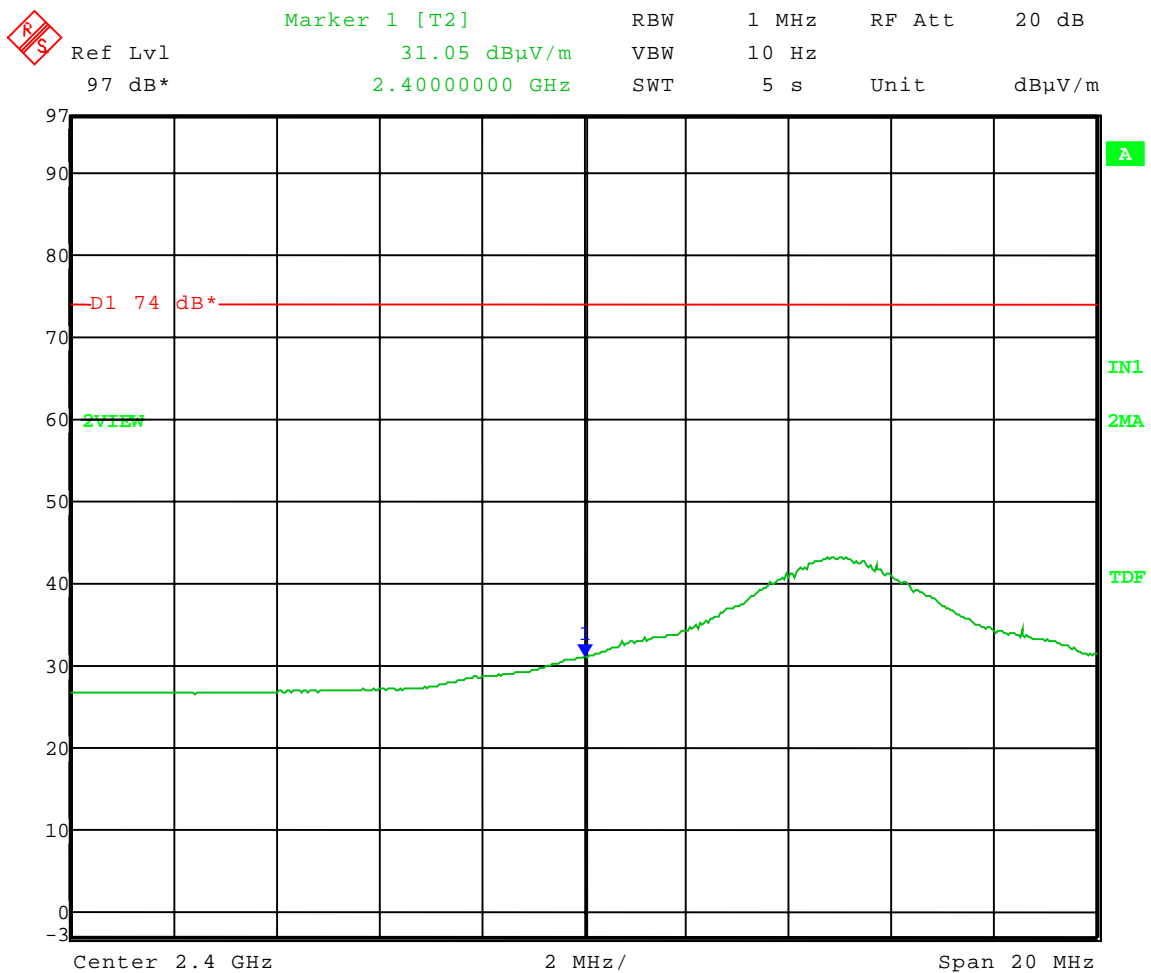

Date: 6.SEP.2005 11:03:55




Company: Renaissance Learning, Inc.
 Model Tested: RES-1000
 Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 09-06-2005
 Company: Renaissance Learning
 EUT: RES-1001
 Test: Upper Band-Edge Compliance - Radiated
 Operator: Craig Brandt
 Comment: **High Channel:** Frequency – 2.480 GHz
 Worst Case Orientation - Horizontal
 Band-Edge Frequency - 2.4835 GHz
Peak Radiated Peak Out of Band Limit = 74 dB μ V/m @ 3 Meters

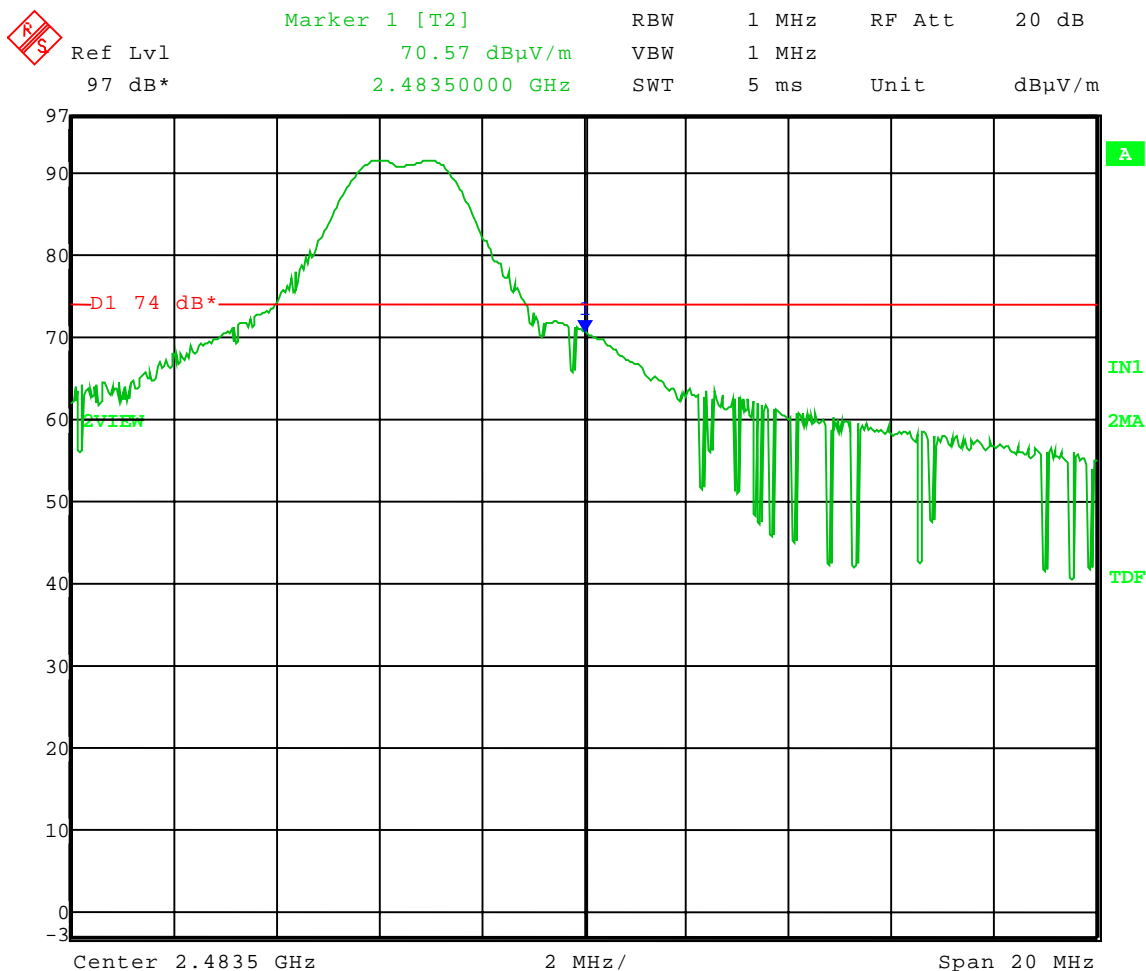

Date: 6.SEP.2005 10:45:43




Company: Renaissance Learning, Inc.
Model Tested: RES-1000
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Test Date: 09-06-2005
Company: Renaissance Learning
EUT: RES-1001
Test: Upper Band-Edge Compliance - Radiated
Operator: Craig Brandt
Comment: **High Channel:** Frequency - 2.480 GHz
Worst Case Orientation - Horizontal
Band-Edge Frequency - 2.4835 GHz
Average Radiated Peak Out of Band Limit = 54 dB μ V/m @ 3 Meters

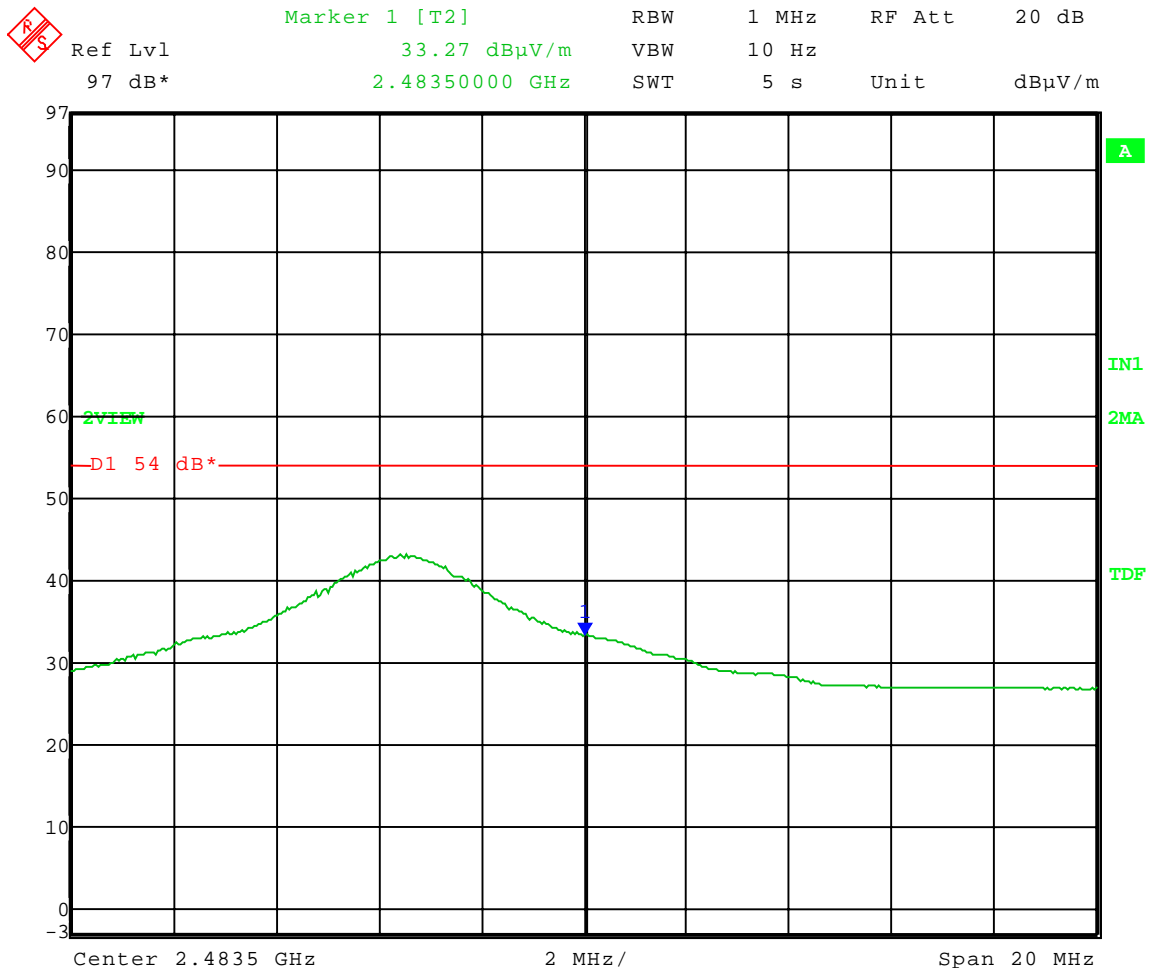

Date: 6.SEP.2005 10:48:11



Company: Renaissance Learning, Inc.
Model Tested: RES-1000
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

3.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS (SECTION 15.249a-d)

The radiated measurements made at D.L.S. Electronic Systems, Inc., for the Classroom Response System - Renaissance Responder, Model Number: RES-1001, are shown in tabulated and graph form. Preliminary radiation measurements were performed at a 3 meter test distance with the limits adjusted linearly when required. The frequency range from 30 MHz to over 960 MHz, depending upon the fundamental frequency as stated in Part 15.33a, was automatically scanned and plotted at various angles.

Measurements for the Classroom Response System - Renaissance Responder were made up to 25000 MHz, in accordance with Section 15.33a for Intentional Radiators with a fundamental frequency of 2480 MHz. For intentional radiators, the frequency range to be investigated is determined by the lowest radio frequency generated by the device without going below 30 MHz, up to at least the tenth harmonic of the highest fundamental frequency or 10 GHz, whichever is lower. At those frequencies where significant signals were detected, measurements were made over the entire frequency range specified in FCC Part 15, Subpart C, Section 15.249 at the open field test site, located at Genoa City, Wisconsin, FCC file number **31040/SIT**. When required, levels were extrapolated from 10 meters to 3 meters using a linear extrapolation.

All signals in the frequency range of 30 MHz to 2000 MHz were measured with a Biconical Antenna or tuned dipoles and from 200 MHz to 1000 MHz, a Log Periodic or Tuned Dipoles were used. From 1000 MHz to 10 GHz Horn Antennas were used. During the test the equipment was rotated and the antenna was raised and lowered from 1 meter to 4 meters to find the maximum level of emissions. In order to find maximum emissions, the cables were moved through all the positions the equipment would be expected to experience in the field. The EUT, peripheral equipment and cables were configured to meet the conditions in ANSI C63.4-2003, Clauses 6 & 8. Tests were made with the receive antenna(s) in both the horizontal and vertical planes of polarization. In each case, the table was rotated to find the maximum emissions.



Company: Renaissance Learning, Inc.
 Model Tested: RES-1000
 Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

3.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS (CON'T)

For operation in the bands 902 to 928 MHz, 2400 to 2483.5 MHz, 5725 to 5875 MHz, and 24.0 to 24.25 GHz the field strength of any emissions within this band shall not exceed the field strength levels specified in the following table as stated in FCC, Part 15, Section 15.249(a).

Frequency range in MHz	Field Strength of Fundamental millivolts/meter	Field Strength of Fundamental dBuV/meter	Field Strength of Harmonics microvolts/meter	Field Strength of Harmonics dBuV/meter
902 to 928	50	93.98	500	53.98
2400 to 2483.5	50	93.98	500	53.98
5725 to 5875	50	93.98	500	53.98
24000 to 24250	250	107.96	2500	67.96

Field strength limits are at a distance of 3 meters. The emission limits shown are based on measurement instrumentation employing an average detector.

Emissions radiated outside of the specified frequency bands, except for harmonics are attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Preliminary radiated emission measurements were performed at a 3 meter test distance. The frequency range from 30 MHz to 1000 MHz was automatically scanned and plotted at various angles.

NOTE:

All radiated emissions measurements were made at a test room temperature of **72°F** at **26%** relative humidity.



Company: Renaissance Learning, Inc.
Model Tested: RES-1000
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

RADIATED DATA TAKEN FOR
FUNDAMENTAL, HARMONIC &
RESTRICTED BAND
EMISSION MEASUREMENTS

PART 15.249



Company: Renaissance Learning, Inc.
 Model Tested: RES-1000
 Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Radiated Fundamental and Spurious Emissions – 30 MHz to 25 GHz

Tested at a 3 Meter Distance

EUT: RES-1001
Manufacturer: Renaissance Learning
Operating Condition: 72 deg F; 26% R.H.
Test Site: Site 3
Operator: Craig Brandt
Test Specification: FCC Part 15.249 and FCC Part 15.205
Comment: Continuous Transmit – Low Channel (11)
Date: 02/27/2006

- Notes:** (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.
 (2) All other emissions at least 20 dB under the limit.

Frequency (MHz)	Measurement Detector	Ant. Pol.	Level (dBuV)	Antenna Factor (dB/m)	System Loss (dB)	Total Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Height (m)	EUT Angle (deg)	Comment
2405	Max Peak	Vert	61.21	28.26	1.8	91.3	114.00	22.7	1.3	90	Fundamental
2405	Average	Vert	41.43	28.26	1.8	71.5	94.00	22.5	1.3	90	Fundamental
2405	Max Peak	Horz	62.34	28.26	1.8	92.4	114.00	21.6	1.1	270	Fundamental
2405	Average	Horz	42.43	28.26	1.8	72.5	94.00	21.5	1.1	270	Fundamental
4810	Max Peak	Vert	64.70	32.74	-35.6	61.8	74.00	12.2	1.0	180	Res. Band
4810	Average	Vert	45.58	32.74	-35.6	42.7	54.00	11.3	1.0	180	Res. Band
4810	Max Peak	Horz	65.73	32.74	-35.6	62.9	74.00	11.1	1.0	0	Res. Band
4810	Average	Horz	45.57	32.74	-35.6	42.7	54.00	11.3	1.0	0	Res. Band



Company: Renaissance Learning, Inc.
 Model Tested: RES-1000
 Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Radiated Fundamental and Spurious Emissions – 30 MHz to 25 GHz

Tested at a 3 Meter Distance

EUT: RES-1001
Manufacturer: Renaissance Learning
Operating Condition: 72 deg F; 26% R.H.
Test Site: Site 3
Operator: Craig Brandt
Test Specification: FCC Part 15.249 and FCC Part 15.205
Comment: Continuous Transmit – Middle Channel (18)
Date: 02/27/2006

- Notes:** (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.
 (2) All other emissions at least 20 dB under the limit.

Frequency (MHz)	Measurement Detector	Ant. Pol.	Level (dBuV)	Antenna Factor (dB/m)	System Loss (dB)	Total Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Height (m)	EUT Angle (deg)	Comment
2440	Max Peak	Vert	57.86	28.32	1.8	88.0	114.00	26.0	1.2	90	Fundamental
2440	Average	Vert	38.08	28.32	1.8	68.2	94.00	25.8	1.2	90	Fundamental
2440	Max Peak	Horz	61.95	28.32	1.8	92.1	114.00	21.9	1.1	315	Fundamental
2440	Average	Horz	42.16	28.32	1.8	72.3	94.00	21.7	1.1	315	Fundamental
4880	Max Peak	Vert	63.63	32.89	-35.4	61.1	74.00	12.9	1.3	225	Res. Band
4880	Average	Vert	43.83	32.89	-35.4	41.3	54.00	12.7	1.3	225	Res. Band
4880	Max Peak	Horz	65.86	32.89	-35.4	63.3	74.00	10.7	1.0	0	Res. Band
4880	Average	Horz	45.46	32.89	-35.4	42.9	54.00	11.1	1.0	0	Res. Band



Company: Renaissance Learning, Inc.
 Model Tested: RES-1000
 Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

Radiated Fundamental and Spurious Emissions – 30 MHz to 25 GHz

Tested at a 3 Meter Distance

EUT: RES-1001
Manufacturer: Renaissance Learning
Operating Condition: 72 deg F; 26% R.H.
Test Site: Site 3
Operator: Craig Brandt
Test Specification: FCC Part 15.249 and FCC Part 15.205
Comment: Continuous Transmit – High Channel (26)
Date: 02/27/2006

- Notes:** (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.
 (2) All other emissions at least 20 dB under the limit.

Frequency (MHz)	Measurement Detector	Ant. Pol.	Level (dBuV)	Antenna Factor (dB/m)	System Loss (dB)	Total Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Height (m)	EUT Angle (deg)	Comment
2480	Max Peak	Vert	58.35	28.40	1.8	88.5	114.00	25.5	1.1	90	Fundamental
2480	Average	Vert	39.56	28.40	1.8	69.7	94.00	24.3	1.1	90	Fundamental
2480	Max Peak	Horz	61.39	28.40	1.8	91.5	114.00	22.5	1.1	315	Fundamental
2480	Average	Horz	42.12	28.40	1.8	72.3	94.00	18.3	1.1	315	Fundamental
4960	Max Peak	Vert	66.36	33.06	-35.3	64.1	74.00	9.9	1.1	90	Res. Band
4960	Average	Vert	45.72	33.06	-35.3	43.4	54.00	10.6	1.1	90	Res. Band
4960	Max Peak	Horz	67.73	33.06	-35.3	65.4	74.00	8.6	1.0	0	Res. Band
4960	Average	Horz	46.85	33.06	-35.3	44.6	54.00	9.4	1.0	0	Res. Band



Company: Renaissance Learning, Inc.
Model Tested: RES-1000
Report Number: 11577

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

RADIATED DATA AND GRAPH(S) TAKEN FOR

FIELD STRENGTH

SPURIOUS EMISSION MEASUREMENTS

PART 15.209

FCC Part 15.109

Electric Field Strength

EUT: RES-1001
Manufacturer: Renaissance Learning
Operating Condition: 72 deg. F; 26% R.H.
Test Site: DLS OF Site 3
Operator: Craig Brandt
Test Specification: Continuous Tx
Comment: Channels 11, 18, and 26
Date: 02-27-2006


TEXT: "Site 3 MidV 3M"

Short Description: Test Set-up Vert30-1000MHz
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 26 SN: 837491/010

Antennas ---
Biconical -- EMCO 3104C SN: 9701-4785
Log Periodic -- EMCO 3146 SN: 9702-4895

Pre-Amp --- Rohde&Schwarz TS-PR10 SN: 032001/005

TEST SET-UP: EUT Measured at 3 Meters with VERTICAL Antenna Polarization

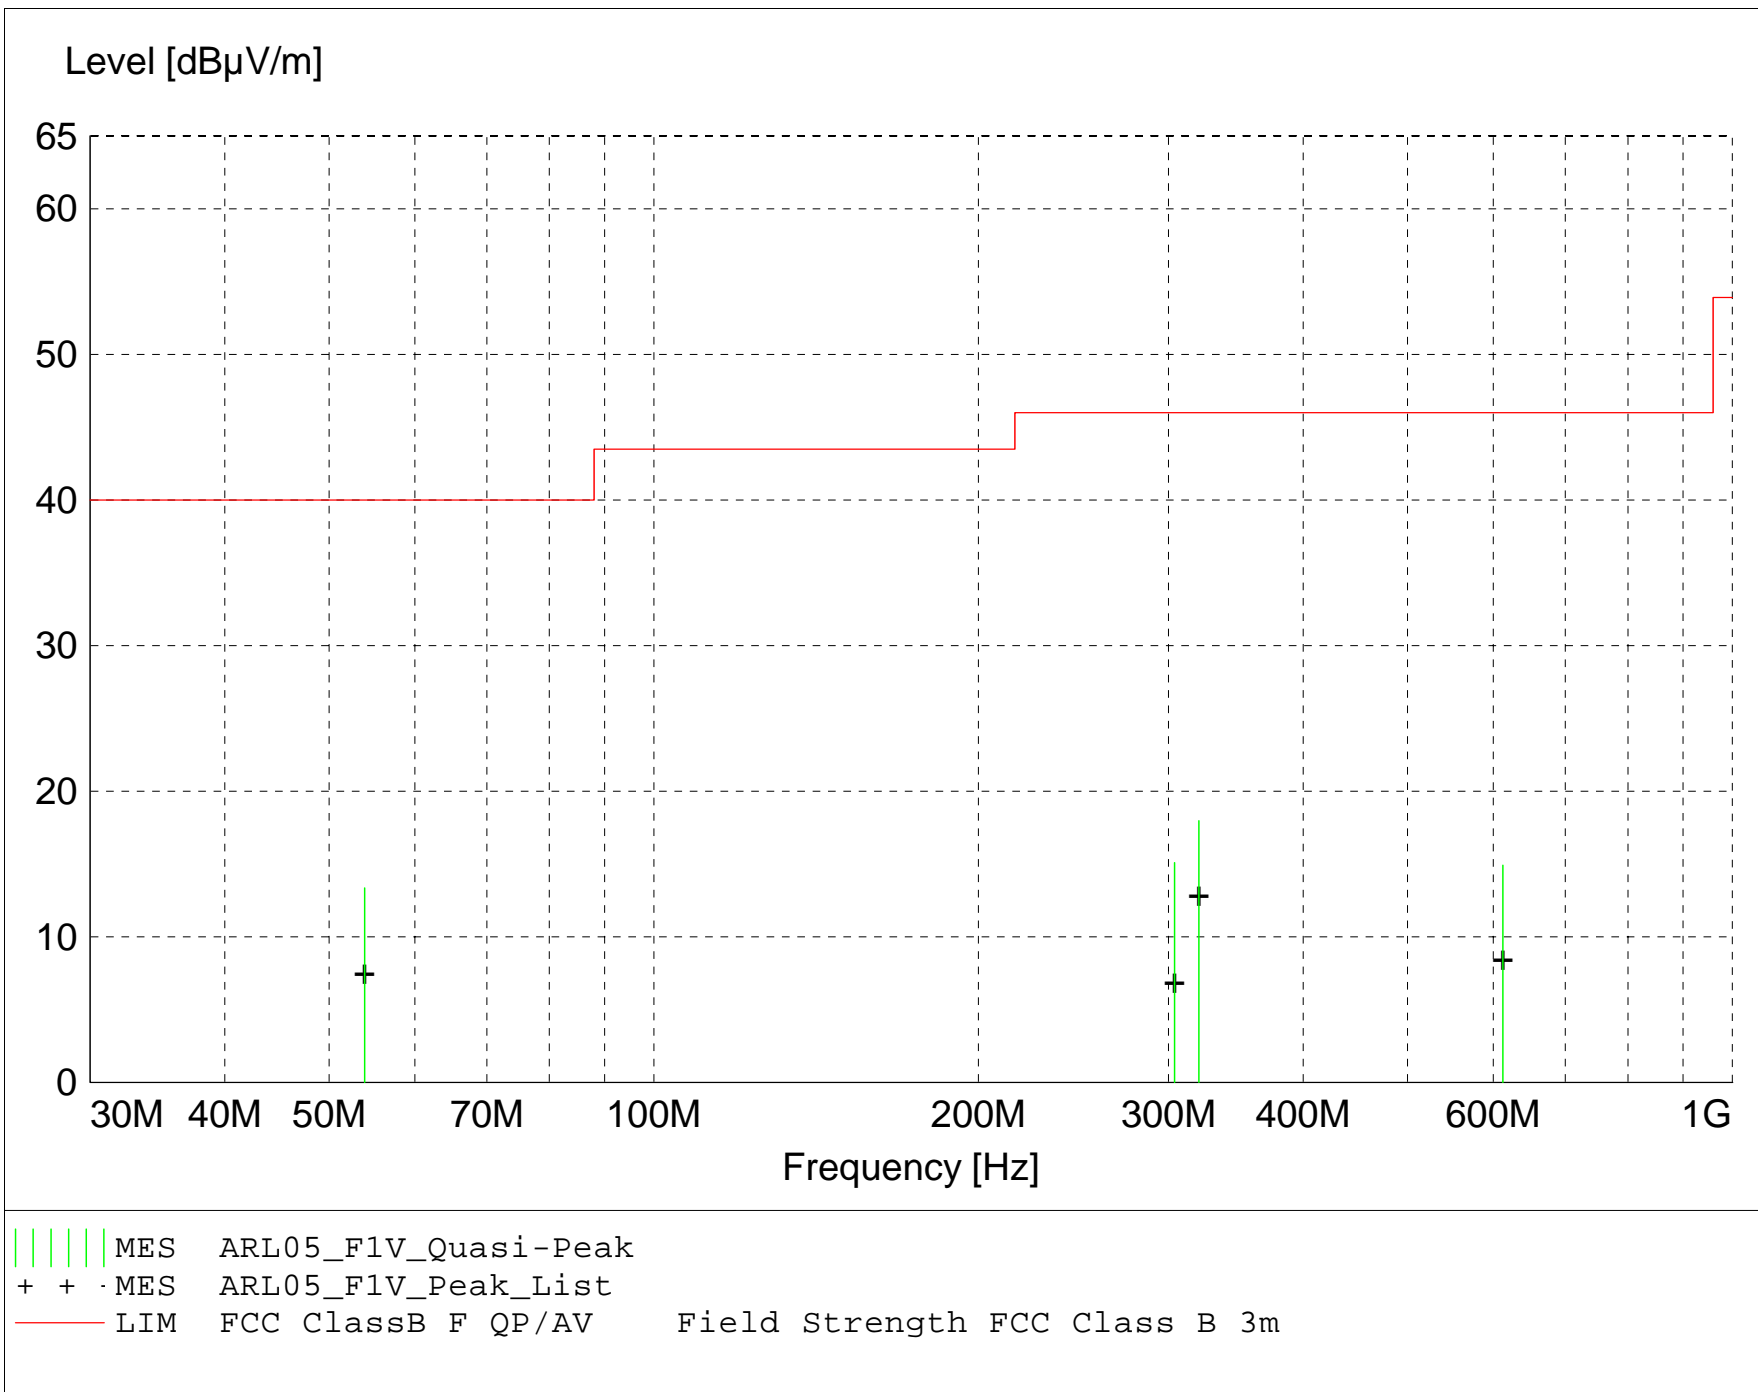

MEASUREMENT RESULT: "ARL05_F1V_Final"

2/27/2006 12:57PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
MHz	dB μ V	Factor	Loss	Level	dB μ V/m	dB	Ant.	Angle	Detector	
		dB μ V/m	dB	dB μ V/m	dB μ V/m		m	deg		
53.915000	26.61	10.80	-24.1	13.4	40.0	26.6	1.00	0	QUASI-PEAK	Noise Floor
320.000000	24.48	15.32	-21.8	18.0	46.0	28.0	1.20	180	QUASI-PEAK	None
304.000000	21.76	15.27	-21.9	15.1	46.0	30.9	1.20	180	QUASI-PEAK	None
612.620000	15.94	19.20	-20.2	14.9	46.0	31.1	1.00	0	QUASI-PEAK	Noise Floor

FCC Part 15.109

Electric Field Strength

EUT: RES-1001
Manufacturer: Renaissance Learning
Operating Condition: 72 deg. F; 26% R.H.
Test Site: DLS OF Site 3
Operator: Craig Brandt
Test Specification: Continuous Tx
Comment: Channels 11, 18, and 26
Date: 02-27-2006


TEXT: "Site 3 MidH 3M"

Short Description: Test Set-up Horz30-1000MHz
TEST EQUIPMENT: Receiver --- Rohde&Schwarz ESI 40 SN: 837808/006

Antennas ---
Biconical -- EMCO 3104C SN: 9701-4785
Log Periodic -- EMCO 3146 SN: 9702-4895

Pre-Amp --- Rohde&Schwarz TS-PR10 SN: 032001/005

TEST SET-UP: EUT Measured at 3 Meters with HORIZONTAL Antenna Polarization

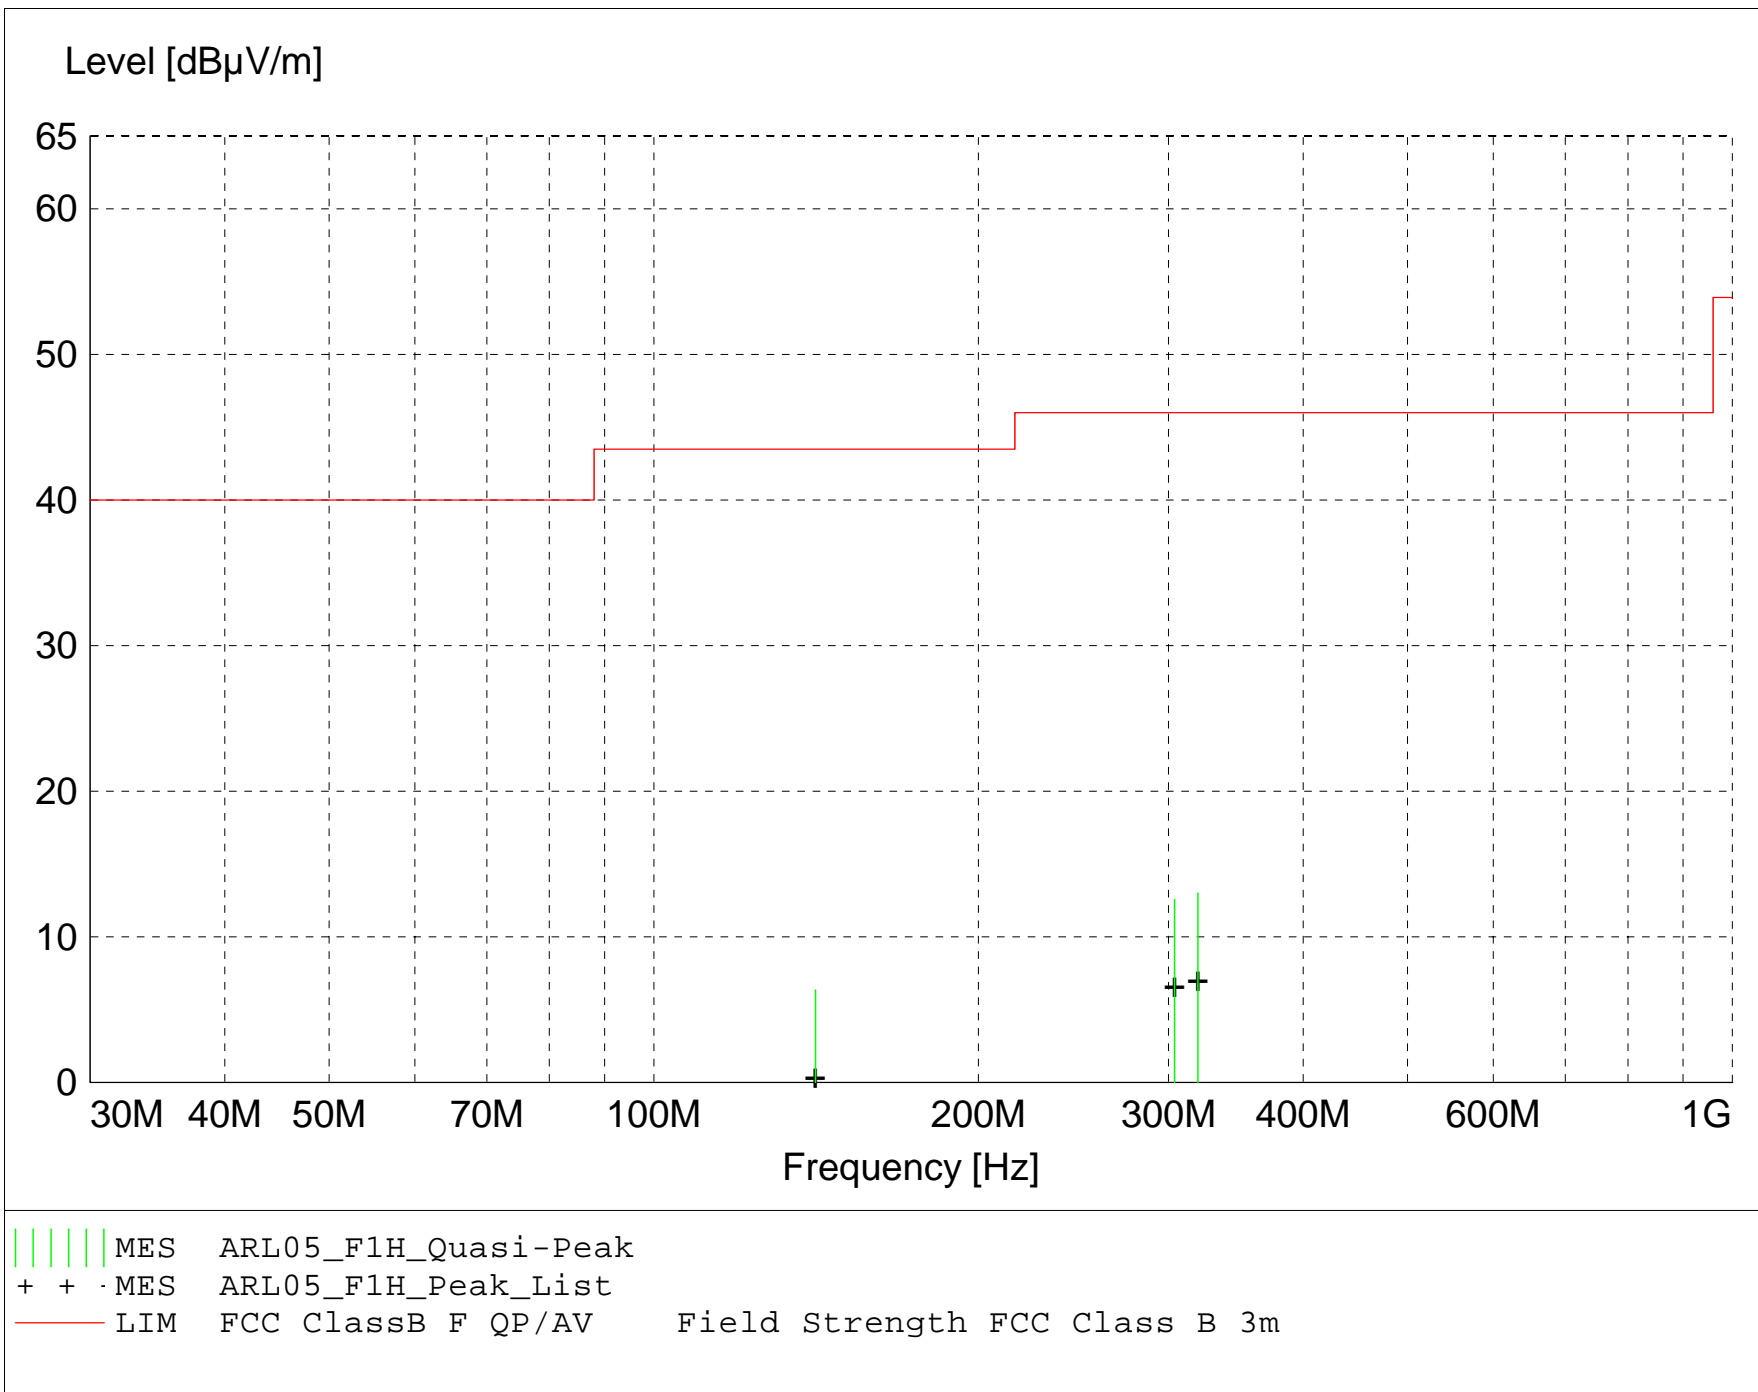

MEASUREMENT RESULT: "ARL05_F1H_Final"

2/27/2006 12:37PM

Frequency	Level	Antenna	System	Total	Limit	Margin	Height	EuT	Final	Comment
		Factor	Loss	Level			Ant.	Angle	Detector	
MHz	dB μ V	dB μ V/m	dB	dB μ V/m	dB μ V/m	dB	m	deg		
319.540000	19.49	15.35	-21.8	13.0	46.0	33.0	1.60	45	QUASI-PEAK	None
304.000000	19.21	15.27	-21.9	12.6	46.0	33.4	1.60	90	QUASI-PEAK	None
141.180000	17.86	11.61	-23.1	6.4	43.5	37.1	2.50	90	QUASI-PEAK	Noise Floor