



Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 15:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11a Chain 2	

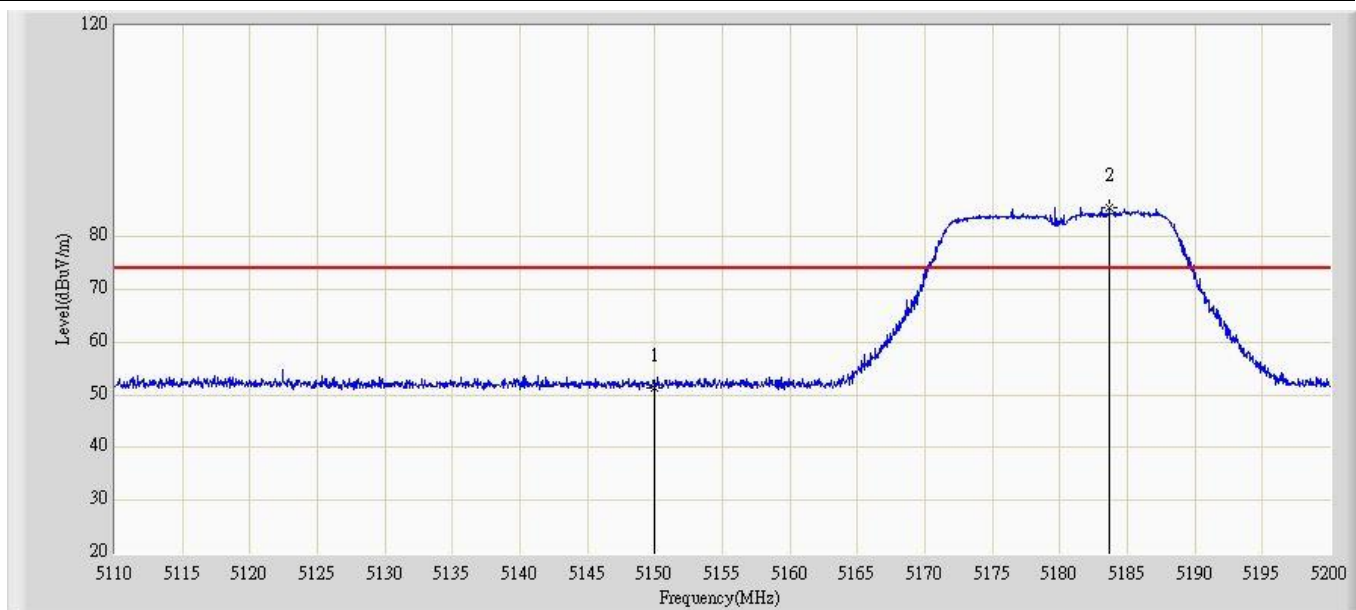


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	51.284	11.263	-22.716	74.000	40.021	PK
2		*	5183.665	85.433	45.337	N/A	N/A	40.096	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 15:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5180MHz by 802.11a Chain 2	

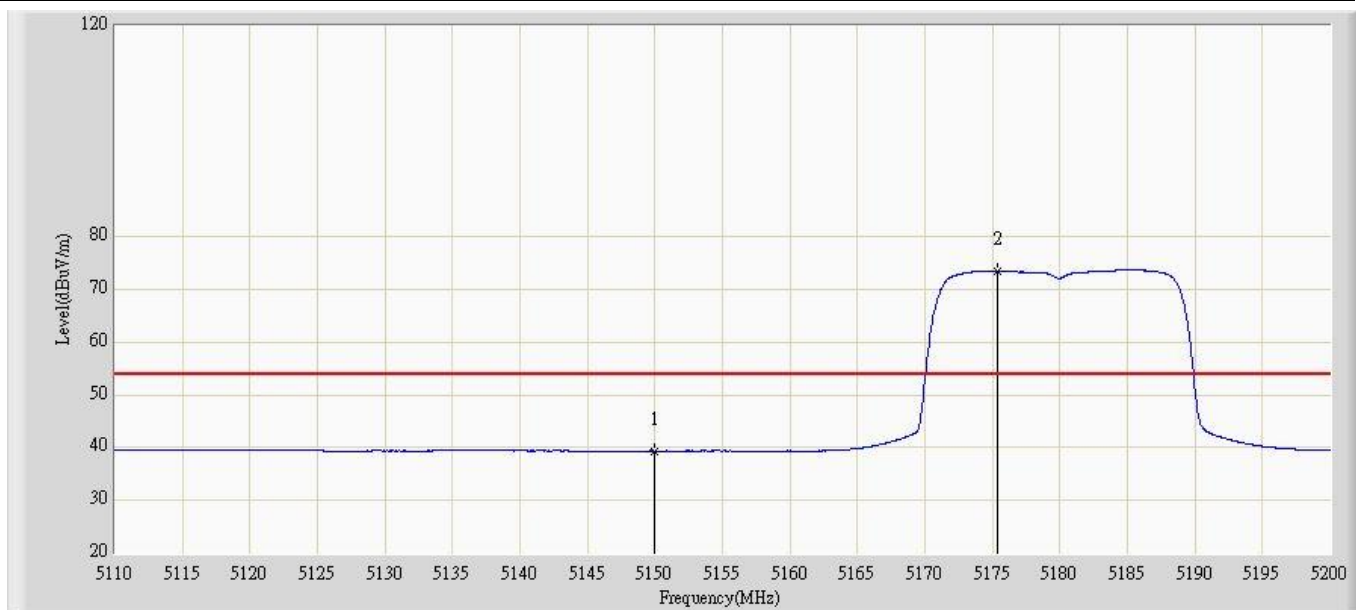


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	39.378	-0.643	-14.622	54.000	40.021	AV
2		*	5175.340	73.459	33.382	N/A	N/A	40.076	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11a Chain 2	

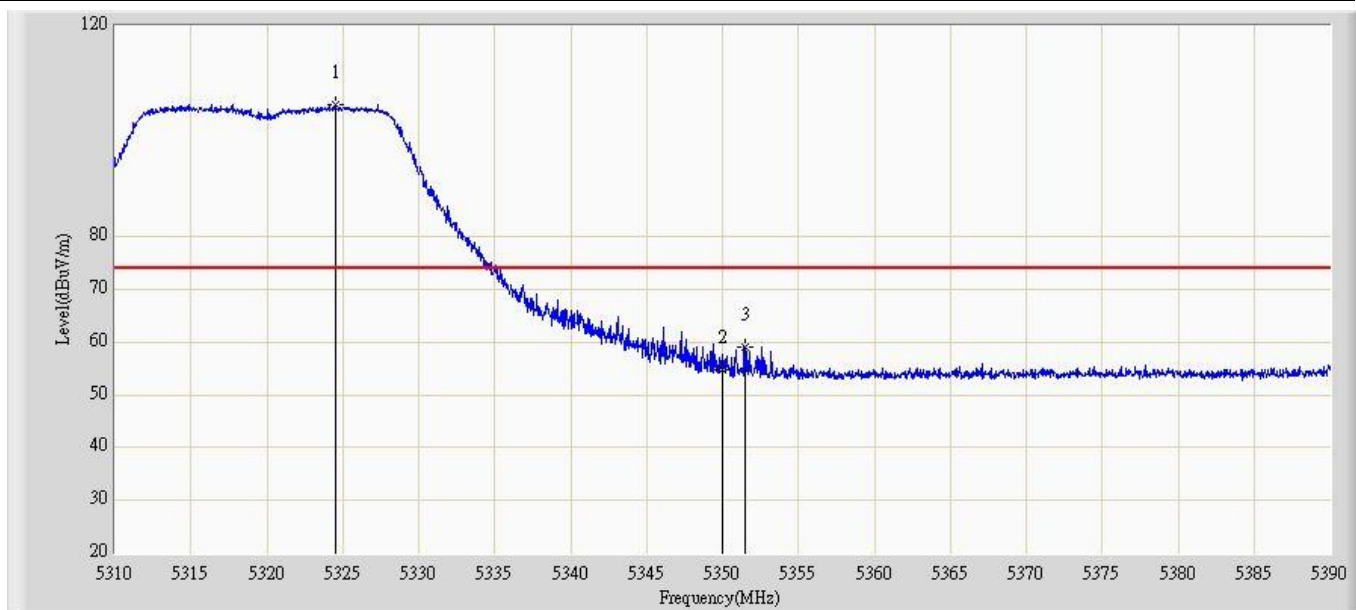


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5324.480	105.146	64.997	N/A	N/A	40.149	PK
2			5350.000	54.798	14.619	-19.202	74.000	40.179	PK
3			5351.520	59.033	18.852	-14.967	74.000	40.182	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11a Chain 2	

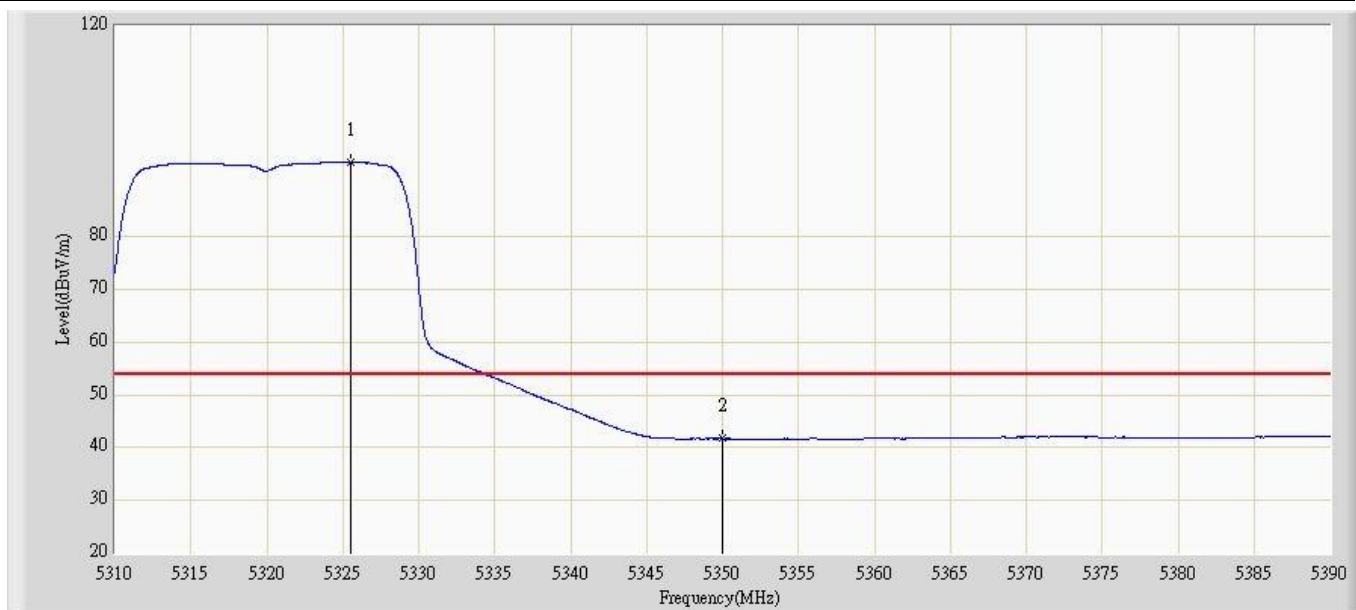


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5325.520	94.111	53.961	N/A	N/A	40.150	AV
2			5350.000	41.699	1.520	-12.301	54.000	40.179	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11a Chain 2	

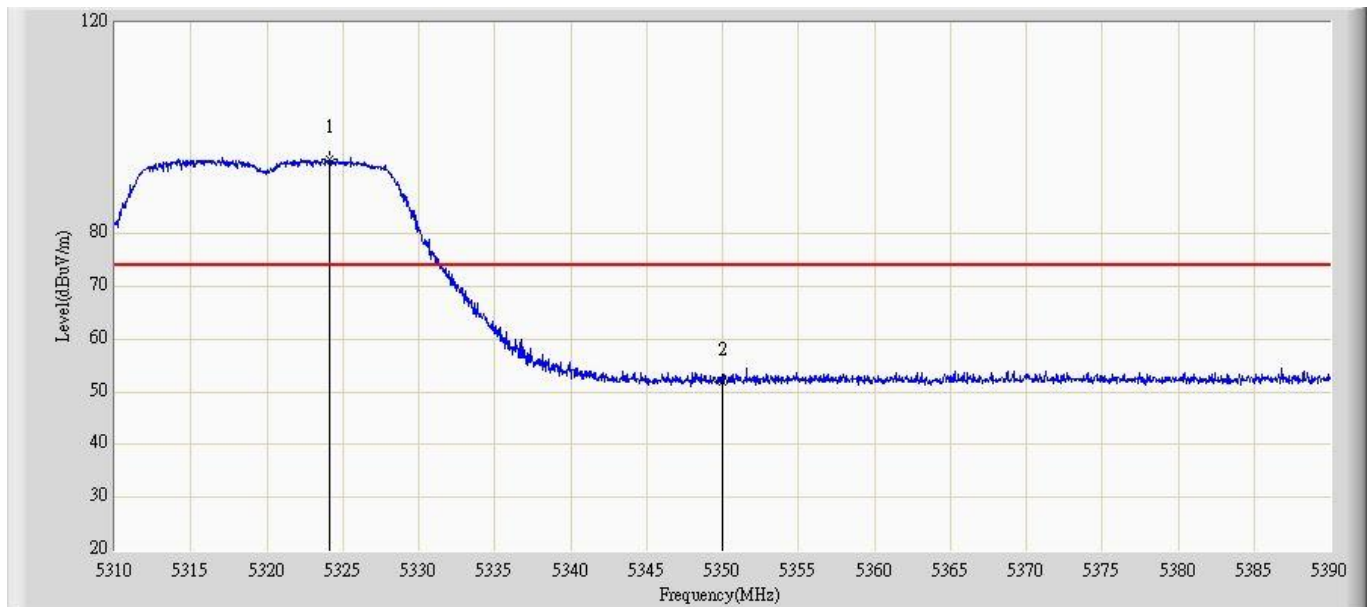


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5324.160	94.152	53.832	N/A	N/A	40.320	PK
2			5350.000	51.800	11.461	-22.200	74.000	40.339	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5320MHz by 802.11a Chain 2	

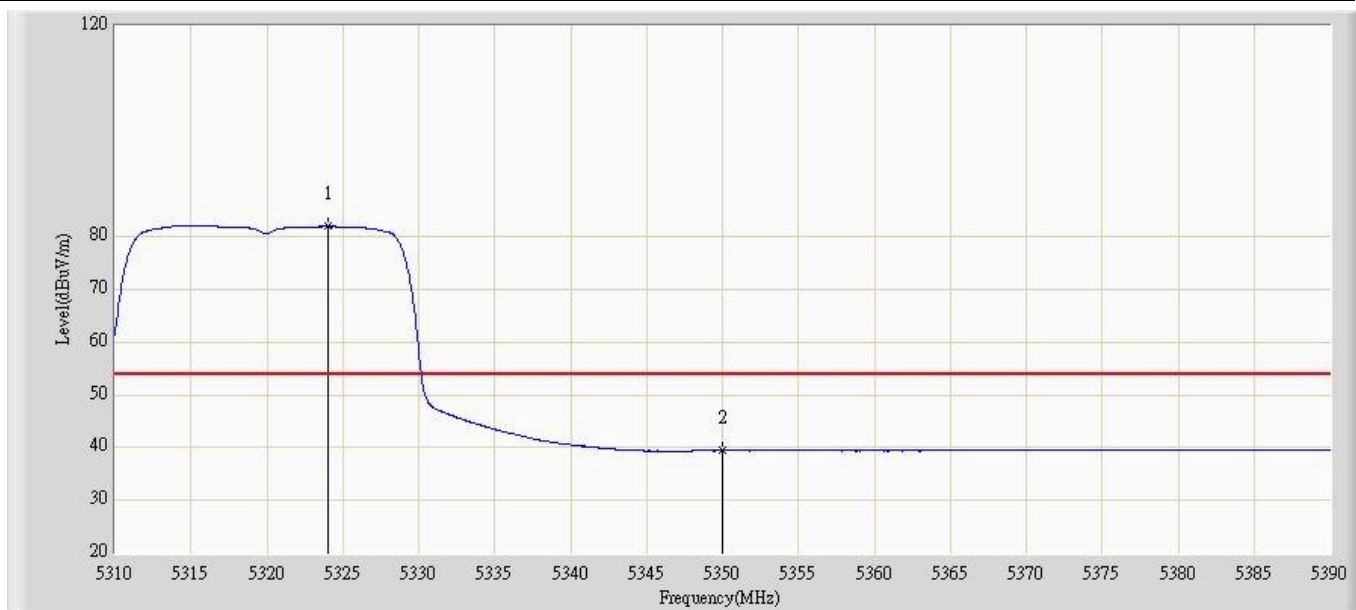


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5324.000	81.969	41.650	N/A	N/A	40.319	AV
2			5350.000	39.426	-0.913	-14.574	54.000	40.339	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11a Chain 2	

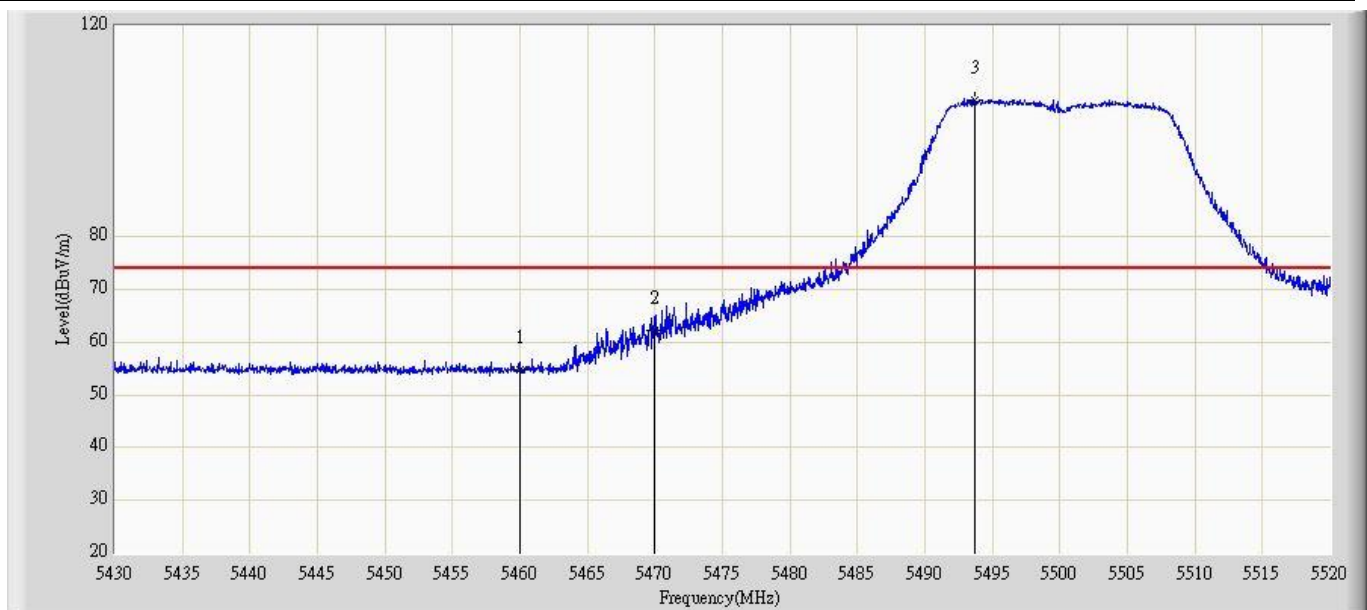


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	54.876	14.495	-19.124	74.000	40.382	PK
2			5470.000	62.283	21.887	-26.017	88.300	40.395	PK
3		*	5493.720	105.900	65.471	N/A	N/A	40.428	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11a Chain 2	

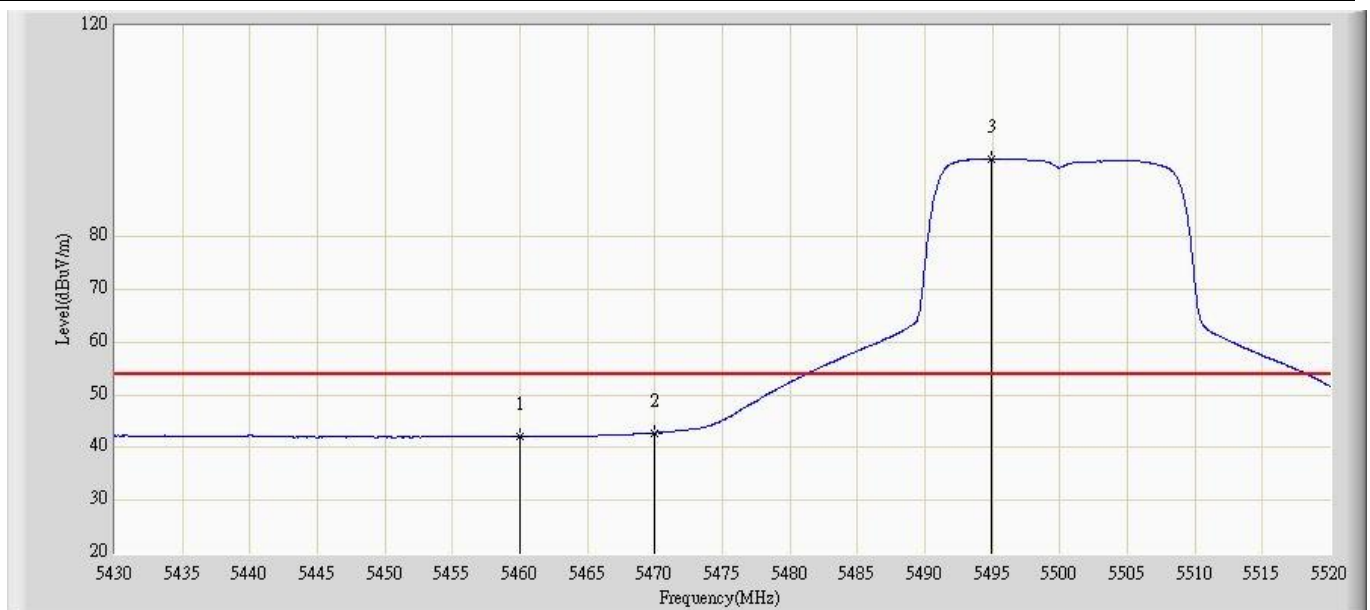


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	42.085	1.704	-11.915	54.000	40.382	AV
2			5470.000	42.809	2.413	-25.491	68.300	40.395	AV
3		*	5494.890	94.807	54.376	N/A	N/A	40.430	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11a Chain 2	

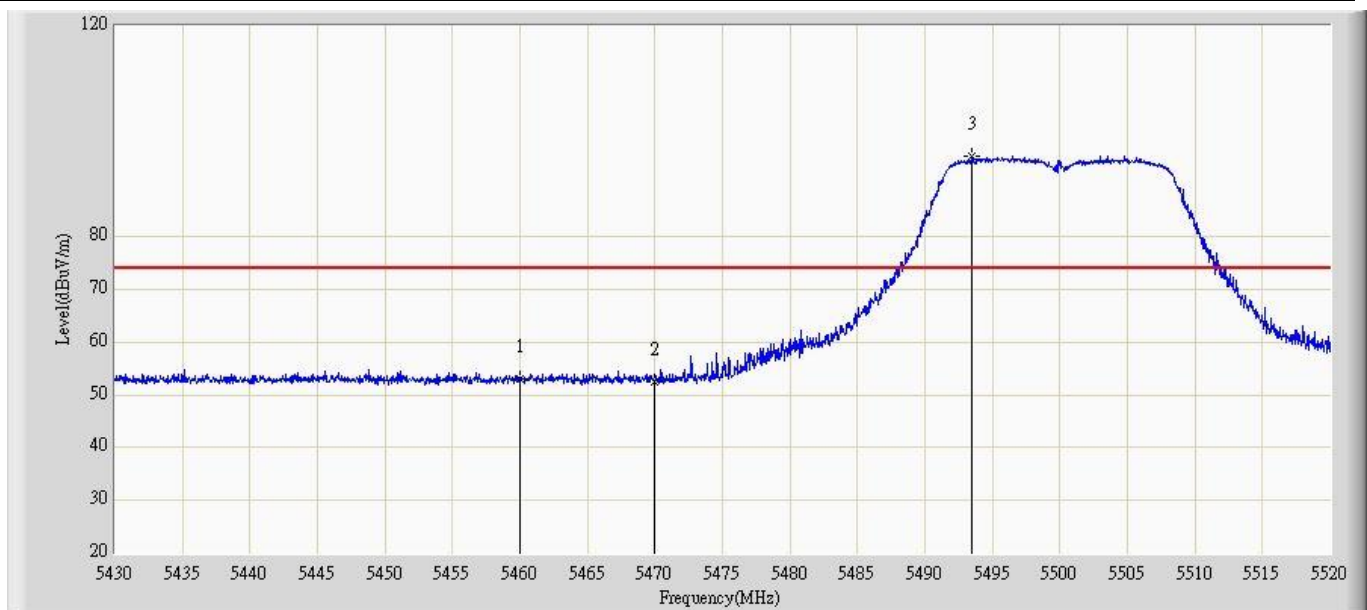


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	53.027	12.529	-20.973	74.000	40.498	PK
2			5470.000	52.528	12.021	-35.772	88.300	40.507	PK
3		*	5493.495	95.351	54.820	N/A	N/A	40.531	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5500MHz by 802.11a Chain 2	

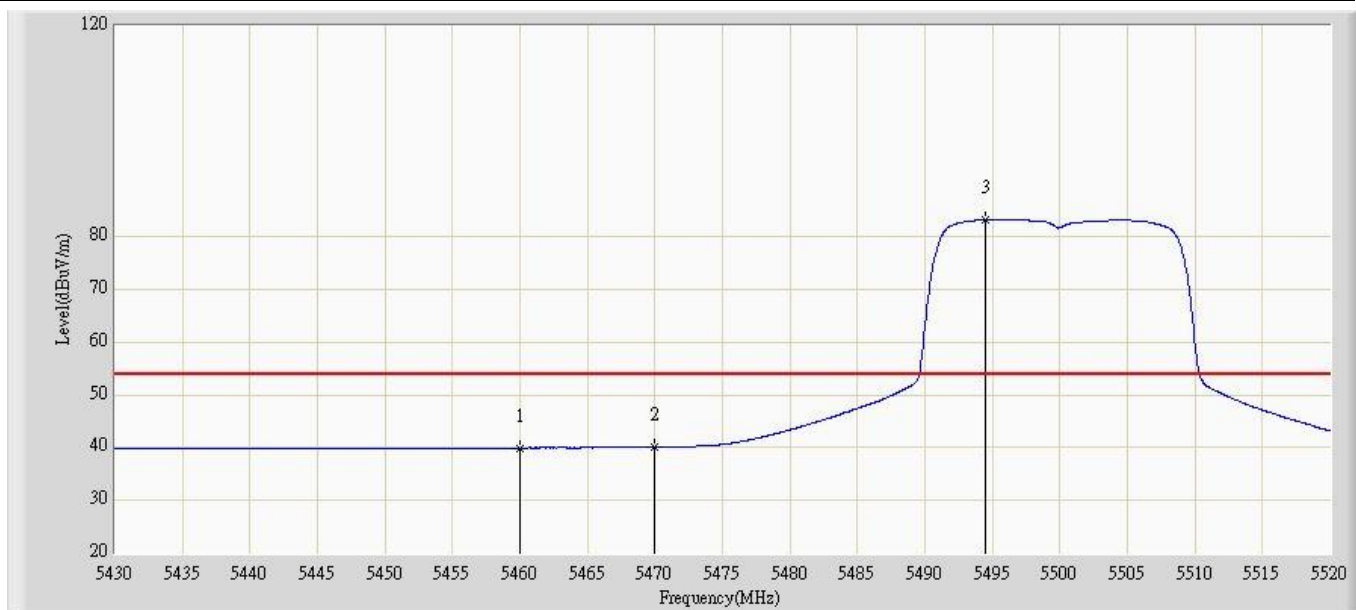


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	39.917	-0.581	-14.083	54.000	40.498	AV
2			5470.000	40.121	-0.386	-28.179	68.300	40.507	AV
3		*	5494.485	83.162	42.630	N/A	N/A	40.532	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:22
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11a Chain 2	

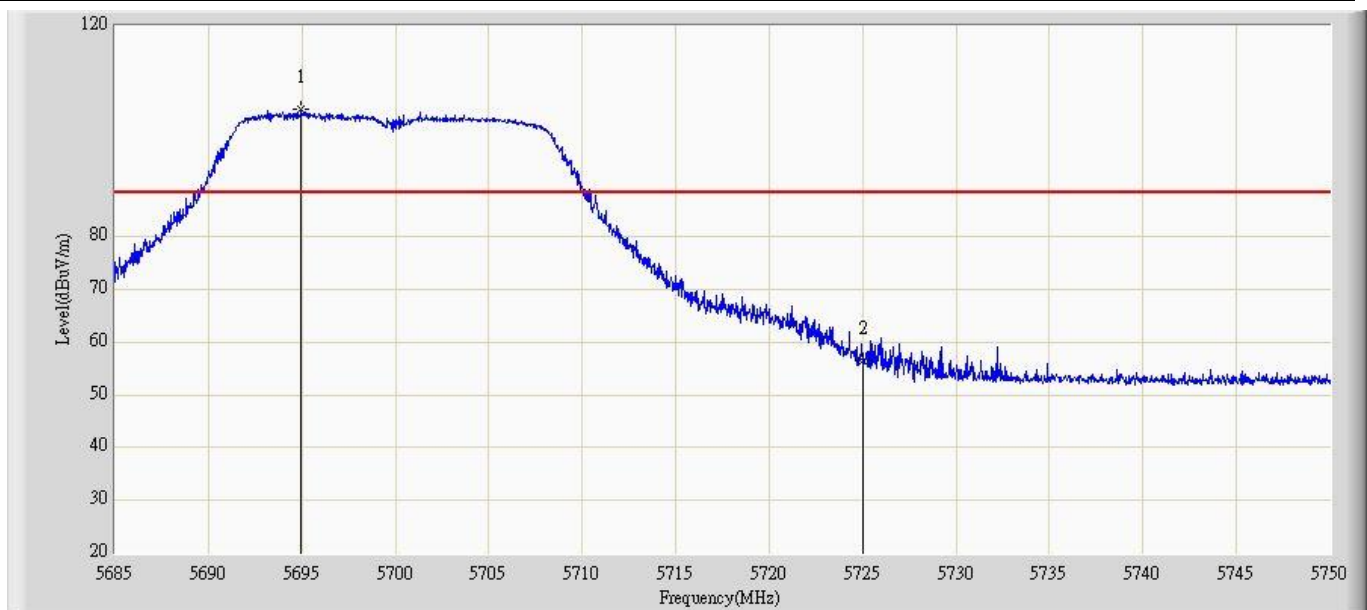


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5694.978	104.174	63.382	N/A	N/A	40.792	PK
2			5725.000	56.556	15.736	-31.744	88.300	40.820	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:24
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11a Chain 2	

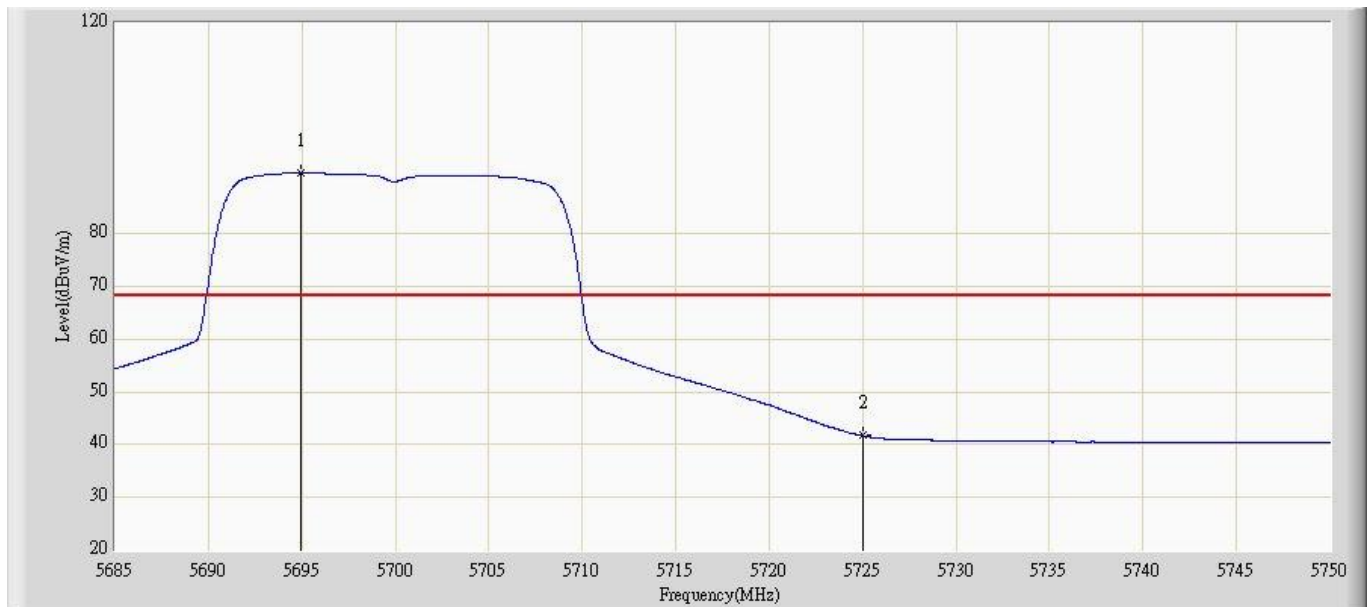


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5694.978	91.508	50.716	N/A	N/A	40.792	AV
2			5725.000	41.700	0.880	-26.600	68.300	40.820	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:24
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11a Chain 2	

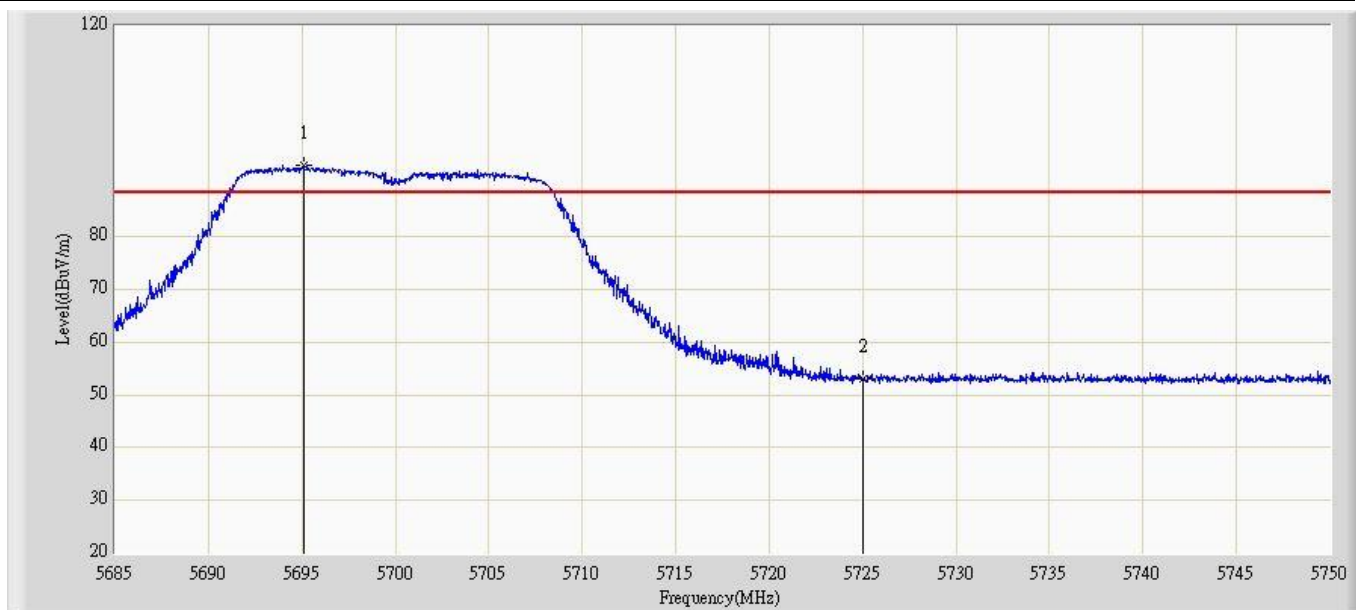


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5695.075	93.499	52.684	N/A	N/A	40.814	PK
2			5725.000	52.911	12.081	-35.389	88.300	40.830	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:27
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode2: Transmit at channel 5700MHz by 802.11a Chain 2	

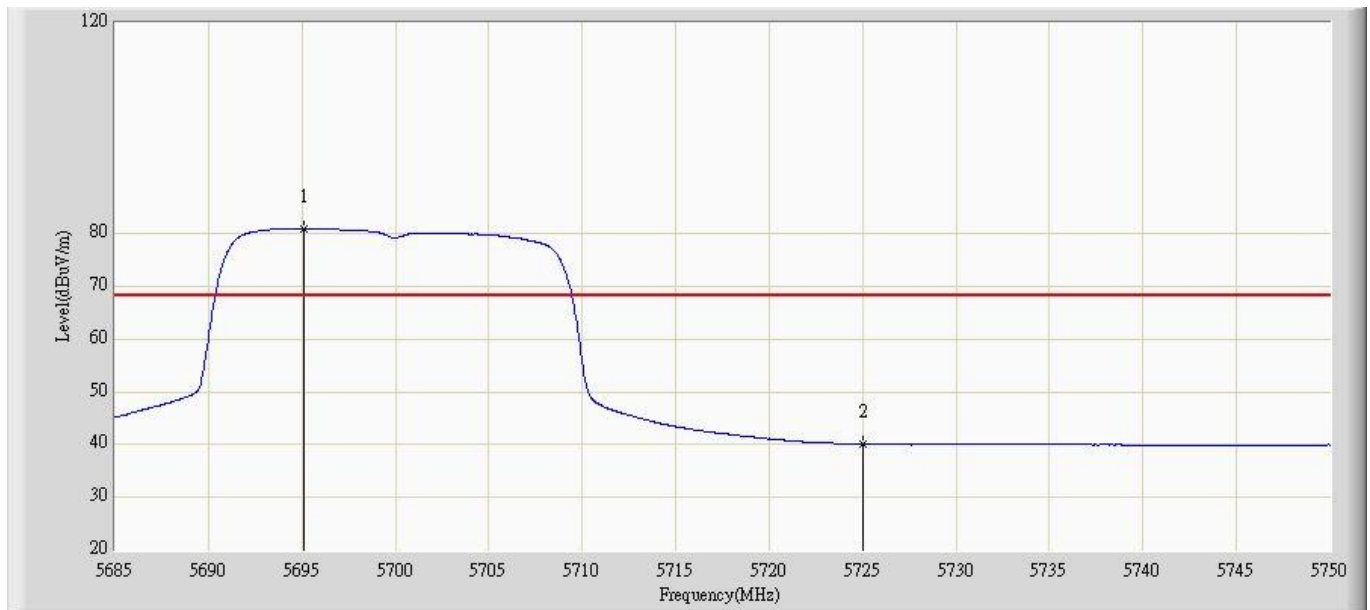


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5695.075	81.031	40.216	N/A	N/A	40.814	AV
2			5725.000	40.089	-0.741	-28.211	68.300	40.830	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40 Chain 2	

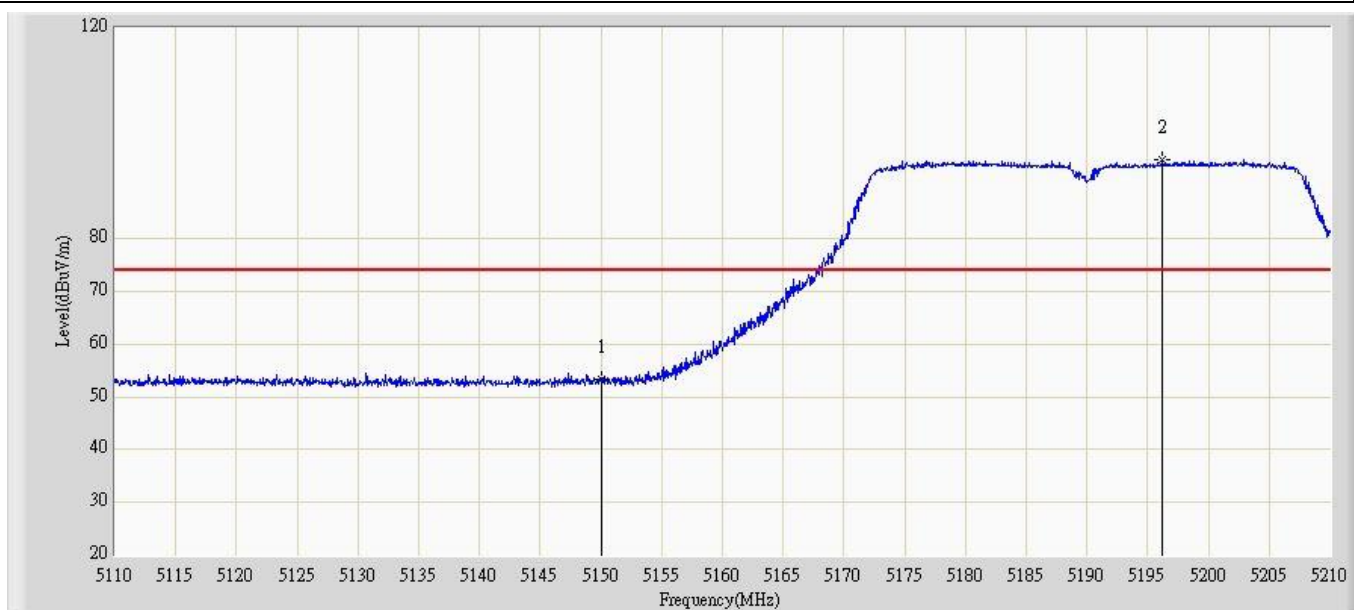


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	53.316	13.335	-20.684	74.000	39.981	PK
2		*	5196.250	94.976	54.959	N/A	N/A	40.017	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40 Chain 2	

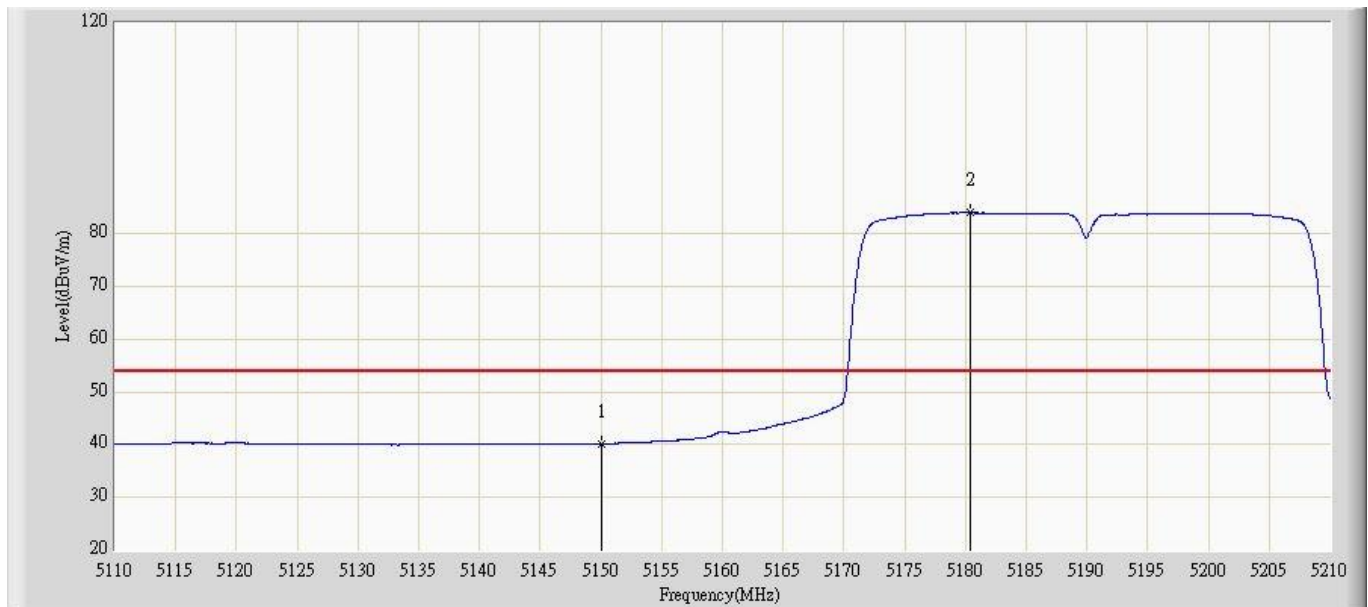


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	40.179	0.198	-13.821	54.000	39.981	AV
2		*	5180.400	83.953	43.954	N/A	N/A	39.999	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40 Chain 2	

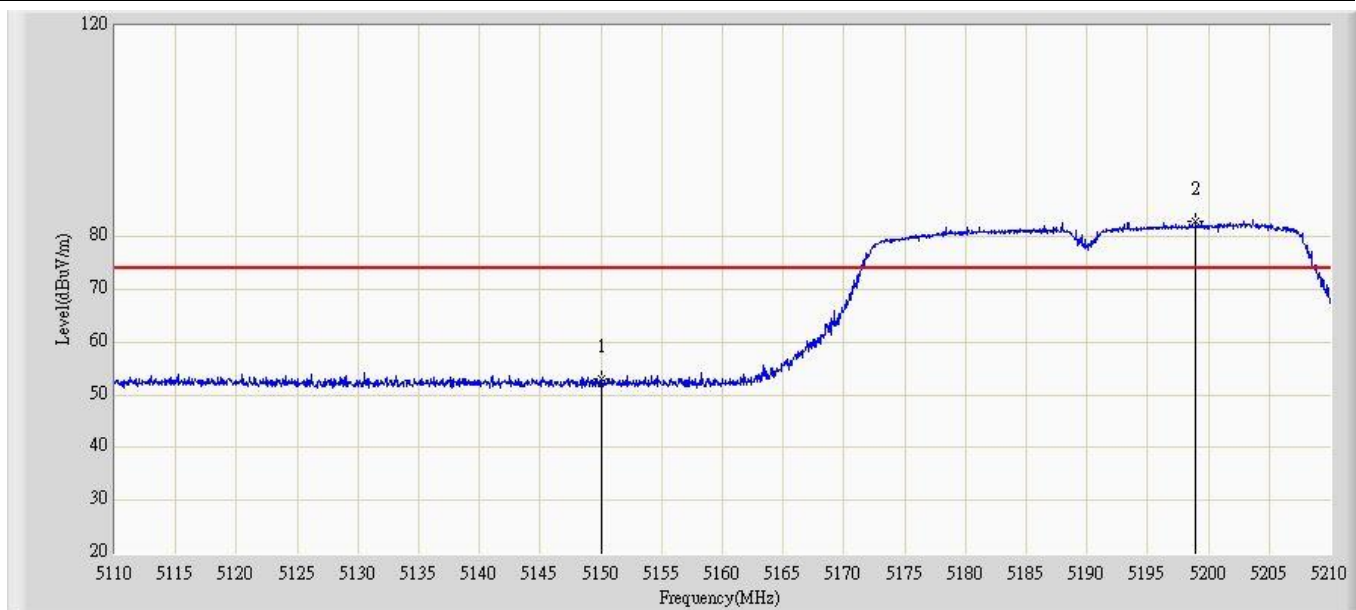


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	52.974	12.953	-21.026	74.000	40.021	PK
2		*	5198.950	82.966	42.828	N/A	N/A	40.138	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5190MHz by 802.11n40 Chain 2	

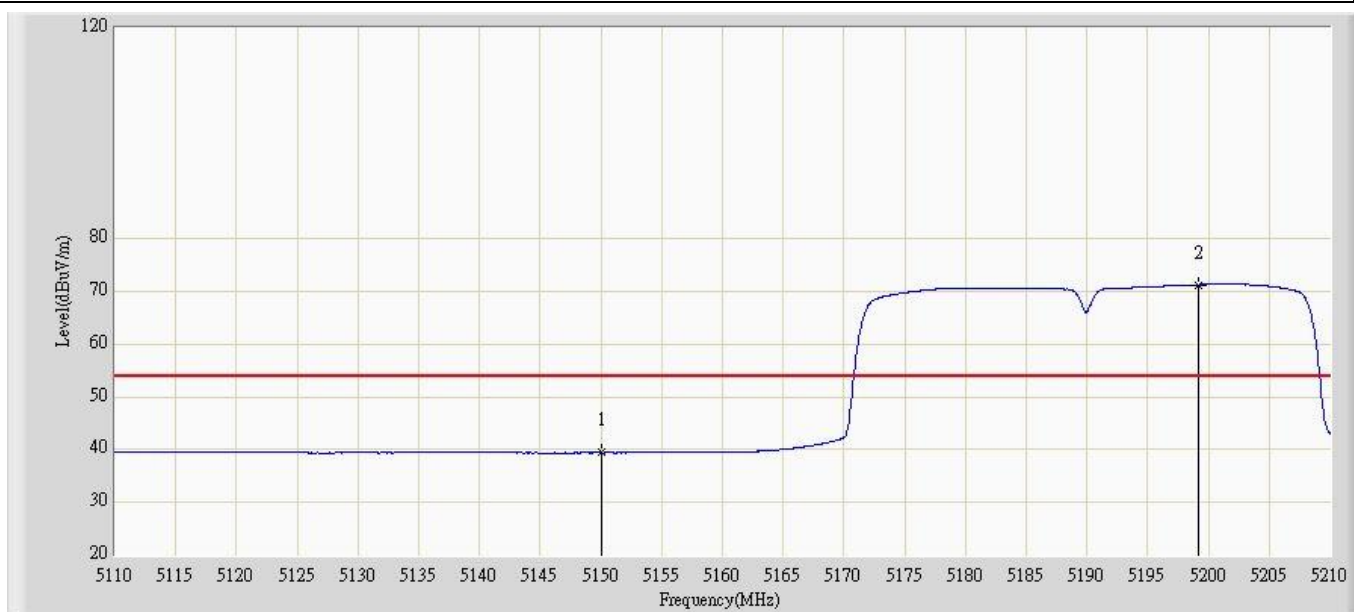


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	39.407	-0.614	-14.593	54.000	40.021	AV
2		*	5199.200	71.259	31.121	N/A	N/A	40.138	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40 Chain 2	

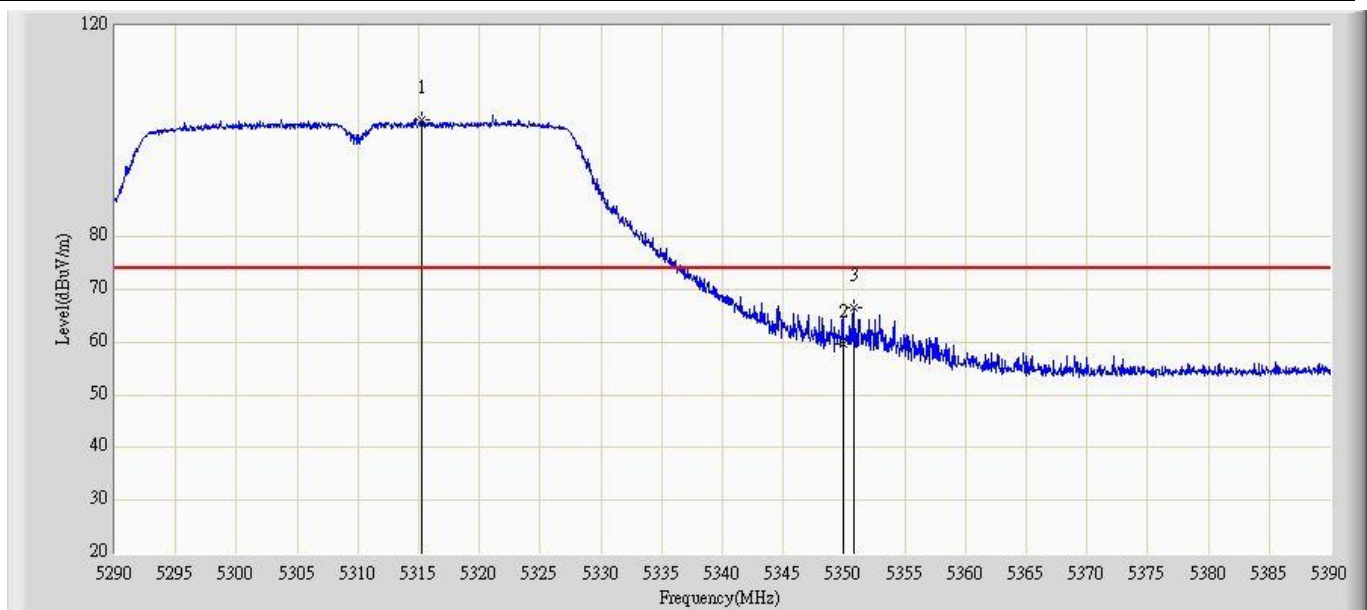


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5315.200	102.200	62.060	N/A	N/A	40.140	PK
2			5350.000	59.547	19.368	-14.453	74.000	40.179	PK
3			5350.850	66.467	26.287	-7.533	74.000	40.180	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40 Chain 2	

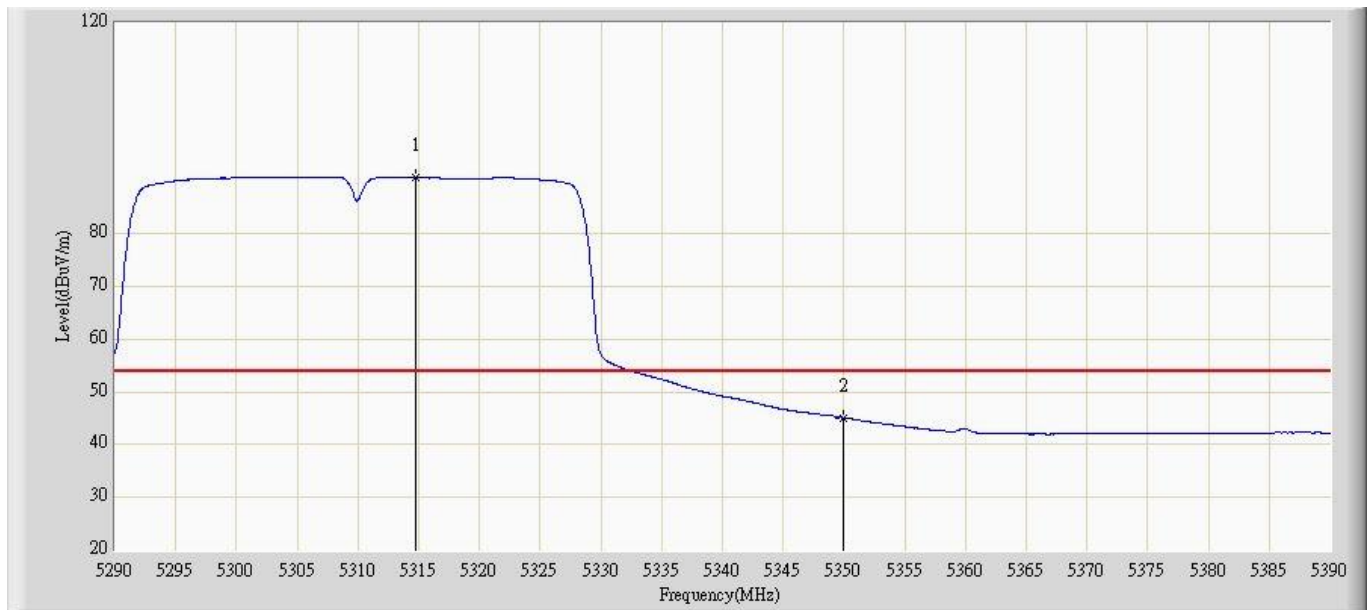


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5314.700	90.672	50.532	N/A	N/A	40.139	AV
2			5350.000	45.084	4.905	-8.916	54.000	40.179	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40 Chain 2	

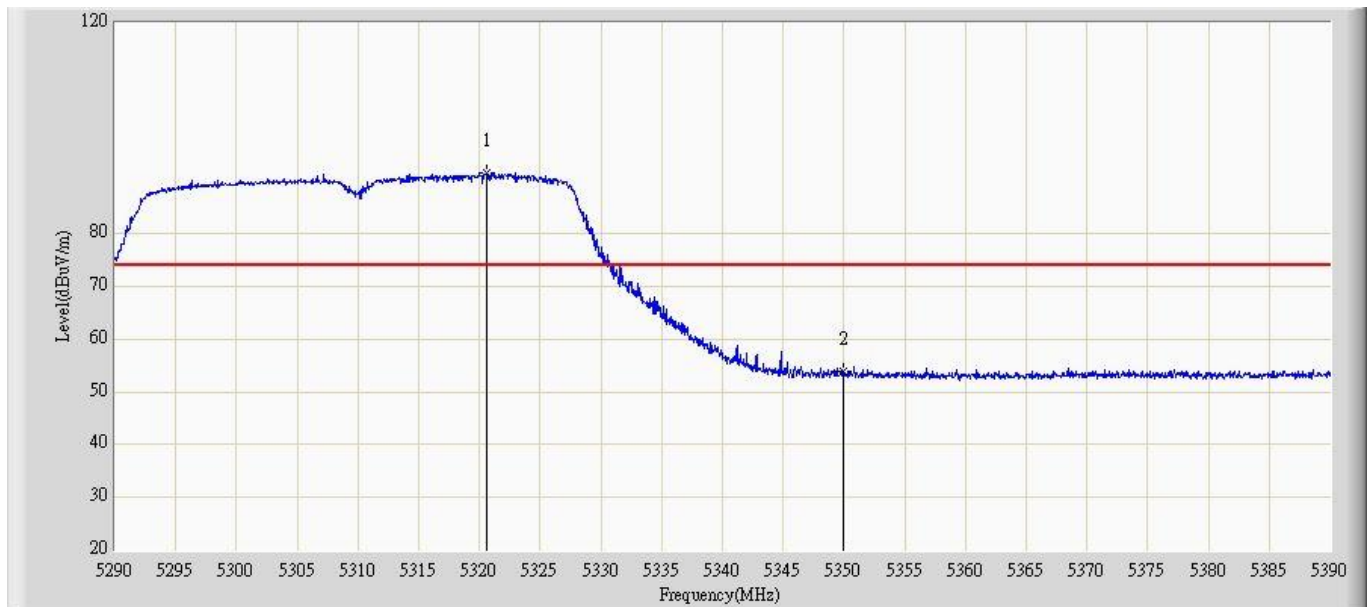


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5320.600	91.599	51.281	N/A	N/A	40.318	PK
2			5350.000	53.867	13.528	-20.133	74.000	40.339	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5310MHz by 802.11n40 Chain 2	

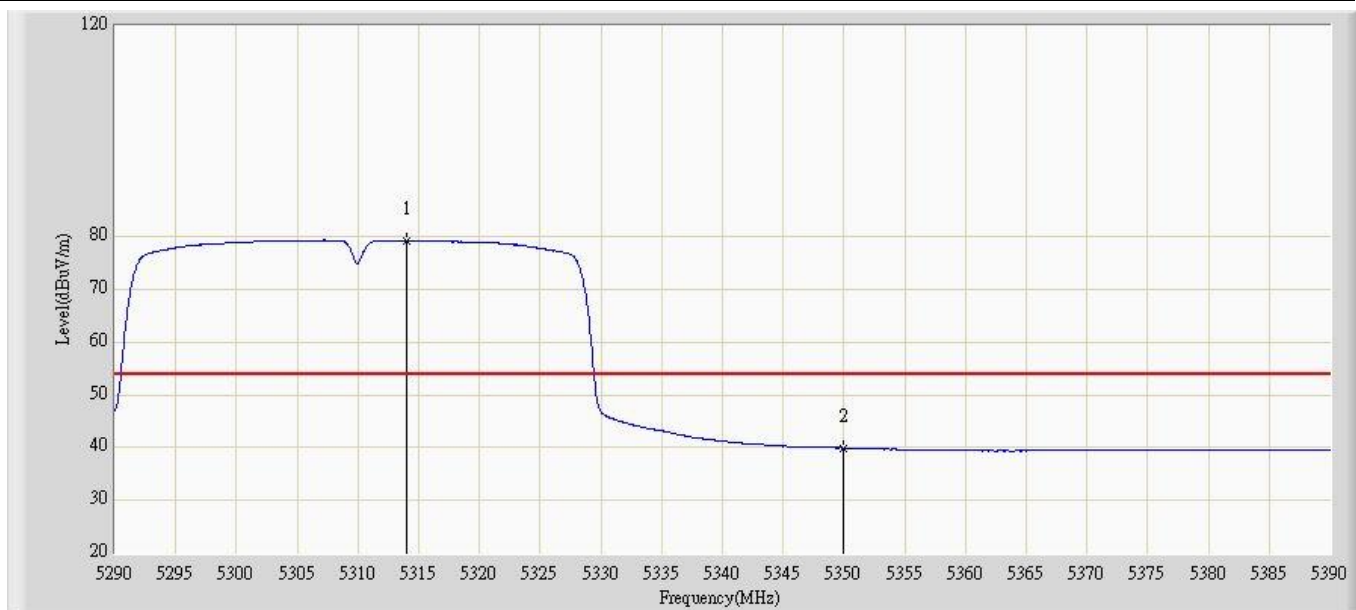


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5314.050	79.218	38.905	N/A	N/A	40.313	AV
2			5350.000	39.934	-0.405	-14.066	54.000	40.339	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40 Chain 2	

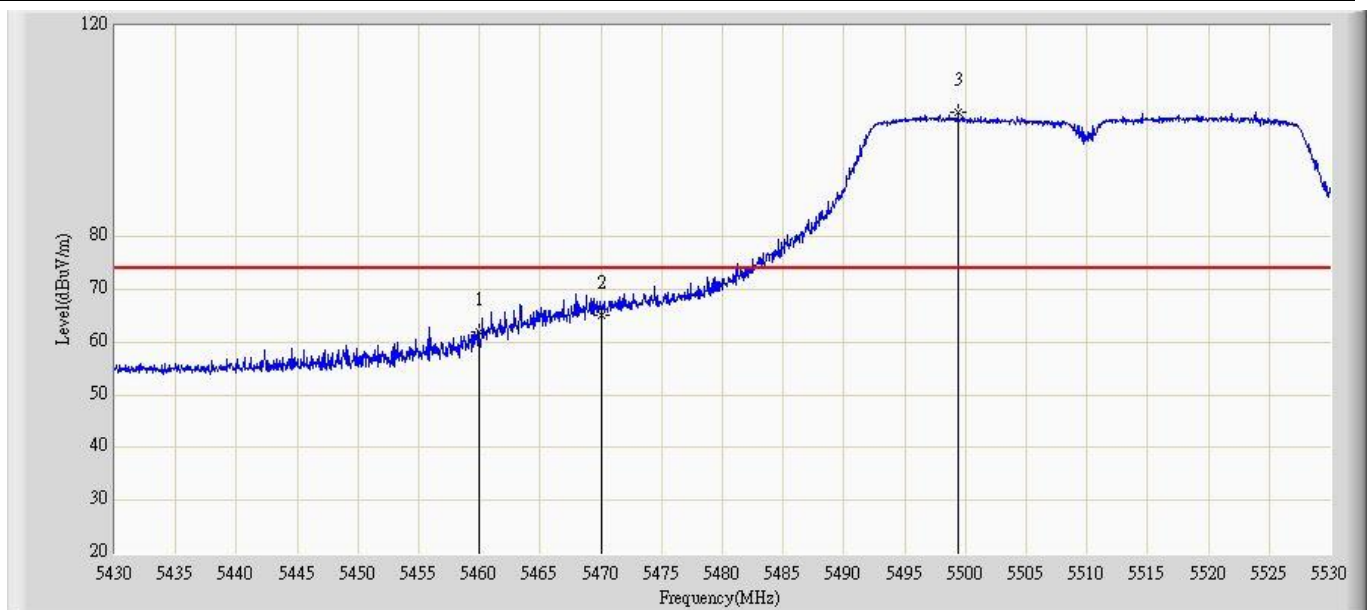


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	61.984	21.603	-12.016	74.000	40.382	PK
2			5470.000	65.129	24.733	-23.171	88.300	40.395	PK
3		*	5499.400	103.739	63.302	N/A	N/A	40.438	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40 Chain 2	

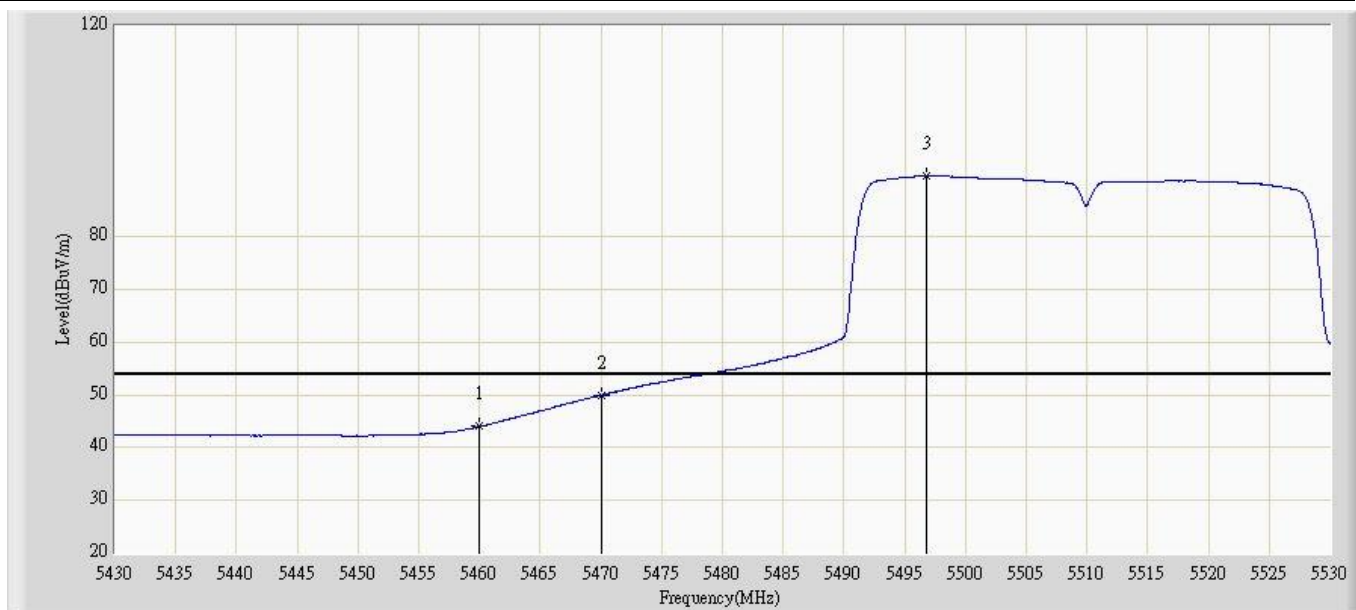


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	44.022	3.641	-9.978	54.000	40.382	AV
2			5470.000	49.967	9.571	-18.333	68.300	40.395	AV
3		*	5496.800	91.522	51.089	N/A	N/A	40.433	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40 Chain 2	

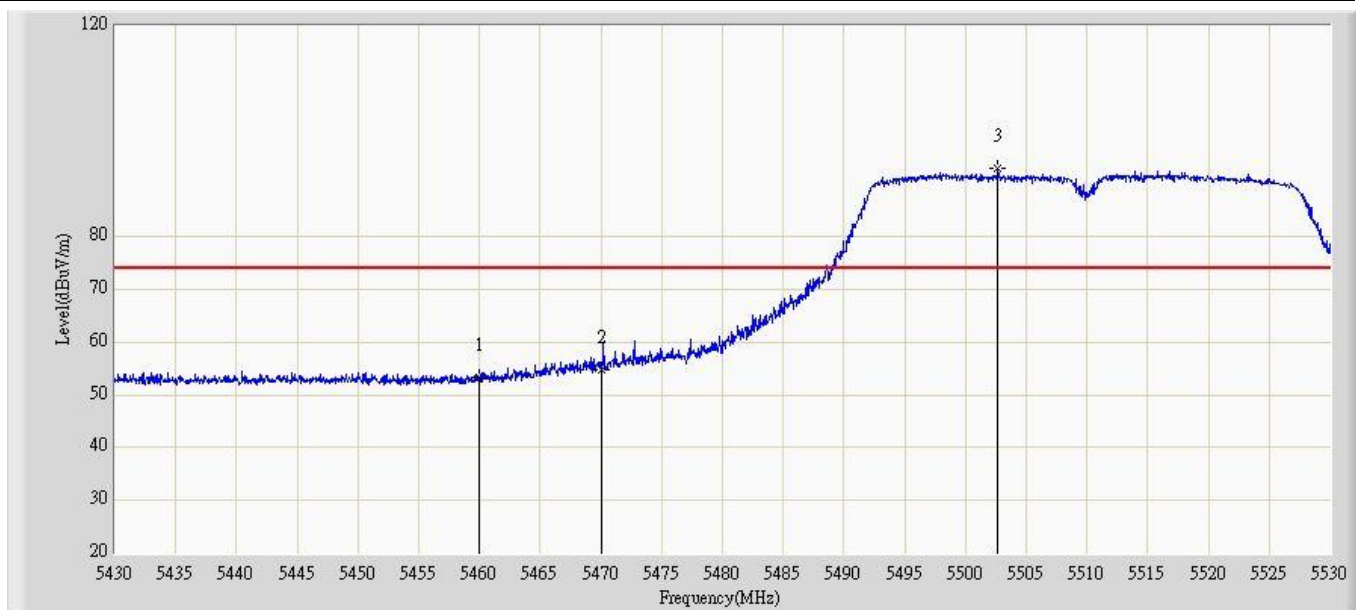


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	53.319	12.821	-20.681	74.000	40.498	PK
2			5470.000	54.748	14.241	-33.552	88.300	40.507	PK
3		*	5502.650	93.036	52.495	N/A	N/A	40.542	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/07 - 16:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode3: Transmit at channel 5510MHz by 802.11n40 Chain 2	

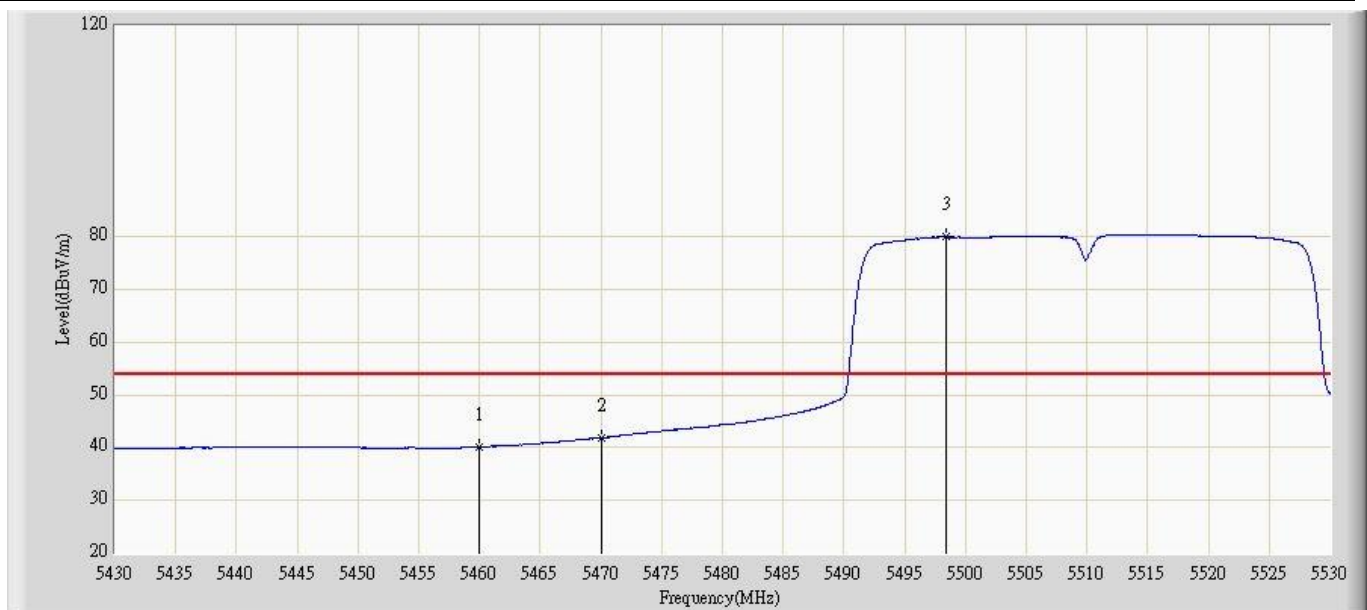


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	40.091	-0.407	-13.909	54.000	40.498	AV
2			5470.000	41.881	1.374	-26.419	68.300	40.507	AV
3		*	5498.400	79.937	39.400	N/A	N/A	40.537	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 00:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 5180MHz by 802.11N20 Chain 0+1	

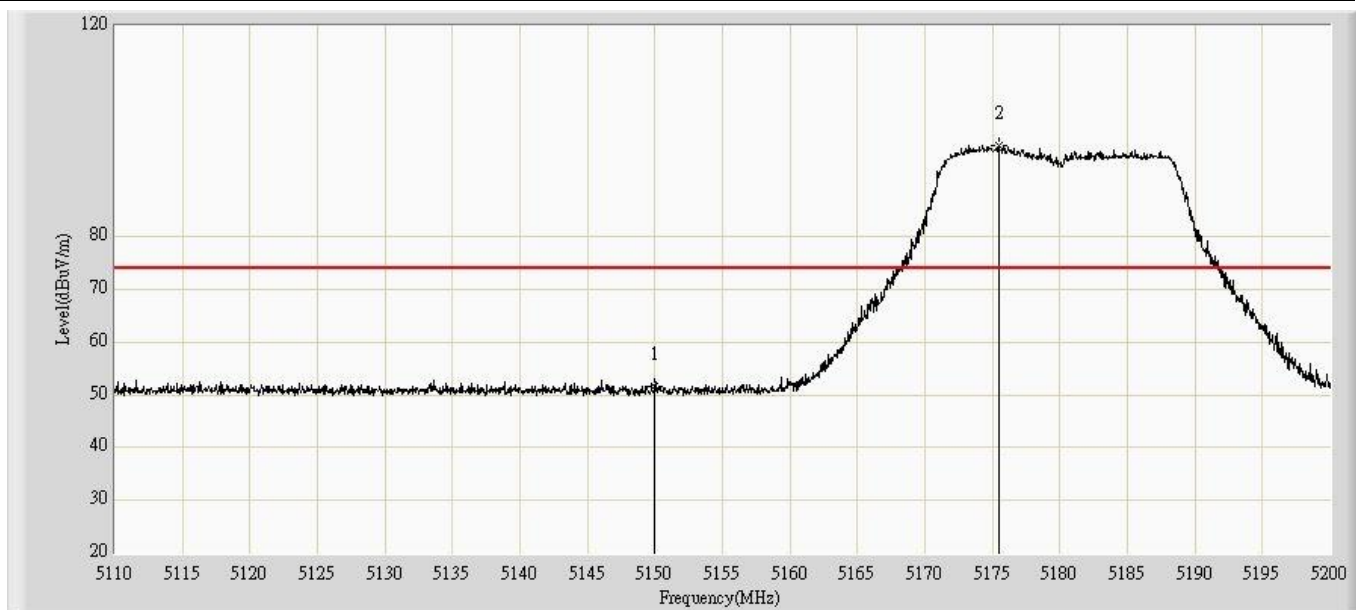


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	51.598	11.617	-22.402	74.000	39.981	PK
2		*	5175.430	97.302	57.306	N/A	N/A	39.996	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 00:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 5180MHz by 802.11N20 Chain 0+1	

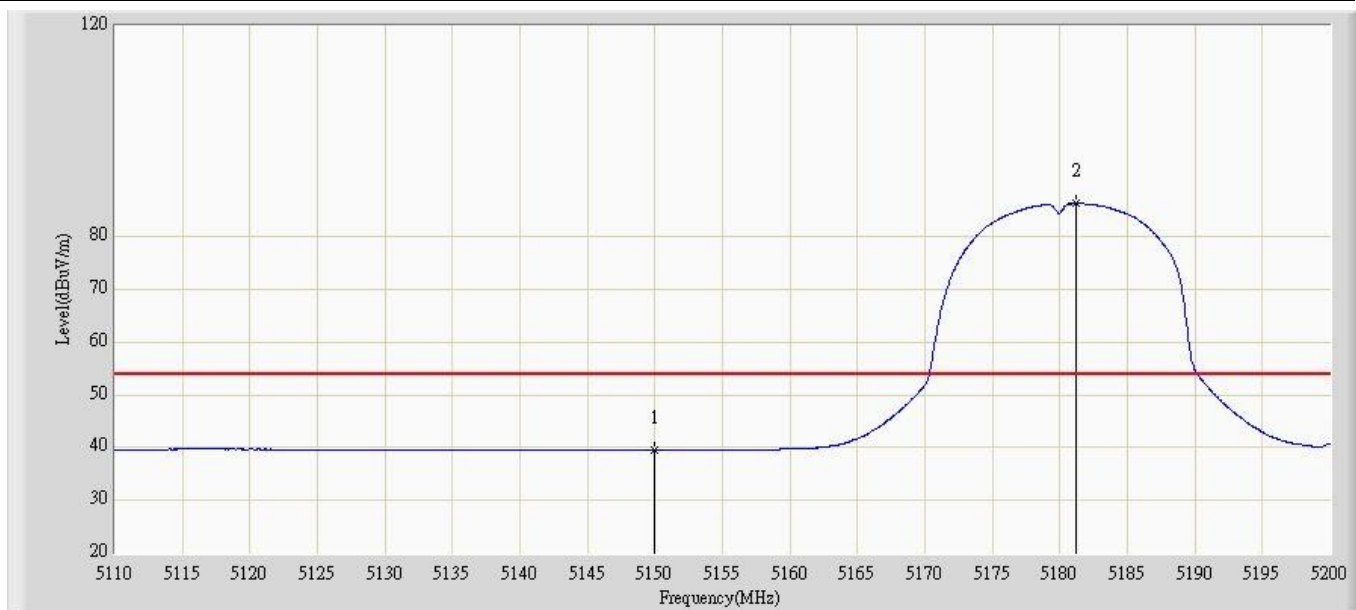

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	39.529	-0.452	-14.471	54.000	39.981	AV
2		*	5181.190	86.317	46.317	N/A	N/A	40.000	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 00:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 5180MHz by 802.11N20 Chain 0+1	

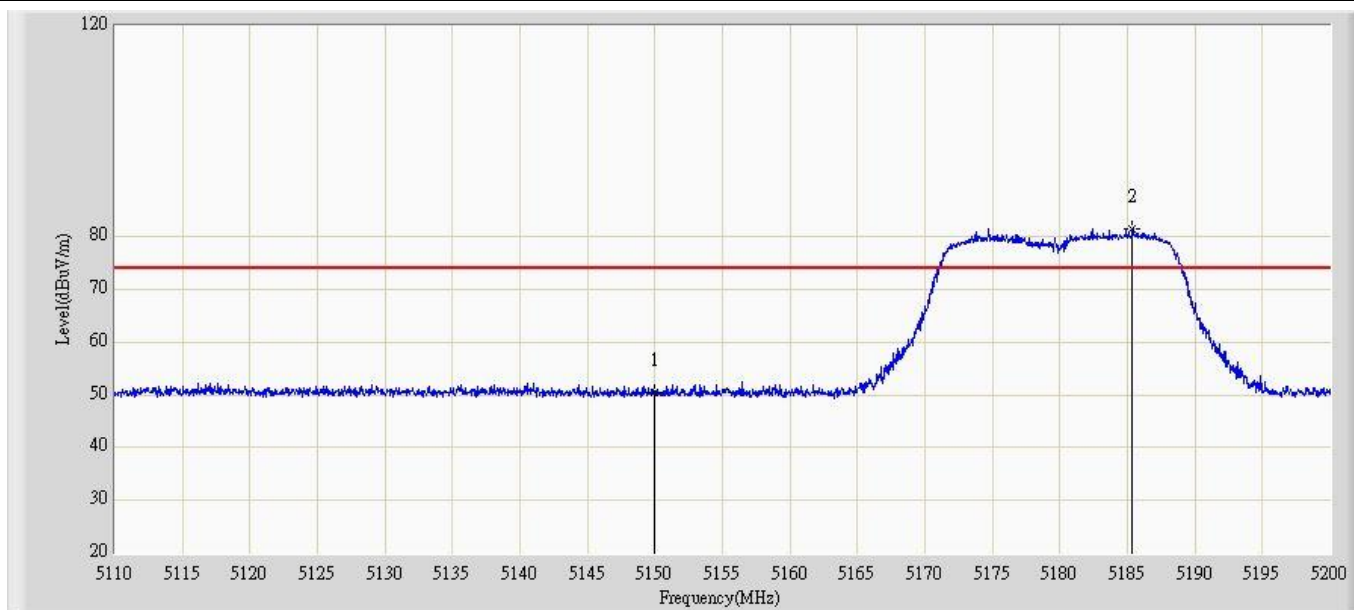


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	50.415	10.394	-23.585	74.000	40.021	PK
2		*	5185.330	81.368	41.268	N/A	N/A	40.100	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 00:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 5180MHz by 802.11N20 Chain 0+1	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	39.224	-0.797	-14.776	54.000	40.021	AV
2		*	5182.045	69.777	29.686	N/A	N/A	40.091	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 01:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 5320MHz by 802.11N20 Chain 0+1	

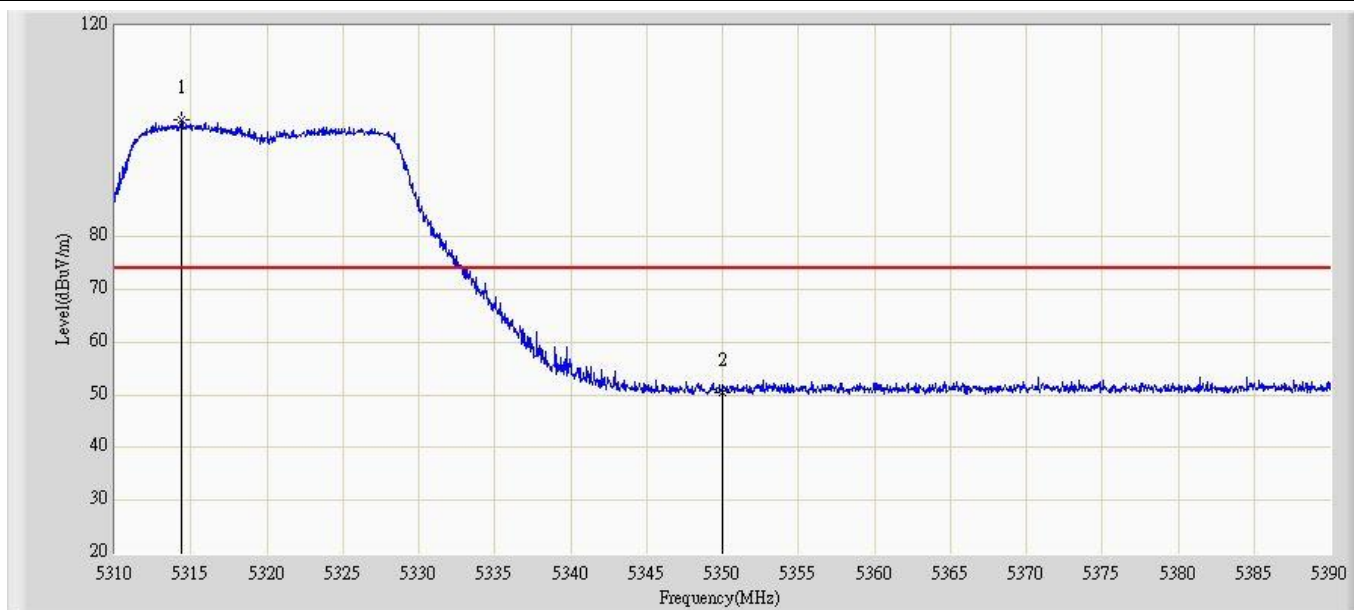


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5314.400	102.221	62.082	N/A	N/A	40.139	PK
2			5350.000	50.488	10.309	-23.512	74.000	40.179	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 01:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 5320MHz by 802.11N20 Chain 0+1	

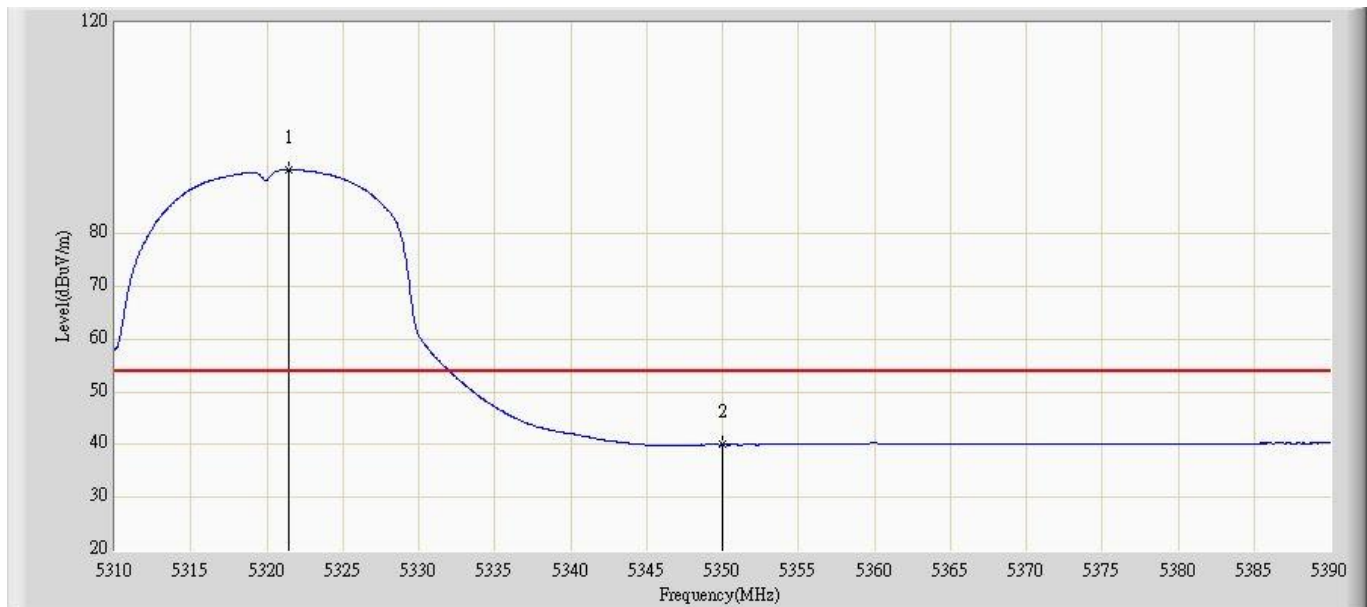


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5321.400	92.091	51.944	N/A	N/A	40.147	AV
2			5350.000	39.993	-0.186	-14.007	54.000	40.179	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 01:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 5320MHz by 802.11N20 Chain 0+1	

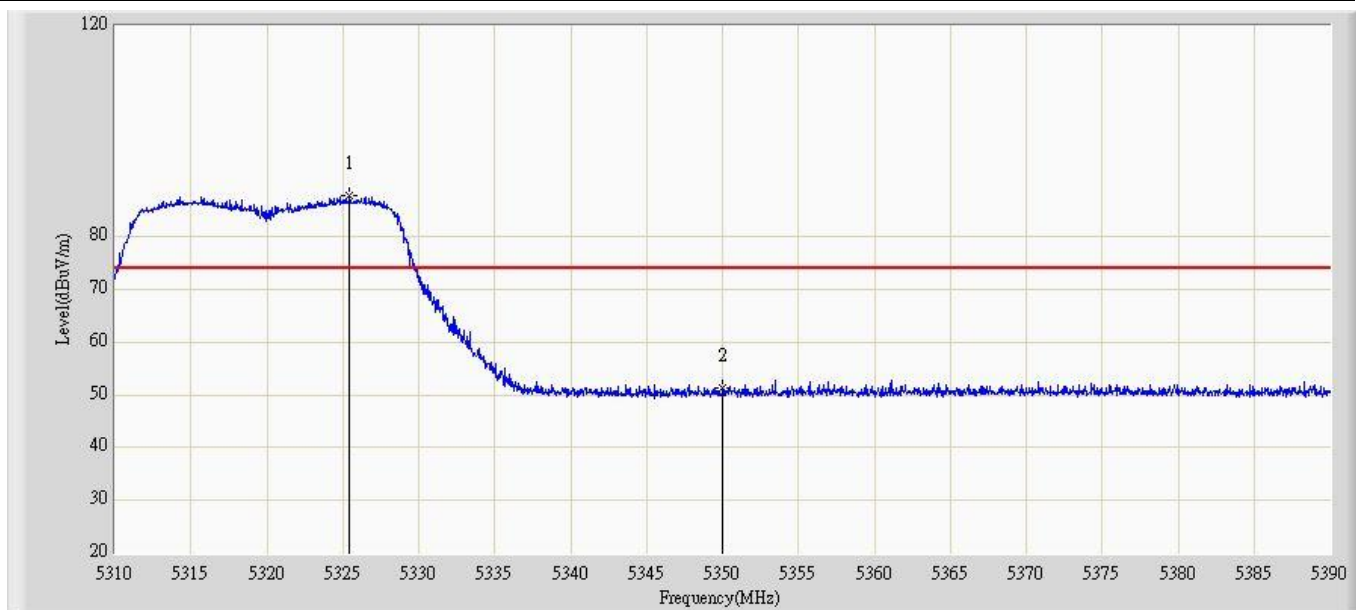


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5325.440	87.706	47.386	N/A	N/A	40.320	PK
2			5350.000	51.319	10.980	-22.681	74.000	40.339	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 01:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode4: Transmit at channel 5320MHz by 802.11N20 Chain 0+1	

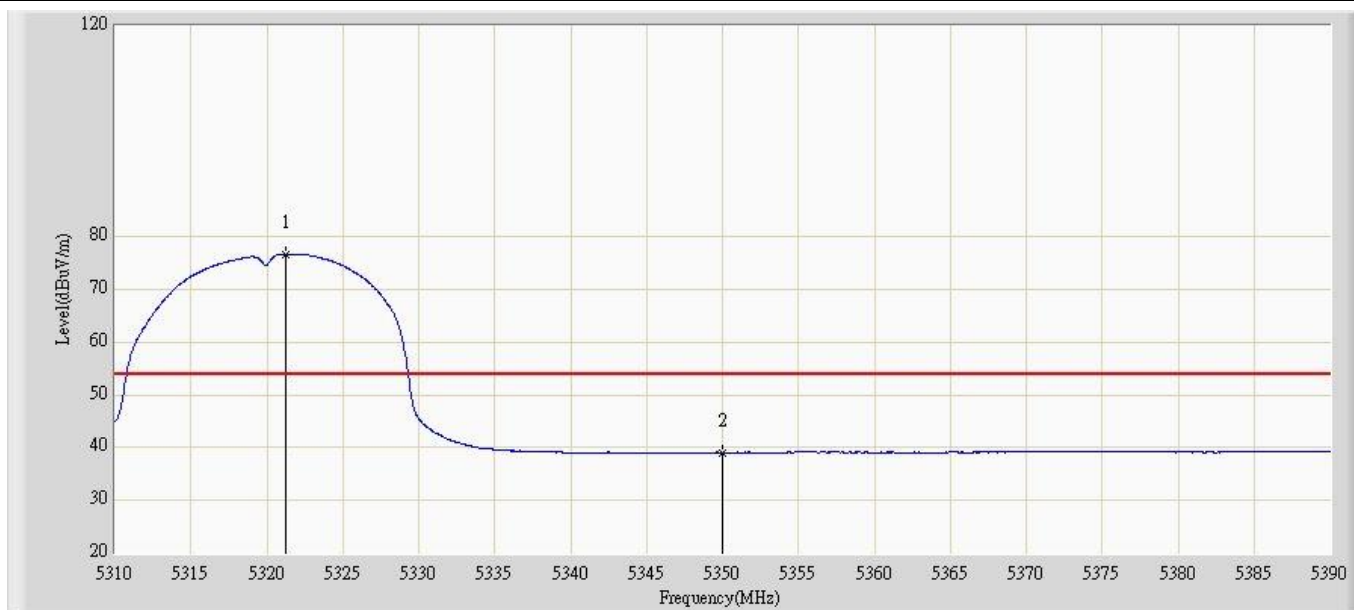


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5321.280	76.723	36.405	N/A	N/A	40.318	AV
2			5350.000	39.068	-1.271	-14.932	54.000	40.339	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 01:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5500MHz by 802.11n20 Chain 0+1	

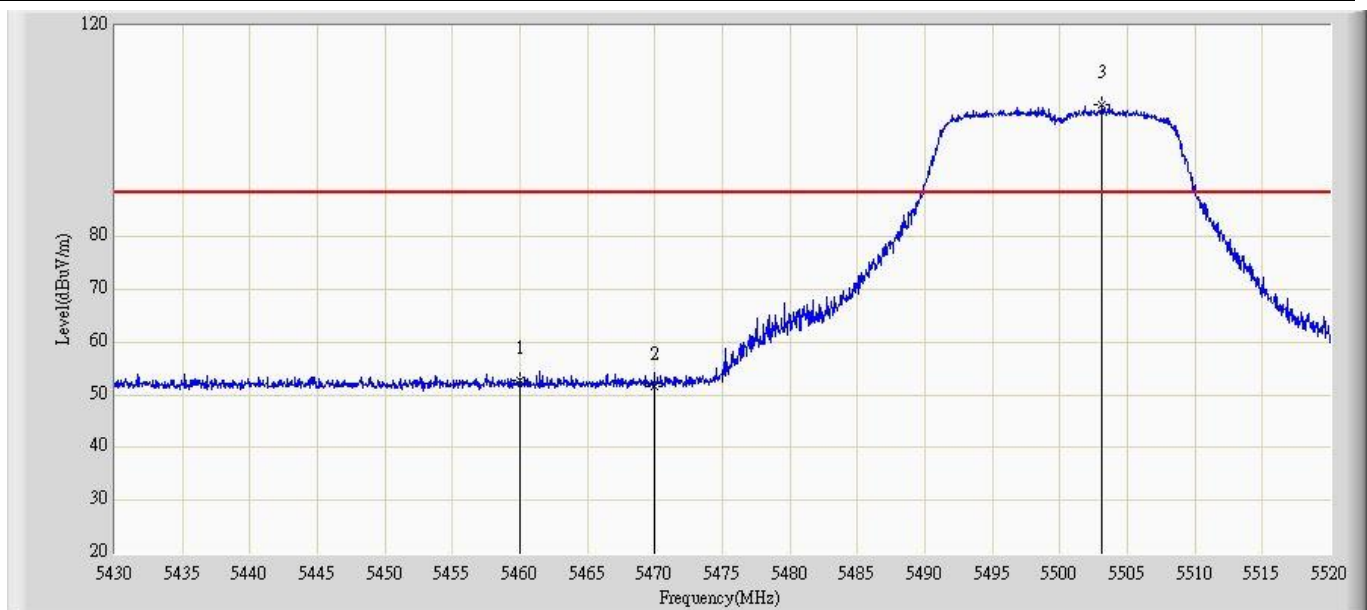


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	52.777	12.396	-21.223	74.000	40.382	PK
2			5470.000	51.629	11.233	-36.671	88.300	40.395	PK
3		*	5503.125	105.069	64.626	N/A	N/A	40.443	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 01:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5500MHz by 802.11n20 Chain 0+1	

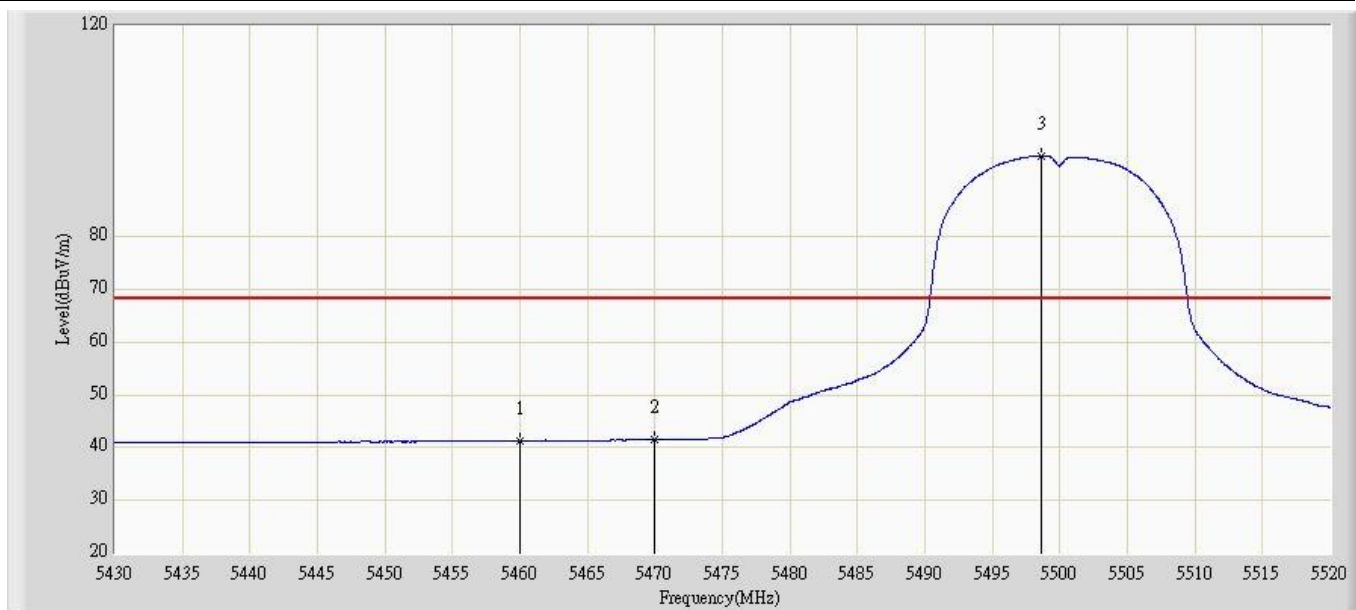


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	41.312	0.931	-12.688	54.000	40.382	AV
2			5470.000	41.466	1.070	-26.834	68.300	40.395	AV
3		*	5498.670	95.358	54.922	N/A	N/A	40.436	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 01:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5500MHz by 802.11n20 Chain 0+1	

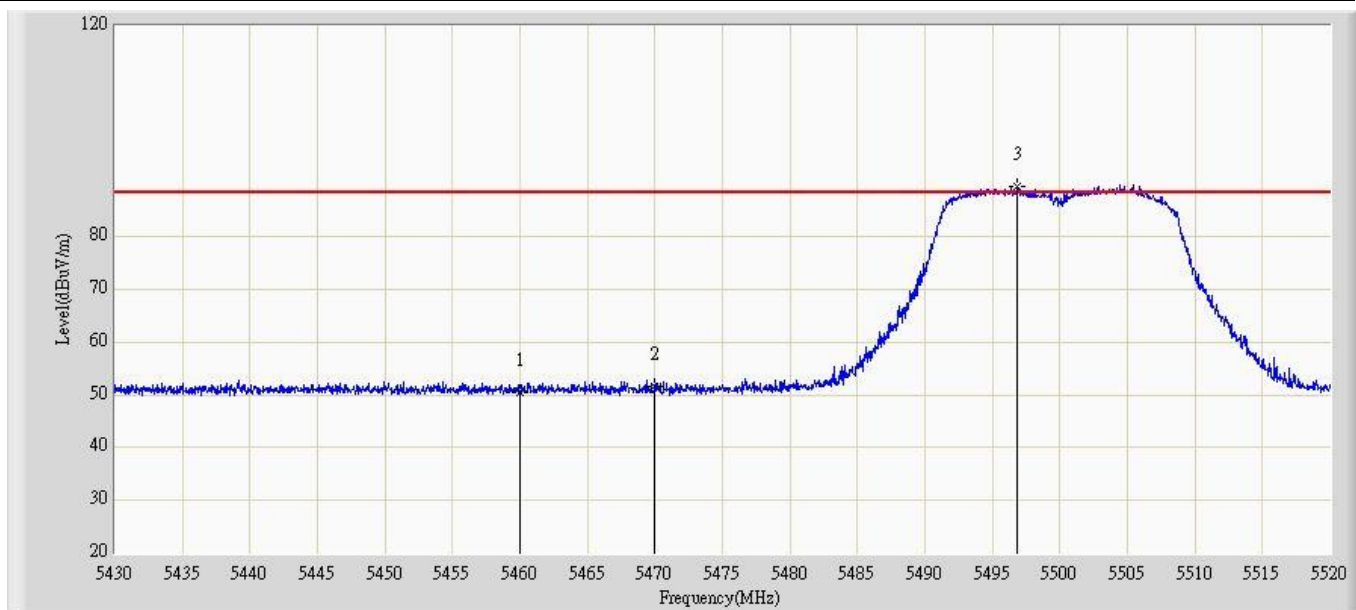


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	50.501	10.003	-23.499	74.000	40.498	PK
2			5470.000	51.612	11.105	-36.688	88.300	40.507	PK
3		*	5496.870	89.474	48.939	N/A	N/A	40.535	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 01:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5500MHz by 802.11n20 Chain 0+1	

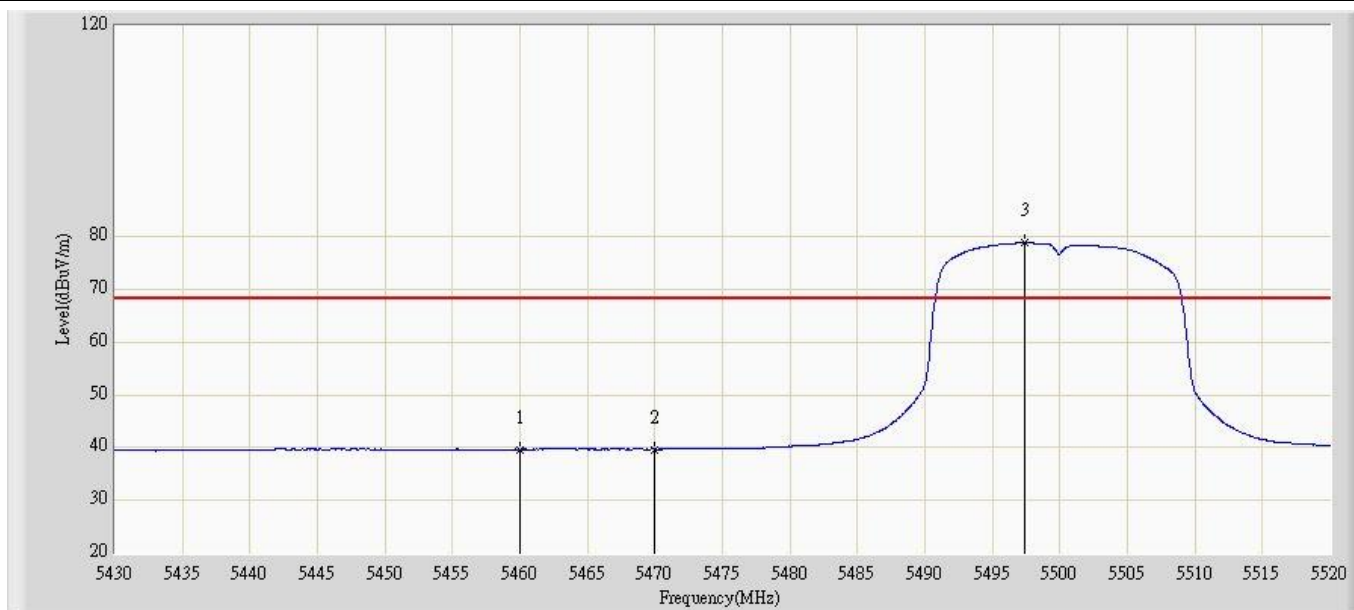


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	39.592	-0.906	-14.408	54.000	40.498	AV
2			5470.000	39.679	-0.828	-28.621	68.300	40.507	AV
3		*	5497.410	78.810	38.274	N/A	N/A	40.536	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 01:55
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5700MHz by 802.11n20 Chain 0+1	

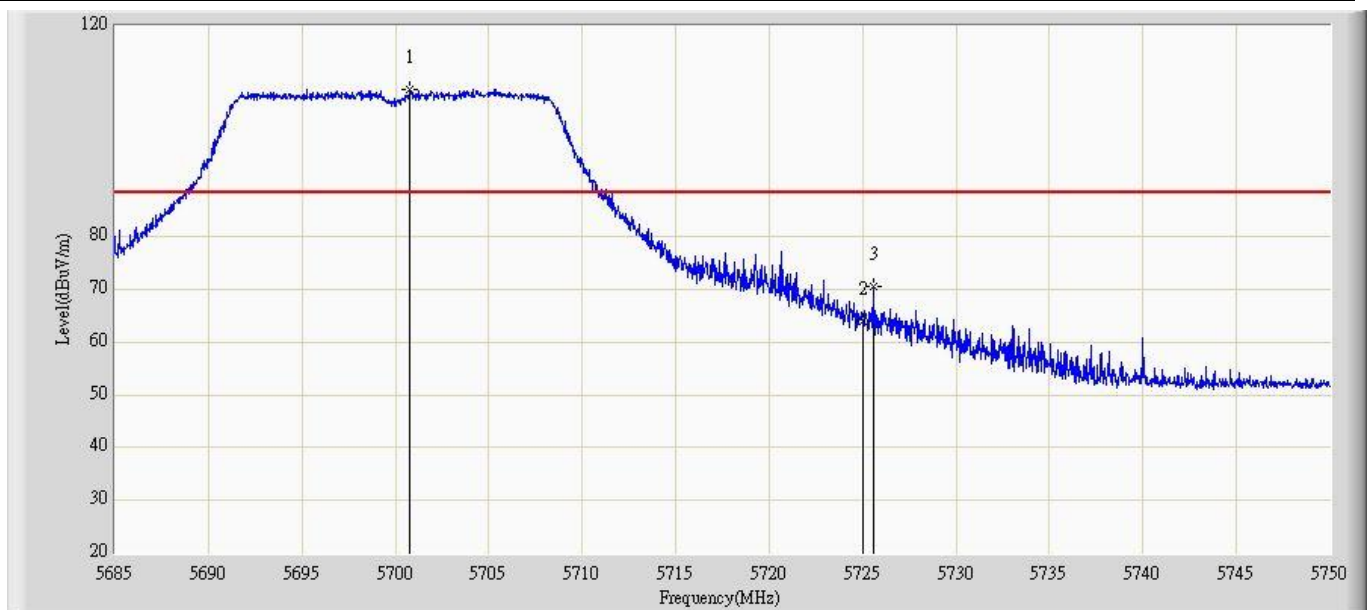


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5700.795	107.885	67.089	N/A	N/A	40.796	PK
2			5725.000	63.951	23.131	-24.349	88.300	40.820	PK
3			5725.560	70.640	29.820	-17.660	88.300	40.820	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 01:57
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5700MHz by 802.11n20 Chain 0+1	

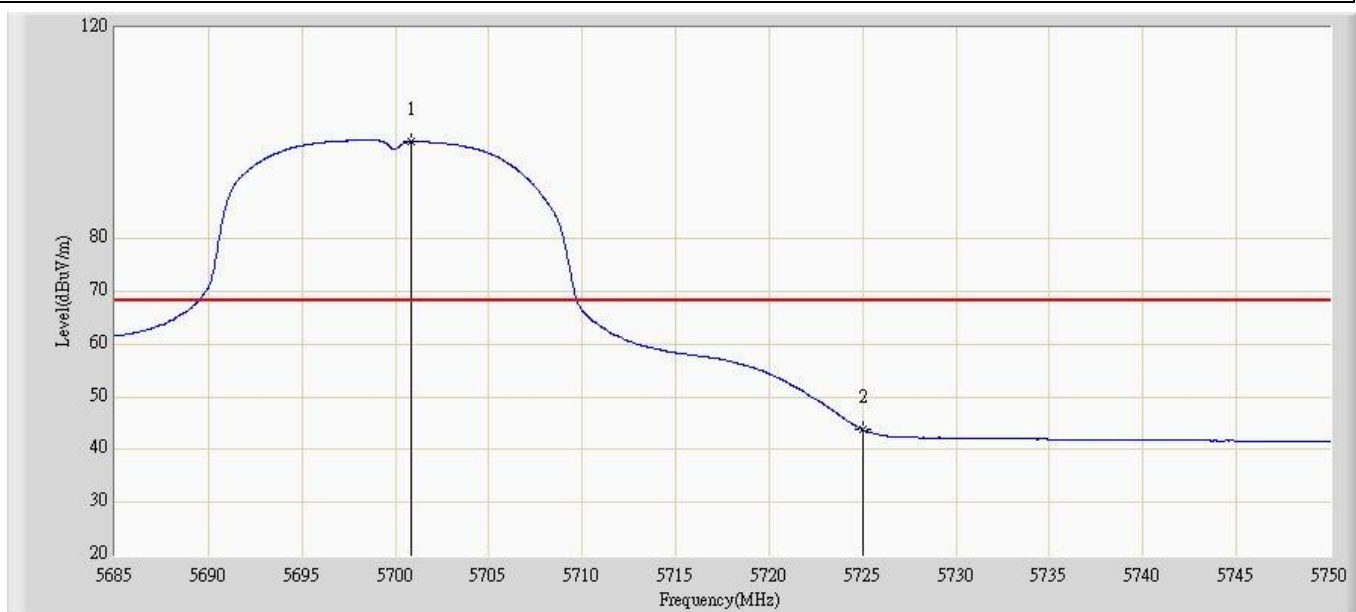


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5700.828	98.453	57.657	N/A	N/A	40.796	AV
2			5725.000	43.838	3.018	-24.462	68.300	40.820	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 01:58
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5700MHz by 802.11n20 Chain 0+1	

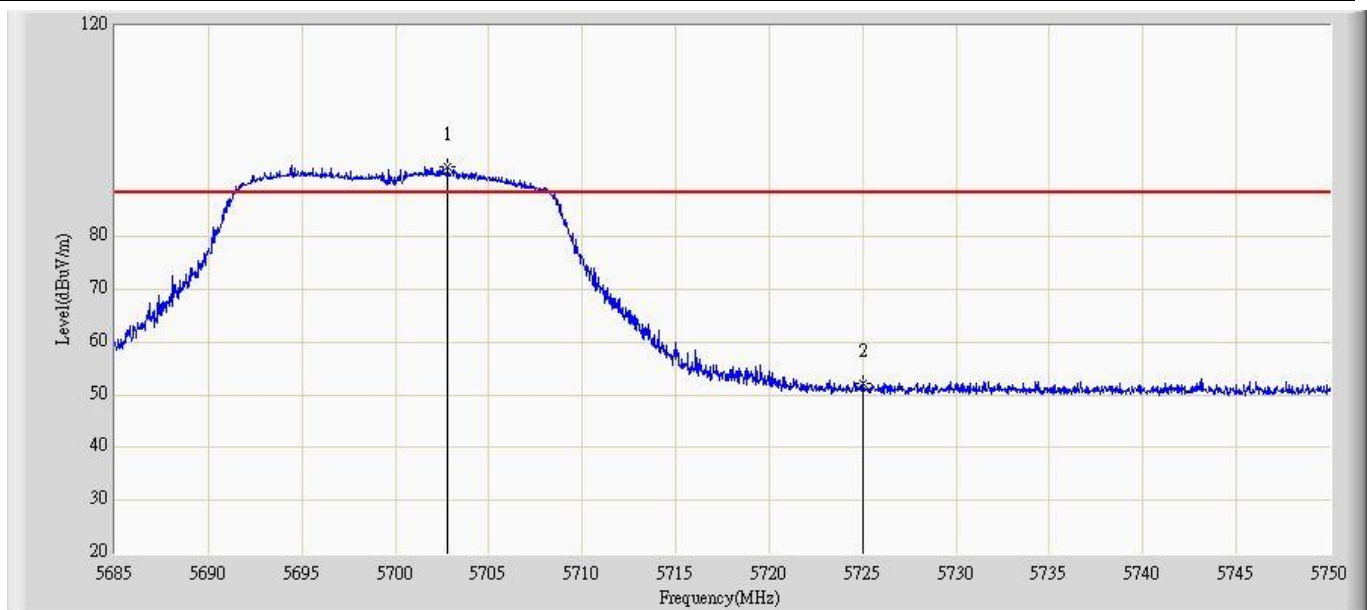


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5702.810	93.336	52.520	N/A	N/A	40.816	PK
2			5725.000	52.128	11.298	-36.172	88.300	40.830	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 01:59
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5700MHz by 802.11n20 Chain 0+1	

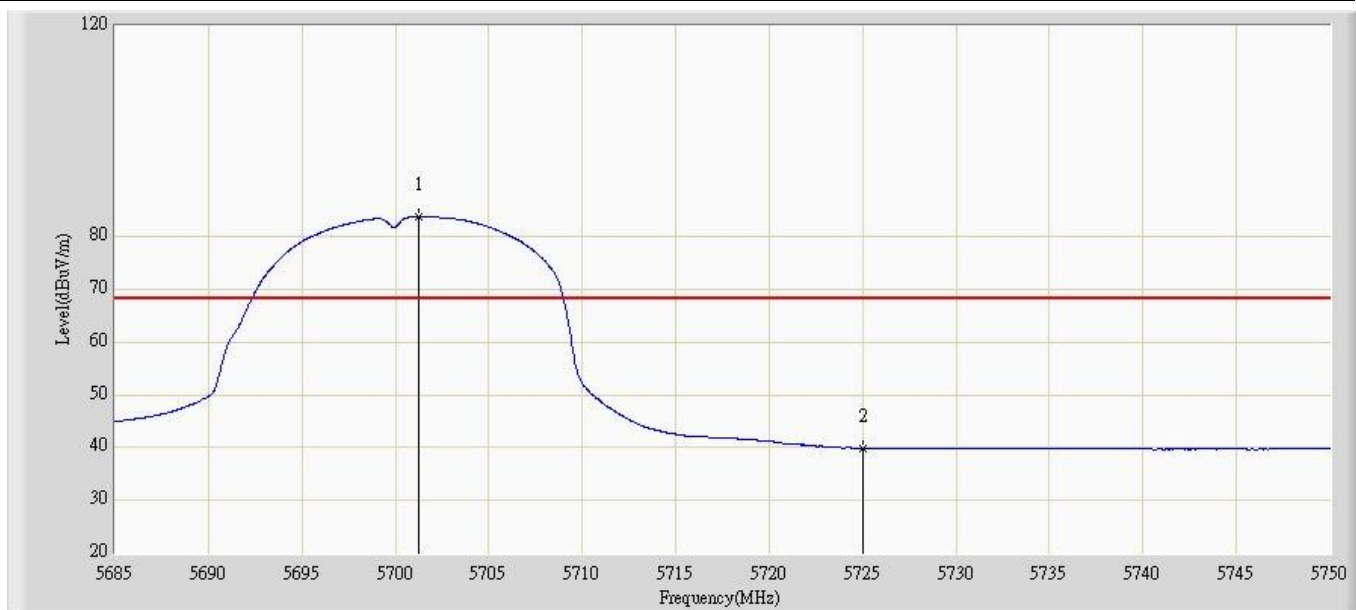


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5701.250	83.822	43.006	N/A	N/A	40.816	AV
2			5725.000	39.932	-0.898	-28.368	68.300	40.830	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5190MHz by 802.11n40 Chain 0+1	

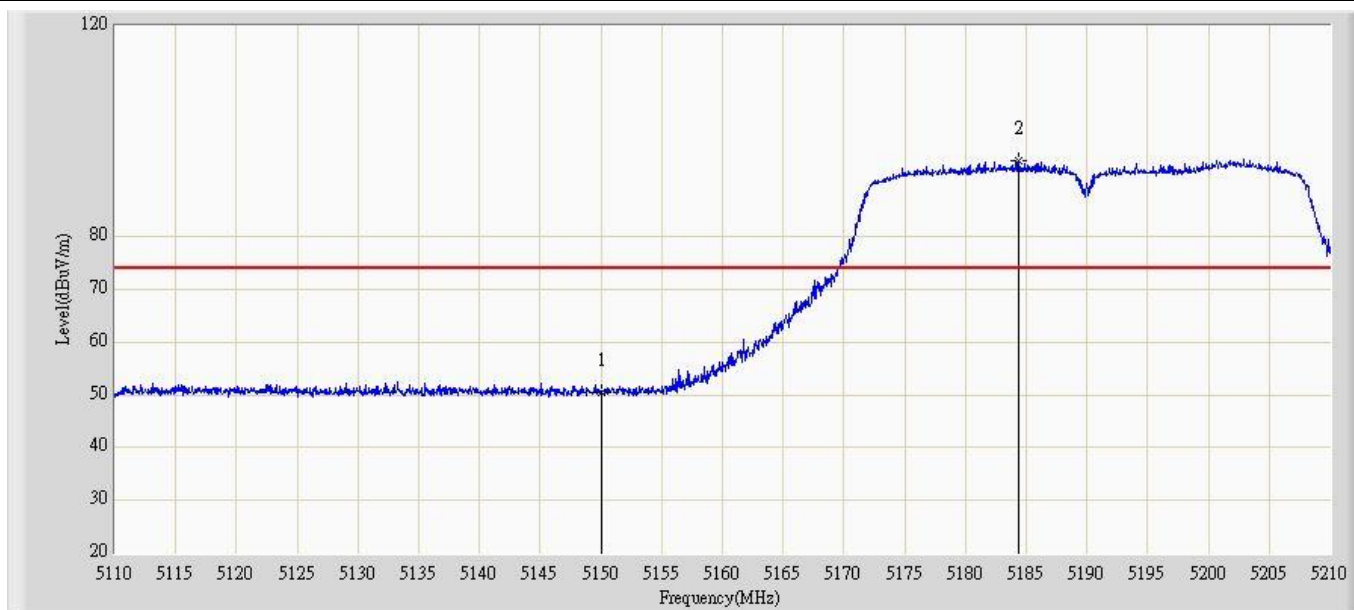


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	50.495	10.514	-23.505	74.000	39.981	PK
2		*	5184.400	94.530	54.527	N/A	N/A	40.003	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5190MHz by 802.11n40 Chain 0+1	

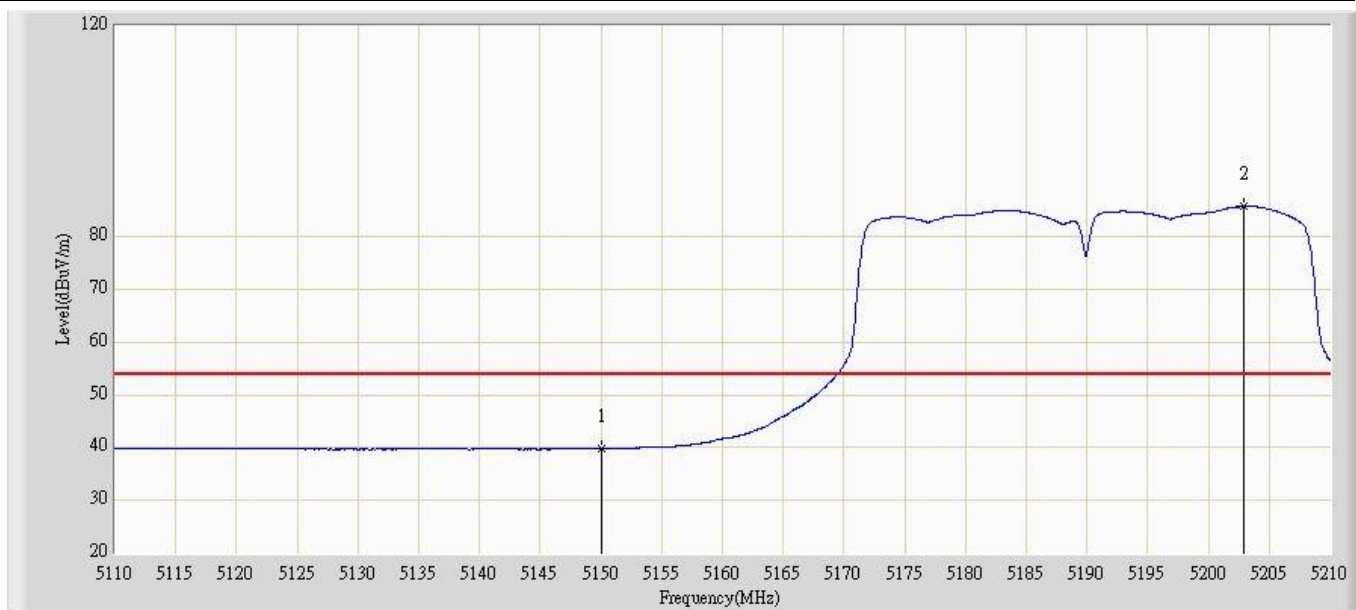


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	39.793	-0.188	-14.207	54.000	39.981	AV
2		*	5202.950	85.754	45.732	N/A	N/A	40.022	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5190MHz by 802.11n40 Chain 0+1	

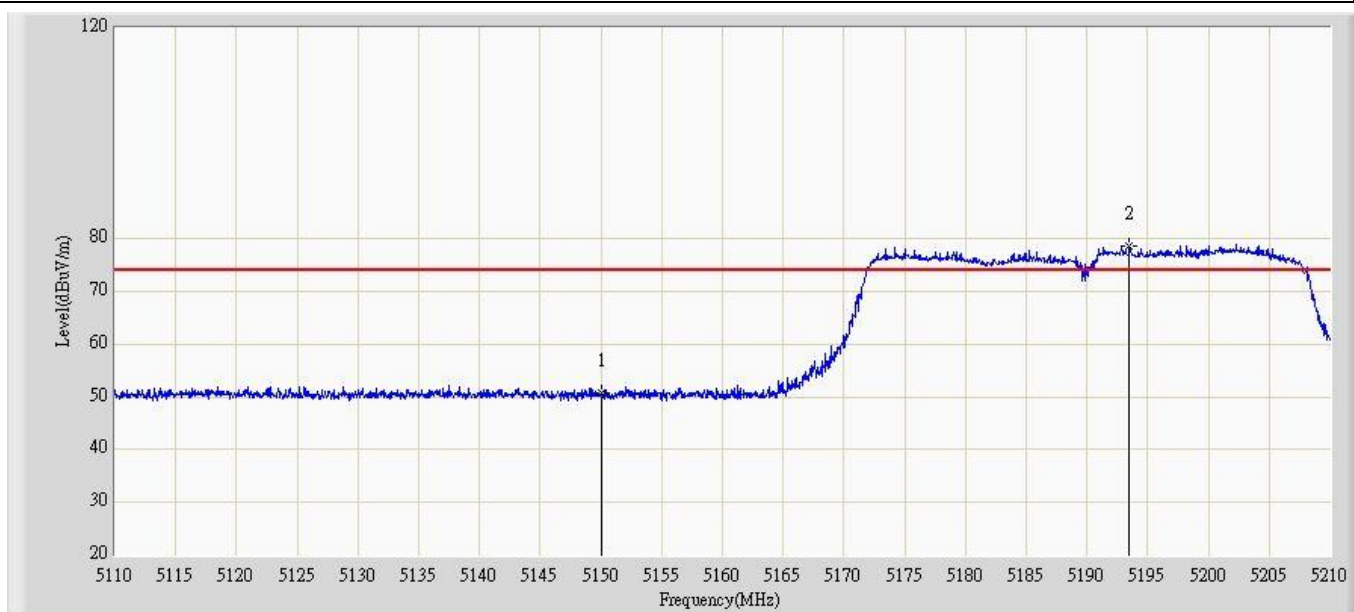


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	50.691	10.670	-23.309	74.000	40.021	PK
2		*	5193.500	78.593	38.470	N/A	N/A	40.123	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5190MHz by 802.11n40 Chain 0+1	

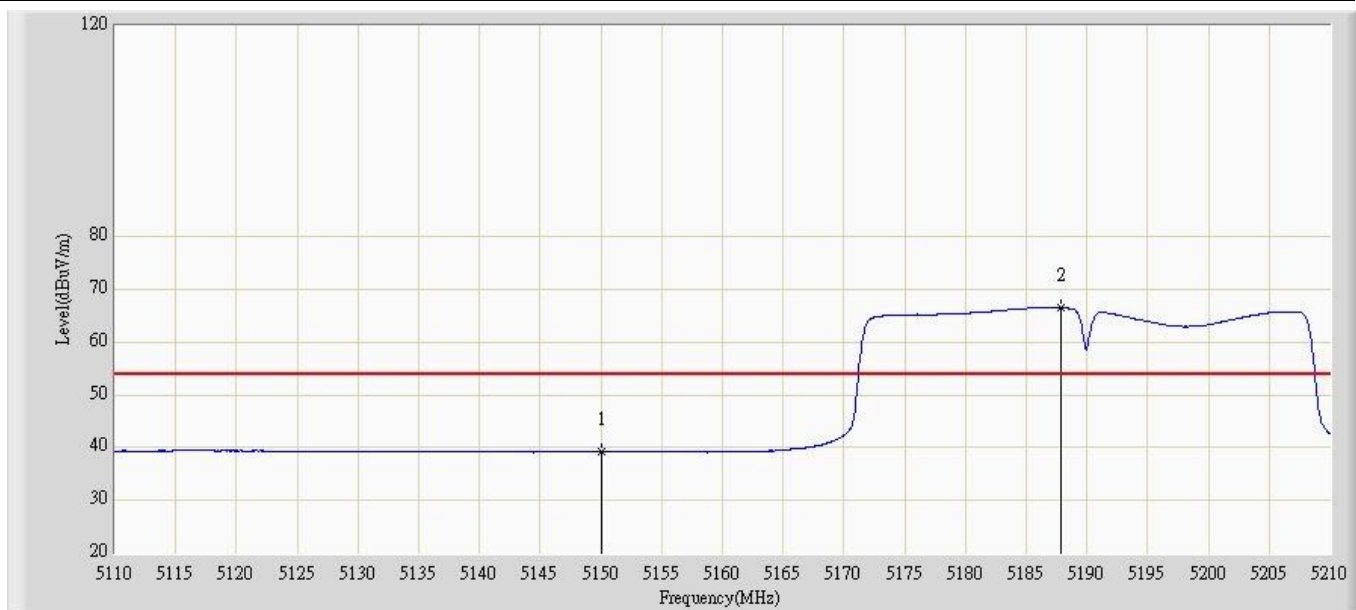


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	39.146	-0.875	-14.854	54.000	40.021	AV
2		*	5187.850	66.455	26.348	N/A	N/A	40.107	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5310MHz by 802.11n40 Chain 0+1	

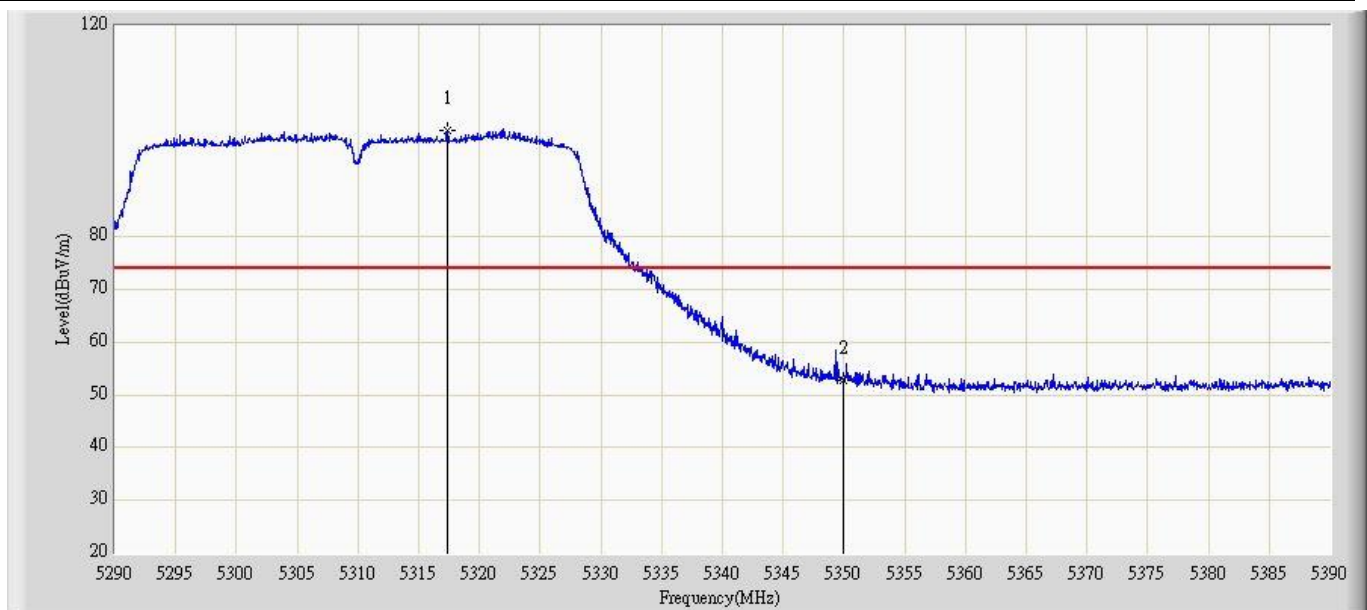


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5317.400	100.099	59.956	N/A	N/A	40.144	PK
2			5350.000	52.852	12.673	-21.148	74.000	40.179	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5310MHz by 802.11n40 Chain 0+1	

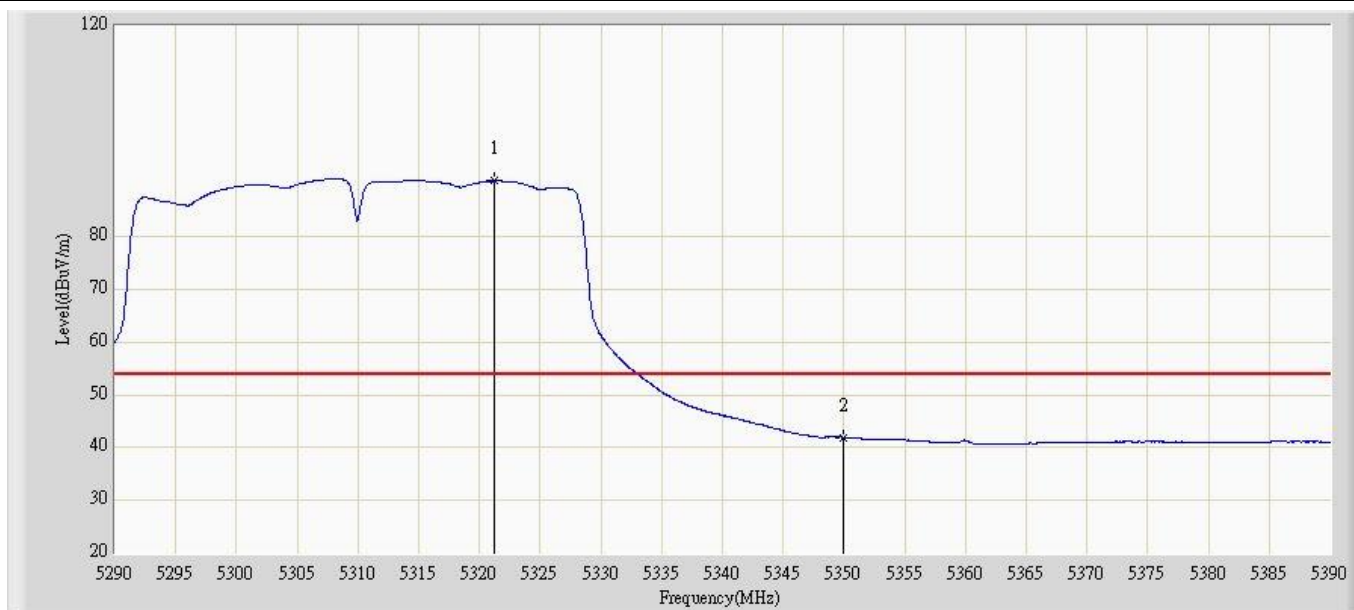


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5321.200	90.546	50.399	N/A	N/A	40.147	AV
2			5350.000	41.926	1.747	-12.074	54.000	40.179	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5310MHz by 802.11n40 Chain 0+1	

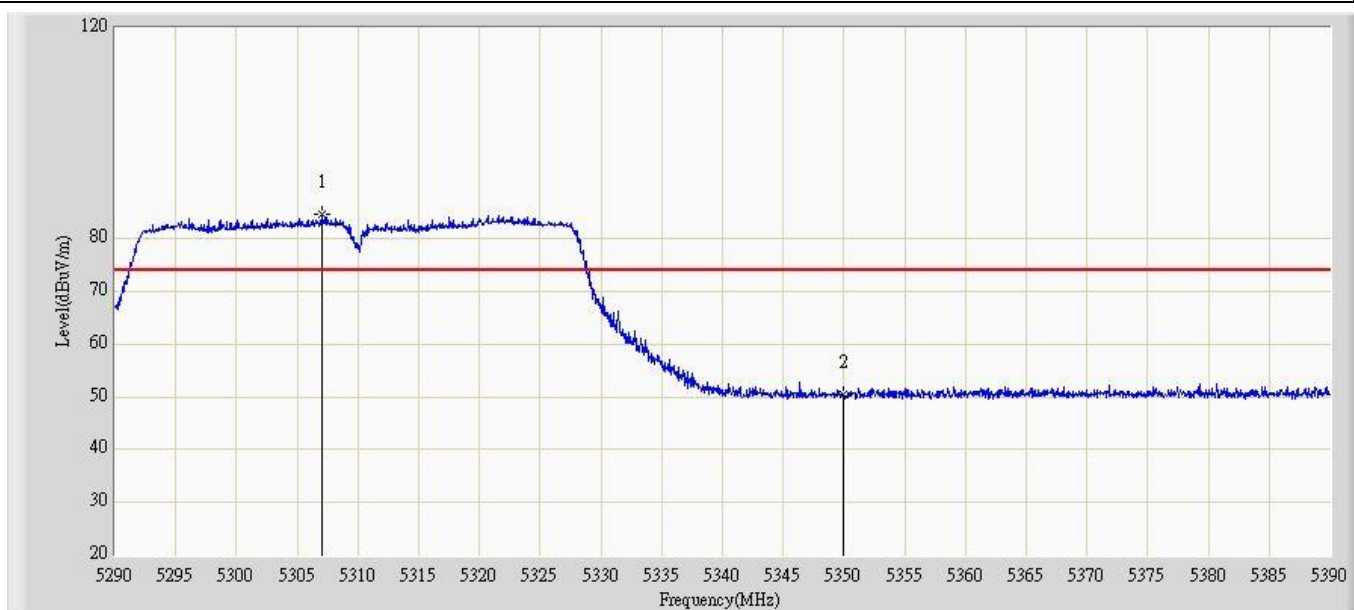


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5307.100	84.553	44.247	N/A	N/A	40.307	PK
2			5350.000	50.573	10.234	-23.427	74.000	40.339	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5310MHz by 802.11n40 Chain 0+1	

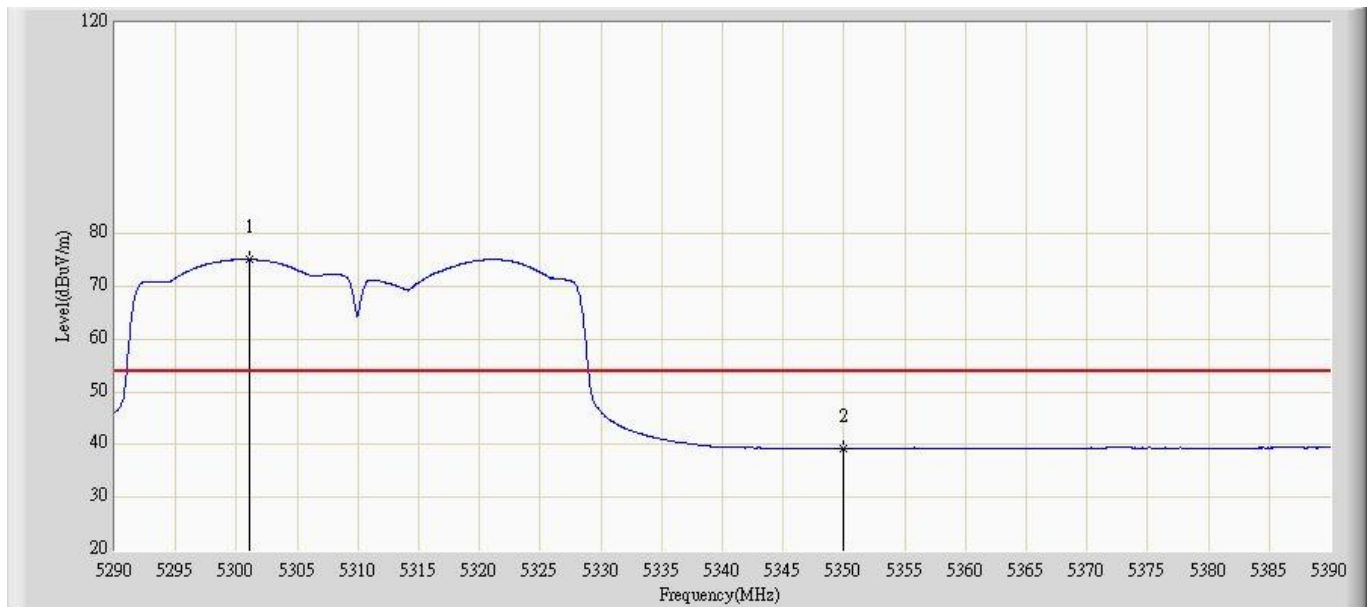


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5301.100	75.124	34.824	N/A	N/A	40.300	AV
2			5350.000	39.307	-1.032	-14.693	54.000	40.339	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5510MHz by 802.11n40 Chain 0+1	

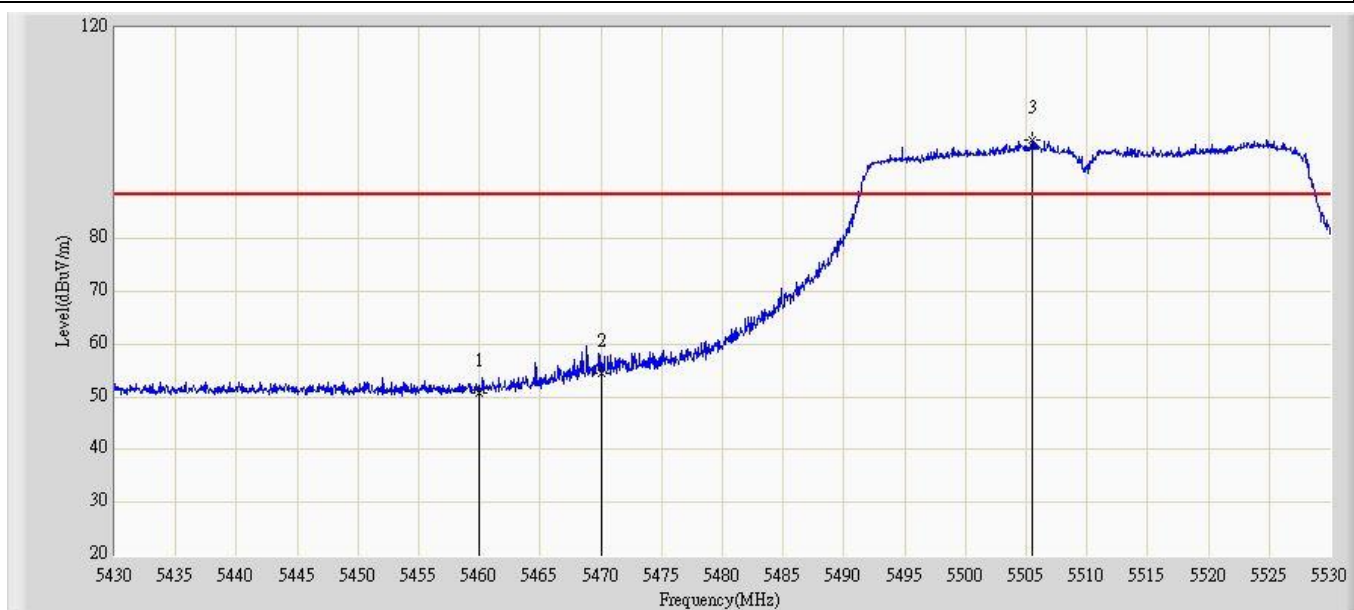


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	50.874	10.493	-23.126	74.000	40.382	PK
2			5470.000	54.374	13.978	-33.926	88.300	40.395	PK
3		*	5505.500	98.609	58.162	N/A	N/A	40.447	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5510MHz by 802.11n40 Chain 0+1	

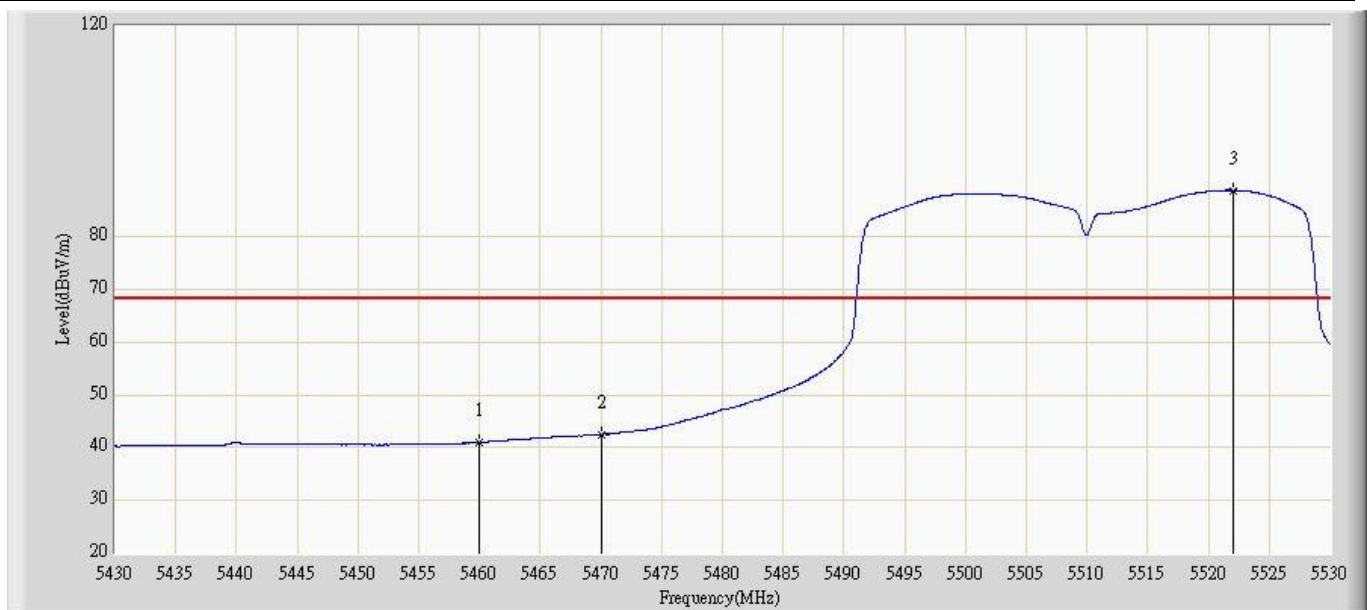


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	40.996	0.615	-11.501	54.000	40.382	AV
2			5470.000	42.499	2.103	-25.801	68.300	40.395	AV
3		*	5522.000	88.809	48.333	N/A	N/A	40.476	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5180MHz by 802.11n20 Chain 0+1+2	

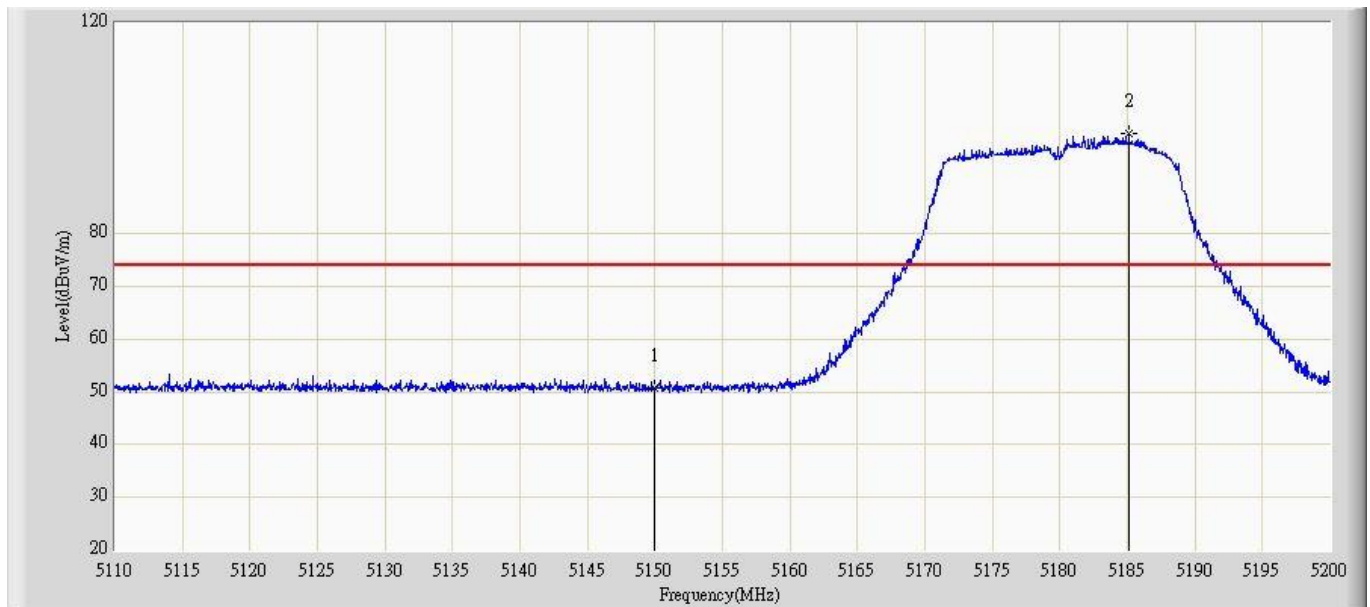


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	50.621	10.640	-23.379	74.000	39.981	PK
2		*	5185.105	99.051	59.047	N/A	N/A	40.004	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5180MHz by 802.11n20 Chain 0+1+2	

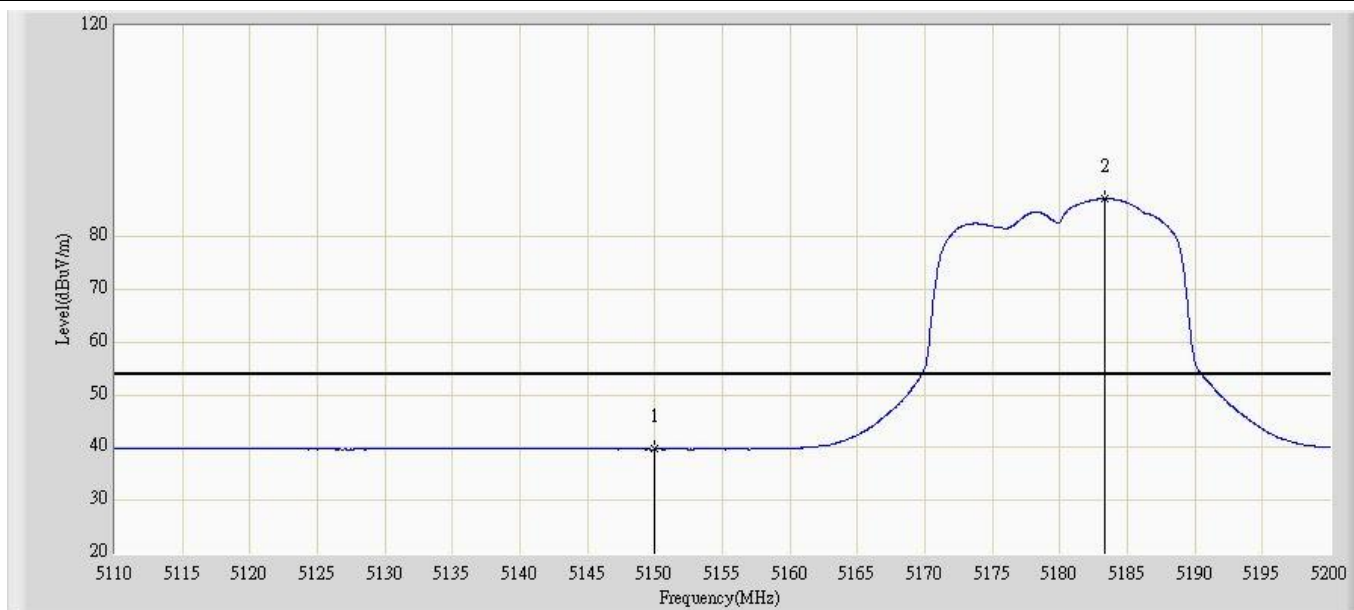


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	39.707	-0.274	-14.293	54.000	39.981	AV
2		*	5183.305	87.189	47.187	N/A	N/A	40.002	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5180MHz by 802.11n20 Chain 0+1+2	

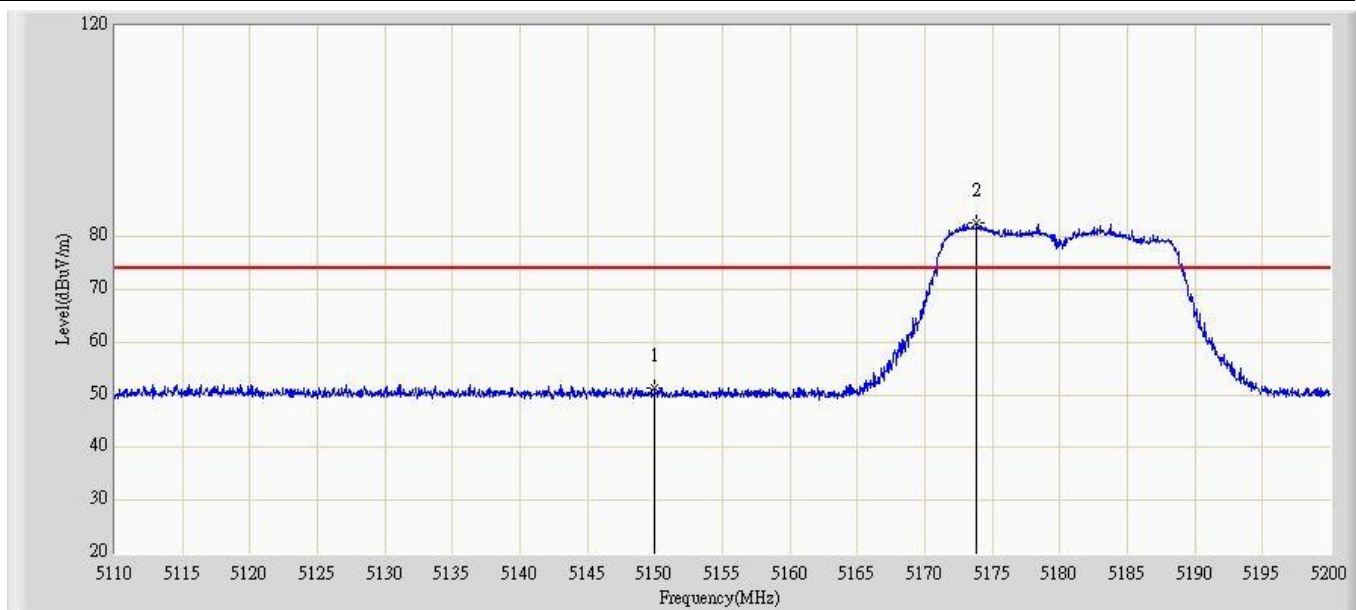


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	51.247	11.226	-22.753	74.000	40.021	PK
2		*	5173.810	82.604	42.531	N/A	N/A	40.073	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5180MHz by 802.11n20 Chain 0+1+2	

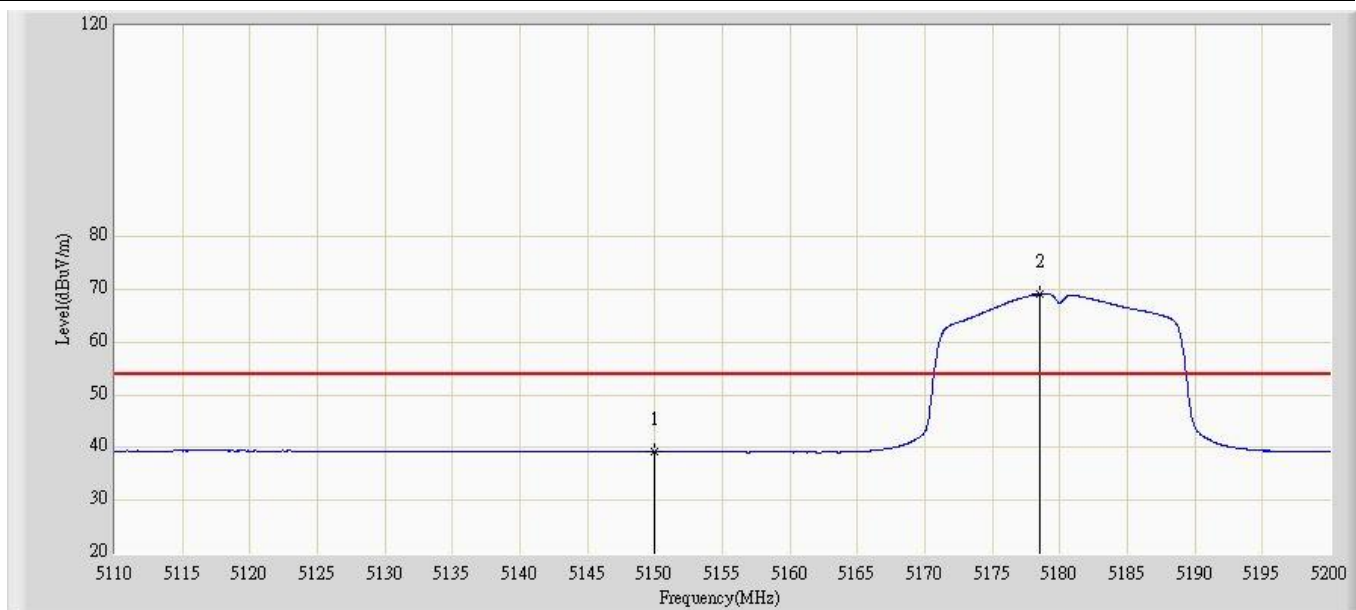


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	39.192	-0.829	-14.808	54.000	40.021	AV
2		*	5178.535	69.110	29.027	N/A	N/A	40.083	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5320MHz by 802.11n20 Chain 0+1+2	

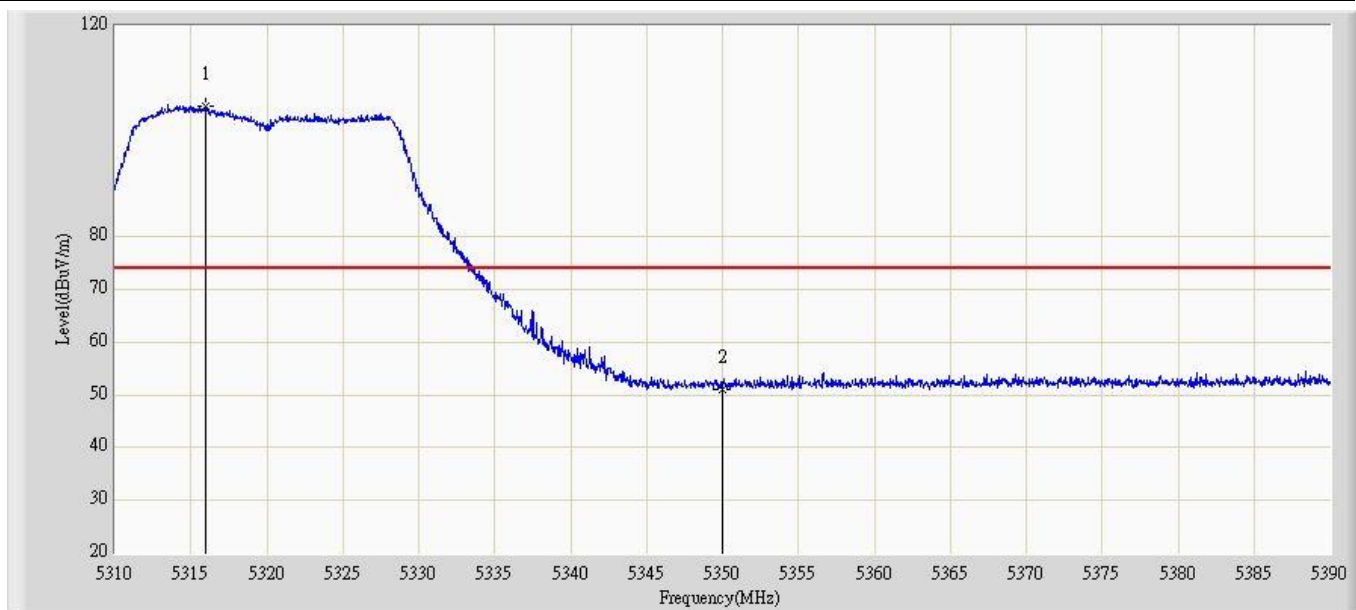


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5316.000	104.659	64.518	N/A	N/A	40.141	PK
2			5350.000	51.165	10.986	-22.835	74.000	40.179	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5320MHz by 802.11n20 Chain 0+1+2	

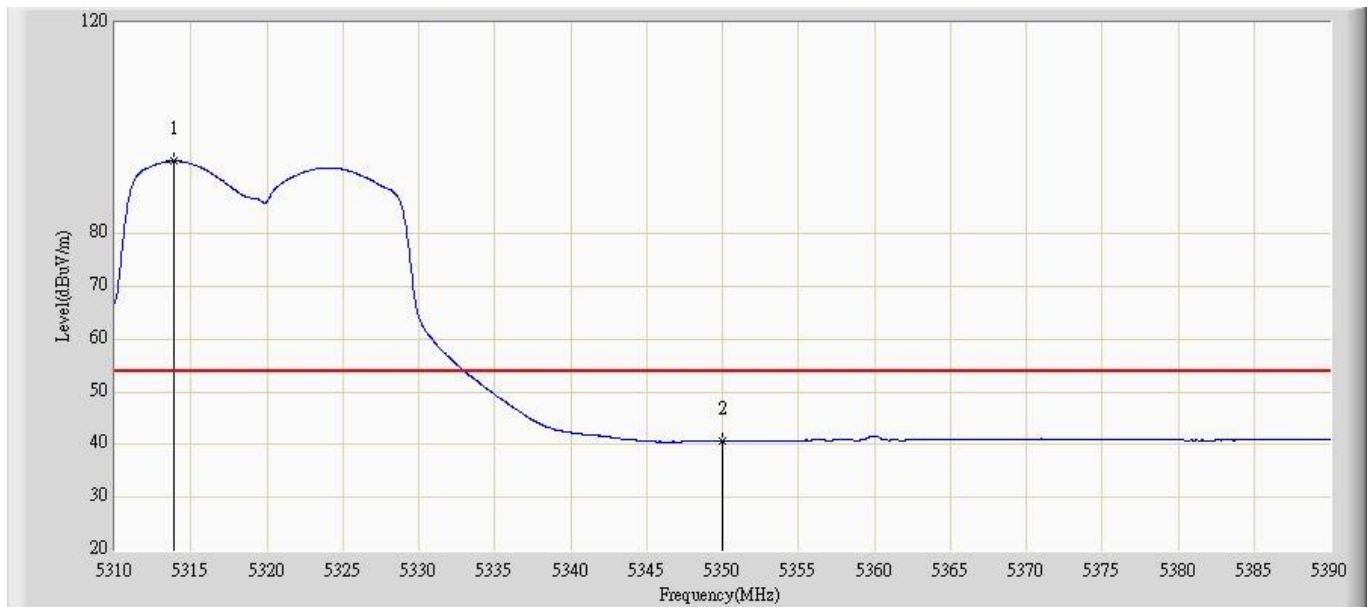


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5313.920	93.738	53.600	N/A	N/A	40.139	AV
2			5350.000	40.663	0.484	-13.337	54.000	40.179	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5320MHz by 802.11n20 Chain 0+1+2	

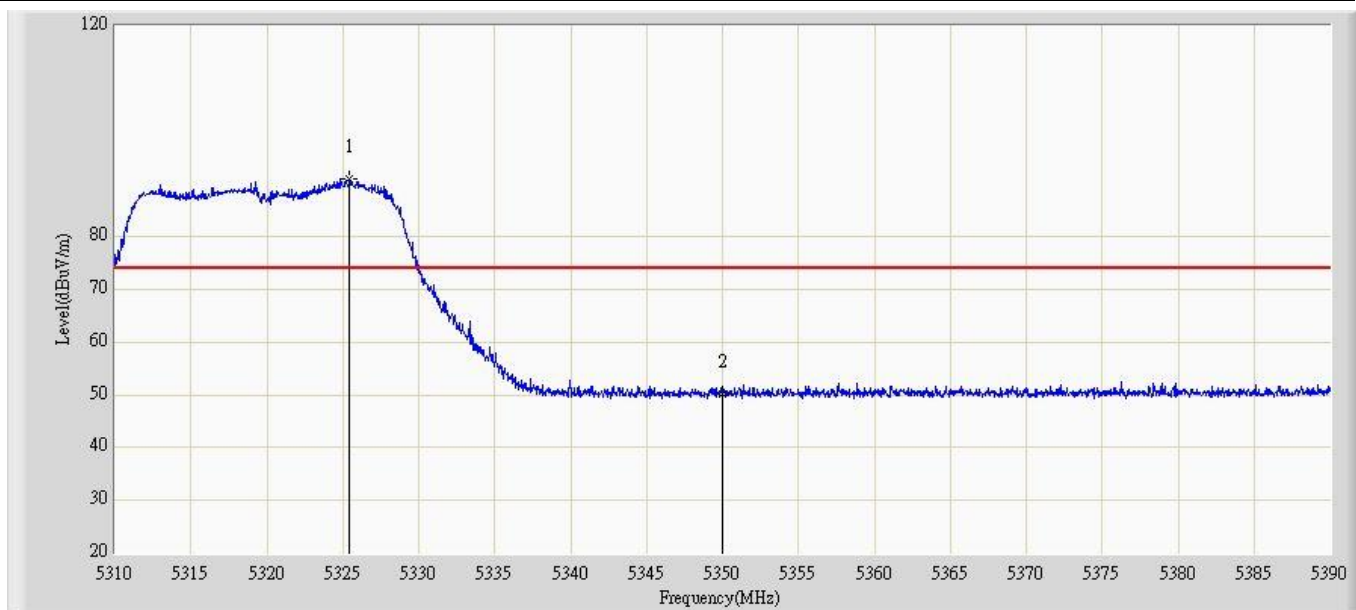


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5325.440	91.039	50.719	N/A	N/A	40.320	PK
2			5350.000	50.159	9.820	-23.841	74.000	40.339	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:35
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5320MHz by 802.11n20 Chain 0+1+2	

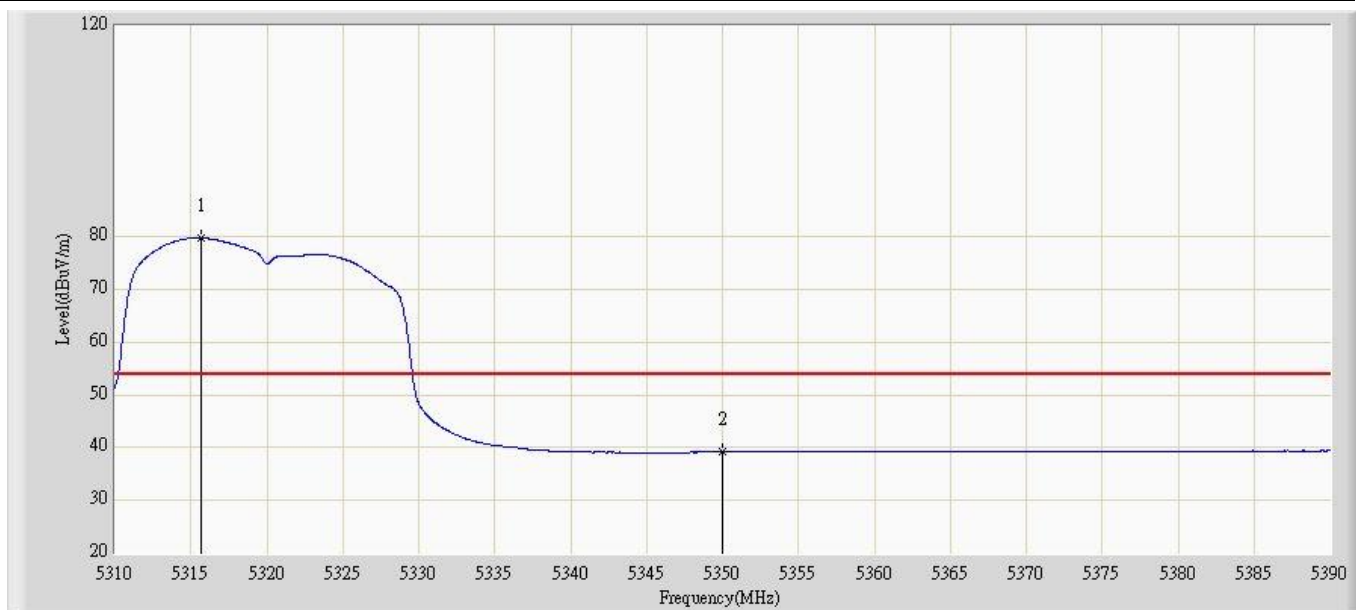


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5315.680	79.804	39.489	N/A	N/A	40.315	AV
2			5350.000	39.151	-1.188	-14.849	54.000	40.339	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5500MHz by 802.11n20 Chain 0+1+2	

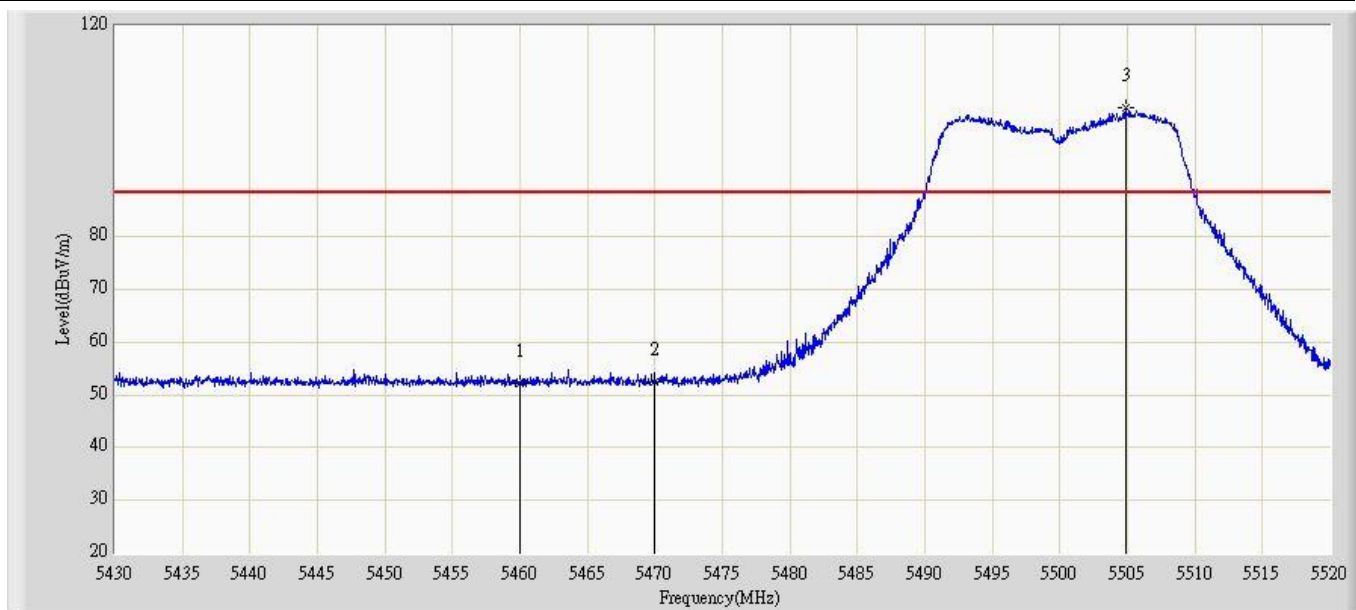


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	52.285	11.904	-21.715	74.000	40.382	PK
2			5470.000	52.436	12.040	-35.864	88.300	40.395	PK
3		*	5504.880	104.419	63.973	N/A	N/A	40.446	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5500MHz by 802.11n20 Chain 0+1+2	

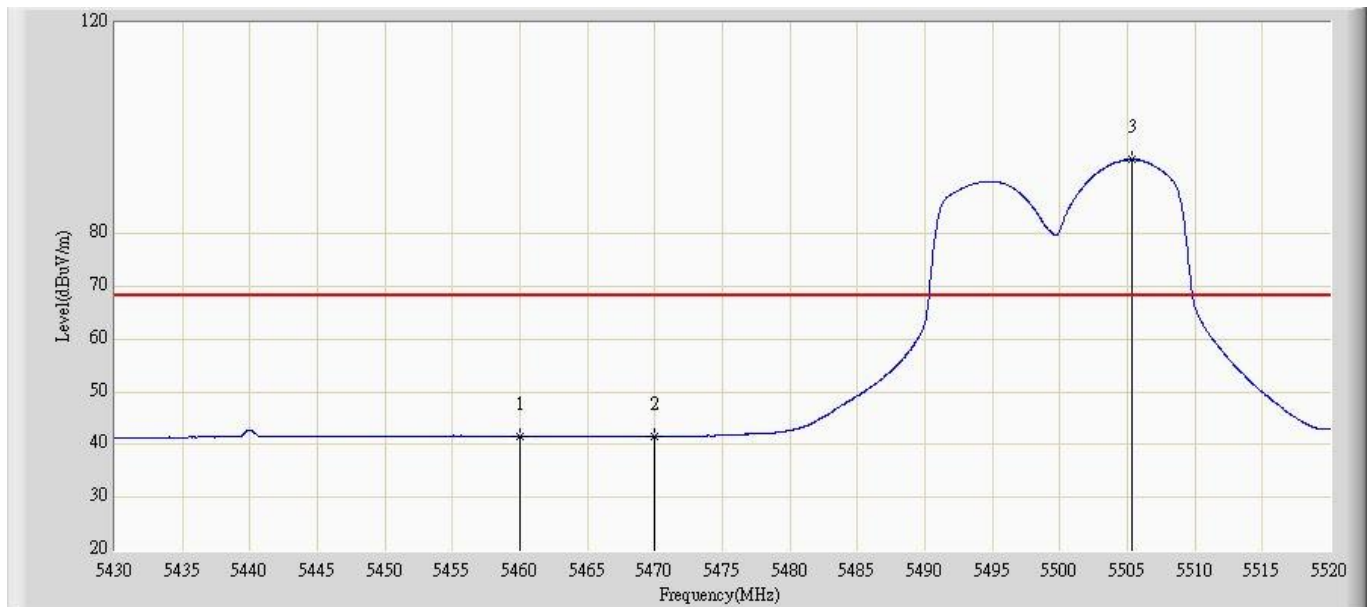


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	41.600	1.219	-12.400	54.000	40.382	AV
2			5470.000	41.548	1.152	-26.752	68.300	40.395	AV
3		*	5505.375	94.048	53.601	N/A	N/A	40.446	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5500MHz by 802.11n20 Chain 0+1+2	

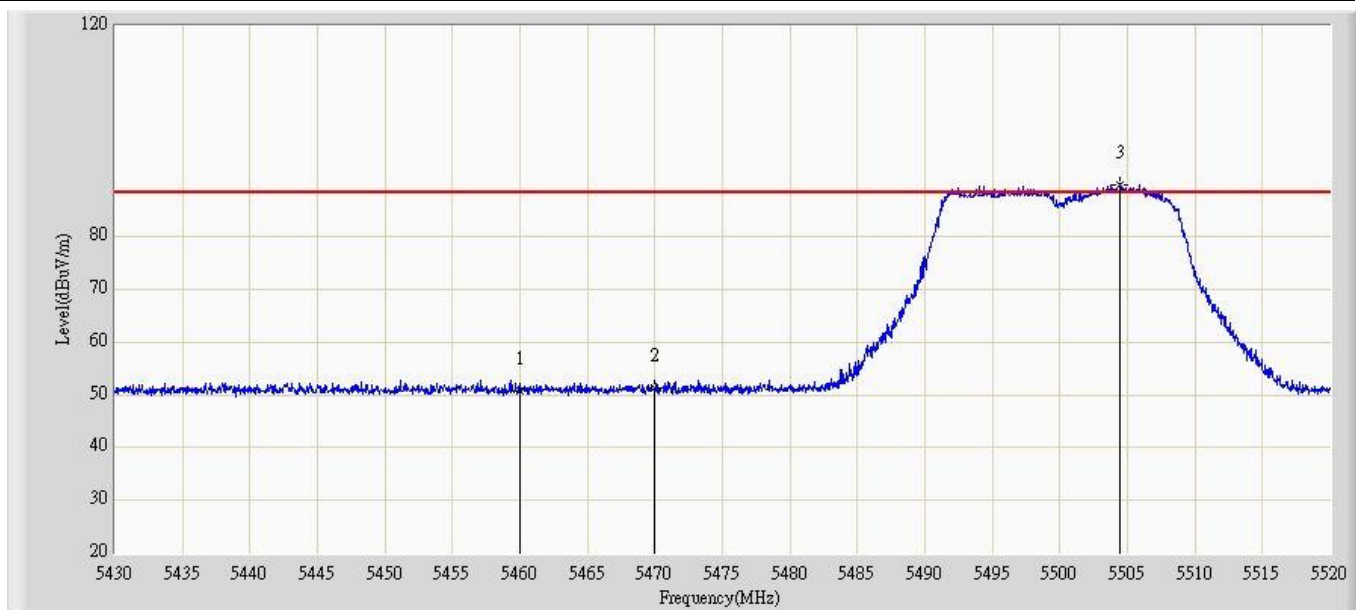


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	50.610	10.112	-23.390	74.000	40.498	PK
2			5470.000	51.188	10.681	-37.112	88.300	40.507	PK
3		*	5504.475	89.971	49.428	N/A	N/A	40.544	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5500MHz by 802.11n20 Chain 0+1+2	

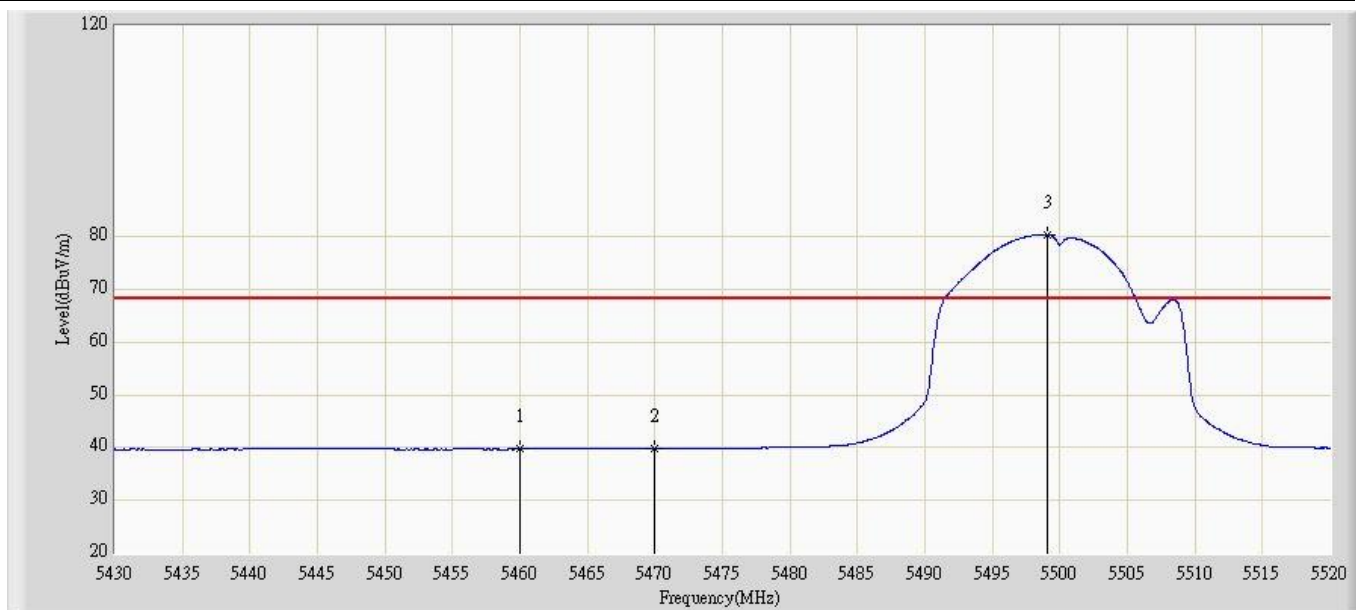


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	39.735	-0.763	-14.265	54.000	40.498	AV
2			5470.000	39.775	-0.732	-28.525	68.300	40.507	AV
3		*	5499.075	80.415	39.878	N/A	N/A	40.538	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:43
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5700MHz by 802.11n20 Chain 0+1+2	

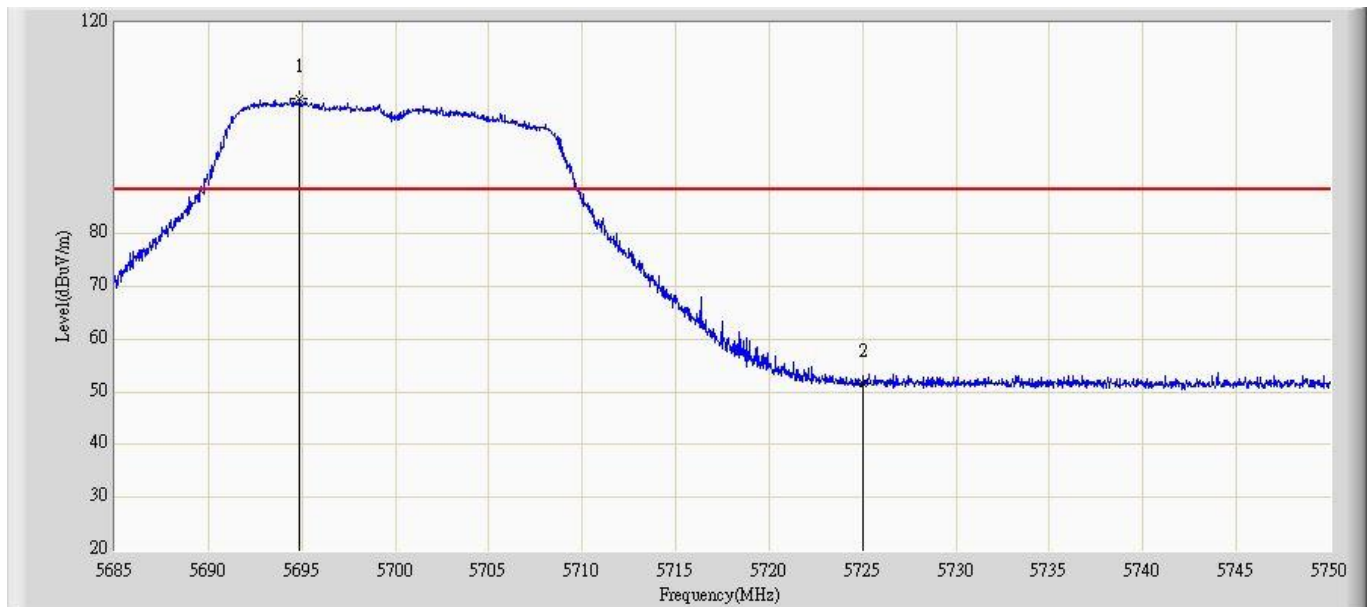


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5694.880	105.559	64.767	N/A	N/A	40.792	PK
2			5725.000	51.582	10.762	-36.718	88.300	40.820	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:45
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5700MHz by 802.11n20 Chain 0+1+2	

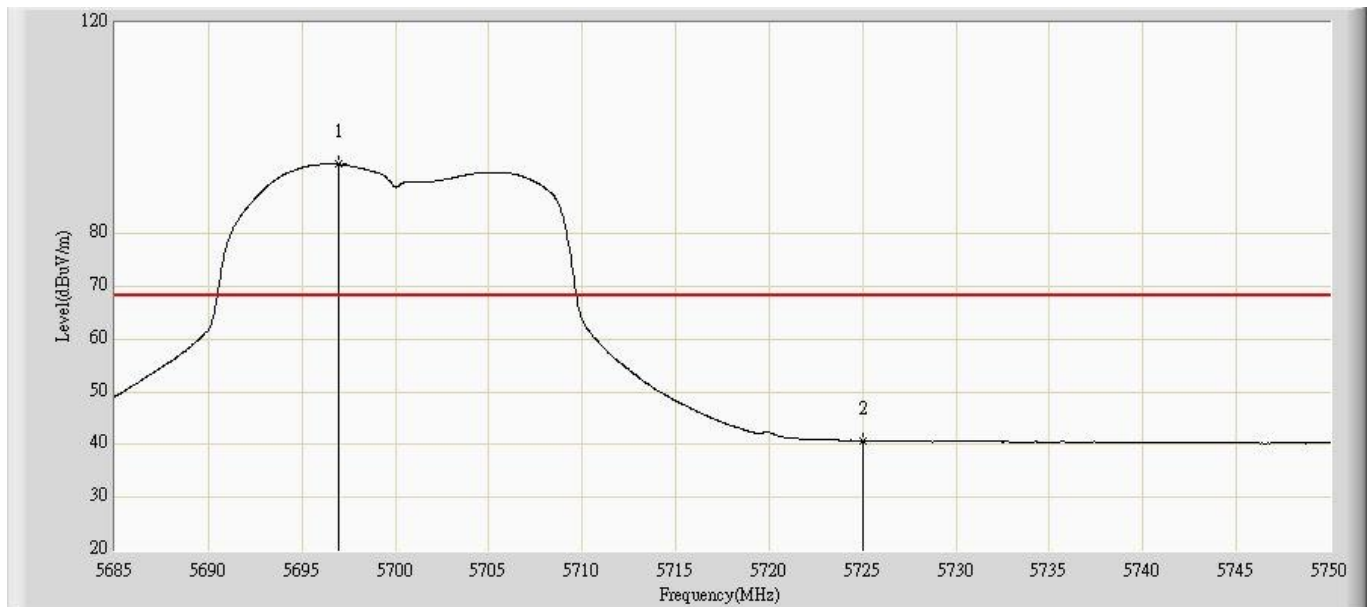


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5696.993	93.161	52.368	N/A	N/A	40.793	AV
2			5725.000	40.696	-0.124	-27.604	68.300	40.820	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:46
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5700MHz by 802.11n20 Chain 0+1+2	

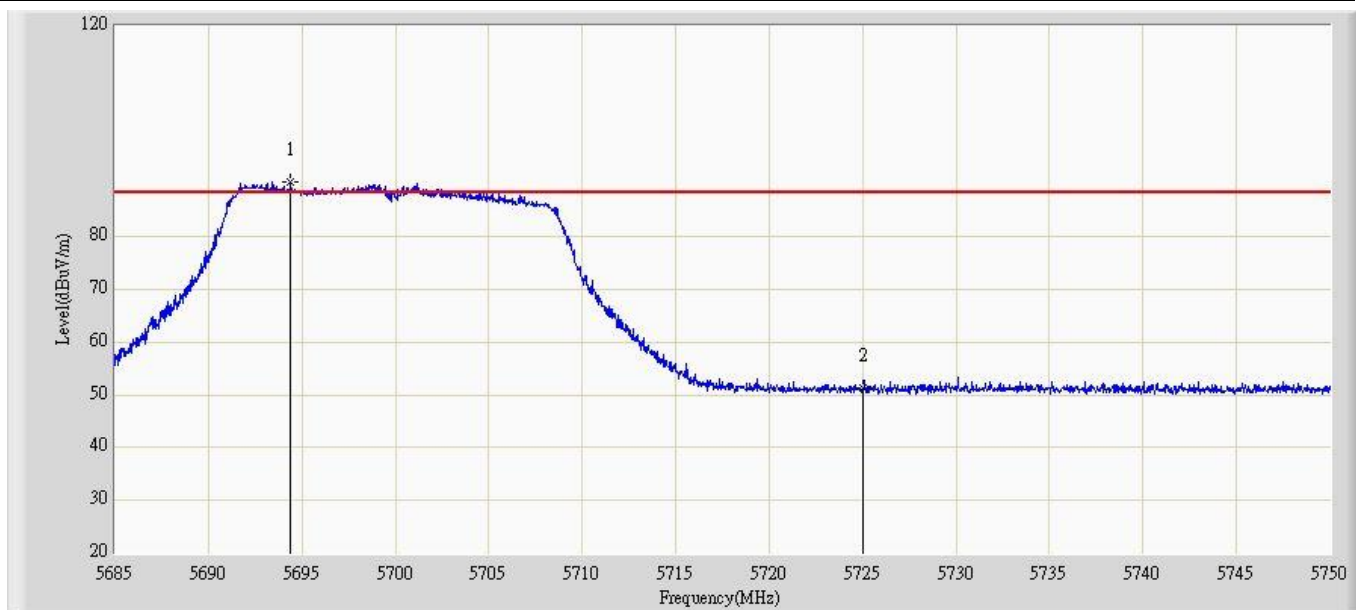


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5694.393	90.345	49.531	N/A	N/A	40.815	PK
2			5725.000	51.280	10.450	-37.020	88.300	40.830	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:47
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5700MHz by 802.11n20 Chain 0+1+2	

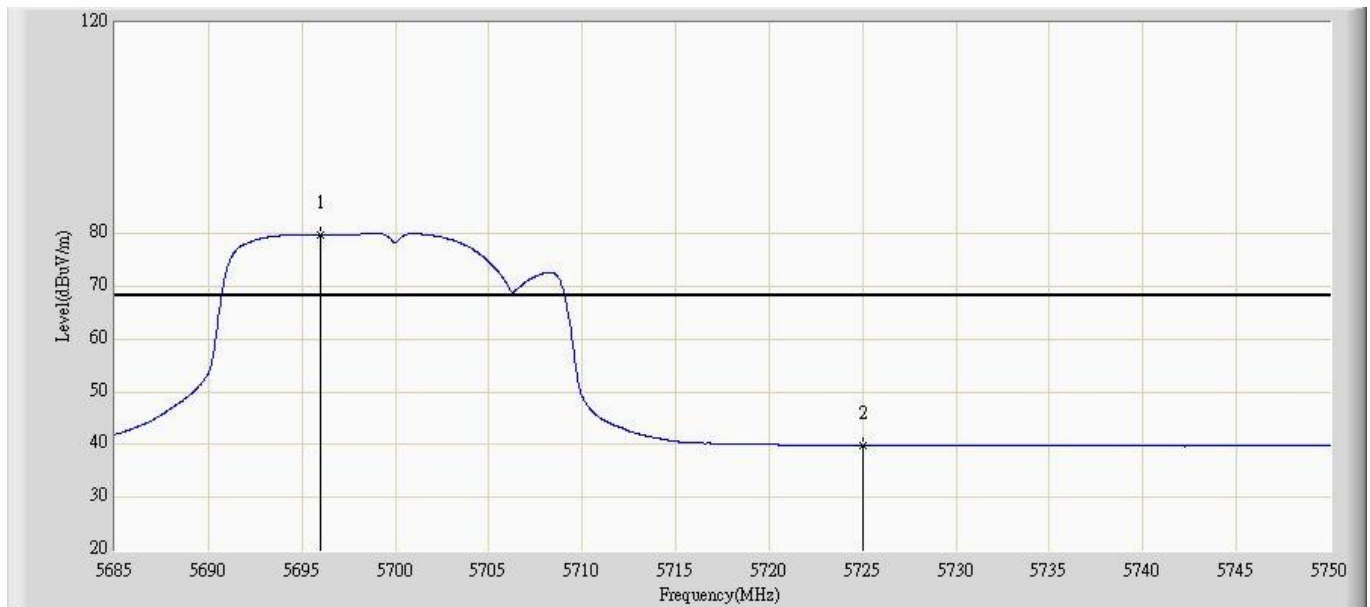


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5695.985	79.755	38.940	N/A	N/A	40.815	AV
2			5725.000	39.889	-0.941	-28.411	68.300	40.830	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5190MHz by 802.11n40 Chain 0+1+2	

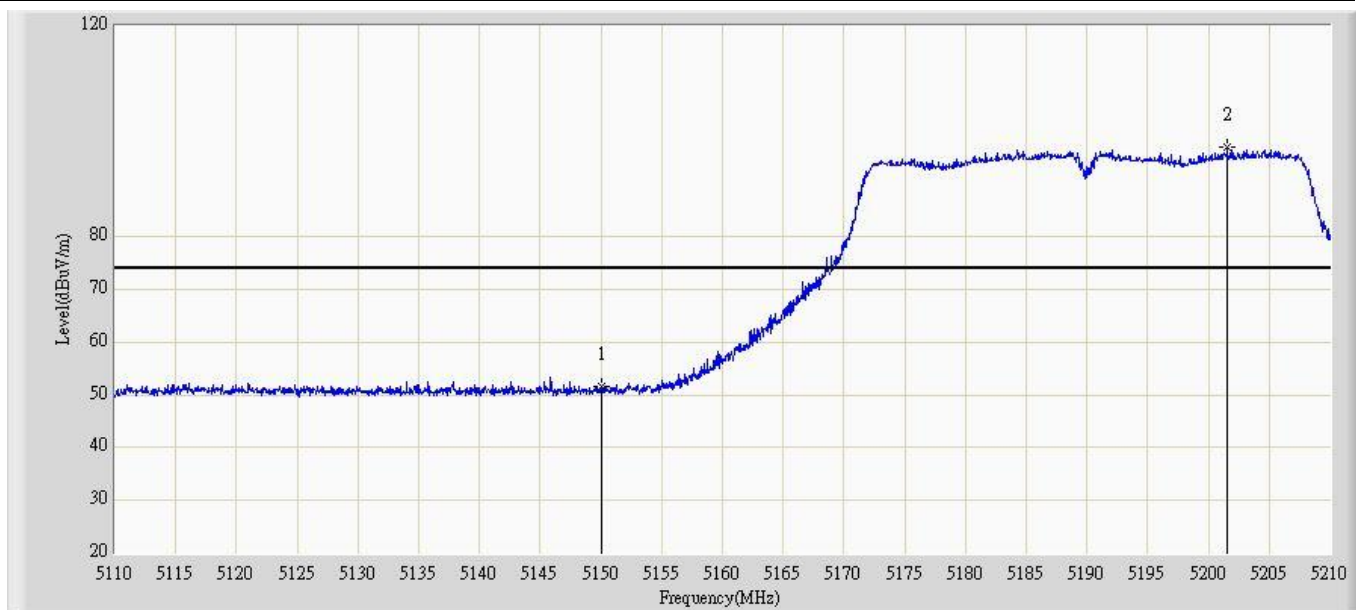


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	51.543	11.562	-22.457	74.000	39.981	PK
2		*	5201.550	96.981	56.959	N/A	N/A	40.021	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5190MHz by 802.11n40 Chain 0+1+2	

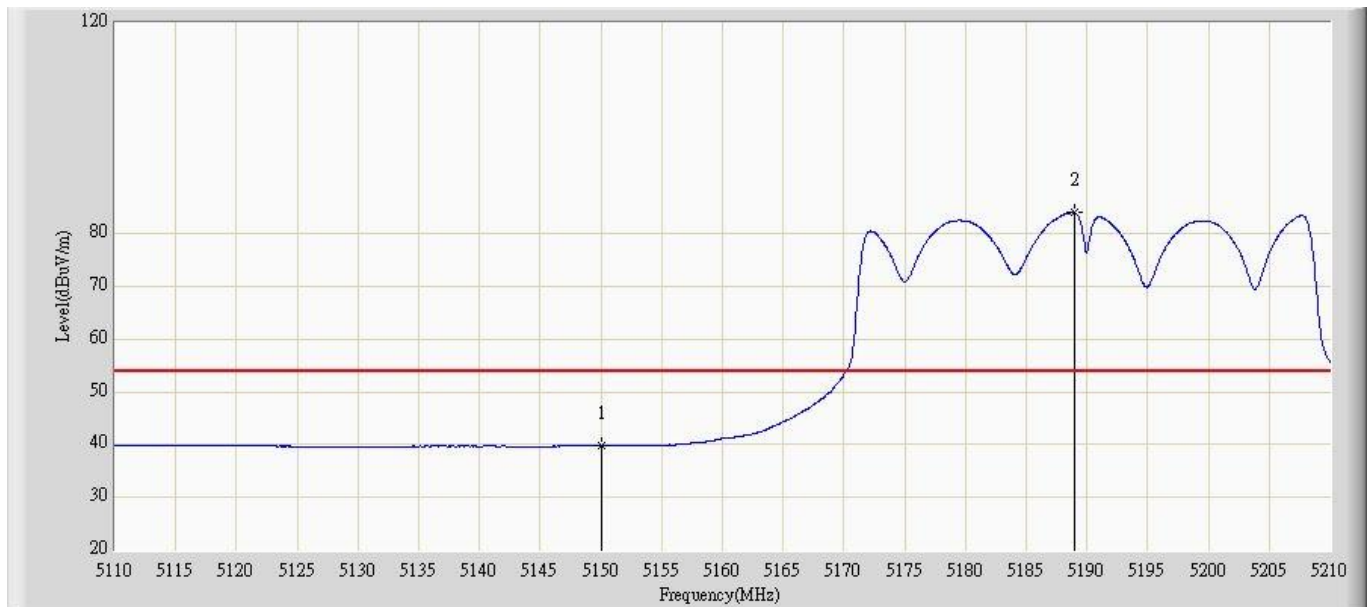


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	39.842	-0.139	-14.158	54.000	39.981	AV
2		*	5188.950	84.010	44.002	N/A	N/A	40.008	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5190MHz by 802.11n40 Chain 0+1+2	

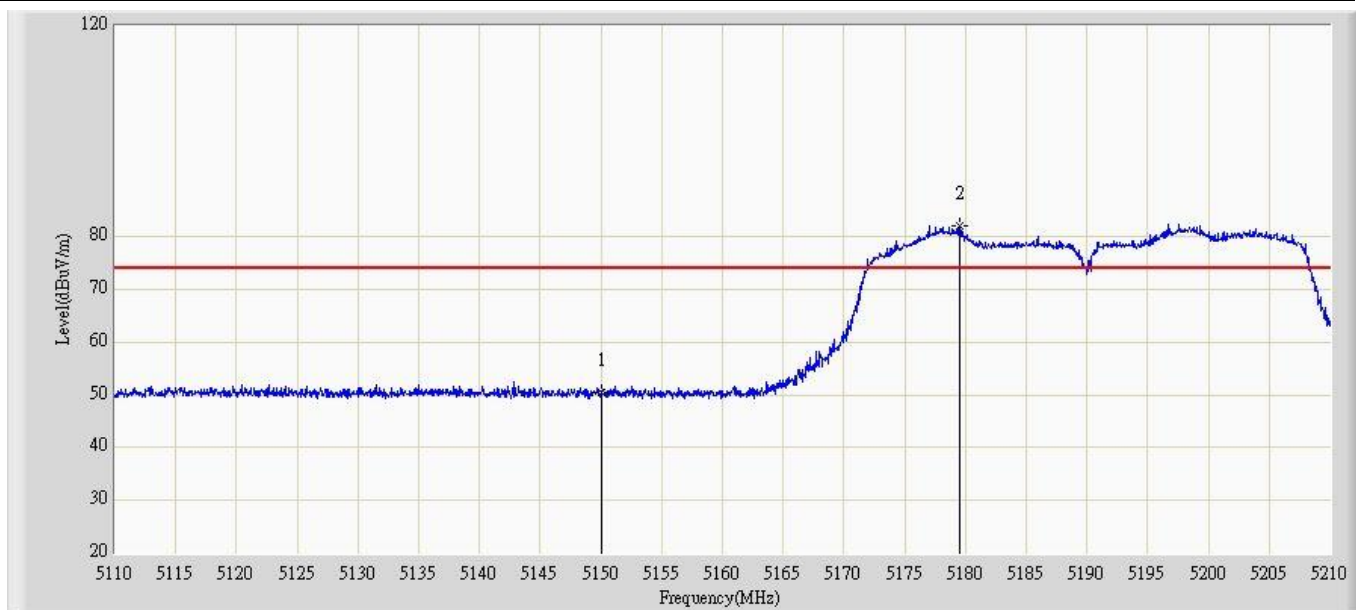


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	50.478	10.457	-23.522	74.000	40.021	PK
2		*	5179.550	82.114	42.028	N/A	N/A	40.086	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5190MHz by 802.11n40 Chain 0+1+2	

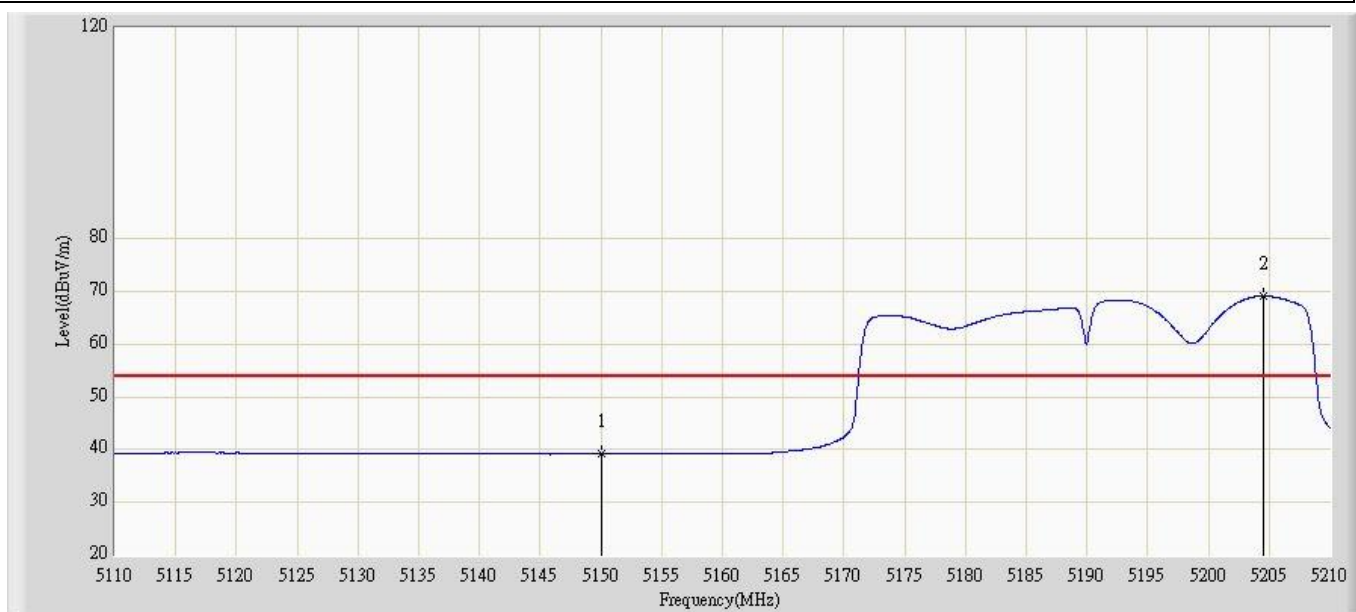


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	39.134	-0.887	-14.866	54.000	40.021	AV
2		*	5204.500	69.127	28.977	N/A	N/A	40.150	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5310MHz by 802.11n40 Chain 0+1+2	

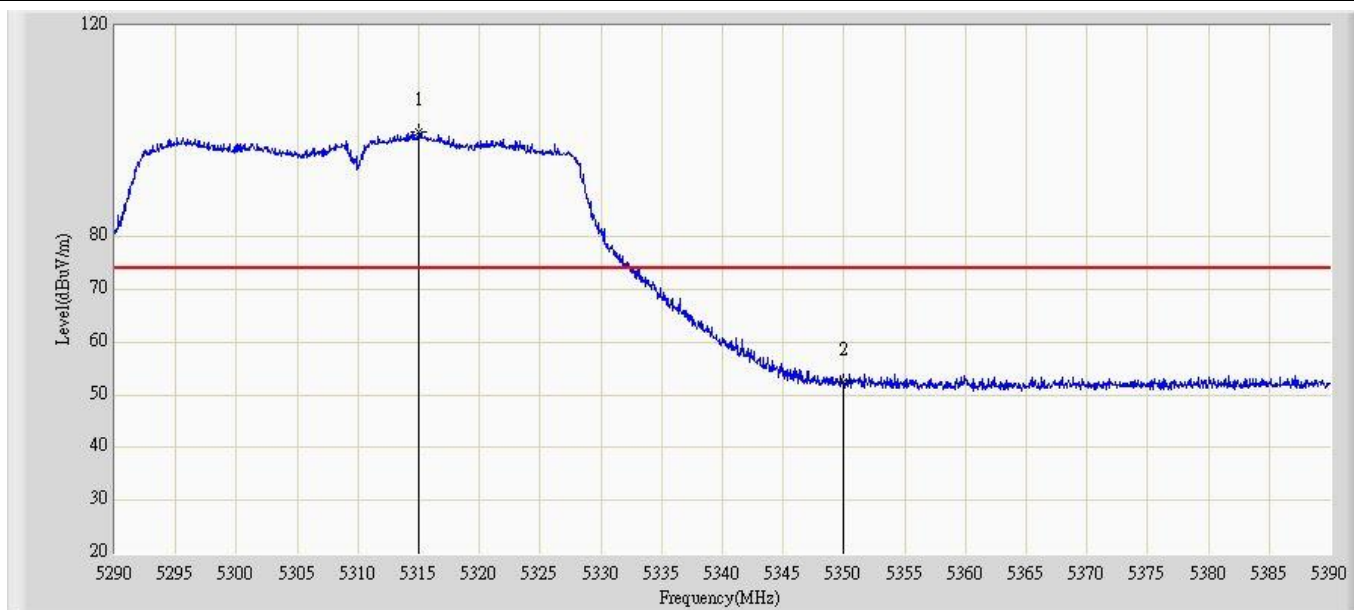


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5315.000	99.764	59.624	N/A	N/A	40.140	PK
2			5350.000	52.434	12.255	-21.566	74.000	40.179	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:55
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5310MHz by 802.11n40 Chain 0+1+2	

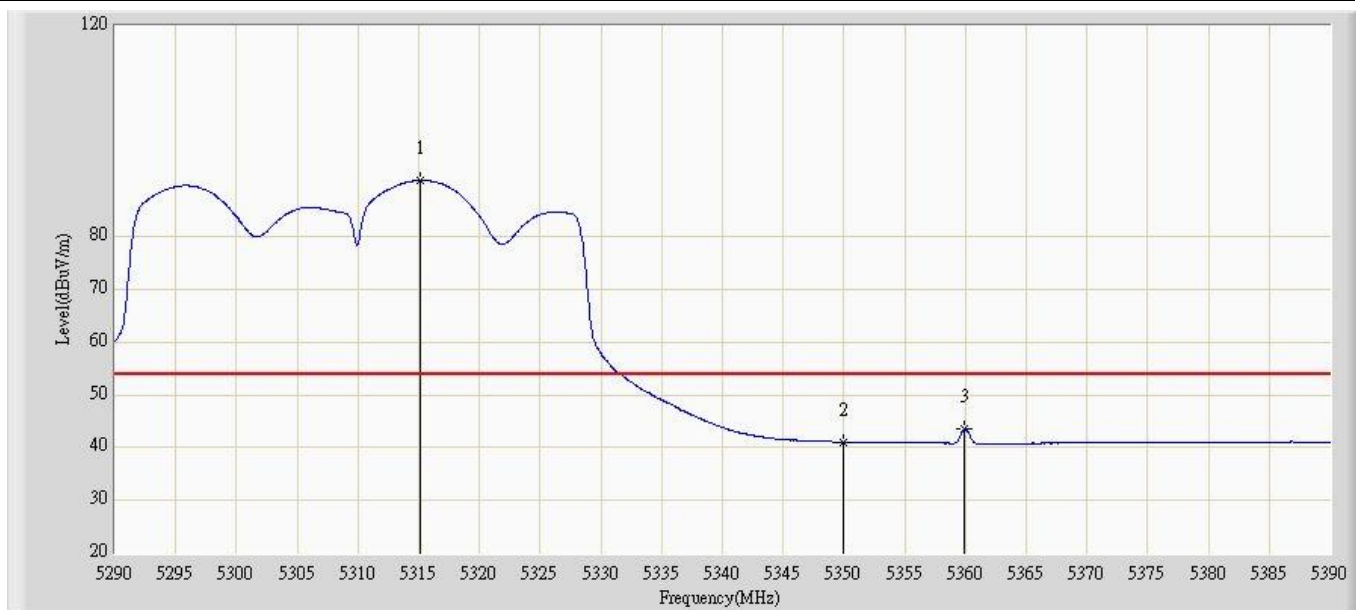


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5315.150	90.694	50.554	N/A	N/A	40.140	AV
2			5350.000	41.053	0.874	-12.947	54.000	40.179	AV
3			5359.900	43.541	3.344	-10.459	54.000	40.197	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5310MHz by 802.11n40 Chain 0+1+2	

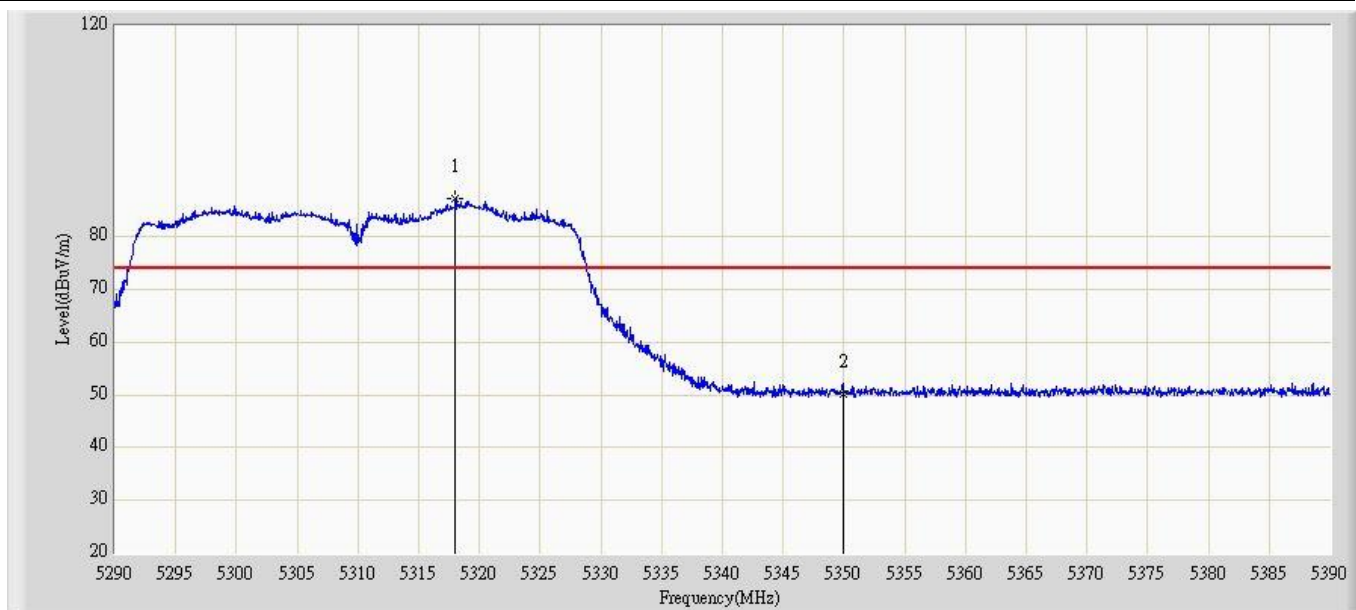


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5318.000	87.287	46.970	N/A	N/A	40.317	PK
2			5350.000	50.182	9.843	-23.818	74.000	40.339	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5310MHz by 802.11n40 Chain 0+1+2	

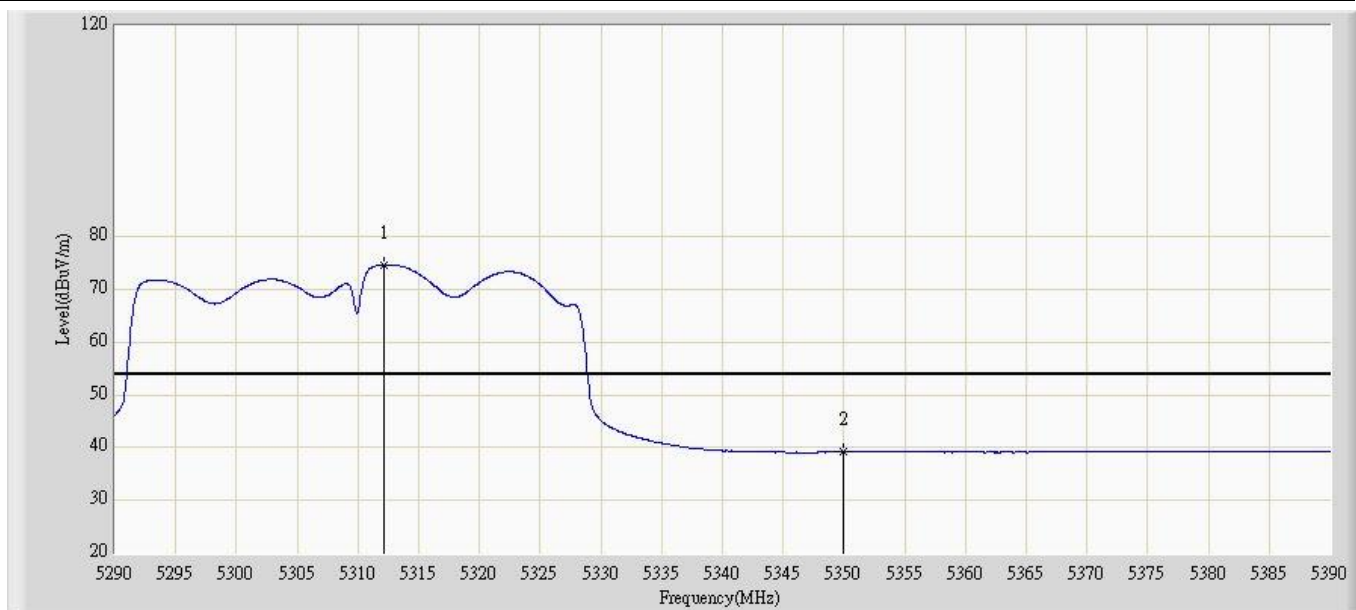


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5312.200	74.713	34.402	N/A	N/A	40.312	AV
2			5350.000	39.190	-1.149	-14.810	54.000	40.339	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 02:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5510MHz by 802.11n40 Chain 0+1+2	

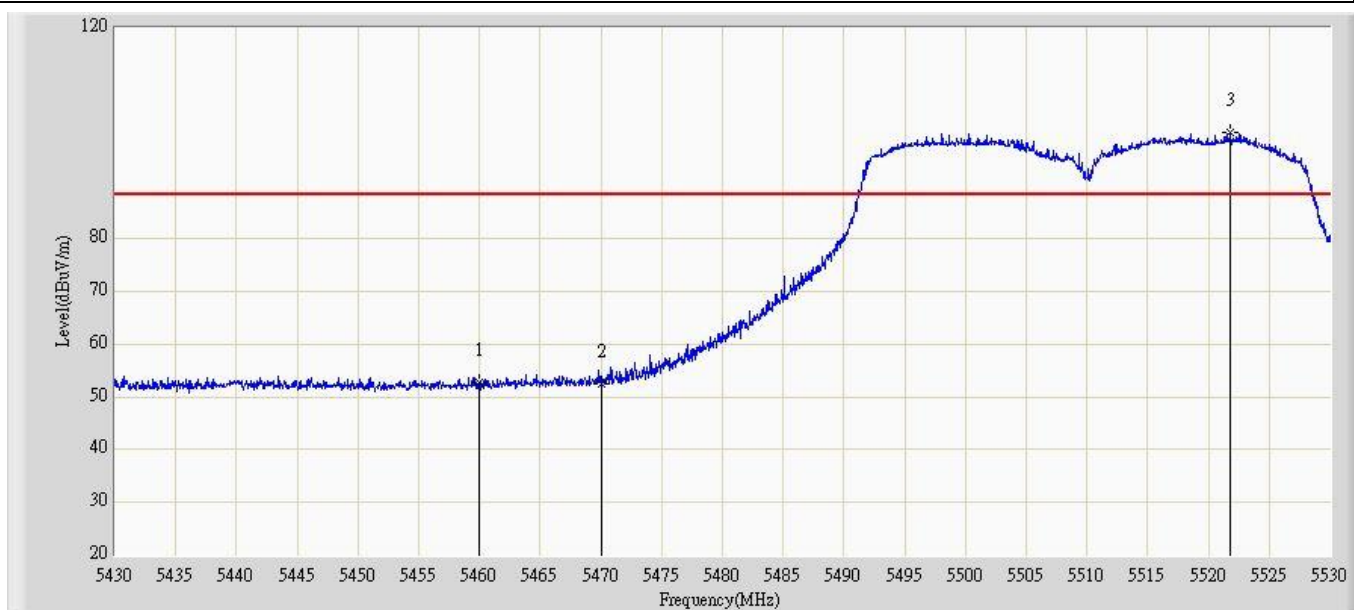


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	52.664	12.283	-21.336	74.000	40.382	PK
2			5470.000	52.603	12.207	-35.697	88.300	40.395	PK
3		*	5521.850	100.145	59.669	N/A	N/A	40.476	PK

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 03:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5510MHz by 802.11n40 Chain 0+1+2	

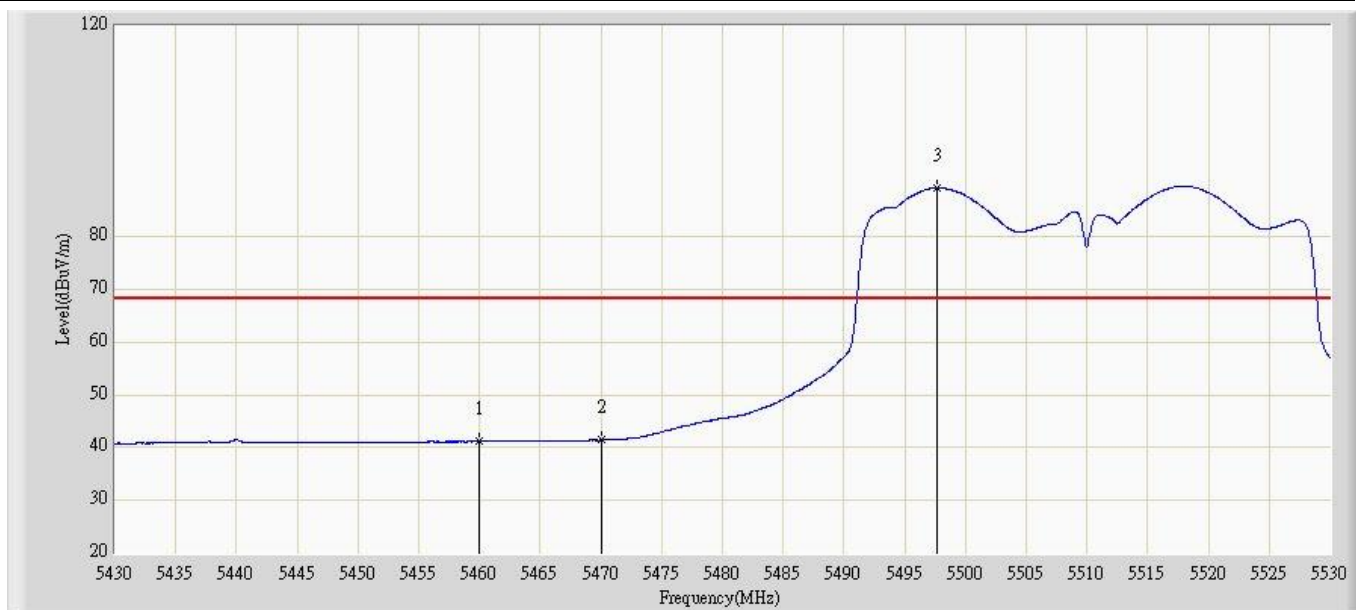


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	41.200	0.819	-12.800	54.000	40.382	AV
2			5470.000	41.433	1.037	-26.867	68.300	40.395	AV
3		*	5497.600	89.246	48.811	N/A	N/A	40.435	AV

Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 03:01
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5510MHz by 802.11n40 Chain 0+1+2	

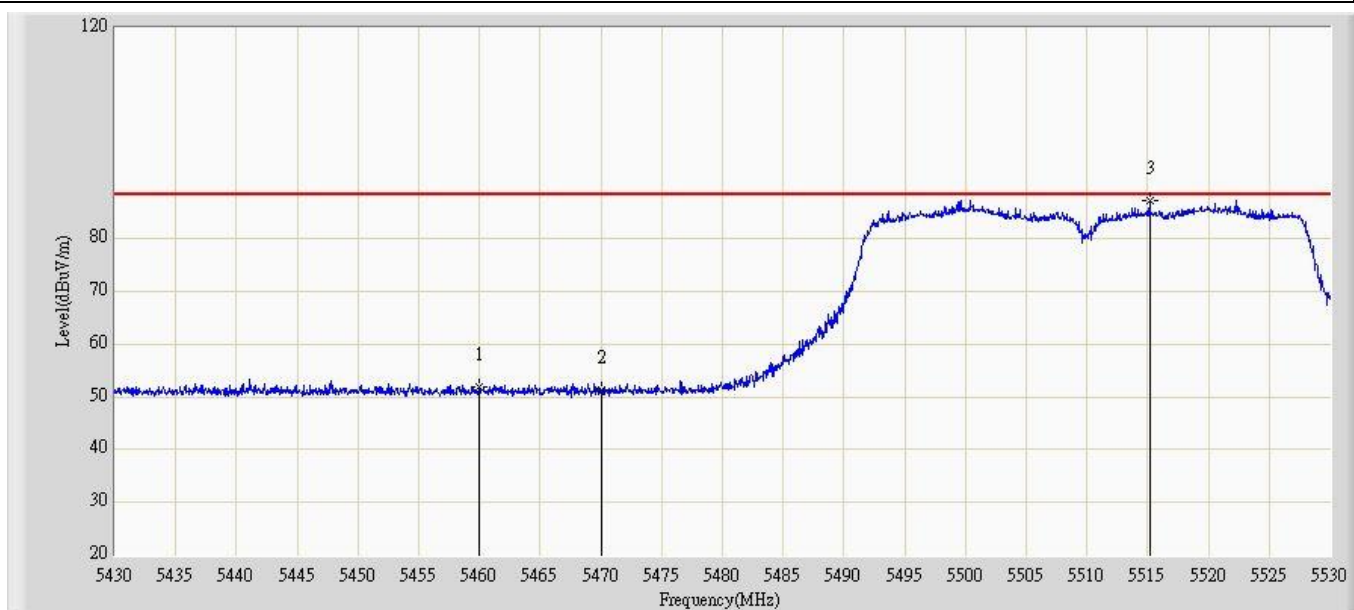

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	51.865	11.367	-22.135	74.000	40.498	PK
2			5470.000	51.353	10.846	-36.947	88.300	40.507	PK
3		*	5515.150	87.262	46.704	N/A	N/A	40.558	PK


Engineer: Toms	
Site: AC5	Time: 2013/04/08 - 03:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5510MHz by 802.11n40 Chain 0+1+2	

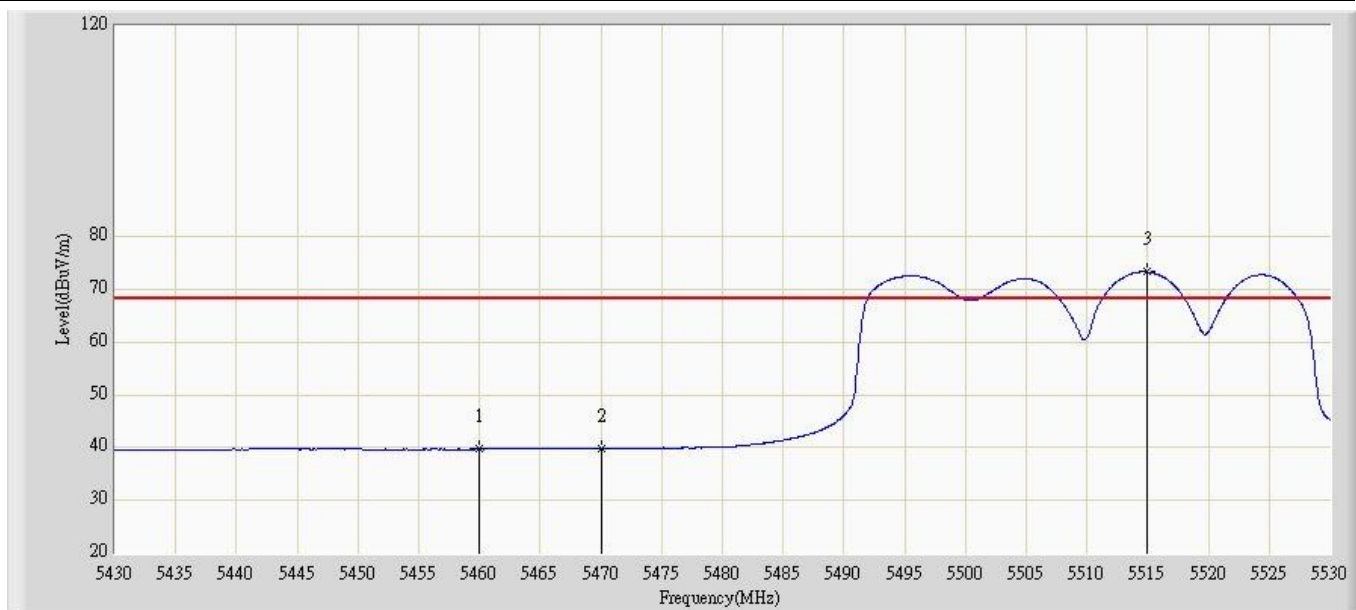

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	39.696	-0.802	-14.304	54.000	40.498	AV
2			5470.000	39.746	-0.761	-28.554	68.300	40.507	AV
3		*	5515.000	73.310	32.752	N/A	N/A	40.558	AV


Test for dipole antenna 1#

Site: AC5	Time: 2013/04/15 - 16:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5180 MHz by 802.11a Chain 0	

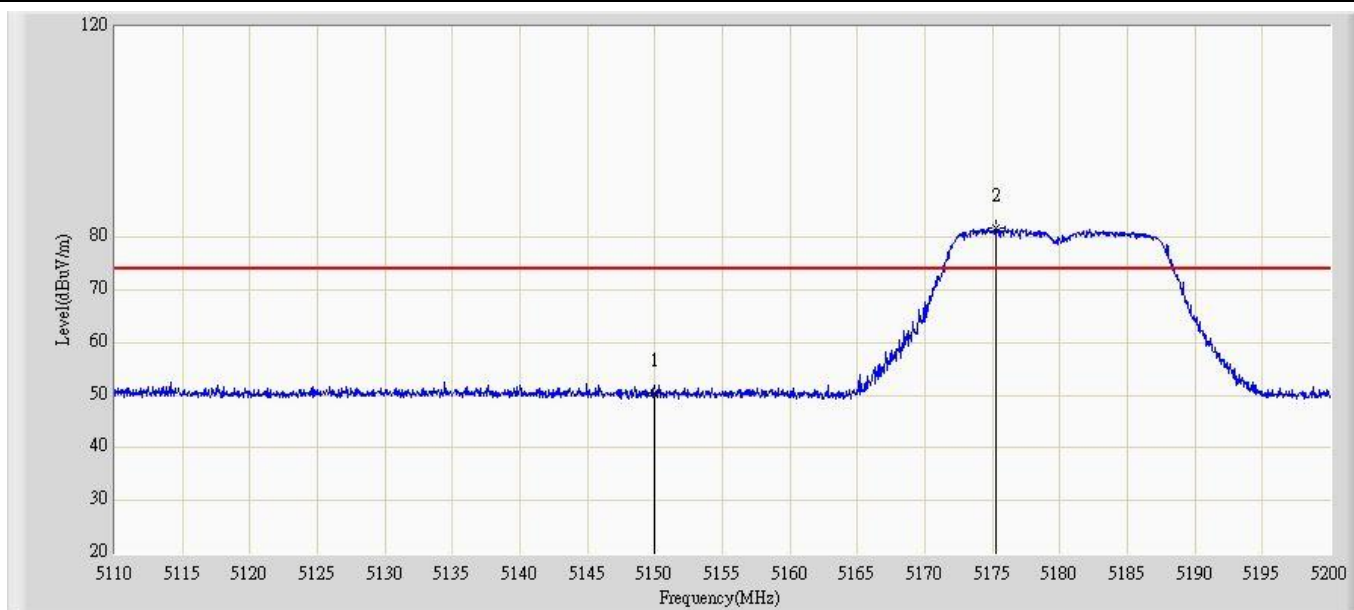


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	50.335	58.419	-23.665	74.000	-8.084	PK
2		*	5175.295	81.803	89.831	N/A	N/A	-8.028	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 17:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5180 MHz by 802.11a Chain 0	

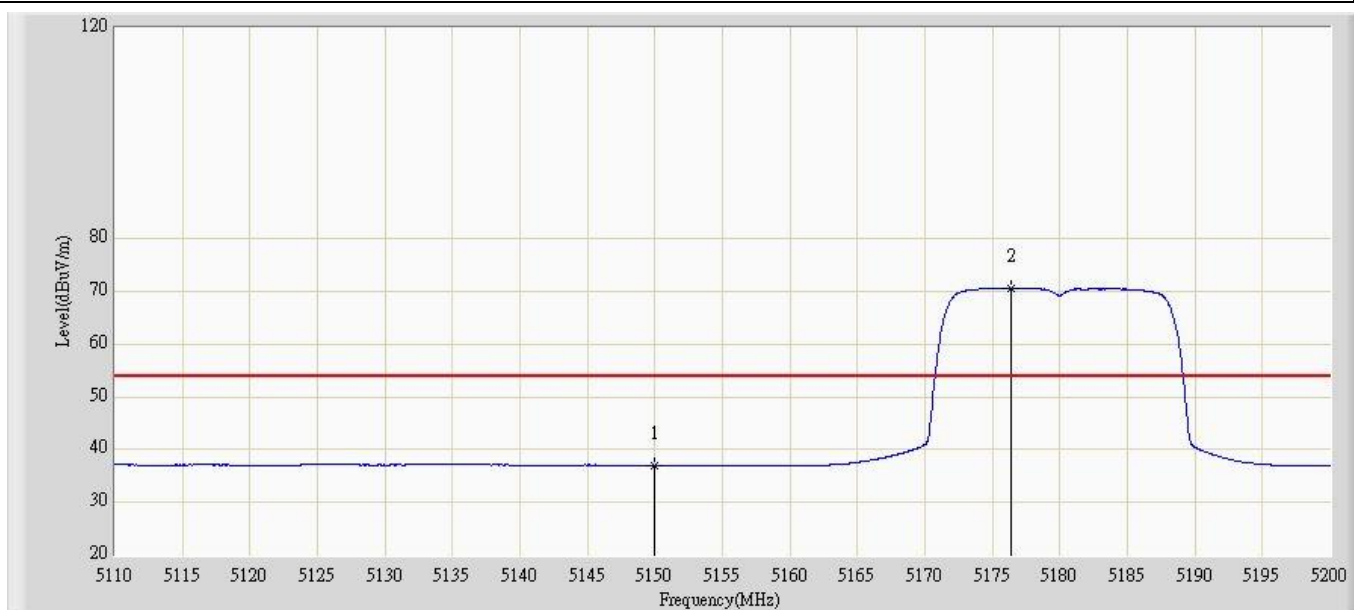


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	37.018	45.102	-16.982	54.000	-8.084	AV
2		*	5176.420	70.595	78.622	N/A	N/A	-8.026	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 18:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5180 MHz by 802.11a Chain 0	

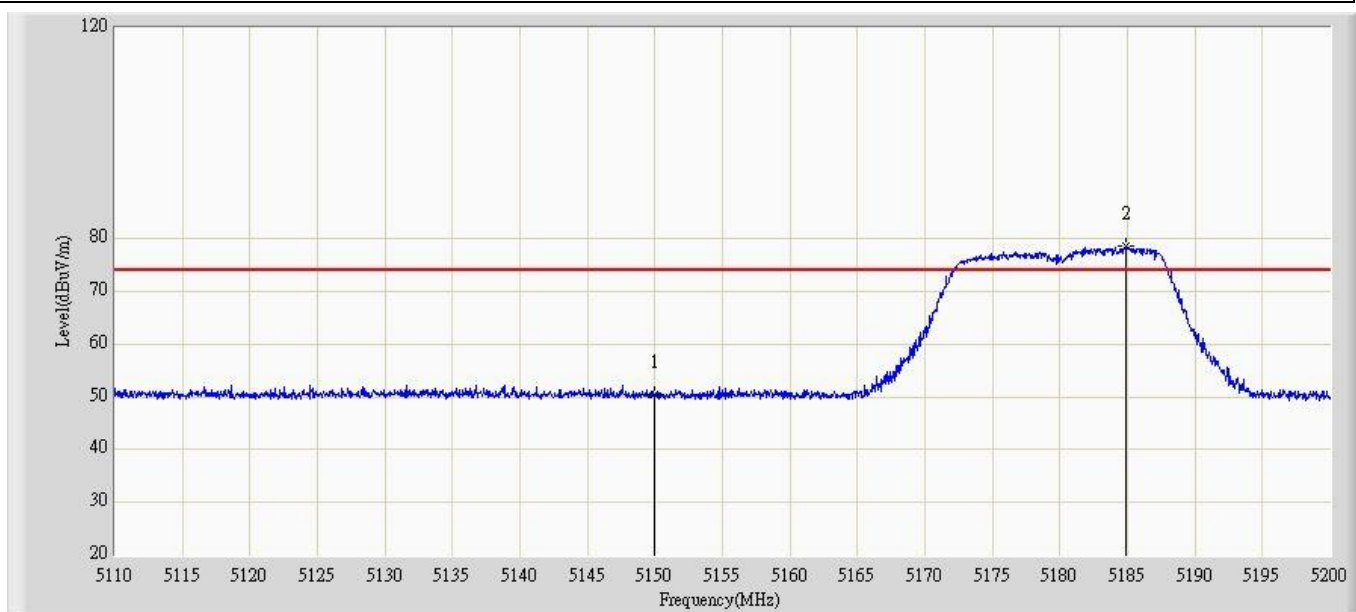


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	50.436	58.480	-23.564	74.000	-8.044	PK
2		*	5184.835	78.570	86.488	N/A	N/A	-7.918	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 18:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5180 MHz by 802.11a Chain 0	

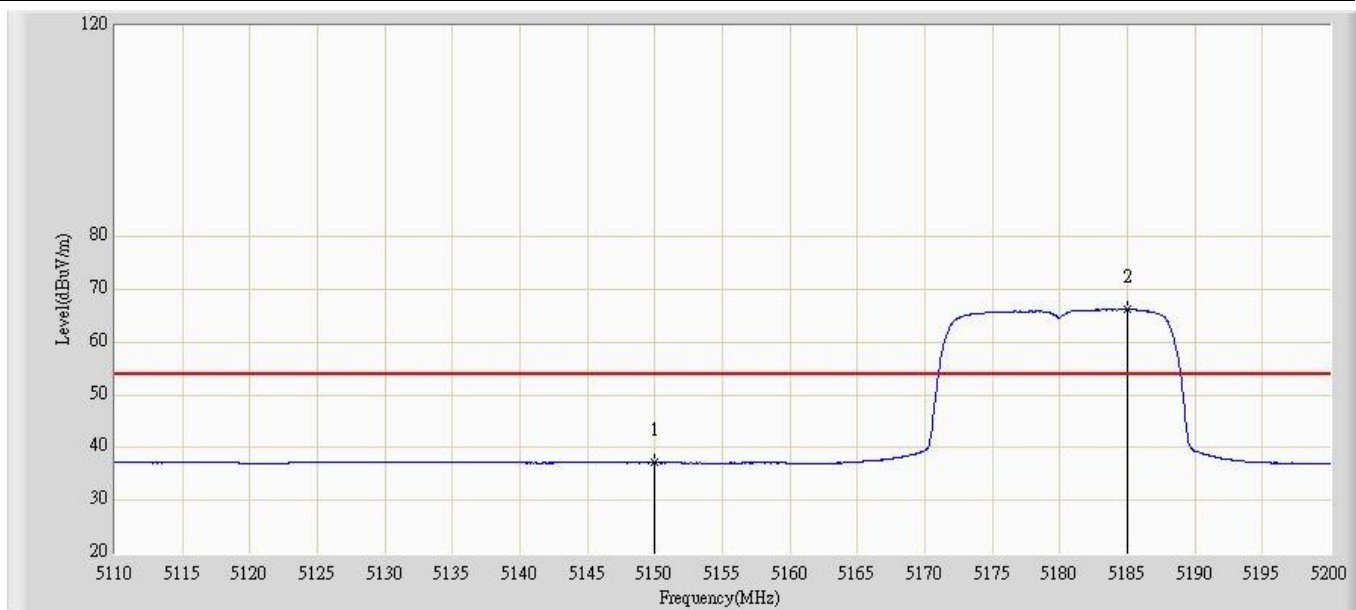


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	37.130	45.174	-16.870	54.000	-8.044	AV
2		*	5184.970	66.215	74.132	N/A	N/A	-7.918	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 18:36
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5320 MHz by 802.11a Chain 0	

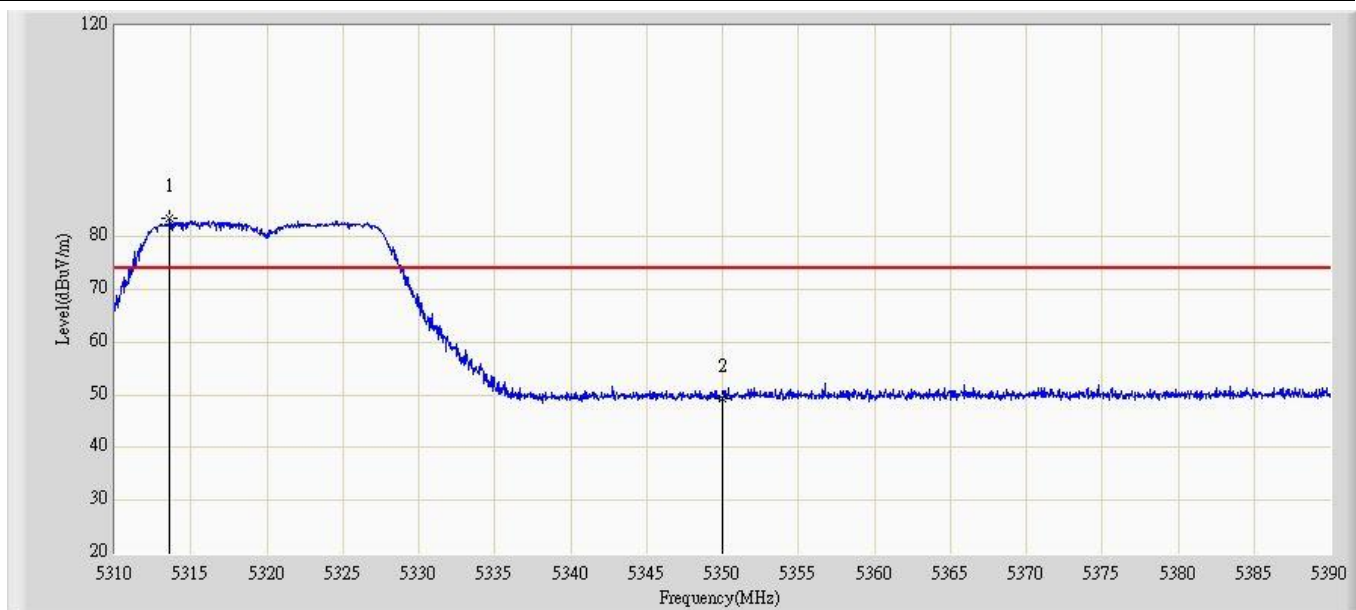


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5313.600	83.375	91.217	N/A	N/A	-7.842	PK
2			5350.000	49.251	57.034	-24.749	74.000	-7.783	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 18:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5320 MHz by 802.11a Chain 0	

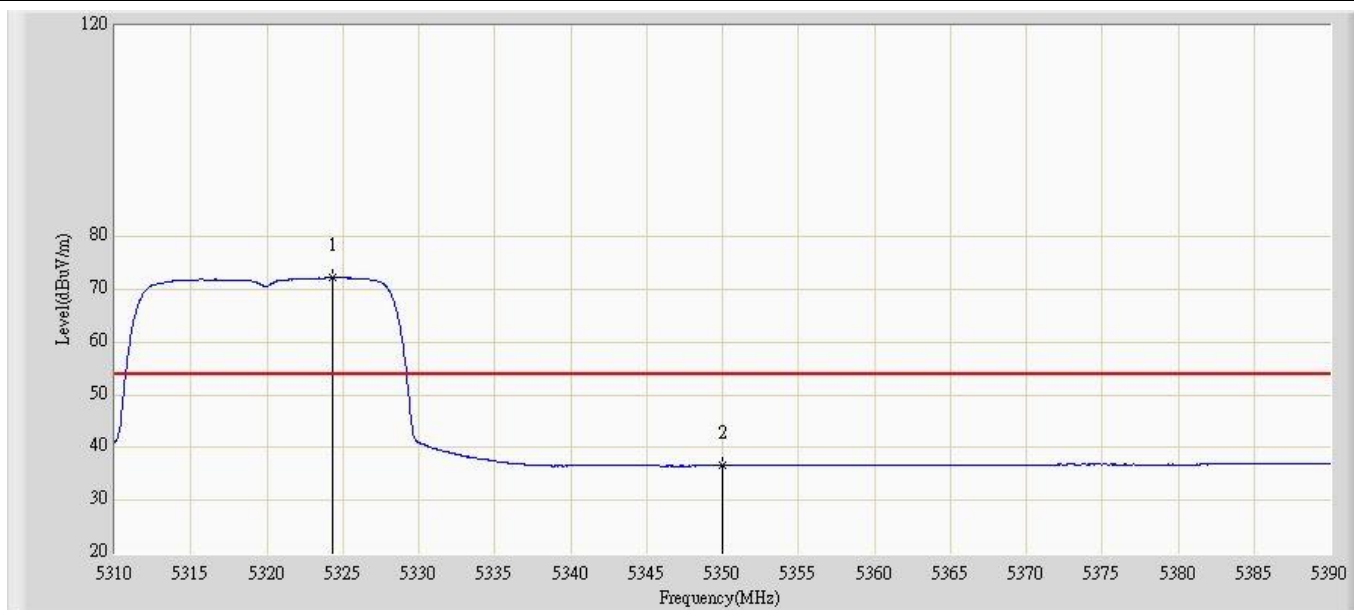


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5324.280	72.211	80.042	N/A	N/A	-7.831	AV
2			5350.000	36.656	44.439	-17.344	54.000	-7.783	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 18:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5320 MHz by 802.11a Chain 0	

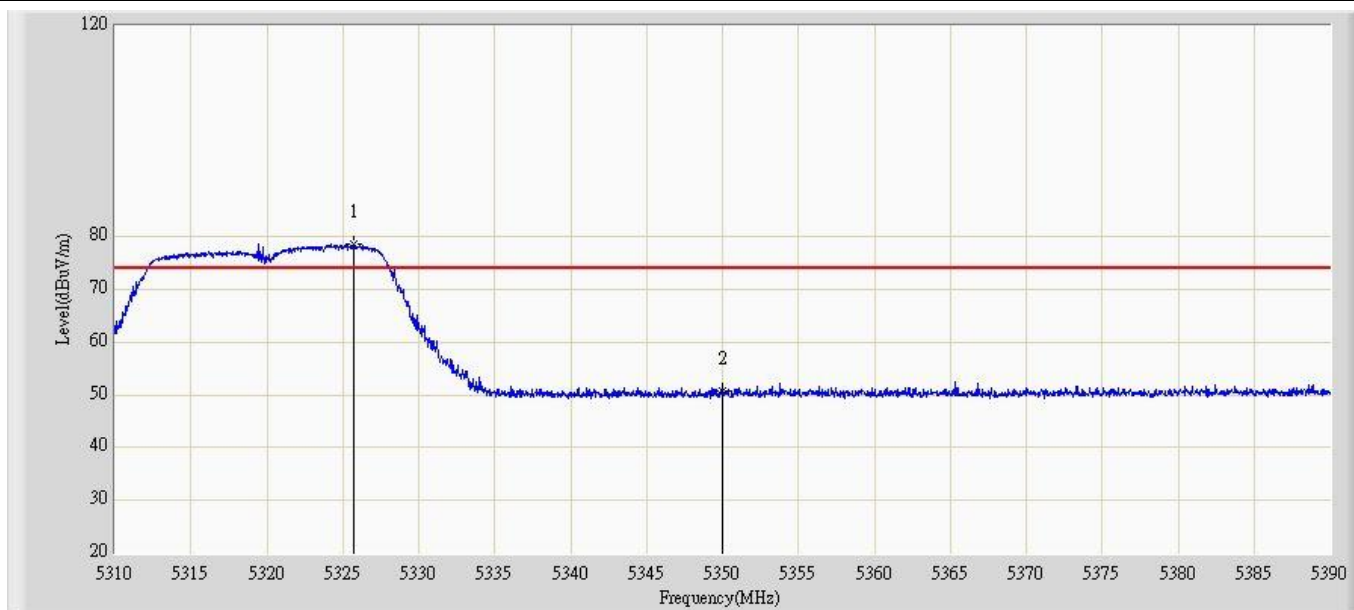


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5325.760	78.622	86.282	N/A	N/A	-7.660	PK
2			5350.000	50.655	58.278	-23.345	74.000	-7.623	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 18:42
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5320 MHz by 802.11a Chain 0	

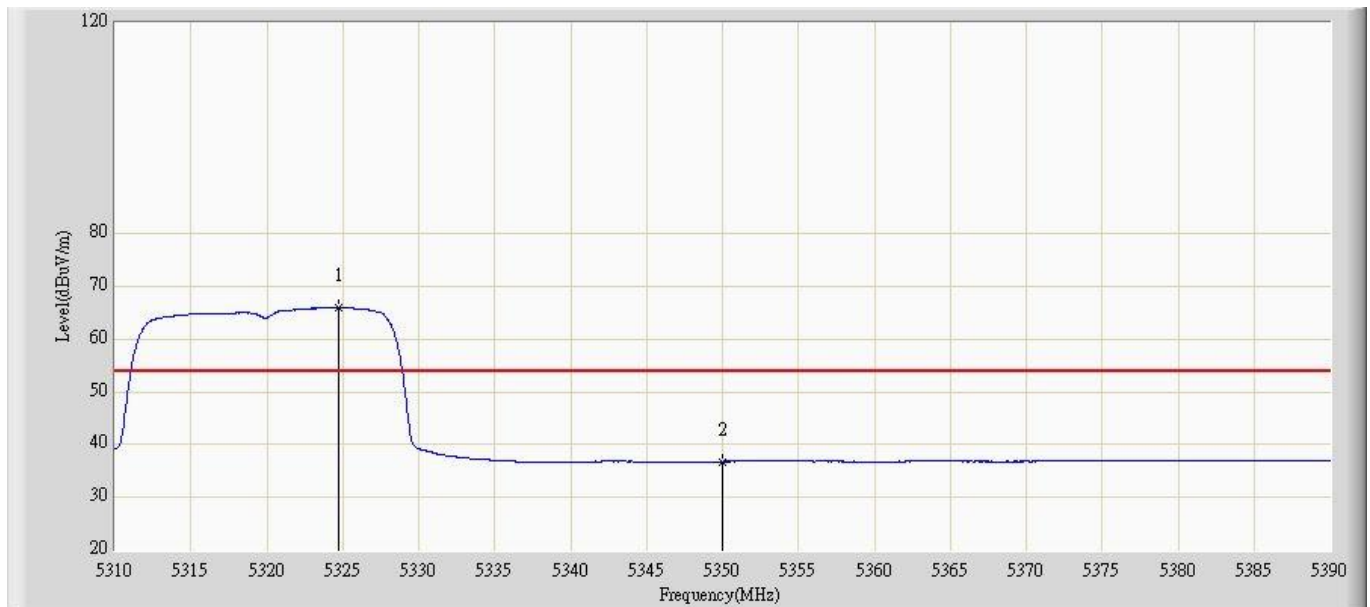


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5324.760	65.914	73.574	N/A	N/A	-7.660	AV
2			5350.000	36.783	44.406	-17.217	54.000	-7.623	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5500 MHz by 802.11a Chain 0	

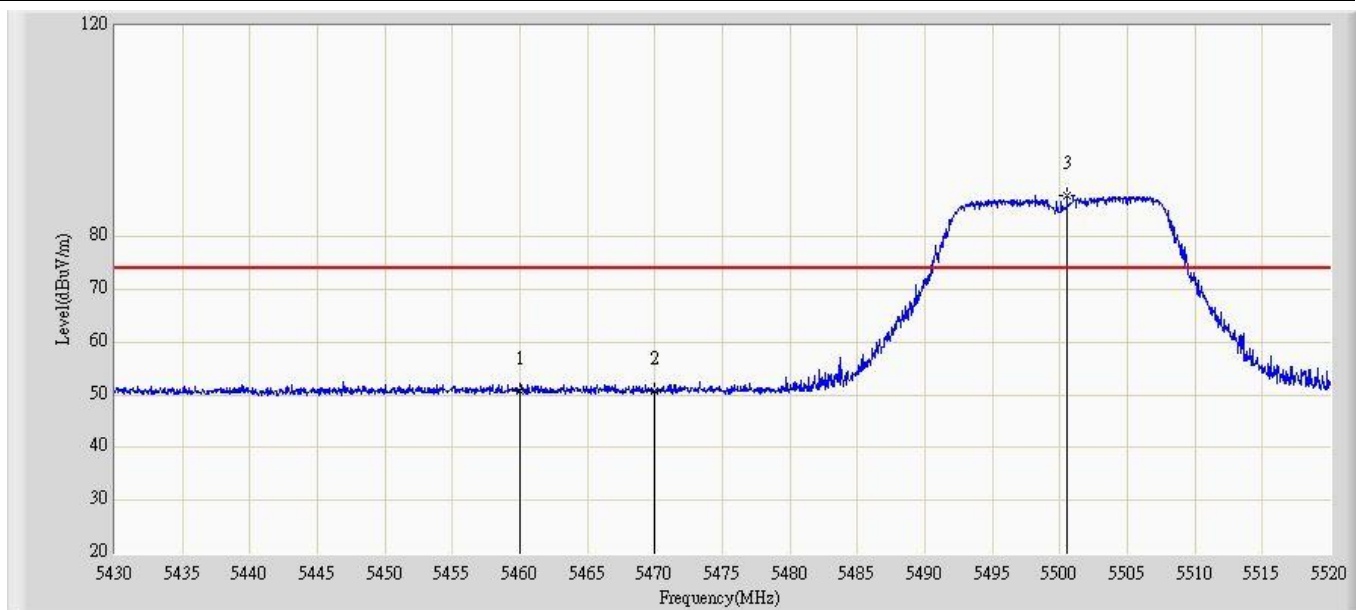


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	50.799	58.420	-23.201	74.000	-7.621	PK
2			5470.000	50.836	58.432	-37.464	88.300	-7.596	PK
3		*	5500.515	87.716	95.292	N/A	N/A	-7.576	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5500 MHz by 802.11a Chain 0	

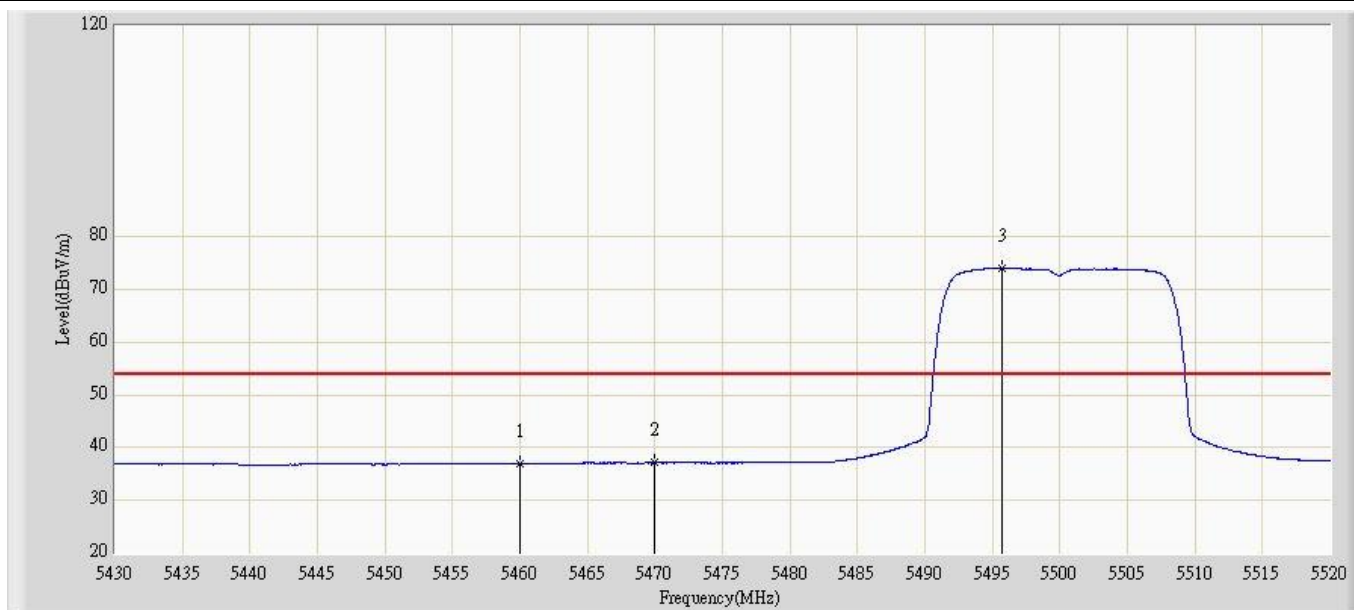


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	36.985	44.606	-17.015	54.000	-7.621	AV
2			5470.000	37.132	44.728	-31.168	68.3	-7.596	AV
3		*	5495.745	73.949	81.526	N/A	N/A	-7.577	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5500 MHz by 802.11a Chain 0	

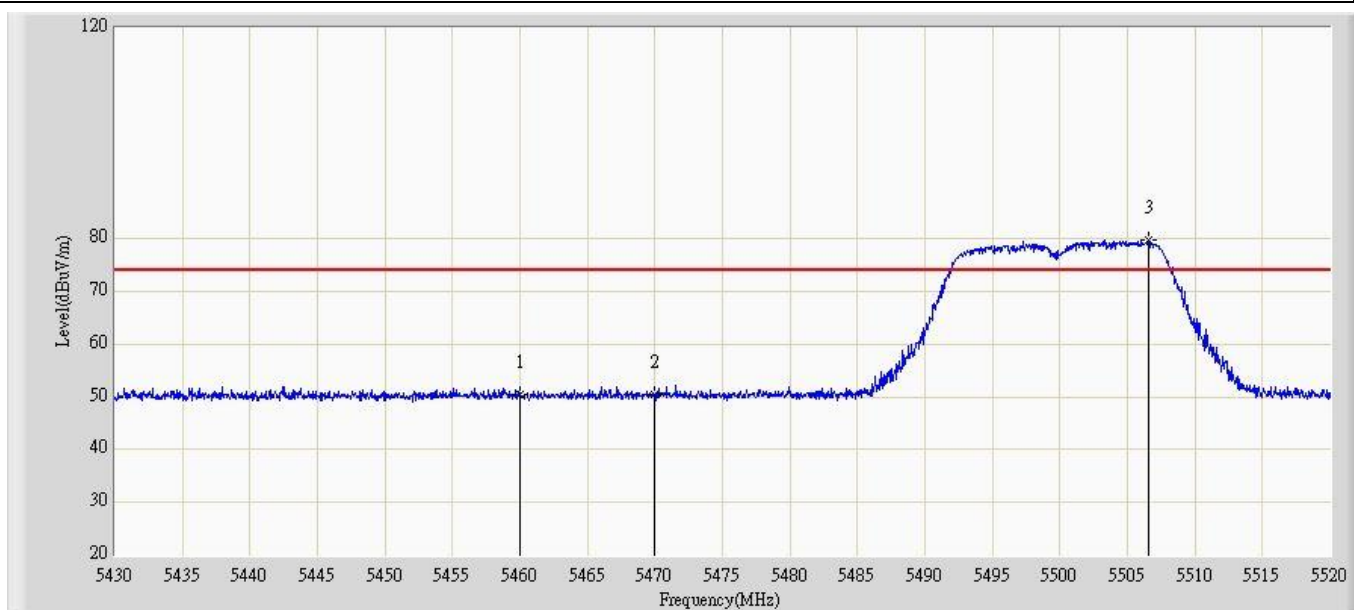


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	50.388	57.893	-23.612	74.000	-7.505	PK
2			5470.000	50.550	58.034	-37.750	88.300	-7.484	PK
3		*	5506.545	79.882	87.355	N/A	N/A	-7.473	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5500 MHz by 802.11a Chain 0	

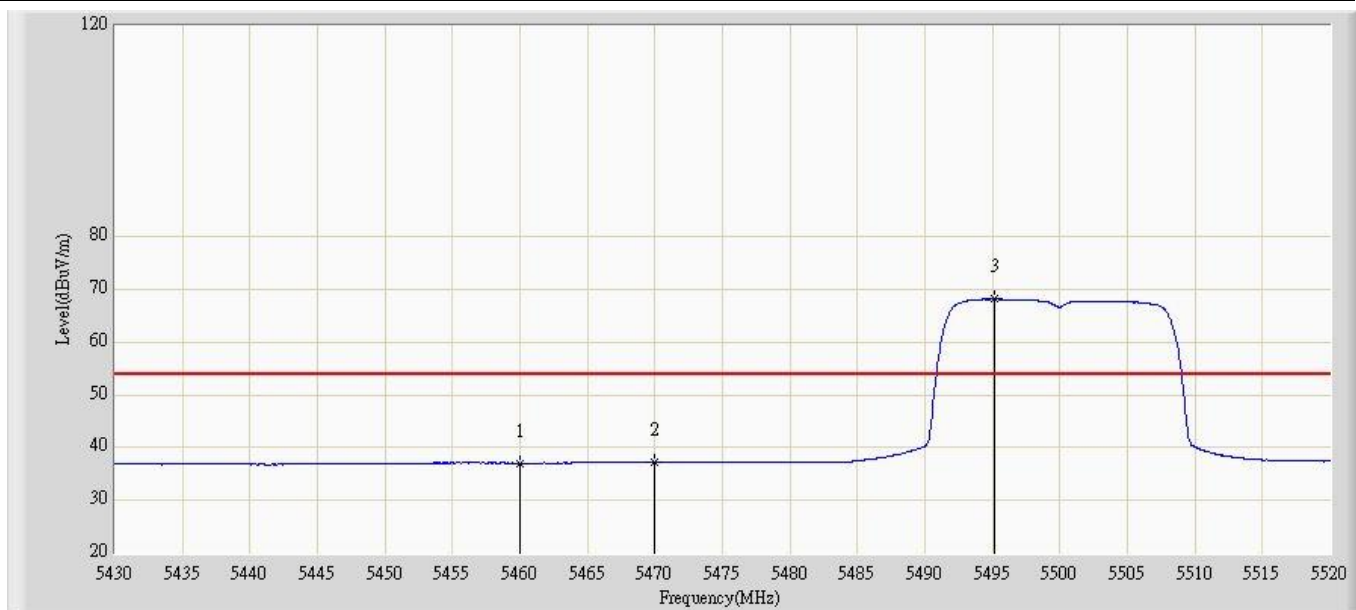


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	37.083	44.588	-16.917	54.000	-7.505	AV
2			5470.000	37.158	44.642	-31.142	68.300	-7.484	AV
3		*	5495.160	68.156	75.631	N/A	N/A	-7.475	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:07
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5700 MHz by 802.11a Chain 0	

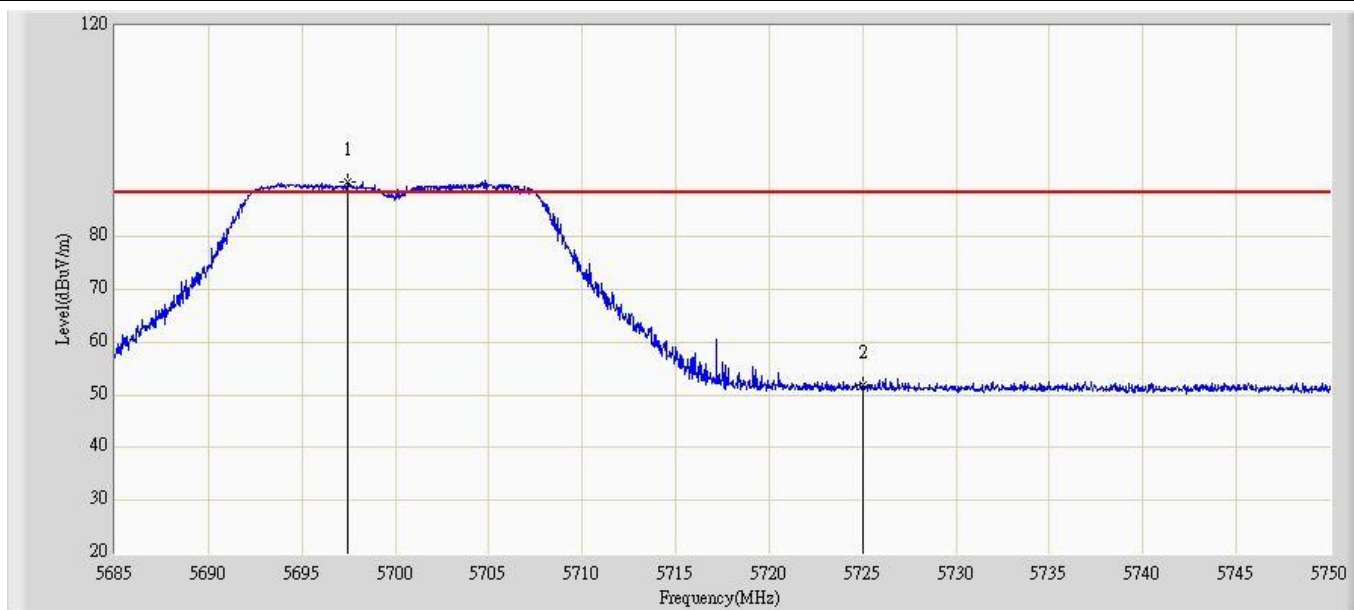


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5697.480	90.500	97.740	N/A	N/A	-7.240	PK
2			5725.000	51.789	58.970	-36.511	88.300	-7.181	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:08
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5700 MHz by 802.11a Chain 0	

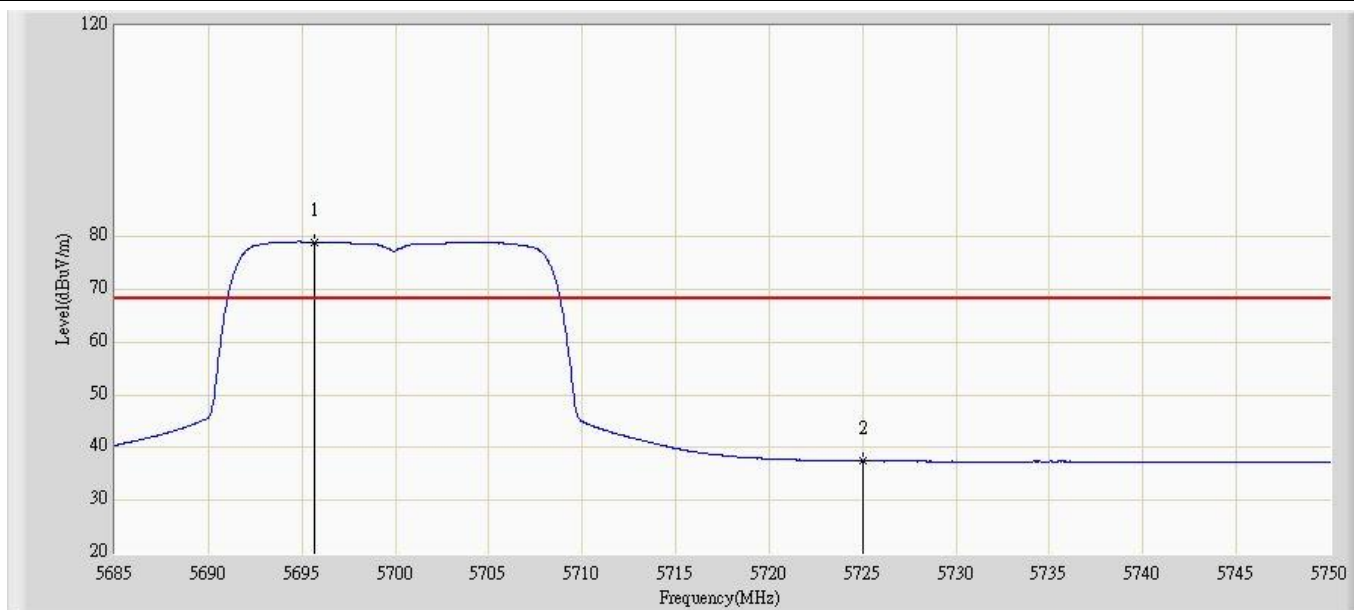


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5695.692	79.008	86.251	N/A	N/A	-7.243	AV
2			5725.000	37.440	44.621	-30.860	68.300	-7.181	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:09
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5700 MHz by 802.11a Chain 0	

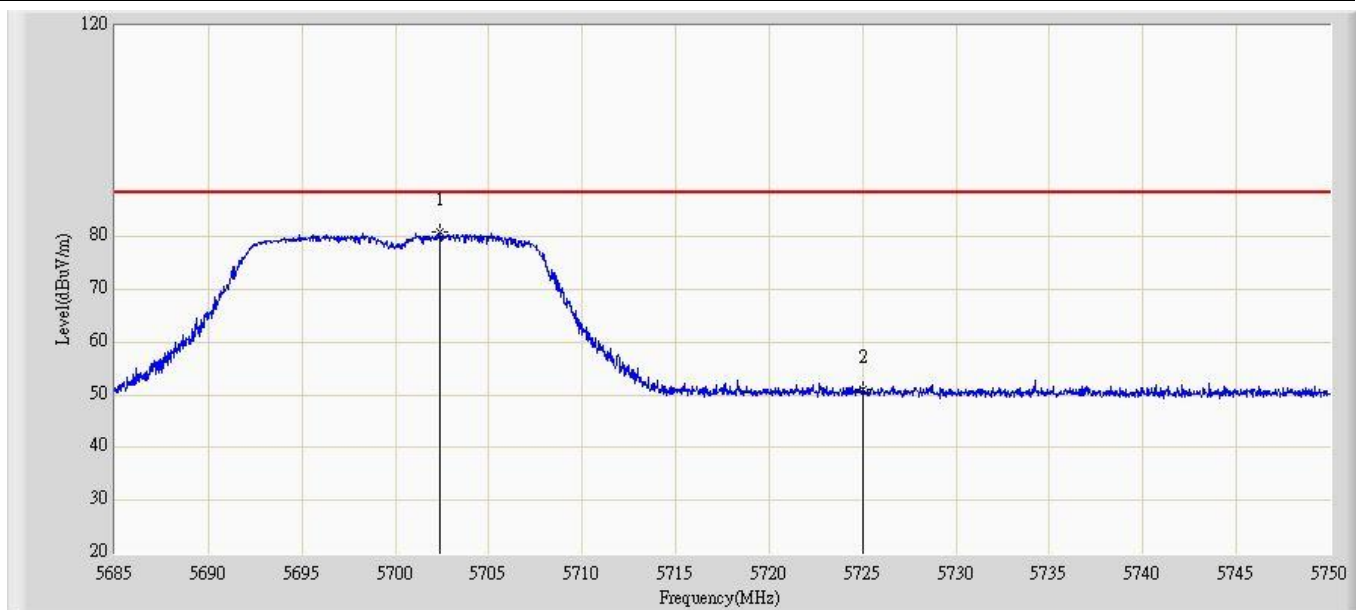


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5702.420	80.886	88.098	N/A	N/A	-7.212	PK
2			5725.000	51.114	58.285	-37.186	88.300	-7.171	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:10
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 1: Transmit at channel 5700 MHz by 802.11a Chain 0	

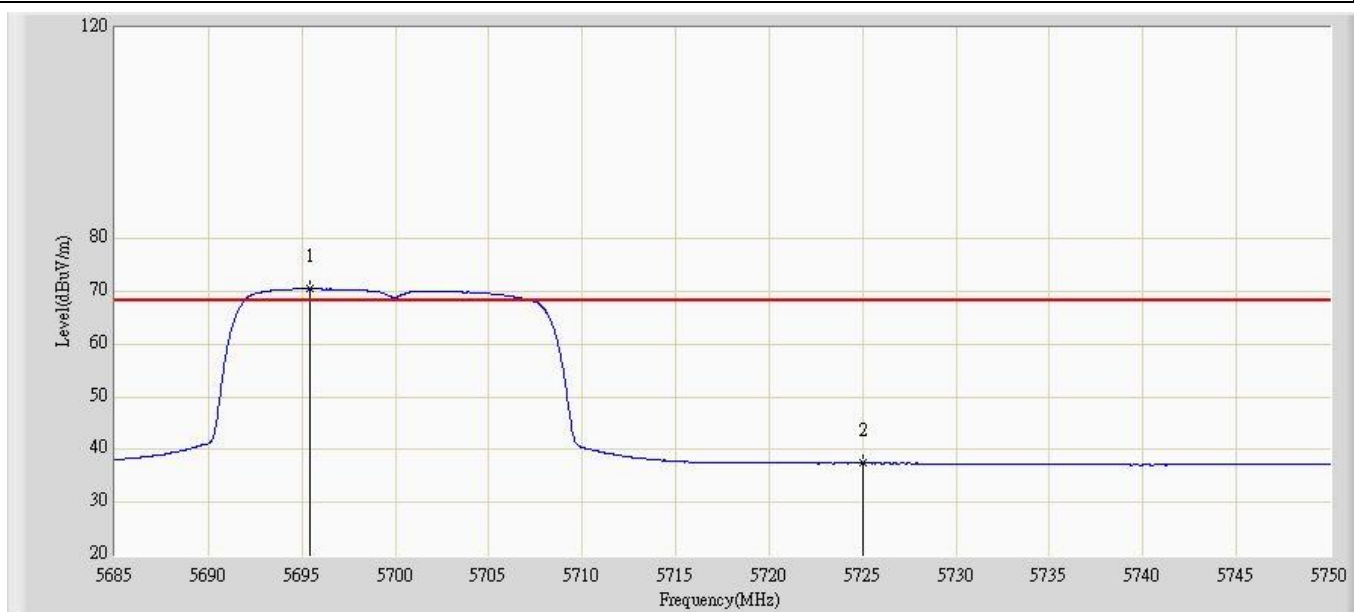


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5695.465	70.480	77.701	N/A	N/A	-7.221	AV
2			5725.000	37.426	44.597	-30.874	68.300	-7.171	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5180 MHz by 802.11n20 Chain 0	

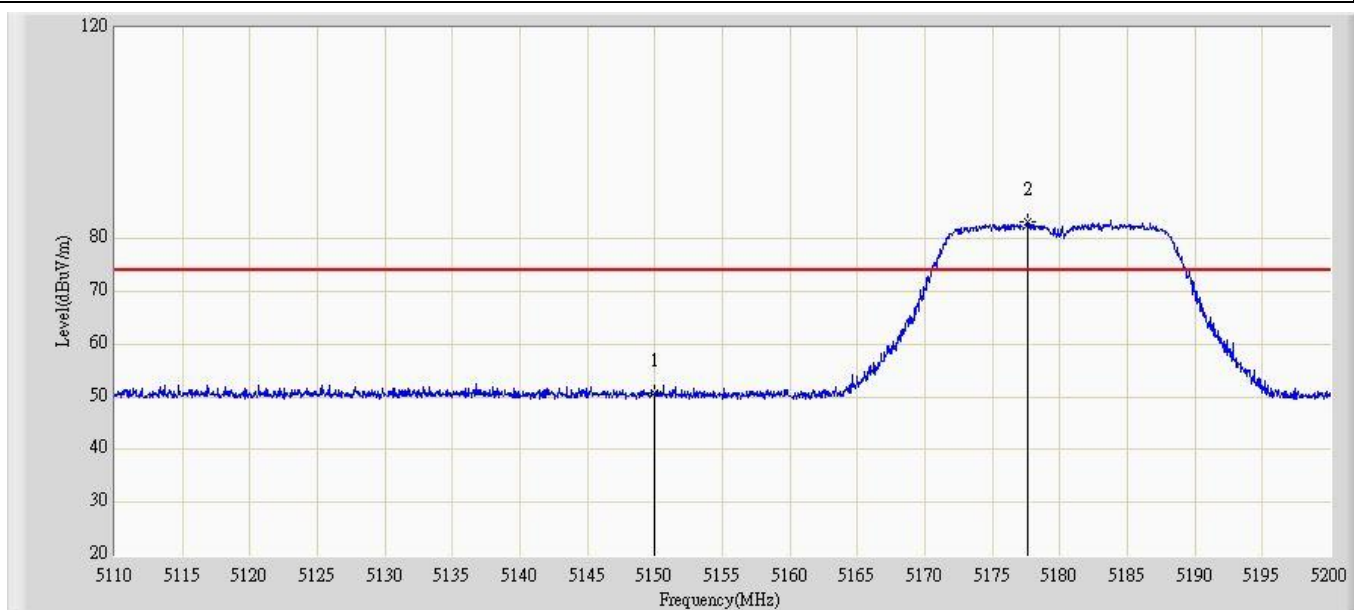


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	50.752	58.836	-23.248	74.000	-8.084	PK
2		*	5177.635	83.205	91.230	N/A	N/A	-8.026	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5180 MHz by 802.11n20 Chain 0	

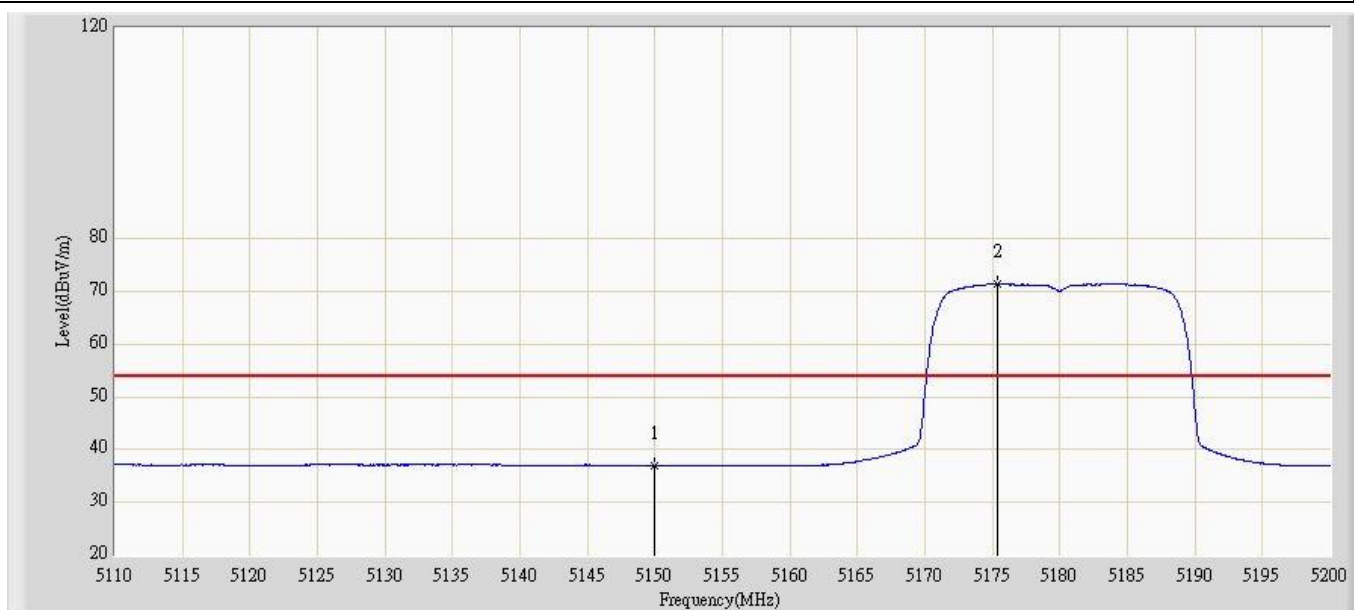


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	37.007	45.091	-16.993	54.000	-8.084	AV
2		*	5175.340	71.405	79.433	N/A	N/A	-8.028	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5180 MHz by 802.11n20 Chain 0	

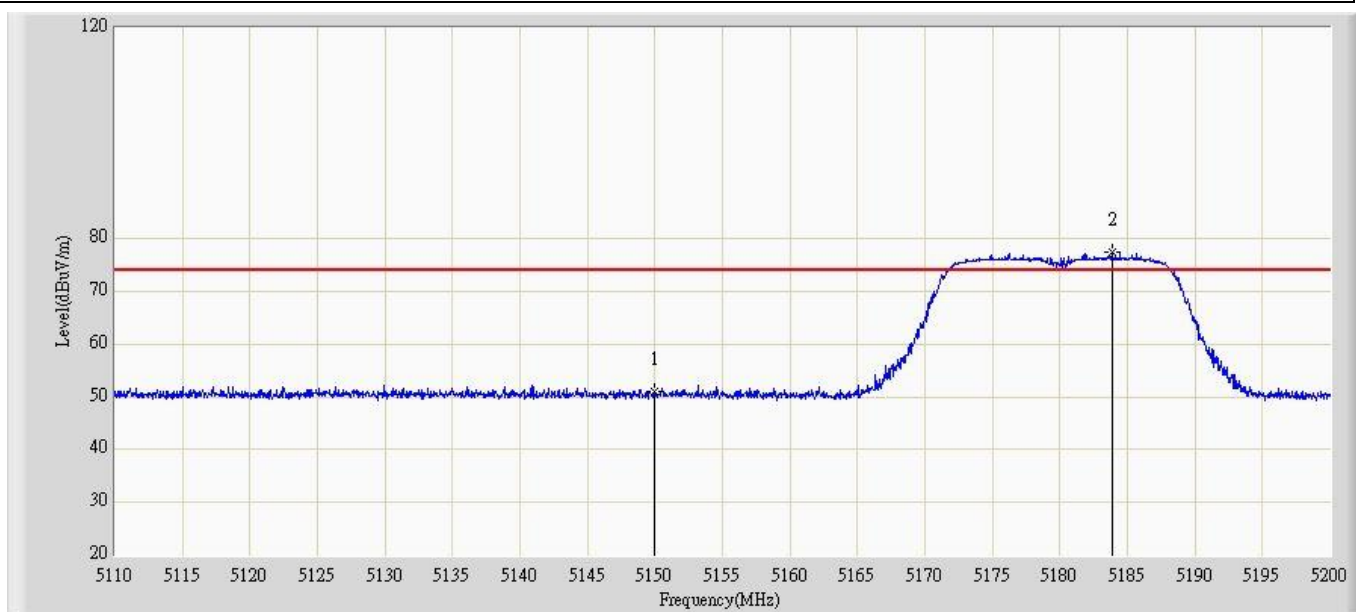


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	50.960	59.004	-23.040	74.000	-8.044	PK
2		*	5183.890	77.351	85.273	N/A	N/A	-7.922	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5180 MHz by 802.11n20 Chain 0	

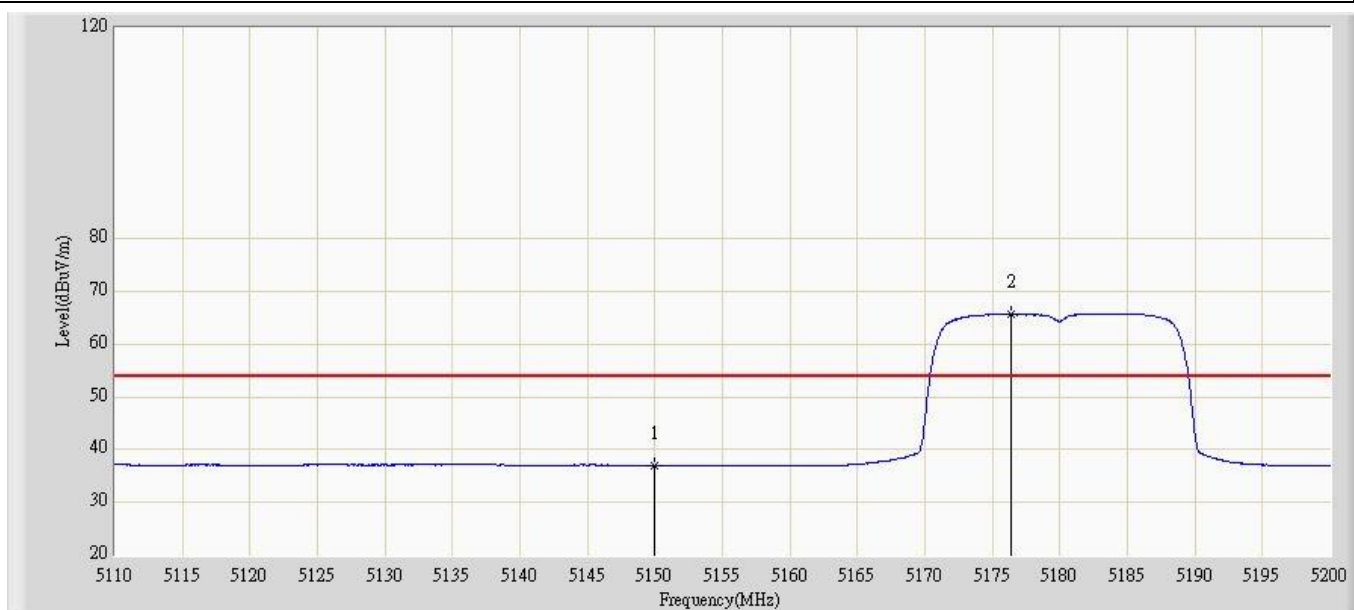


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	37.040	45.084	-16.960	54.000	-8.044	AV
2		*	5176.420	65.640	73.584	N/A	N/A	-7.944	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5320 MHz by 802.11n20 Chain 0	

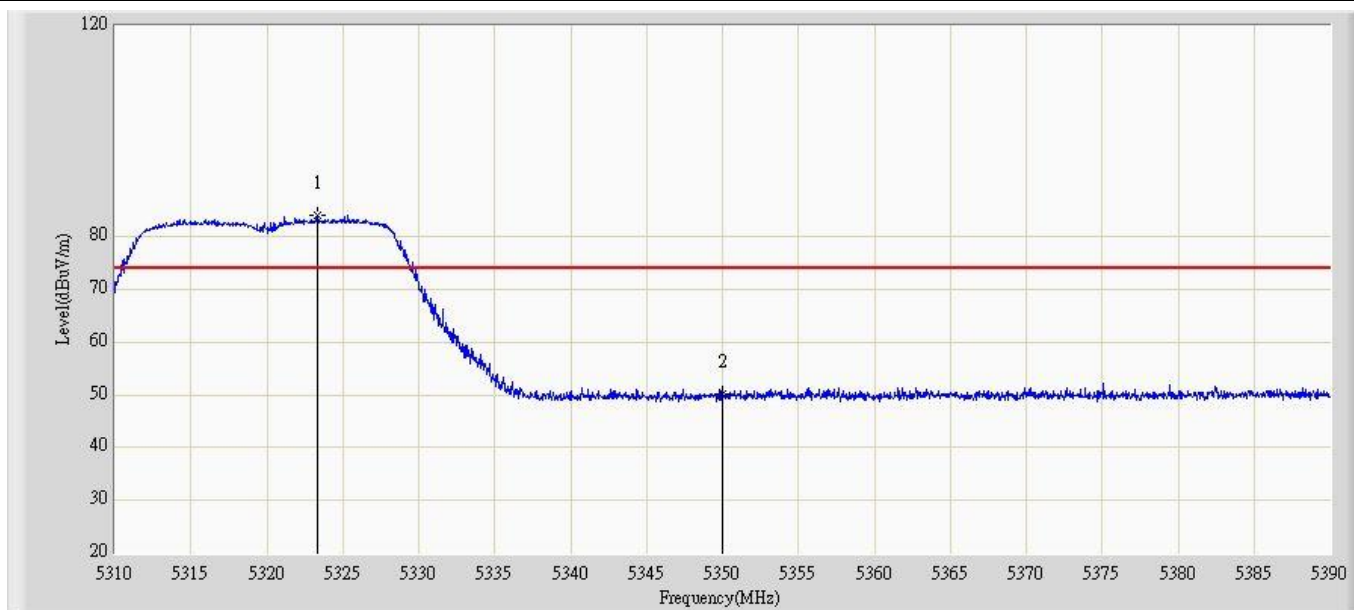


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5323.360	84.217	92.049	N/A	N/A	-7.832	PK
2			5350.000	50.075	57.858	-23.925	74.000	-7.783	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5320 MHz by 802.11n20 Chain 0	

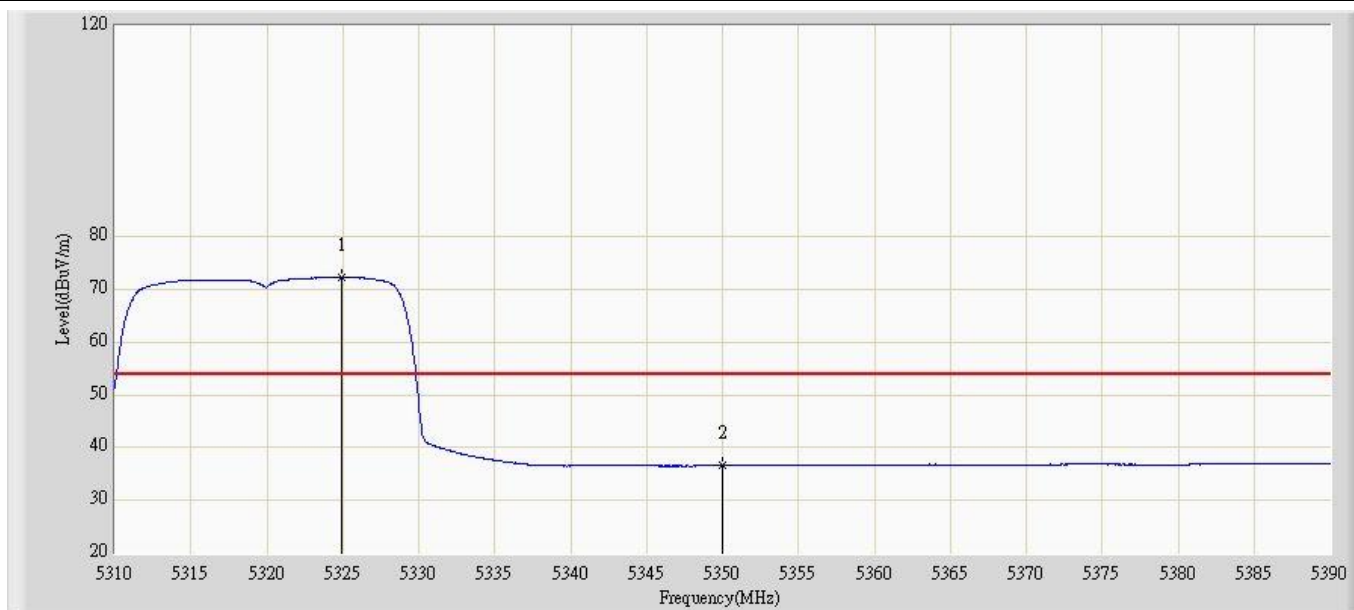


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5324.880	72.331	80.161	N/A	N/A	-7.830	AV
2			5350.000	36.663	44.446	-17.337	54.000	-7.783	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5320 MHz by 802.11n20 Chain 0	

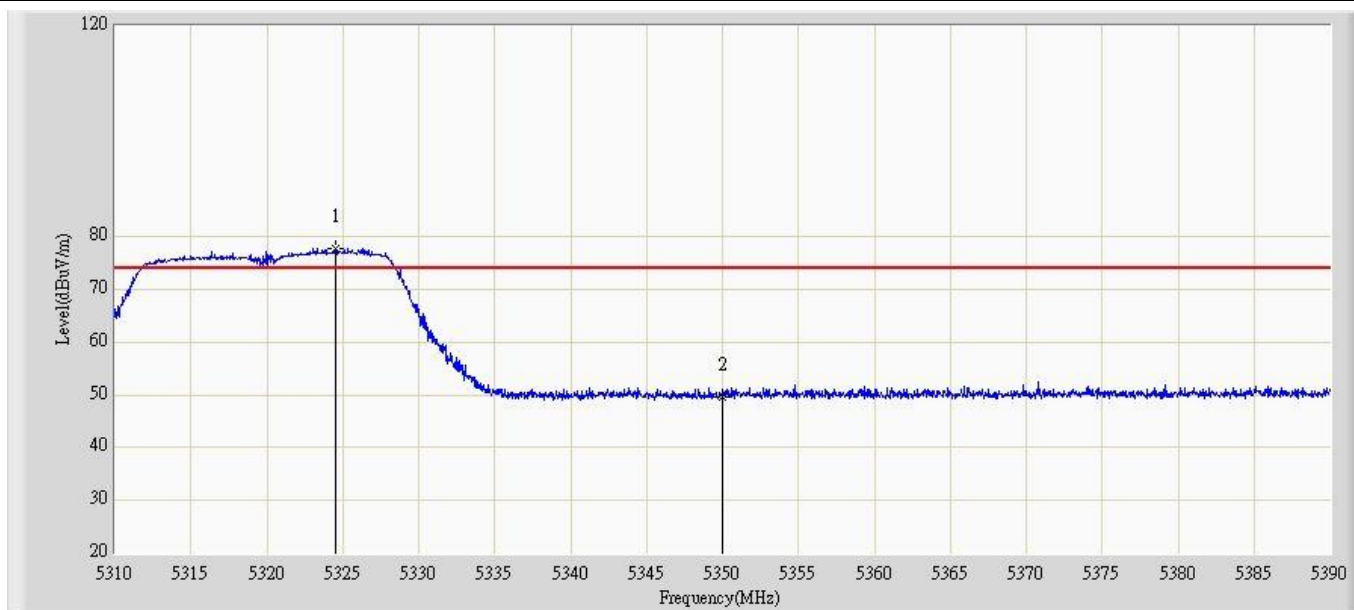


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5324.560	77.656	85.316	N/A	N/A	-7.660	PK
2			5350.000	49.543	57.166	-24.457	74.000	-7.623	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:24
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5320 MHz by 802.11n20 Chain 0	

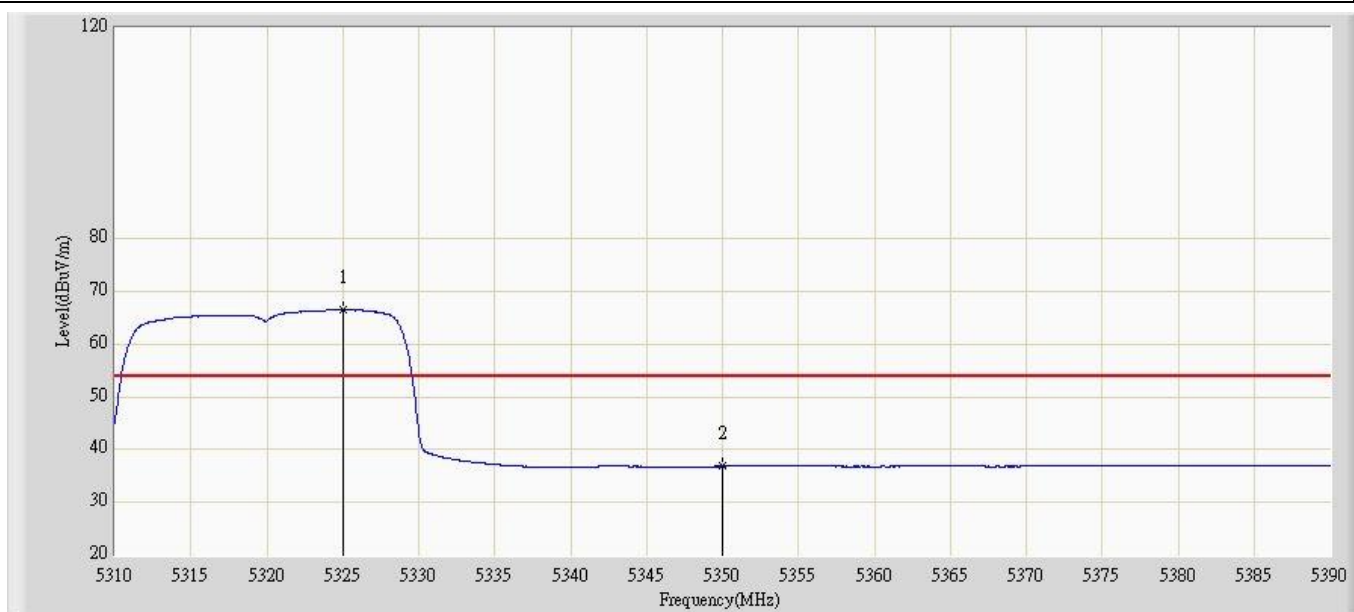


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5325.000	66.517	74.177	N/A	N/A	-7.660	AV
2			5350.000	36.819	44.442	-17.181	54.000	-7.623	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5500 MHz by 802.11n20 Chain 0	

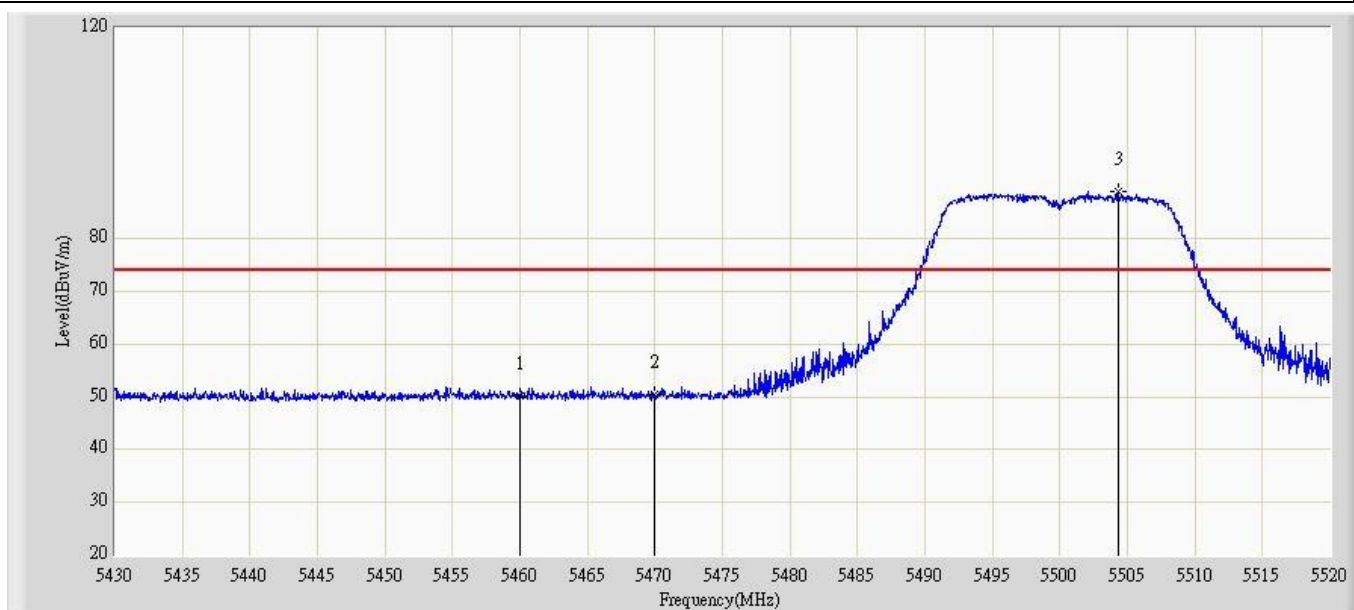


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	50.113	57.734	-23.887	74.000	-7.621	PK
2			5470.000	50.353	57.949	-37.947	88.300	-7.596	PK
3		*	5504.295	88.911	96.485	N/A	N/A	-7.574	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5500 MHz by 802.11n20 Chain 0	

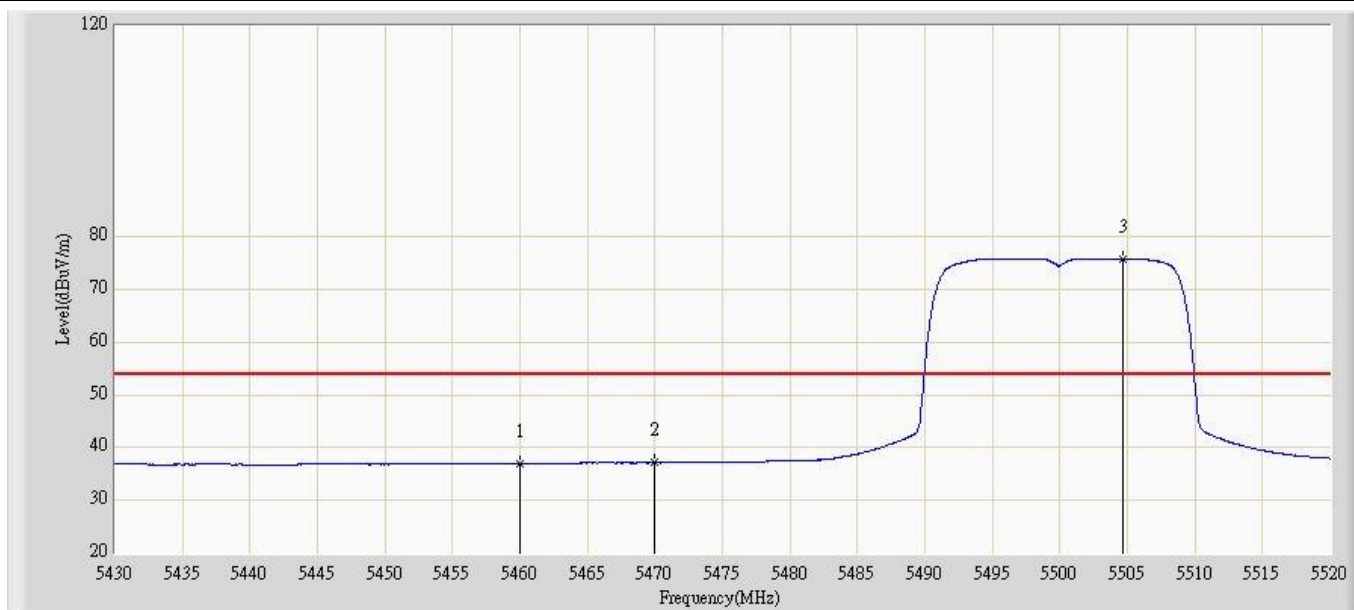


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	36.985	44.606	-17.015	54.000	-7.621	AV
2			5470.000	37.118	44.714	-31.182	68.300	-7.596	AV
3		*	5504.700	75.767	83.341	N/A	N/A	-7.574	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5500 MHz by 802.11n20 Chain 0	

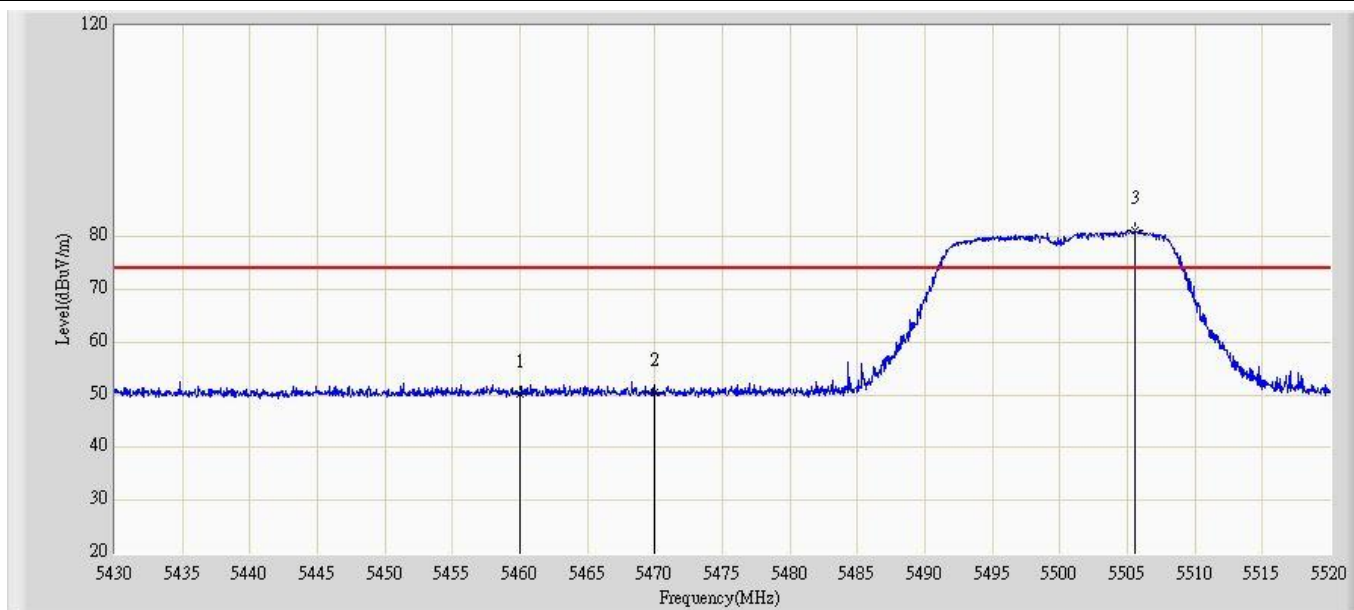


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	50.293	57.798	-23.707	74.000	-7.505	PK
2			5470.000	50.584	58.068	-37.716	88.300	-7.484	PK
3		*	5505.510	81.325	88.800	N/A	N/A	-7.476	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5500 MHz by 802.11n20 Chain 0	

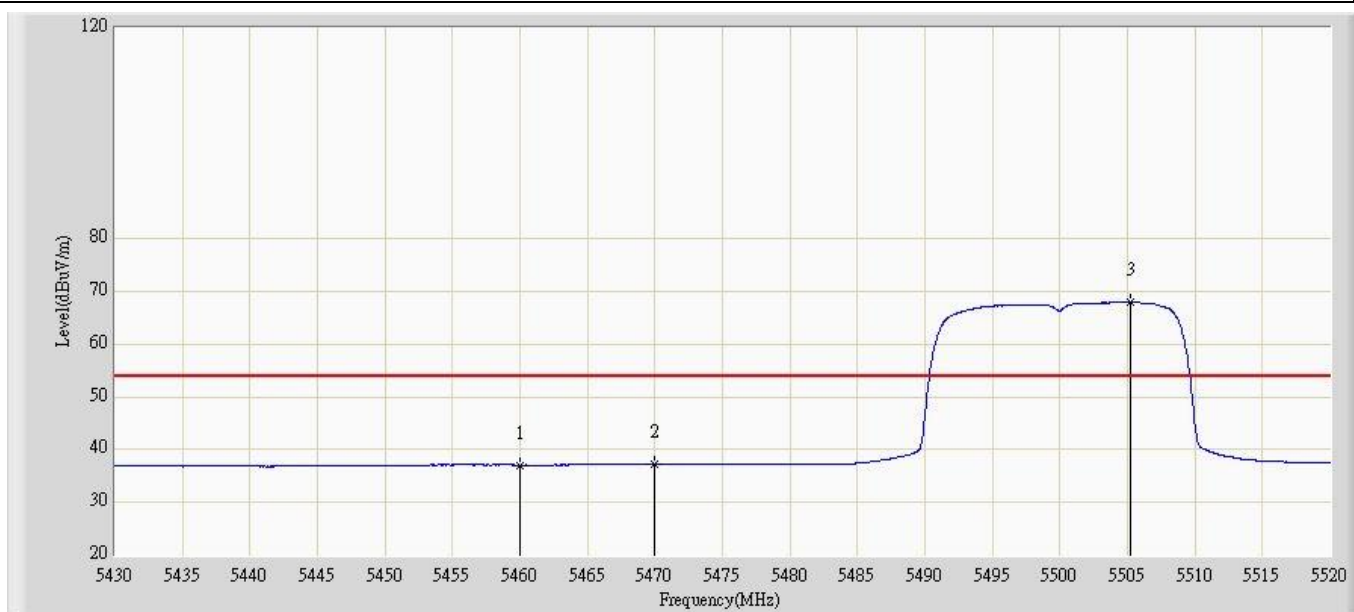


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5460.000	37.051	44.556	-16.949	54.000	-7.505	AV
2			5470.000	37.200	44.684	-31.100	68.300	-7.484	AV
3		*	5505.240	67.893	75.369	N/A	N/A	-7.476	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:31
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5700 MHz by 802.11n20 Chain 0	

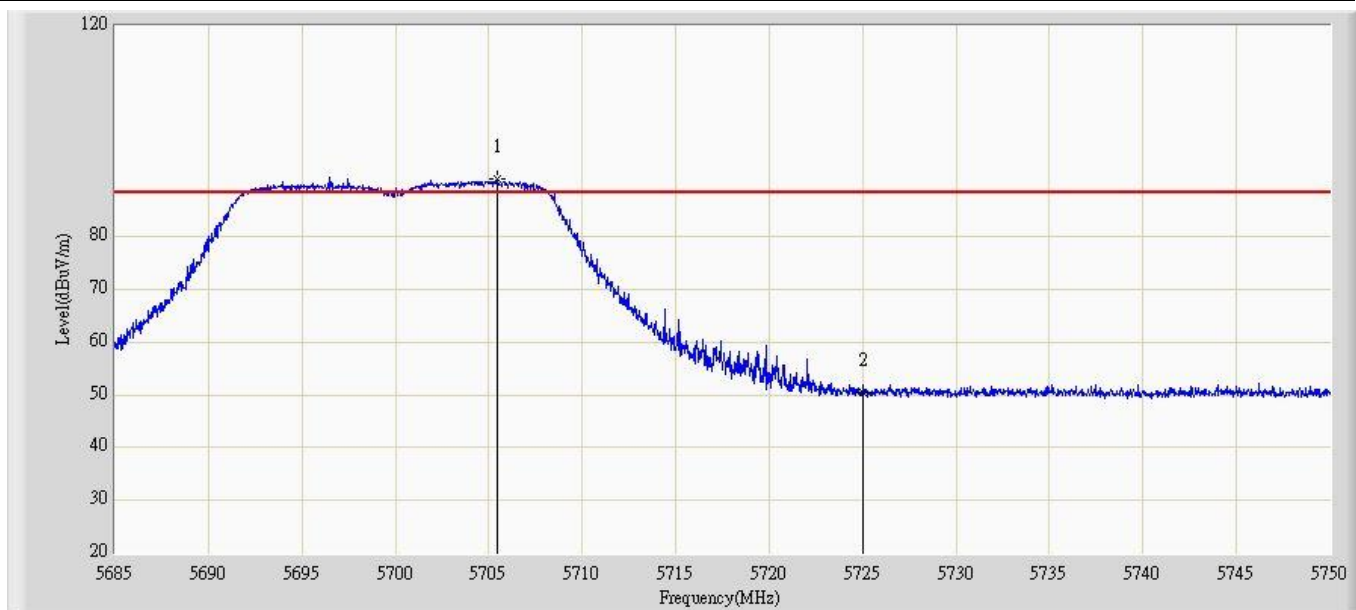


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5705.475	90.941	98.166	N/A	N/A	-7.225	PK
2			5725.000	50.539	57.720	-37.761	88.300	-7.181	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:33
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5700 MHz by 802.11n20 Chain 0	

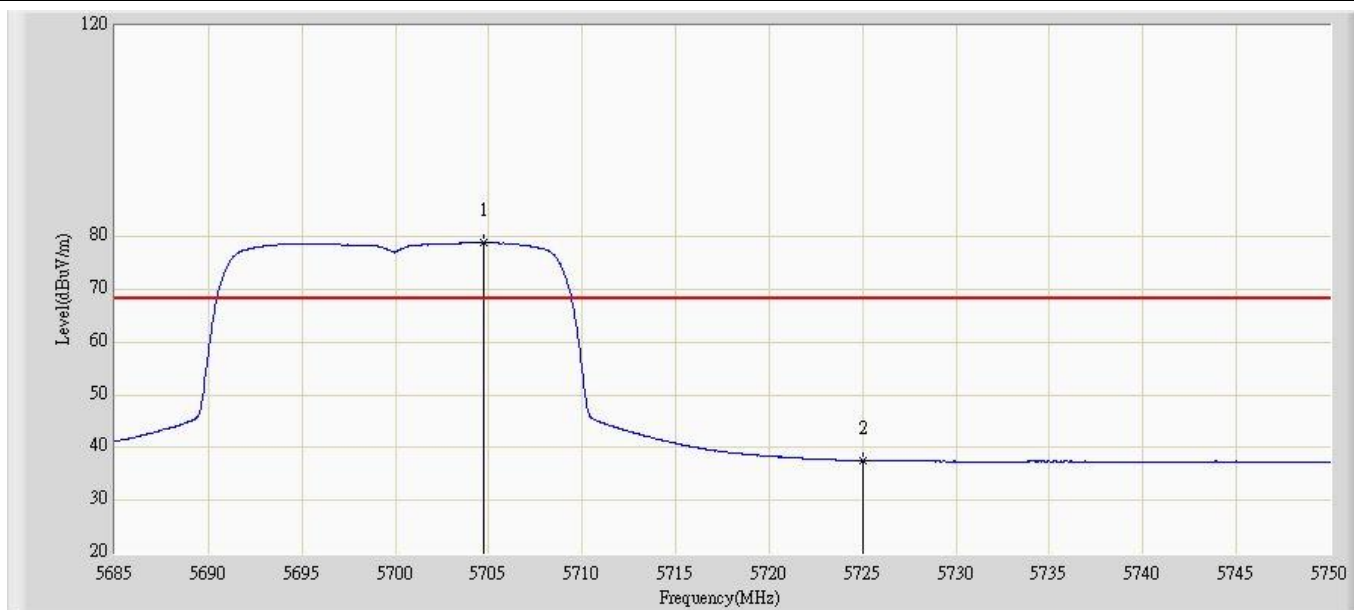


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5704.728	78.851	86.078	N/A	N/A	-7.226	AV
2			5725.000	37.520	44.701	-30.780	68.300	-7.181	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:33
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5700 MHz by 802.11n20 Chain 0	

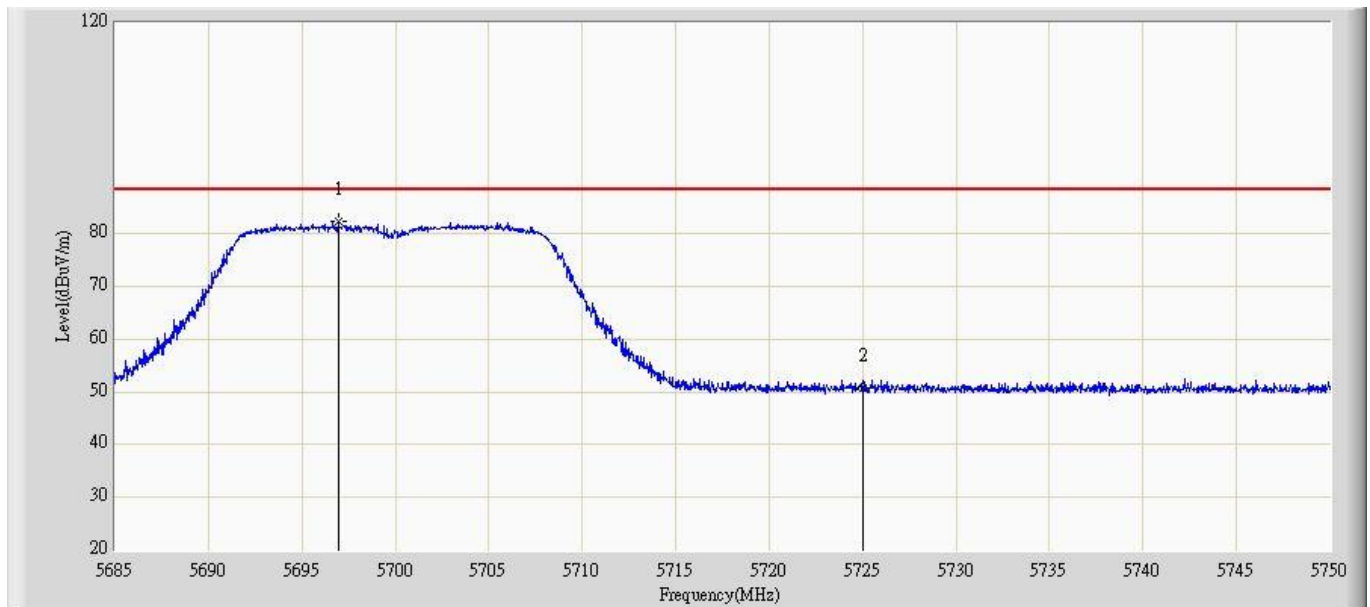


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5696.928	82.360	89.579	N/A	N/A	-7.219	PK
2			5725.000	50.782	57.953	-37.518	88.300	-7.171	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:35
Limit: FCC_Part15.407_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 2: Transmit at channel 5700 MHz by 802.11n20 Chain 0	

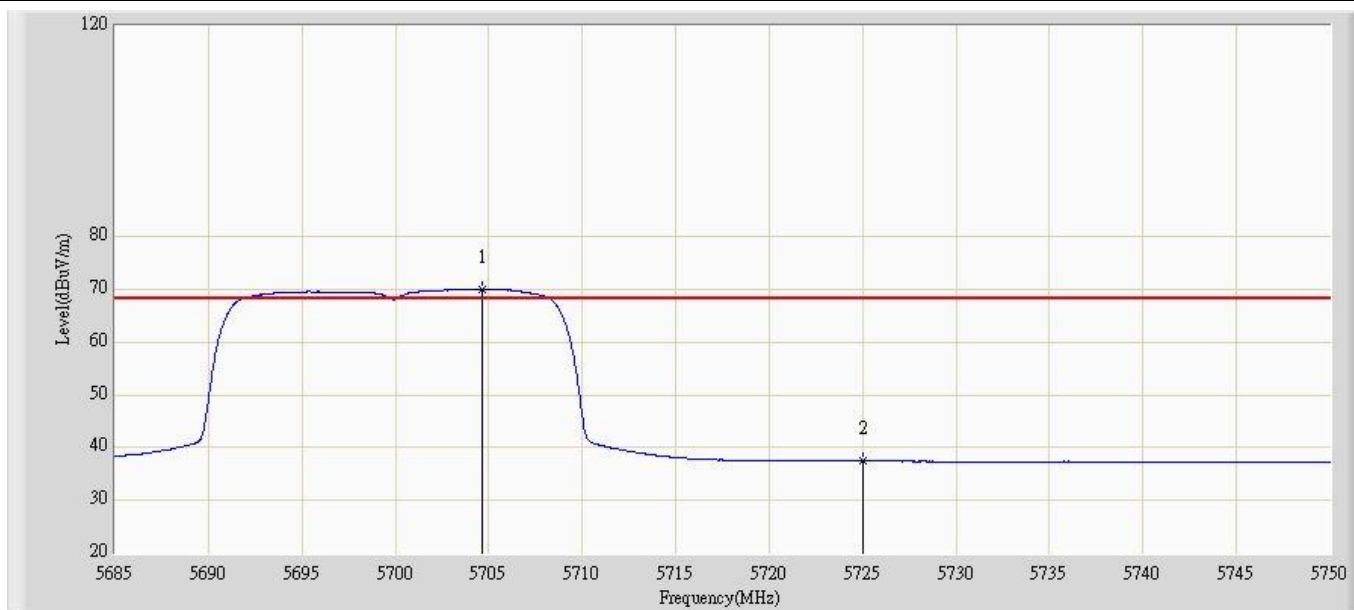


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5704.663	70.055	77.264	N/A	N/A	-7.208	AV
2			5725.000	37.446	44.617	-30.854	68.300	-7.171	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5190 MHz by 802.11n40 Chain 0	

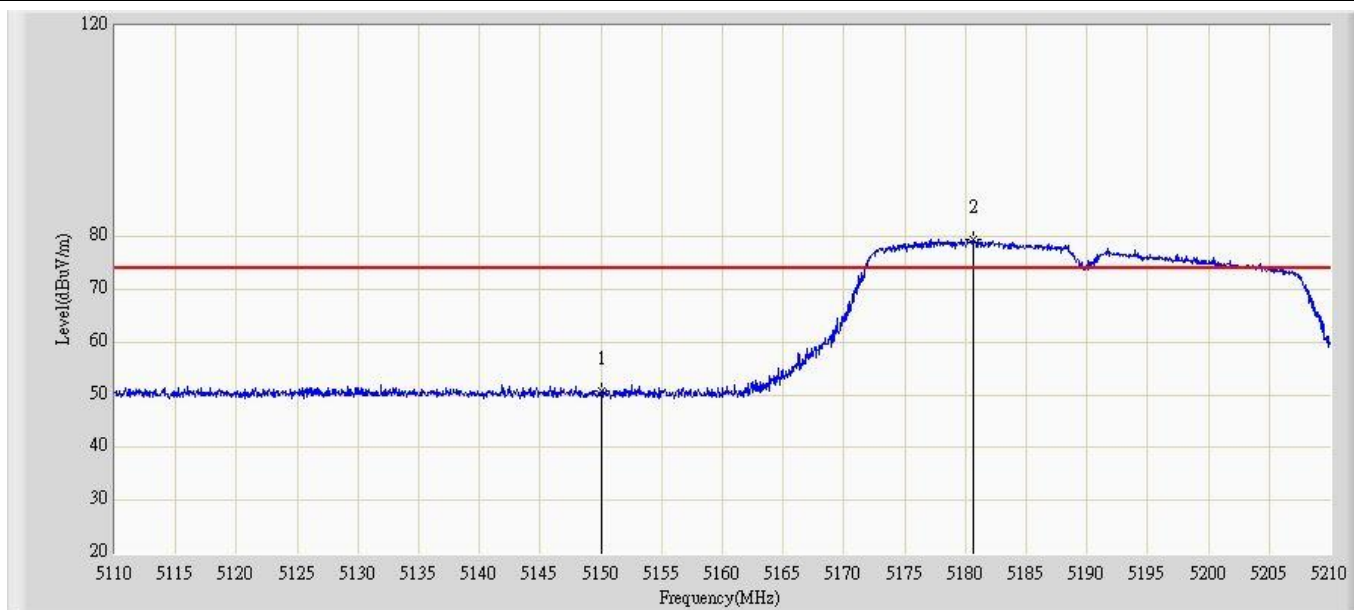


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	50.708	58.752	-23.292	74.000	-8.044	PK
2		*	5180.650	79.571	87.504	N/A	N/A	-7.933	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5190 MHz by 802.11n40 Chain 0	

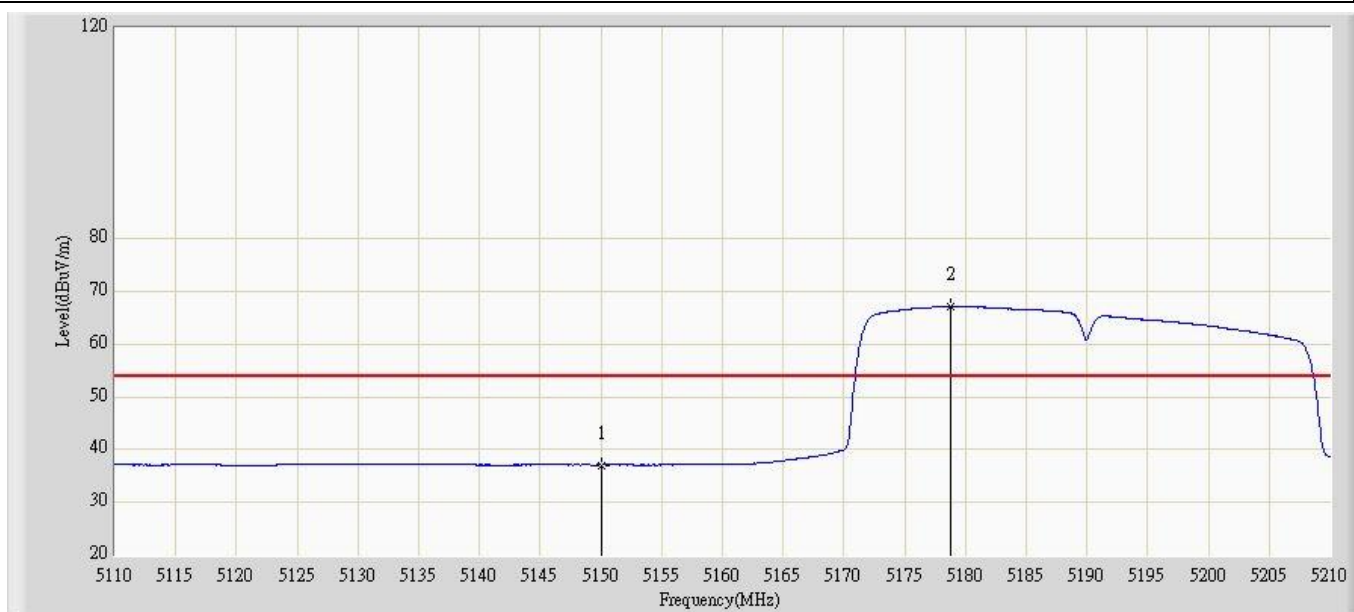


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	37.091	45.135	-16.909	54.000	-8.044	AV
2		*	5178.750	67.079	75.017	N/A	N/A	-7.938	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5190 MHz by 802.11n40 Chain 0	

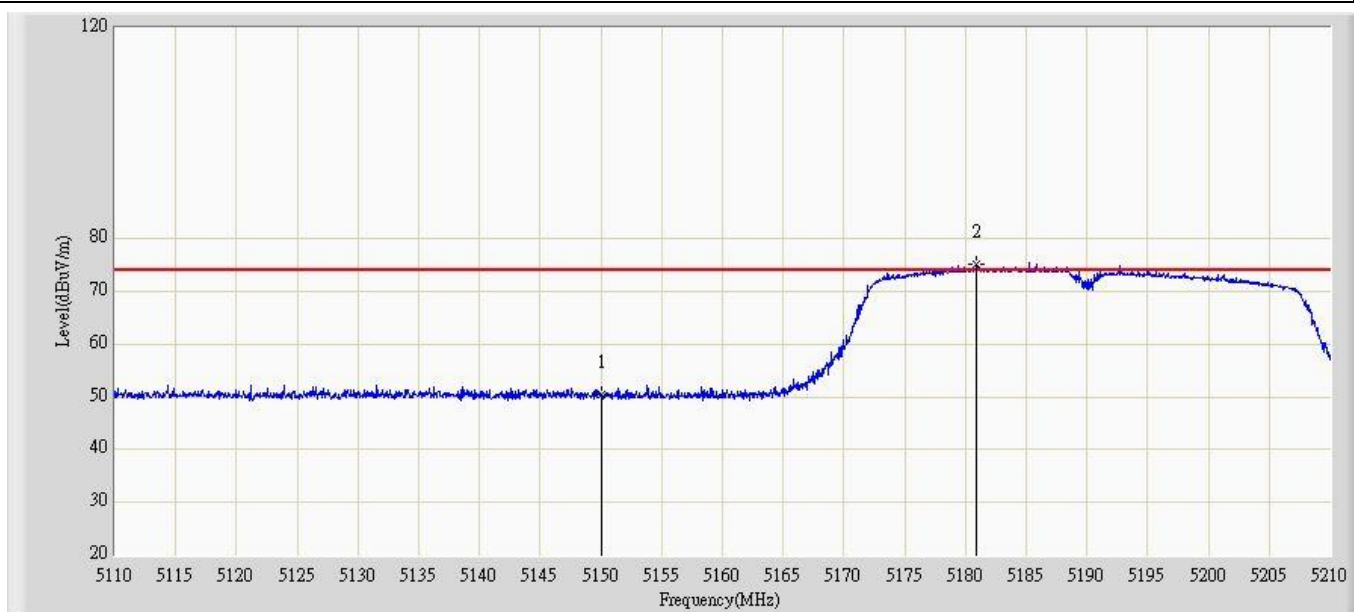


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	50.338	58.382	-23.662	74.000	-8.044	PK
2		*	5180.950	75.162	83.094	N/A	N/A	-7.933	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5190 MHz by 802.11n40 Chain 0	

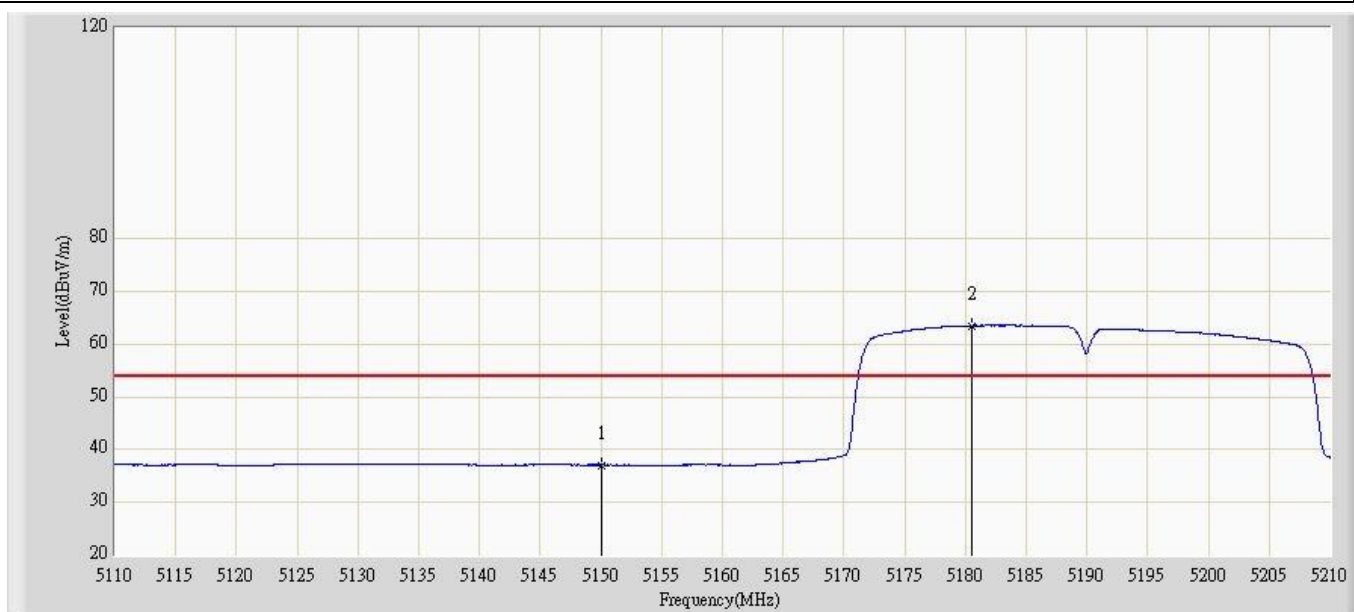


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1			5150.000	37.067	45.111	-16.933	54.000	-8.044	AV
2		*	5180.550	63.529	71.462	N/A	N/A	-7.933	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5310 MHz by 802.11n40 Chain 0	

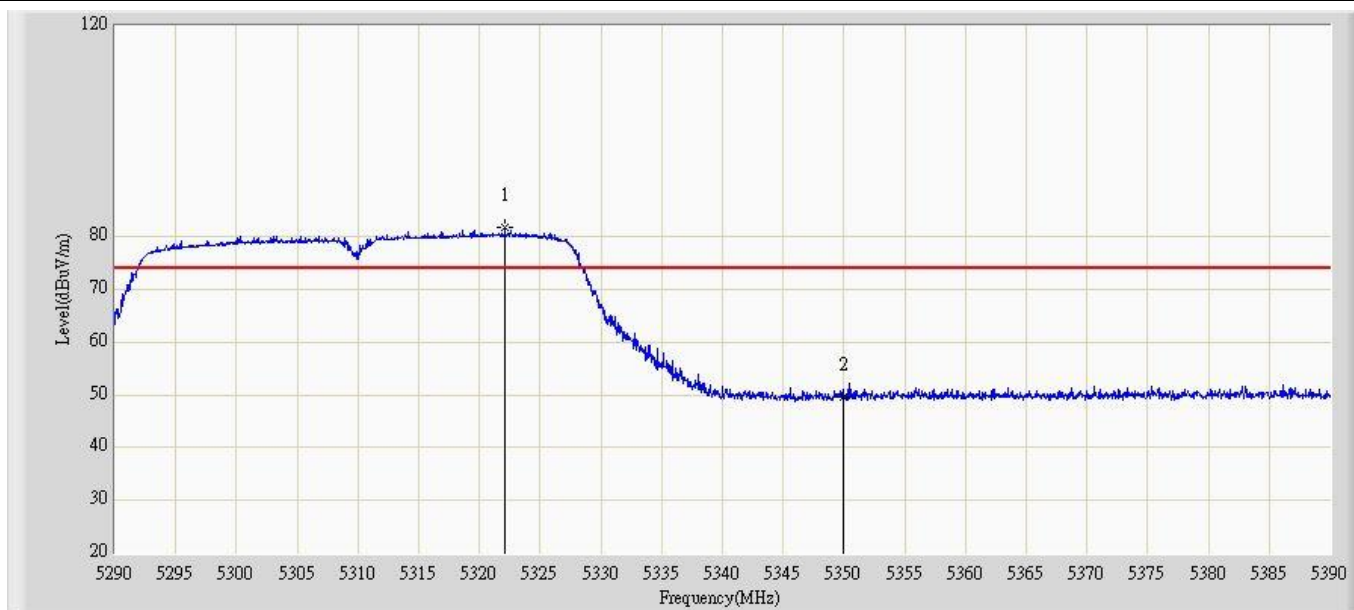


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5322.100	81.722	89.555	N/A	N/A	-7.833	PK
2			5350.000	49.589	57.372	-24.411	74.000	-7.783	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Vertical
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5310 MHz by 802.11n40 Chain 0	

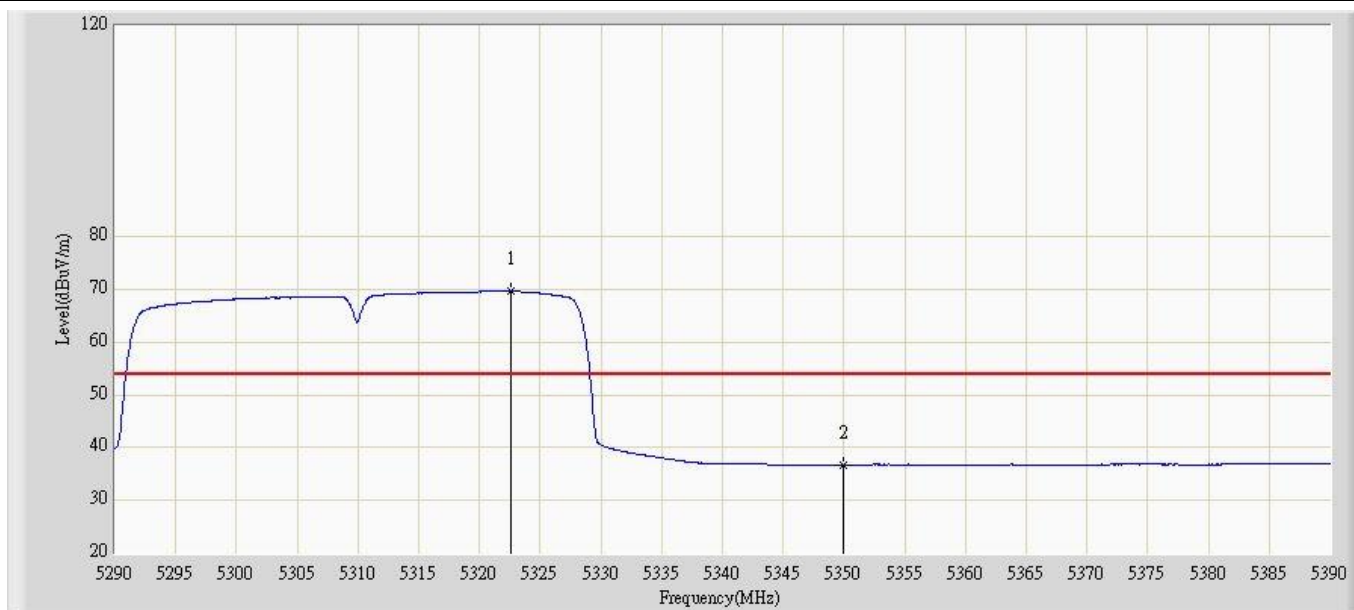


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5322.600	69.660	77.492	N/A	N/A	-7.832	AV
2			5350.000	36.766	44.549	-17.234	54.000	-7.783	AV

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5310 MHz by 802.11n40 Chain 0	

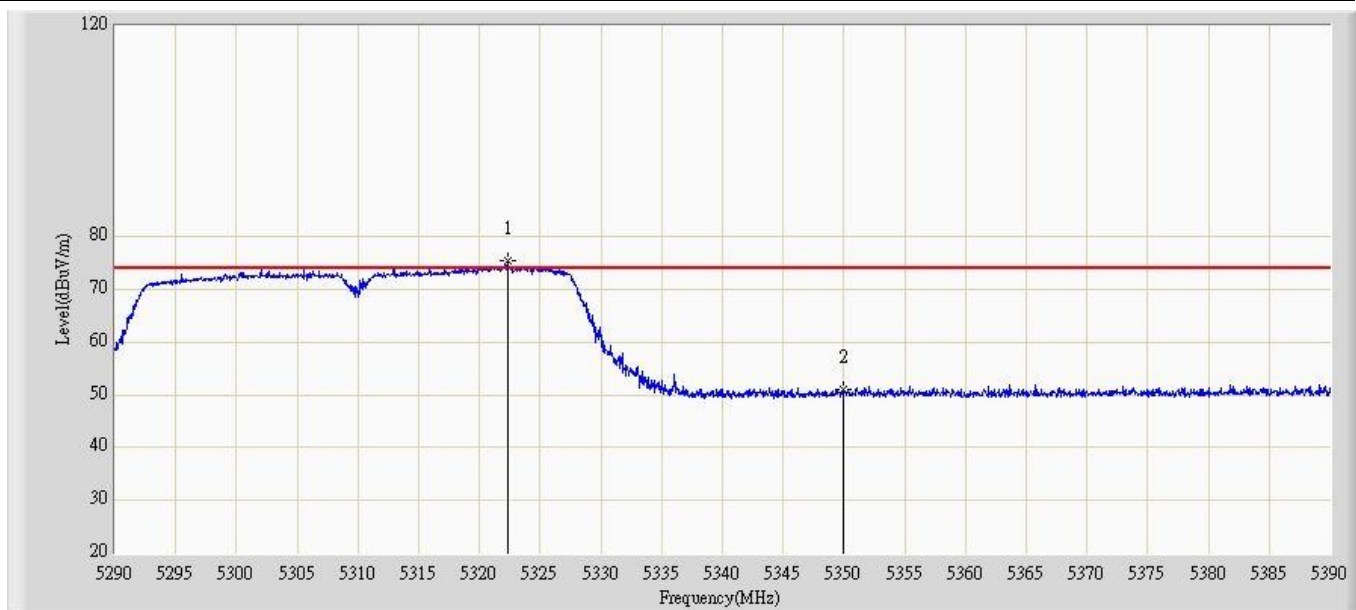

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5322.300	75.548	83.209	N/A	N/A	-7.661	PK
2			5350.000	51.029	58.652	-22.971	74.000	-7.623	PK

Engineer: Brgant	
Site: AC5	Time: 2013/04/15 - 19:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_988(1-18GHz)	Polarity: Horizontal
EUT: WIRELESS-ABGN 3X3 NETWORK MINI PCIE ADAPTER	Power: AC 120V/60Hz
Note: Mode 3: Transmit at channel 5310 MHz by 802.11n40 Chain 0	

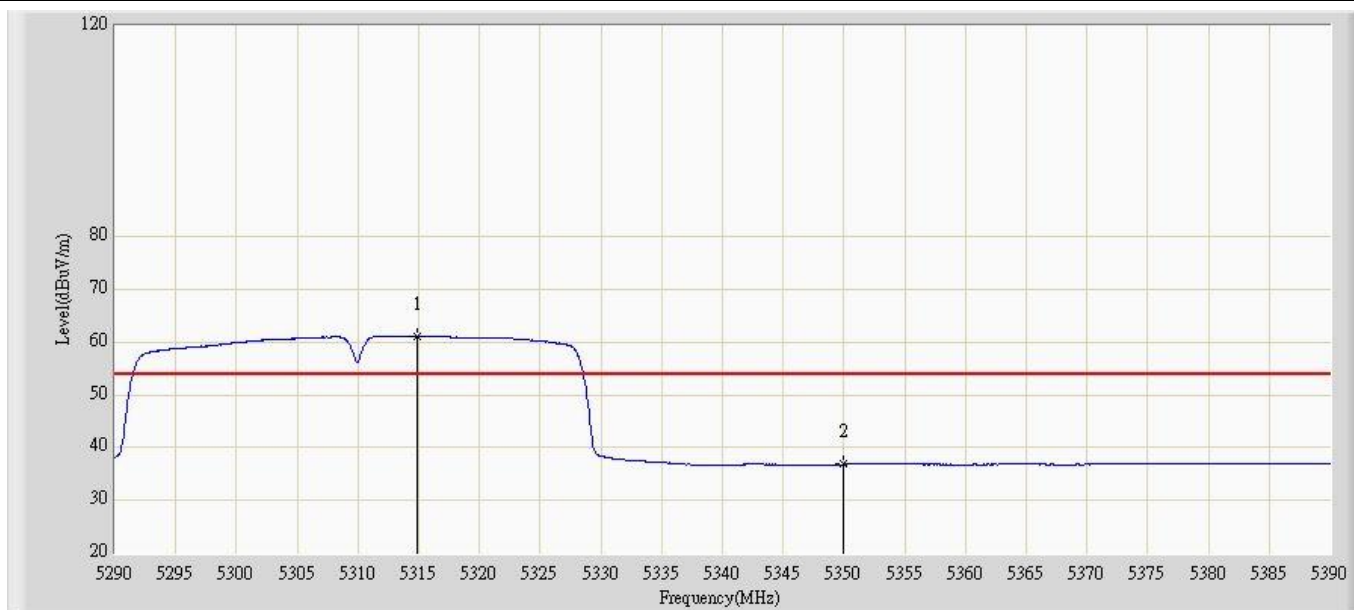

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor	Type
1		*	5314.850	61.188	68.854	N/A	N/A	-7.666	AV
2			5350.000	36.848	44.471	-17.152	54.000	-7.623	AV