



MRT Technology (Suzhou) Co., Ltd
Phone: +86-512-66308358
Web: www.mrt-cert.com

Report No.: 2006RSU029-U1
Report Version: V01
Issue Date: 07-28-2020

MEASUREMENT REPORT

FCC PART 15 Subpart C / WLAN 802.11b/g/n

FCC ID: TKZAWM688

Applicant: AsiaRF Co., Ltd.

Application Type: Certification

Product: WiFi AP Router Module

Model No.: AWM688

FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part15 Subpart C (Section 15.247)

Test Procedure(s): ANSI C63.10-2013

Test Date: June 20 ~ 30, 2020

Reviewed By:

Sunny Sun

(Sunny Sun)

Approved By:

Robin Wu

(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2006RSU029-U1	Rev. 01	Initial Report	07-28-2020	Valid

CONTENTS

Description	Page
General Information	5
1. INTRODUCTION	6
1.1. Scope.....	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Feature of Equipment under Test	7
2.2. Working Frequencies for this report.....	7
2.3. Description of Available Antennas.....	8
2.4. Description of Antenna RF Port.....	8
2.5. Test Mode	9
2.6. Description of Test Software.....	9
2.7. Duty Cycle.....	9
2.8. Labeling Requirements.....	10
2.9. Test Environment Condition	10
3. DESCRIPTION of TEST	11
3.1. Evaluation Procedure	11
3.2. AC Line Conducted Emissions	11
3.3. Radiated Emissions.....	12
4. ANTENNA REQUIREMENTS	13
5. TEST EQUIPMENT CALIBRATION DATE	14
6. MEASUREMENT UNCERTAINTY	16
7. TEST RESULT	17
7.1. Summary.....	17
7.2. 6dB Bandwidth Measurement.....	18
7.2.1. Test Limit	18
7.2.2. Test Procedure Used	18
7.2.3. Test Setting.....	18
7.2.4. Test Setup	18
7.2.5. Test Result.....	19
7.3. Output Power Measurement.....	28
7.3.1. Test Limit	28
7.3.2. Test Procedure Used	28
7.3.3. Test Setting.....	28

7.3.4. Test Setup	29
7.3.5. Test Result.....	30
7.4. Power Spectral Density Measurement.....	32
7.4.1. Test Limit	32
7.4.2. Test Procedure Used.....	32
7.4.3. Test Setting.....	32
7.4.4. Test Setup	32
7.4.5. Test Result.....	33
7.5. Conducted Band Edge and Out-of-Band Emissions	42
7.5.1. Test Limit	42
7.5.2. Test Procedure Used.....	42
7.5.3. Test Setting.....	42
7.5.4. Test Setup	43
7.5.5. Test Result.....	44
7.6. Radiated Spurious Emission Measurement.....	61
7.6.1. Test Limit	61
7.6.2. Test Procedure Used.....	61
7.6.3. Test Setting.....	61
7.6.4. Test Setup	63
7.6.5. Test Result.....	64
7.7. Radiated Restricted Band Edge Measurement.....	92
7.7.1. Test Limit	92
7.7.2. Test Procedure Used.....	93
7.7.3. Test Setting.....	93
7.7.4. Test Setup	94
7.7.5. Test Result.....	95
7.8. AC Conducted Emissions Measurement	159
7.8.1. Test Limit	159
7.8.2. Test Setup	159
7.8.3. Test Result.....	160
8. CONCLUSION	164
Appendix A - Test Setup Photograph	165
Appendix B - EUT Photograph.....	166

General Information

Applicant:	AsiaRF Co., Ltd.
Applicant Address:	3F, 215, Dehe Road, Yonghe Dist. New Taipei City 234, Taiwan
Manufacturer:	AsiaRF Co., Ltd.
Manufacturer Address:	3F, 215, Dehe Road, Yonghe Dist. New Taipei City 234, Taiwan
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Designation No. CN1166) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name:	WiFi AP Router Module
Model No.:	AWM688
Wi-Fi Specification:	802.11b/g/n
Frequency Range:	802.11b/g/n-HT20: 2412 ~ 2462MHz 802.11n-HT40: 2422 ~ 2452MHz
Channel Number:	802.11b/g/n-HT20: 11 802.11n-HT40: 7
Type of Modulation:	802.11b: DSSS 802.11g/n: OFDM
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps

2.2. Working Frequencies for this report

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40


Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

2.3. Description of Available Antennas

Antenna Type	Model No.	Manufacturer	Frequency Band (MHz)	Max Antenna Gain (dBi)
Dipole Antenna (Ant 1)	A-2409	AsiaRF Co., Ltd.	2412 ~ 2462	5.0
Chip Antenna (Ant 2)	ACA-5036-A2-CC-S	INPAQ	2412 ~ 2462	3.0

Note: This device only supports SISO mode, and two antennas of this device cannot transmit simultaneously.

2.4. Description of Antenna RF Port

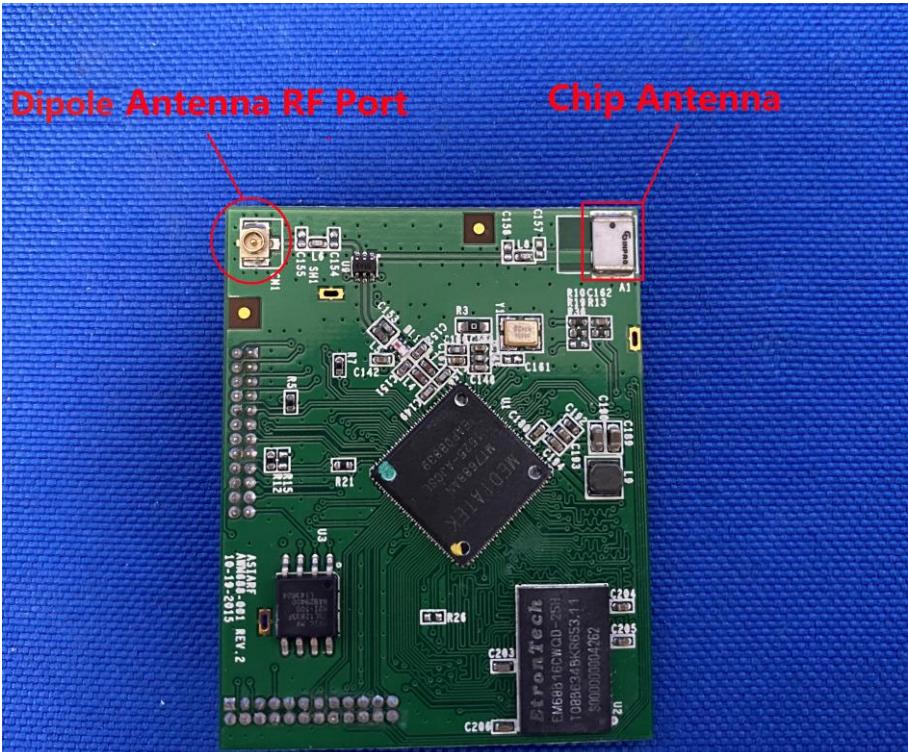Software Control Port	2.4GHz RF Port	
	Dipole Antenna (Ant 1)	Chip Antenna (Ant 2)
		

2.5. Test Mode

Test Mode	Mode 1: Transmit by 802.11b (1Mbps)
	Mode 2: Transmit by 802.11g (6Mbps)
	Mode 3: Transmit by 802.11n-HT20 (MCS0)
	Mode 4: Transmit by 802.11n-HT40 (MCS0)


2.6. Description of Test Software


The test utility software used during testing was “MT7628 QA 0.0.0.96”, and the version was “0.0.0.96”. The power parameter values of this device refer to “Operation Description” file.

2.7. Duty Cycle

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	99.24%
802.11g	96.99%
802.11n-HT20	93.22%
802.11n-HT40	80.36%

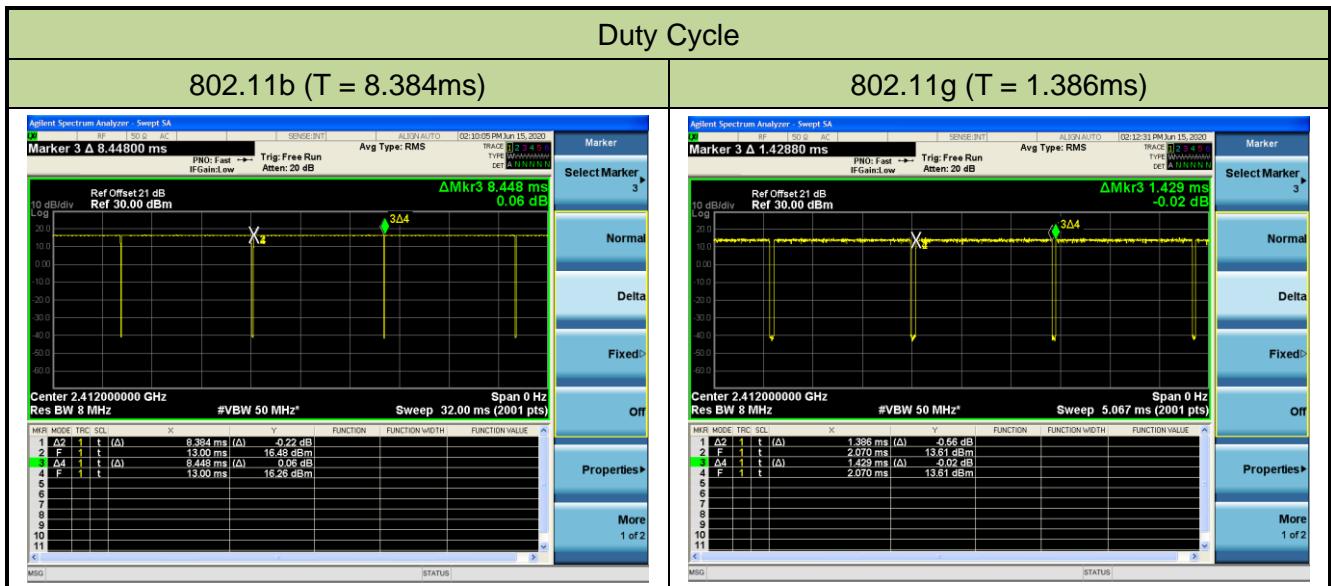

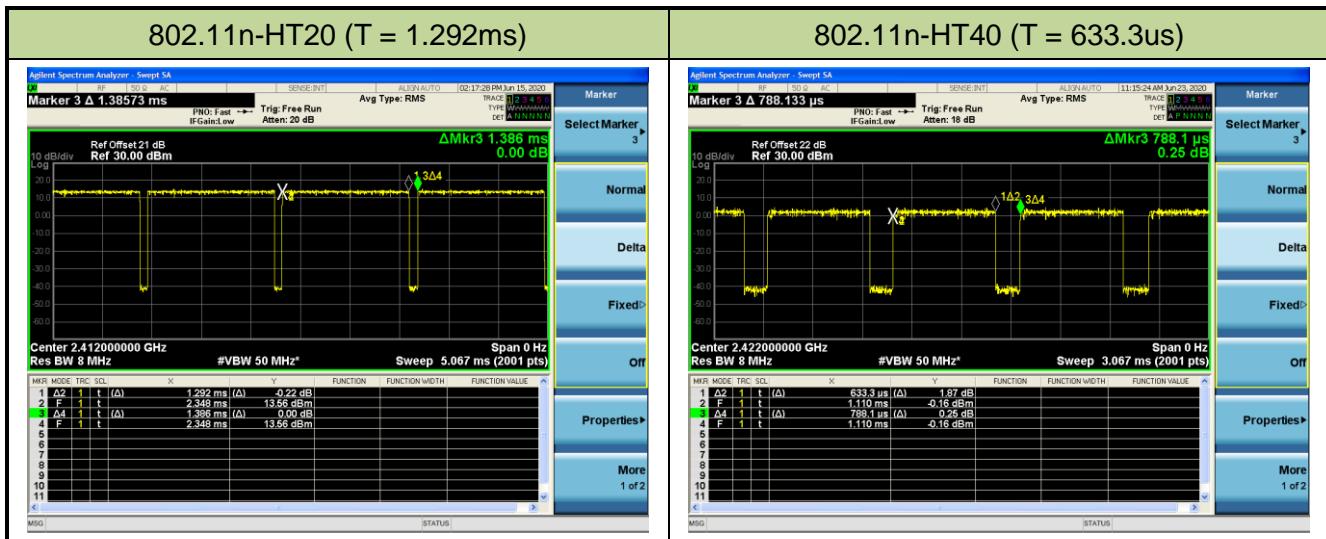

2.8. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

2.9. Test Environment Condition

Ambient Temperature	15°C ~ 35°C
Relative Humidity	20%RH ~ 75%RH

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance was used in the measurement.

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2021/01/18
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2021/06/11
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2021/06/11
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2020/08/08
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2021/01/18
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2020/09/03
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/04/03
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2020/10/13
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2020/12/17
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2020/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2021/04/30

Radiated Emissions - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Keysight	N9038A	MRTSUE06125	1 year	2020/08/01
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2020/10/13
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2020/10/27
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2020/12/17
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2020/12/15
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2021/04/30

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2021/04/14
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2021/01/08
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/14
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2020/11/18
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2021/06/11
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2021/06/11
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2021/06/11
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2021/06/11
Modulation Analyzer	HP	HP8901A	MRTSUE06098	1 year	2020/10/10
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2020/11/07
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2020/11/07
Thermohygrometer	Testo	608-H1	MRTSUE06401	1 year	2020/08/08

Software	Version	Function
EMI Software	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~25GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~25GHz: 6.40dB
Spurious Emissions, Conducted
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 0.78dB
Output Power
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 1.13dB
Power Spectrum Density
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 1.15dB
Occupied Bandwidth
Measurement Uncertainty for a Level of Confidence of 95% ($U=2U_{c(y)}$): 0.28%

7. TEST RESULT

7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	$\leq 30\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\geq 20\text{dBc (Peak)}$		Pass	Section 7.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure Used

ANSI C63.10-2013 Section 11.8

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize


7.2.4. Test Setup

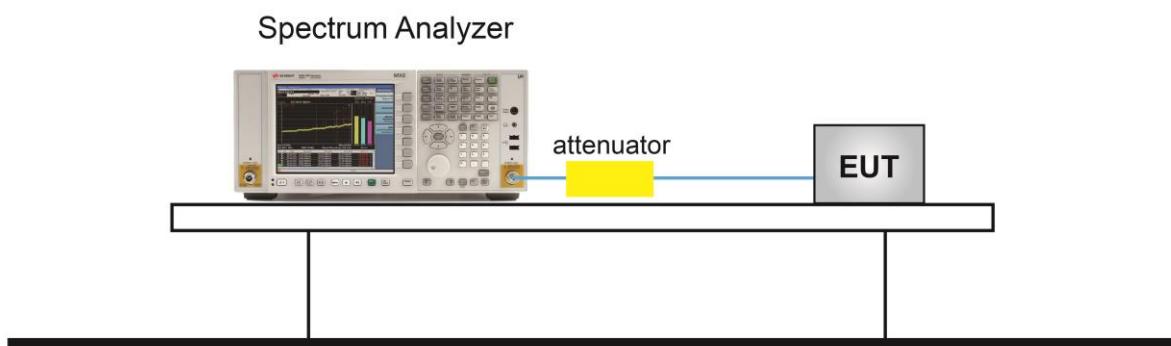



7.2.5. Test Result


Product	WiFi AP Router Module	Test Engineer	Dandy Li
Test Site	TR3	Test Date	2020/06/23 ~ 2020/06/30


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 1						
802.11b	1Mbps	01	2412	9.09	≥ 0.5	Pass
802.11b	1Mbps	06	2437	9.62	≥ 0.5	Pass
802.11b	1Mbps	11	2462	10.03	≥ 0.5	Pass
802.11g	6Mbps	01	2412	15.15	≥ 0.5	Pass
802.11g	6Mbps	06	2437	15.14	≥ 0.5	Pass
802.11g	6Mbps	11	2462	15.15	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	15.15	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	15.15	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	15.14	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	35.14	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	35.12	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	35.12	≥ 0.5	Pass
Ant 2						
802.11b	1Mbps	01	2412	10.10	≥ 0.5	Pass
802.11b	1Mbps	06	2437	10.10	≥ 0.5	Pass
802.11b	1Mbps	11	2462	10.10	≥ 0.5	Pass
802.11g	6Mbps	01	2412	15.16	≥ 0.5	Pass
802.11g	6Mbps	06	2437	15.15	≥ 0.5	Pass
802.11g	6Mbps	11	2462	15.15	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	15.15	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	15.14	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	15.14	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	33.88	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	33.87	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	35.10	≥ 0.5	Pass

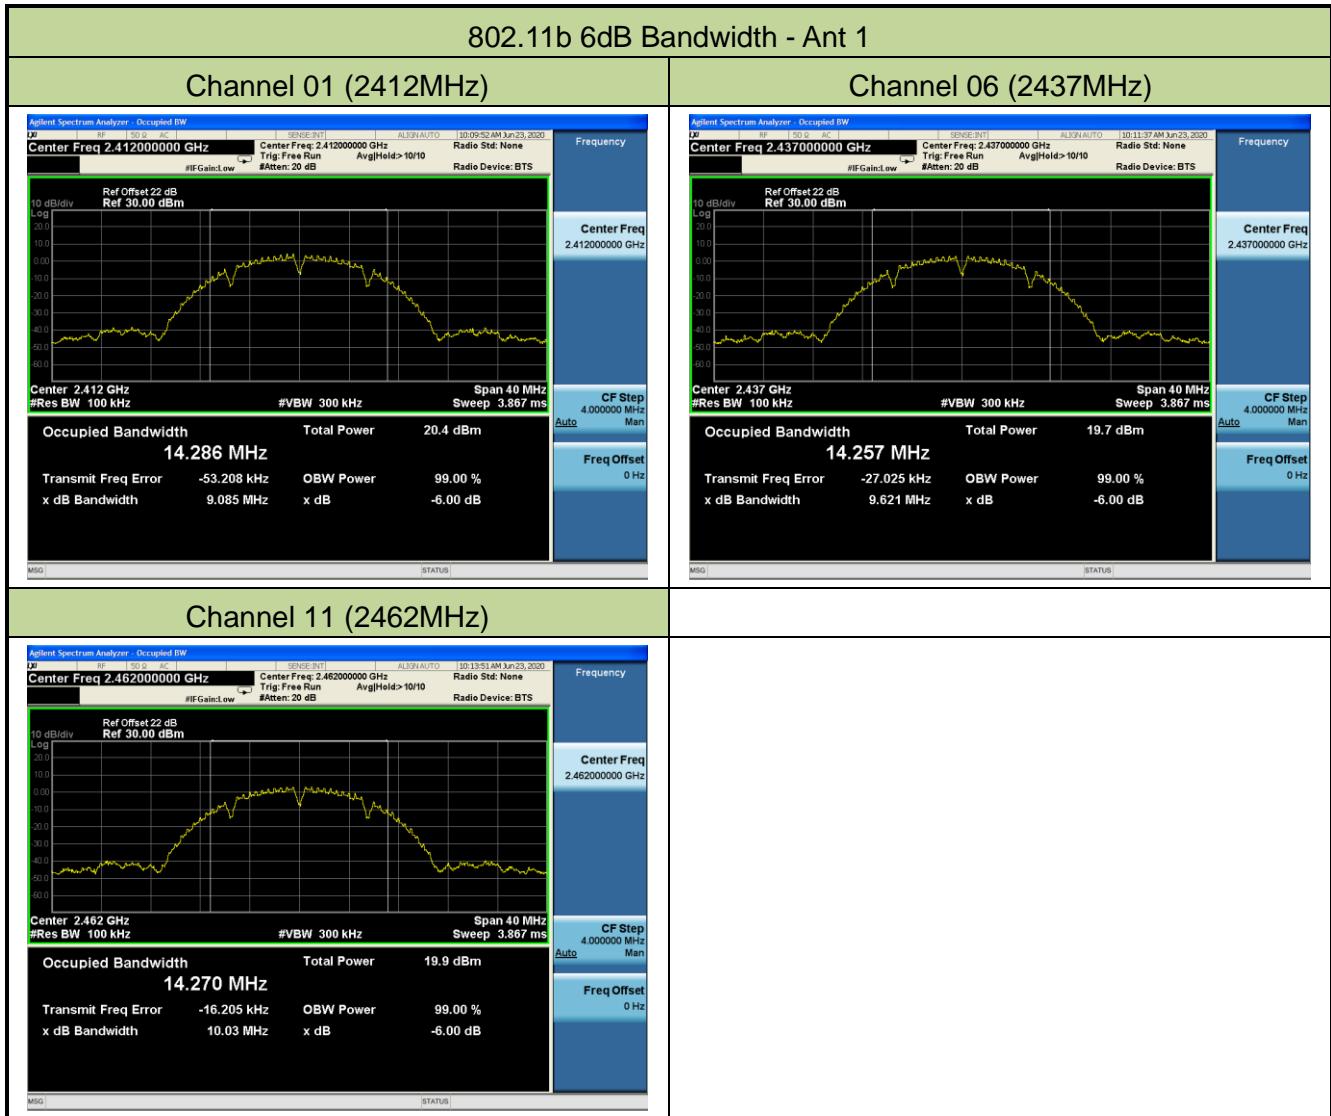


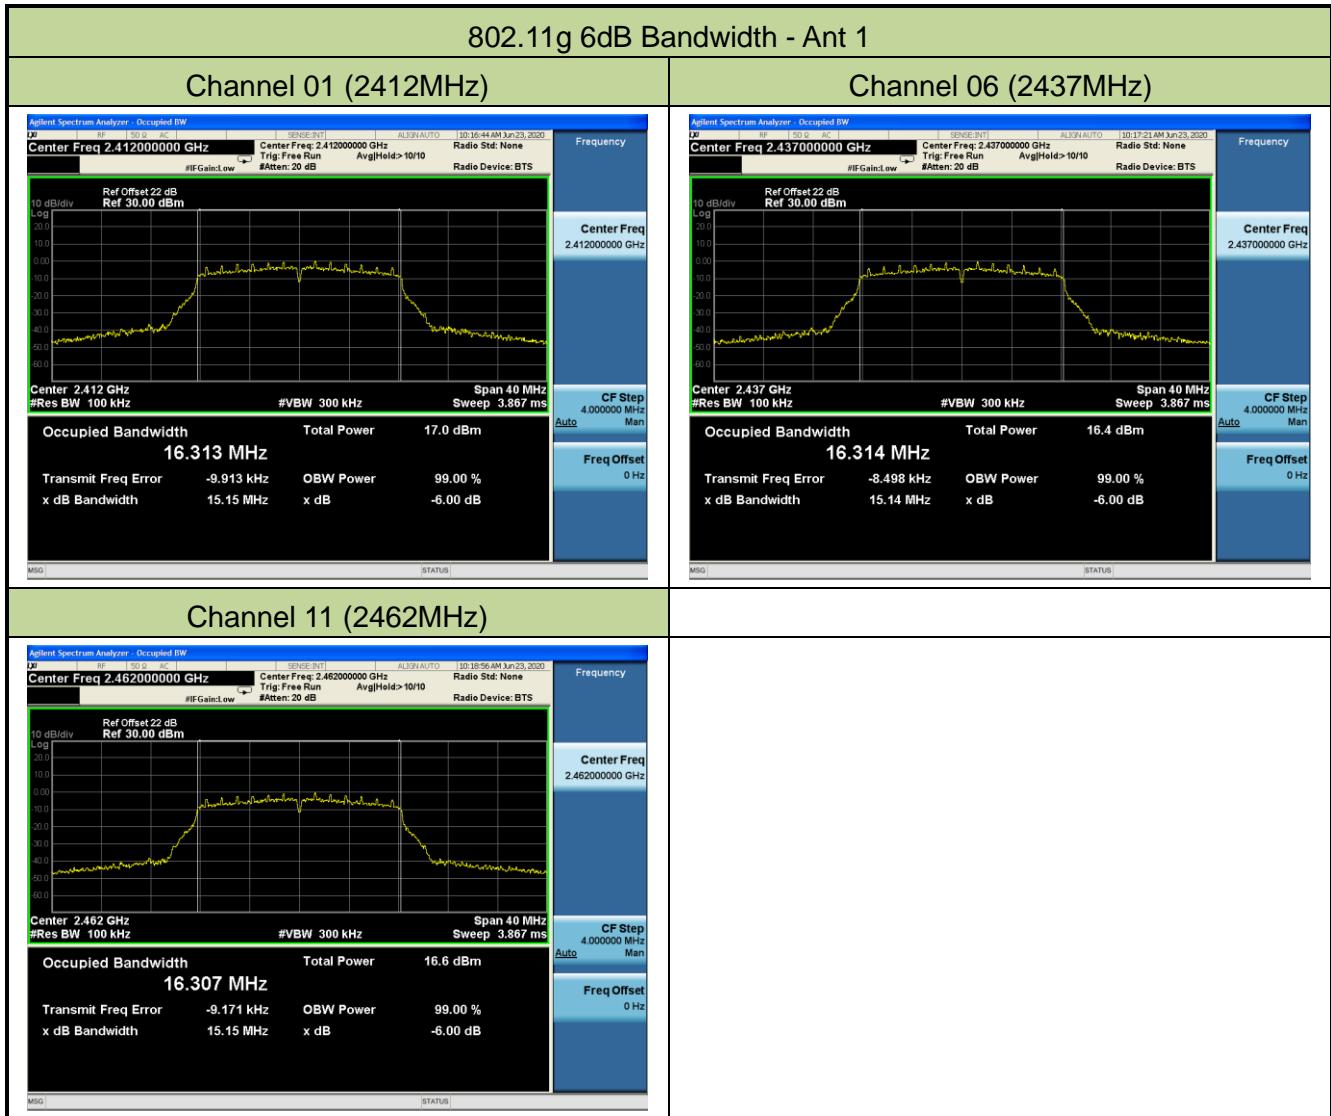


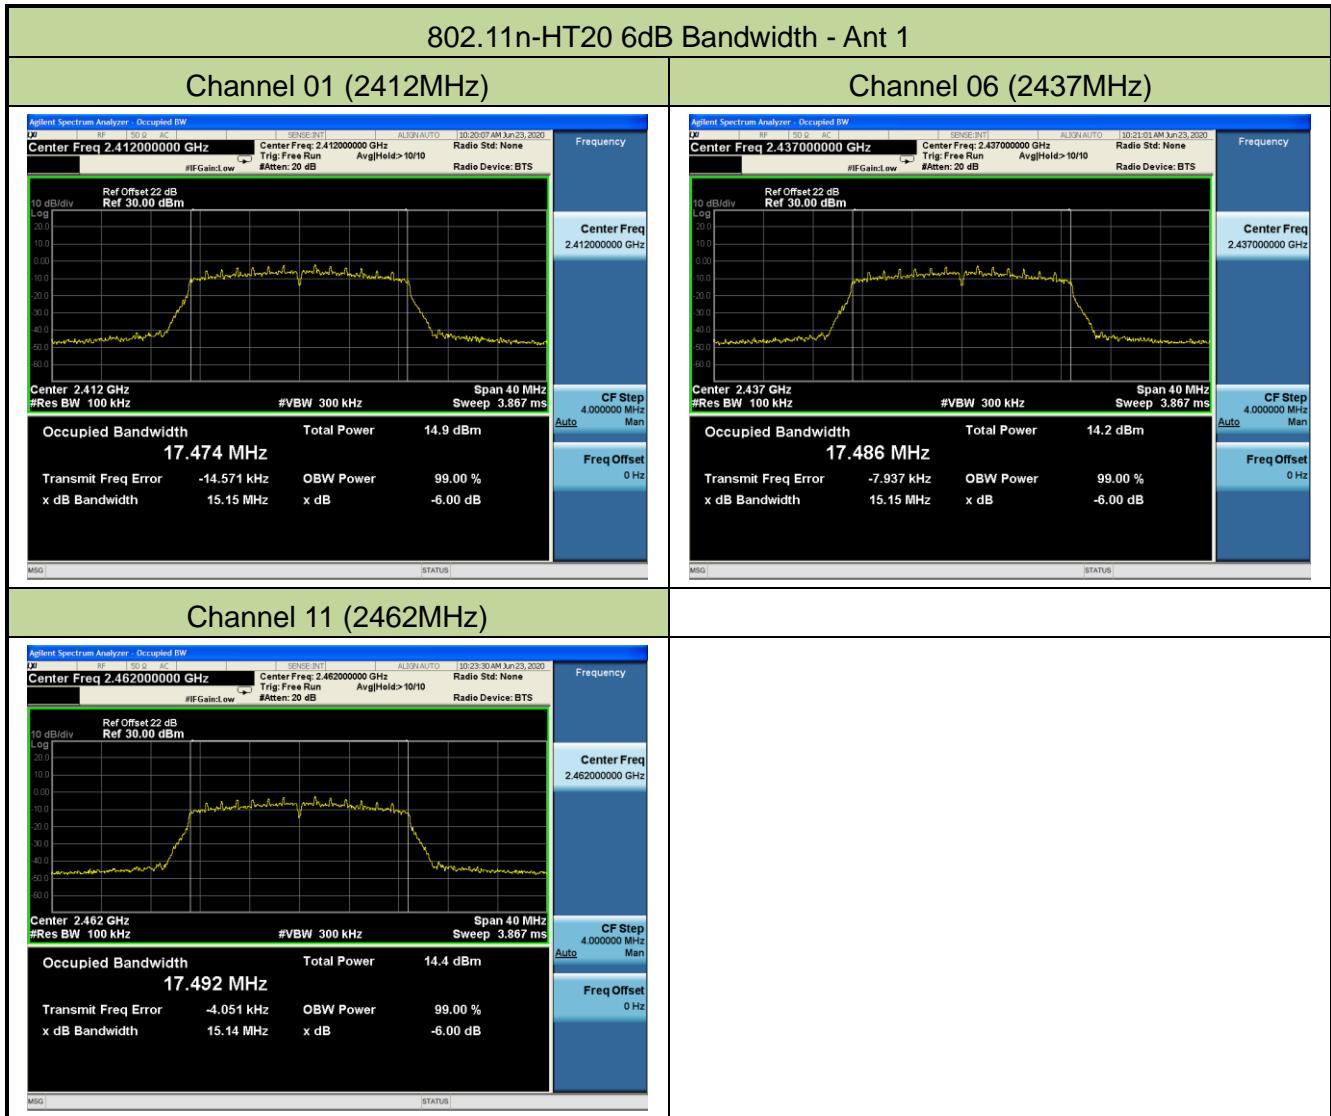


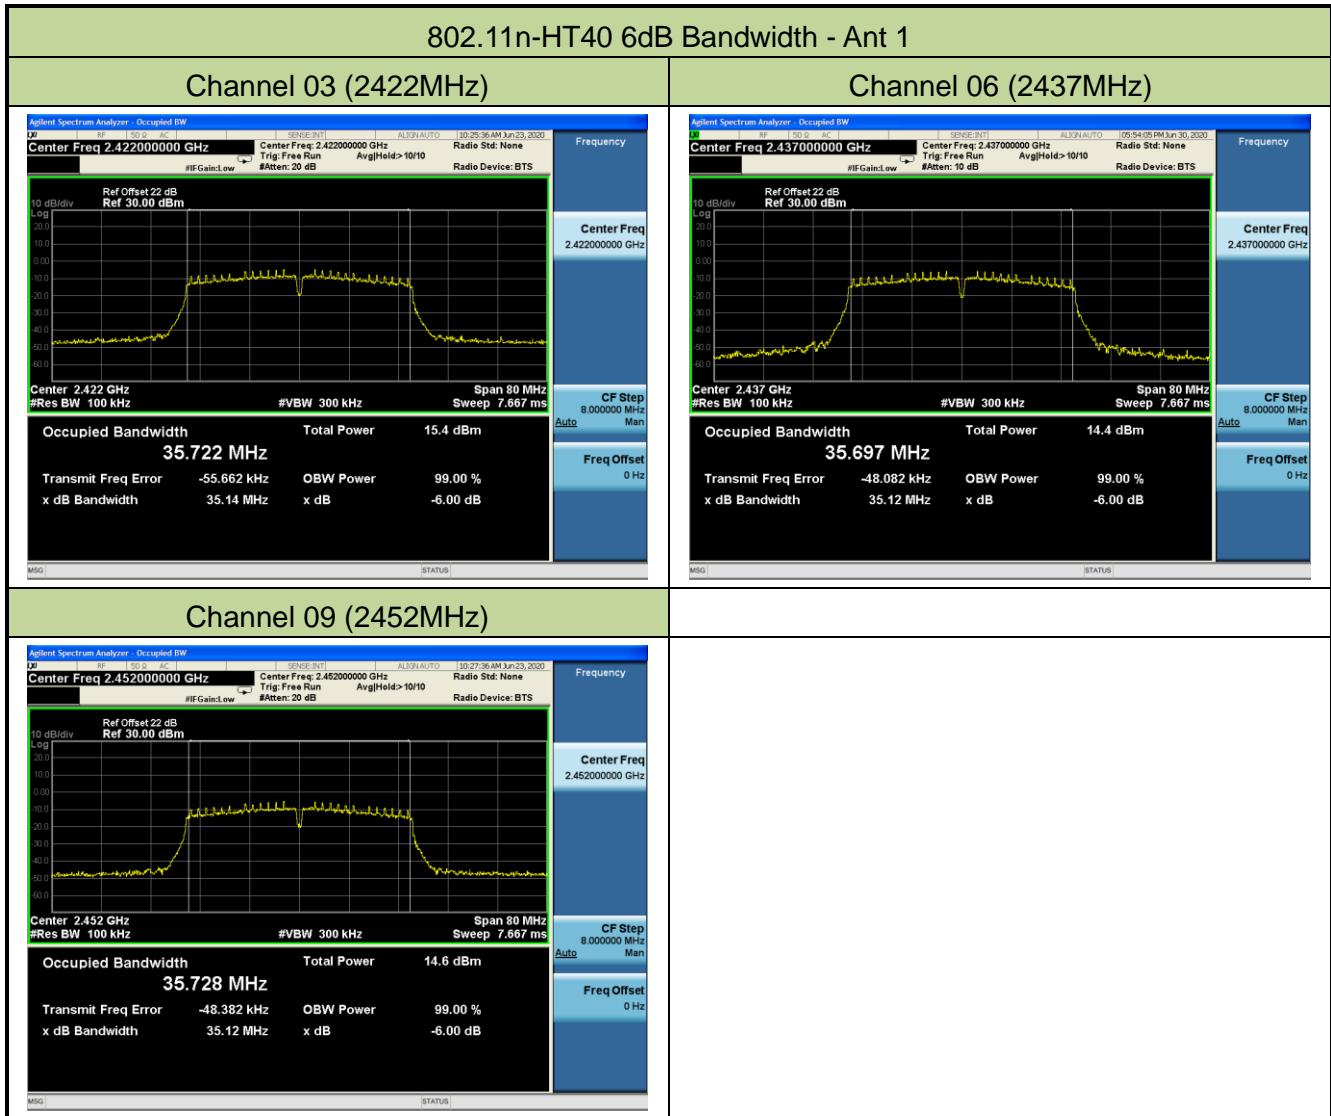

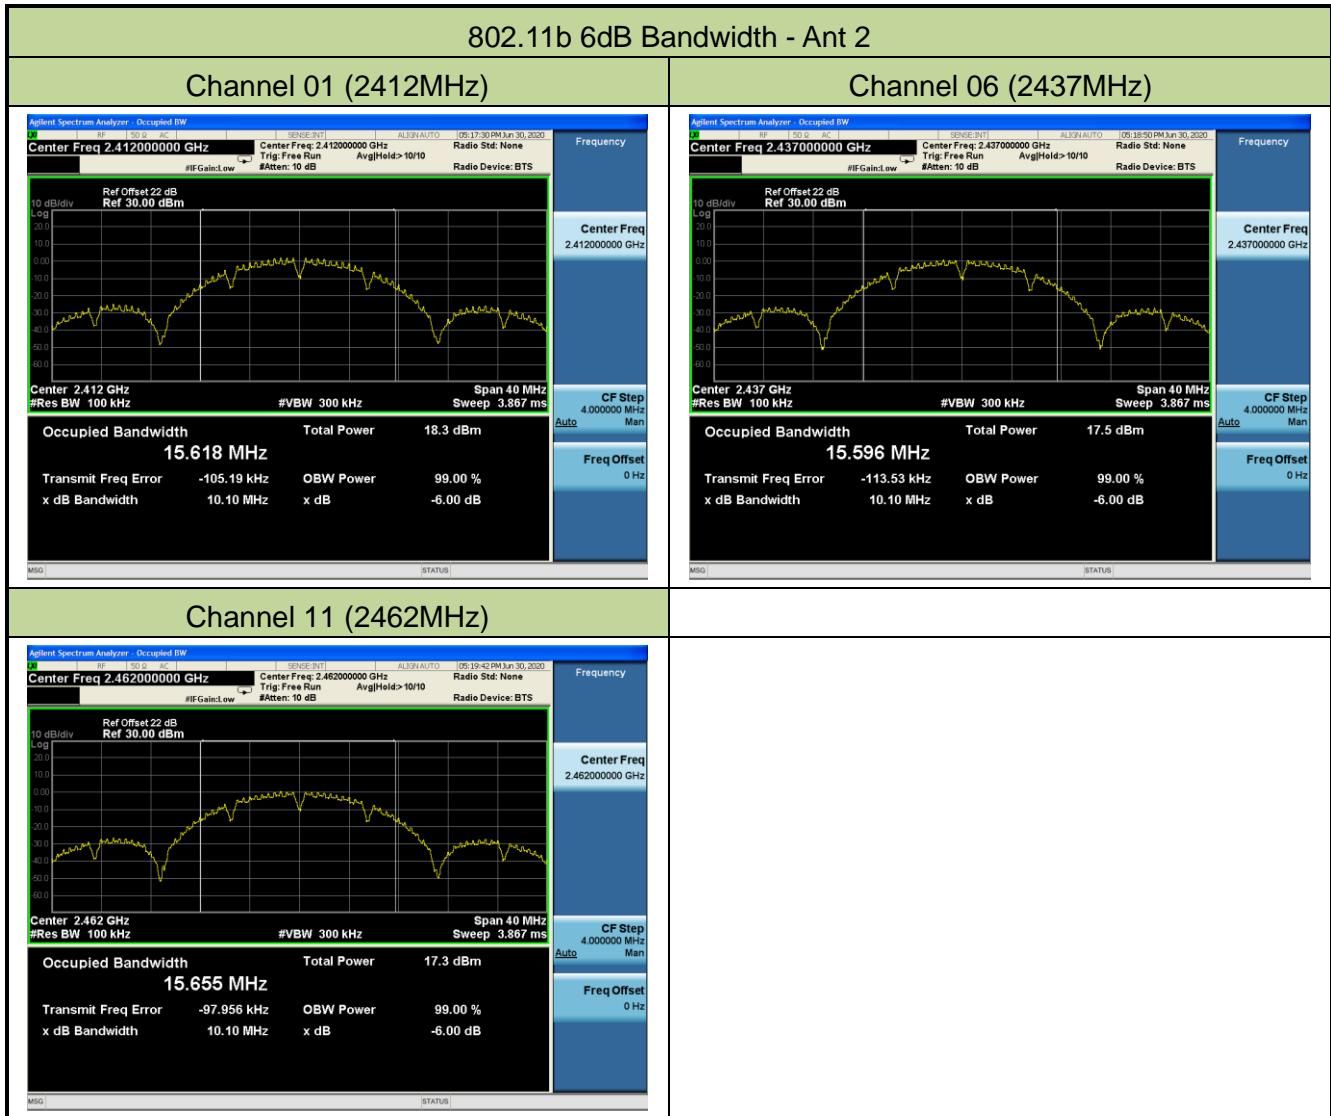

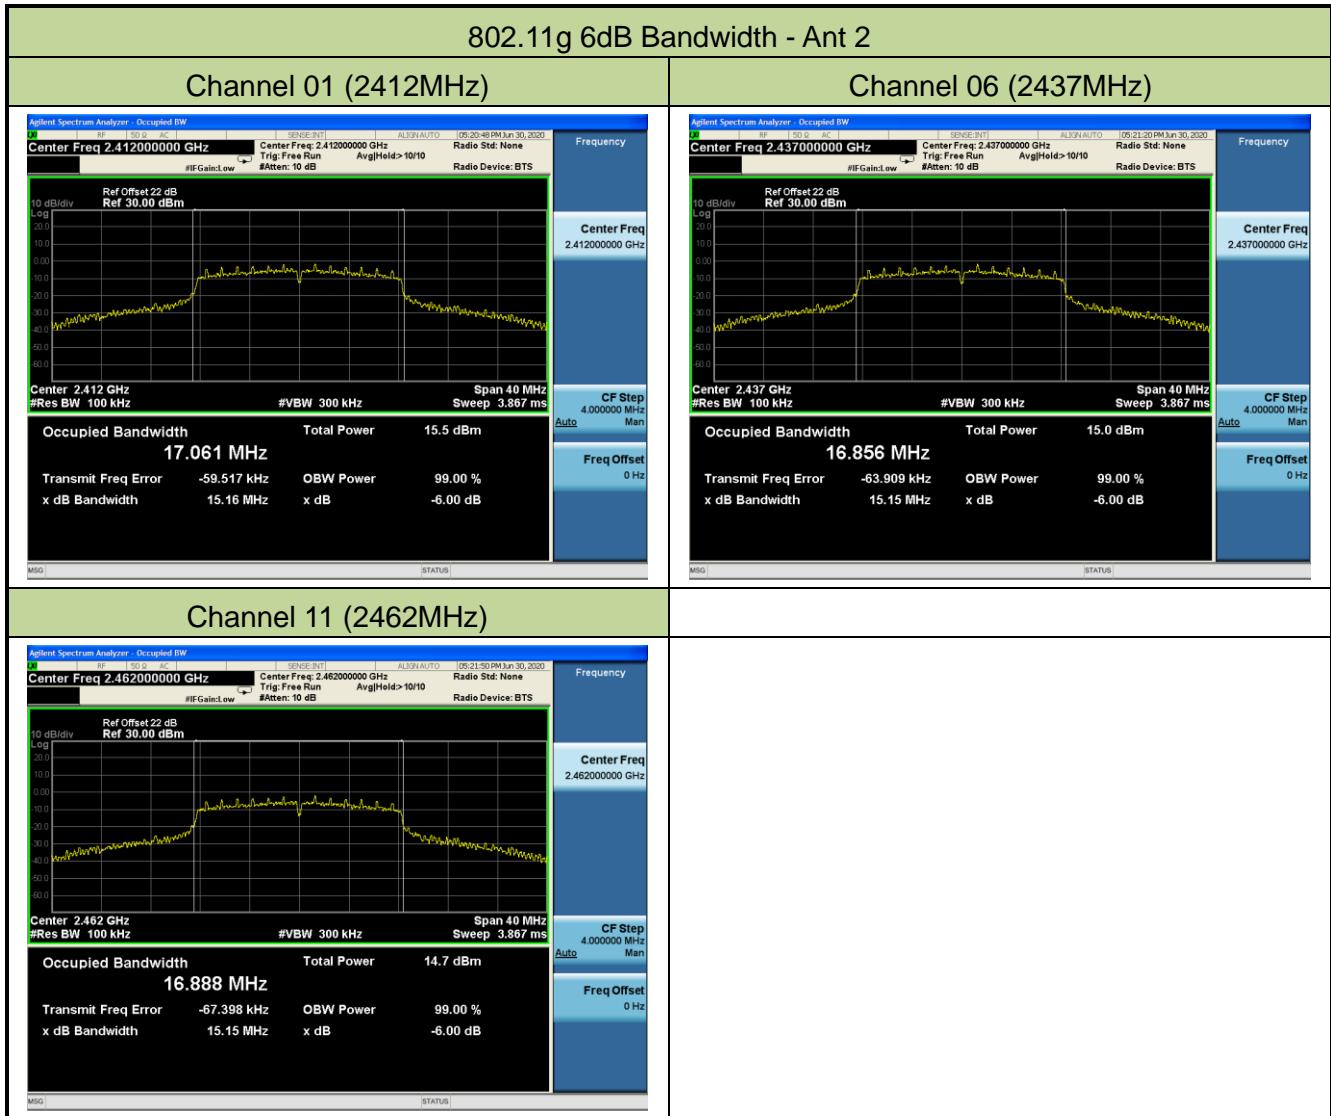

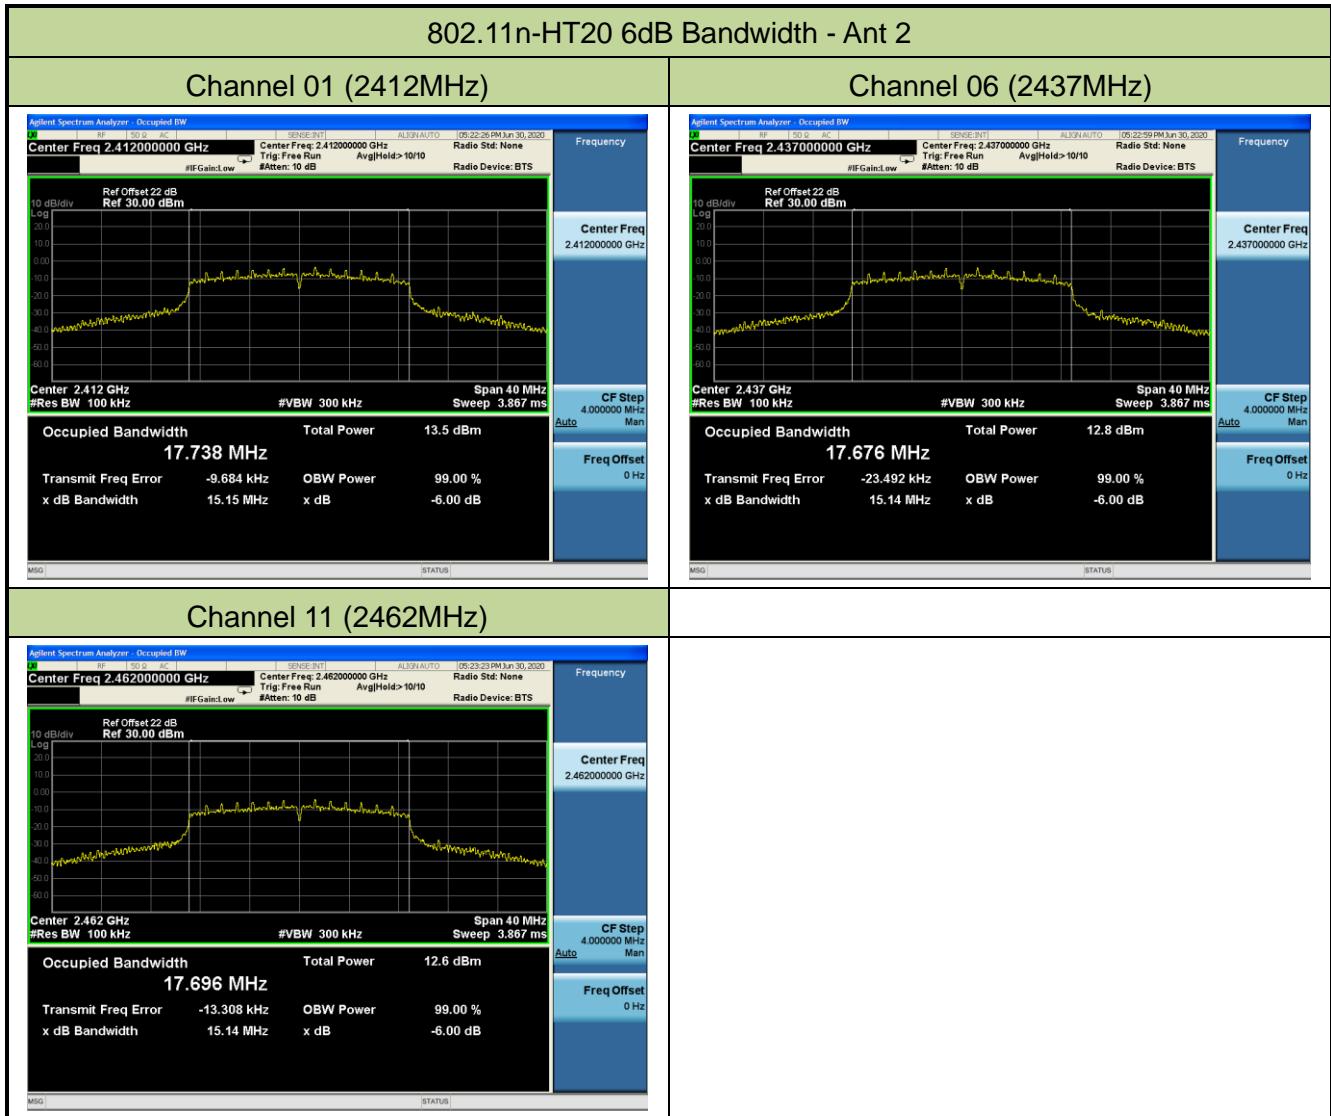

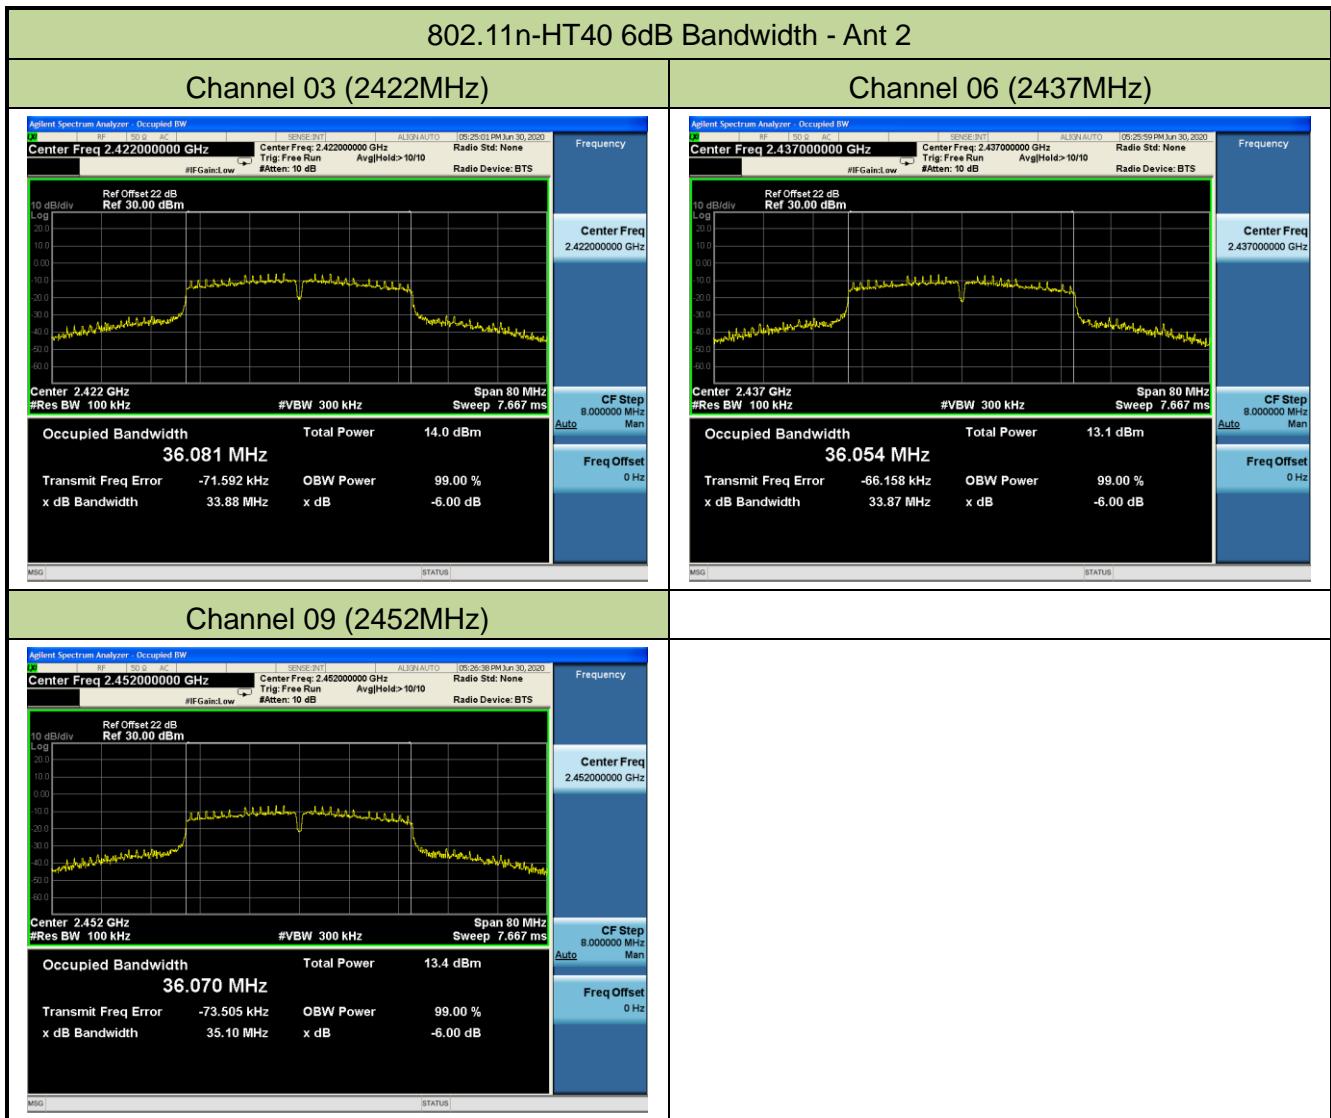

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.3.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.9.1.3

ANSI C63.10-2013 - Section 11.9.2.3.2

7.3.3. Test Setting


PKPM1 Peak Power Meter Method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

7.3.4. Test Setup

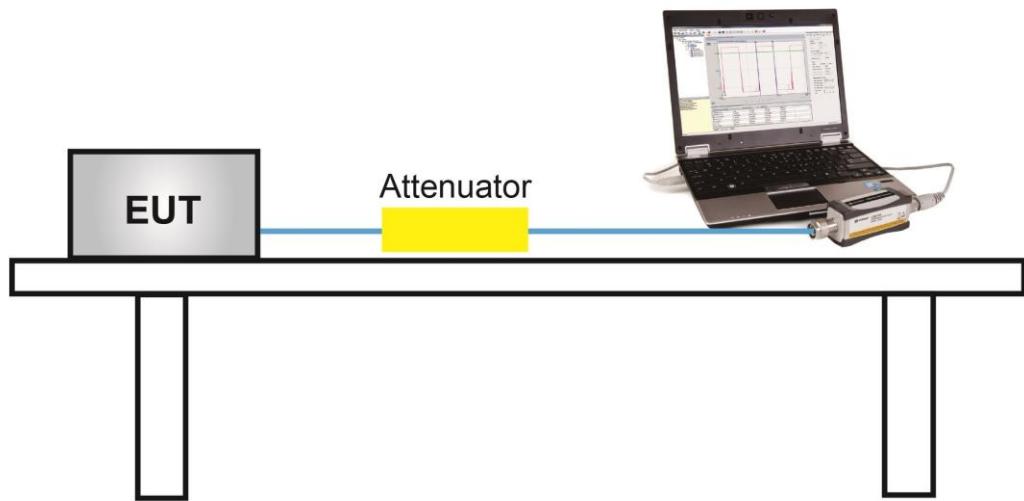

7.3.5. Test Result

Power output test was verified over all data rates of each mode shown as below table, and then chose the maximum power output (gray marker) for final test of each channel.

Pre-Test RF Output Power at various data rates for Ant 1 RF port.

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate/ MCS	RF Output Power (dBm)
11b	20	6	2437	1Mbps	12.82
				5.5Mbps	12.74
				11Mbps	12.70
11g	20	6	2437	6Mbps	9.83
				24Mbps	9.79
				54Mbps	7.72
11n	20	6	2437	MCS0	7.64
				MCS3	7.21
				MCS7	4.97
11n	40	6	2437	MCS0	7.97
				MCS3	7.06
				MCS7	4.73

Note: All modes of operation and data rates were investigated, so all RF test requirements shall be executed at low data rates.

Product	WiFi AP Router Module			Test Engineer	Dandy Li		
Test Site	TR3			Test Date	2020/06/20		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	RF Output Power (dBm)		Limit (dBm)	Result
				Ant 1	Ant 2		
Peak Output Power							
802.11b	1Mbps	01	2412	14.84	13.49	≤ 30.00	Pass
802.11b	1Mbps	06	2437	14.73	13.03	≤ 30.00	Pass
802.11b	1Mbps	11	2462	14.63	12.84	≤ 30.00	Pass
802.11g	6Mbps	01	2412	18.05	15.89	≤ 30.00	Pass
802.11g	6Mbps	06	2437	18.68	15.55	≤ 30.00	Pass
802.11g	6Mbps	11	2462	19.34	15.43	≤ 30.00	Pass
802.11n-HT20	MCS0	01	2412	16.55	14.08	≤ 30.00	Pass
802.11n-HT20	MCS0	06	2437	16.72	13.89	≤ 30.00	Pass
802.11n-HT20	MCS0	11	2462	17.03	13.97	≤ 30.00	Pass
802.11n-HT40	MCS0	03	2422	16.92	14.03	≤ 30.00	Pass
802.11n-HT40	MCS0	06	2437	17.32	13.87	≤ 30.00	Pass
802.11n-HT40	MCS0	09	2452	17.70	13.90	≤ 30.00	Pass
Average Output Power (Reporting Only)							
802.11b	1Mbps	01	2412	12.91	11.66	≤ 30.00	Pass
802.11b	1Mbps	06	2437	12.82	11.21	≤ 30.00	Pass
802.11b	1Mbps	11	2462	12.72	11.02	≤ 30.00	Pass
802.11g	6Mbps	01	2412	9.80	9.01	≤ 30.00	Pass
802.11g	6Mbps	06	2437	9.83	8.56	≤ 30.00	Pass
802.11g	6Mbps	11	2462	9.71	8.46	≤ 30.00	Pass
802.11n-HT20	MCS0	01	2412	7.71	7.00	≤ 30.00	Pass
802.11n-HT20	MCS0	06	2437	7.64	6.78	≤ 30.00	Pass
802.11n-HT20	MCS0	11	2462	7.69	6.69	≤ 30.00	Pass
802.11n-HT40	MCS0	03	2422	7.95	7.14	≤ 30.00	Pass
802.11n-HT40	MCS0	06	2437	7.97	6.64	≤ 30.00	Pass
802.11n-HT40	MCS0	09	2452	7.99	6.49	≤ 30.00	Pass

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


7.4.2. Test Procedure Used

ANSI C63.10-2013 Section 11.10.2

7.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize


7.4.4. Test Setup

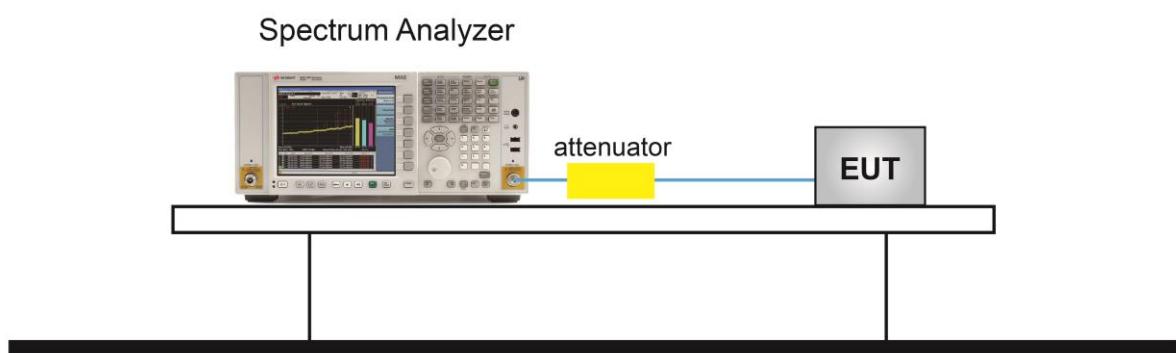



7.4.5. Test Result


Product	WiFi AP Router Module			Test Engineer	Dandy Li	
Test Site	TR3			Test Date	2020/06/23 ~ 2020/06/29	


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	Peak PSD (dBm/3kHz)		Limit (dBm/3kHz)	Result
				Ant 1	Ant 2		
802.11b	1Mbps	01	2412	-1.07	-0.53	≤ 8.00	Pass
802.11b	1Mbps	06	2437	-0.02	-3.63	≤ 8.00	Pass
802.11b	1Mbps	11	2462	-0.28	-3.89	≤ 8.00	Pass
802.11g	6Mbps	01	2412	-15.46	-18.15	≤ 8.00	Pass
802.11g	6Mbps	06	2437	-16.11	-18.02	≤ 8.00	Pass
802.11g	6Mbps	11	2462	-15.69	-20.68	≤ 8.00	Pass
802.11n-HT20	MCS0	01	2412	-17.96	-18.10	≤ 8.00	Pass
802.11n-HT20	MCS0	06	2437	-19.67	-18.82	≤ 8.00	Pass
802.11n-HT20	MCS0	11	2462	-18.22	-20.27	≤ 8.00	Pass
802.11n-HT40	MCS0	03	2422	-20.49	-21.36	≤ 8.00	Pass
802.11n-HT40	MCS0	06	2437	-20.42	-21.96	≤ 8.00	Pass
802.11n-HT40	MCS0	09	2452	-20.78	-21.77	≤ 8.00	Pass

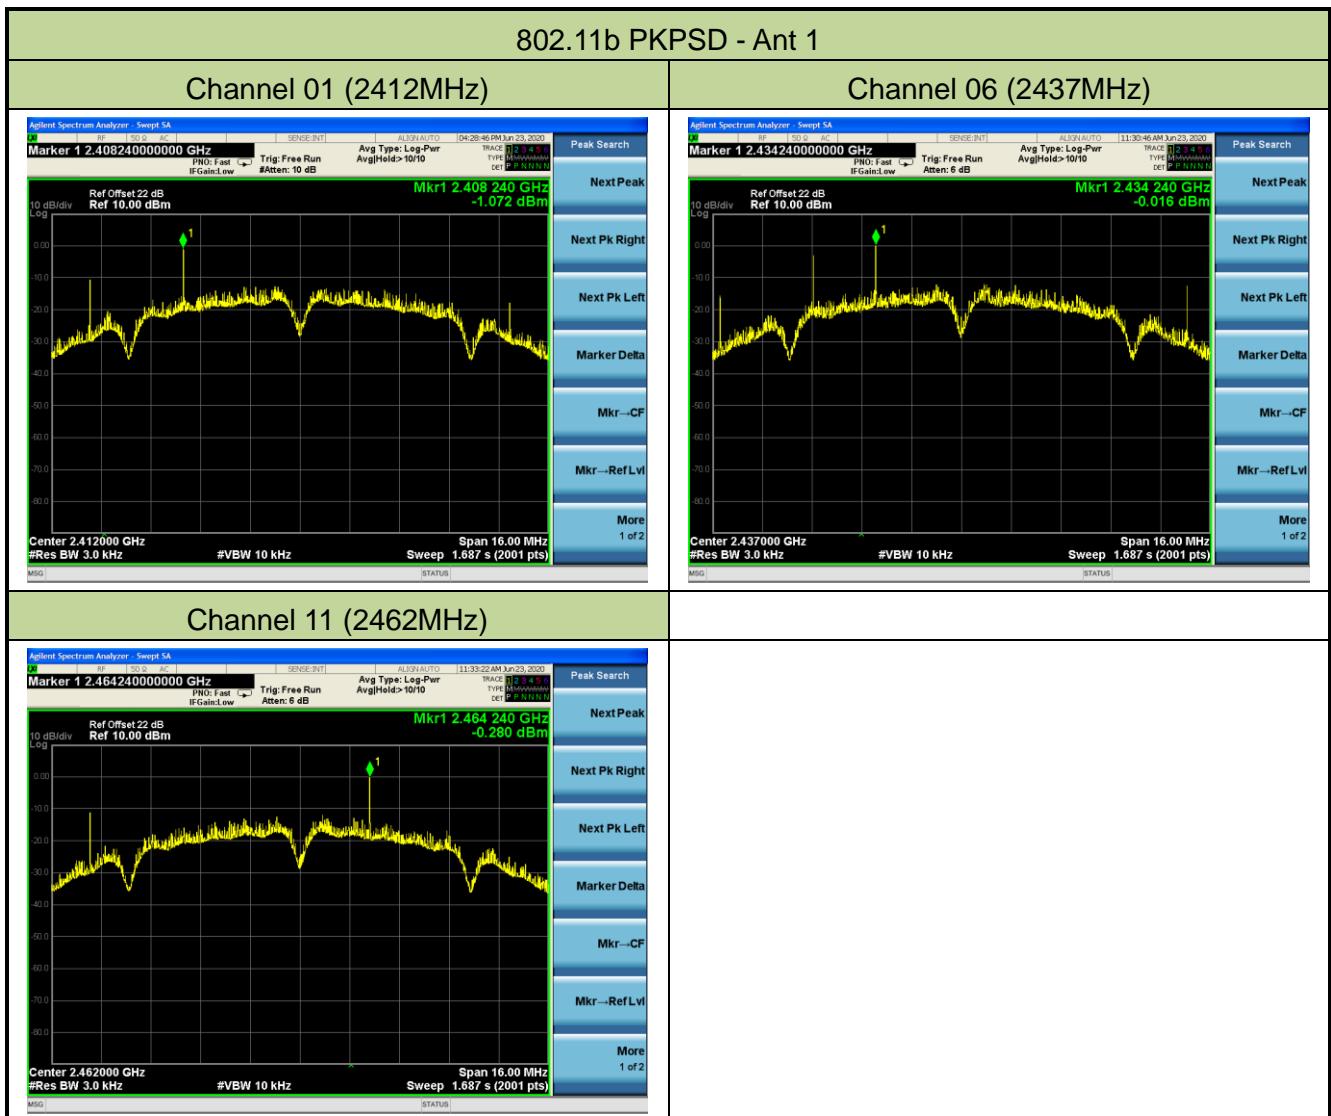


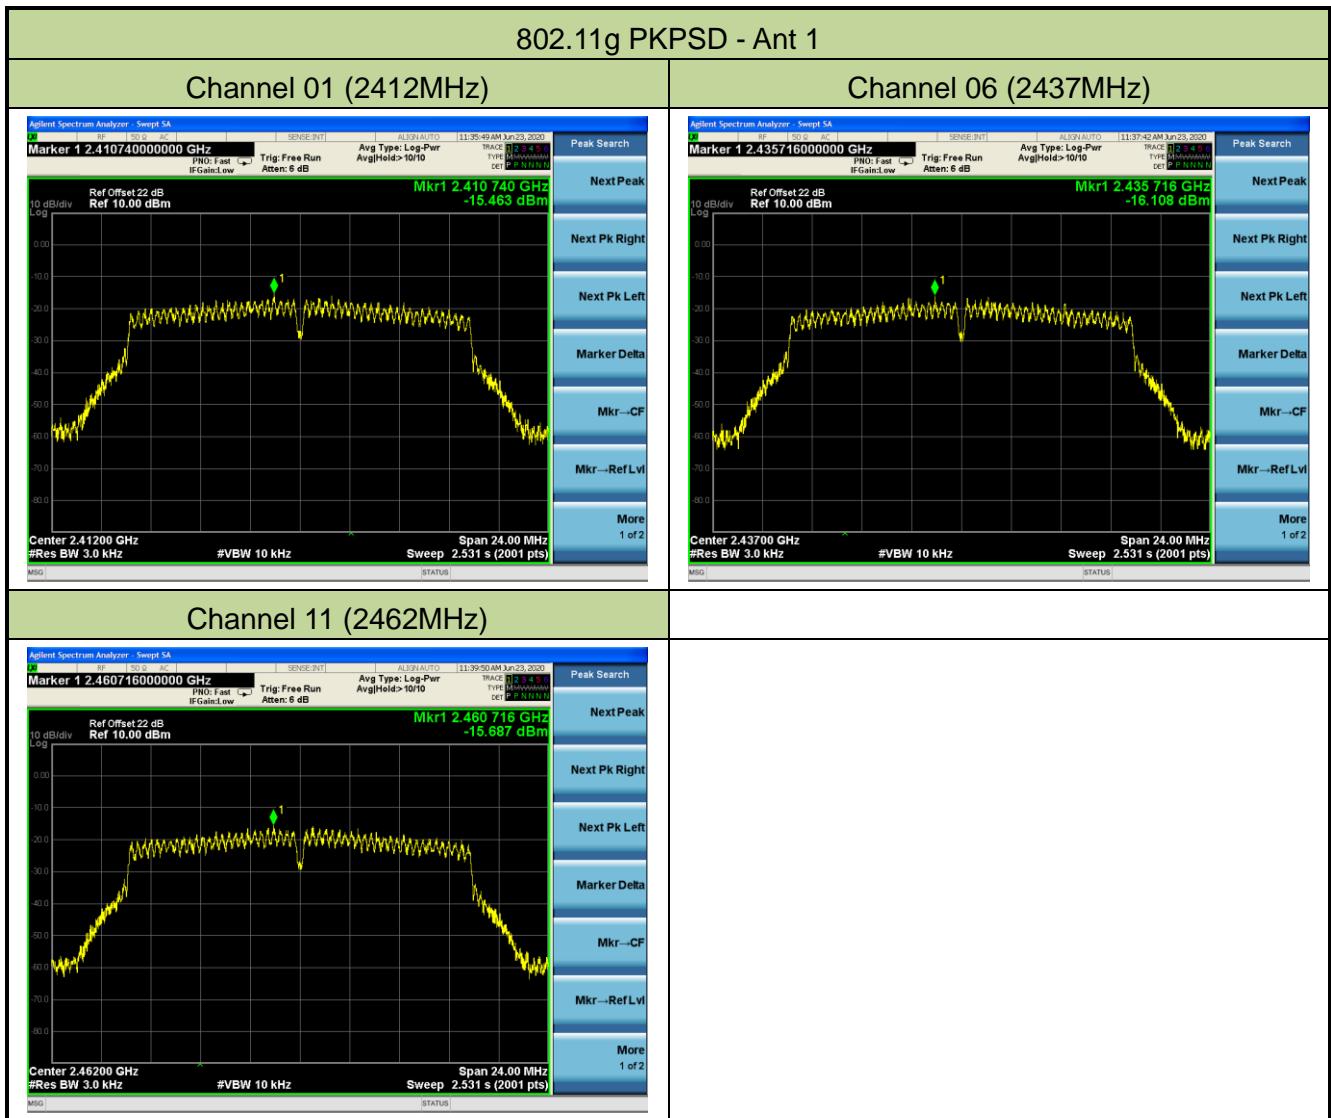


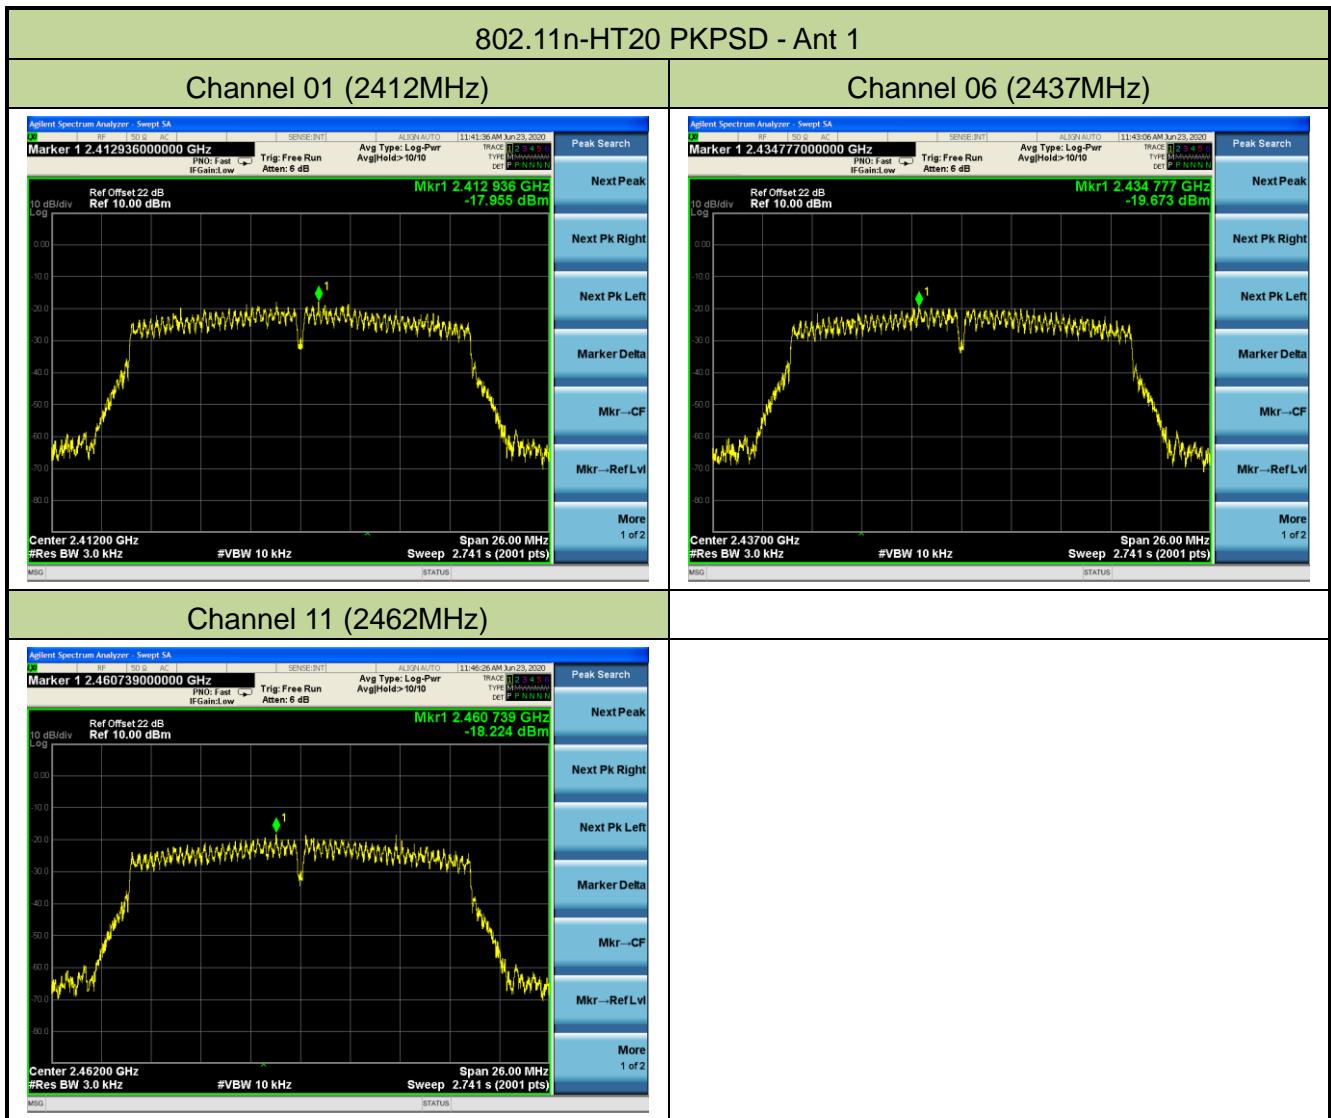


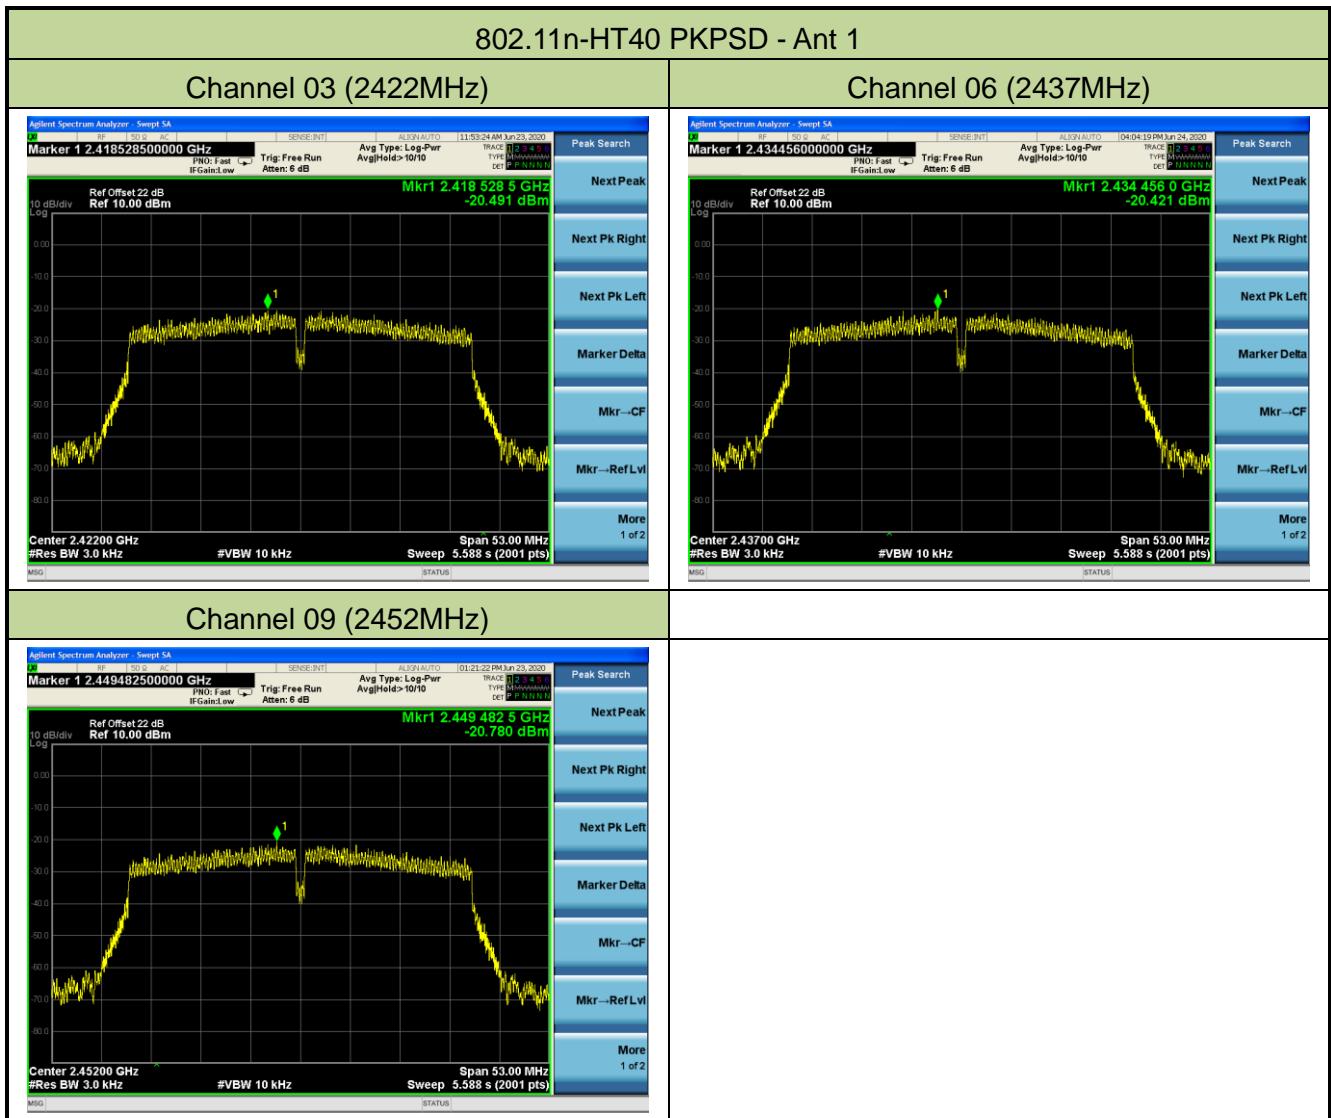

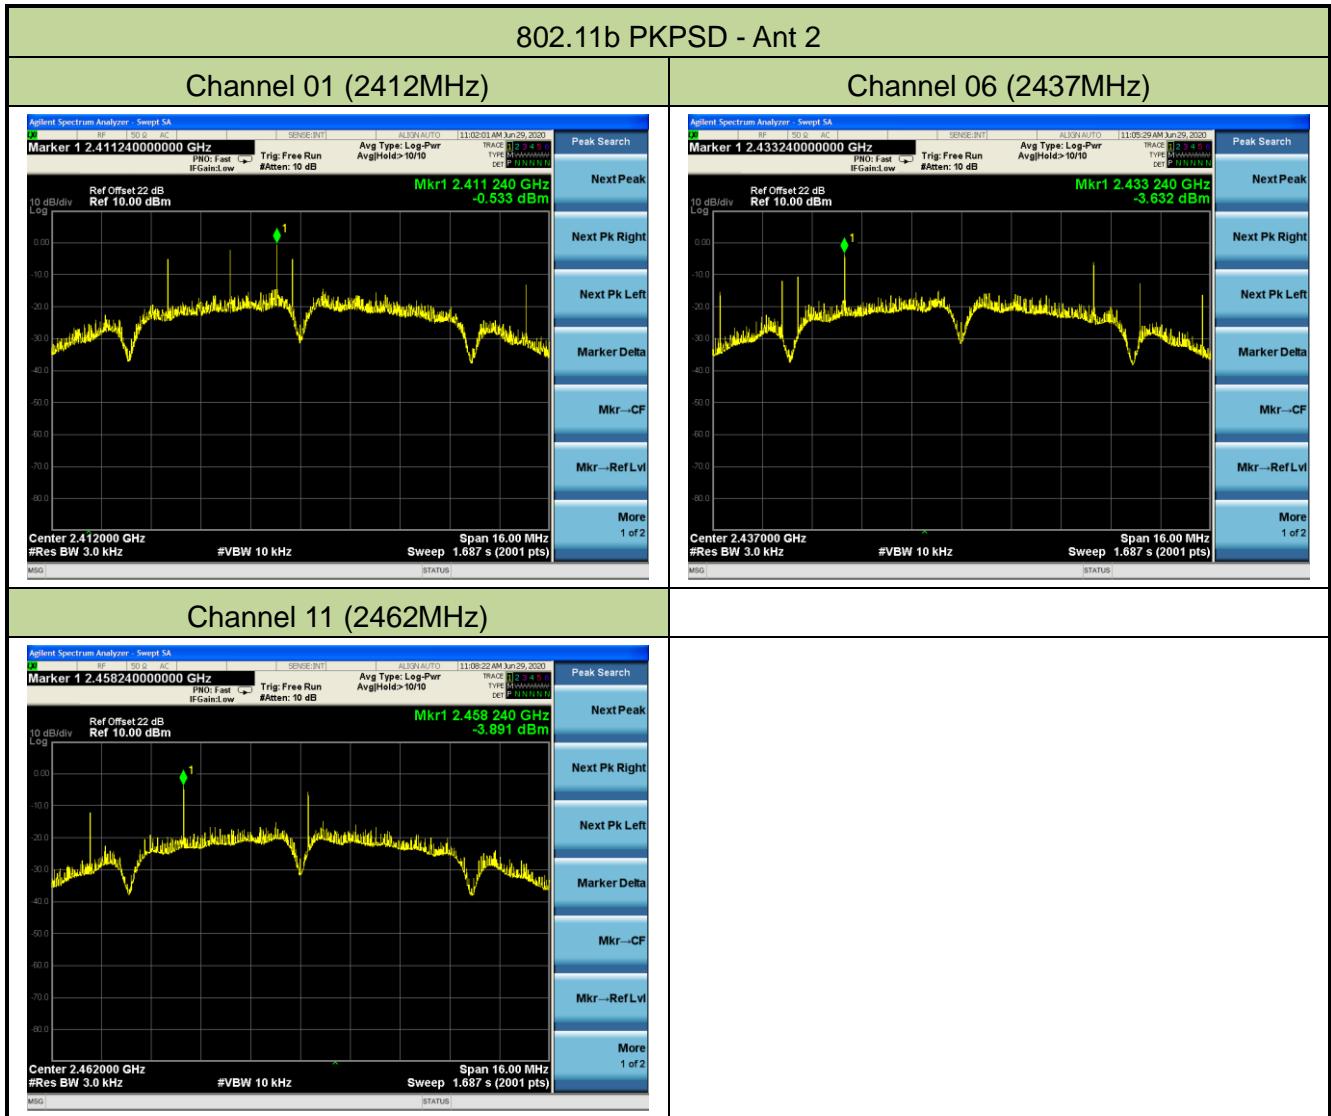

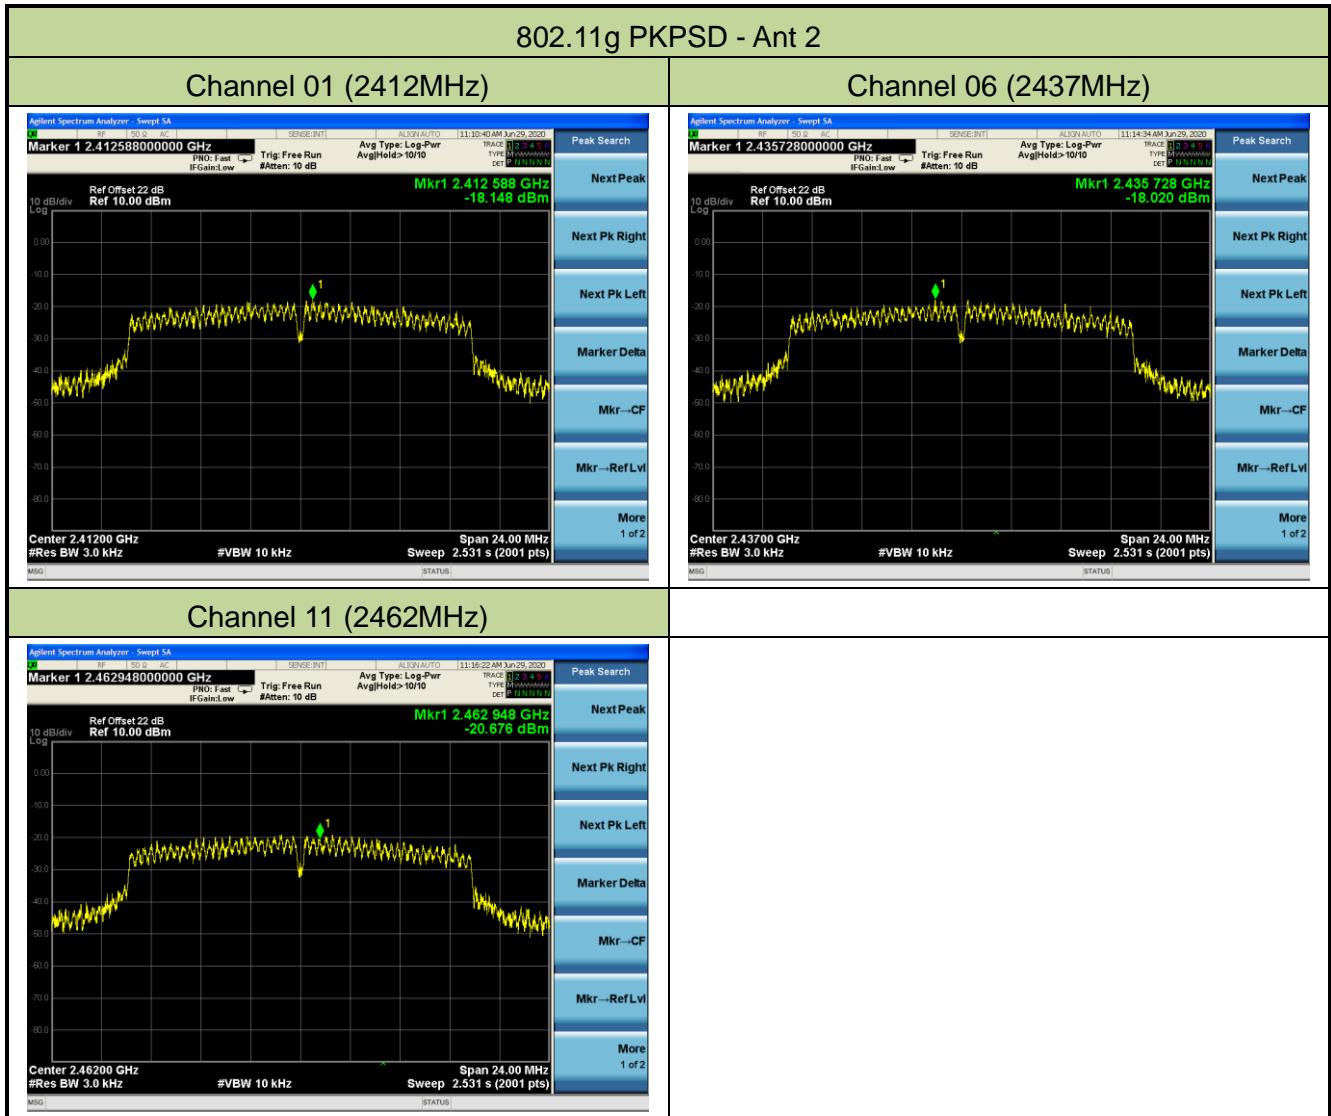

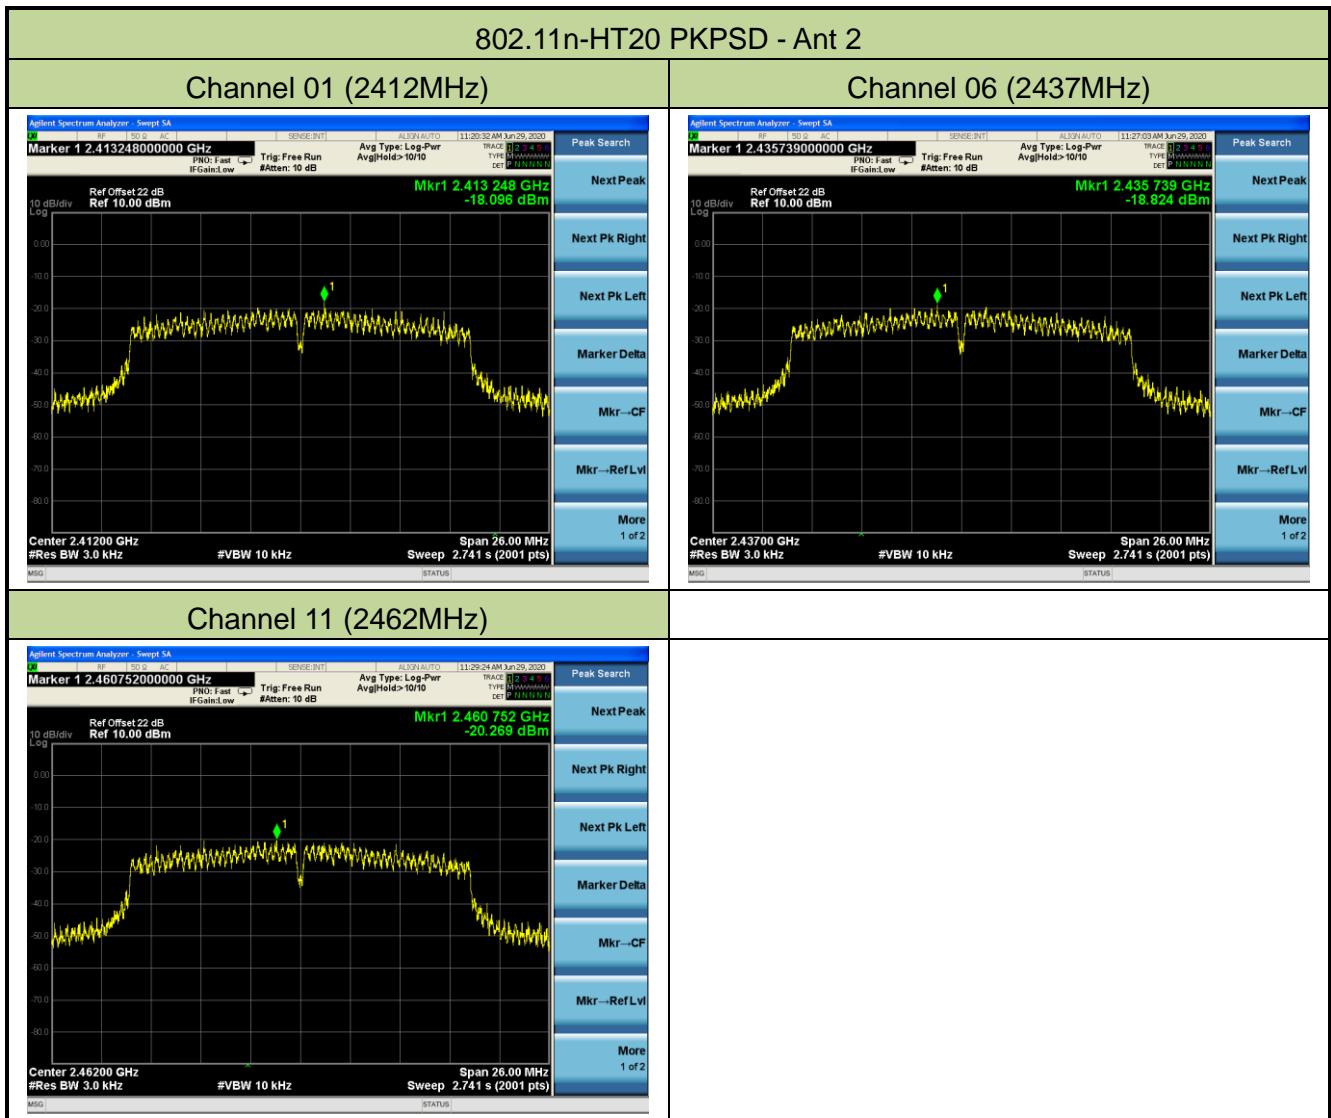

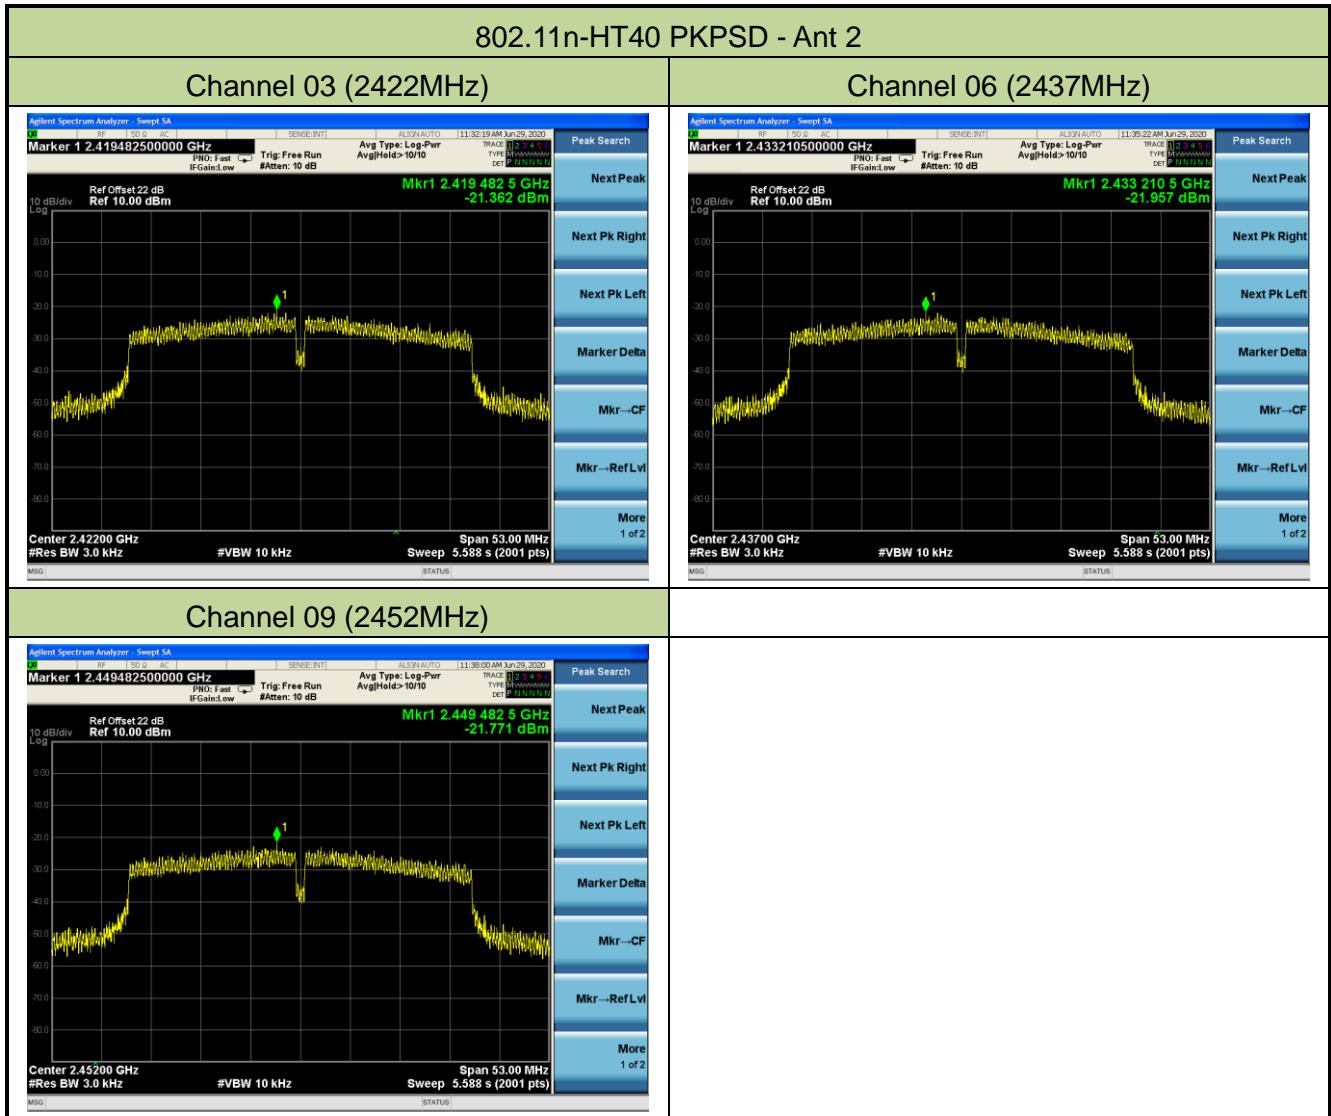

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used

ANSI C63.10-2013 Section 11.11

7.5.3. Test Setting

Reference level measurement


1. Set instrument center frequency to DTS channel center frequency
2. Set the span to \geq 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW \geq 3 x RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

7.5.4. Test Setup

Spectrum Analyzer

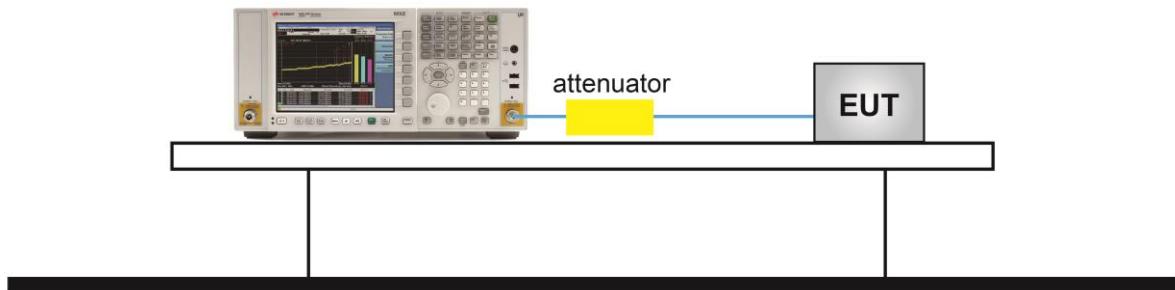

7.5.5. Test Result

Product	WiFi AP Router Module	Test Engineer	Dandy Li
Test Site	TR3	Test Date	2020/06/23 ~ 2020/06/30

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit (dBc)	Result
Ant 1					
802.11b	1Mbps	01	2412	20	Pass
802.11b	1Mbps	06	2437	20	Pass
802.11b	1Mbps	11	2462	20	Pass
802.11g	6Mbps	01	2412	20	Pass
802.11g	6Mbps	06	2437	20	Pass
802.11g	6Mbps	11	2462	20	Pass
802.11n-HT20	MCS0	01	2412	20	Pass
802.11n-HT20	MCS0	06	2437	20	Pass
802.11n-HT20	MCS0	11	2462	20	Pass
802.11n-HT40	MCS0	03	2422	20	Pass
802.11n-HT40	MCS0	06	2437	20	Pass
802.11n-HT40	MCS0	09	2452	20	Pass
Ant 2					
802.11b	1Mbps	01	2412	20	Pass
802.11b	1Mbps	06	2437	20	Pass
802.11b	1Mbps	11	2462	20	Pass
802.11g	6Mbps	01	2412	20	Pass
802.11g	6Mbps	06	2437	20	Pass
802.11g	6Mbps	11	2462	20	Pass
802.11n-HT20	MCS0	01	2412	20	Pass
802.11n-HT20	MCS0	06	2437	20	Pass
802.11n-HT20	MCS0	11	2462	20	Pass
802.11n-HT40	MCS0	03	2422	20	Pass
802.11n-HT40	MCS0	06	2437	20	Pass
802.11n-HT40	MCS0	09	2452	20	Pass



