



# FCC SAR Test Report

**APPLICANT** : AzureWave Technologies, Inc.  
**EQUIPMENT** : Marvell 88W8897 802.11 ac 2x2 Wi-Fi + BT Combo Adapter  
**BRAND NAME** : AzureWave  
**MODEL NAME** : AW-CM389NF  
**FCC ID** : TLZ-CM389NF  
**STANDARD** : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2003

The product was installed into Notebook PC (Brand Name HP, Model Name: TPN-Q152) during test.

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Eric Huang / Deputy Manager

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**  
No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## Table of Contents

1. Statement of Compliance .....	4
2. Administration Data .....	5
3. Guidance Standard .....	5
4. Equipment Under Test (EUT) .....	6
4.1 General Information .....	6
4.2 Maximum Tune-up Limit.....	6
5. RF Exposure Limits.....	7
5.1 Uncontrolled Environment.....	7
5.2 Controlled Environment.....	7
6. Specific Absorption Rate (SAR).....	8
6.1 Introduction .....	8
6.2 SAR Definition.....	8
7. System Description and Setup .....	9
8. Measurement Procedures .....	10
8.1 Spatial Peak SAR Evaluation .....	10
8.2 Power Reference Measurement.....	11
8.3 Area Scan .....	11
8.4 Zoom Scan.....	12
8.5 Volume Scan Procedures.....	12
8.6 Power Drift Monitoring.....	12
9. Test Equipment List.....	13
10. System Verification .....	14
10.1 Tissue Verification .....	14
10.2 System Performance Check Results.....	15
11. RF Exposure Positions .....	15
11.1 SAR Testing for Tablet .....	15
12. Conducted RF Output Power (Unit: dBm).....	16
13. Bluetooth Exclusions Applied .....	20
14. Antenna Location .....	21
15. SAR Test Results .....	21
15.1 Body SAR .....	22
16. Simultaneous Transmission Analysis.....	23
16.1 Body Exposure Conditions .....	23
17. Uncertainty Assessment .....	24
18. References.....	27
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



## Revision History



## 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **AzureWave Technologies, Inc., Marvell 88W8897 802.11 ac 2x2 Wi-Fi + BT Combo Adapter, AW-CM389NF**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary	
		Body 1g SAR (W/kg)	Simultaneous Transmission 1g SAR (W/kg)
DTS	WLAN 2.4GHz Band	0.21	0.28
	WLAN 5.8GHz Band	<b>0.24</b>	
NII	WLAN 5.2GHz Band	0.15	0.27
	WLAN 5.3GHz Band	0.18	
	WLAN 5.5GHz Band	0.23	
Date of Testing:		08/08/2014 ~ 08/09/2014	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.



## 2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	AzureWave Technologies, Inc.
Address	8F., No. 94, Baozhong Rd., Xindian, Taipei, Taiwan 231

Manufacturer	
Company Name	AzureWave Technologies, Inc.
Address	8F., No. 94, Baozhong Rd., Xindian, Taipei, Taiwan 231

## 3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 248227 D01 SAR meas for 802.11abg v01r02
- FCC KDB 644545 D01 Guidance for IEEE 802.11ac v01r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r01



## 4. Equipment Under Test (EUT)

### 4.1 General Information

Product Feature & Specification	
Equipment Name	Marvell 88W8897 802.11 ac 2x2 Wi-Fi + BT Combo Adapter
Brand Name	AzureWave
Model Name	AW-CM389NF
FCC ID	TLZ-CM389NF
S / N	5CD4201TK1
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	• 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 • Bluetooth v3.0+HS , Bluetooth v4.0-LE
EUT Stage	Identical Prototype

Host Feature & Specification		
Host	Notebook PC	
Brand Name	HP	
Model Name	TPN-Q152	
Antenna Information		
Model No.	DQ6R15GAB00	DQ6R15GAB00
Antenna Type	Main: PIFA Antenna	Aux: PIFA Antenna
Peak gain	Main Antenna : 2.4GHz : -1.48dBi 5GHz : 0.46dBi	Aux Antenna : 2.4GHz:-2.32dBi 5GHz:-0.06dBi

### 4.2 Maximum Tune-up Limit

Band / Mode	Average Power (dBm)	
	v2.1+EDR	v4.0+LE
Bluetooth	4	4

Mode	Average Power (dBm)
802.11 b	16
802.11 g	14
802.11 n-20MHz	13
802.11 n-40MHz	11
802.11 a	13
802.11 n-20MHz	12
802.11 n-40MHz	10
802.11 ac-20MHz	11
802.11 ac-40MHz	9
802.11 ac-80MHz	8



## 5. RF Exposure Limits

### 5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

#### Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

#### Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.



## 6. Specific Absorption Rate (SAR)

### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

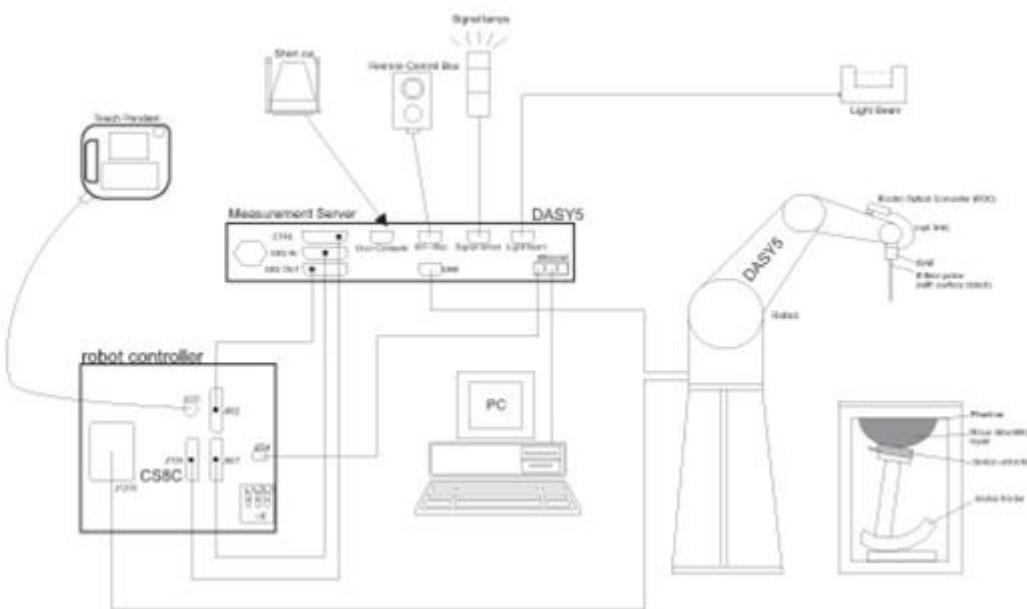

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.



## 8. Measurement Procedures

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### 8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



## **8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## **8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}$ , $\Delta y_{\text{Area}}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



## 8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

		$\leq 3$ GHz	$> 3$ GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$  graded grid	$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm
Minimum zoom scan volume	$x, y, z$	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

\* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is  $\leq 1.4$  W/kg,  $\leq 8$  mm,  $\leq 7$  mm and  $\leq 5$  mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

## 8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remains in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## 8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

**9. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	736	Aug. 23, 2013	Aug. 22, 2014
SPEAG	5GHz System Validation Kit	D5GHzV2	1128	Jul. 22, 2014	Jul. 21, 2015
SPEAG	Data Acquisition Electronics	DAE4	1425	Mar. 03, 2014	Mar. 02, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	Nov. 04, 2013	Nov. 03, 2014
Wisewind	Thermometer	HTC-1	TM281	Oct. 22, 2013	Oct. 21, 2014
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Agilent	Signal Generator	E4438C	MY49070755	Oct. 08, 2013	Oct. 07, 2014
SPEAG	Dielectric Probe Kit	DAKS-3.5	0004	Mar. 04, 2014	Mar. 03, 2015
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2014	Feb. 06, 2015
Anritsu	Power Meter	ML2495A	1349001	Dec. 04, 2013	Dec. 03, 2014
Anritsu	Power Sensor	MA2411B	1306099	Dec. 03, 2013	Dec. 02, 2014
R&S	Spectrum Analyzer	FSP30	101067	Nov. 20, 2013	Nov. 19, 2014
Agilent	Dual Directional Coupler	778D	50422	Note 1	
Woken	Attenuator	WK0602-XX	N/A	Note 1	
PE	Attenuator	PE7005-10	N/A	Note 1	
PE	Attenuator	PE7005- 3	N/A	Note 1	
AR	Power Amplifier	5S1G4M2	0328767	Note 1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1	
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	Note 1	

**General Note:**

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



## 10. System Verification

### 10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

### < Tissue Dielectric Parameter Check Results >

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
2450	MSL	22.4	2.038	52.864	1.95	52.70	4.51	0.31	±5	2014/8/8
5200	MSL	22.6	5.131	47.488	5.30	49.00	-3.19	-3.09	±5	2014/8/9
5300	MSL	22.6	5.264	47.249	5.42	48.90	-2.88	-3.38	±5	2014/8/9
5600	MSL	22.6	5.642	46.786	5.77	48.50	-2.22	-3.53	±5	2014/8/9
5800	MSL	22.6	5.981	46.515	6.00	48.20	-0.32	-3.50	±5	2014/8/9

## 10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2014/8/8	2450	MSL	250	D2450V2-736	EX3DV4 - SN3954	DAE4 Sn1425	12.80	51.30	51.20	-0.19
2014/8/9	5200	MSL	100	D5GHzV2-1128	EX3DV4 - SN3954	DAE4 Sn1425	8.21	76.20	82.10	7.74
2014/8/9	5300	MSL	100	D5GHzV2-1128	EX3DV4 - SN3954	DAE4 Sn1425	8.09	77.70	80.90	4.12
2014/8/9	5600	MSL	100	D5GHzV2-1128	EX3DV4 - SN3954	DAE4 Sn1425	8.22	81.50	82.20	0.86
2014/8/9	5800	MSL	100	D5GHzV2-1128	EX3DV4 - SN3954	DAE4 Sn1425	7.57	75.90	75.70	-0.26

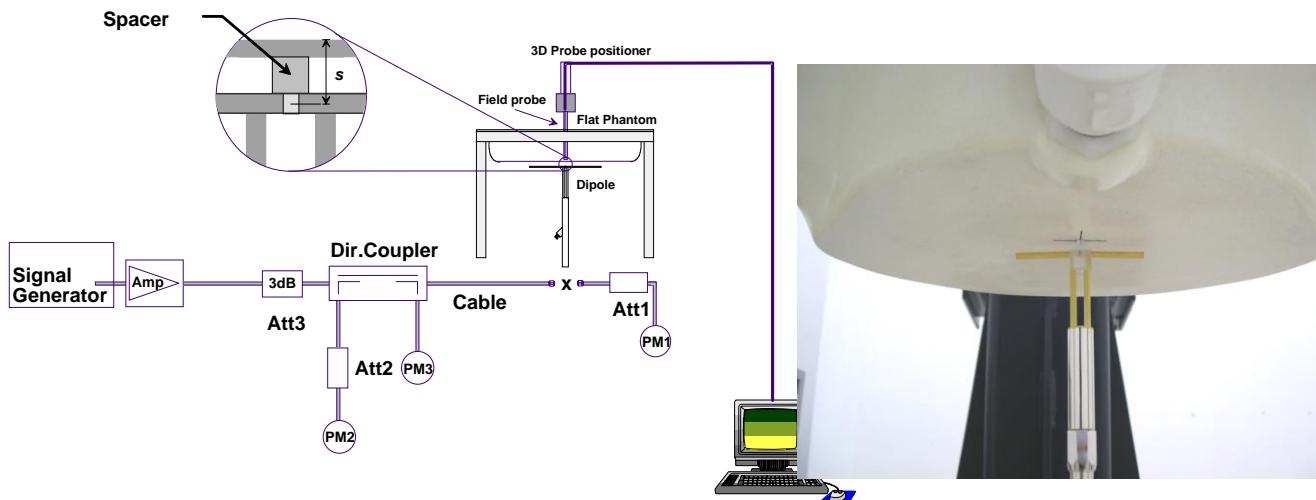


Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

## 11. RF Exposure Positions

### 11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v05r02 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.



## 12. Conducted RF Output Power (Unit: dBm)

### <WLAN Conducted Power>

**General Note:**

- For IEEE802.11b/g SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were selected for SAR evaluation. 802.11g were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11b mode.
- For IEEE802.11n, SAR testing can be conducted on channel with the highest output power when taking into consideration tune-up tolerance for same test configuration that was identified during SAR evaluations for IEEE802.11b/g (as applicable) provided bandwidth and test position are the same.
- For IEEE802.11n with multiple channel BW configurations, highest channel BW configuration with highest output power limit shall be tested.
- Testing of lower BW configurations is not required when the maximum average output of the default test channels in each lower BW configuration is less than 1/4dB higher than the default test channel in the highest BW configuration.

### <2.4GHz WLAN>

WLAN 2.4GHz 802.11b Average Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate	2Mbps		5.5Mbps	
			1Mbps		11Mbps	
CH 1	2412	15.93	15.88		15.75	15.81
CH 6	2437	15.76				
CH 11	2462	15.21				

WLAN 2.4GHz 802.11g Average Power (dBm)							
Power vs. Channel			Power vs. Data Rate				
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps
				6Mbps	13.94	13.76	13.90
CH 1	2412	13.94	13.94	13.87	13.84	13.76	13.81
CH 6	2437	13.98					13.86
CH 11	2462	13.54					

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)							
Power vs. Channel			Power vs. MCS Index				
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5
			MCS0	12.91	12.88	12.82	12.78
CH 1	2412	12.67					
CH 6	2437	12.54					
CH 11	2462	12.96					

WLAN 2.4GHz 802.11n-HT40 Average Power (dBm)							
Power vs. Channel			Power vs. MCS Index				
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5
			MCS0	10.86	10.81	10.68	10.77
CH 3	2422	10.90					
CH 6	2437	10.82					
CH 9	2452	10.73					

<5GHz WLAN>

WLAN 5GHz 802.11a Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 36	5180	12.80	12.77	12.83	12.75	12.61	12.76	12.63	12.73
CH 40	5200	12.67	12.81	12.77	12.64	12.74	12.63	12.75	12.72
CH 44	5220	12.52							
CH 48	5240	12.85							
CH 52	5260	12.86							
CH 56	5280	12.69							
CH 60	5300	12.78							
CH 64	5320	12.81							
CH 100	5500	12.61							
CH 104	5520	12.77							
CH 108	5540	12.58							
CH 112	5560	12.67							
CH 116	5580	12.46							
CH 132	5660	12.59							
CH 136	5680	12.76							
CH 140	5700	12.94							
CH 149	5745	12.92							
CH 153	5765	12.44							
CH 157	5785	12.46							
CH 161	5805	12.38							
CH 165	5825	12.86							



WLAN 5GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 36	5180	11.64							
CH 40	5200	11.81	11.73	11.75	11.67	11.66	11.69	11.67	
CH 44	5220	11.65							
CH 48	5240	11.53							
CH 52	5260	11.84							
CH 56	5280	11.76	11.77	11.75	11.75	11.71	11.64	11.78	
CH 60	5300	11.78							
CH 64	5320	11.88							
CH 100	5500	11.55							
CH 104	5520	11.69							
CH 108	5540	11.63							
CH 112	5560	11.55	11.67	11.68	11.78	11.65	11.66	11.63	
CH 116	5580	11.74							
CH 132	5660	11.83							
CH 136	5680	11.65							
CH 140	5700	11.79							
CH 149	5745	11.73							
CH 153	5765	11.33							
CH 157	5785	11.41	11.79	11.76	11.78	11.68	11.66	11.76	
CH 161	5805	11.27							
CH 165	5825	11.85							

WLAN 5GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 38	5190	9.90	9.86	9.84	9.80	9.70	9.79	9.66	9.78
CH 46	5230	9.88							
CH 54	5270	9.83	9.69	9.72	9.66	9.72	9.60	9.72	9.70
CH 62	5310	9.63							
CH 102	5510	9.93							
CH 110	5550	9.77	9.81	9.83	9.89	9.83	9.72	9.75	9.72
CH 134	5670	9.97							
CH 151	5755	9.91	9.83	9.83	9.80	9.72	9.69	9.81	9.68
CH 159	5795	9.78							



WLAN 5GHz 802.11ac-VHT20 Average Power (dBm)								
Power vs. Channel			Power vs. MCS Index					
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6
		MCS0						
CH 36	5180	10.74						
CH 40	5200	10.81	10.82	10.83	10.81	10.71	10.81	10.72
CH 44	5220	10.89						
CH 48	5240	10.72						
CH 52	5260	10.82						
CH 56	5280	10.77	10.68	10.75	10.60	10.71	10.63	10.70
CH 60	5300	10.63						
CH 64	5320	10.55						
CH 100	5500	10.70						
CH 104	5520	10.75						
CH 108	5540	10.63						
CH 112	5560	10.81	10.81	10.77	10.81	10.72	10.65	10.68
CH 116	5580	10.50						
CH 132	5660	10.76						
CH 136	5680	10.83						
CH 140	5700	10.87						
CH 149	5745	10.78						
CH 153	5765	10.46						
CH 157	5785	10.58						
CH 161	5805	10.37						
CH 165	5825	10.97						

WLAN 5GHz 802.11ac-VHT40 Average Power (dBm)								
Power vs. Channel			Power vs. MCS Index					
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6
		MCS0						
CH 38	5190	8.75	8.67	8.72	8.64	8.57	8.66	8.58
CH 46	5230	8.76						
CH 54	5270	8.84	8.81	8.80	8.74	8.74	8.66	8.75
CH 62	5310	8.87						
CH 102	5510	8.80						
CH 110	5550	8.79	8.78	8.74	8.77	8.71	8.64	8.64
CH 134	5670	8.85						
CH 151	5755	8.57	8.90	8.85	8.84	8.81	8.78	8.84
CH 159	5795	8.94						



WLAN 5GHz 802.11ac-VHT80 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0									
CH 42	5210	7.67	7.60	7.63	7.62	7.49	7.58	7.46	7.52	7.42	7.40
CH 58	5290	7.68	7.64	7.59	7.55	7.54	7.50	7.53	7.51	7.48	7.54
CH 106	5530	7.61	7.45	7.55	7.50	7.44	7.44	7.40	7.30	7.41	7.50
CH 155	5775	7.32	7.22	7.25	7.22	7.17	7.10	7.20	7.14	7.09	7.06

### 13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	Bluetooth v2.1+EDR	Bluetooth v4.0+LE
2.4GHz Bluetooth	4	4

**Note:**

1. Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances*  $\leq$  50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for}$$

1-g SAR and  $\leq$  7.5 for 10-g extremity SAR

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison


Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
4	< 5	2.48	0.94

**Note:**

Per KDB 447498 D01v05r02, when the minimum test separation distance is  $<$  5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.94 which is  $\leq$  3, SAR testing is not required.



## 14. Antenna Location

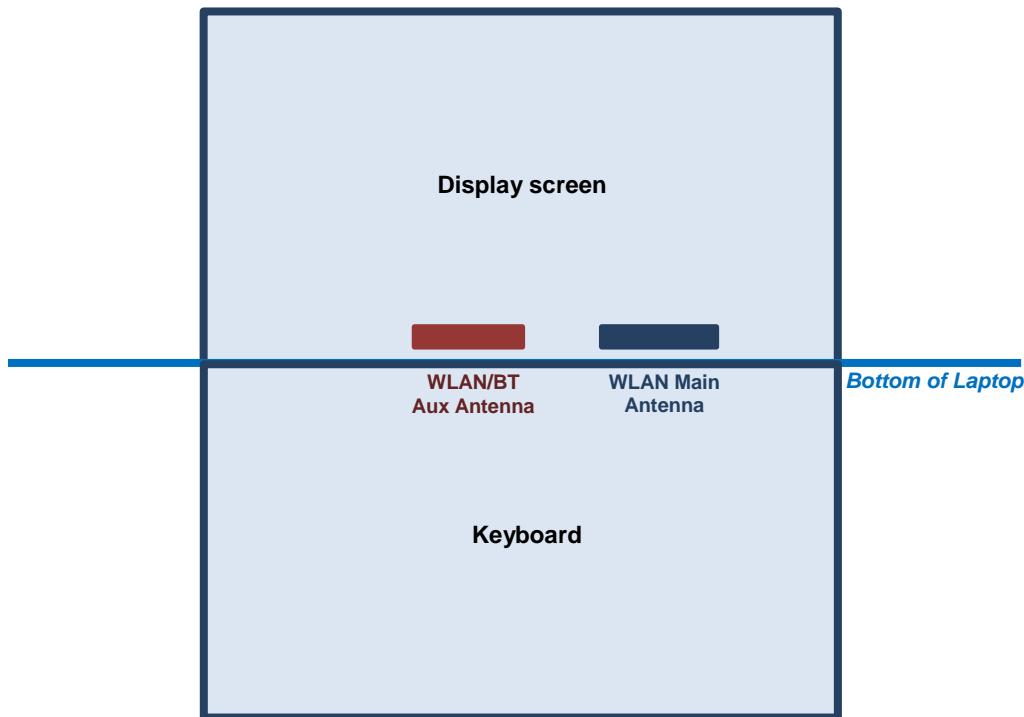

## 15. SAR Test Results

### General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg) \* Tune-up scaling factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8 \text{ W/kg}$  or  $2.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\leq 100 \text{ MHz}$
  - $\leq 0.6 \text{ W/kg}$  or  $1.5 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between  $100 \text{ MHz}$  and  $200 \text{ MHz}$
  - $\leq 0.4 \text{ W/kg}$  or  $1.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200 \text{ MHz}$
3. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8 \text{ W/kg}$ .

**15.1 Body SAR****<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (cm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0cm	A+B	1	2412	15.93	16.00	1.015	-0.05	0.160	0.162
	WLAN2.4GHz	802.11n-HT40 MCS0	Bottom of Laptop	0cm	A+B	3	2422	10.90	11.00	1.023	0.19	0.023	0.024
	WLAN2.4GHz	802.11n-HT20 MCS0	Bottom of Laptop	0cm	A+B	11	2462	12.96	13.00	1.009	0.11	0.069	0.070
	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0cm	A+B	6	2437	15.76	16.00	1.057	0.1	0.189	0.200
01	WLAN2.4GHz	802.11b 1Mbps	Bottom of Laptop	0cm	A+B	11	2462	15.21	16.00	1.201	0.03	0.173	<b>0.208</b>
02	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0cm	A+B	149	5745	12.92	13.00	1.019	-0.06	0.234	<b>0.238</b>
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0cm	A+B	151	5755	9.91	10.00	1.022	-0.09	0.115	0.118
	WLAN5GHz	802.11n-HT20 MCS0	Bottom of Laptop	0cm	A+B	165	5825	11.85	12.00	1.036	-0.01	0.173	0.179
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0cm	A+B	155	5775	7.32	8.00	1.170	-0.06	0.042	0.049
	WLAN5GHz	802.11ac-VHT40 MCS0	Bottom of Laptop	0cm	A+B	159	5795	8.94	9.00	1.014	-0.13	0.090	0.091
	WLAN5GHz	802.11ac-VHT20 MCS0	Bottom of Laptop	0cm	A+B	165	5825	10.97	11.00	1.007	0.03	0.121	0.122
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0cm	A+B	157	5785	12.46	13.00	1.132	-0.09	0.167	0.189
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0cm	A+B	165	5825	12.86	13.00	1.033	-0.11	0.218	0.225
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0cm	A+B	48	5240	12.85	13.00	1.036	0.15	0.136	0.141
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0cm	A+B	38	5190	9.90	10.00	1.023	0.18	0.078	0.080
	WLAN5GHz	802.11n-HT20 MCS0	Bottom of Laptop	0cm	A+B	40	5200	11.81	12.00	1.045	0.17	0.108	0.113
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0cm	A+B	42	5210	7.67	8.00	1.078	-0.13	0.037	0.040
	WLAN5GHz	802.11ac-VHT40 MCS0	Bottom of Laptop	0cm	A+B	46	5230	8.76	9.00	1.058	0.13	0.058	0.061
	WLAN5GHz	802.11ac-VHT20 MCS0	Bottom of Laptop	0cm	A+B	44	5220	10.89	11.00	1.026	-0.03	0.096	0.099
03	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0cm	A+B	36	5180	12.80	13.00	1.047	0.15	0.141	<b>0.148</b>
04	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0cm	A+B	52	5260	12.86	13.00	1.032	-0.16	0.171	<b>0.177</b>
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0cm	A+B	54	5270	9.83	10.00	1.041	0.19	0.098	0.102
	WLAN5GHz	802.11n-HT20 MCS0	Bottom of Laptop	0cm	A+B	64	5320	11.88	12.00	1.028	-0.14	0.152	0.156
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0cm	A+B	58	5290	7.68	8.00	1.076	0.11	0.039	0.042
	WLAN5GHz	802.11ac-VHT40 MCS0	Bottom of Laptop	0cm	A+B	62	5310	8.87	9.00	1.030	-0.14	0.063	0.065
	WLAN5GHz	802.11ac-VHT20 MCS0	Bottom of Laptop	0cm	A+B	52	5260	10.82	11.00	1.042	-0.19	0.103	0.107
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0cm	A+B	64	5320	12.81	13.00	1.044	0.12	0.162	0.169
05	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0cm	A+B	140	5700	12.94	13.00	1.015	-0.07	0.226	<b>0.229</b>
	WLAN5GHz	802.11n-HT40 MCS0	Bottom of Laptop	0cm	A+B	134	5670	9.97	10.00	1.007	0.14	0.144	0.145
	WLAN5GHz	802.11n-HT20 MCS0	Bottom of Laptop	0cm	A+B	132	5660	11.83	12.00	1.040	-0.1	0.182	0.189
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom of Laptop	0cm	A+B	106	5530	7.61	8.00	1.094	-0.16	0.021	0.023
	WLAN5GHz	802.11ac-VHT40 MCS0	Bottom of Laptop	0cm	A+B	134	5670	8.85	9.00	1.035	0.14	0.111	0.115
	WLAN5GHz	802.11ac-VHT20 MCS0	Bottom of Laptop	0cm	A+B	140	5700	10.87	11.00	1.029	-0.12	0.149	0.153
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0cm	A+B	104	5520	12.77	13.00	1.054	-0.15	0.169	0.178
	WLAN5GHz	802.11a 6Mbps	Bottom of Laptop	0cm	A+B	112	5560	12.67	13.00	1.079	-0.05	0.187	0.202



## 16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Supported
1.	WLAN + Bluetooth	Yes

**General Note:**

1. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
2. The Scaled SAR summation is calculated based on the same configuration and test position.
3. Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii) SPLSR =  $(\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where  $(x1, y1, z1)$  and  $(x2, y2, z2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If SPLSR  $\leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
  - v) The SPLSR calculated results please refer to section 16.2.
4. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
  - i)  $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$  for test separation distances  $\leq 50$  mm; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - ii) When the minimum separation distance is  $< 5$  mm, the distance is used 5mm to determine SAR test exclusion.
  - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is  $> 50$  mm.
  - iv) Bluetooth estimated SAR is conservatively determined by 5mm separation, for all applicable exposure positions.

Bluetooth Max Power	Exposure Position	All Positions
4 dBm	Estimated SAR (W/kg)	0.042 W/kg

### 16.1 Body Exposure Conditions

Exposure Position	WLAN	Bluetooth	Summed SAR (W/kg)
	SAR (W/kg)	Estimated SAR (W/kg)	
Bottom of Laptop	0.208	0.042	<b>0.25</b>
	0.148	0.042	<b>0.19</b>
	0.177	0.042	<b>0.22</b>
	0.229	0.042	<b>0.27</b>
	0.238	0.042	<b>0.28</b>

**Test Engineer :** Angelo Chang, Frank Wu, Galen Zhang, Kurt Liu and Ken Li



## 17. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacturer's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b)  $k$  is the coverage factor

**Table 17.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
<b>Measurement System</b>							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	$\sqrt{3}$	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	$\sqrt{3}$	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	$\sqrt{3}$	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %
<b>Test Sample Related</b>							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	± 2.9 %	± 2.9 %
<b>Phantom and Setup</b>							
Phantom Uncertainty	4.0	Rectangular	$\sqrt{3}$	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
<b>Combined Standard Uncertainty</b>						± 11.0 %	± 10.8 %
<b>Coverage Factor for 95 %</b>						K=2	
<b>Expanded Uncertainty</b>						± 22.0 %	± 21.5 %

Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz



Error Description	Uncertainty Value ( $\pm\%$ )	Probability Distribution	Divisor	$C_i$ (1g)	$C_i$ (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
<b>Measurement System</b>							
Probe Calibration	6.55	Normal	1	1	1	$\pm 6.55 \%$	$\pm 6.55 \%$
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9 \%$	$\pm 1.9 \%$
Hemispherical Isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9 \%$	$\pm 3.9 \%$
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$
Linearity	4.7	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7 \%$	$\pm 2.7 \%$
System Detection Limits	1.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6 \%$	$\pm 0.6 \%$
Readout Electronics	0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$
Response Time	0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5 \%$	$\pm 0.5 \%$
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$
RF Ambient Noise	3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5 \%$	$\pm 0.5 \%$
Probe Positioning	9.9	Rectangular	$\sqrt{3}$	1	1	$\pm 5.7 \%$	$\pm 5.7 \%$
Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$
<b>Test Sample Related</b>							
Device Positioning	2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$
Device Holder	3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$
<b>Phantom and Setup</b>							
Phantom Uncertainty	4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$
Liquid Conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	$\pm 1.6 \%$	$\pm 1.1 \%$
Liquid Permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	$\pm 1.5 \%$	$\pm 1.2 \%$
<b>Combined Standard Uncertainty</b>						$\pm 12.8 \%$	$\pm 12.6 \%$
<b>Coverage Factor for 95 %</b>						K=2	
<b>Expanded Uncertainty</b>						$\pm 25.6 \%$	$\pm 25.2 \%$

Table 17.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz



## **18. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 616217 D04 v01r01, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", May 2013
- [8] FCC KDB 644545 D01 v01r02, "Guidance for IEEE 802.11ac and Pre-ac Device Emission Testing", Oct 2013.
- [9] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [10] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.