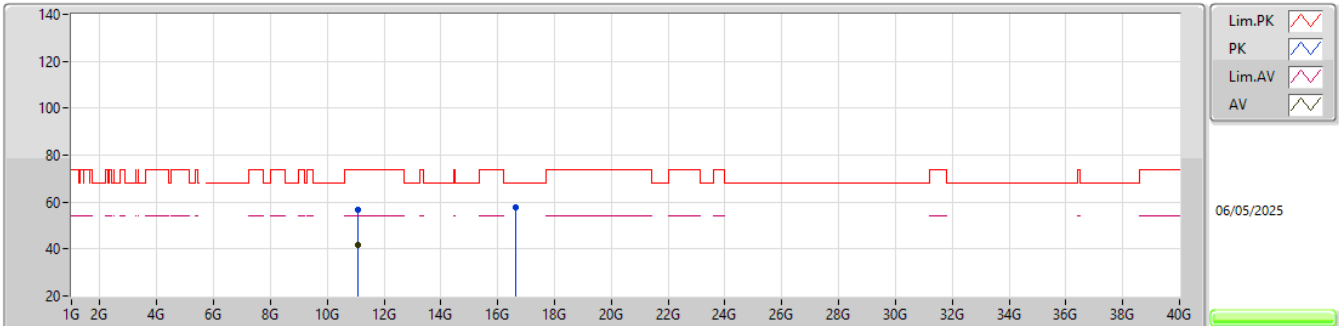


5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5550MHz_TX

EUT X_2TX
Setting 19.5
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.08872G	56.52	74.00	-17.48	51.99	3	Vertical	106	1.78	-	39.00	11.43	45.90			
AV	11.09481G	41.83	54.00	-12.17	37.28	3	Vertical	106	1.78	-	39.00	11.44	45.89			
PK	16.65258G	57.75	68.20	-10.45	49.70	3	Vertical	20	1.97	-	39.80	13.84	45.59			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5550MHz_TX

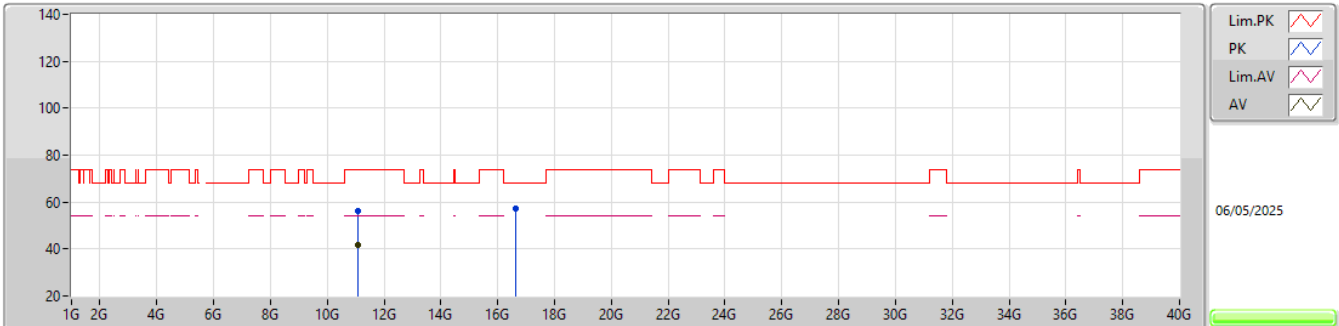EUT X_2TX
Setting 19.5
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.10225G	56.12	74.00	-17.88	51.57	3	Horizontal	11	1.74	-	38.99	11.44	45.88			
AV	11.09466G	41.95	54.00	-12.05	37.40	3	Horizontal	11	1.74	-	39.00	11.44	45.89			
PK	16.65309G	57.38	68.20	-10.82	49.33	3	Horizontal	155	1.70	-	39.80	13.84	45.59			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TX

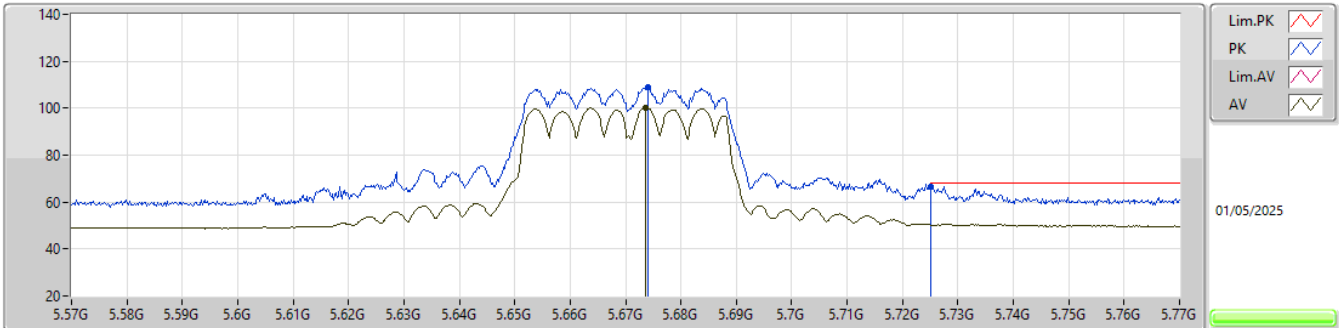


EUT_X_2TX
Setting 16.5
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.674G	109.15	Inf	-Inf	102.38	3	Vertical	323	1.00	-	34.25	7.74	35.22			
AV	5.6736G	100.20	Inf	-Inf	93.43	3	Vertical	323	1.00	-	34.25	7.74	35.22			
PK	5.725G	66.46	68.20	-1.74	59.65	3	Vertical	323	1.00	-	34.20	7.83	35.22			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TX

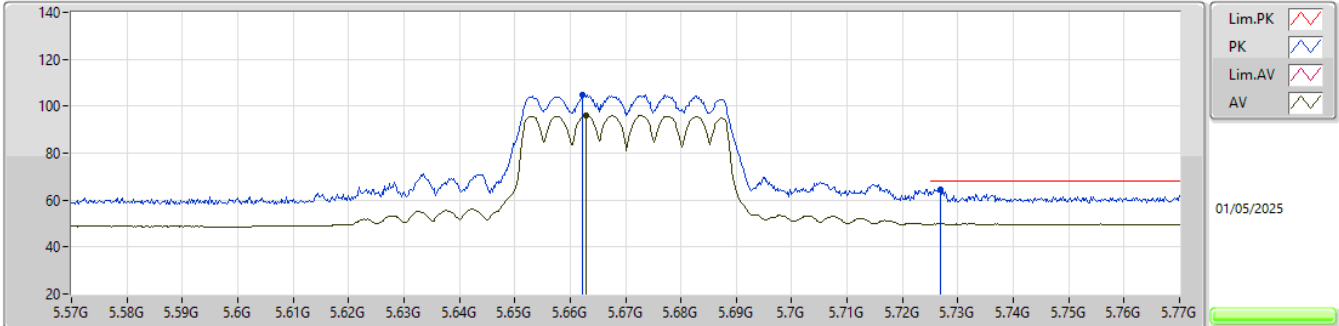


EUT_X_2TX
Setting 16.5
03-P-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6622G	104.88	Inf	-Inf	98.10	3	Horizontal	345	3.00	-	34.28	7.72	35.22				
AV	5.6628G	96.10	Inf	-Inf	89.33	3	Horizontal	345	3.00	-	34.27	7.72	35.22				
PK	5.7268G	64.50	68.20	-3.70	57.69	3	Horizontal	345	3.00	-	34.20	7.83	35.22				

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TX

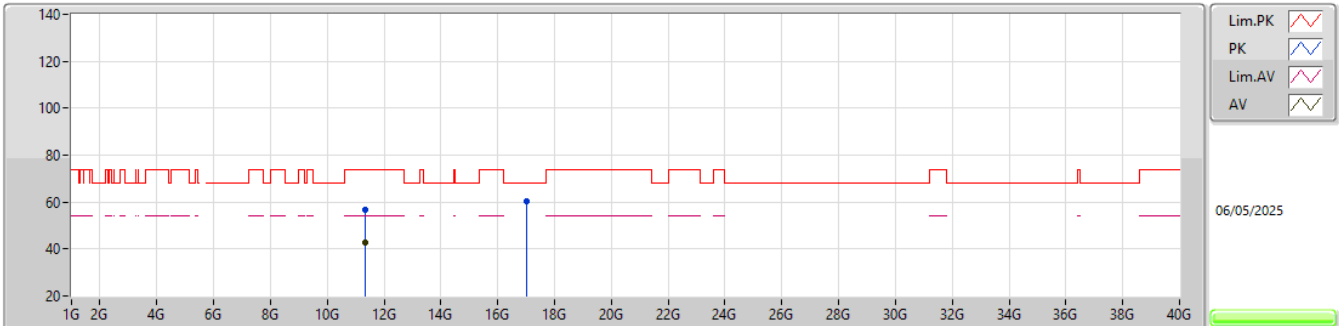


EUT_X_2TX
Setting 16.5
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.34972G	56.82	74.00	-17.18	51.50	3	Vertical	270	1.48	-	39.10	11.70	45.48			
AV	11.34747G	42.66	54.00	-11.34	37.36	3	Vertical	270	1.48	-	39.09	11.69	45.48			
PK	17.02158G	60.18	68.20	-8.02	50.99	3	Vertical	296	1.85	-	40.73	13.95	45.49			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TX

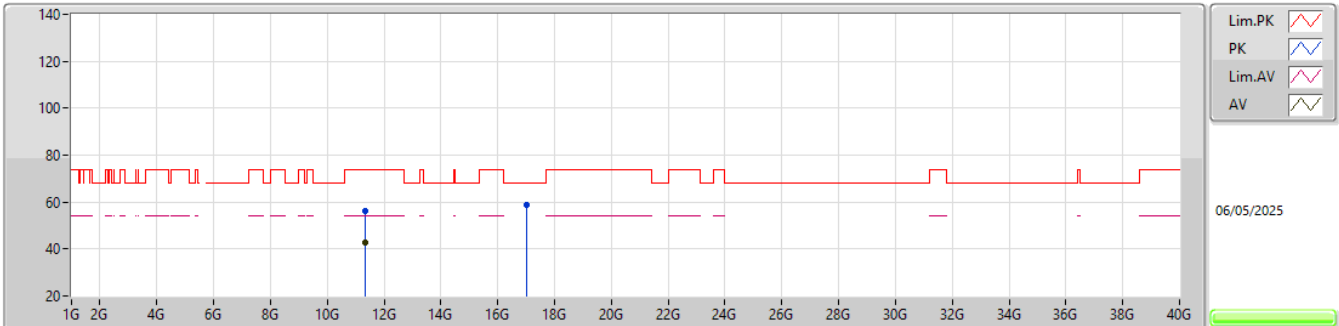


EUT_X_2TX
Setting 16.5
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.32776G	56.39	74.00	-17.61	51.18	3	Horizontal	118	1.64	-	39.06	11.67	45.52			
AV	11.35257G	42.52	54.00	-11.48	37.20	3	Horizontal	118	1.64	-	39.10	11.70	45.48			
PK	17.00004G	58.93	68.20	-9.27	49.93	3	Horizontal	284	1.53	-	40.60	13.94	45.54			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5710MHz Straddle 5.47-5.725GHz_TX

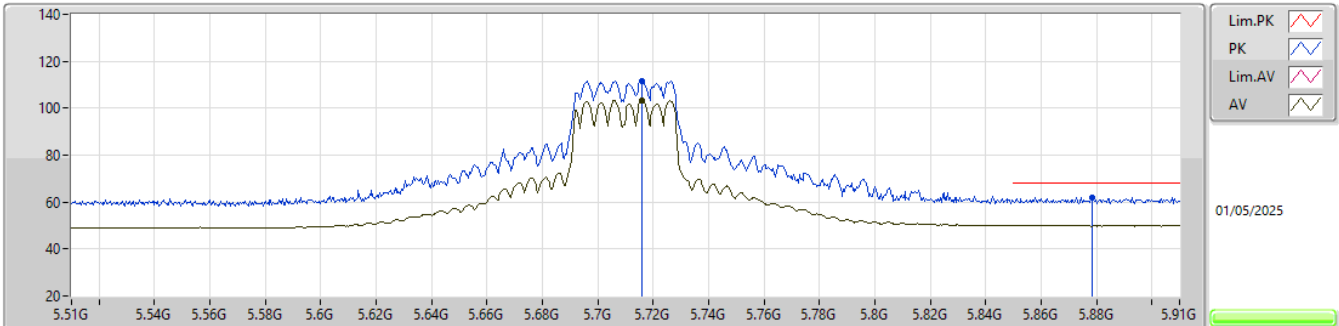EUT_X_2TX
Setting 20
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.716G	111.71	Inf	-Inf	104.92	3	Vertical	323	1.02	-	34.20	7.81	35.22			
AV	5.716G	103.27	Inf	-Inf	96.48	3	Vertical	323	1.02	-	34.20	7.81	35.22			
PK	5.8784G	62.15	68.20	-6.05	54.90	3	Vertical	323	1.02	-	34.41	8.04	35.20			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TX

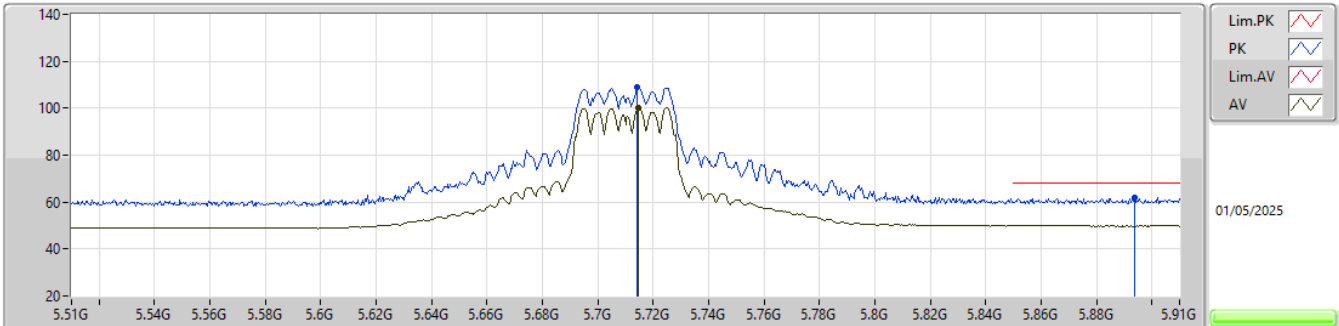


EUT_X_2TX
Setting 20
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.714G	108.98	Inf	-Inf	102.19	3	Horizontal	342	3.00	-	34.20	7.81	35.22			
AV	5.7148G	100.17	Inf	-Inf	93.38	3	Horizontal	342	3.00	-	34.20	7.81	35.22			
PK	5.894G	61.95	68.20	-6.25	54.61	3	Horizontal	342	3.00	-	34.48	8.06	35.20			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5710MHz Straddle 5.47-5.725GHz_TX

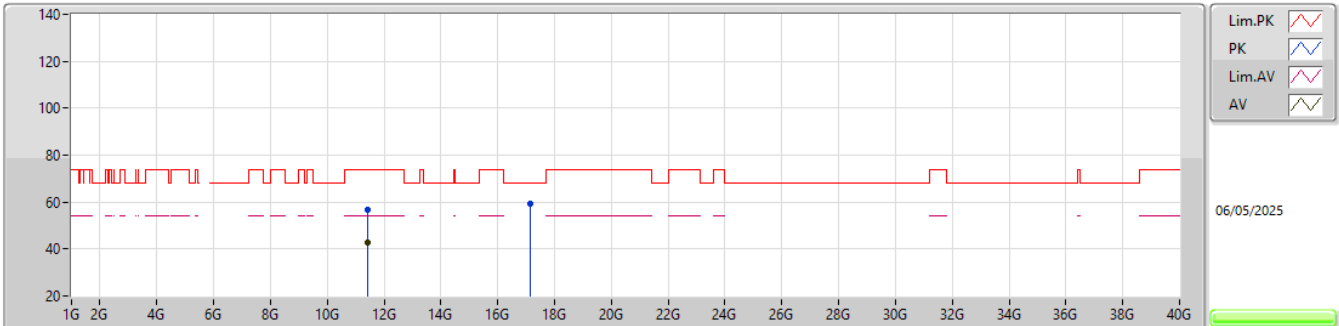EUT_X_2TX
Setting 20
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.40536G	56.52	74.00	-17.48	51.07	3	Vertical	1	1.39	-	39.09	11.75	45.39			
AV	11.41979G	42.85	54.00	-11.15	37.39	3	Vertical	1	1.39	-	39.06	11.77	45.37			
PK	17.13207G	59.07	68.20	-9.13	49.19	3	Vertical	0	1.51	-	41.16	13.98	45.26			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5710MHz Straddle 5.47-5.725GHz_TX

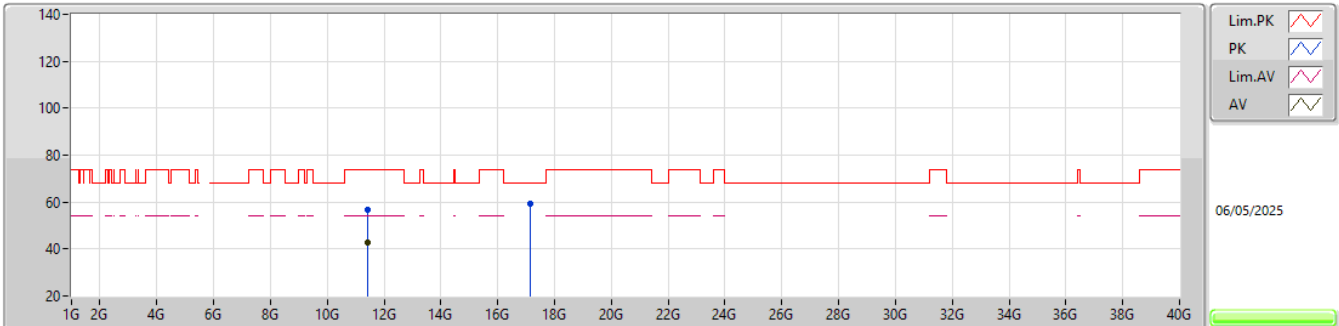EUT_X_2TX
Setting 20
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.43176G	56.93	74.00	-17.07	51.46	3	Horizontal	88	1.87	-	39.04	11.78	45.35			
AV	11.42096G	42.85	54.00	-11.15	37.39	3	Horizontal	88	1.87	-	39.06	11.77	45.37			
PK	17.12985G	59.45	68.20	-8.75	49.57	3	Horizontal	320	1.89	-	41.16	13.98	45.26			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TX

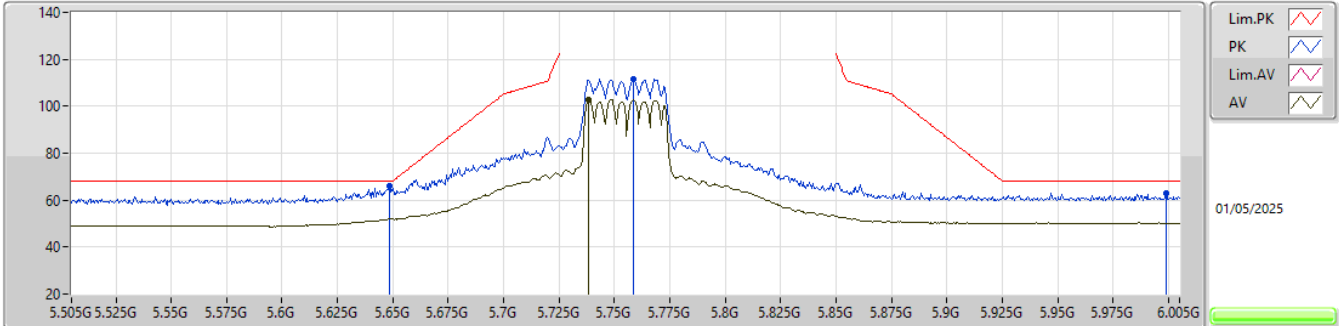


EUT_X_2TX
Setting 19
03-P-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.6485G	66.12	68.20	-2.08	59.36	3	Vertical	322	1.00	-	34.30	7.69	35.23			
PK	5.7585G	111.68	Inf	-Inf	104.80	3	Vertical	322	1.00	-	34.20	7.89	35.21			
AV	5.7385G	102.94	Inf	-Inf	96.11	3	Vertical	322	1.00	-	34.20	7.85	35.22			
PK	5.999G	62.88	68.20	-5.32	55.20	3	Vertical	322	1.00	-	34.70	8.17	35.19			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TX

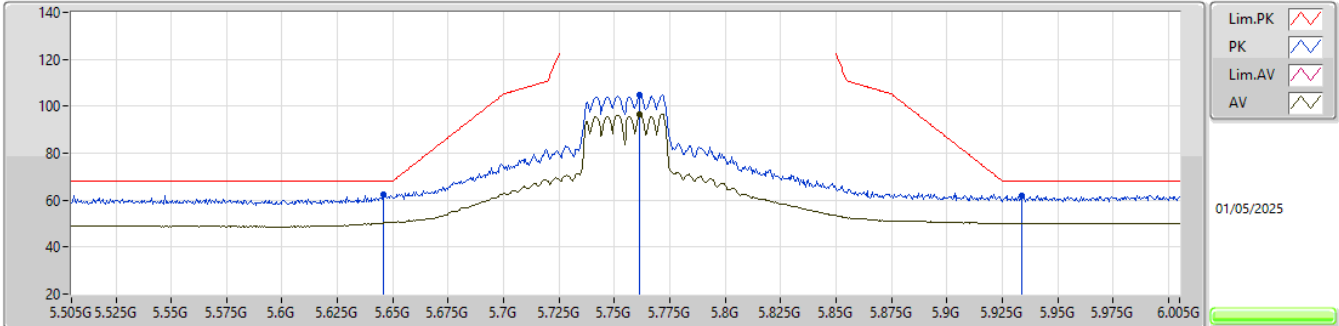


EUT_X_2TX
Setting 19
03-P-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.646G	62.17	68.20	-6.03	55.41	3	Horizontal	360	2.39	-	34.30	7.69	35.23				
PK	5.7615G	104.84	Inf	-Inf	97.96	3	Horizontal	360	2.39	-	34.20	7.89	35.21				
AV	5.7615G	96.63	Inf	-Inf	89.75	3	Horizontal	360	2.39	-	34.20	7.89	35.21				
PK	5.934G	62.04	68.20	-6.16	54.50	3	Horizontal	360	2.39	-	34.64	8.10	35.20				

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5755MHz_TX

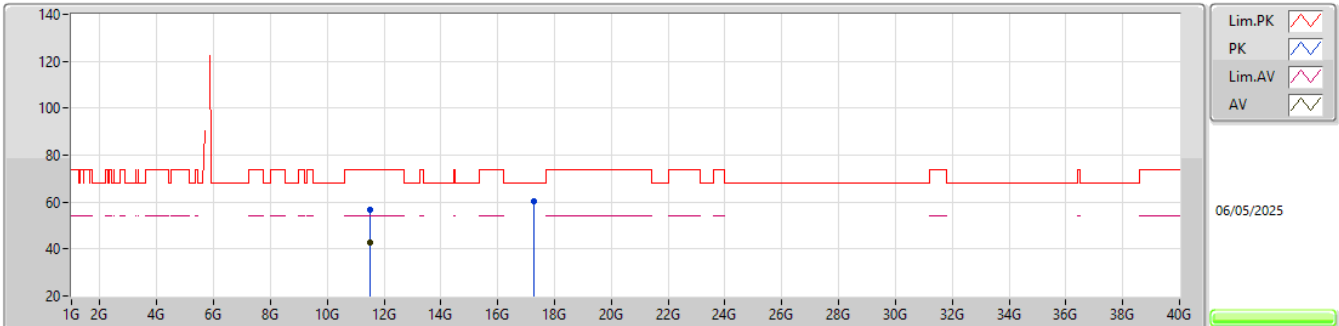EUT X_2TX
Setting 19
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.51846G	56.92	74.00	-17.08	51.35	3	Vertical	300	1.72	-	38.94	11.87	45.24			
AV	11.51549G	43.01	54.00	-10.99	37.45	3	Vertical	300	1.72	-	38.93	11.87	45.24			
PK	17.27871G	60.19	68.20	-8.01	49.50	3	Vertical	346	1.50	-	41.61	14.02	44.94			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5755MHz_TX

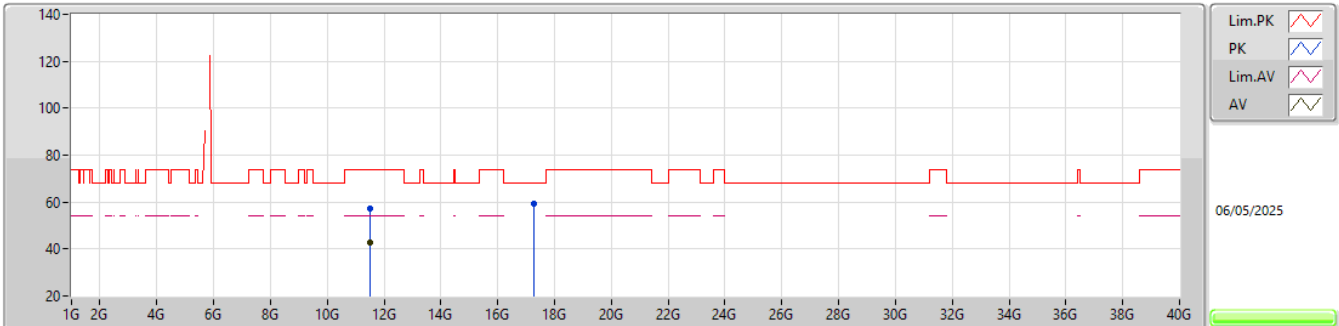EUT X_2TX
Setting 19
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.516G	57.30	74.00	-16.70	51.74	3	Horizontal	174	1.54	-	38.93	11.87	45.24			
AV	11.51804G	42.93	54.00	-11.07	37.36	3	Horizontal	174	1.54	-	38.94	11.87	45.24			
PK	17.27355G	59.52	68.20	-8.68	48.86	3	Horizontal	196	1.82	-	41.59	14.02	44.95			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TX

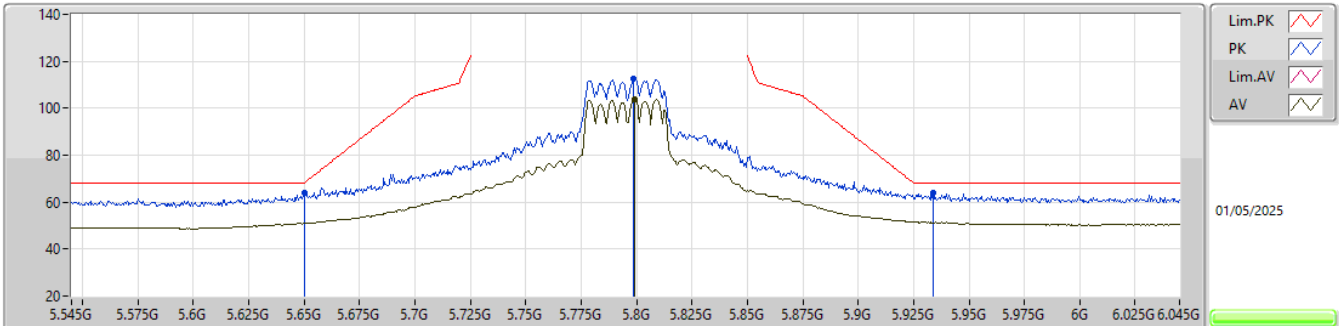


EUT_X_2TX
Setting 20
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.65G	63.79	68.20	-4.41	57.02	3	Vertical	324	1.12	-	34.30	7.70	35.23			
PK	5.7985G	112.70	Inf	-Inf	105.75	3	Vertical	324	1.12	-	34.20	7.96	35.21			
AV	5.799G	103.93	Inf	-Inf	96.98	3	Vertical	324	1.12	-	34.20	7.96	35.21			
PK	5.934G	64.16	68.20	-4.04	56.62	3	Vertical	324	1.12	-	34.64	8.10	35.20			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5795MHz_TX

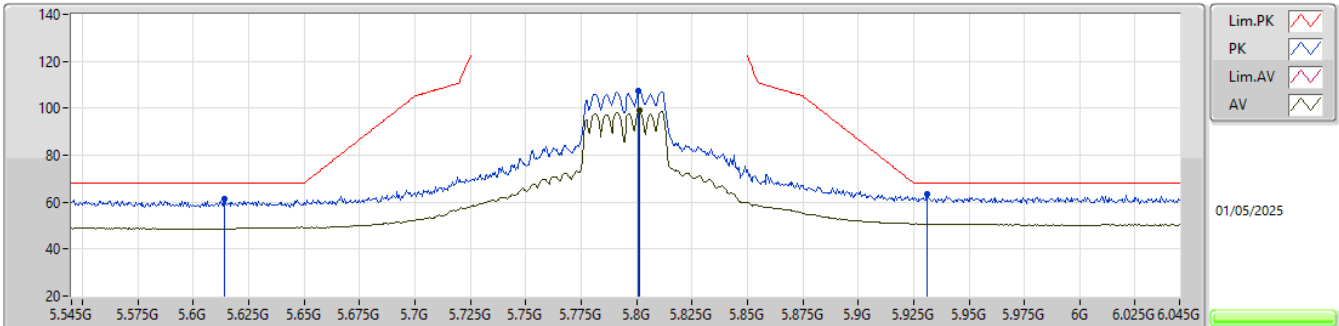EUT_X_2TX
Setting 20
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.614G	61.22	68.20	-6.98	54.52	3	Horizontal	359	2.48	-	34.30	7.63	35.23			
PK	5.801G	107.50	Inf	-Inf	100.55	3	Horizontal	359	2.48	-	34.20	7.96	35.21			
AV	5.8015G	98.99	Inf	-Inf	92.04	3	Horizontal	359	2.48	-	34.20	7.96	35.21			
PK	5.931G	63.30	68.20	-4.90	55.78	3	Horizontal	359	2.48	-	34.62	8.10	35.20			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TX

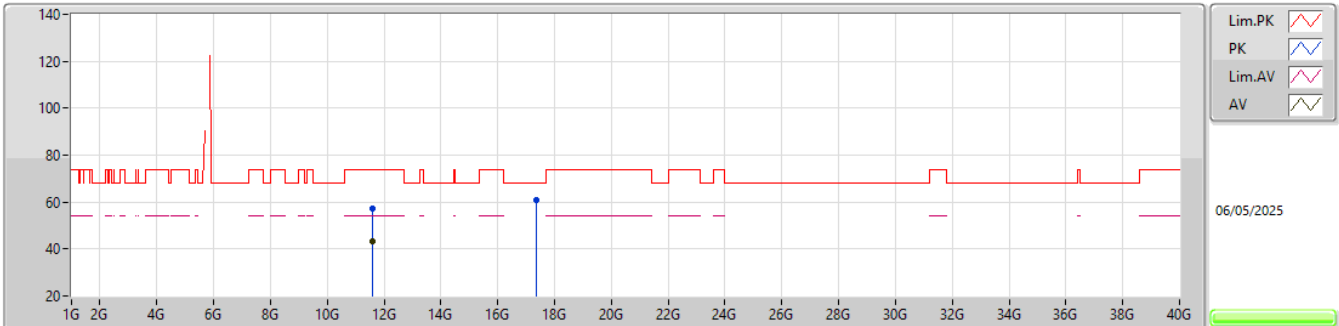


EUT_X_2TX
Setting 20
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.59369G	57.05	74.00	-16.95	51.45	3	Vertical	185	1.66	-	38.91	11.95	45.26			
AV	11.60185G	43.19	54.00	-10.81	37.60	3	Vertical	185	1.66	-	38.90	11.95	45.26			
PK	17.3727G	60.65	68.20	-7.55	49.45	3	Vertical	183	1.66	-	41.89	14.05	44.74			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5795MHz_TX

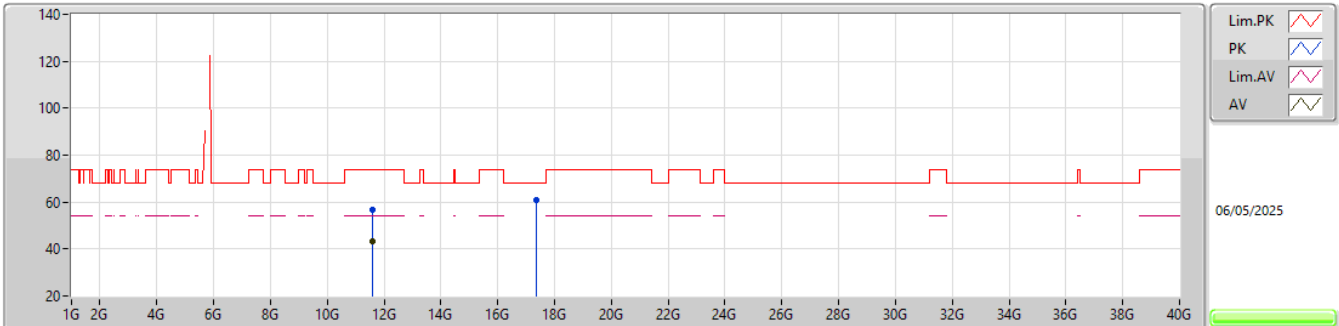EUT_X_2TX
Setting 20
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.59966G	56.75	74.00	-17.25	51.16	3	Horizontal	332	1.44	-	38.90	11.95	45.26			
AV	11.60083G	43.18	54.00	-10.82	37.59	3	Horizontal	332	1.44	-	38.90	11.95	45.26			
PK	17.37354G	61.09	68.20	-7.11	49.89	3	Horizontal	105	1.90	-	41.89	14.05	44.74			

5.15-5.25GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5210MHz_TX

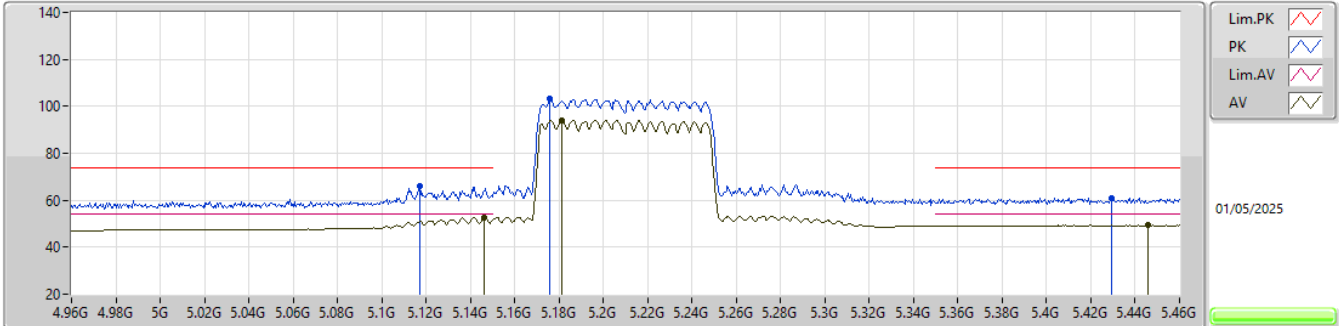


EUT_X_2TX
Setting 12.5
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.117G	66.14	74.00	-7.86	60.14	3	Vertical	287	2.39	-	33.90	7.41	35.31			
AV	5.146G	52.57	54.00	-1.43	46.49	3	Vertical	287	2.39	-	33.90	7.48	35.30			
PK	5.176G	103.17	Inf	-Inf	96.92	3	Vertical	287	2.39	-	34.00	7.55	35.30			
AV	5.1815G	94.14	Inf	-Inf	87.84	3	Vertical	287	2.39	-	34.03	7.57	35.30			
PK	5.4295G	61.10	74.00	-12.90	53.89	3	Vertical	287	2.39	-	34.64	7.82	35.25			
AV	5.4455G	49.37	54.00	-4.63	42.21	3	Vertical	287	2.39	-	34.61	7.80	35.25			

5.15-5.25GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX


5210MHz_TX

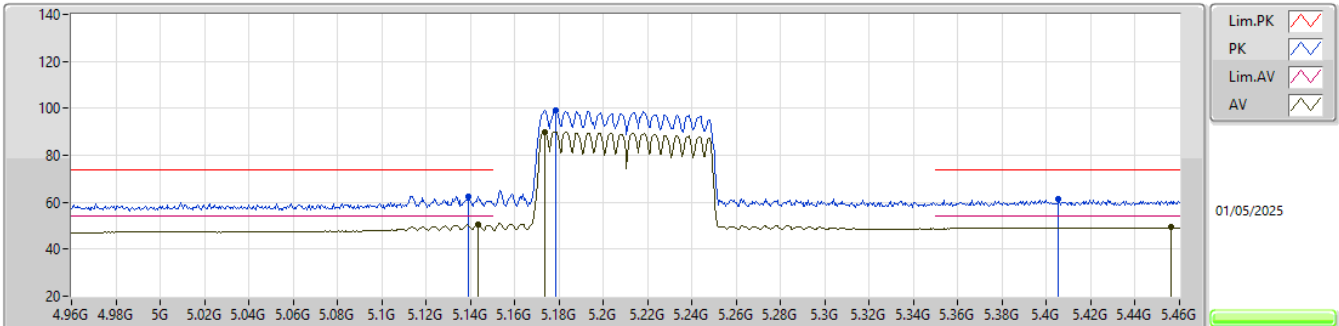EUT_X_2TX
Setting 12.5
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.139G	62.46	74.00	-11.54	56.39	3	Horizontal	354	2.40	-	33.90	7.47	35.30			
AV	5.1435G	50.39	54.00	-3.61	44.31	3	Horizontal	354	2.40	-	33.90	7.48	35.30			
PK	5.1785G	98.96	Inf	-Inf	92.69	3	Horizontal	354	2.40	-	34.01	7.56	35.30			
AV	5.1735G	90.05	Inf	-Inf	83.81	3	Horizontal	354	2.40	-	33.99	7.55	35.30			
PK	5.4055G	61.55	74.00	-12.45	54.27	3	Horizontal	354	2.40	-	34.69	7.85	35.26			
AV	5.456G	49.36	54.00	-4.64	42.22	3	Horizontal	354	2.40	-	34.60	7.79	35.25			

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TX

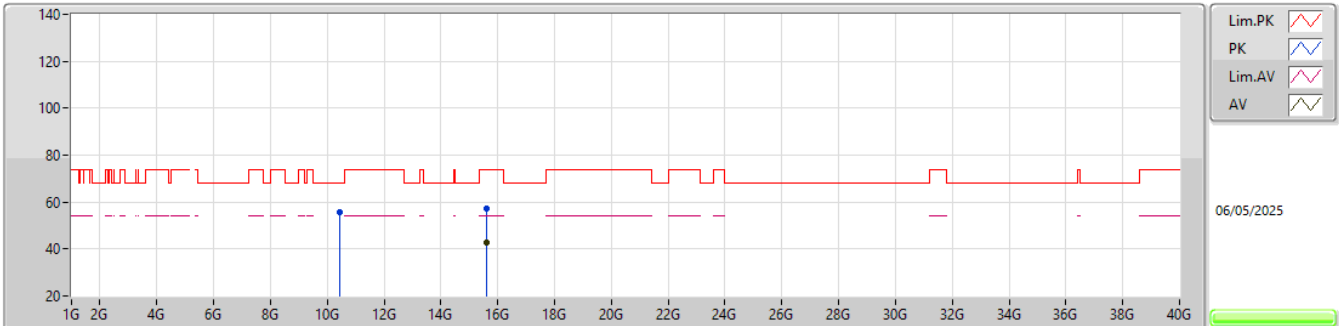


EUT_X_2TX
Setting 12.5
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.43176G	55.56	68.20	-12.64	51.54	3	Vertical	162	1.80	-	38.76	10.76	45.50			
PK	15.6153G	57.32	74.00	-16.68	50.58	3	Vertical	329	2.28	-	38.31	13.61	45.18			
AV	15.61704G	42.89	54.00	-11.11	36.16	3	Vertical	329	2.28	-	38.30	13.61	45.18			

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TX

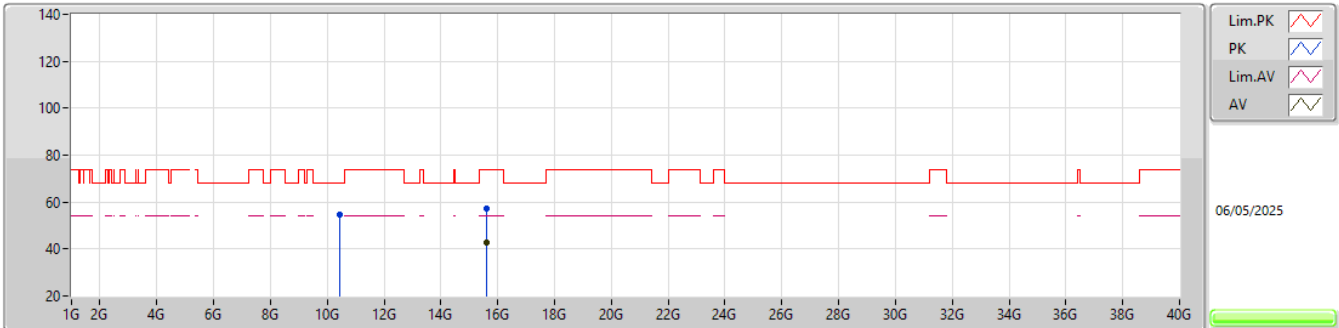


EUT_X_2TX
Setting 12.5
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.42957G	54.86	68.20	-13.34	50.84	3	Horizontal	6	1.65	-	38.76	10.76	45.50			
PK	15.62031G	57.40	74.00	-16.60	50.69	3	Horizontal	131	1.89	-	38.28	13.61	45.18			
AV	15.61821G	42.98	54.00	-11.02	36.26	3	Horizontal	131	1.89	-	38.29	13.61	45.18			

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX


5290MHz_TX

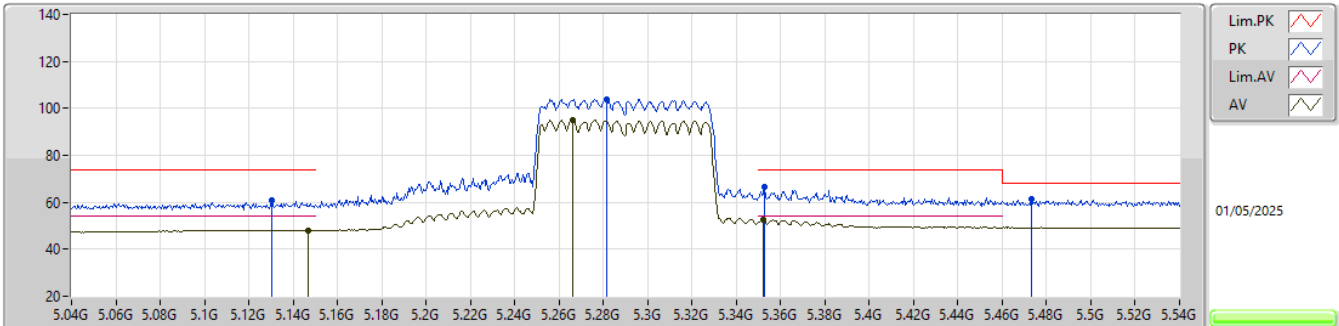EUT_X_2TX
Setting 15
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1305G	61.10	74.00	-12.90	55.06	3	Vertical	287	2.33	-	33.90	7.45	35.31			
AV	5.147G	48.10	54.00	-5.90	42.01	3	Vertical	287	2.33	-	33.90	7.49	35.30			
PK	5.2815G	103.76	Inf	-Inf	97.04	3	Vertical	287	2.33	-	34.29	7.71	35.28			
AV	5.266G	95.06	Inf	-Inf	88.45	3	Vertical	287	2.33	-	34.20	7.69	35.28			
PK	5.3525G	66.38	74.00	-7.62	59.34	3	Vertical	287	2.33	-	34.51	7.80	35.27			
AV	5.352G	52.74	54.00	-1.26	45.70	3	Vertical	287	2.33	-	34.51	7.80	35.27			
PK	5.473G	61.37	68.20	-6.83	54.24	3	Vertical	287	2.33	-	34.60	7.77	35.24			

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX


5290MHz_TX

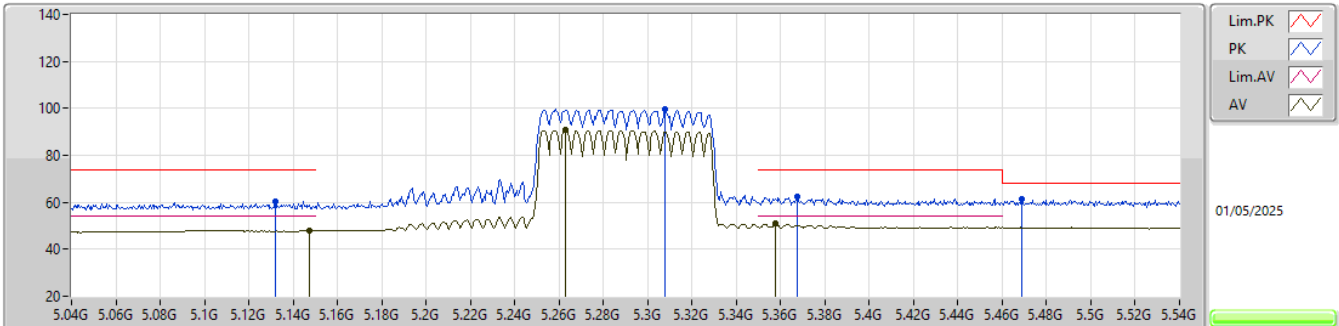EUT_X_2TX
Setting 15
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.132G	60.11	74.00	-13.89	54.07	3	Horizontal	338	2.74	-	33.90	7.45	35.31			
AV	5.1475G	47.90	54.00	-6.10	41.81	3	Horizontal	338	2.74	-	33.90	7.49	35.30			
PK	5.308G	99.76	Inf	-Inf	92.86	3	Horizontal	338	2.74	-	34.42	7.75	35.27			
AV	5.263G	90.74	Inf	-Inf	84.15	3	Horizontal	338	2.74	-	34.18	7.69	35.28			
PK	5.3675G	62.29	74.00	-11.71	55.16	3	Horizontal	338	2.74	-	34.57	7.82	35.26			
AV	5.3575G	50.83	54.00	-3.17	43.76	3	Horizontal	338	2.74	-	34.53	7.81	35.27			
PK	5.469G	61.26	68.20	-6.94	54.14	3	Horizontal	338	2.74	-	34.60	7.77	35.25			

5.25-5.35GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TX

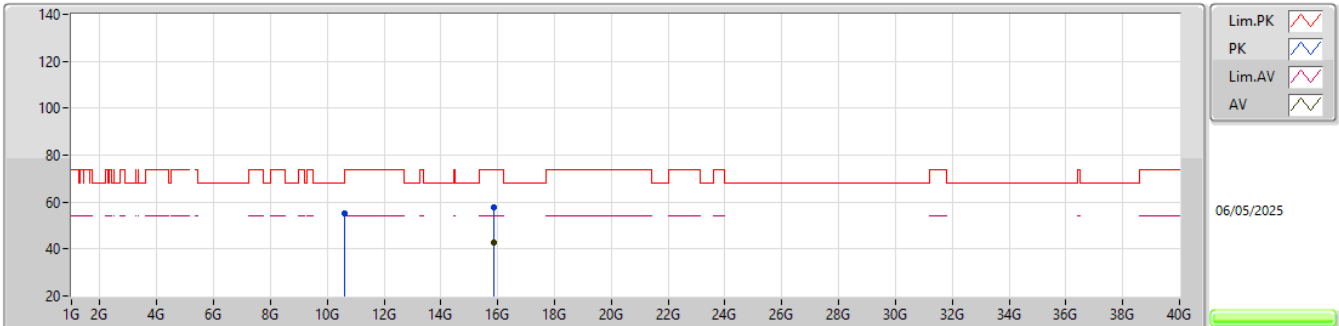


EUT_X_2TX
Setting 15
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59008G	55.21	68.20	-12.99	50.82	3	Vertical	202	1.84	-	39.10	10.92	45.63			
PK	15.86247G	57.68	74.00	-16.32	50.66	3	Vertical	325	1.41	-	38.45	13.64	45.07			
AV	15.86154G	42.98	54.00	-11.02	35.96	3	Vertical	325	1.41	-	38.45	13.64	45.07			

5.25-5.35GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5290MHz_TX

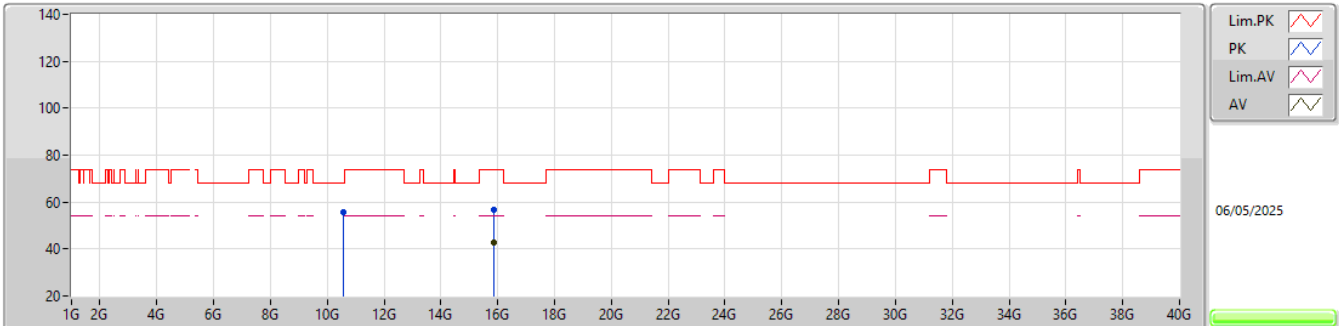EUT_X_2TX
Setting 15
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.58768G	55.88	68.20	-12.32	51.49	3	Horizontal	89	1.75	-	39.10	10.92	45.63			
PK	15.86817G	56.73	74.00	-17.27	49.69	3	Horizontal	323	1.81	-	38.47	13.64	45.07			
AV	15.86271G	42.95	54.00	-11.05	35.93	3	Horizontal	323	1.81	-	38.45	13.64	45.07			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5530MHz_TX

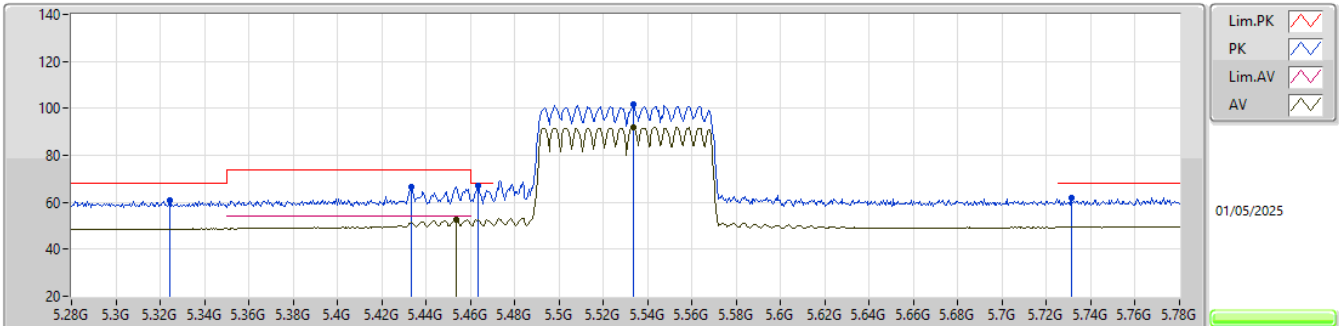EUT_X_2TX
Setting 13.5
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.3245G	60.78	68.20	-7.42	53.83	3	Vertical	355	1.08	-	34.45	7.77	35.27			
PK	5.4335G	66.50	74.00	-7.50	59.30	3	Vertical	355	1.08	-	34.63	7.82	35.25			
PK	5.4635G	66.83	68.20	-1.37	59.70	3	Vertical	355	1.08	-	34.60	7.78	35.25			
AV	5.4535G	52.44	54.00	-1.56	45.30	3	Vertical	355	1.08	-	34.60	7.79	35.25			
PK	5.5335G	101.50	Inf	-Inf	94.52	3	Vertical	355	1.08	-	34.53	7.69	35.24			
AV	5.5335G	91.77	Inf	-Inf	84.79	3	Vertical	355	1.08	-	34.53	7.69	35.24			
PK	5.731G	61.99	68.20	-6.21	55.17	3	Vertical	355	1.08	-	34.20	7.84	35.22			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TX

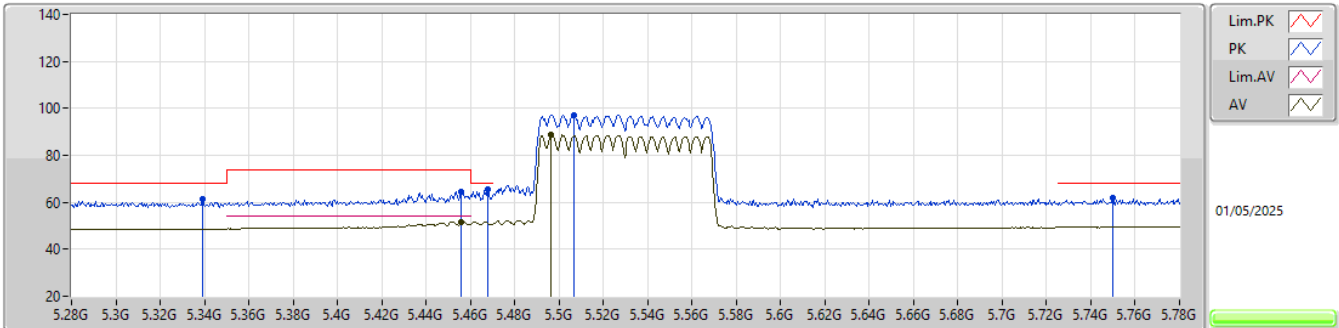


EUT_X_2TX
Setting 13.5
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.339G	61.13	68.20	-7.07	54.14	3	Horizontal	291	1.06	-	34.48	7.78	35.27			
PK	5.456G	64.33	74.00	-9.67	57.19	3	Horizontal	291	1.06	-	34.60	7.79	35.25			
AV	5.456G	51.64	54.00	-2.36	44.50	3	Horizontal	291	1.06	-	34.60	7.79	35.25			
PK	5.468G	65.61	68.20	-2.59	58.48	3	Horizontal	291	1.06	-	34.60	7.78	35.25			
PK	5.5065G	97.18	Inf	-Inf	90.10	3	Horizontal	291	1.06	-	34.59	7.73	35.24			
AV	5.4965G	88.75	Inf	-Inf	81.65	3	Horizontal	291	1.06	-	34.60	7.74	35.24			
PK	5.75G	61.70	68.20	-6.50	54.85	3	Horizontal	291	1.06	-	34.20	7.87	35.22			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TX

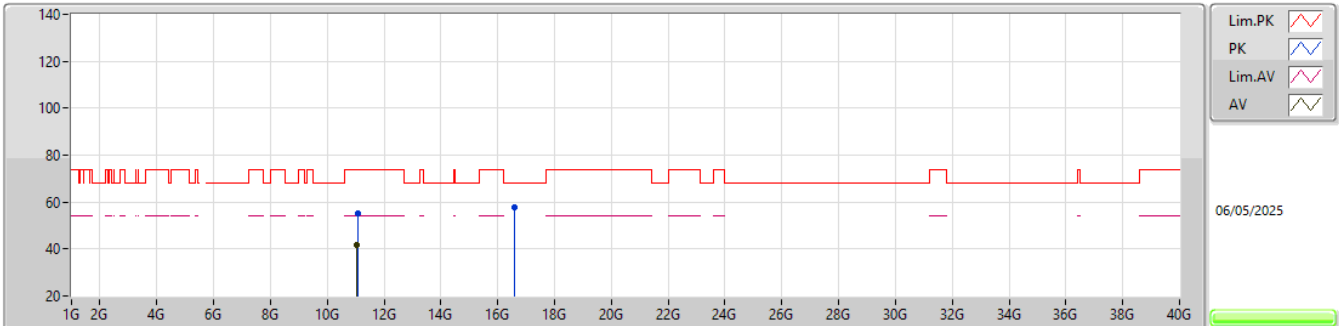


EUT_X_2TX
Setting 13.5
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.06054G	55.22	74.00	-18.78	50.76	3	Vertical	60	1.51	-	39.00	11.40	45.94			
AV	11.05544G	41.62	54.00	-12.38	37.17	3	Vertical	60	1.51	-	39.00	11.40	45.95			
PK	16.59792G	57.55	68.20	-10.65	49.73	3	Vertical	90	1.98	-	39.60	13.82	45.60			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TX

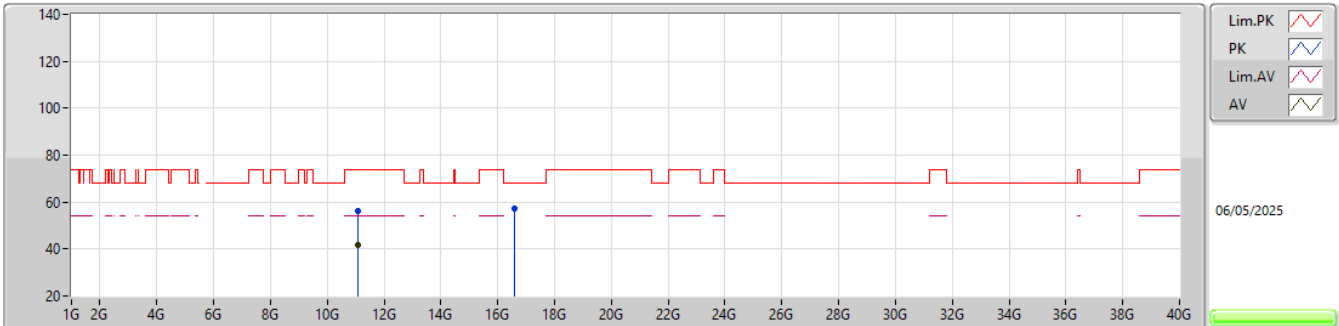


EUT_X_2TX
Setting 13.5
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.06576G	56.10	74.00	-17.90	51.62	3	Horizontal	83	1.85	-	39.00	11.41	45.93			
AV	11.06642G	41.62	54.00	-12.38	37.14	3	Horizontal	83	1.85	-	39.00	11.41	45.93			
PK	16.59717G	57.22	68.20	-10.98	49.40	3	Horizontal	66	1.77	-	39.60	13.82	45.60			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TX

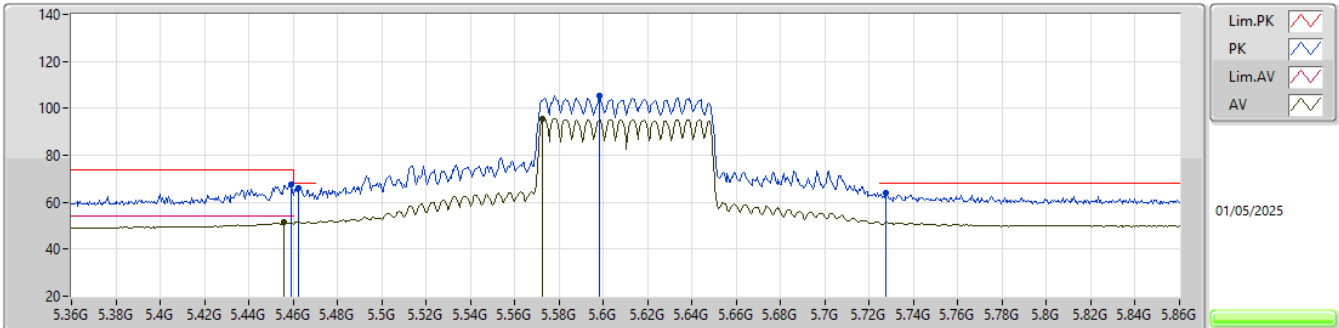


EUT_X_2TX
Setting 17.5
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.459G	67.83	74.00	-6.17	60.69	3	Vertical	355	1.00	-	34.60	7.79	35.25
AV	5.456G	51.30	54.00	-2.70	44.16	3	Vertical	355	1.00	-	34.60	7.79	35.25
PK	5.4625G	66.01	68.20	-2.19	58.88	3	Vertical	355	1.00	-	34.60	7.78	35.25
PK	5.598G	105.39	Inf	-Inf	98.70	3	Vertical	355	1.00	-	34.31	7.61	35.23
AV	5.5725G	95.50	Inf	-Inf	88.68	3	Vertical	355	1.00	-	34.41	7.64	35.23
PK	5.7275G	63.97	68.20	-4.23	57.16	3	Vertical	355	1.00	-	34.20	7.83	35.22

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5610MHz_TX

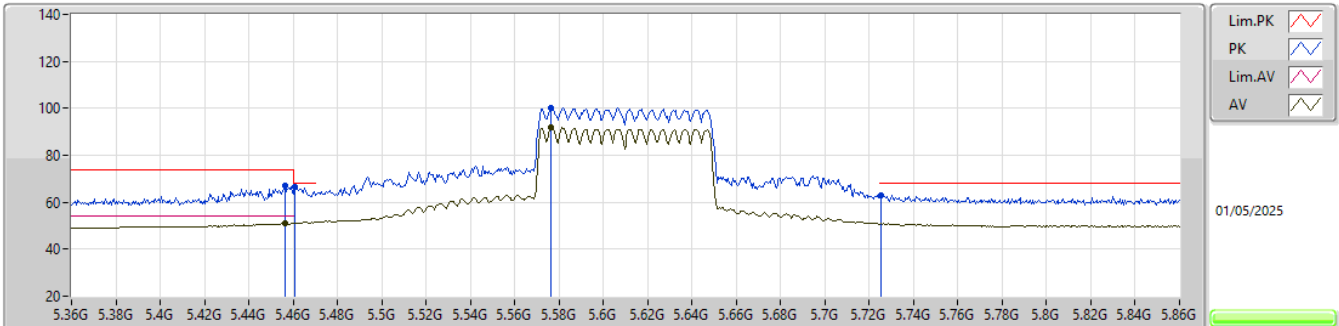EUT_X_2TX
Setting 17.5
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4565G	67.00	74.00	-7.00	59.86	3	Horizontal	290	1.00	-	34.60	7.79	35.25			
AV	5.4565G	51.12	54.00	-2.88	43.98	3	Horizontal	290	1.00	-	34.60	7.79	35.25			
PK	5.461G	66.57	68.20	-1.63	59.44	3	Horizontal	290	1.00	-	34.60	7.78	35.25			
PK	5.5765G	100.34	Inf	-Inf	93.54	3	Horizontal	290	1.00	-	34.39	7.64	35.23			
AV	5.5765G	92.14	Inf	-Inf	85.34	3	Horizontal	290	1.00	-	34.39	7.64	35.23			
PK	5.7255G	62.90	68.20	-5.30	56.09	3	Horizontal	290	1.00	-	34.20	7.83	35.22			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TX

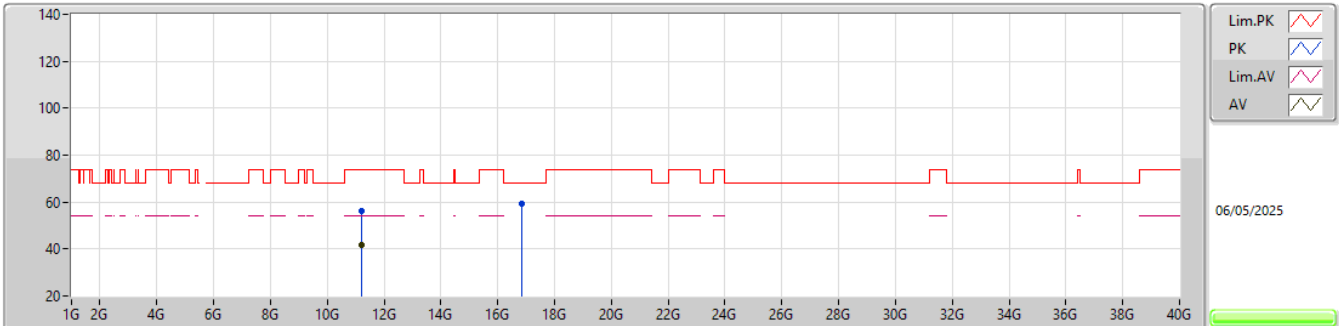


EUT_X_2TX
Setting 17.5
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.21958G	56.33	74.00	-17.67	51.62	3	Vertical	227	1.38	-	38.84	11.56	45.69			
AV	11.22426G	41.66	54.00	-12.34	36.92	3	Vertical	227	1.38	-	38.85	11.57	45.68			
PK	16.84251G	59.15	68.20	-9.05	50.45	3	Vertical	350	1.51	-	40.37	13.89	45.56			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5610MHz_TX

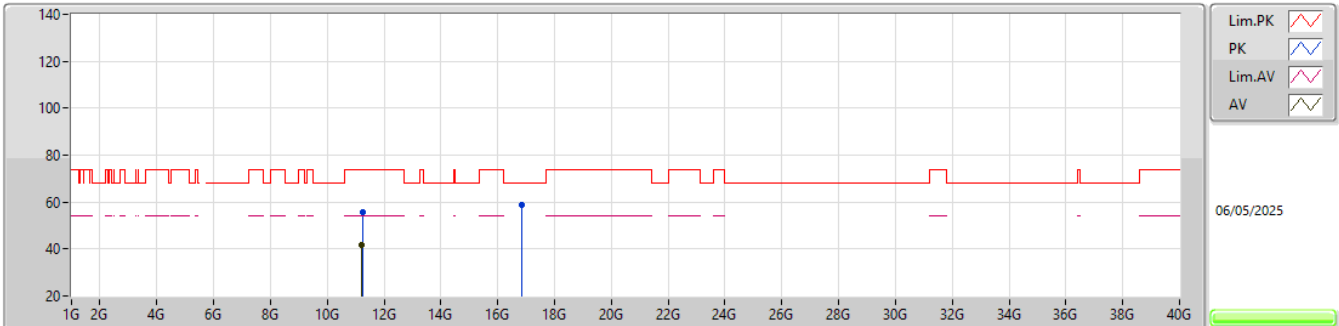EUT_X_2TX
Setting 17.5
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.23371G	55.57	74.00	-18.43	50.79	3	Horizontal	280	1.52	-	38.87	11.58	45.67			
AV	11.2239G	41.59	54.00	-12.41	36.85	3	Horizontal	280	1.52	-	38.85	11.57	45.68			
PK	16.8309G	58.61	68.20	-9.59	49.96	3	Horizontal	293	1.84	-	40.32	13.89	45.56			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5690MHz Straddle 5.47-5.725GHz_TX

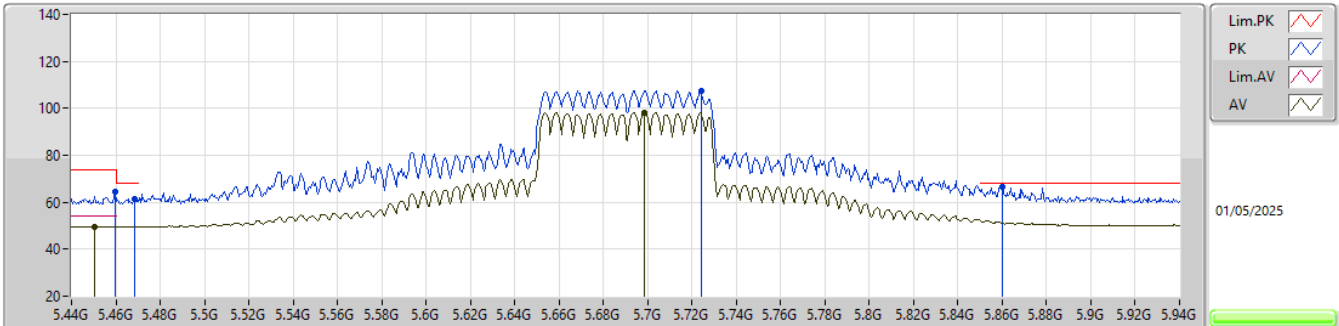EUT_X_2TX
Setting 19.5
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4595G	64.51	74.00	-9.49	57.37	3	Vertical	320	1.12	-	34.60	7.79	35.25			
AV	5.4505G	49.60	54.00	-4.40	42.45	3	Vertical	320	1.12	-	34.60	7.80	35.25			
PK	5.4685G	61.53	68.20	-6.67	54.41	3	Vertical	320	1.12	-	34.60	7.77	35.25			
PK	5.724G	107.49	Inf	-Inf	100.68	3	Vertical	320	1.12	-	34.20	7.83	35.22			
AV	5.6985G	98.10	Inf	-Inf	91.34	3	Vertical	320	1.12	-	34.20	7.78	35.22			
PK	5.86G	66.61	68.20	-1.59	59.45	3	Vertical	320	1.12	-	34.34	8.02	35.20			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5690MHz Straddle 5.47-5.725GHz_TX

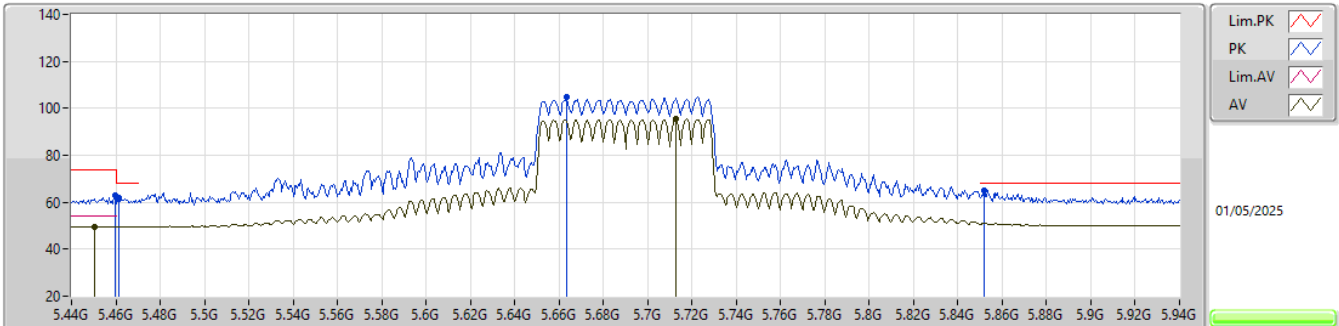EUT_X_2TX
Setting 19.5
03-P-G-4-10

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.4595G	62.76	74.00	-11.24	55.62	3	Horizontal	343	3.00	-	34.60	7.79	35.25			
AV	5.4505G	49.60	54.00	-4.40	42.45	3	Horizontal	343	3.00	-	34.60	7.80	35.25			
PK	5.4615G	61.92	68.20	-6.28	54.79	3	Horizontal	343	3.00	-	34.60	7.78	35.25			
PK	5.6635G	104.84	Inf	-Inf	98.07	3	Horizontal	343	3.00	-	34.27	7.72	35.22			
AV	5.7125G	95.29	Inf	-Inf	88.50	3	Horizontal	343	3.00	-	34.20	7.81	35.22			
PK	5.852G	64.97	68.20	-3.23	57.85	3	Horizontal	343	3.00	-	34.31	8.01	35.20			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5690MHz Straddle 5.47-5.725GHz_TX

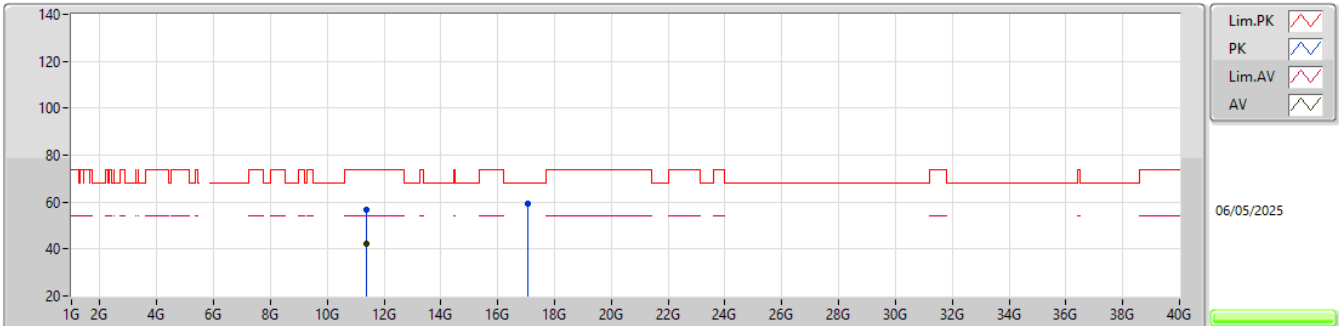EUT X_2TX
Setting 19.5
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.37283G	56.69	74.00	-17.31	51.31	3	Vertical	257	1.84	-	39.10	11.72	45.44			
AV	11.38771G	42.48	54.00	-11.52	37.06	3	Vertical	257	1.84	-	39.10	11.74	45.42			
PK	17.05575G	59.28	68.20	-8.92	49.82	3	Vertical	306	1.66	-	40.92	13.96	45.42			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5690MHz Straddle 5.47-5.725GHz_TX

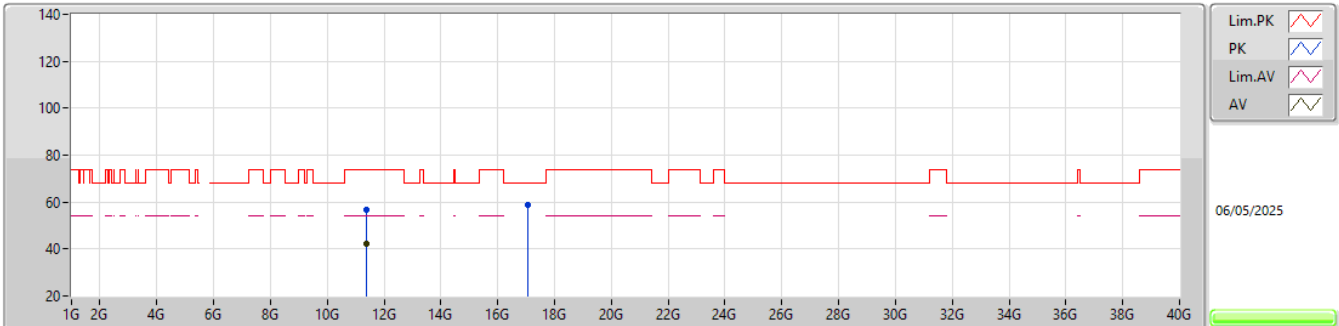EUT_X_2TX
Setting 19.5
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.37265G	56.96	74.00	-17.04	51.58	3	Horizontal	8	1.44	-	39.10	11.72	45.44			
AV	11.39263G	42.45	54.00	-11.55	37.02	3	Horizontal	8	1.44	-	39.10	11.74	45.41			
PK	17.05584G	58.92	68.20	-9.28	49.46	3	Horizontal	308	1.35	-	40.92	13.96	45.42			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TX

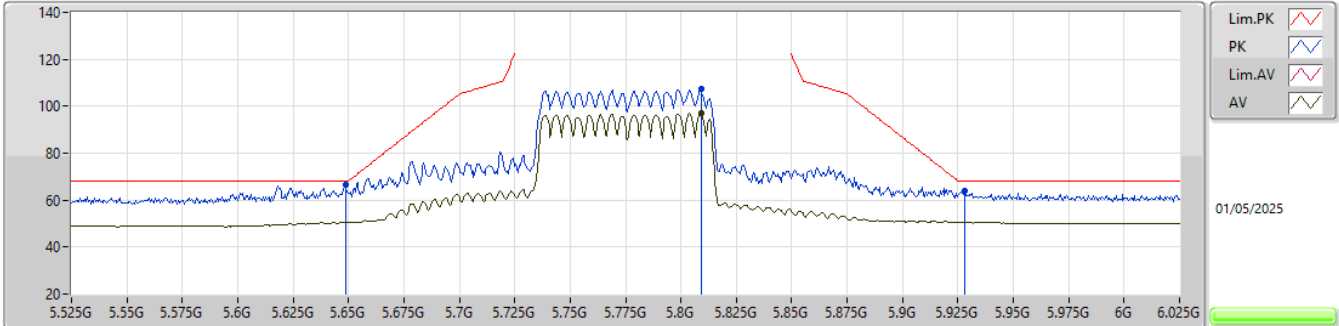


EUT_X_2TX
Setting 16
03-P-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.6485G	66.79	68.20	-1.41	60.03	3	Vertical	324	1.02	-	34.30	7.69	35.23				
PK	5.809G	107.29	Inf	-Inf	100.31	3	Vertical	324	1.02	-	34.22	7.97	35.21				
AV	5.809G	96.96	Inf	-Inf	89.98	3	Vertical	324	1.02	-	34.22	7.97	35.21				
PK	5.928G	63.72	68.20	-4.48	56.22	3	Vertical	324	1.02	-	34.61	8.09	35.20				

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TX

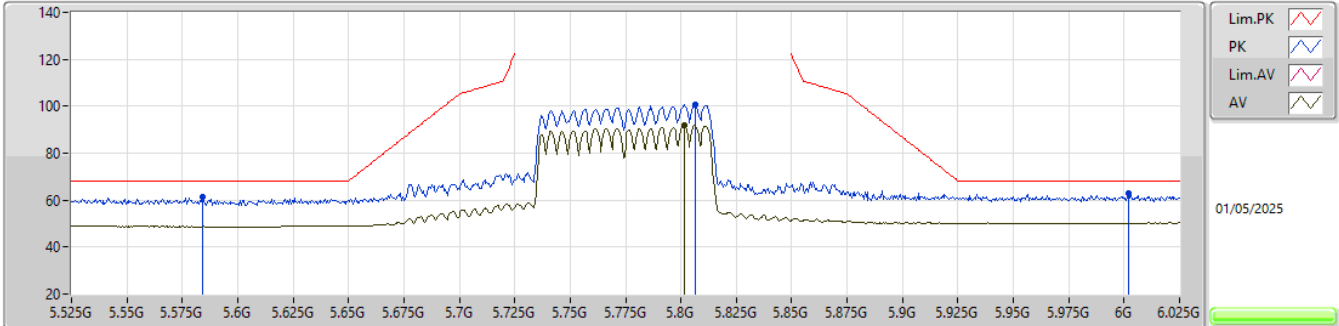


EUT_X_2TX
Setting 16
03-P-G-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.584G	61.40	68.20	-6.80	54.64	3	Horizontal	359	2.47	-	34.36	7.63	35.23			
PK	5.8065G	100.75	Inf	-Inf	93.78	3	Horizontal	359	2.47	-	34.21	7.97	35.21			
AV	5.8015G	91.85	Inf	-Inf	84.90	3	Horizontal	359	2.47	-	34.20	7.96	35.21			
PK	6.002G	63.09	68.20	-5.11	55.41	3	Horizontal	359	2.47	-	34.70	8.17	35.19			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5775MHz_TX

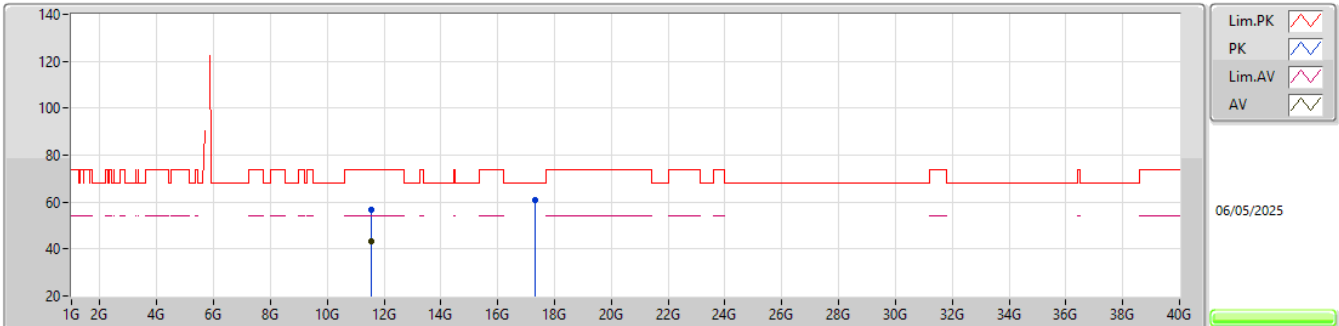EUT_X_2TX
Setting 16
01-U-G-5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.54391G	56.81	74.00	-17.19	51.18	3	Vertical	150	1.86	-	38.99	11.89	45.25			
AV	11.56479G	43.03	54.00	-10.97	37.40	3	Vertical	150	1.86	-	38.97	11.92	45.26			
PK	17.32212G	61.11	68.20	-7.09	50.19	3	Vertical	261	1.60	-	41.74	14.03	44.85			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TX

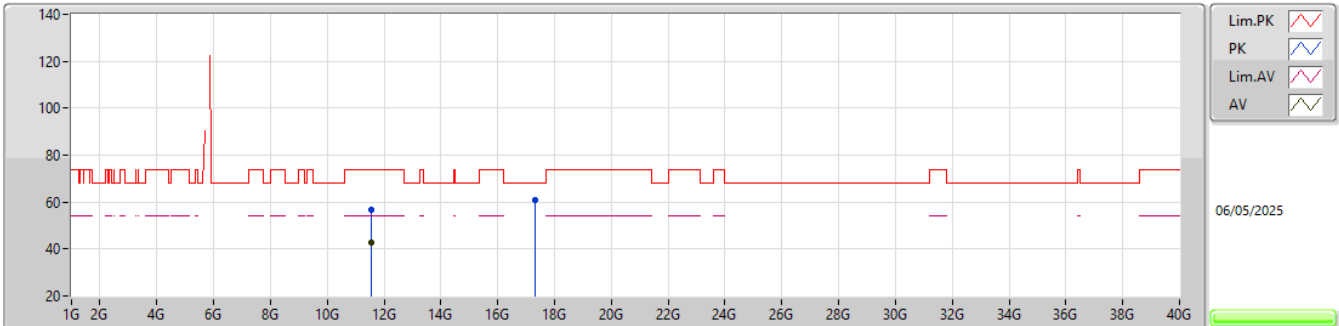EUT_X_2TX
Setting 16
01-U-G-5


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	11.55123G	56.87	74.00	-17.13	51.22	3	Horizontal	143	1.85	-	39.00	11.90	45.25			
AV	11.56029G	42.92	54.00	-11.08	37.28	3	Horizontal	143	1.85	-	38.98	11.91	45.25			
PK	17.33577G	60.91	68.20	-7.29	49.92	3	Horizontal	75	1.49	-	41.77	14.04	44.82			



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	4.92325G	44.79	54.00	-9.21	Vertical

Mode 1

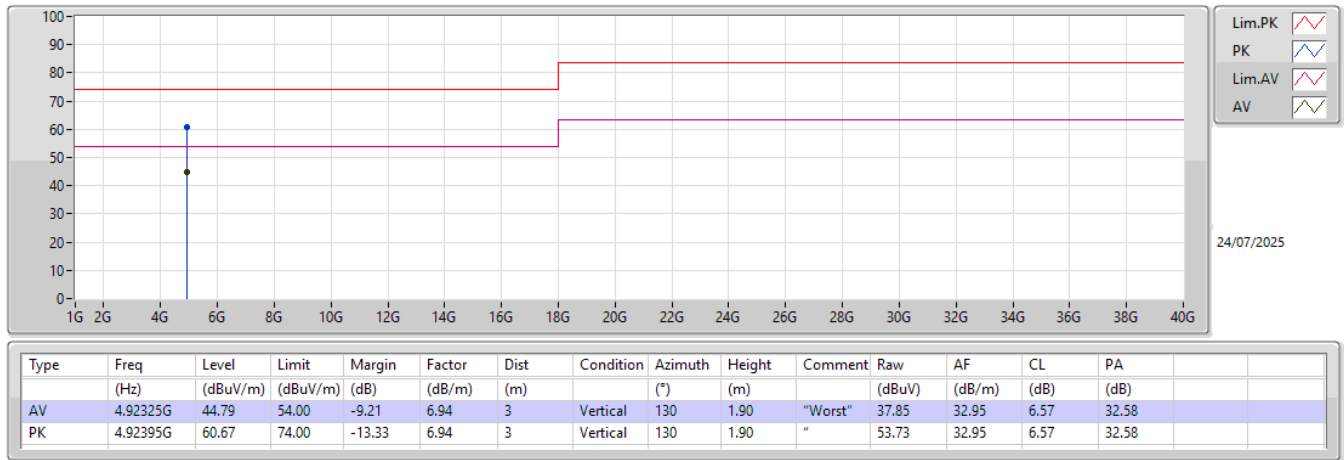

Mode 1

