

Produkte
Products

Prüfbericht - Nr.: 14042865 001

Test Report No.:

Seite 1 von 13
Page 1 of 13

Auftraggeber: Welly Die Casting Fty. Ltd.
Client: Flat H, I, 18/F Shield Industrial Centre
 Hong Kong

Gegenstand der Prüfung: Short Range Device - Radio Controlled Toy Transmitter (2.4GHz)
Test Item:

Bezeichnung: Please refer to "Models" on page 4
Identification:

Serien-Nr.:
Serial No.:

Engineering sample

Wareneingangs-Nr.: A000314477-001
Receipt No.: A000320539-002

Eingangsdatum: 28.01.2016
Date of Receipt: 24.02.2016

Zustand des Prüfgegenstandes bei Anlieferung: Test sample is not damaged and suitable for testing.
Condition of test item at delivery:

Prüfort: TÜV Rheinland Hong Kong Ltd.
Testing Location: 3/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, Hong Kong
 Global United Technology Services Co., Ltd.
 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, China

Prüfgrundlage: FCC Part 15 Subpart C
Test Specification: ANSI C63.10-2013

Prüfergebnis: Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage.
Test Results: The above mentioned product was tested and **passed**.

Prüflaboratorium: TÜV Rheinland Hong Kong Ltd.
Testing Laboratory: 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, Hong Kong

geprüft/ tested by:

kontrolliert/ reviewed by:

17.01.2017	Joey Leung Project Manager		17.01.2017	Benny Lau Senior Project Manager	
Datum Date	Name/Stellung Name/Position	Unterschrift Signature	Datum Date	Name/Stellung Name/Position	Unterschrift Signature

Sonstiges: FCC ID: TOG84000W
 Other Aspects

Abkürzungen: P(pass) = entspricht Prüfgrundlage
 F(fail) = entspricht nicht Prüfgrundlage
 N/A = nicht anwendbar
 N/T = nicht getestet

Abbreviations: P(pass) = passed
 F(fail) = failed
 N/A = not applicable
 N/T = not tested

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.

This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	4
Manufacturers declarations	4
Product function and intended use.....	4
Submitted documents.....	5
Independent Operation Modes	5
Related Submittal(s) Grants	5
Remark	5
Test Set-up and Operation Mode.....	6
Principle of Configuration Selection	6
Test Operation and Test Software.....	6
Special Accessories and Auxiliary Equipment.....	6
Countermeasures to achieve EMC Compliance.....	6
Test Methodology	7
Radiated Emission	7
Field Strength Calculation.....	7
Test Setup Diagram	8
List of Test and Measurement Instruments.....	9
Measurement Uncertainty	10
Results FCC Part 15 – Subpart C	11
FCC 15.203 – Antenna Requirement 1.....	Pass 11
FCC 15.204 – Antenna Requirement 2.....	Pass 11
FCC 15.207 – Conducted Emission on AC Mains	N/A 11
FCC 15.215(c) – 20 dB Bandwidth	Pass 11
FCC 15.249(a) – Field Strength of Fundamental and Harmonics	Pass 12
FCC 15.249 (d), 15.205 – Out Of Band Radiated Emission.....	Pass 13
Appendix 1 – Test protocols	2 pages
Appendix 2 – Test setup	3 pages
Appendix 3 – EUT External Photos	4 pages
Appendix 4 – EUT Internal Photos	3 pages

Appendix 5 – RF exposure information 2 pages

Product information

Manufacturers declarations

	Transmitter
Operating frequency range	2475MHz
Type of modulation	GFSK
Type of antenna	Wire Antenna
Power level	fix
Connection to public utility power line	No
Nominal voltage	V _{nor} : 3.0 V (2 x 1.5V AA size battery)

Product function and intended use

The equipment under test (EUT) is a radio control toy transmitter operating at 2.4GHz. It is powered by battery only.

FCC ID: TOG84000W

Models	Product description
84001W, 84002W, 84003W, 84004W, 84005W, 84006W, 84008W, 84009W, 84010W, 84011W, 84012W, 84013W, 84014W, 84015W, 84016W, 84016FRW, 84017W, 84018W, 84019W, 84020W, 84021W, 84022W, 84023W, 84024W, 84025W, 84026W, 84027W, 84028W, 84029W, 84030W, 84031W, 84032W, 84033W, 84034W, 84035W, 84036W, 84037W, 84038W, 84039W, 84040W, 84041W, 84042W, 84043W, 84044W, 84045W, 84046W, 84047W, 84048W, 84049W, 84050W, 84051W, 84052W, 84053W, 84054W, 84055W, 84056W, 84057W, 84058W, 84059W, 84060W, 84061W, 84062W, 84063W, 84064W, 84065W, 84066W, 84067W, 84068W, 84069W, 84070W, 84071W, 84082W, 84083W, 84084W, 84085W, 84086W, 84087W, 84088W, 84089W, 84090W	Radio Controlled Toy

Submitted documents

Circuit Diagram
Block Diagram
Bill of material
User manual
Rating Label

Independent Operation Modes

The basic operation mode is transmitting mode.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

During testing, the EUT was programmed to test mode by manufacturer. Change of transmitting frequency can be achieved by pressing a built-in button on EUT. Output power of EUT was set to fixed level throughout testing.

Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- none

Countermeasures to achieve EMC Compliance

- none

Test Methodology

Radiated Emission

The radiated emission measurements were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz, the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz, the EUT was placed at the middle of the 1.5 m height turntable. And the turntable is 3 meters far from the measuring antenna. In addition, RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360 °, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.


FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.


Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

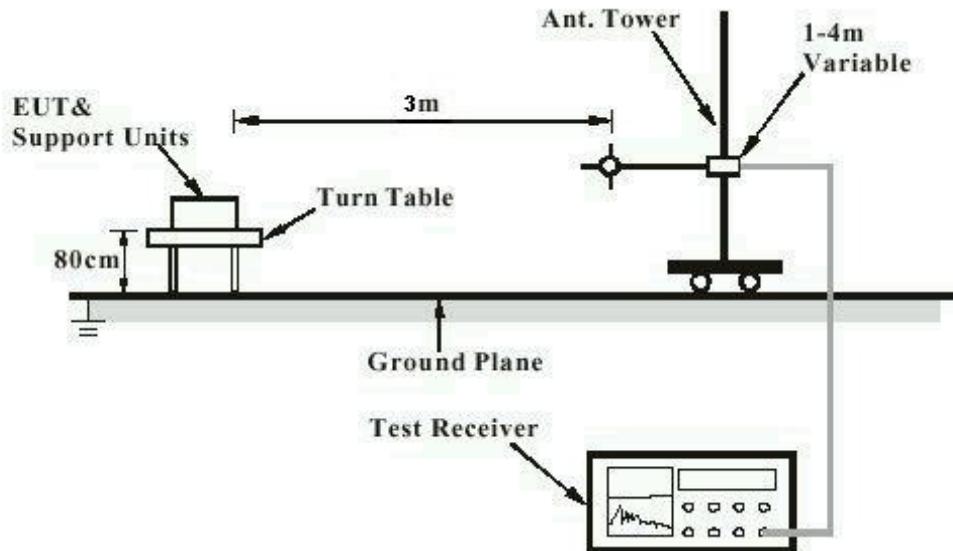

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

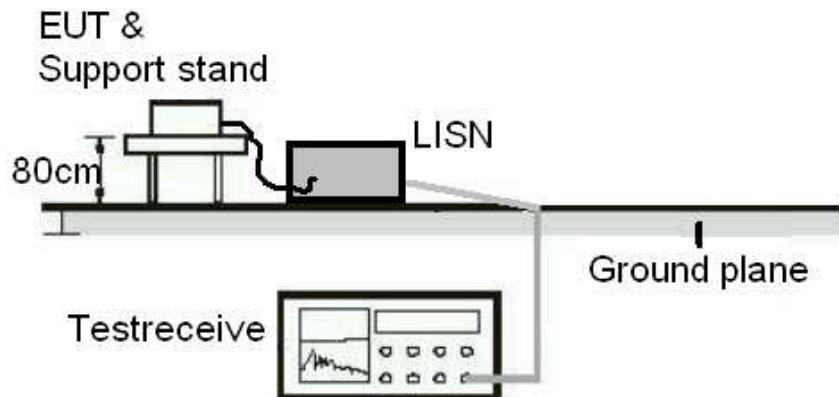

List of Test and Measurement Instruments

Global United Technology Services Co., Ltd.

Radiated Emission

Equipment	Manufacturer	Type	S/N	Last Cal. Date	Cal. Due date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	---	02 Jul 2015	02 Jul 2020
Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	---	N/A	N/A
ESU EMI Test Receiver	R&S	ESU26	---	29 Jun 2016	28 Jun 2017
Bi-log Hybrid Antenna	SCHWARZBECK	VULB9163	---	29 Jun 2016	28 Jun 2017
Double-ridged horn antenna	SCHWARZBECK	9120D	---	29 Jun 2016	28 Jun 2017
RF Amplifier	HP	8347A	---	29 Jun 2016	28 Jun 2017
EMI Test Software	AUDIX	E3	---	N/A	N/A
Coaxial Cable	GTS	N/A	---	N/A	N/A
Thermo meter	N/A	N/A	---	29 Jun 2016	28 Jun 2017
Loop Antenna	Zhinan	ZN30900A	---	29 Jun 2016	28 Jun 2017

TÜV Rheinland Hong Kong Ltd

Radio Frequency Test

Equipment	Manufacturer	Type	S/N	Last Cal. Date	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSP30	100610	20 Jan 2016	19 Jan 2017

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is $\pm 2.58\text{dB}$.

The estimated combined standard uncertainty for radiated emissions measurements is $\pm 3.44\text{dB}$.

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C

FCC 15.203 – Antenna Requirement 1		Pass		
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device				
Results:	Antenna type:	Fixed Integral wire antenna		
Verdict:	Pass			
FCC 15.204 – Antenna Requirement 2		Pass		
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.				
Results:	Only one integral antenna can be used.			
Verdict:	N/A			
FCC 15.207 – Conducted Emission on AC Mains		N/A		
There is no AC power input or output ports on the EUT.				
FCC 15.215(c) – 20 dB Bandwidth		Pass		
Test Specification : ANSI C63.10 – 2013 Mode of operation : Tx mode Port of testing : Enclosure RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.0VDC, 2 x 1.5V AA size new battery Temperature : 23°C Humidity : 50%				
Requirement: The intentional radiators must be designed to ensure that the 20dB bandwidth of the emission, is contained within the frequency band designated in the rule section under which the equipment is operated.				
Results:	For test protocols refer to Appendix 1, page 2-3.			
Frequency (MHz)	20 dB left (MHz)	Limit (MHz)	20 dB right (MHz)	Limit (MHz)
2475	2474.56	> 2400	2476.69	< 2483.5

FCC 15.249(a) – Field Strength of Fundamental and Harmonics		Pass
Test Specification	: ANSI C63.10 – 2013	
Mode of operation	: Tx mode	
Port of testing	: Enclosure	
Frequency range	: 9kHz – 25GHz	
RBW/VBW	: 100 kHz / 300 kHz for f < 1 GHz 1 MHz / 3 MHz for f > 1 GHz	
Supply voltage	: 3.0VDC, 2 x 1.5V AA size new battery	
Temperature	: 23°C	
Humidity	: 50%	
Requirement:	The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following limit.	
Results:	PASS.	
Fundamental Frequency 2475MHz		Vertical Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2474.925	93.53	114.0 / PK
2474.925	82.60	94.0 / AV
Fundamental Frequency 2475MHz		Horizontal Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2474.910	86.12	114.0 / PK
2474.910	74.19	94.0 / AV
Harmonics 2475MHz		Vertical Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4950.000	68.67	74.0 / P
4950.000	44.83	54.0 / A
7425.000	64.55	74.0 / P
7425.000	44.55	54.0 / A
Harmonics 2475MHz		Horizontal Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4950.015	61.61	74.0 / P
4950.015	43.08	54.0 / A
7425.000	60.81	74.0 / P
7425.000	44.36	54.0 / A

FCC 15.249 (d), 15.205 – Out Of Band Radiated Emission		Pass
Test Specification	: ANSI C63.10 – 2013	
Mode of operation	: Tx mode	
Port of testing	: Enclosure	
Detector	: Peak	
Frequency range	: 9kHz – 25GHz	
RBW/VBW	: 1 MHz / 3 MHz for f > 1 GHz	
Supply voltage	: 3.0VDC, 2 x 1.5V AA size new battery	
Temperature	: 23°C	
Humidity	: 50%	
Requirement:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.	
Results:	Transmitting frequency mode comply with the field strength limit of section 15.209. There is no spurious found below 30MHz.	
Tx frequency 2475MHz	Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	34.52	74.0 / PK
2400.000	23.48	54.0 / AV
2483.500	63.41	74.0 / PK
2483.500	34.50	54.0 / AV
Tx frequency 2475MHz	Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	34.27	74.0 / PK
2400.000	23.23	54.0 / AV
2483.500	59.54	74.0 / PK
2483.500	33.63	54.0 / AV