



FCC TEST REPORT (BLUETOOTH)

REPORT NO.: RF980604L08-3

MODEL NO.: SC800 (refer to item 3.1 for more details)

RECEIVED: Jun. 07, 2009

TESTED: Jun. 20 ~ Jul. 20, 2009

ISSUED: Jul. 28, 2009

APPLICANT: Shin Chuan Computer Co., Ltd.

ADDRESS: 6F-2, 268, LianCheng Rd., ZhongHe City,
Taipei County 23553, Taiwan (R.O.C.)

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen,
Kwei Shan Hsiang, Taoyuan Hsien 333,
Taiwan, R.O.C.

This test report consists of 74 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

Table of Contents

1. CERTIFICATION.....	4
2. SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY.....	5
3. GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	8
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST.....	9
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	12
3.4 DESCRIPTION OF SUPPORT UNITS	12
4. TEST TYPES AND RESULTS	13
4.1 RADIATED EMISSION MEASUREMENT.....	13
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	13
4.1.2 TEST INSTRUMENTS	14
4.1.3 TEST PROCEDURES	15
4.1.4 DEVIATION FROM TEST STANDARD.....	15
4.1.5 TEST SETUP.....	16
4.1.6 EUT OPERATING CONDITIONS	16
4.1.7 TEST RESULTS	17
4.2 CONDUCTED EMISSION MEASUREMENT	27
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	27
4.2.2 TEST INSTRUMENTS	27
4.2.3 TEST PROCEDURES	28
4.2.4 DEVIATION FROM TEST STANDARD.....	28
4.2.5 TEST SETUP.....	29
4.2.6 EUT OPERATING CONDITIONS	29
4.2.7 TEST RESULTS	30
4.3 NUMBER OF HOPPING FREQUENCY USED.....	34
4.3.1 LIMIT OF HOPPING FREQUENCY USED	34
4.3.2 TEST INSTRUMENTS	34
4.3.3 TEST PROCEDURES	34
4.3.4 DEVIATION FROM TEST STANDARD.....	35
4.3.5 TEST SETUP.....	35
4.3.6 TEST RESULTS	35
4.4 DWELL TIME ON EACH CHANNEL.....	38
4.4.1 LIMIT OF DWELL TIME USED	38
4.4.2 TEST INSTRUMENTS	38
4.4.3 TEST PROCEDURES	38
4.4.4 DEVIATION FROM TEST STANDARD.....	38
4.4.5 TEST SETUP.....	38
4.4.6 TEST RESULTS	39
4.5 CHANNEL BANDWIDTH	47
4.5.1 LIMITS OF CHANNEL BANDWIDTH.....	47
4.5.2 TEST INSTRUMENTS	47



A D T

4.5.3 TEST PROCEDURE	47
4.5.4 DEVIATION FROM TEST STANDARD	47
4.5.5 TEST SETUP	48
4.5.6 EUT OPERATING CONDITION	48
4.5.7 TEST RESULTS	48
4.6 HOPPING CHANNEL SEPARATION	53
4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION	53
4.6.2 TEST INSTRUMENTS	53
4.6.3 TEST PROCEDURES	53
4.6.4 DEVIATION FROM TEST STANDARD	53
4.6.5 TEST SETUP	53
4.6.6 TEST RESULTS	54
4.7 MAXIMUM PEAK OUTPUT POWER	58
4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	58
4.7.2 TEST INSTRUMENTS	58
4.7.3 TEST PROCEDURES	58
4.7.4 DEVIATION FROM TEST STANDARD	58
4.7.5 TEST SETUP	59
4.7.6 EUT OPERATING CONDITION	59
4.7.7 TEST RESULTS	59
4.8 BAND EDGES MEASUREMENT	64
4.8.1 LIMITS OF BAND EDGES MEASUREMENT	64
4.8.2 TEST INSTRUMENTS	64
4.8.3 TEST PROCEDURE	64
4.8.4 DEVIATION FROM TEST STANDARD	64
4.8.5 EUT OPERATING CONDITION	64
4.8.6 TEST RESULTS	65
4.9 ANTENNA REQUIREMENT	71
4.9.1 STANDARD APPLICABLE	71
4.9.2 ANTENNA CONNECTED CONSTRUCTION	71
5. PHOTOGRAPHS OF THE TEST CONFIGURATION	72
6. INFORMATION ON THE TESTING LABORATORIES	73
7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	74



A D T

1. CERTIFICATION

PRODUCT: Portable Data Terminal

BRAND: SCC

MODEL NO.: SC800 (refer to item 3.1 for more details)

APPLICANT: Shin Chuan Computer Co., Ltd.

TESTED: Jun. 20 ~ Jul. 20, 2009

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: SC820) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Peggy Chen , **DATE:** Jul. 28, 2009
Peggy Chen / Specialist

**TECHNICAL
ACCEPTANCE** : Long Chen , **DATE:** Jul. 28, 2009
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE:** Jul. 28, 2009
Gary Chang / Assistant Manager



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.73dB at 0.388MHz.
15.247(a)(1) (iii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time on Each Channel Spec.: Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation Spec. : Min. 25 kHz or $\frac{2}{3} \times 20$ dB bandwidth, whichever is greater 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Spec.: max. 21dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -4.86dB at 865.94MHz.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.

NOTE: If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.19 dB
	200MHz ~1000MHz	3.21 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Portable Data Terminal
MODEL NO.	SC800 (refer to Note for more details)
FCC ID	TQ2-SC800PDT-BWG
POWER SUPPLY	3.7Vdc from rechargeable lithium battery 5.0Vdc from power adapter
MODULATION TYPE	GFSK, $\pi/4$ -DQPSK, 8DPSK
MODULATION TECHNOLOGY	FHSS
TRANSFER RATE	1/2/3Mbps
OPERATING FREQUENCY	2402 ~ 2480MHz
NUMBER OF CHANNEL	79
CHANNEL SPACING	1MHz
OUTPUT POWER	2.661mW
ANTENNA TYPE	Chip antenna with 0.5dBi gain
DATA CABLE	1.85m shielded USB cable with one core 1.0m shielded USB cable with one core (for cradle use)
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Refer to NOTE

NOTE:

1. The EUT is a Portable Data Terminal. The functions of EUT listed as below:

	TEST STANDARD	REFERENCE REPORT
GPRS/E-GPRS 850	FCC Part 22	RF980604L08
GPRS/E-GPRS 1900	FCC Part 24	RF980604L08-1
WLAN 802.11b/g	FCC Part 15, Subpart C	RF980604L08-2
BLUETOOTH	(Section 15.247)	RF980604L08-3

2. The EUT has two designs, see below table for more details.

MODEL NAME	DESCRIPTION
SC800	26-key button board
SC820	41-key button board

* Model SC820 was the worst for final test.



A D T

3. The EUT has following accessories.

NO.	PRODUCT	BRAND	MODEL	DESCRIPTION
1	Power Adapter	ENG	3A-161DN05	I/P: 100-240Vac, 50-60Hz, 0.6A O/P: 5Vdc, 2.6A AC 1.80m non-shielded cable without core DC 1.05m non-shielded cable with one core
2	Battery	ETI CA	-	Rating: 3.7Vdc, 2200mAh
3				Rating: 3.7Vdc, 4000mAh
4	USB cable	-	-	1.85m shielded USB cable with one core
5				1.00m shielded USB cable with one core (for cradle use)
6	Cradle	-	SC800-SD	-
7	Earphone	-	-	-
8	SCAN Engine	OPTICON	MDI-1000	2D engine
9		OPTICON	VLM4122	1D engine
10		OPTICON	MDL-1000	1D engine
11		Symbol	SE950	1D engine

* Item 1, 3, 4, 5, 6, 7, 8 were the worst for final test. (The EUT had been pre-tested, please refer to the compliance EMC reports for any data.)

4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T


3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:


CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE A

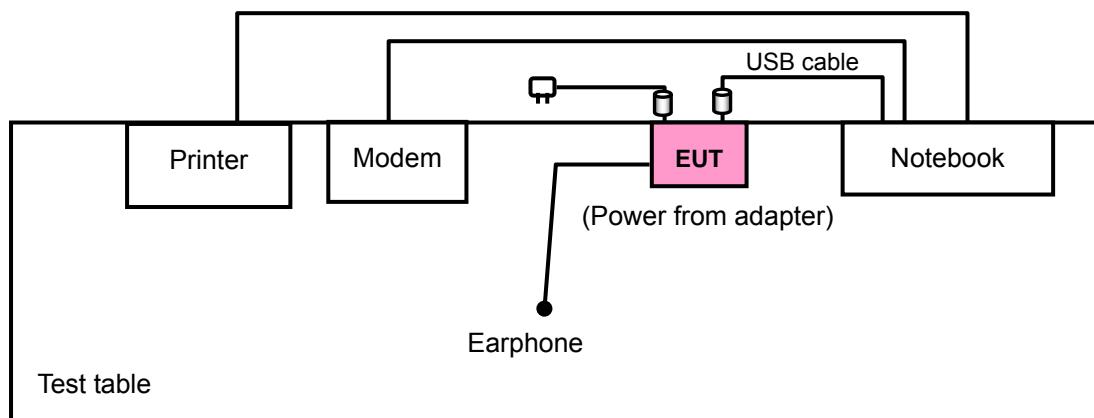

TEST MODE B

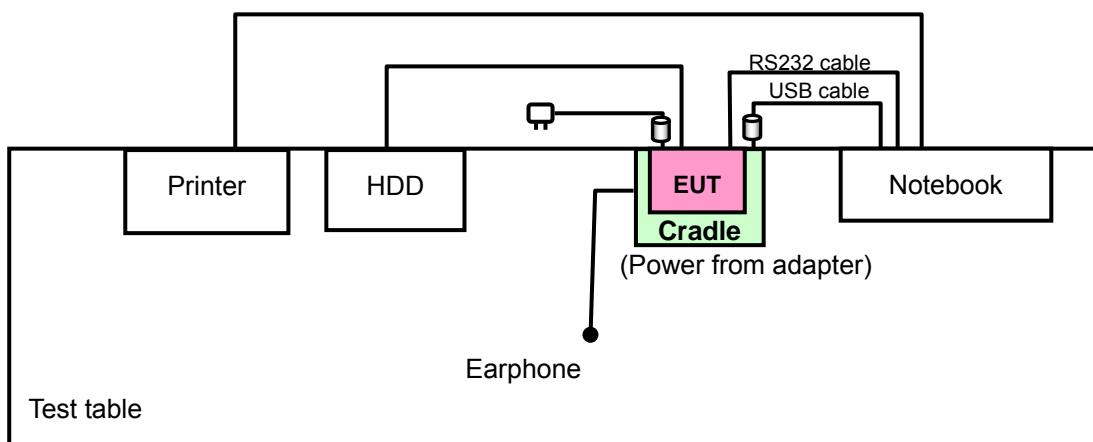



A D T

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
A	✓	✓	✓	✓	EUT standalone
B	-	✓	✓	-	EUT with cradle

Where RE \geq 1G: Radiated Emission above 1GHzRE $<$ 1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: “-”means no effect.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	AXIS
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5	X
A	0 to 78	0, 39, 78	FHSS	8DPSK	DH5	X

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	AXIS
A	0 to 78	0	FHSS	GFSK	DH5	X
B	0 to 78	0	FHSS	GFSK	DH5	-



A D T

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	0	FHSS	GFSK	DH5
B	0 to 78	0	FHSS	GFSK	DH5

BANDEdge MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE	AXIS
A	0 to 78	0, 78	FHSS	GFSK	DH5	X
A	0 to 78	0, 78	FHSS	8DPSK	DH5	X

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0 to 78	0, 39, 78	FHSS	GFSK	DH5
A	0 to 78	0, 39, 78	FHSS	8DPSK	DH5



A D T

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	33898721680	E2K24CLNS
2	MODEM	ACEEX	1414V/3	0401008253	IFAXDM1414
3	PRINTER	EPSON	LQ-300+	DCGY054011	FCC DoC Approved
4	EXTERNAL HARD DISK	Terasys	F12-UF	A0100215-41H0013	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.8 m non-shielded RS232 cable, w/o core. (only for test mode B)
2	1.2m braid shielded wire, DB25 & DB9 connector, w/o core.
3	1.8m braid shielded wire, DB25 connector, w/o core.
4	1.5 m shielded cable, terminated with USB connector, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May 25, 2009	May 24, 2010
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 08, 2008	Aug. 07, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-156	Apr. 30, 2009	Apr. 29, 2010
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Aug. 06, 2008	Aug. 05, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 06, 2009	Jan. 05, 2010
Preamplifier Agilent	8449B	3008A01911	Sep. 10, 2008	Sep. 09, 2009
Preamplifier Agilent	8447D	2944A10638	Dec. 26, 2008	Dec. 25, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218190/4 231241/4	May 13, 2009	May 12, 2010
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008	Aug. 08, 2009
Software	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA	NA
Turn Table EMCO	2087-2.03	NA	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 9.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 460141.
5. The IC Site Registration No. is IC 7450F-4.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

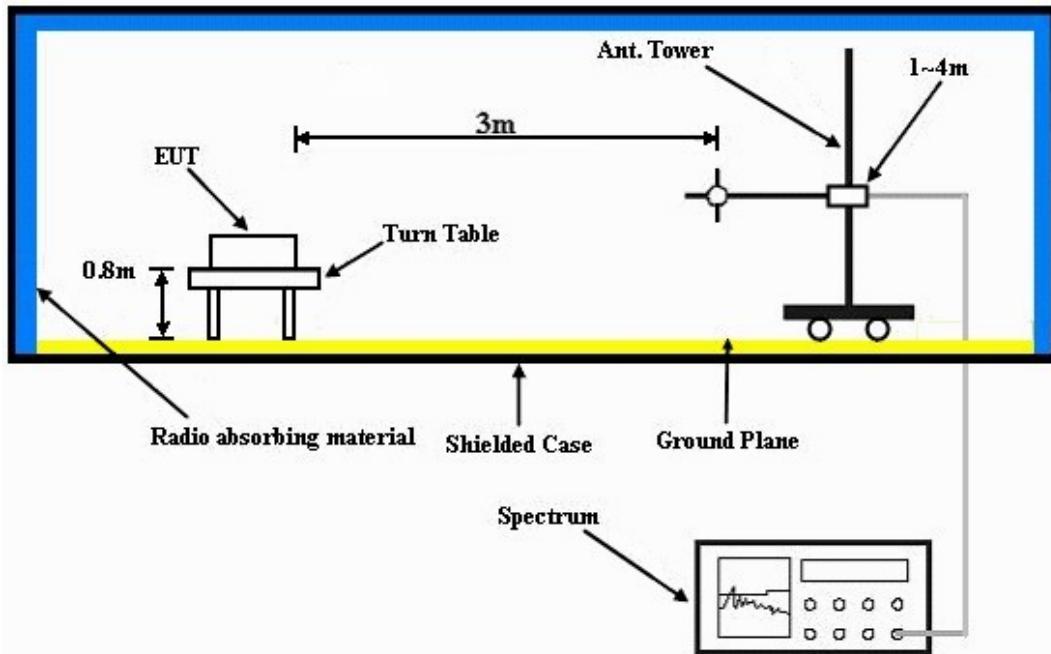

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

TEST MODE A

- a. Connected the EUT to notebook via a USB cable and placed on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the system in full functions.

TEST MODE B

- a. Plugged EUT into cradle and connected the cradle with notebook via an RS232 cable and a USB cable and placed on a testing table.
- b. The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the system in full functions.



A D T

4.1.7 TEST RESULTS

ABOVE 1GHZ WORST-CASE DATA : GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Antony Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1601.00	49.90 PK	74.00	-24.10	1.00 H	32	20.34	29.56
2	1601.00	47.38 AV	54.00	-6.62	1.00 H	32	17.82	29.56
3	2390.00	44.40 PK	74.00	-29.60	1.03 H	30	12.17	32.22
4	2390.00	33.79 AV	54.00	-20.21	1.03 H	30	1.56	32.22
5	#2400.00	53.83 PK	77.39	-23.56	1.04 H	40	21.57	32.26
6	#2400.00	23.73 AV	47.29	-23.56	1.04 H	40	-8.53	32.26
7	*2402.00	97.39 PK			1.04 H	40	65.12	32.27
8	*2402.00	67.29 AV			1.04 H	40	35.02	32.27
9	4804.00	48.62 PK	74.00	-25.38	1.00 H	106	10.32	38.30
10	4804.00	18.52 AV	54.00	-35.48	1.00 H	106	-19.78	38.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1002 hPa	TESTED BY	Antony Lee

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1601.00	48.37 PK	74.00	-25.63	1.00 V	68	18.81	29.56
2	1601.00	44.04 AV	54.00	-9.96	1.00 V	68	14.48	29.56
3	2390.00	43.23 PK	74.00	-30.77	1.00 V	337	11.00	32.22
4	2390.00	33.83 AV	54.00	-20.17	1.00 V	337	1.60	32.22
5	#2400.00	49.10 PK	72.66	-23.56	1.00 V	337	16.84	32.26
6	#2400.00	19.00 AV	42.56	-23.56	1.00 V	337	-13.26	32.26
7	*2402.00	92.66 PK			1.00 V	337	60.39	32.27
8	*2402.00	62.56 AV			1.00 V	337	30.29	32.27
9	4804.00	48.02 PK	74.00	-25.98	1.00 V	36	9.72	38.30
10	4804.00	17.92 AV	54.00	-36.08	1.00 V	36	-20.38	38.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.
8. "#": The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 39		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		23deg. C, 70%RH 1002 hPa		TESTED BY Antony Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	94.21 PK			1.00 H	42	61.80	32.41
2	*2441.00	64.11 AV			1.00 H	42	31.70	32.41
3	4882.00	48.80 PK	74.00	-25.20	1.00 H	101	10.38	38.42
4	4882.00	18.70 AV	54.00	-35.30	1.00 H	101	-19.72	38.42
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	90.03 PK			1.00 V	290	57.62	32.41
2	*2441.00	59.93 AV			1.00 V	290	27.52	32.41
3	4882.00	49.31 PK	74.00	-24.69	1.00 V	49	10.89	38.42
4	4882.00	19.21 AV	54.00	-34.79	1.00 V	49	-19.21	38.42

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 78	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1002 hPa	TESTED BY	Antony Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	91.19 PK			1.05 H	40	58.64	32.55
2	*2480.00	61.09 AV			1.05 H	40	28.54	32.55
3	2483.50	43.78 PK	74.00	-30.22	1.05 H	40	11.22	32.56
4	2483.50	13.68 AV	54.00	-40.32	1.05 H	40	-18.88	32.56
5	4960.00	48.25 PK	74.00	-25.75	1.00 H	105	9.64	38.61
6	4960.00	18.15 AV	54.00	-35.85	1.00 H	105	-20.46	38.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	87.33 PK			1.00 V	341	54.78	32.55
2	*2480.00	57.23 AV			1.00 V	341	24.68	32.55
3	2483.50	39.92 PK	74.00	-34.08	1.00 V	341	7.36	32.56
4	2483.50	9.82 AV	54.00	-44.18	1.00 V	341	-22.74	32.56
5	4960.00	47.80 PK	74.00	-26.20	1.00 V	24	9.19	38.61
6	4960.00	17.70 AV	54.00	-36.30	1.00 V	24	-20.91	38.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

8DPSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 0		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		23deg. C, 70%RH 1002 hPa		TESTED BY Kevin Liang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1602.00	46.33 PK	74.00	-27.67	1.18 H	43	16.76	29.57
2	1602.00	42.65 AV	54.00	-11.35	1.18 H	43	13.08	29.57
3	2390.00	42.87 PK	74.00	-31.13	1.28 H	88	10.64	32.22
4	2390.00	31.07 AV	54.00	-22.93	1.28 H	88	-1.16	32.22
5	#2400.00	42.72 PK	73.49	-30.77	1.28 H	88	10.46	32.26
6	#2400.00	12.72 AV	43.39	-30.67	1.28 H	88	-19.54	32.26
7	*2402.00	93.49 PK			1.28 H	88	61.22	32.27
8	*2402.00	63.39 AV			1.28 H	88	31.12	32.27
9	4804.00	49.56 PK	74.00	-24.44	1.28 H	92	11.26	38.30
10	4804.00	19.46 AV	54.00	-34.54	1.28 H	92	-18.84	38.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1002 hPa	TESTED BY	Kevin Liang

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1602.00	48.41 PK	74.00	-25.59	1.16 V	184	18.84	29.57
2	1602.00	46.20 AV	54.00	-7.80	1.16 V	184	16.63	29.57
3	2390.00	42.73 PK	74.00	-31.27	1.09 V	72	10.50	32.22
4	2390.00	29.69 AV	54.00	-24.31	1.09 V	72	-2.54	32.22
5	#2400.00	42.94 PK	72.99	-30.05	1.09 V	72	10.68	32.26
6	#2400.00	12.84 AV	42.89	-30.05	1.09 V	72	-19.42	32.26
7	*2402.00	92.99 PK			1.09 V	72	60.72	32.27
8	*2402.00	62.89 AV			1.09 V	72	30.62	32.27
9	4804.00	48.49 PK	74.00	-25.51	1.19 V	27	10.19	38.30
10	4804.00	18.39 AV	54.00	-35.61	1.19 V	27	-19.91	38.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.
8. "#": The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Kevin Liang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	89.94 PK			1.25 H	91	57.53	32.41
2	*2441.00	59.84 AV			1.25 H	91	27.43	32.41
3	4882.00	49.37 PK	74.00	-24.63	1.20 H	96	10.95	38.42
4	4882.00	19.27 AV	54.00	-34.73	1.20 H	96	-19.15	38.42
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	88.64 PK			1.00 V	15	56.23	32.41
2	*2441.00	58.54 AV			1.00 V	15	26.13	32.41
3	4882.00	48.38 PK	74.00	-25.62	1.23 V	34	9.96	38.42
4	4882.00	18.28 AV	54.00	-35.72	1.23 V	34	-20.14	38.42

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Kevin Liang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	87.51 PK			1.31 H	113	54.96	32.55
2	*2480.00	57.41 AV			1.31 H	113	24.86	32.55
3	2483.50	43.65 PK	74.00	-30.35	1.31 H	113	11.09	32.56
4	2483.50	13.55 AV	54.00	-40.45	1.31 H	113	-19.01	32.56
5	4960.00	49.33 PK	74.00	-24.67	1.24 H	81	10.72	38.61
6	4960.00	19.23 AV	54.00	-34.77	1.24 H	81	-19.38	38.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	86.93 PK			1.19 V	263	54.38	32.55
2	*2480.00	56.83 AV			1.19 V	263	24.28	32.55
3	2483.50	43.37 PK	74.00	-30.63	1.19 V	263	10.81	32.56
4	2483.50	13.27 AV	54.00	-40.73	1.19 V	263	-19.29	32.56
5	4960.00	48.26 PK	74.00	-25.74	1.15 V	24	9.65	38.61
6	4960.00	18.16 AV	54.00	-35.84	1.15 V	24	-20.45	38.61

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on $0.625 * 5$ per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to: $20\log(3.125 / 100) = -30.1$ dB.
7. Average value = peak reading + $20\log(\text{duty cycle})$.



A D T

BELOW 1GHz WORST-CASE DATA : GFSK MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 0		FREQUENCY RANGE
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION
ENVIRONMENTAL CONDITIONS		23deg. C, 70%RH 1000 hPa		TESTED BY
TEST MODE		A		Antony Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	156.28	35.18 QP	43.50	-8.32	1.50 H	97	21.40	13.78
2	220.44	35.36 QP	46.00	-10.64	1.00 H	226	23.86	11.51
3	465.42	34.27 QP	46.00	-11.73	1.25 H	88	16.08	18.19
4	519.86	35.30 QP	46.00	-10.70	1.50 H	136	15.45	19.85
5	671.52	34.21 QP	46.00	-11.79	1.00 H	43	11.72	22.49
6	865.94	36.38 QP	46.00	-9.62	1.75 H	43	10.60	25.78
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	127.11	34.13 QP	43.50	-9.37	1.00 V	13	22.10	12.03
2	265.16	34.55 QP	46.00	-11.45	1.50 V	322	21.47	13.09
3	465.42	33.49 QP	46.00	-12.51	1.25 V	334	15.30	18.19
4	519.86	33.11 QP	46.00	-12.89	1.00 V	79	13.27	19.85
5	667.63	36.49 QP	46.00	-9.51	1.50 V	103	14.03	22.46
6	865.94	41.14 QP	46.00	-4.86	1.00 V	148	15.36	25.78

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH 1000 hPa	TESTED BY	Antony Lee
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	156.28	37.10 QP	43.50	-6.40	1.50 H	130	23.32	13.78
2	265.16	29.64 QP	46.00	-16.36	1.00 H	10	16.55	13.09
3	444.03	36.76 QP	46.00	-9.24	1.25 H	55	19.24	17.52
4	533.47	32.42 QP	46.00	-13.58	1.50 H	112	12.16	20.26
5	599.58	31.93 QP	46.00	-14.07	1.50 H	316	10.03	21.90
6	865.94	35.45 QP	46.00	-10.55	1.75 H	67	9.67	25.78
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.84	31.42 QP	40.00	-8.58	1.75 V	79	19.29	12.13
2	311.82	34.68 QP	46.00	-11.32	1.00 V	10	20.73	13.95
3	465.42	35.39 QP	46.00	-10.61	1.00 V	136	17.20	18.19
4	519.86	35.80 QP	46.00	-10.20	1.00 V	25	15.95	19.85
5	665.68	38.64 QP	46.00	-7.36	1.25 V	88	16.20	22.45
6	862.06	40.08 QP	46.00	-5.92	1.25 V	148	14.34	25.75

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 22, 2008	Sep. 21, 2009
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 31, 2008	Dec. 30, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Dec. 29, 2008	Dec. 28, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jul. 30, 2008	Jul. 29, 2009
Software ADT	ADT_Cond_V7.3.7	NA	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.



A D T

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

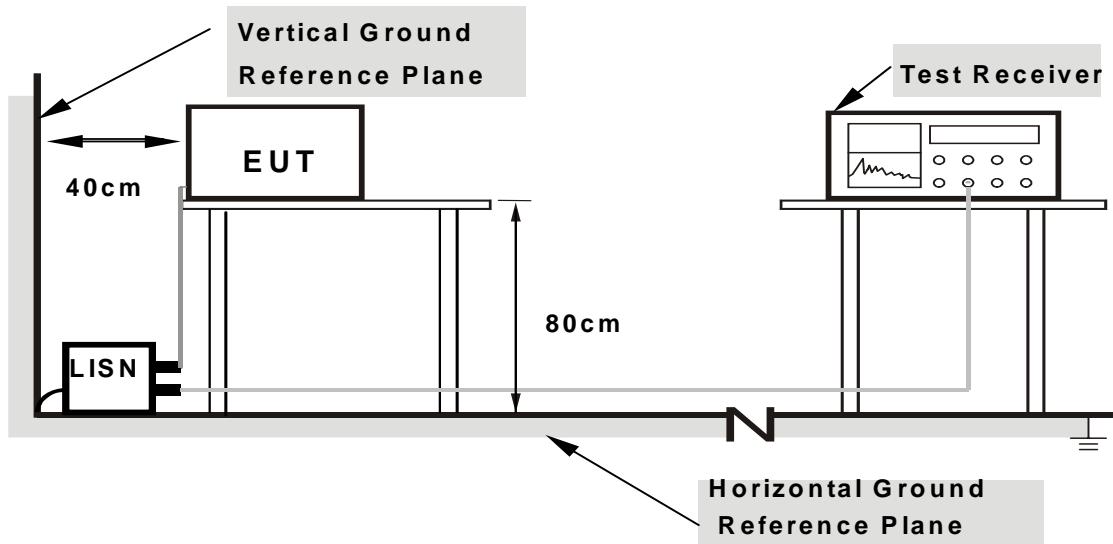

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS


CONDUCTED WORST CASE DATA: GFSK MODULATION

EUT TEST CONDITION			MEASUREMENT DETAIL	
CHANNEL		Channel 0		PHASE Line 1
MODULATION TYPE		GFSK		6dB BANDWIDTH 9 kHz
ENVIRONMENTAL CONDITIONS		25deg. C, 69%RH, 1017hPa		INPUT POWER (SYSTEM) 120Vac, 60 Hz
TEST MODE		A		TESTED BY Antony Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			(dB)							
1	0.373	0.14	44.37	-	44.51	-	58.43	48.43	-13.93	-
2	0.459	0.14	40.09	-	40.23	-	56.70	46.70	-16.47	-
3	0.677	0.15	34.87	-	35.02	-	56.00	46.00	-20.98	-
4	0.982	0.17	36.22	-	36.39	-	56.00	46.00	-19.61	-
5	2.348	0.21	36.21	-	36.42	-	56.00	46.00	-19.58	-
6	4.055	0.28	30.42	-	30.70	-	56.00	46.00	-25.30	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

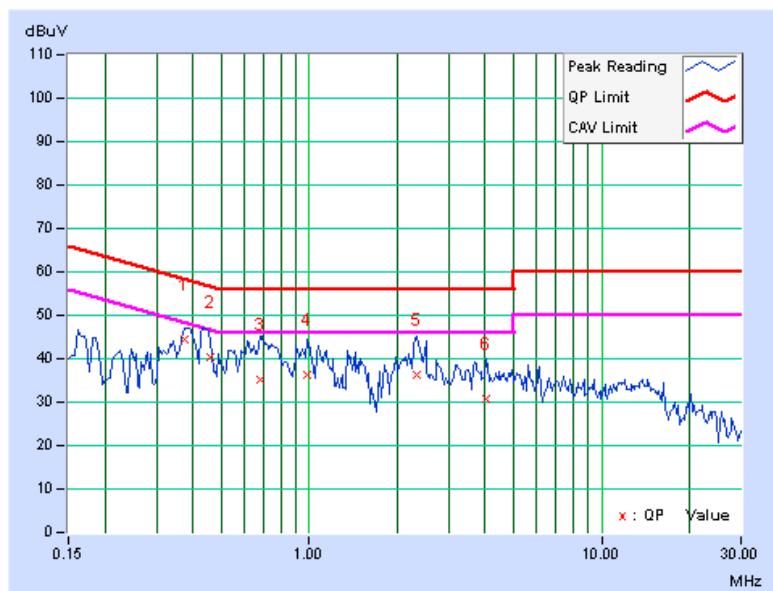


EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 0	PHASE	Line 2
MODULATION TYPE	GFSK	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH, 1017hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	A	TESTED BY	Antony Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.377	0.15	43.54	-	43.69	-	58.35	48.35	-14.67	-
2	0.408	0.15	43.81	-	43.96	-	57.69	47.69	-13.73	-
3	0.728	0.16	39.68	-	39.84	-	56.00	46.00	-16.16	-
4	0.994	0.17	34.11	-	34.28	-	56.00	46.00	-21.72	-
5	1.387	0.18	33.34	-	33.52	-	56.00	46.00	-22.48	-
6	2.277	0.21	36.03	-	36.24	-	56.00	46.00	-19.76	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

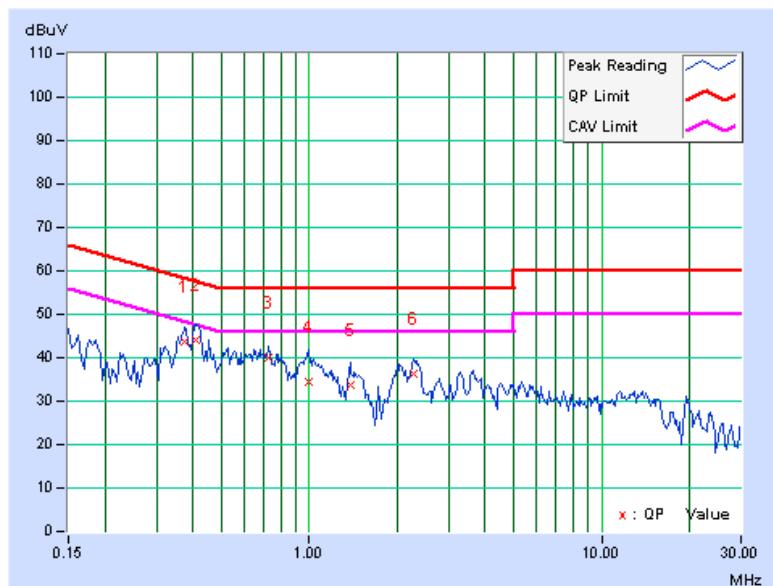


EUT TEST CONDITION			MEASUREMENT DETAIL		
CHANNEL	Channel 0		PHASE	Line 1	
MODULATION TYPE	GFSK		6dB BANDWIDTH	9 kHz	
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH, 1017hPa		INPUT POWER (SYSTEM)	120Vac, 60 Hz	
TEST MODE	B		TESTED BY	Antony Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			(dB)							
1	0.193	0.13	47.38	-	47.51	-	63.91	53.91	-16.40	-
2	0.388	0.14	46.56	-	46.70	-	58.10	48.10	-11.40	-
3	0.451	0.14	42.16	-	42.30	-	56.86	46.86	-14.56	-
4	0.646	0.15	43.71	-	43.86	-	56.00	46.00	-12.14	-
5	1.422	0.18	41.83	-	42.01	-	56.00	46.00	-13.99	-
6	2.453	0.21	43.71	-	43.92	-	56.00	46.00	-12.08	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

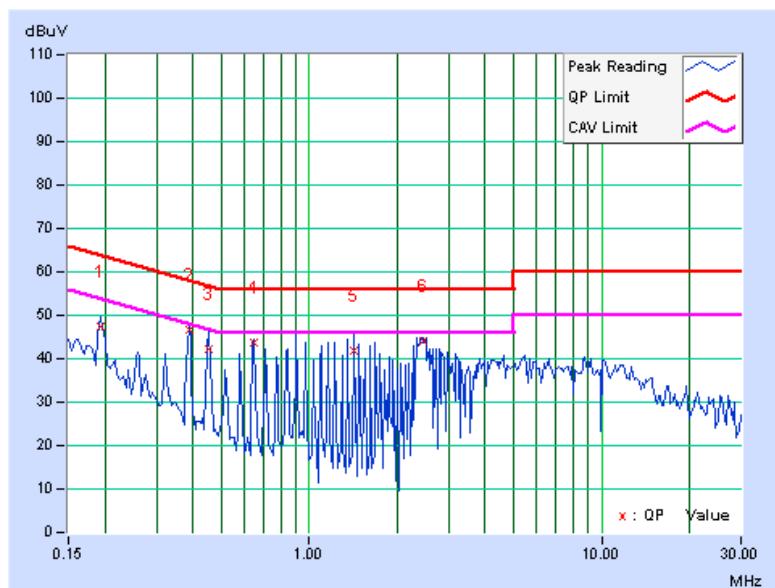


EUT TEST CONDITION			MEASUREMENT DETAIL	
CHANNEL	Channel 0		PHASE	Line 2
MODULATION TYPE	GFSK		6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 69%RH, 1017hPa		INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	B		TESTED BY	Antony Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.13	46.61	-	46.74	-	63.91	53.91	-17.17	-
2	0.388	0.15	47.22	-	47.37	-	58.10	48.10	-10.73	-
3	0.451	0.15	41.28	-	41.43	-	56.86	46.86	-15.43	-
4	0.646	0.16	42.26	-	42.42	-	56.00	46.00	-13.58	-
5	0.970	0.17	41.64	-	41.81	-	56.00	46.00	-14.19	-
6	2.387	0.22	44.28	-	44.50	-	56.00	46.00	-11.50	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

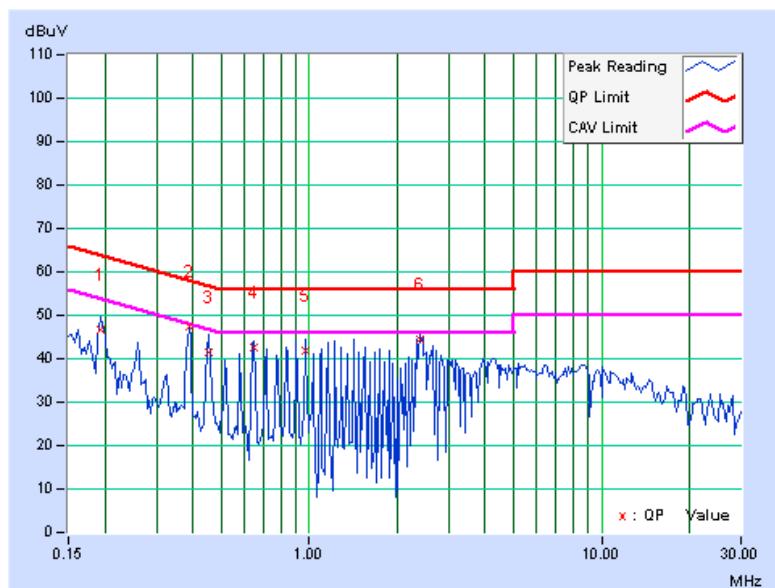

4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

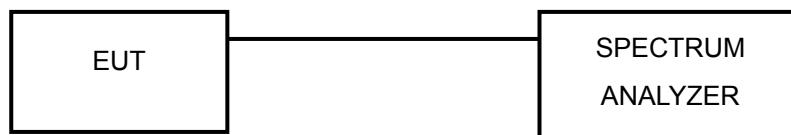



4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



A D T



GFSK MODULATION

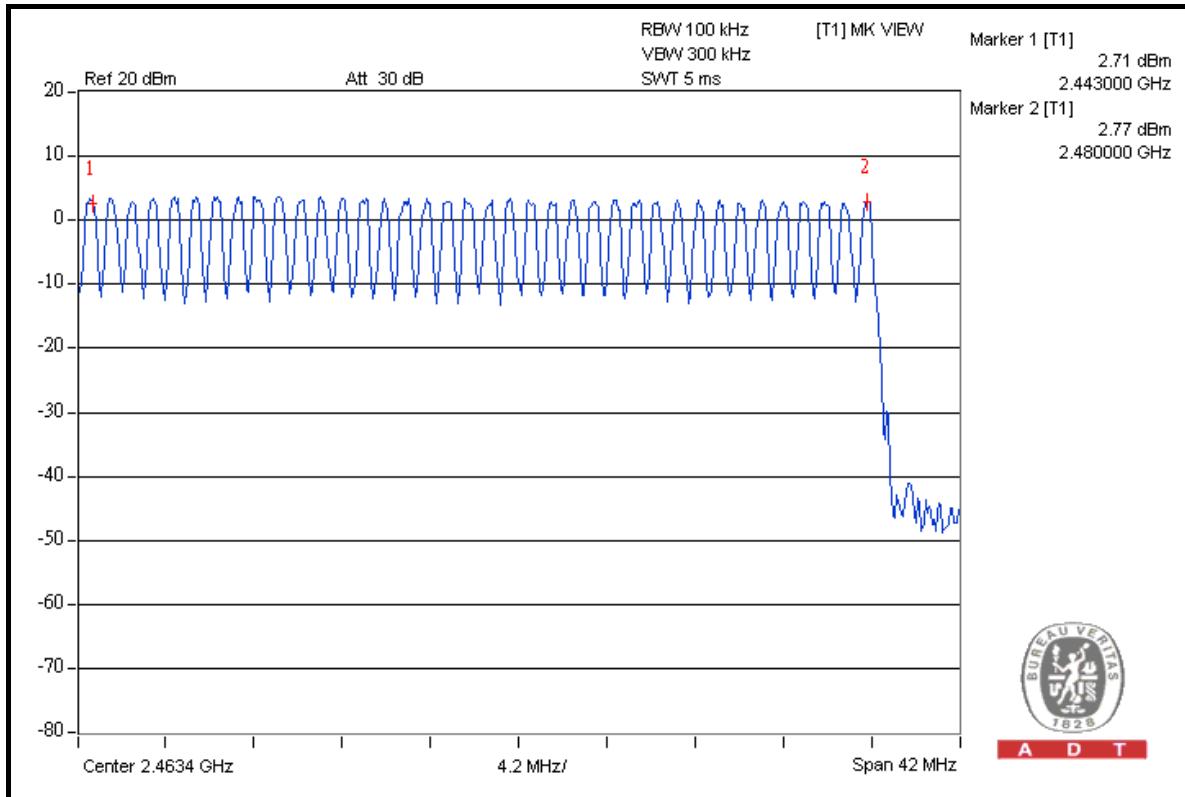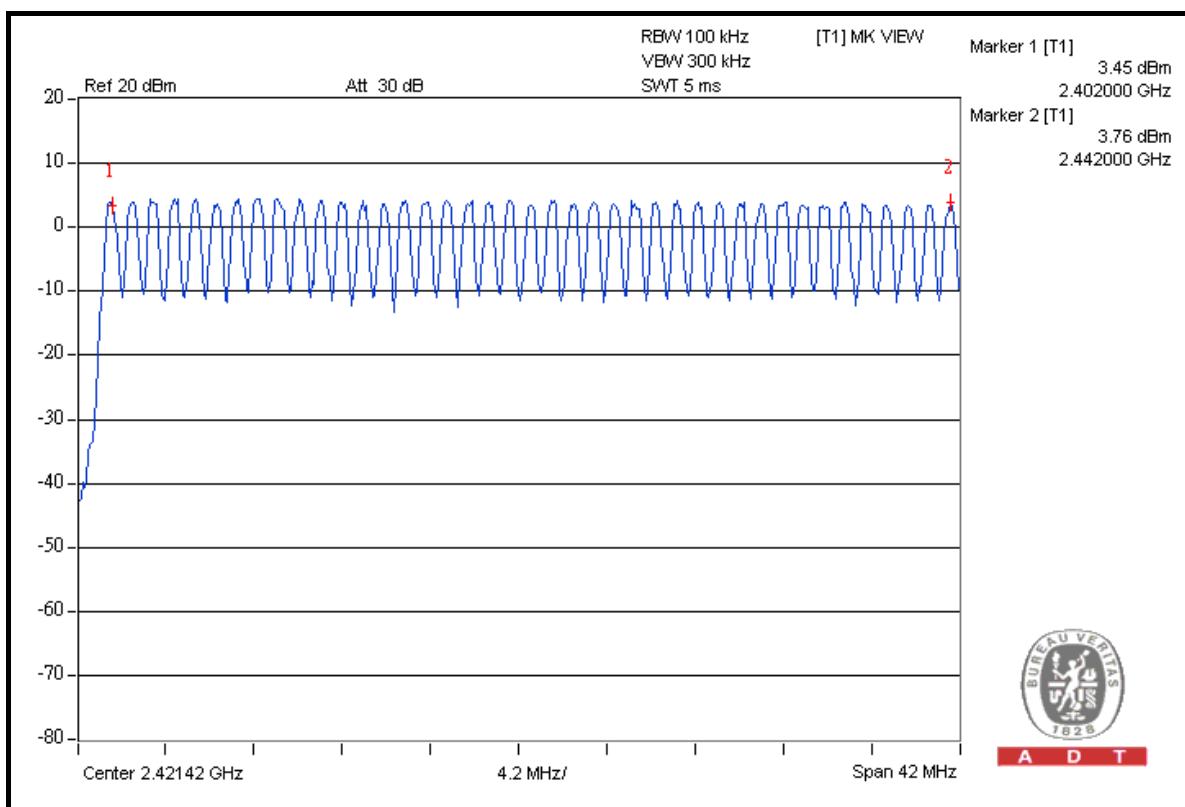



A D T

8DPSK MODULATION

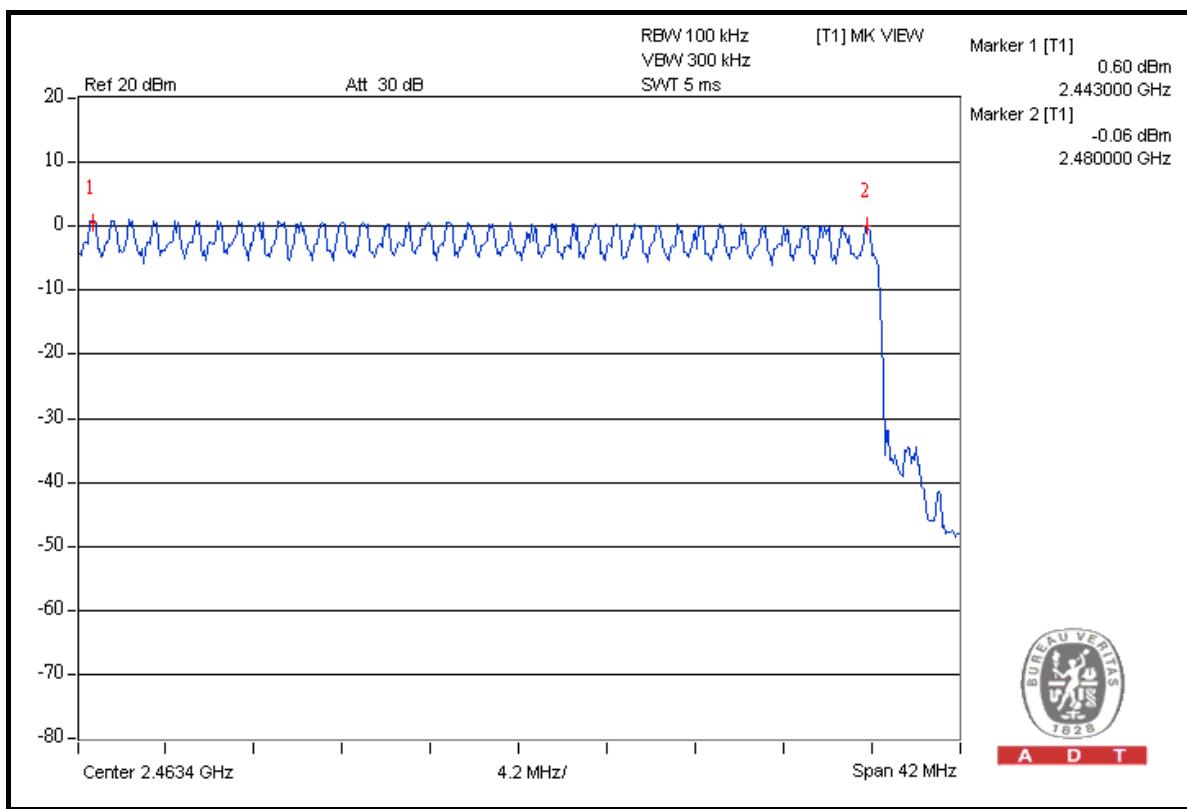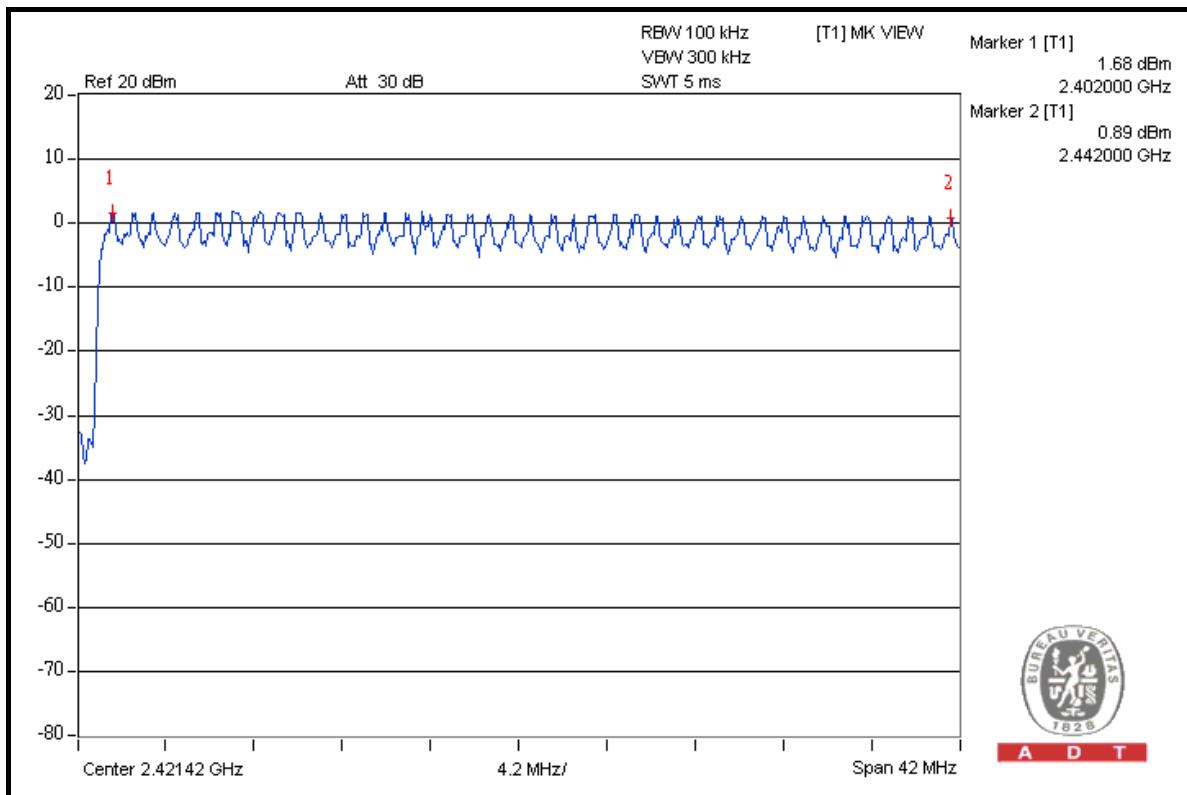

4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

Same as 4.3.5.



A D T

4.4.6 TEST RESULTS

GFSK MODULATION



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) * 6.32 = 316.00 times	0.504	159.264	400
DH3	26 (times / 5 sec) * 6.32 = 164.32 times	1.752	287.889	400
DH5	17 (times / 5 sec) * 6.32 = 107.44 times	3.000	322.320	400

NOTE: Test plots of the transmitting time slot are shown on next 3 pages.



A D T



DH1

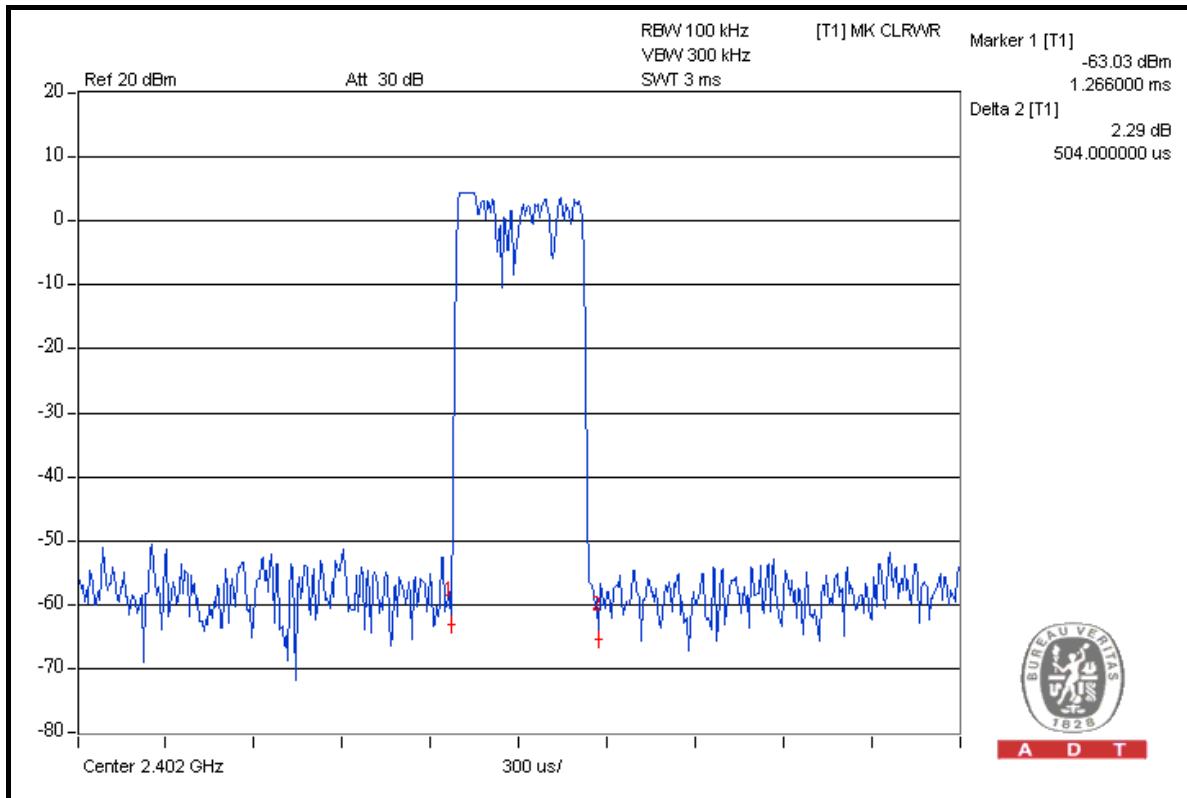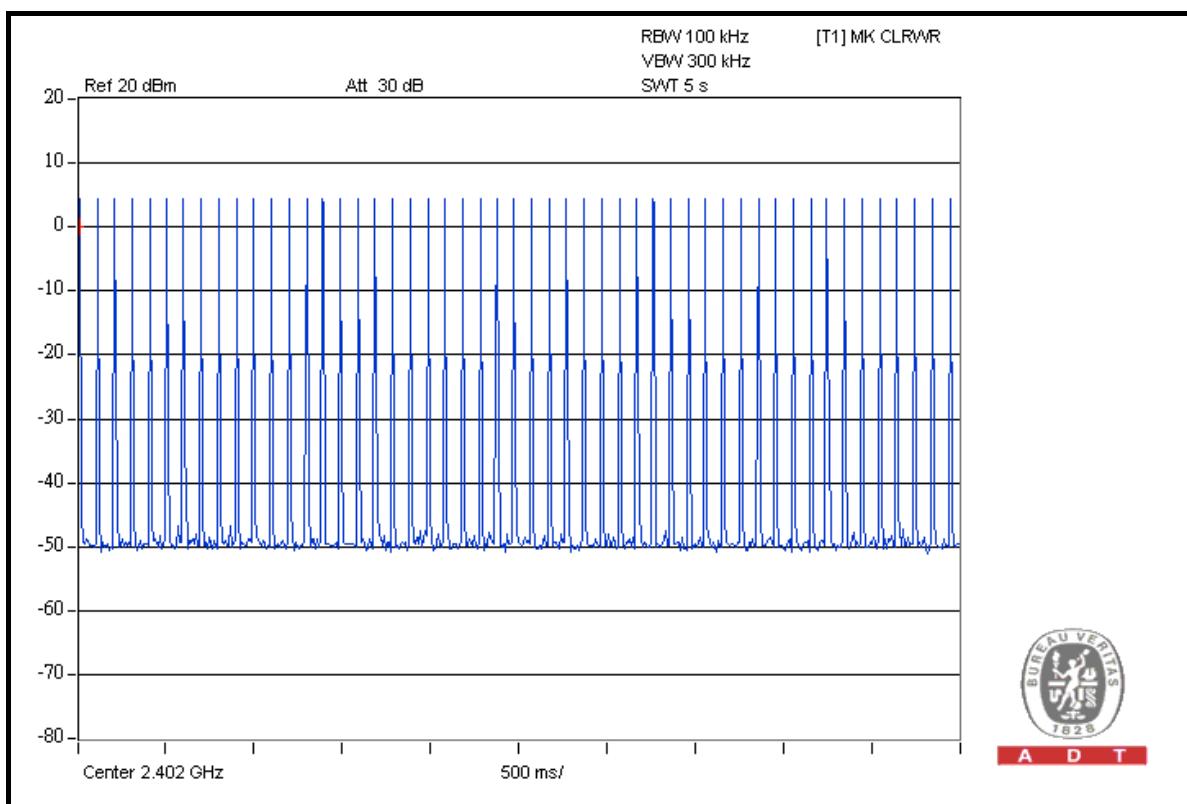



A D T



DH3

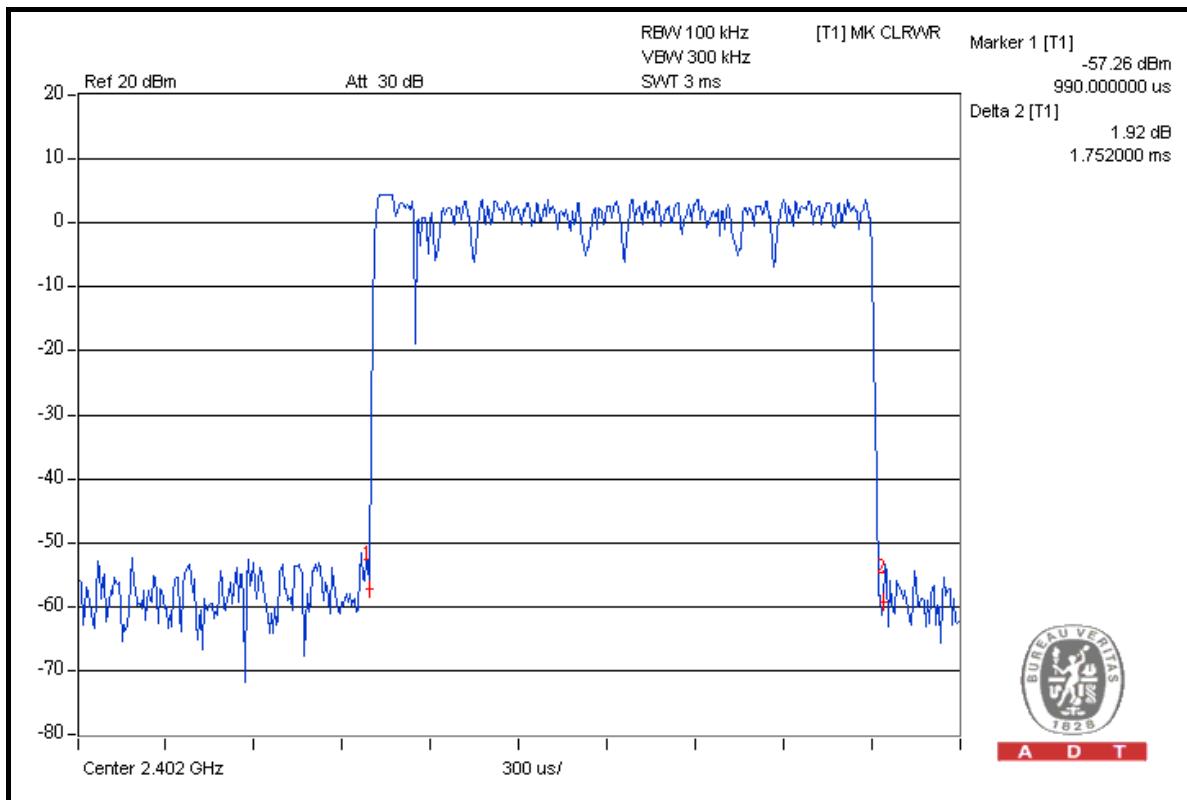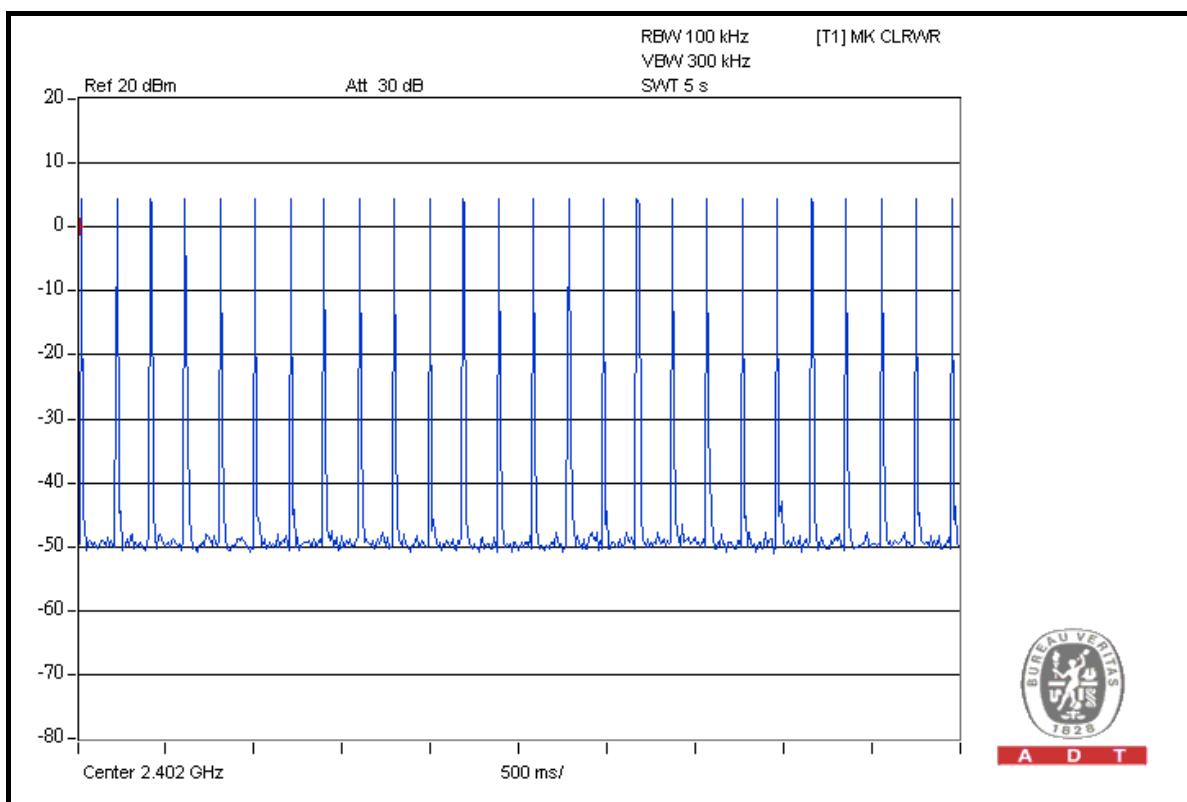



A D T

DH5

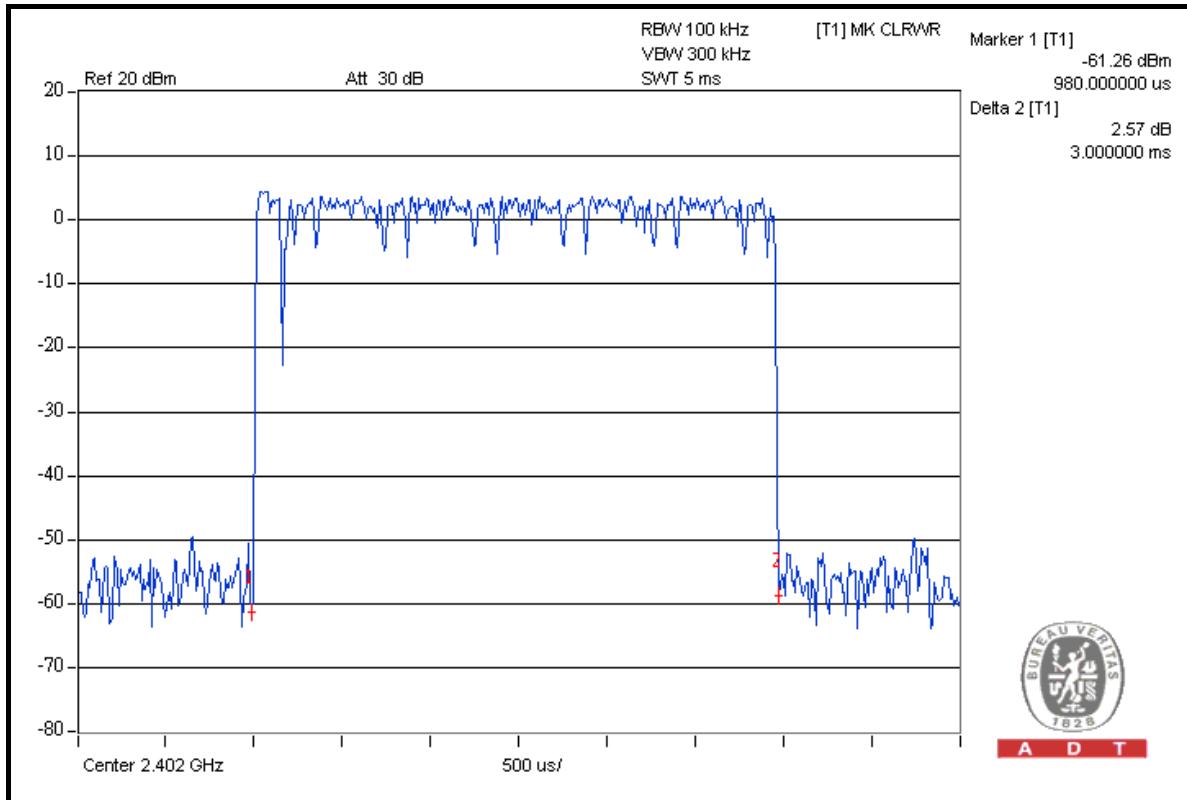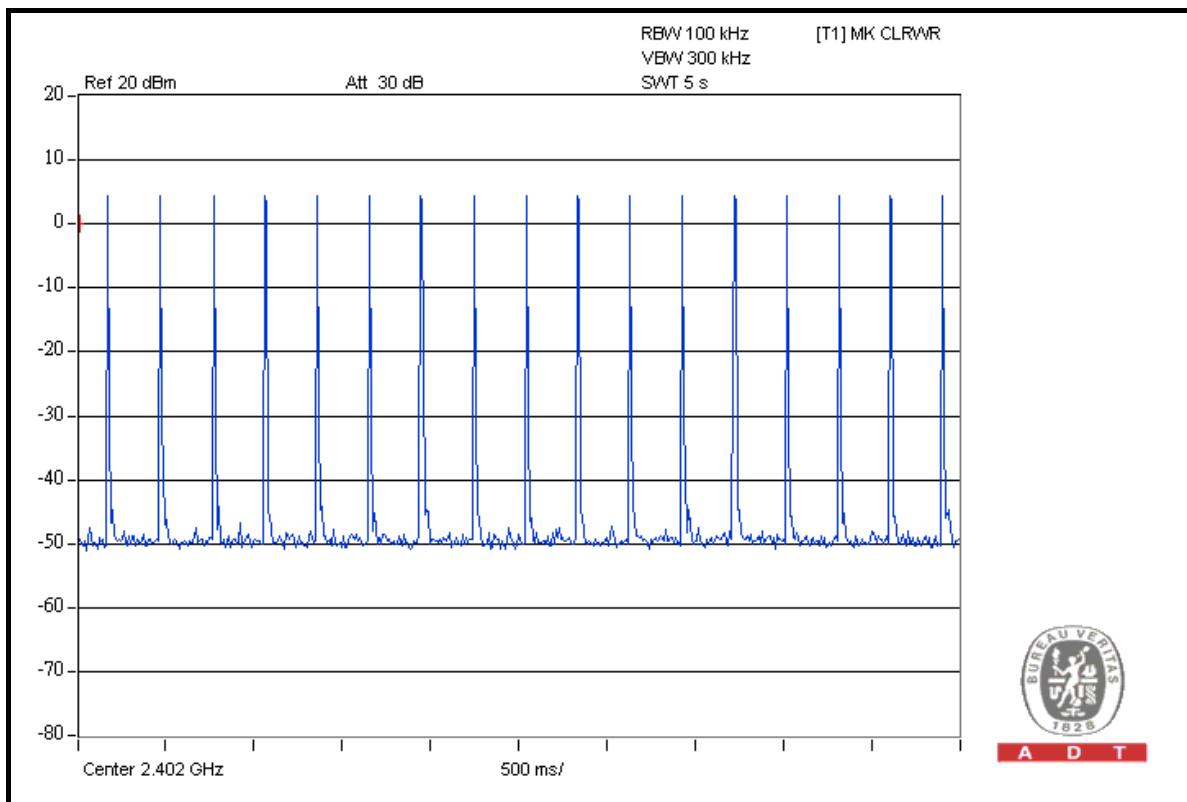



A D T

8DPSK MODULATION



Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 (times / 5 sec) * 6.32 = 322.32 times	0.498	160.515	400
DH3	25 (times / 5 sec) * 6.32 = 158.00 times	1.776	280.608	400
DH5	17 (times / 5 sec) * 6.32 = 107.44 times	3.010	323.394	400

NOTE: Test plots of the transmitting time slot are shown on next 3 pages.



A D T



DH1

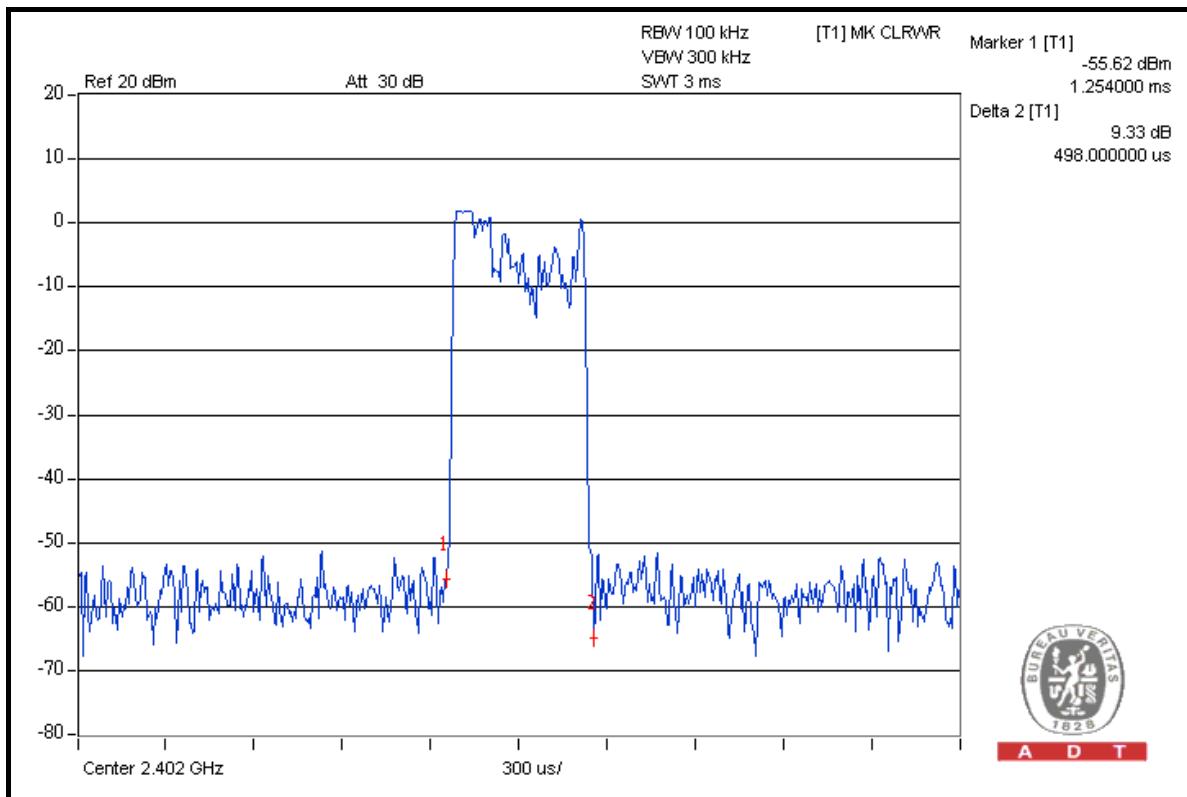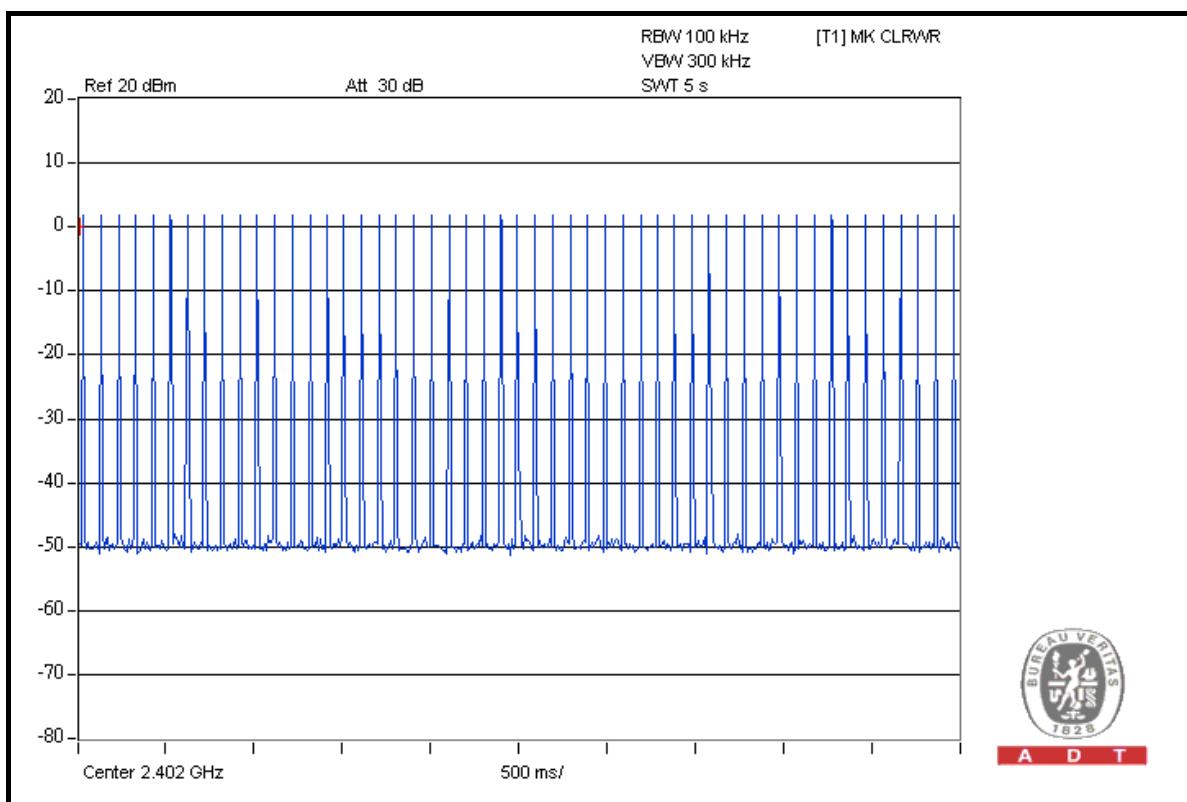



A D T



DH3

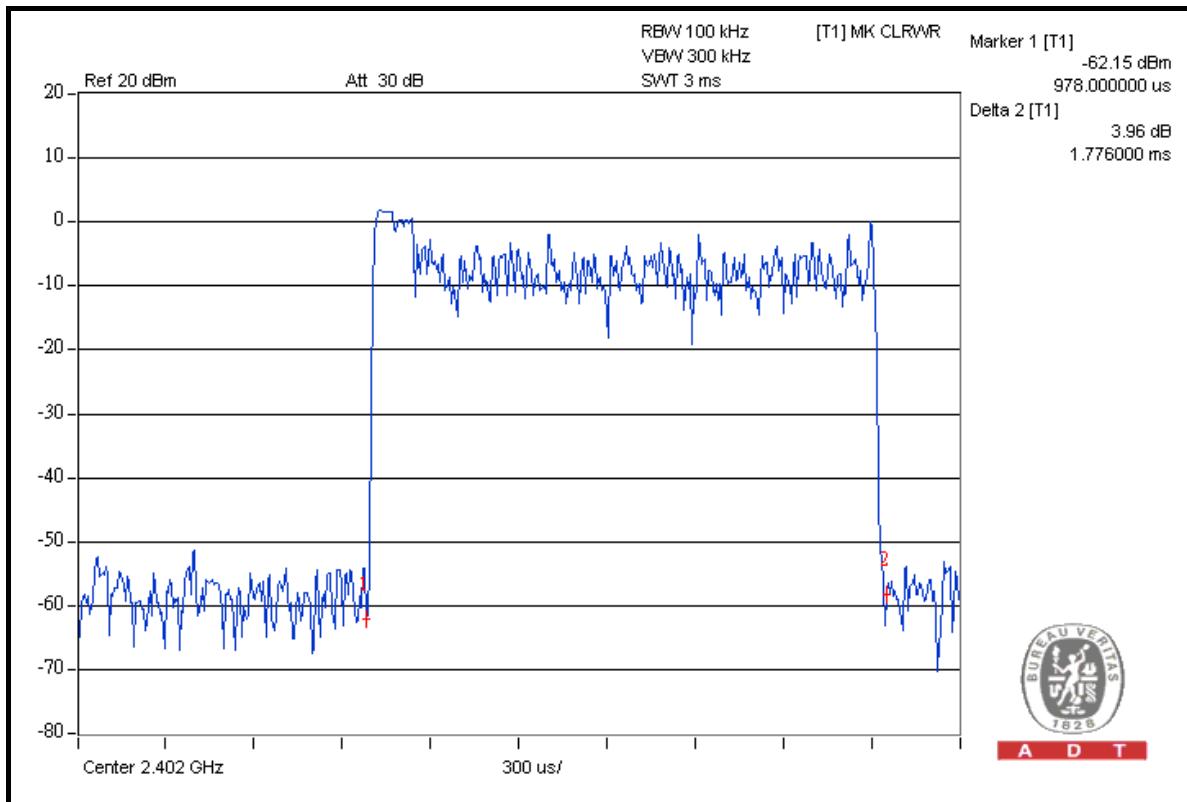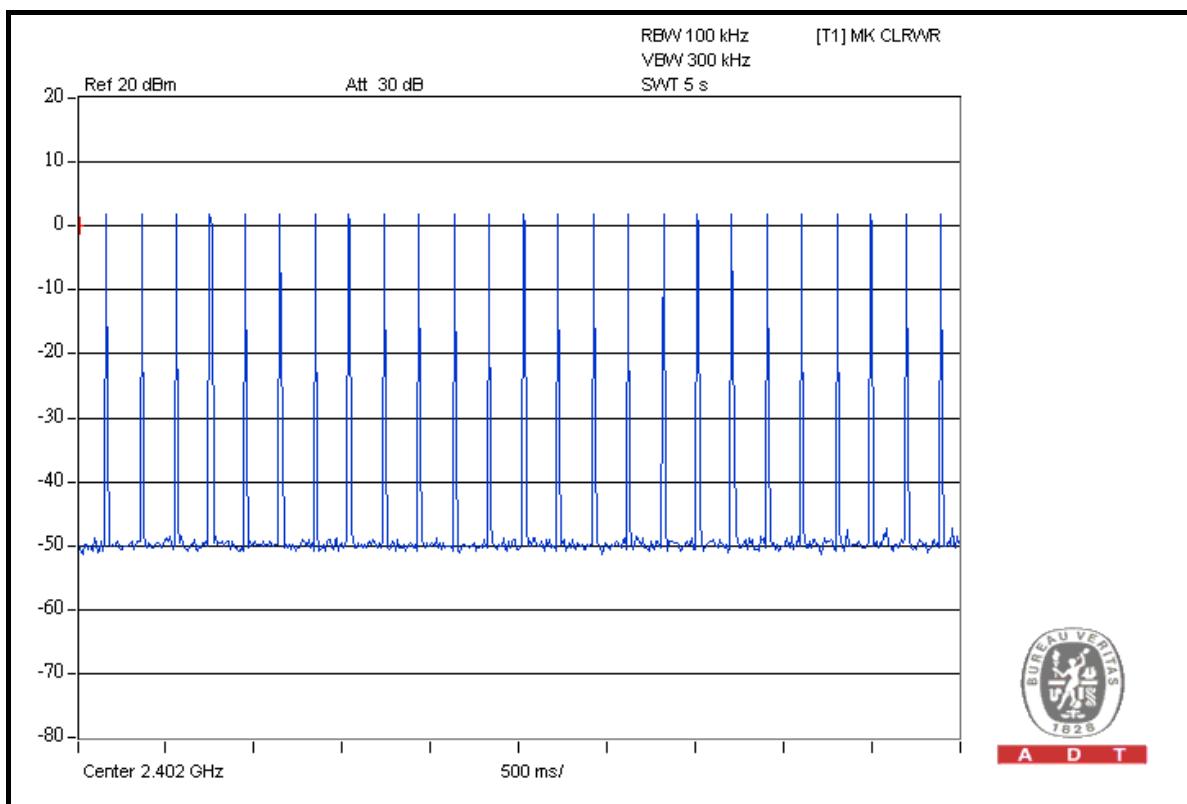



A D T

DH5

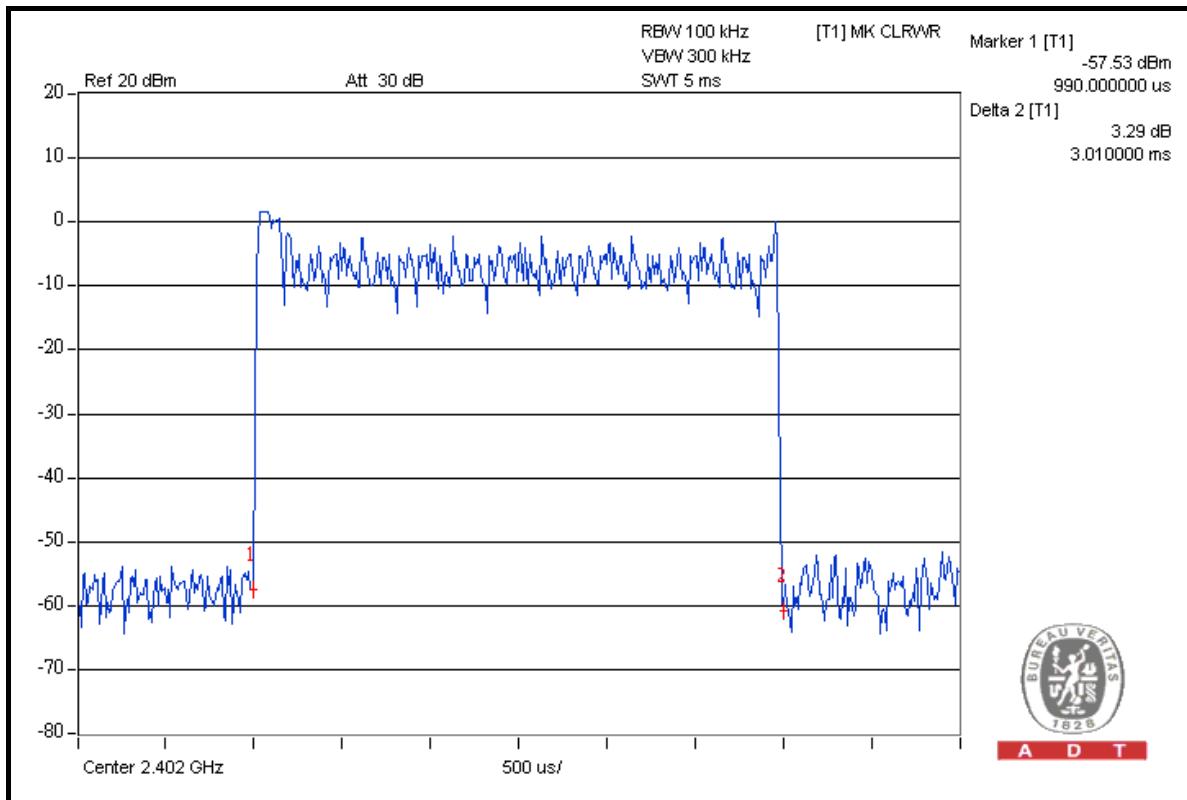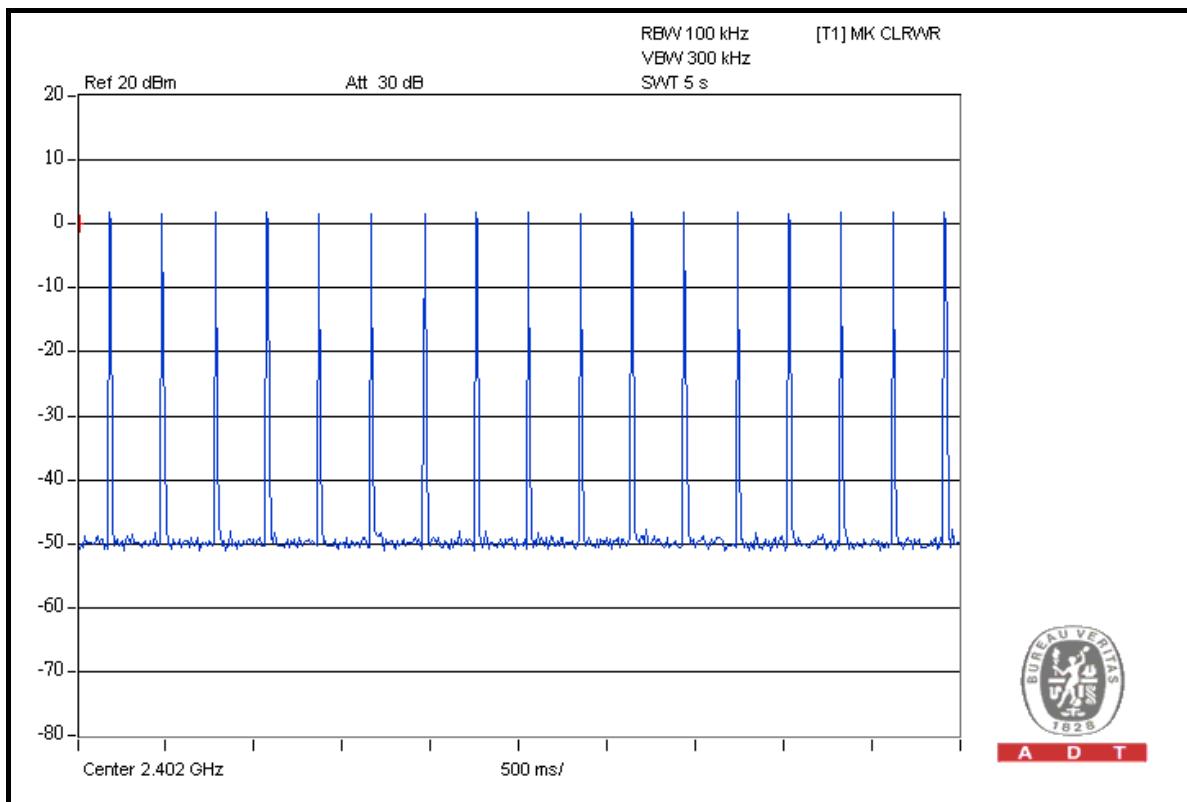



A D T

4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.



A D T

4.5.5 TEST SETUP

Same as 4.3.5.

4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.5.7 TEST RESULTS

GFSK MODULATION


MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH, 1010hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Antony Lee

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.931
39	2441	0.932
78	2480	0.932




A D T

CH 0

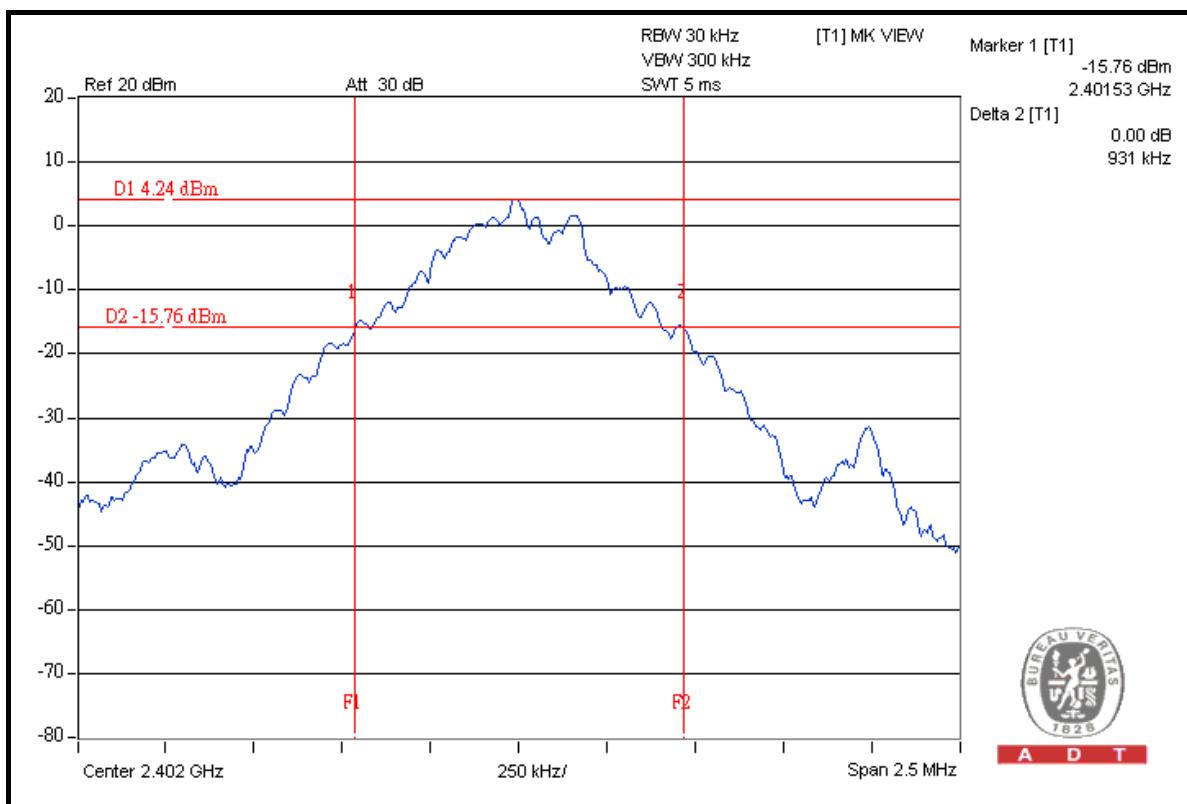


CH 39

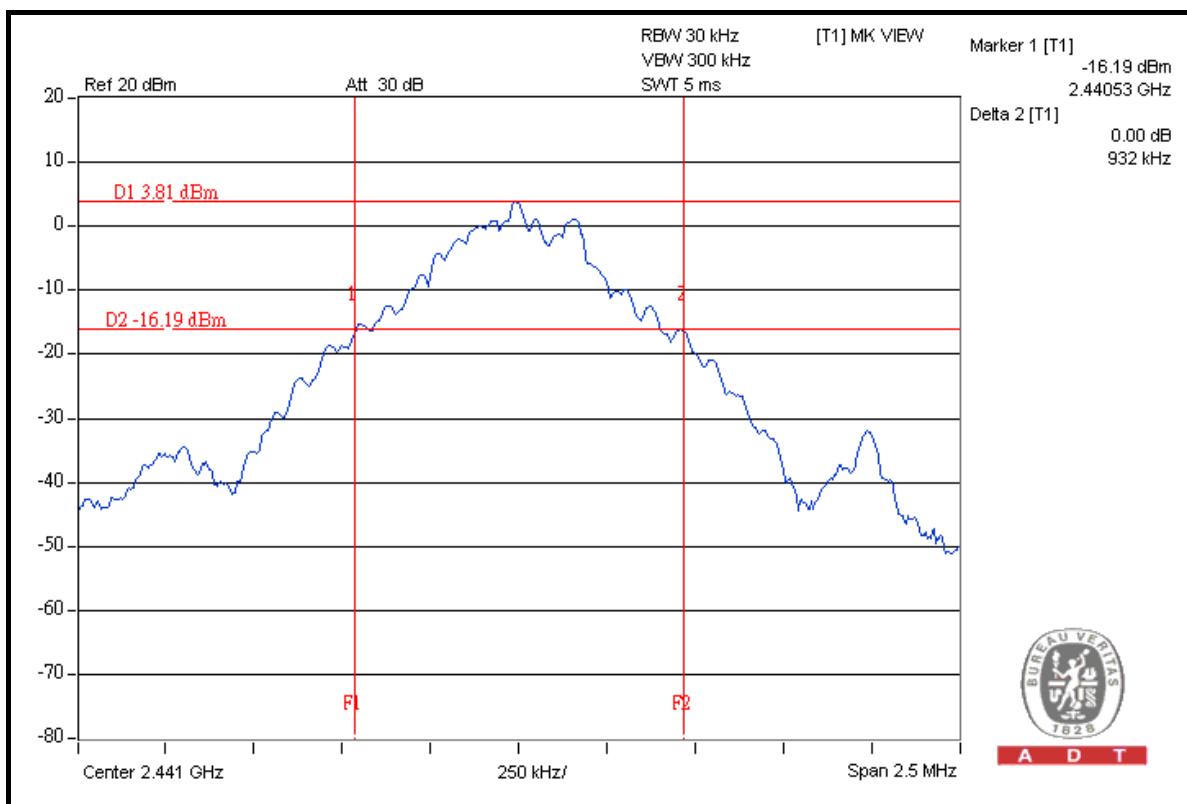



A D T

CH 78

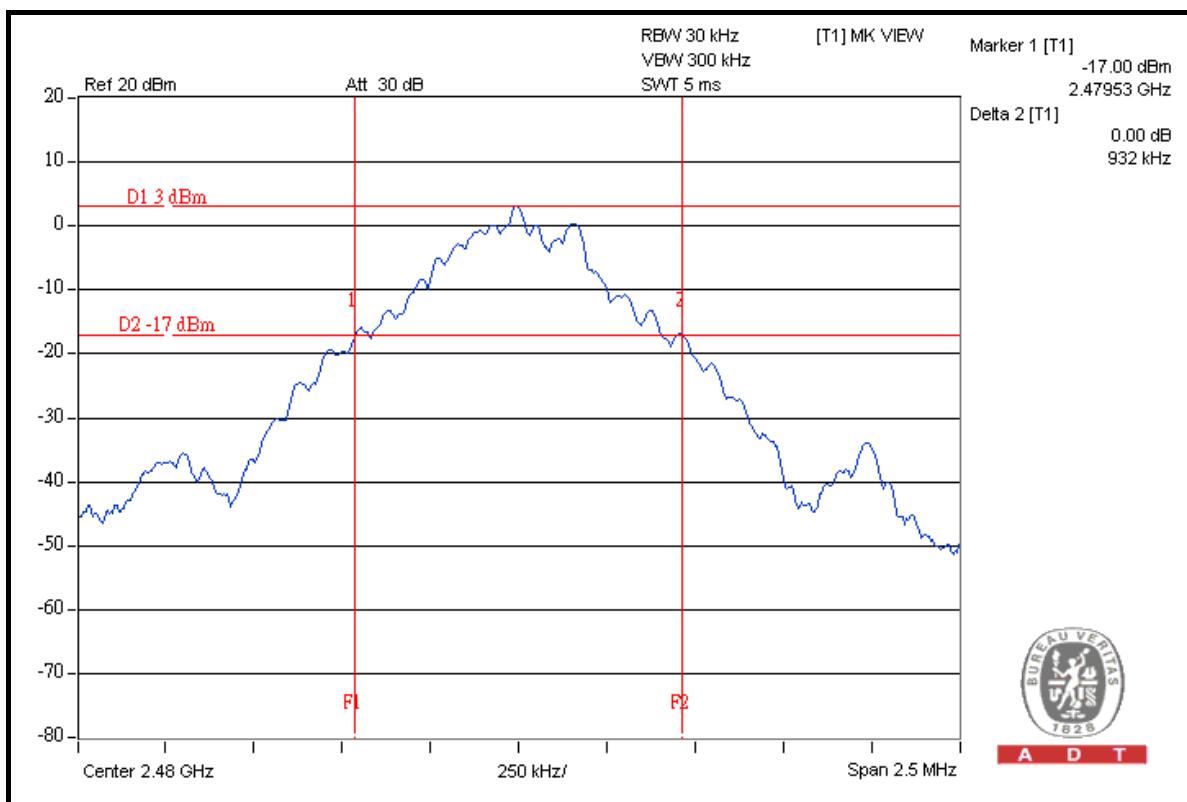




A D T

8DPSK MODULATION

MODULATION TYPE	8DPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH, 1010hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Kevin Liang

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.270
39	2441	1.260
78	2480	1.260


CH 0

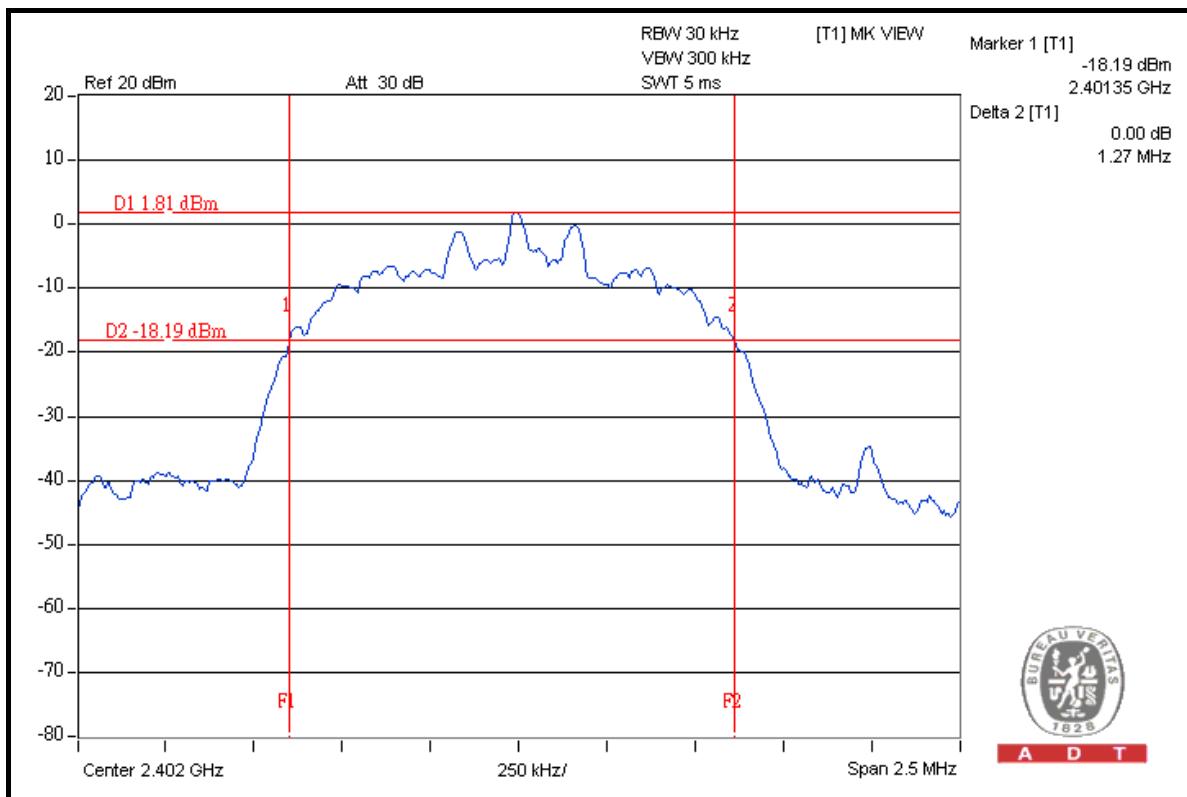




A D T

CH 39

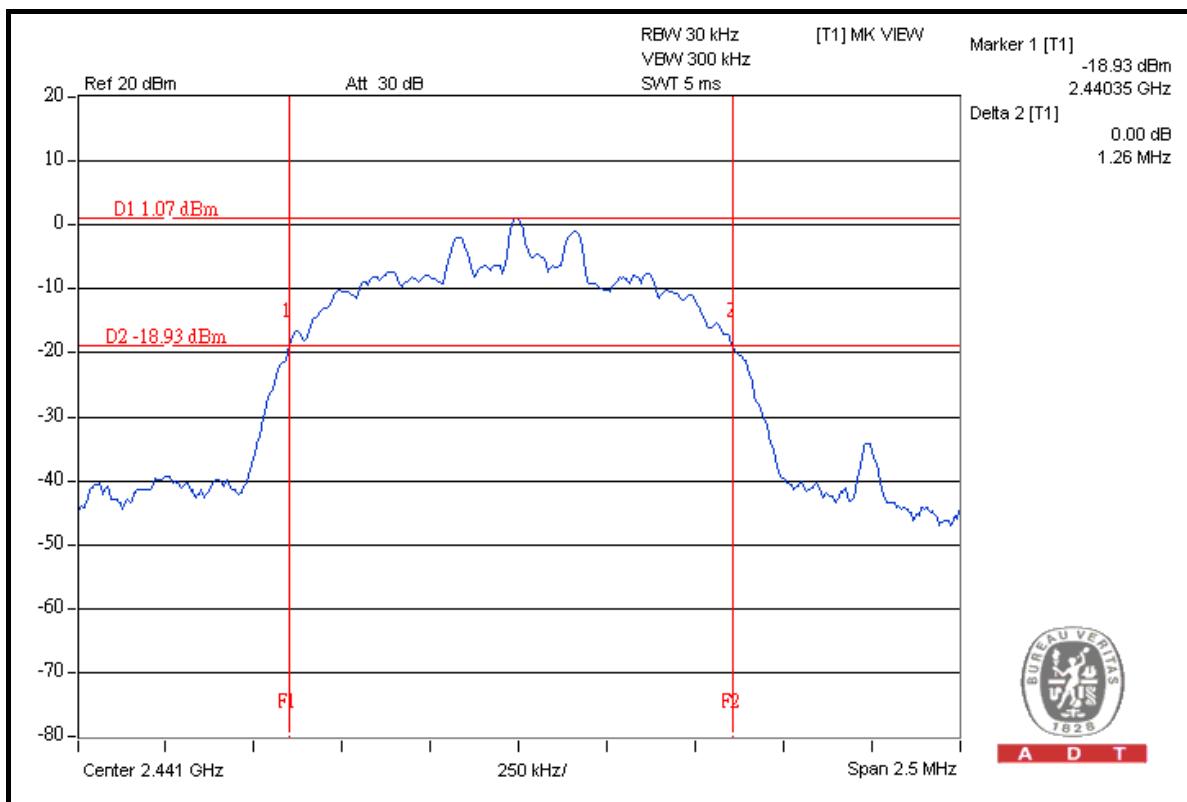

CH 78

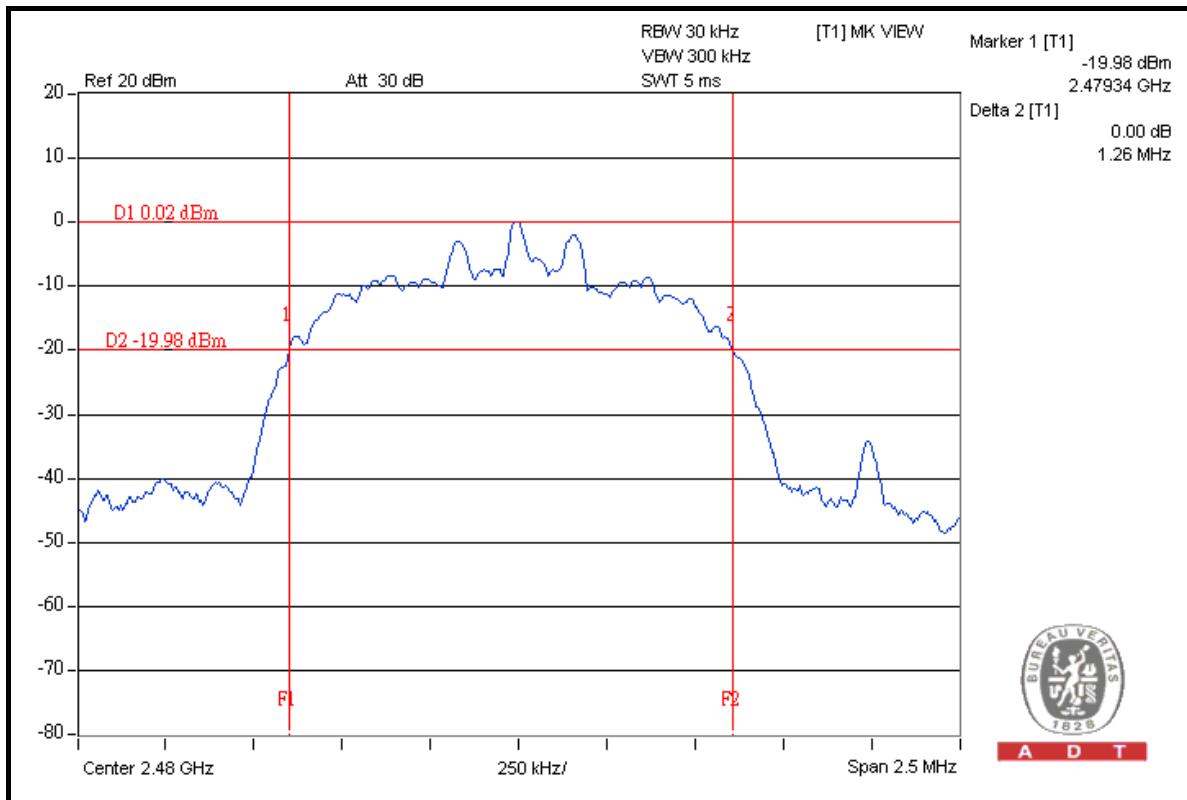



A D T

4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 TEST SETUP

Same as 4.3.5

4.6.6 TEST RESULTS


GFSK MODULATION

MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH, 1010hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Antony Lee

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.010	0.931	0.621	PASS
39	2441	1.000	0.932	0.621	PASS
78	2480	1.010	0.932	0.621	PASS

NOTE: The minimum limit is two-third 20dB bandwidth. Test results please refer to next two pages.


CH 0

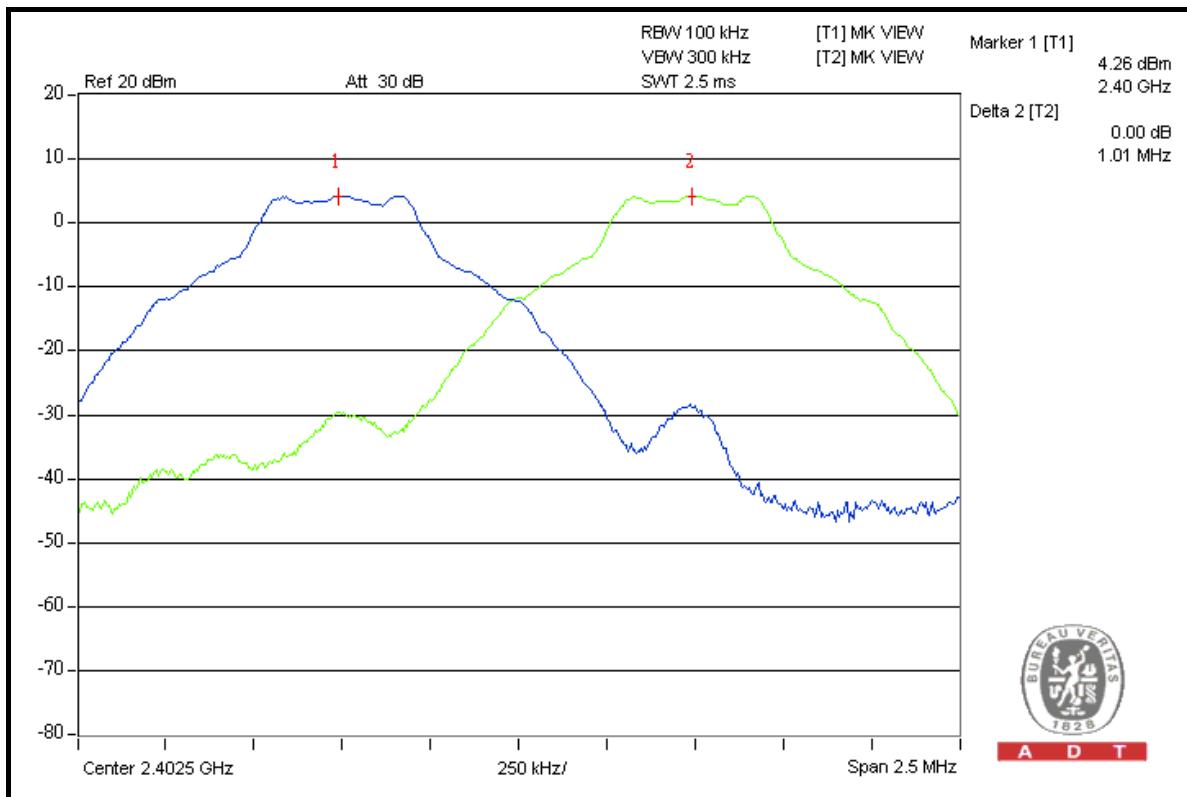




A D T

CH 39

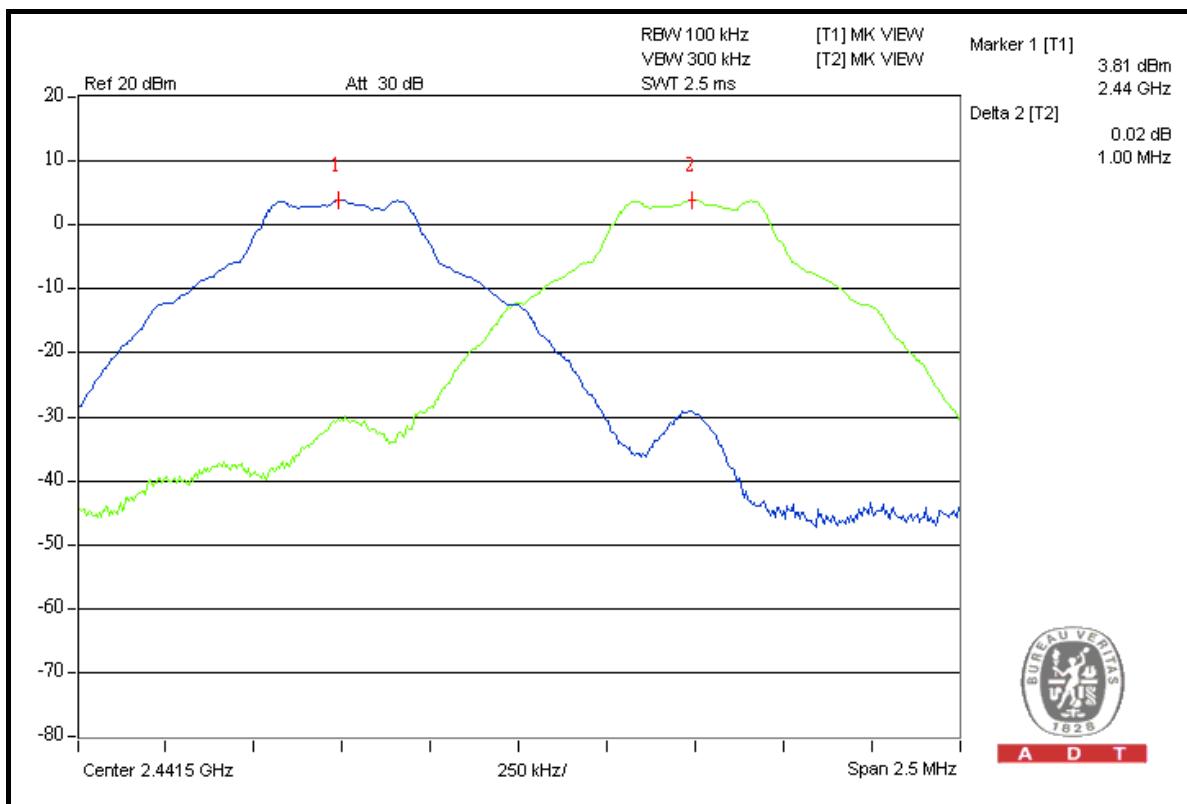

CH 78

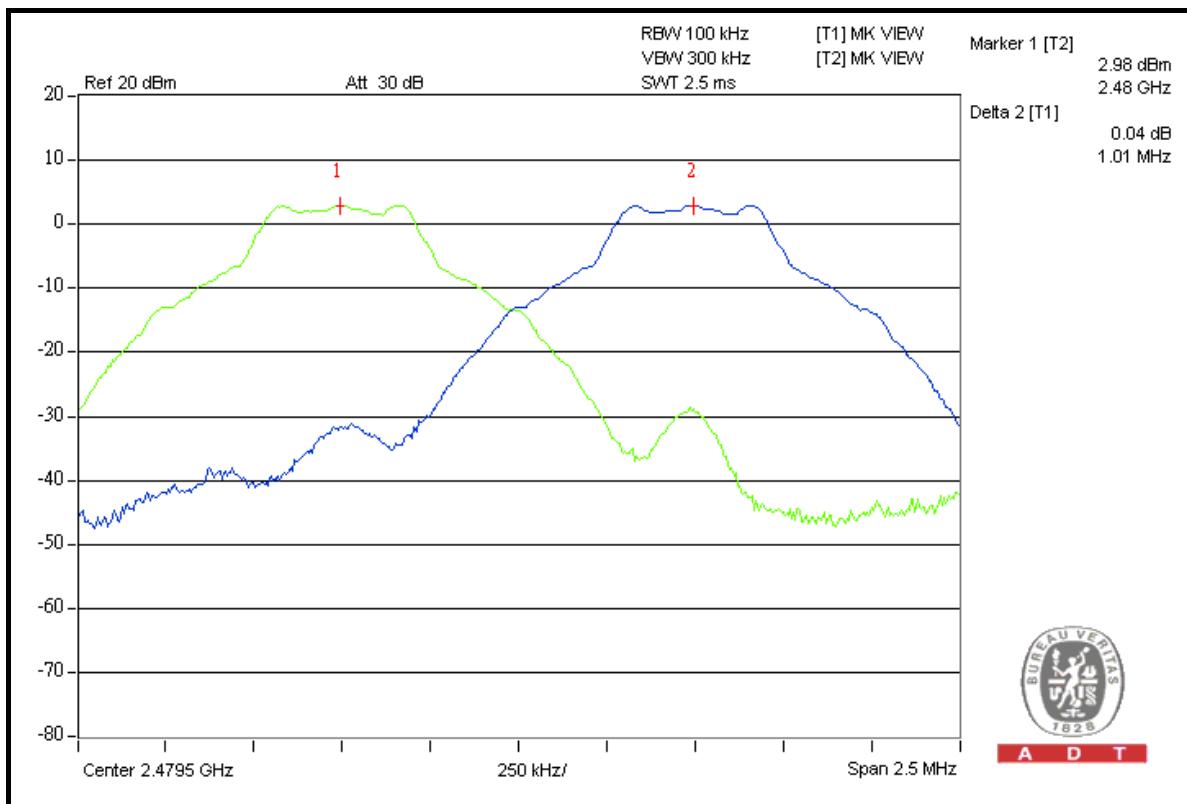




A D T

8DPSK MODULATION

MODULATION TYPE	8DPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH, 1010hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Kevin Liang

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.000	1.270	0.847	PASS
39	2441	1.000	1.260	0.840	PASS
78	2480	1.000	1.260	0.840	PASS


NOTE: The minimum limit is two-third 20dB bandwidth. Test results please refer to next two pages.

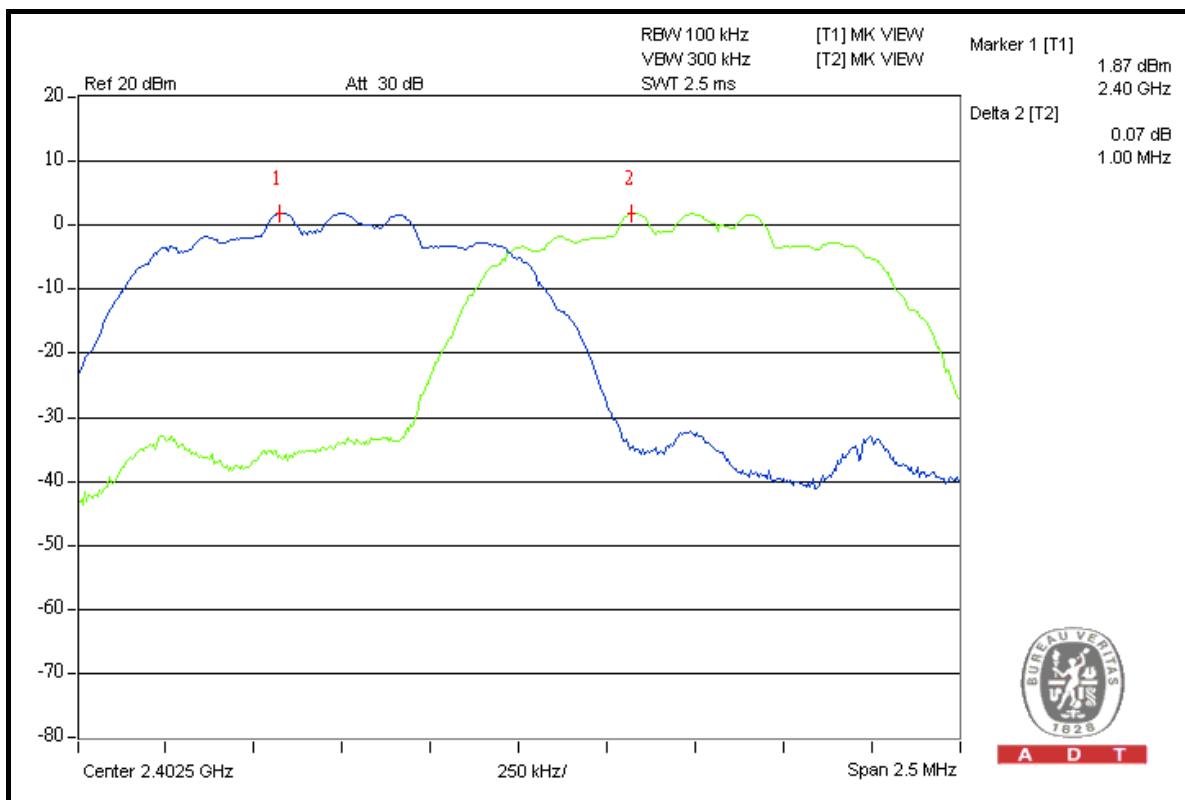CH 0




A D T

CH 39

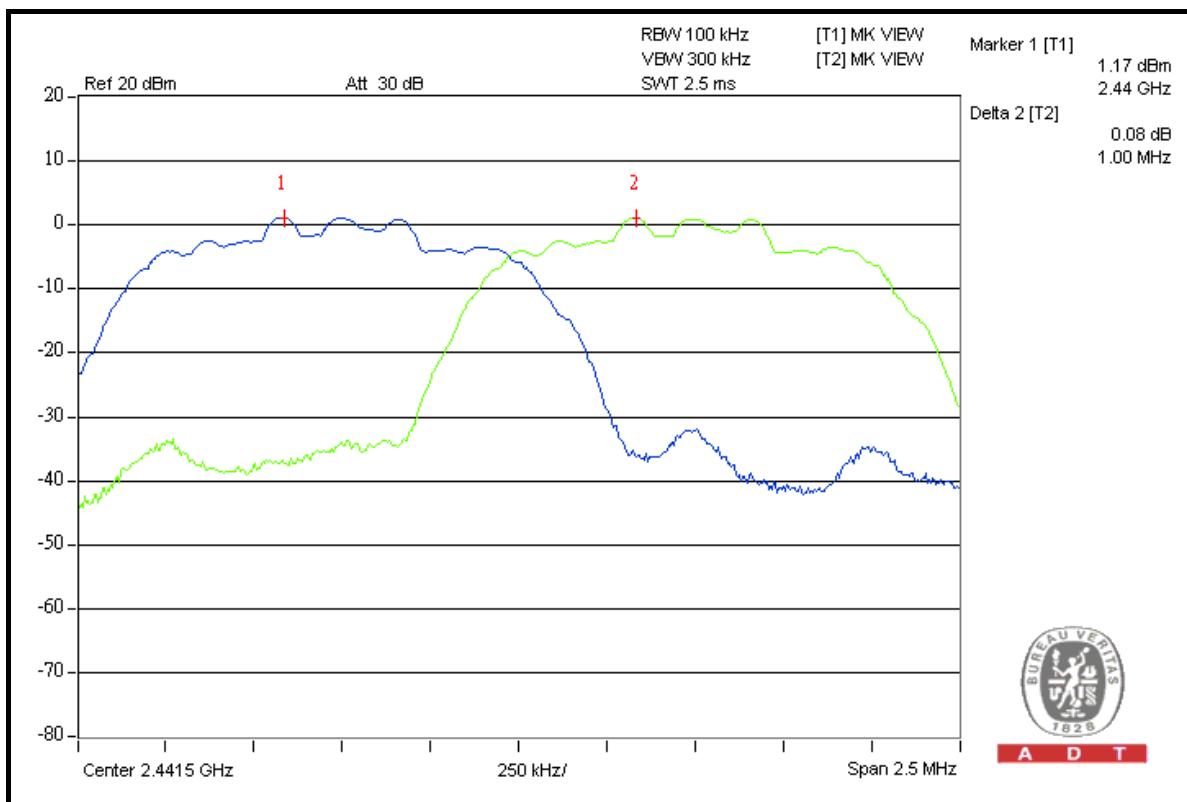

CH 78

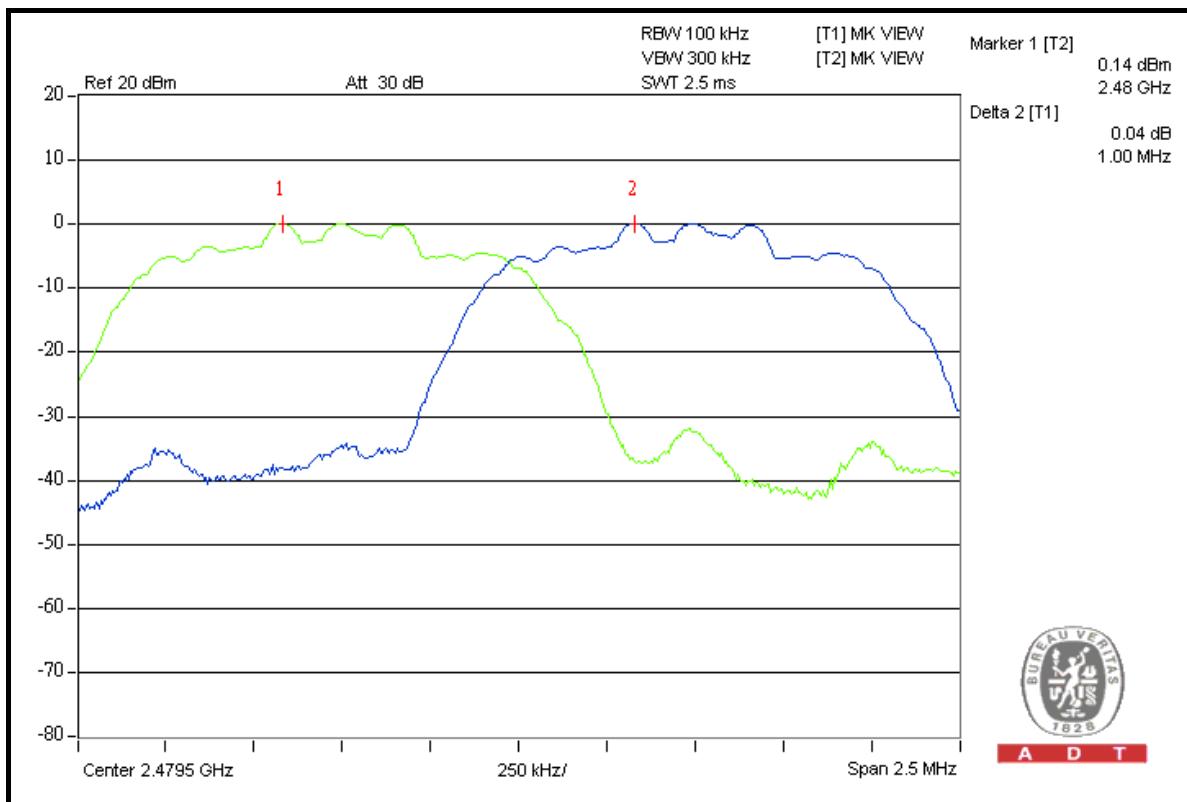



4.7 MAXIMUM PEAK OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 125mW.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation



A D T

4.7.5 TEST SETUP

Same as 4.3.5.

4.7.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.7.7 TEST RESULTS

GFSK MODULATION


MODULATION TYPE	GFSK	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH, 1010hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Antony Lee

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	2.661	4.25	125	PASS
39	2441	2.360	3.73	125	PASS
78	2480	1.954	2.91	125	PASS




A D T

CH 0

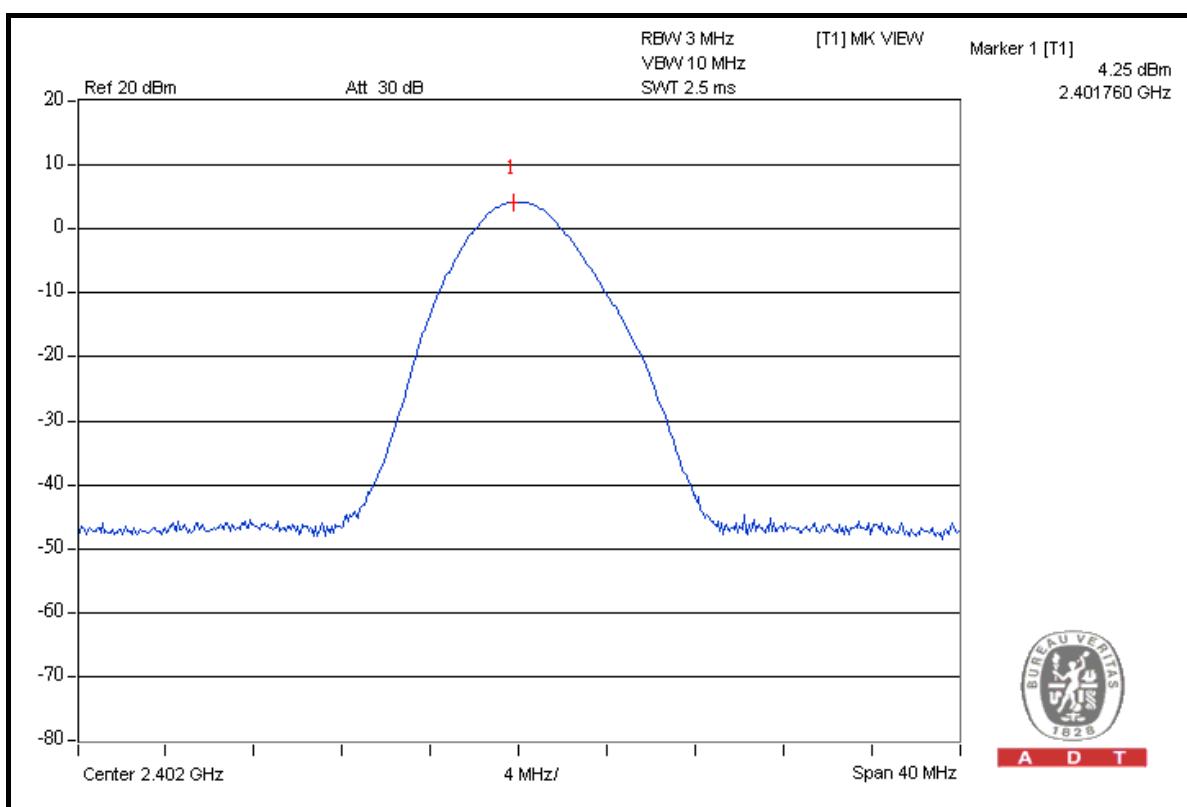


CH 39

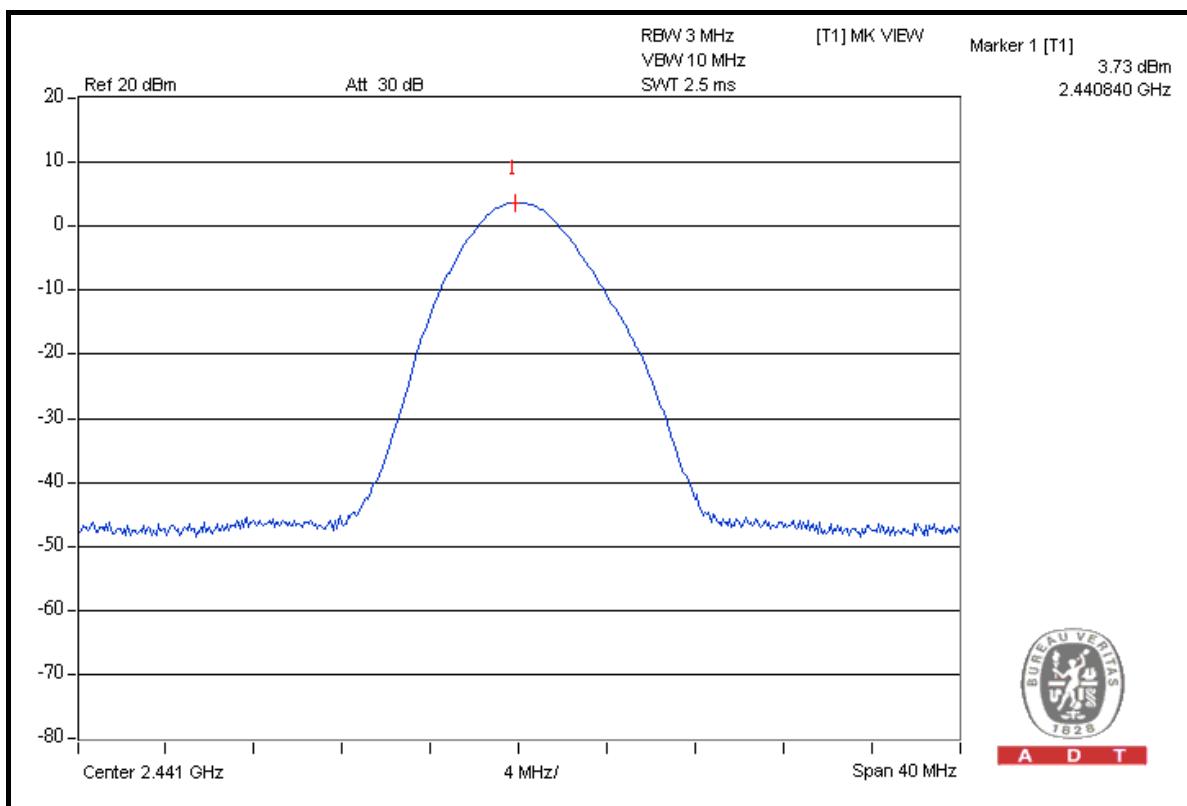



A D T

CH 78

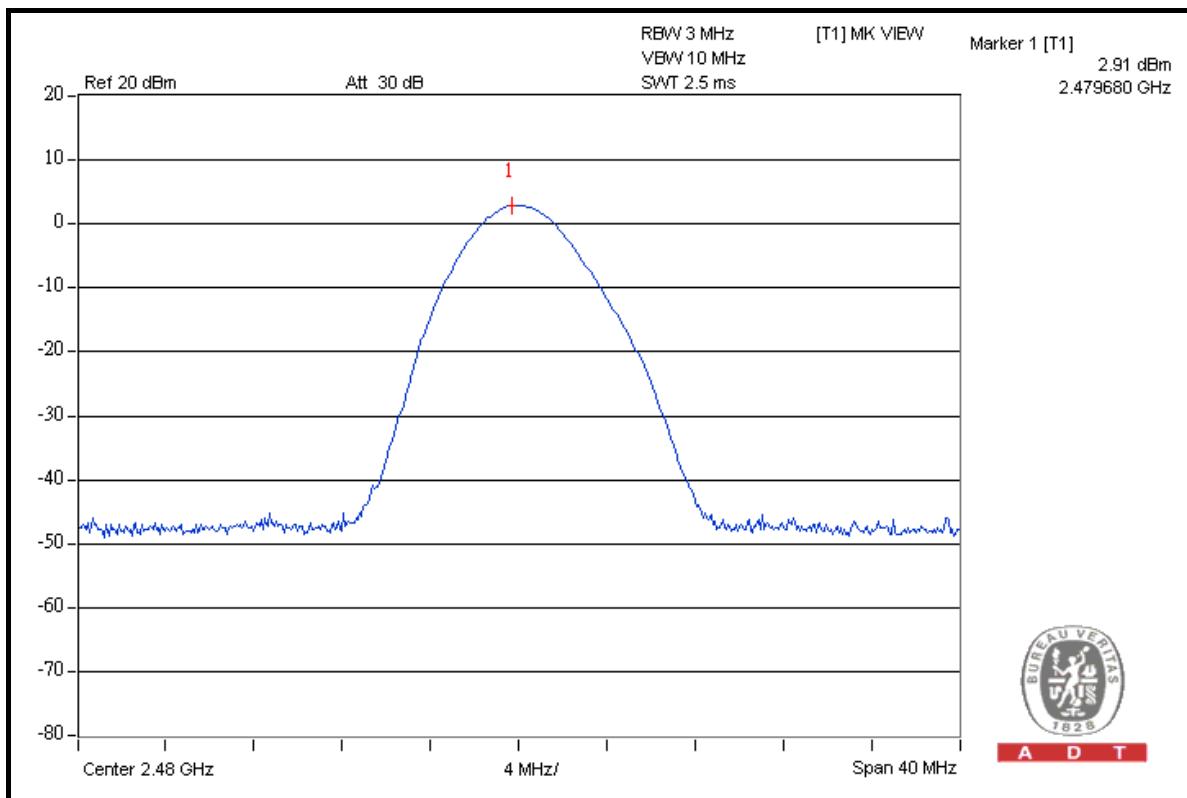




A D T

8DPSK MODULATION

MODULATION TYPE	8DPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH, 1010hPa
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TESTED BY	Kevin Liang

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	2.173	3.37	125	PASS
39	2441	1.807	2.57	125	PASS
78	2480	1.426	1.54	125	PASS


CH 0

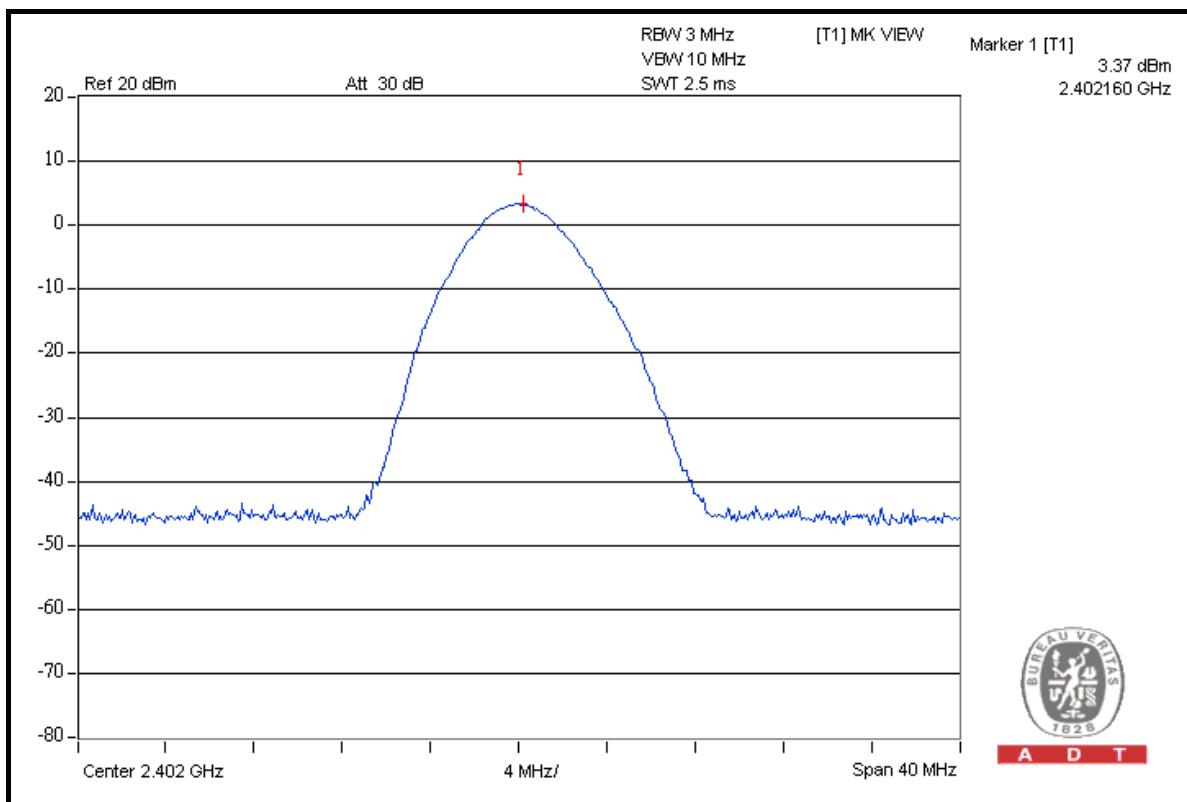




A D T

CH 39

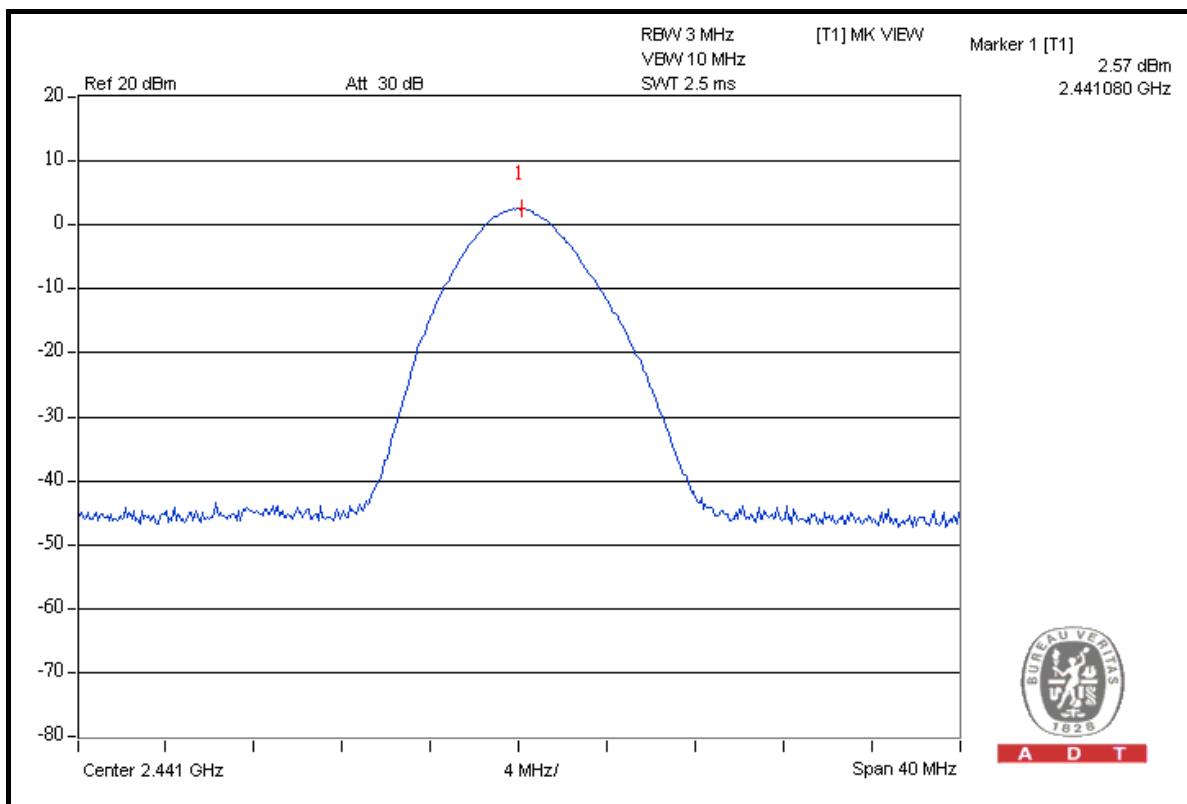

CH 78

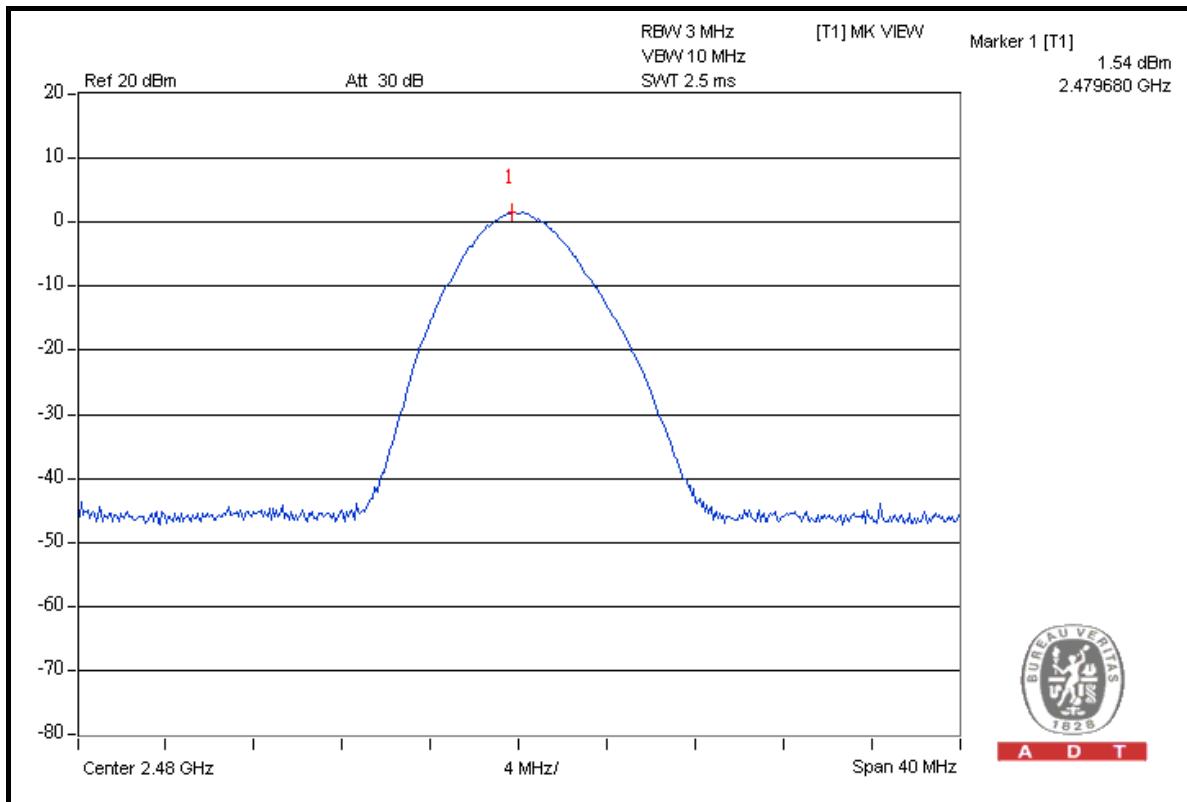



A D T

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
R&S SPECTRUM ANALYZER	FSP40	100041	May 13, 2009	May 12, 2010

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest and highest channel frequencies individually.



A D T

4.8.6 TEST RESULTS

The spectrum plots are attached on the following 8 images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

GFSK MODULATION

NOTE 1: The band edge emission plot on the next page shows 52.35dBc between carrier maximum power and local maximum emission in restrict band (2.3668GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.1.7 is 97.39dBuV/m (Peak), so the maximum field strength in restrict band is $97.39 - 52.35 = 45.04$ dBuV/m, which is under 74dBuV/m limit.

Average value = $45.04 - 30.10 = 14.94$ dBuV/m, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correction factor be equal to: $20\log(3.125/100) = -30.1$ dB.

Average value = peak reading – 30.1

NOTE 2: The band edge emission plot on the next second page shows 45.97dBc between carrier maximum power and local maximum emission in restrict band (2.4840GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.1.7 is 91.19 dBuV/m (Peak), so the maximum field strength in restrict band is $91.19 - 45.97 = 45.22$ dBuV/m, which is under 74 dBuV/m limit.



Average value = $45.22 - 30.10 = 15.12$ dBuV/m, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle correction factor be equal to: $20\log(3.125/100) = -30.1$ dB.

Average value = peak reading – 30.1





A D T

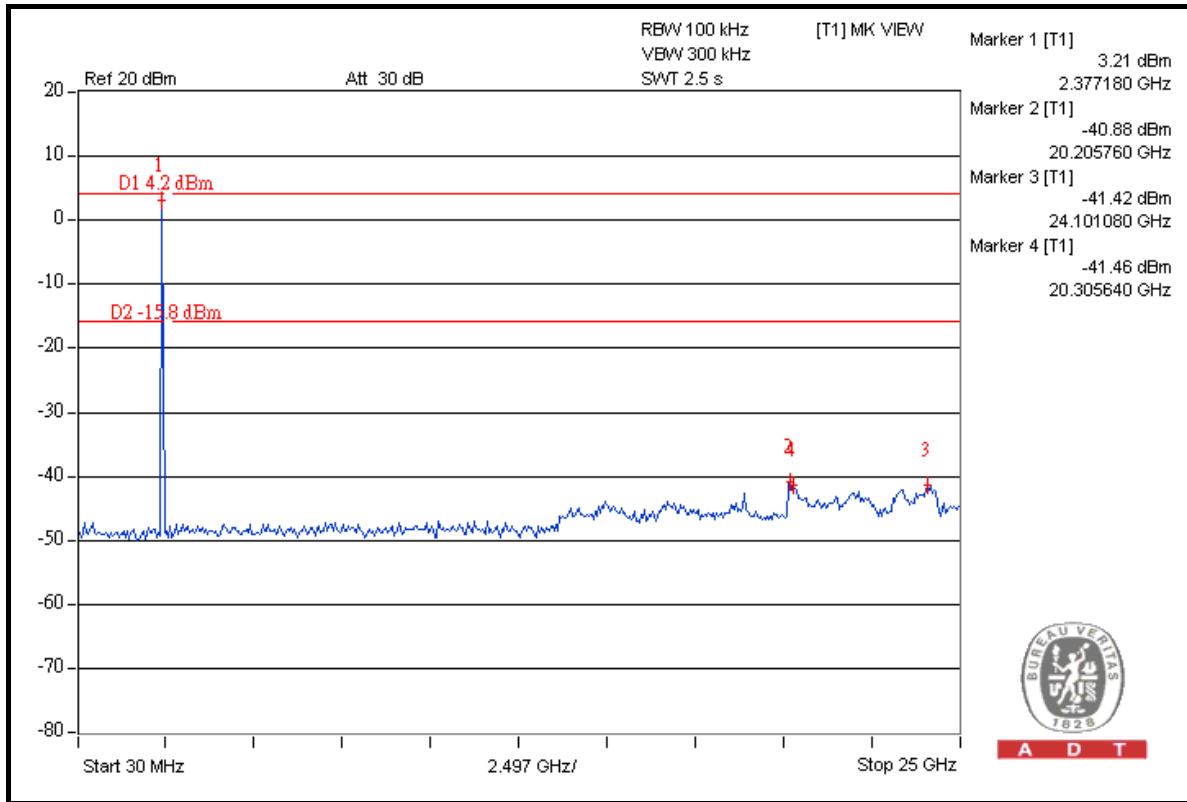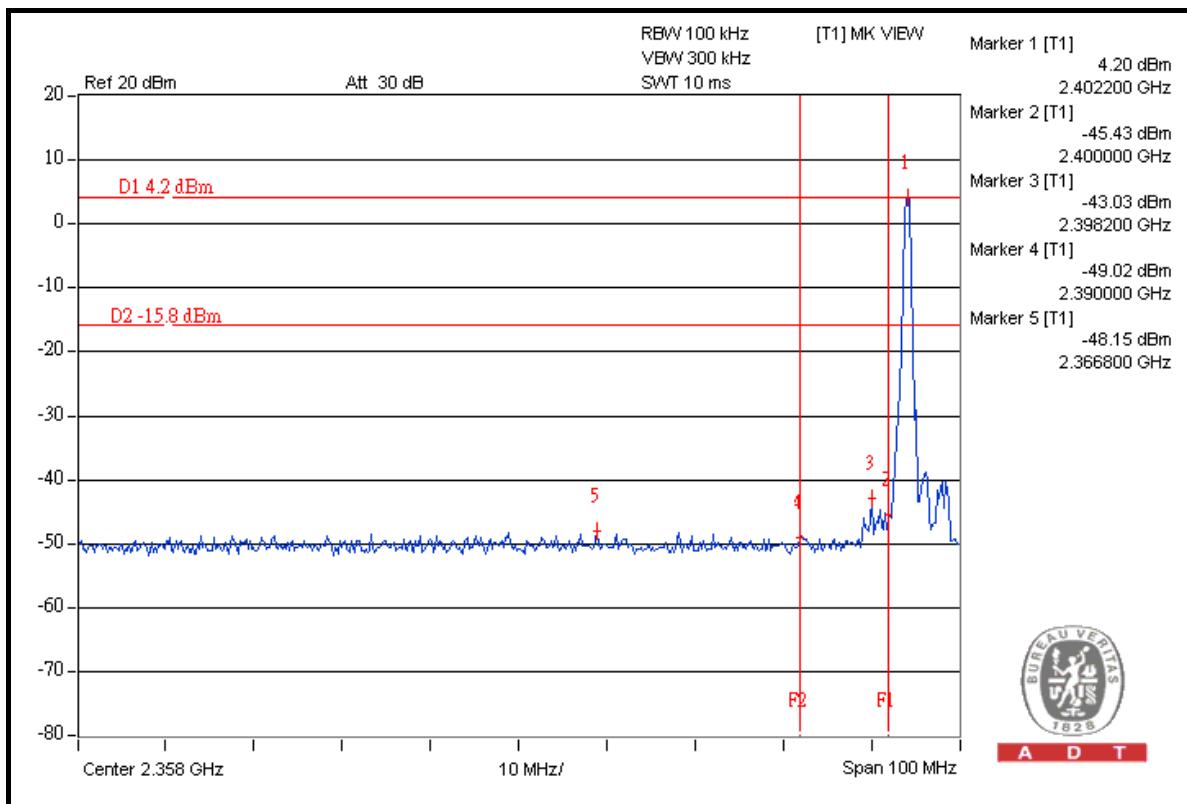



A D T

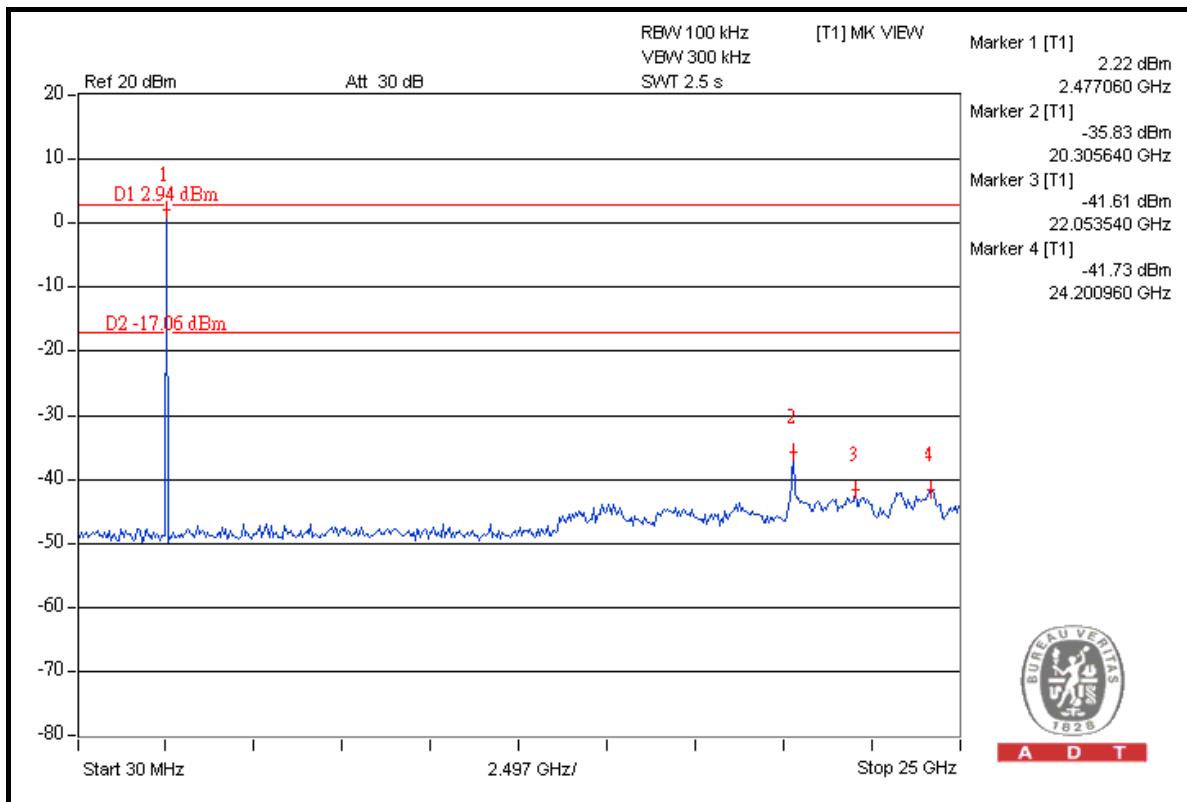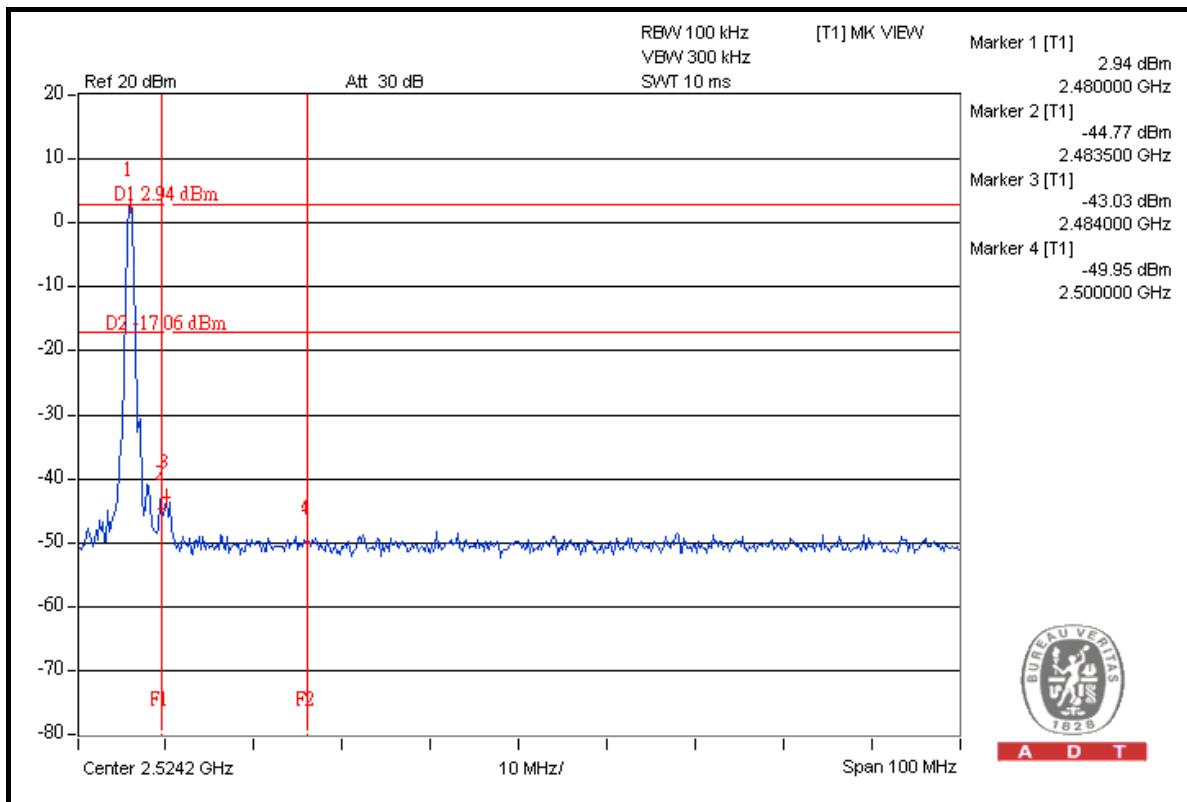



A D T

8DPSK MODULATION

NOTE 1: The band edge emission plot on the next page shows 49.54dBc between carrier maximum power and local maximum emission in restrict band (2.3420GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.1.7 is 93.49dBuV/m (Peak), so the maximum field strength in restrict band is $93.49 - 49.54 = 43.95$ dBuV/m, which is under 74 dBuV/m limit.

Average value = $43.95 - 30.10 = 13.85$ dBuV/m, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30.1$ dB.

Average value = peak reading – 30.1

NOTE 2: The band edge emission plot on the next second page shows 42.44dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.1.7 is 87.51dBuV/m (Peak), so the maximum field strength in restrict band is $87.51 - 42.44 = 45.07$ dBuV/m, which is under 74 dBuV/m limit.



Average value = $45.07 - 30.10 = 14.97$ dBuV/m, which is under 54dBuV/m limit.

*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: $20\log(3.125/100) = -30.1$ dB.

Average value = peak reading – 30.1





A D T

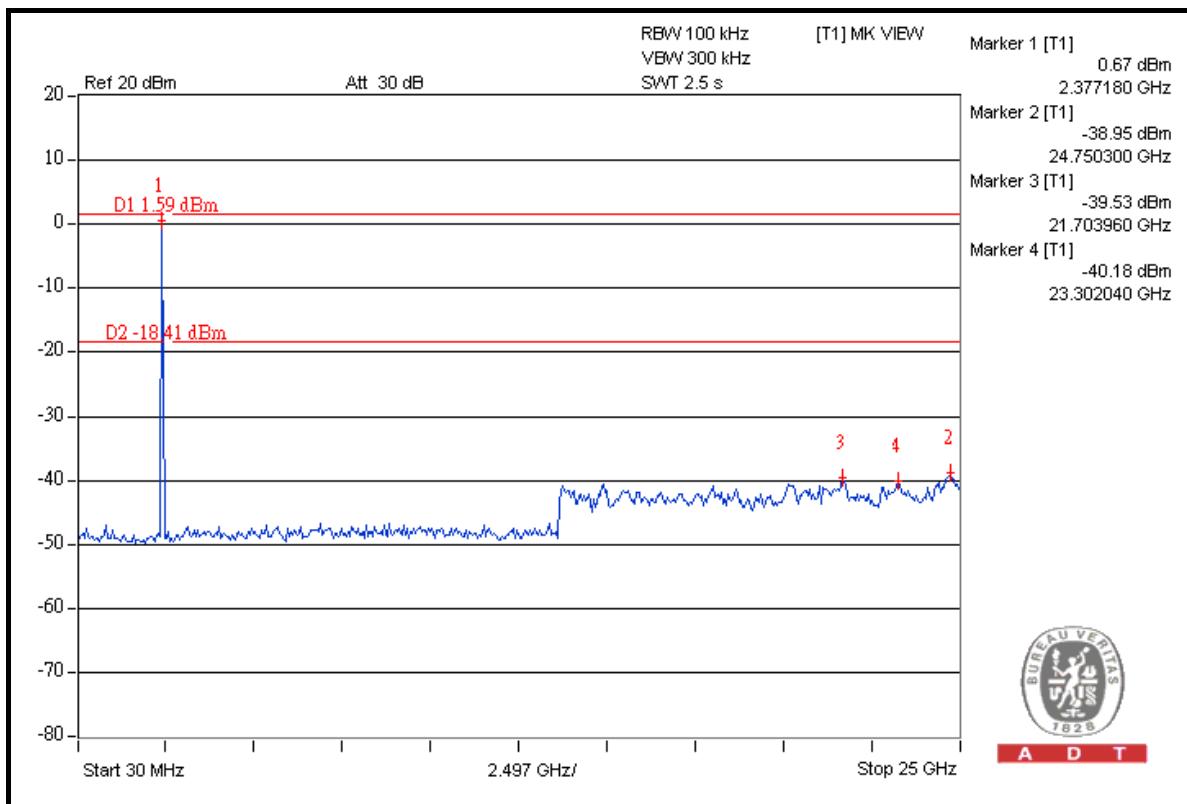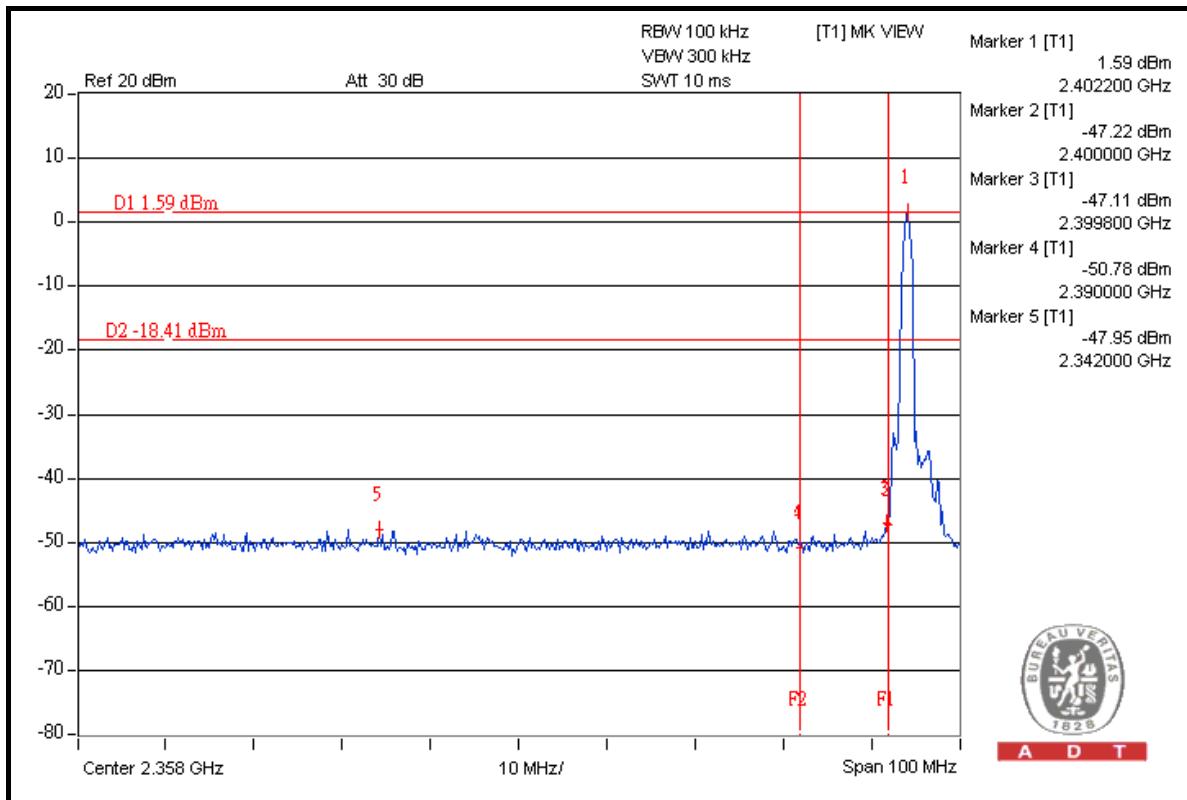



A D T

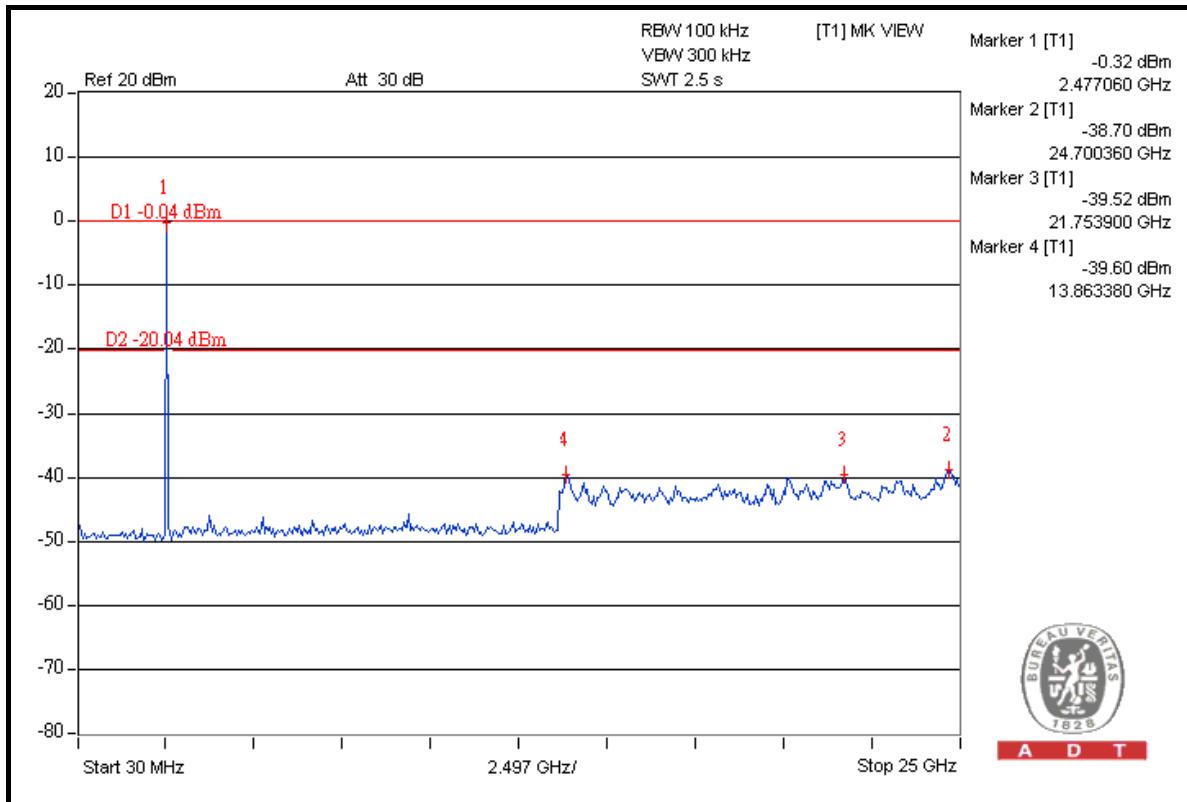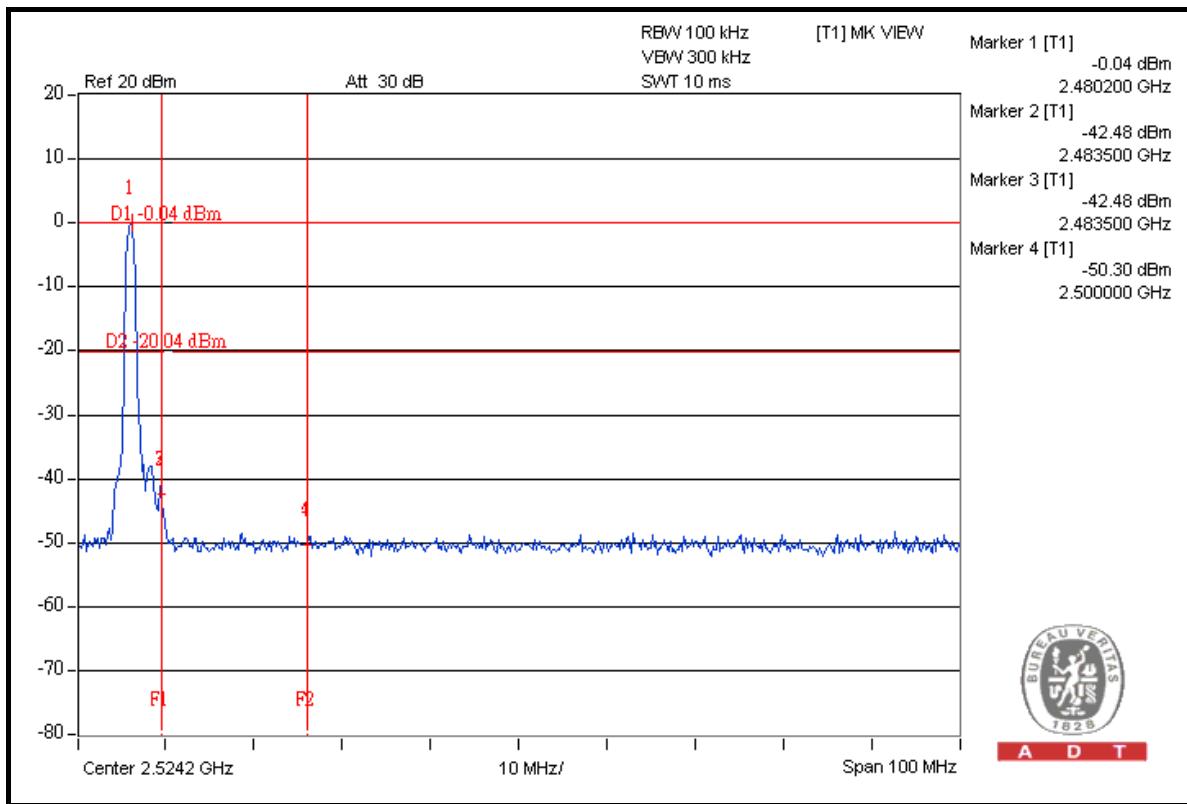



A D T

4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is chip antenna that without antenna connector. The maximum gain of this antenna is 0.5dBi.



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---