

FCC Part15.247 FHSS Test Report

Product Name : Bluetooth Handsfree Speaker

Model No. : BTHF205T

FCC ID : TQ6BTHF205T

Applicant : Shanghai Flaircomm Technologies

Address : No.5,Bibo Road, Keyuan Building, 4F, Zhangjiang
Hi-Tech Park. Shanghai, 201203 P.R.China

Date of Receipt : 2009/10/19

Issued Date : 2009/11/17

Report No. : 09AS042R-RF-US-P06V01

Report Version : V2.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by CNLA, NVLAP or any agency of the Government.
The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : 2009/11/17

Report No. : 09AS042R-RF-US-P06V01



Product Name : Bluetooth Handsfree Speaker

Applicant : Shanghai Flaircomm Technologies

Address : No.5,Bibo Road, Keyuan Building, 4F, Zhangjiang Hi-Tech Park. Shanghai,201203 P.R.China

Manufacturer : Flaircomm Technologies Inc

Address : No. 5, Bibo Road, Keyuan Building 4F, Zhangjiang Hi-Tech Park, Shanghai 201203 P.R. China

Model No. : BTHF205T

FCC ID : TQ6BTHF205T

EUT Voltage : DC 3.7V

Trade Name : Flaircomm

Applicable Standard : FCC CFR Title 47 Part 15 Subpart C / ANSI C63.4: 2003

Test Result : Complied

Performed Location : SuZhou EMC laboratory
No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., SuZhou, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Registration Number: 800392

Documented By : Alice Ni
(Engineering ADM: Alice Ni)

Reviewed By : Marlinchen
(Engineering Supervisor: Marlin Chen)

Approved By : Dream Cao
(Engineering Manager: Dream Cao)

Laboratory Information

We , **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited by the following accreditation Bodies in compliance with ISO 17025, EN 45001 and Guide 25:

Taiwan R.O.C.	: BSMI, DGT, CNLA
Germany	: TUV Rheinland
Norway	: Nemko, DNV
USA	: FCC, NVLAP
Japan	: VCCI

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://tw.quietek.com/modules/myalbum/>
The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>
If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com



LinKou Testing Laboratory :

No. 5, Ruei-Shu Valley, Ruei-Ping Tsuen, Lin-Kou Shiang, Taipei, Taiwan, R.O.C.
TEL : +886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com



Suzhou Testing Laboratory :

No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., SuZhou, China
TEL : +86-512-6251-5088 / FAX : 86-512-6251-5098 E-Mail : service@quietek.com



TABLE OF CONTENTS

Description	Page
1. General Information.....	7
1.1. EUT Description	7
1.2. Mode of Operation	9
1.3. Tested System Details.....	10
1.4. Configuration of Tested System	11
1.5. EUT Exercise Software	12
2. Technical Test.....	13
2.1. Summary of Test Result	13
2.2. Test Environment	13
3. Conducted Emission	14
3.1. Test Equipment	14
3.2. Test Setup	14
3.3. Limit.....	15
3.4. Test Procedure	15
3.5. Uncertainty	15
3.6. Test Result	16
4. Radiated Emission	22
4.1. Test Equipment	22
4.2. Test Setup	23
4.3. Limit.....	24
4.4. Test Procedure	24
4.5. Uncertainty	24
4.6. Test Result	25
5. 20dB Bandwidth	27
5.1. Test Equipment	27
5.2. Test Setup	27
5.3. Limit.....	27
5.4. Test Procedure	28
5.5. Uncertainty	28
5.6. Test Result	29
6. Carrier Frequency Separation	33
6.1. Test Equipment	33
6.2. Test Setup	33
6.3. Limit.....	33
6.4. Test Procedure	34
6.5. Uncertainty	34
6.6. Test Result	35

7.	Number of Hopping Frequencies	39
7.1.	Test Equipment	39
7.2.	Test Setup	39
7.3.	Limit.....	39
7.4.	Test Procedure	40
7.5.	Uncertainty	40
7.6.	Test Result	41
8.	Time of Occupancy (Dwell Time).....	47
8.1.	Test Equipment	47
8.2.	Test Setup	47
8.3.	Limit.....	47
8.4.	Test Procedure	48
8.5.	Uncertainty	48
8.6.	Test Result	49
9.	Peak Output Power	52
9.1.	Test Equipment	52
9.2.	Test Setup	52
9.3.	Limit.....	52
9.4.	Test Procedure	53
9.5.	Uncertainty	53
9.6.	Test Result	54
10.	Band-edge Compliance of RF Conducted Emissions	55
10.1.	Test Equipment	55
10.2.	Test Setup	55
10.3.	Limit.....	55
10.4.	Test Procedure	56
10.5.	Uncertainty	56
10.6.	Test Result	57
11.	Spurious RF Conducted Emissions.....	59
11.1.	Test Equipment	59
11.2.	Test Setup	59
11.3.	Limit.....	59
11.4.	Test Procedure	60
11.5.	Uncertainty	60
11.6.	Test Result	61
12.	Radiated Emission Band Edge.....	65
12.1.	Test Equipment	65
12.2.	Test Setup	66

12.3. Limit.....66

12.4. Test Procedure66

12.5. Uncertainty67

12.6. Test Result68

1. General Information

1.1. EUT Description

Product Name	Bluetooth Handsfree Car Kit
Trade Name	Flaircomm
Model No.	BTHF205T
FCC ID	TQ6BTHF205T
Working Voltage	DC 3.7V
Frequency Range	2402 - 2480 MHz
Channel Number	79
Type of Modulation	FHSS
Data Rate	1Mbps(GFSK), 2Mbps(8DPSK), 3Mbps (Pi/4 DQPSK)
Channel Control	Auto
Antenna Type	PCB Antenna
Peak Antenna Gain	0.54dBi for 2.4G

Component	
Car Charger	Manufacturer: Shanghai Flaircomm Technologies Inc M/N: TTX-GC-196C Input: 12~24VDC 3.7V Output: 5.0VDC 3.7V, 500mA Cable Out: Non-Shielded, 1.8m
USB Cable	Manufacturer: MORETHANALL (CHANGZHOU) ELECTRONICS CO., LTD M/N: YK-C008-USB002

Bluetooth Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz	03	2405 MHz
04	2406 MHz	05	2407 MHz	06	2408 MHz	07	2409 MHz
08	2410 MHz	09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz	15	2417 MHz
16	2418 MHz	17	2419 MHz	18	2420 MHz	19	2421 MHz
20	2422 MHz	21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz	27	2429 MHz
28	2430 MHz	29	2431 MHz	30	2432 MHz	31	2433 MHz
32	2434 MHz	33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz	39	2441 MHz
40	2442 MHz	41	2443 MHz	42	2444 MHz	43	2445 MHz
44	2446 MHz	45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz	51	2453 MHz
52	2454 MHz	53	2455 MHz	54	2456 MHz	55	2457 MHz
56	2458 MHz	57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz	63	2465 MHz
64	2466 MHz	65	2467 MHz	66	2468 MHz	67	2469 MHz
68	2470 MHz	69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz	75	2477 MHz
76	2478 MHz	77	2479 MHz	78	2480 MHz	N/A	N/A

1.2. Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit (DH5)
Mode 2: Transmit (3DH5)

Note:


1. DH5 is for GFSK modulation, and 3DH5 is for Pi/4 DQPSK.
2. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
3. Since this is a portable device, radiated emission test has been verified over all three orthogonal planes, and shown the worst plane test result on this report.

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	N/A	N/A	N/A	N/A	N/A

1.4. Configuration of Tested System

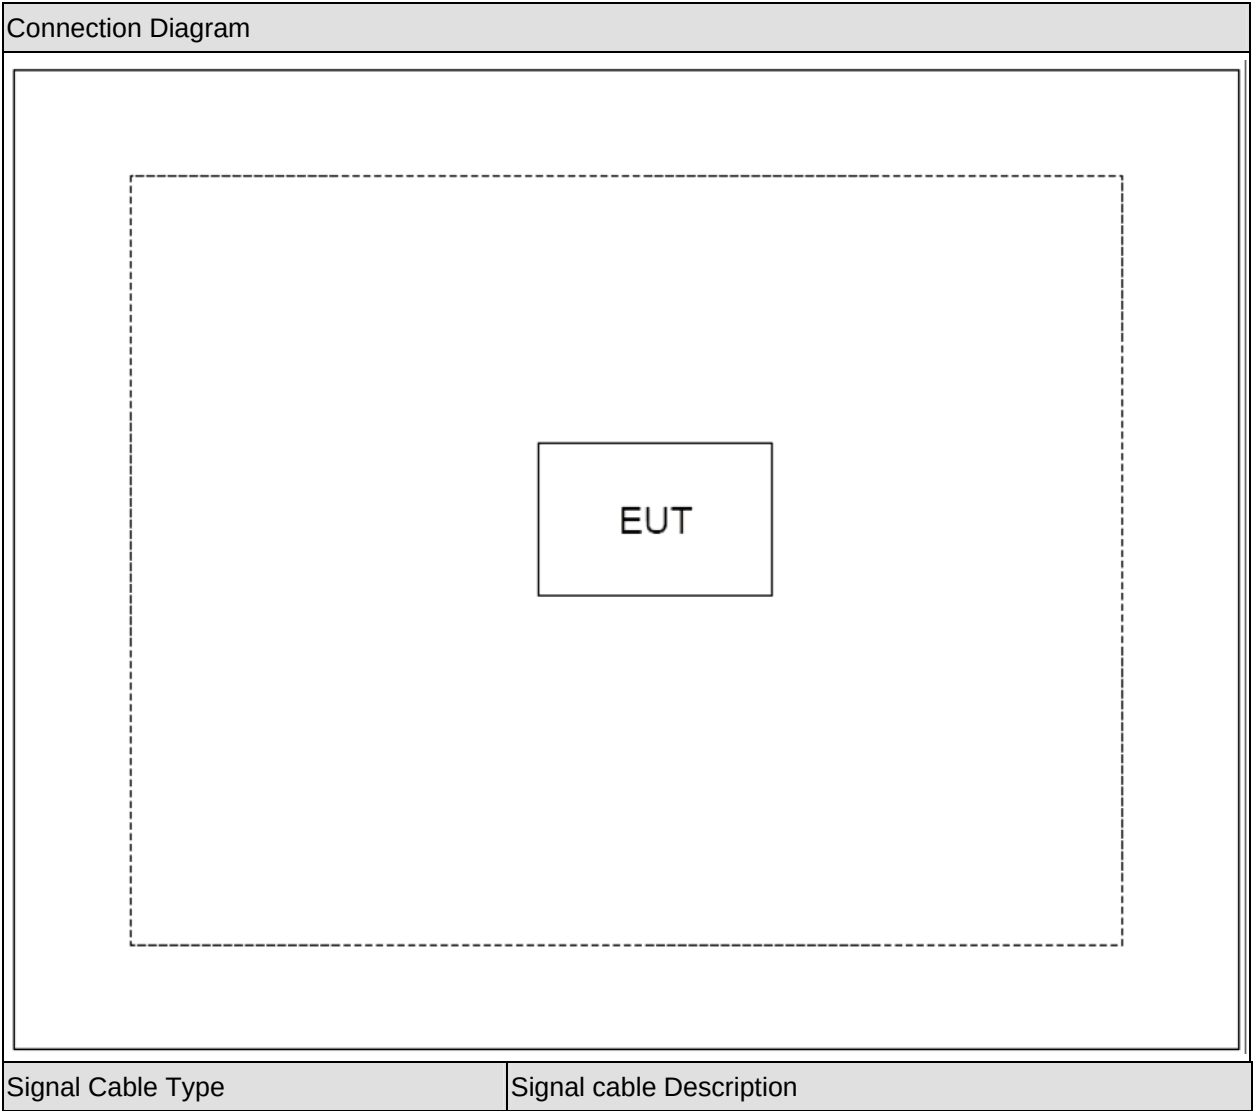

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown above.
2	Turn on the power of all equipment.
3	Execute the Bluetest V1.20 Test program on the PC.
4	Setup the test channel and the test mode press ok to start the Continue Transmit.

2. Technical Test

2.1. Summary of Test Result

☒ No deviations from the test standards

☐ Deviations from the test standards as below description:

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.207	Yes	No
Radiated Emission	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.209	Yes	No
20dB Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(a)(1)	Yes	No
Carrier Frequency Separation	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(a)(1)	Yes	No
Number of Hopping Frequencies	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(a)(1)(iii)	Yes	No
Time of Occupancy (Dwell Time)	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(a)(1)(iii)	Yes	No
Peak Output Power	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.247(b)(1)	Yes	No
Band-edge Compliance of RF Conducted Emissions	FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.215(c), 15.247(d)	Yes	No
Spurious RF Conducted Emissions	FCC CFR Title 47 Part 15 Subpart C: 2008 15.247(d)	Yes	No
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2008 15.247(d)	Yes	No

2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

3. Conducted Emission


3.1. Test Equipment

Conducted Emission / SR-1

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
EMI Test Receiver	R&S	ESCI	100726	2009/06/28
Two-Line V-Network	R&S	ENV216	100013	2009/06/28
Two-Line V-Network	R&S	ENV216	100014	2009/06/28
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2008/11/24
50ohm Termination	SHX	TF2	07081401	2009/09/28
Coaxial Cable	Luthi	RG214	519358	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH004	2009/03/30

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

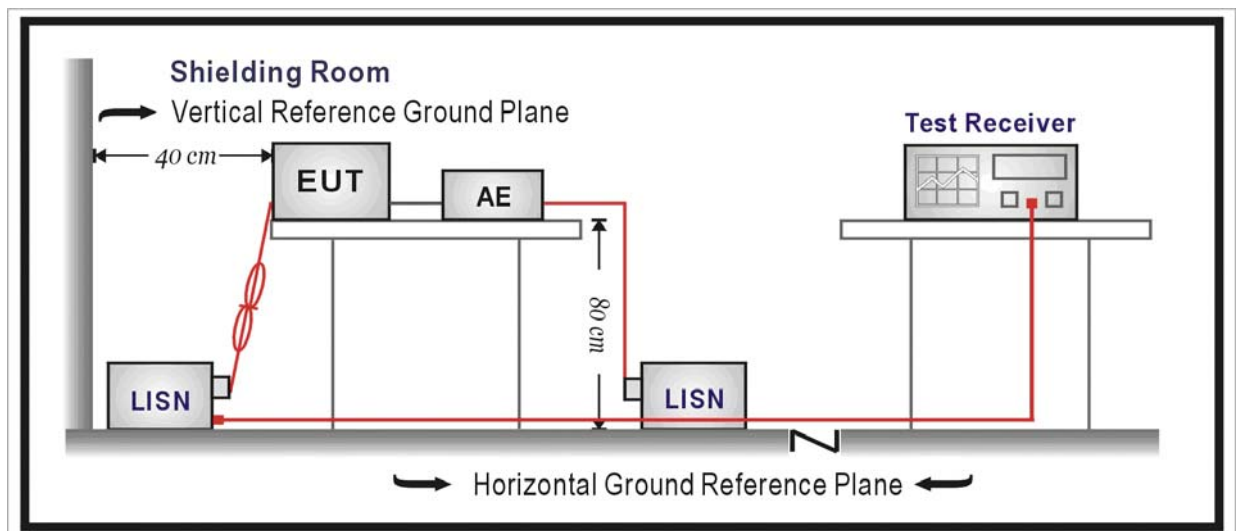

3.3. Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

3.4. Test Procedure

According to FCC Public Notice DA 00-705, March 30, 2000.

The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Uncertainty


The measurement uncertainty is defined as ± 2.02 dB

3.6. Test Result

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2009/10/28 - 21:17
Limit : FCC_SPartC_15.207_00M_QP	Margin : 10
Probe : ENV216_100013(0.009-30MHz) - Line1	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1

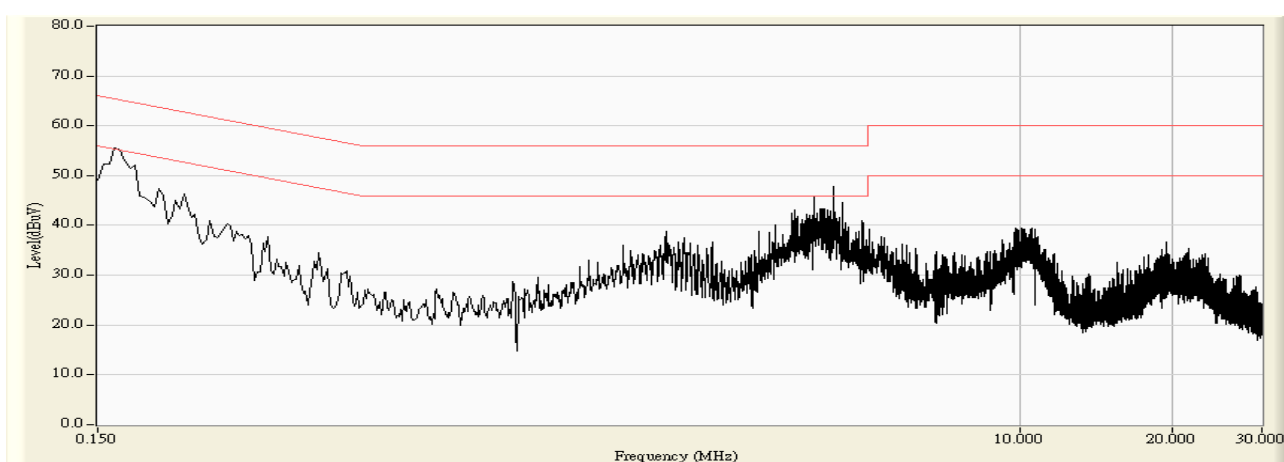


Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2009/10/28 - 21:19
Limit : FCC_SPartC_15.207_00M_QP	Margin : 0
Probe : ENV216_100013(0.009-30MHz) - Line1	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1

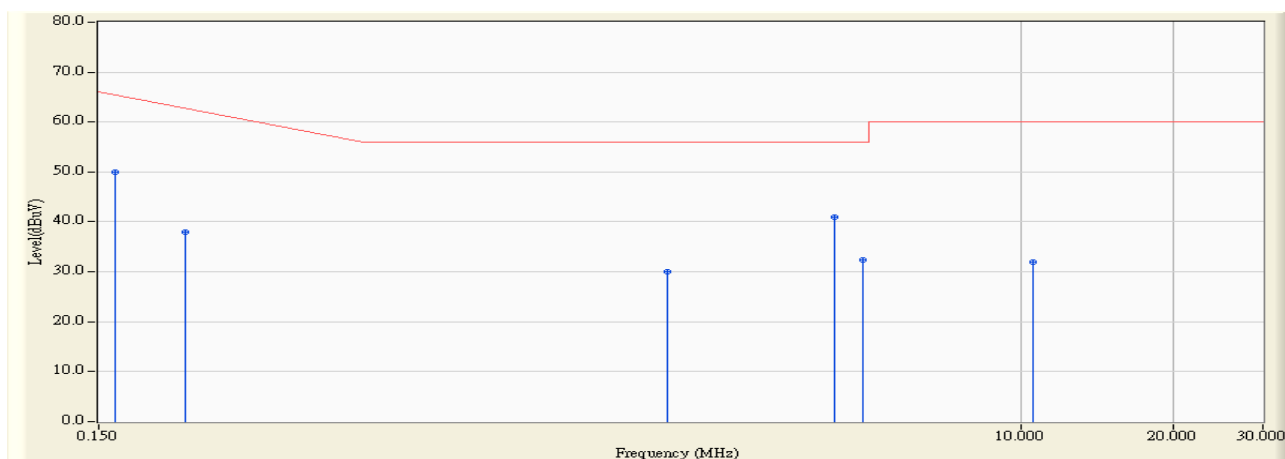


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.162	10.190	39.700	49.890	-15.471	65.361	QUASIPeAK
2		0.222	9.344	28.600	37.944	-24.800	62.744	QUASIPeAK
3		1.990	9.860	20.100	29.960	-26.040	56.000	QUASIPeAK
4	*	4.266	9.810	31.200	41.010	-14.990	56.000	QUASIPeAK
5		4.850	9.796	22.600	32.396	-23.604	56.000	QUASIPeAK
6		10.522	9.950	21.900	31.850	-28.150	60.000	QUASIPeAK

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2009/10/28 - 21:19
Limit : FCC_SPartC_15.207_00M_AV	Margin : 0
Probe : ENV216_100013(0.009-30MHz) - Line1	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1

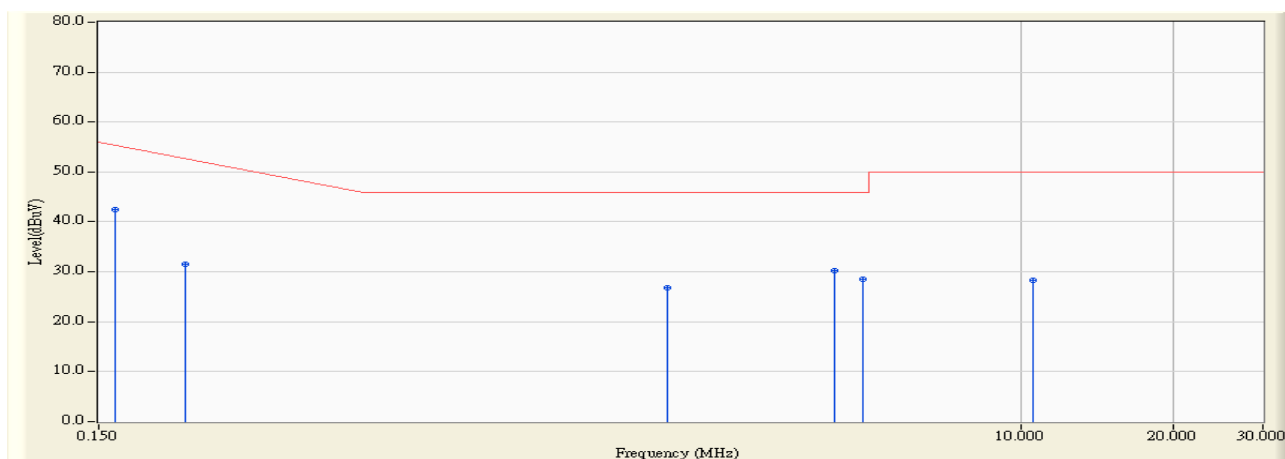


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.162	10.190	32.300	42.490	-12.871	55.361	AVERAGE
2		0.222	9.344	22.200	31.544	-21.200	52.744	AVERAGE
3		1.990	9.860	16.900	26.760	-19.240	46.000	AVERAGE
4		4.266	9.810	20.400	30.210	-15.790	46.000	AVERAGE
5		4.850	9.796	18.800	28.596	-17.404	46.000	AVERAGE
6		10.522	9.950	18.400	28.350	-21.650	50.000	AVERAGE

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2009/10/28 - 21:22
Limit : FCC_SPartC_15.207_00M_QP	Margin : 10
Probe : ENV216_100013(0.009-30MHz) - Line2	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1

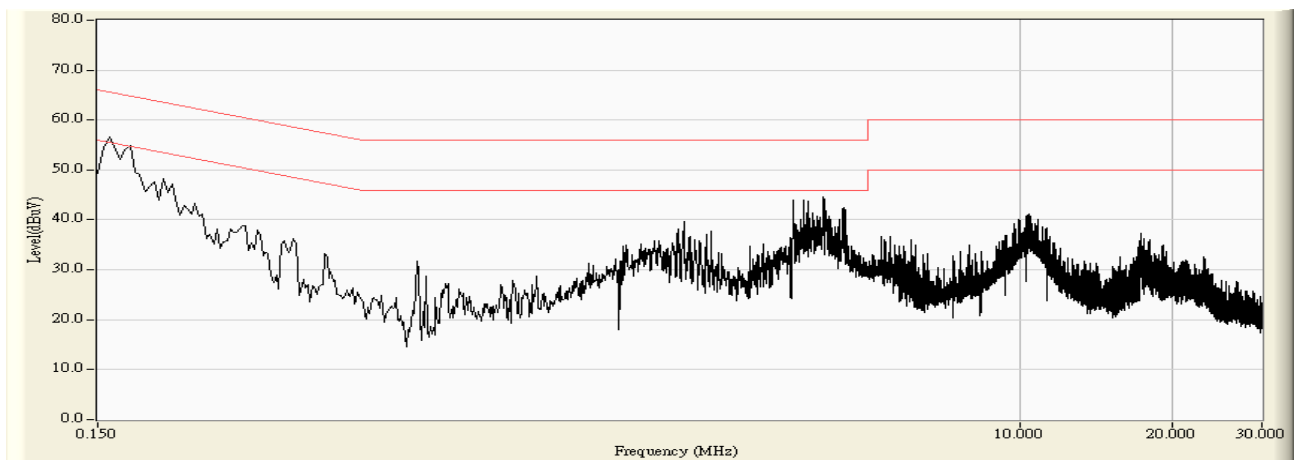


Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2009/10/28 - 21:24
Limit : FCC_SPartC_15.207_00M_QP	Margin : 0
Probe : ENV216_100013(0.009-30MHz) - Line2	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1

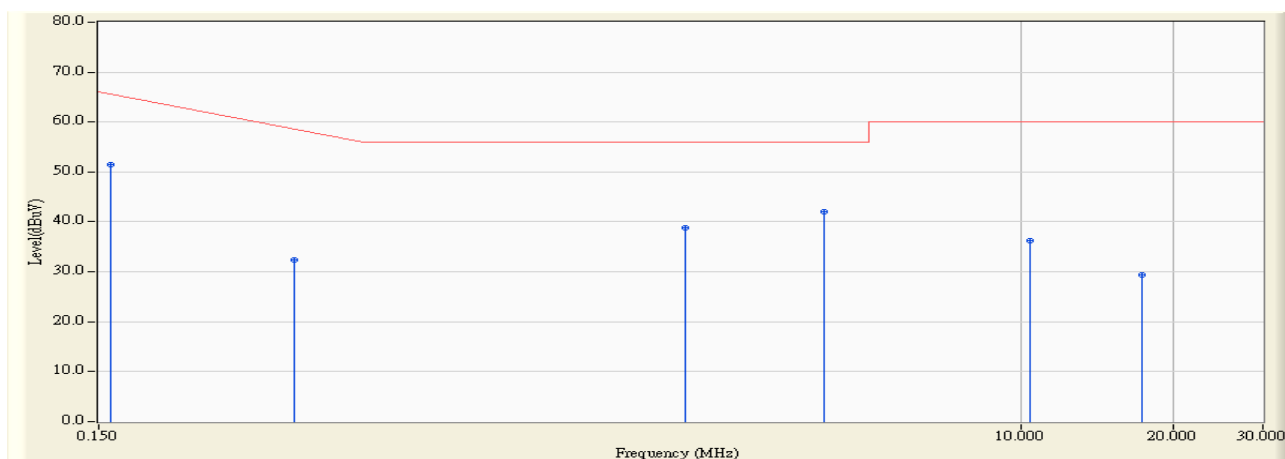

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.158	9.712	41.800	51.512	-14.056	65.568	QUASIPeAK
2		0.366	9.627	22.800	32.427	-26.164	58.591	QUASIPeAK
3		2.158	9.800	29.000	38.800	-17.200	56.000	QUASIPeAK
4	*	4.082	9.740	32.300	42.040	-13.960	56.000	QUASIPeAK
5		10.386	9.980	26.300	36.280	-23.720	60.000	QUASIPeAK
6		17.322	10.120	19.300	29.420	-30.580	60.000	QUASIPeAK

Engineer : Jame	
Site : SR-1 (Conducted Emission and Power Disturbance Test)	Time : 2009/10/28 - 21:24
Limit : FCC_SPartC_15.207_00M_AV	Margin : 0
Probe : ENV216_100013(0.009-30MHz) - Line2	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1

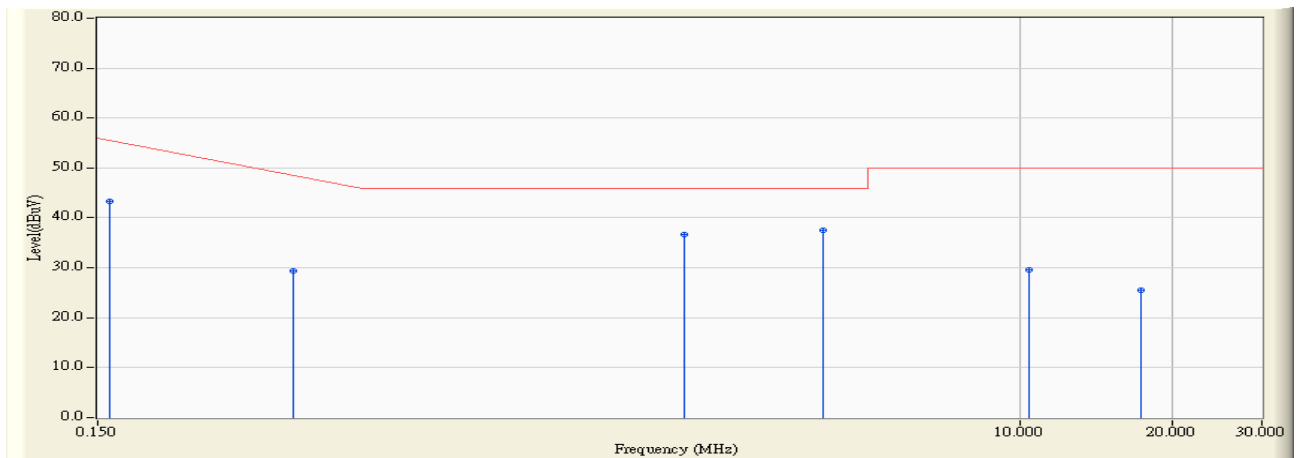

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.158	9.712	33.700	43.412	-12.156	55.568	AVERAGE
2		0.366	9.627	19.800	29.427	-19.164	48.591	AVERAGE
3		2.158	9.800	26.900	36.700	-9.300	46.000	AVERAGE
4	*	4.082	9.740	27.800	37.540	-8.460	46.000	AVERAGE
5		10.386	9.980	19.700	29.680	-20.320	50.000	AVERAGE
6		17.322	10.120	15.300	25.420	-24.580	50.000	AVERAGE

4. Radiated Emission


4.1. Test Equipment

☒ Radiated Emission / AC-5


Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2009/05/06
EMI Test Receiver	R&S	ESCI	100573	2009/05/10
Preamplifier	Quietek	AP-025C	QT-AP003	2008/11/24
Preamplifier	Quietek	AP-180C	CHM-0602012	2008/11/24
Bilog Type Antenna	Schaffner	CBL6112B	2932	2008/11/21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	496	2008/11/24
High-Pass Filter	Wainwright	WHKX2.8/18G-12SS	SN1	2009/03/01
Band Reject Filter	Wainwright	WRCG2400/2485-2375 /2510-60/11SS	SN9	2009/03/01
High-Pass Filter	Wainwright	WHKX7.0/18G-8SS	SN16	2009/03/01
Low-Pass Filter	Wainwright	WLKS4500-9SS	SN2	2009/03/01
50ohm Coaxial Switch	Anritsu	MP59B	6200447304	2008/11/24
Coaxial Cable	Huber+Suhner	AC6-C	04	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH002	2009/03/30

4.2. Test Setup

Below 1GHz Test Setup:

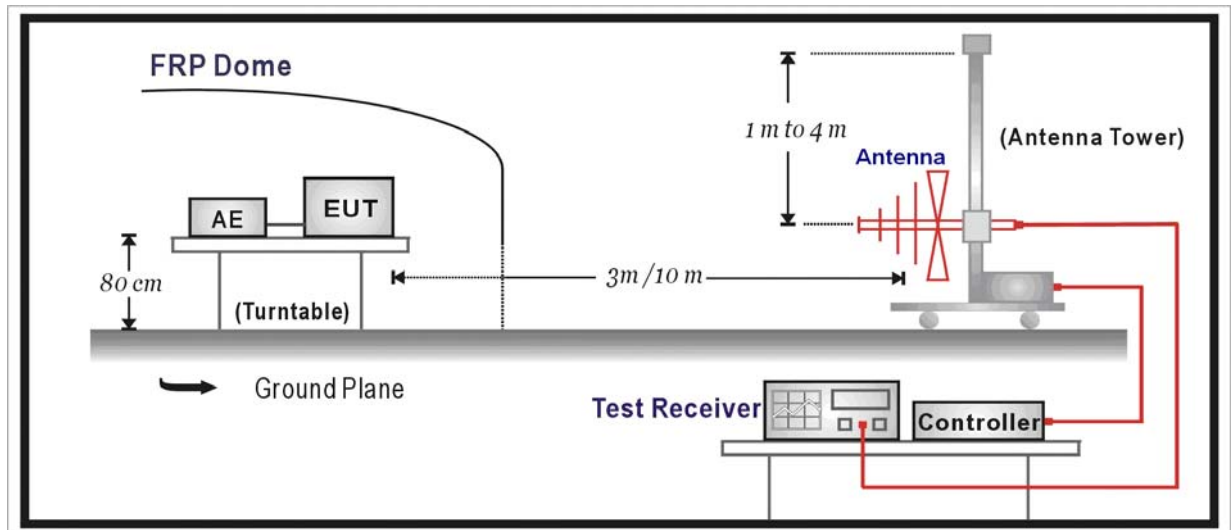

Above 1GHz Test Setup:

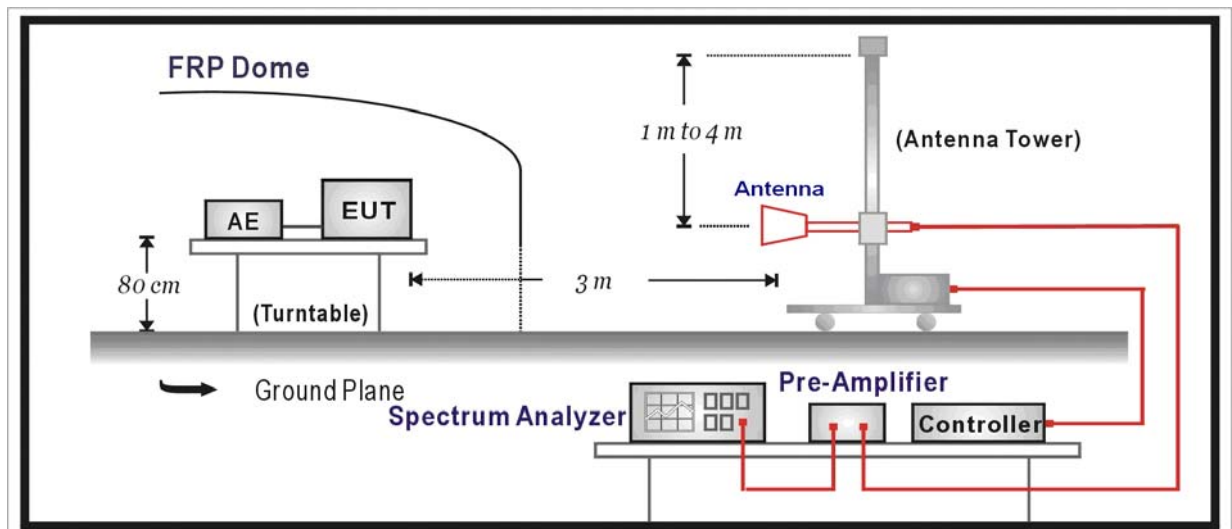

4.3. Limit

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level (dBuV/m)
30 - 88	3	40
88 - 216	3	43.5
216 - 960	3	46
Above 960	3	54

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

According to FCC Public Notice DA 00-705, March 30, 2000.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2003 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the "cone of radiation" of EUT. The 3dB beamwidth is 60~10 degrees for H-plane and 90~10 degrees for E-plane.

4.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB
below 1G is defined as ± 3.8 dB

4.6. Test Result

All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;

Average detector: RBW = 1MHz, VBW = 10Hz, sweep time = auto.

Measure Level = Reading Level + Cable Loss + Antenna Factor – Preamplifier Gain

DH5

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
0	H	2401.140	55.17	31.18	86.35	Fundamental	/	PK
	H	314.553	19.49	17.05	36.54	46	-9.46	QP
	H	383.873	19.26	17.94	37.20	46	-8.80	QP
	V	9245.000	31.70	10.90	42.60	54	-11.40	PK
	V	5386.000	36.45	1.37	37.82	54	-16.18	PK
	V	11625.000	35.18	13.70	48.88	54	-7.48	PK
	V	24000.000	59.15	-8.90	50.25	54	-3.75	PK
39	V	2440.320	55.93	31.20	87.13	Fundamental	/	PK
	H	314.553	19.49	17.05	36.54	46	-9.46	QP
	H	383.873	19.26	17.94	37.20	46	-8.80	QP
	V	9245.000	31.70	10.90	42.60	54	-11.40	PK
	V	5386.000	36.45	1.37	37.82	54	-16.18	PK
	V	11625.000	35.18	13.70	48.88	54	-7.48	PK
	V	24000.000	59.15	-8.90	50.25	54	-3.75	PK
78	V	2479.861	56.13	31.21	87.34	Fundamental	/	PK
	H	314.553	19.49	17.05	36.54	46	-9.46	QP
	H	383.873	19.26	17.94	37.20	46	-8.80	QP
	V	9245.000	31.70	10.90	42.60	54	-11.40	PK
	V	5386.000	36.45	1.37	37.82	54	-16.18	PK
	V	11625.000	35.18	13.70	48.88	54	-7.48	PK
	V	24000.000	59.15	-8.90	50.25	54	-3.75	PK

3DH5

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
0	V	2401.977	55.04	31.18	86.22	Fundamental	PK	PK
	H	314.553	19.49	17.05	36.54	46	QP	QP
	H	383.873	19.26	17.94	37.20	46	QP	QP
	V	9245.000	31.70	10.90	42.60	54	PK	PK
	V	5386.000	36.45	1.37	37.82	54	PK	PK
	V	11625.000	35.18	13.70	48.88	54	PK	PK
	V	24000.000	59.15	-8.90	50.25	54	PK	PK
39	V	2440.360	55.07	31.20	86.27	Fundamental	PK	PK
	H	314.553	19.49	17.05	36.54	46	QP	QP
	H	383.873	19.26	17.94	37.20	46	QP	QP
	V	9245.000	31.70	10.90	42.60	54	PK	PK
	V	5386.000	36.45	1.37	37.82	54	PK	PK
	V	11625.000	35.18	13.70	48.88	54	PK	PK
	V	24000.000	59.15	-8.90	50.25	54	PK	PK
78	V	2479.987	55.73	31.21	86.94	Fundamental	PK	PK
	H	314.553	19.49	17.05	36.54	46	QP	QP
	H	383.873	19.26	17.94	37.20	46	QP	QP
	V	9245.000	31.70	10.90	42.60	54	PK	PK
	V	5386.000	36.45	1.37	37.82	54	PK	PK
	V	11625.000	35.18	13.70	48.88	54	PK	PK
	V	24000.000	59.15	-8.90	50.25	54	PK	PK

Note: Horizontal polarization was verified and there's no emission found or too lower.

5. 20dB Bandwidth


5.1. Test Equipment

20dB Bandwidth / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2009/05/06
Coaxial Cable	Huber+Suhner	AC6-RF	09	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/30

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

5.2. Test Setup

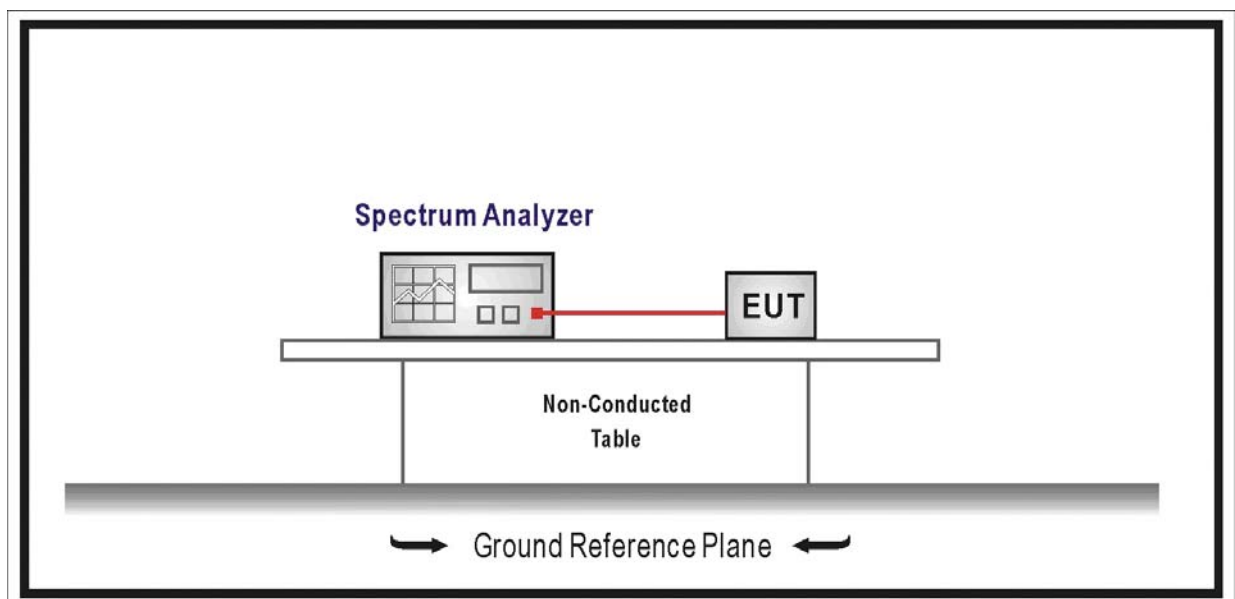

5.3. Limit

- For frequency hopping systems operating in 2400-2483.5 MHz band, no limitation.
- For frequency hopping systems operating in 902-928 MHz band, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
- For frequency hopping systems operating in 5725-5850 MHz band, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.

5.4. Test Procedure

According to FCC Public Notice DA 00-705, March 30, 2000.

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize.

Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

5.5. Uncertainty

The measurement uncertainty is defined as ± 1 kHz

5.6. Test Result

Product	:	Bluetooth Headset
Test Item	:	20dB Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 1: Transmit (DH5)

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)
00	2402	895	N/A
39	2441	905	N/A
78	2480	930	N/A

Channel 00 (2402MHz)



Channel 39 (2441MHz)



Channel 78 (2480MHz)



Product	:	Bluetooth Headset
Test Item	:	20dB Bandwidth
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit (3DH5)

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)
00	2402	1270	N/A
39	2441	1265	N/A
78	2480	1285	N/A

Channel 00 (2402MHz)



Channel 39 (2441MHz)



Channel 78 (2480MHz)



6. Carrier Frequency Separation


6.1. Test Equipment

Carrier Frequency Separation / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2009/05/06
Coaxial Cable	Huber+Suhner	AC6-RF	09	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/30

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

6.2. Test Setup

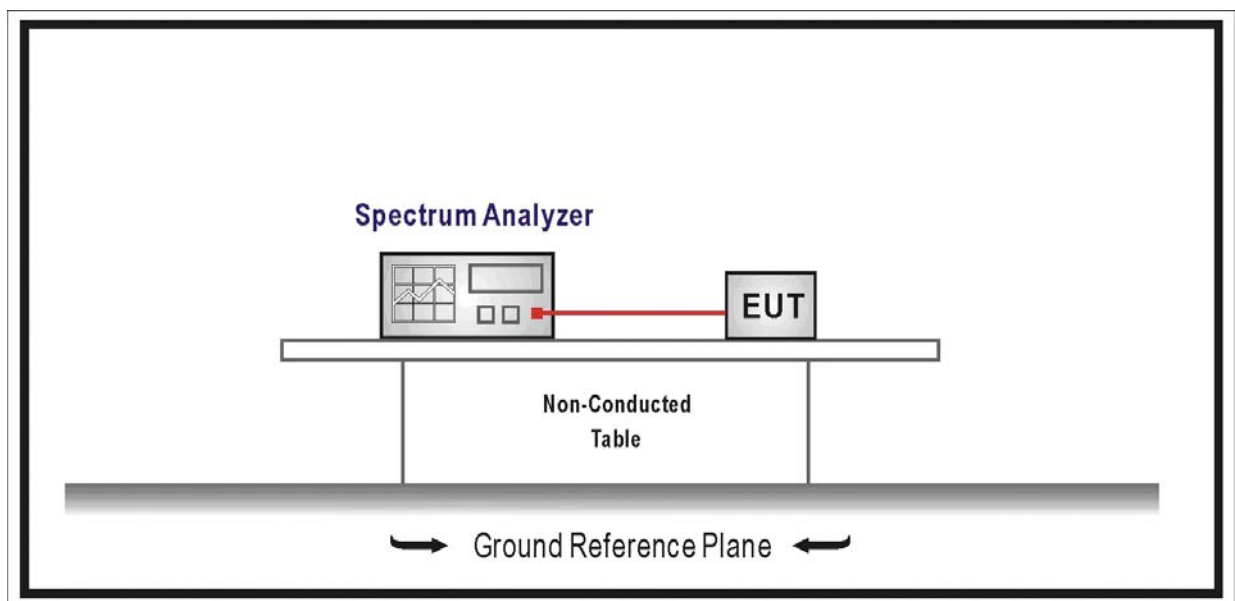

6.3. Limit

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each

transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

- For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
- Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

6.4. Test Procedure

According to FCC Public Notice DA 00-705, March 30, 2000.

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span

Video (or Average) Bandwidth VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

6.5. Uncertainty


The measurement uncertainty is defined as ± 1 kHz

6.6. Test Result


Product	:	Bluetooth Headset
Test Item	:	Carrier Frequency Separation
Test Site	:	AC-6
Test Mode	:	Mode 1: Transmit (DH5)

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	>25 kHz or 2/3 of 20 dB BW	Pass
39	2441	1000	>25 kHz or 2/3 of 20 dB BW	Pass
78	2480	1000	>25 kHz or 2/3 of 20 dB BW	Pass


Channel 00 (2402MHz)

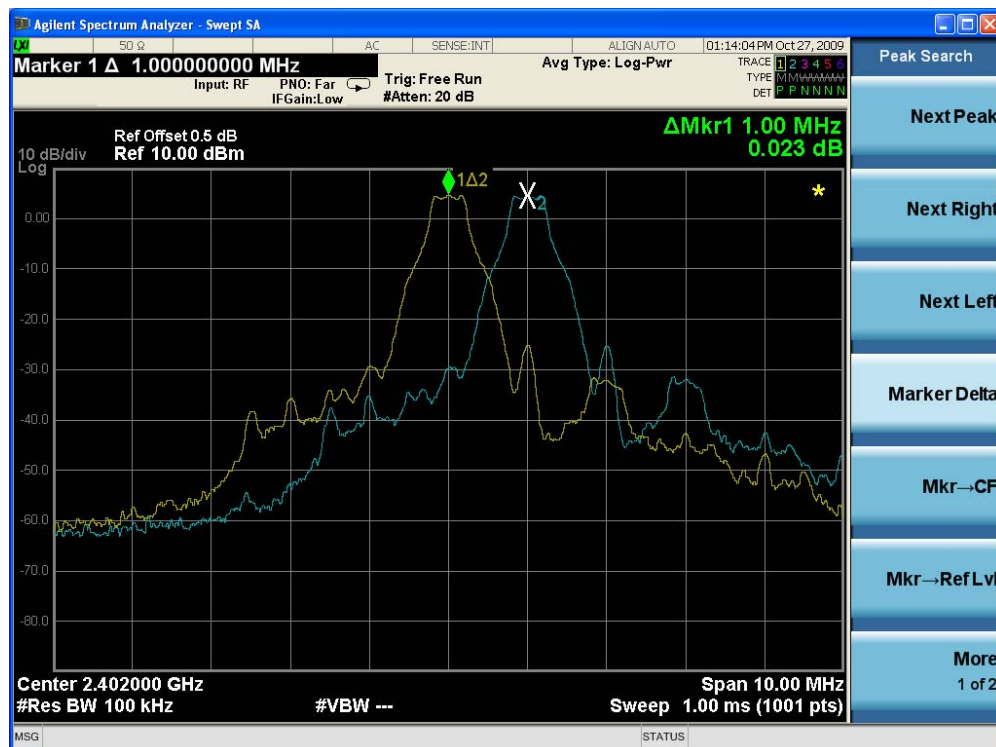

Channel 39 (2441MHz)

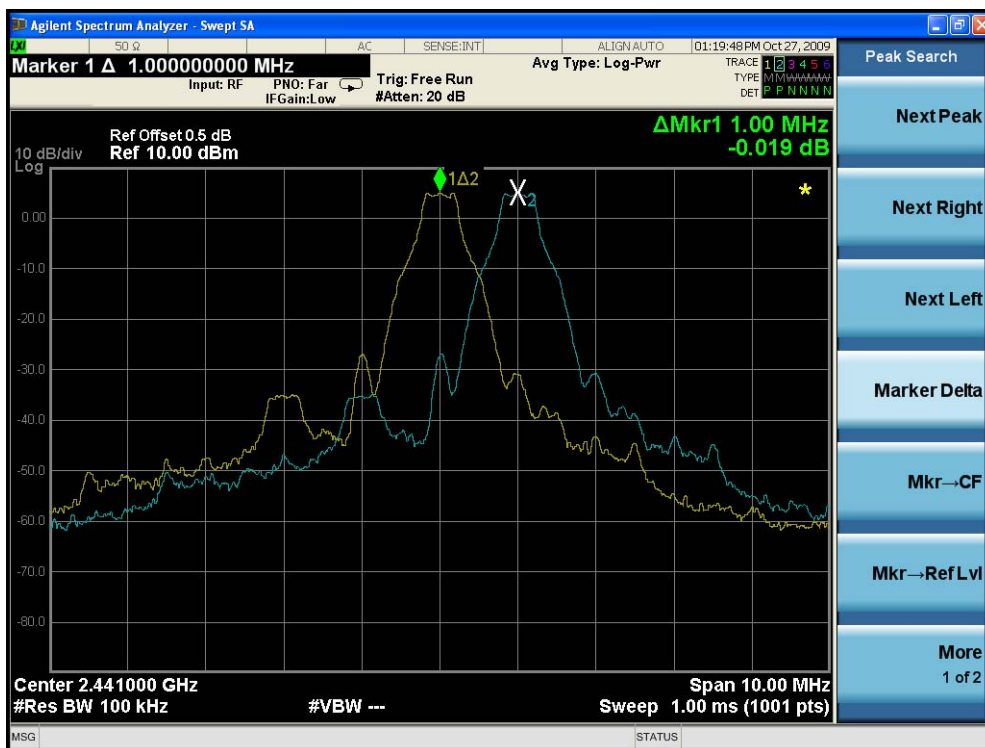

Channel 78 (2480MHz)

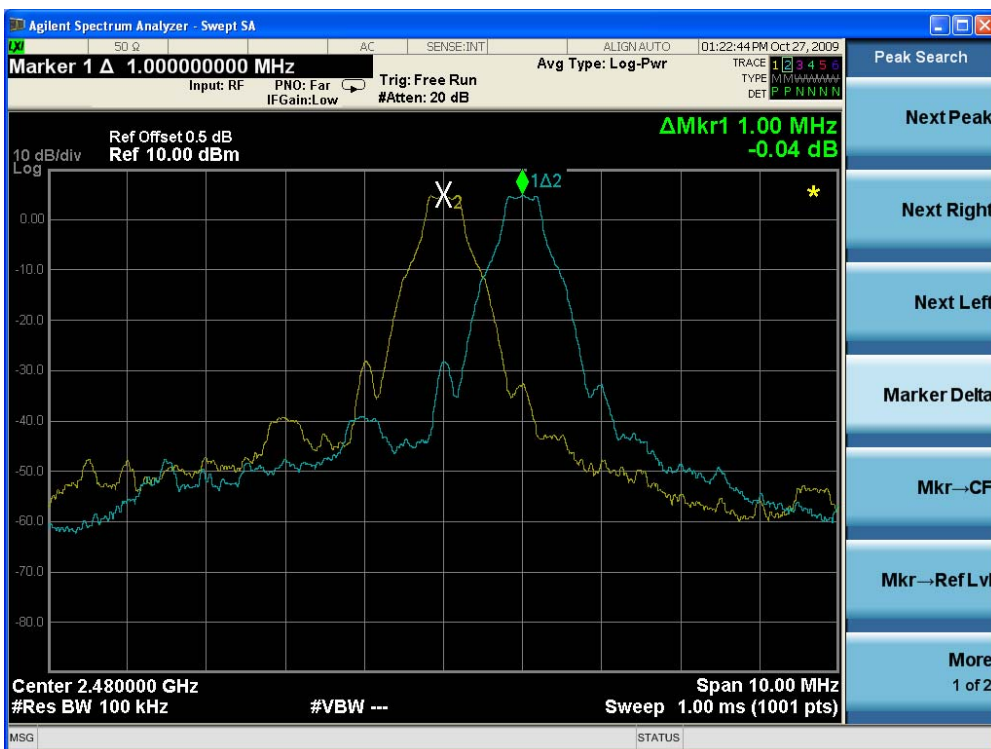


Product	:	Bluetooth Headset
Test Item	:	Carrier Frequency Separation
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit (3DH5)

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	>25 kHz or 2/3 of 20 dB BW	Pass
39	2441	1000	>25 kHz or 2/3 of 20 dB BW	Pass
78	2480	1000	>25 kHz or 2/3 of 20 dB BW	Pass


Channel 00 (2402MHz)



Channel 39 (2441MHz)

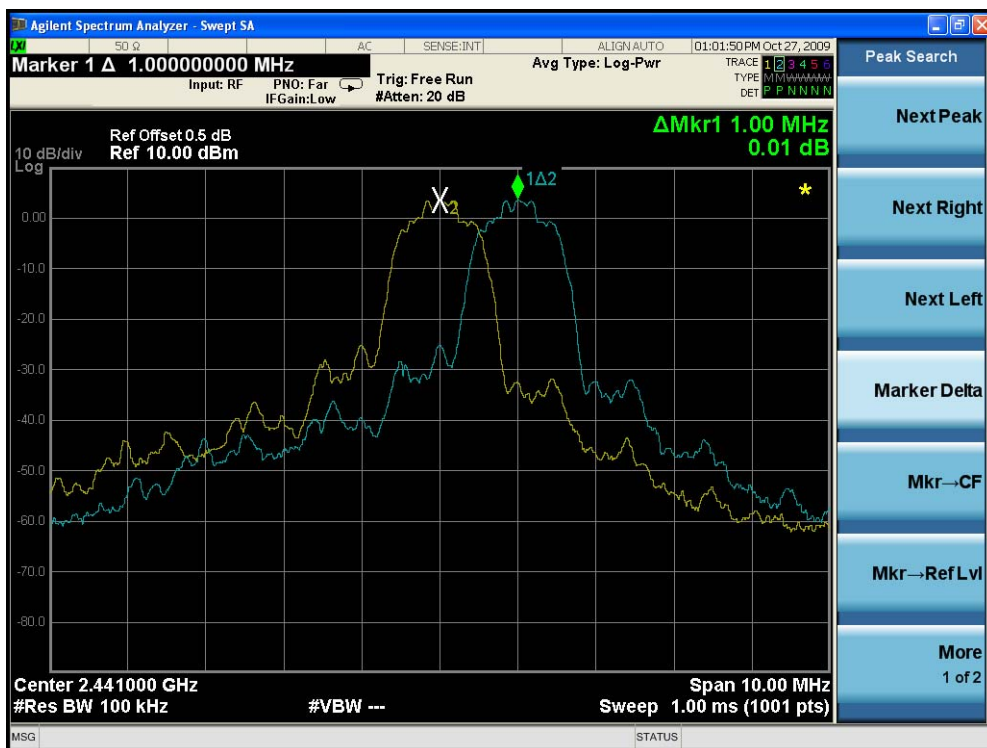

Channel 78 (2480MHz)

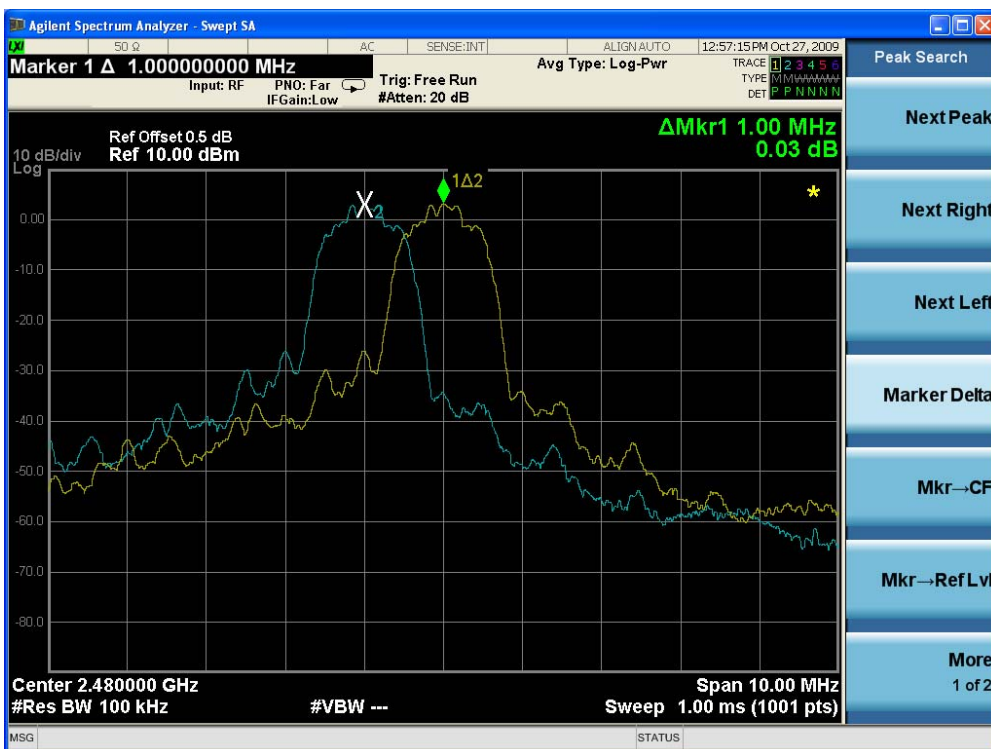

7. Number of Hopping Frequencies


7.1. Test Equipment

Number of Hopping Frequencies / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2009/05/06
Coaxial Cable	Huber+Suhner	AC4-RF	09	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/30

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

7.2. Test Setup

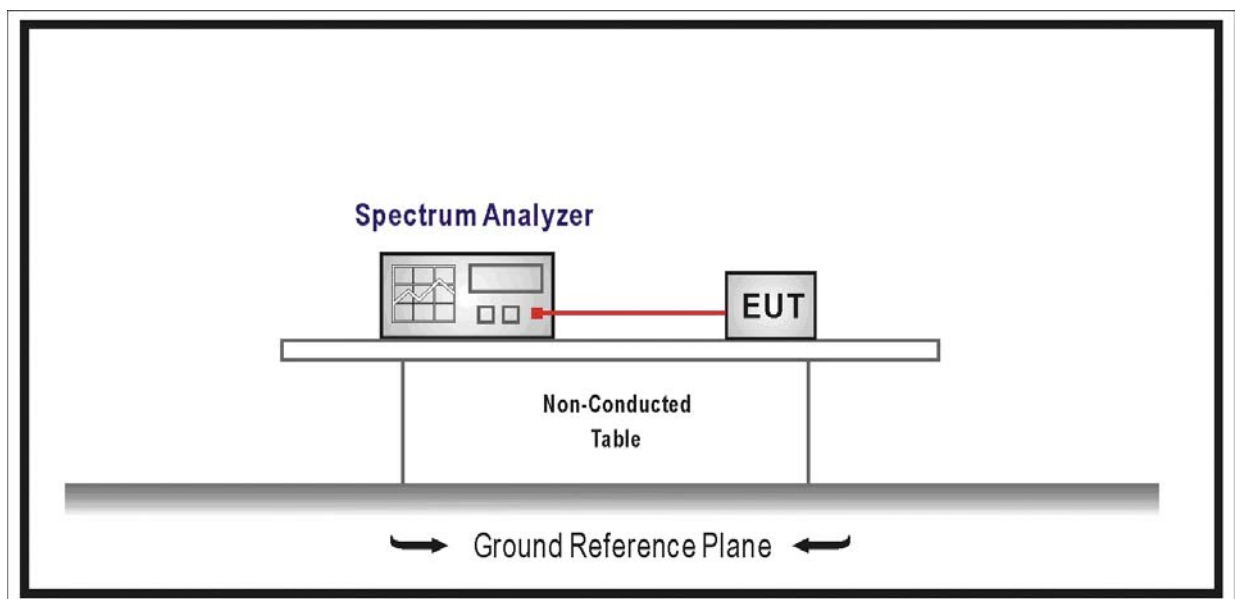

7.3. Limit

- For frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.
- For frequency hopping systems operating in 902-928 MHz band shall use at least 50 hopping frequencies.
- For frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies.

7.4. Test Procedure

According to FCC Public Notice DA 00-705, March 30, 2000.

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. It may prove necessary to bread the span up to sections, in order to clearly show all of the hopping frequencies.

7.5. Uncertainty


The measurement uncertainty is defined as ± 1 kHz

7.6. Test Result


Product	:	Bluetooth Headset
Test Item	:	Number of Hopping Frequencies
Test Site	:	AC-6
Test Mode	:	Mode 1: Transmit (DH5)

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass


2402 - 2421 MHz

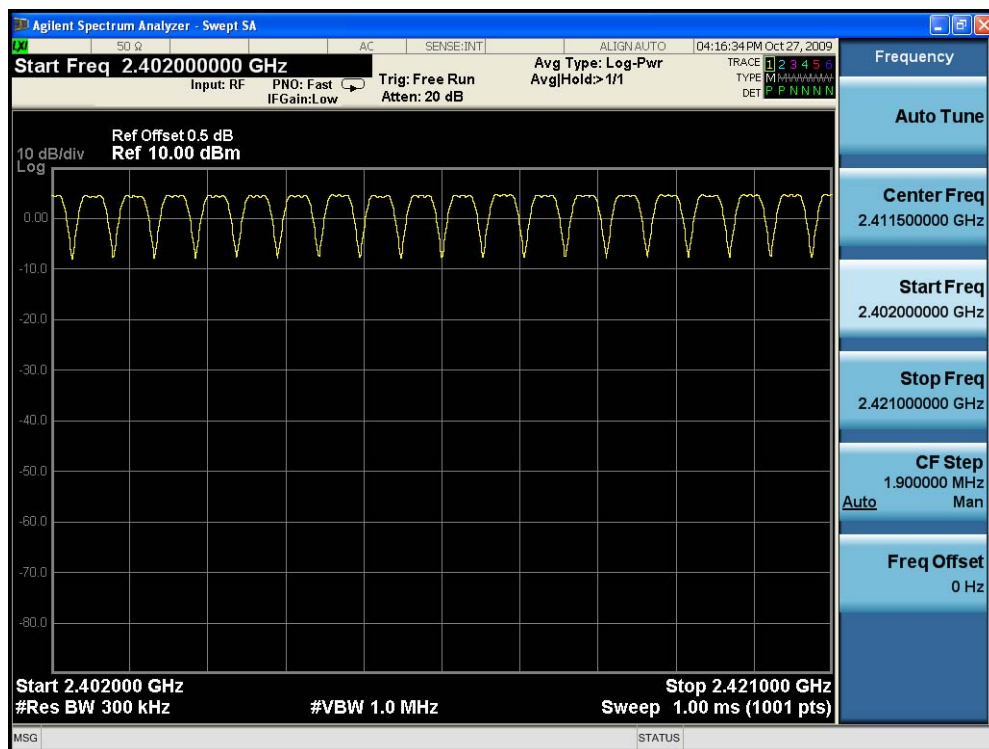


2422 - 2441 MHz

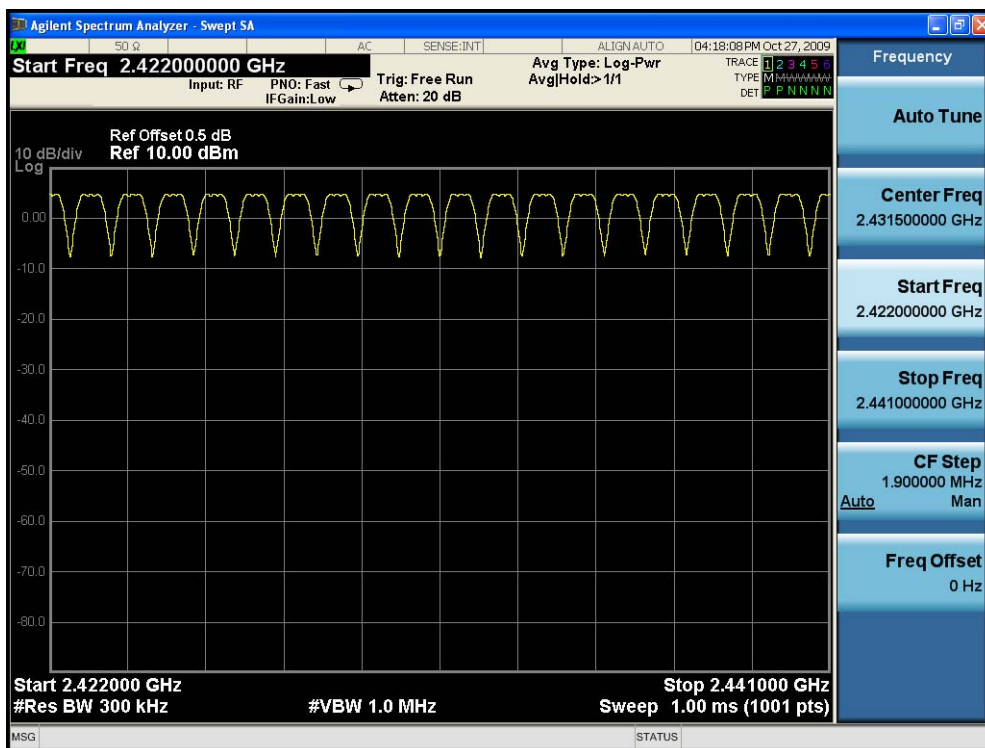

2442 - 2461 MHz

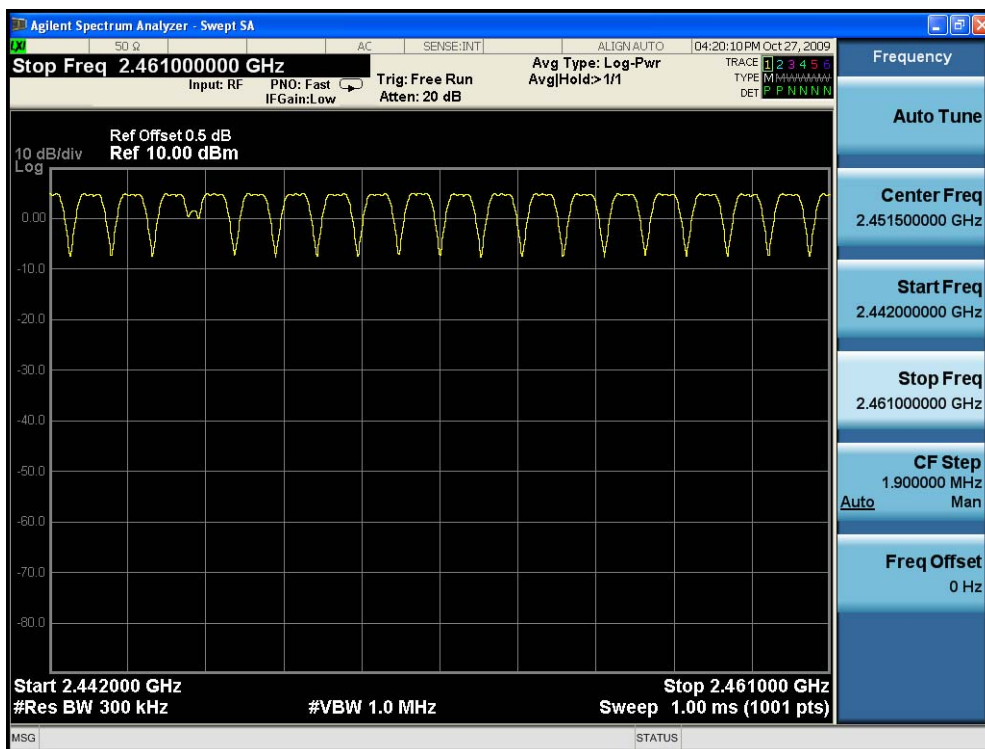


2462 - 2480 MHz

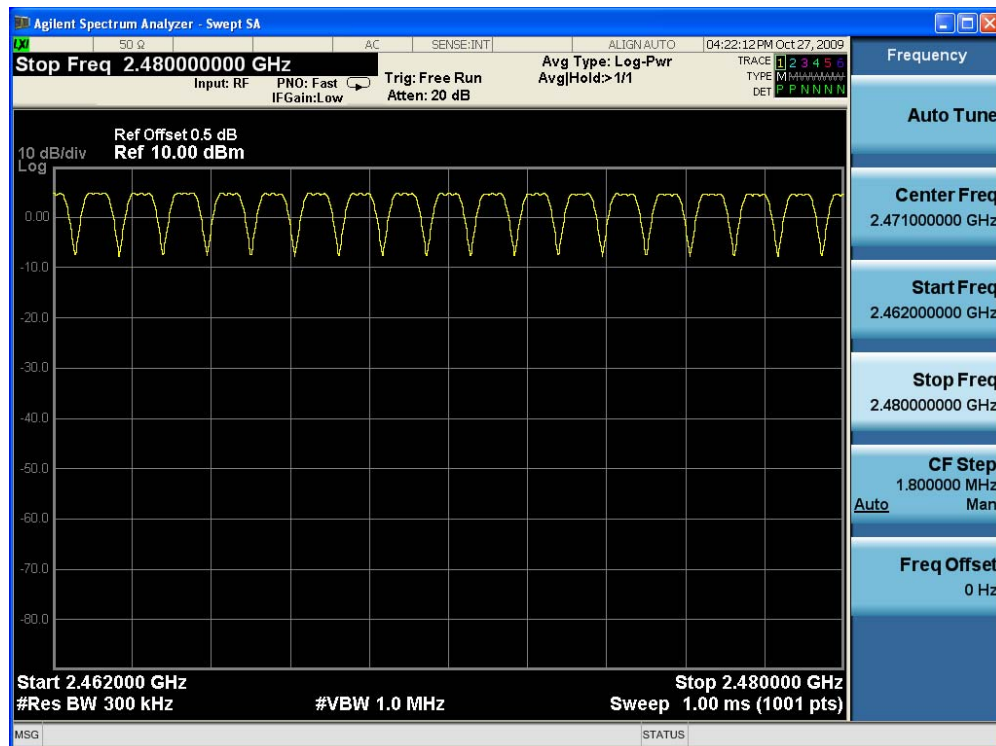


Product	:	Bluetooth Headset
Test Item	:	Number of Hopping Frequencies
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit (3DH5)

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass


2402 - 2421 MHz

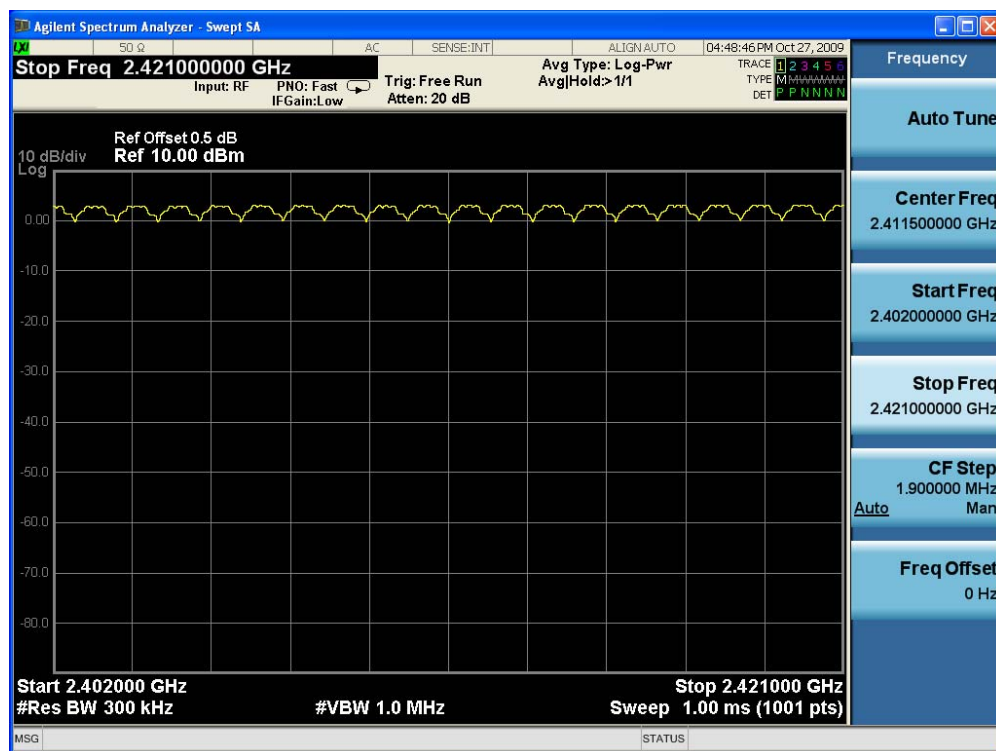


2422 - 2441 MHz

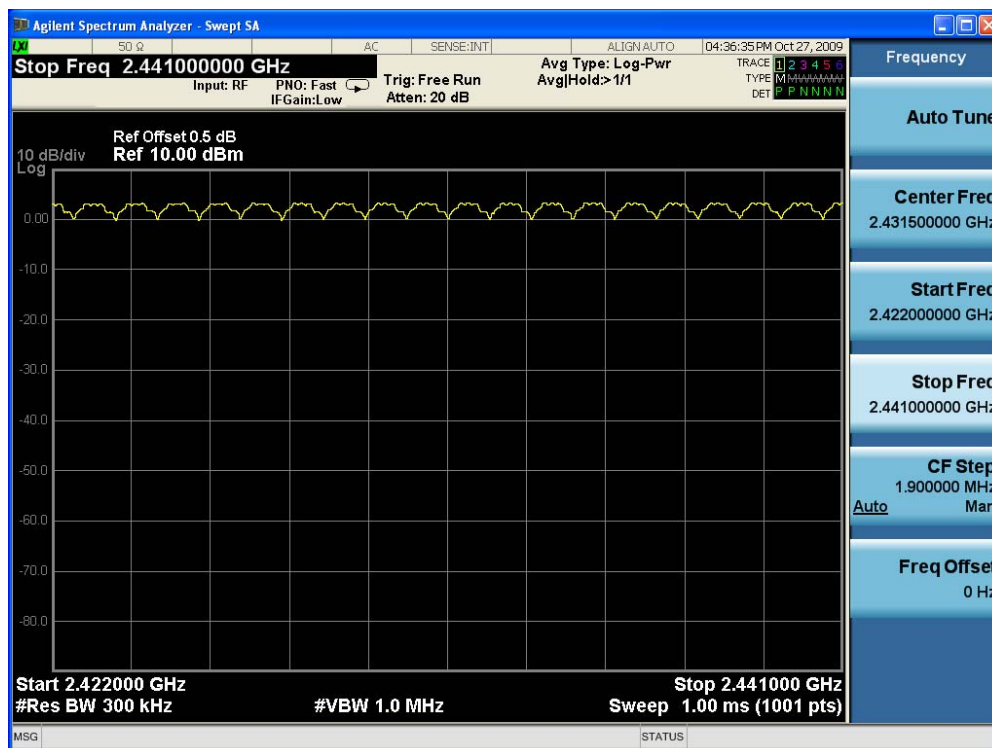

2442 - 2461 MHz

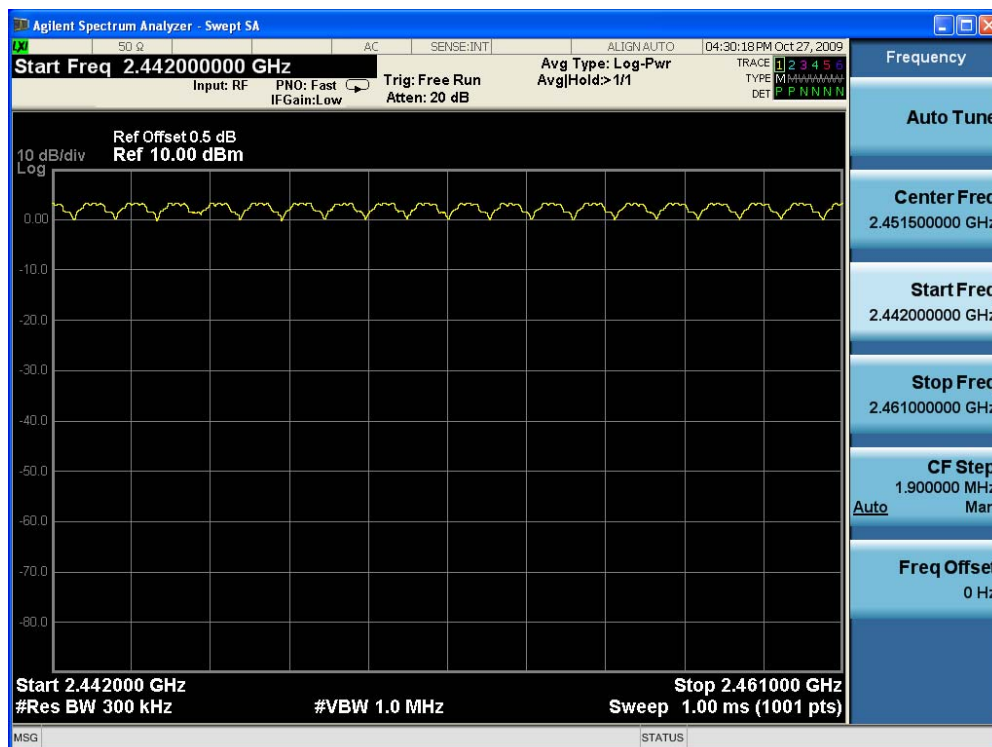

2462 - 2480 MHz

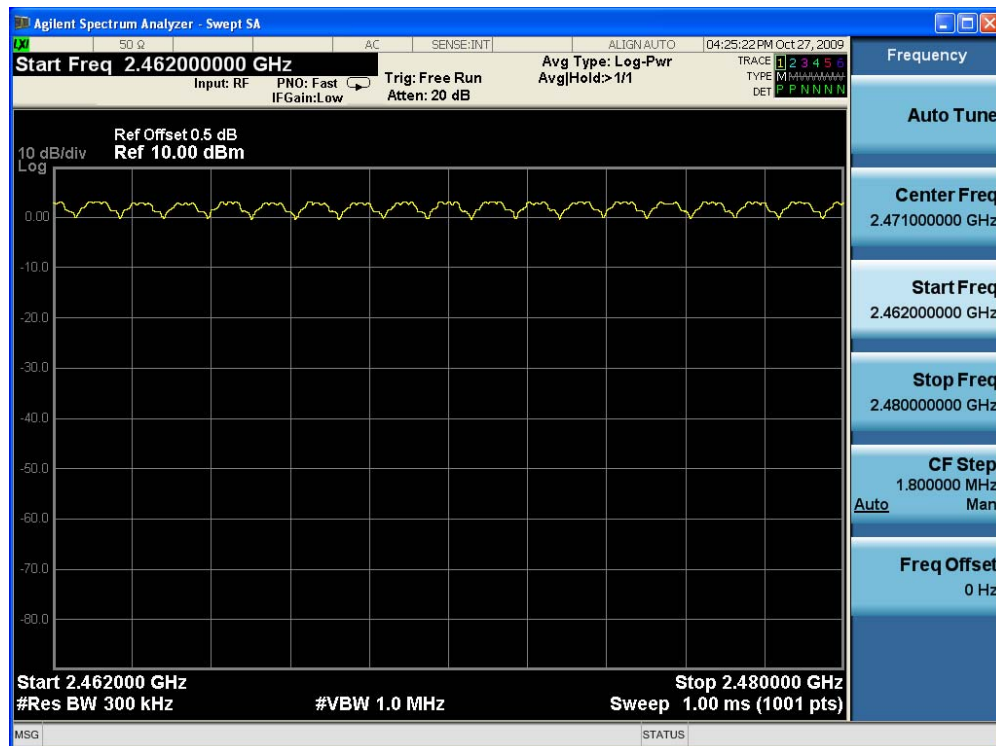

8. Time of Occupancy (Dwell Time)


8.1. Test Equipment

Time of Occupancy (Dwell Time) / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2009/05/06
Coaxial Cable	Huber+Suhner	AC6-RF	09	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/30

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

8.2. Test Setup

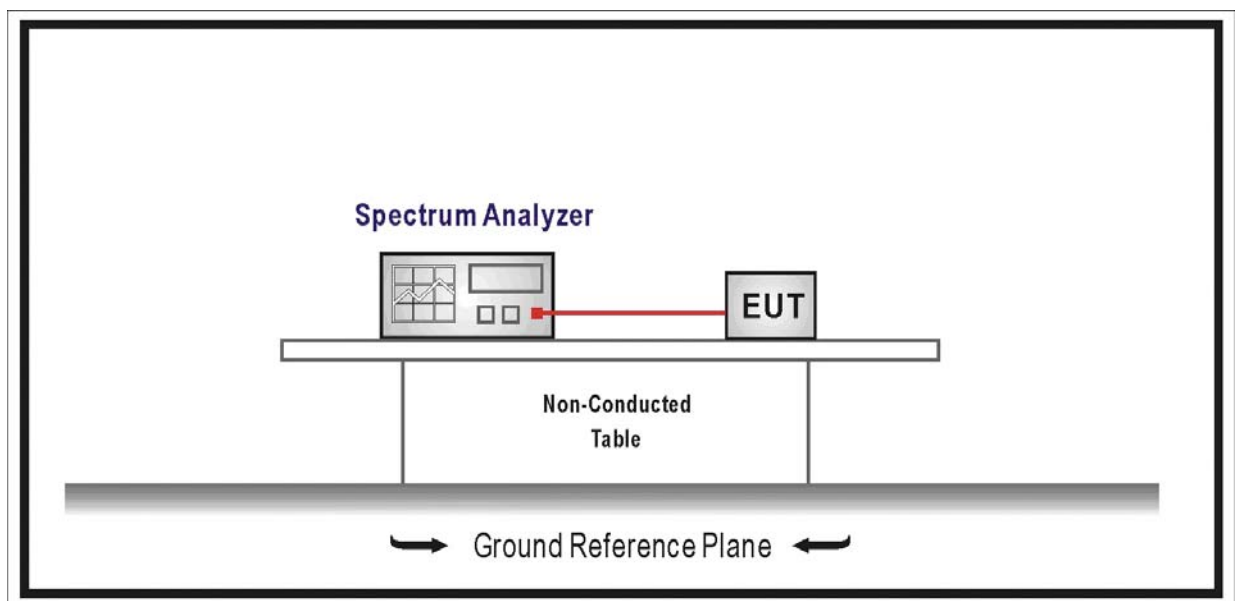

8.3. Limit

- For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

- Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.
- Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.4. Test Procedure

According to FCC Public Notice DA 00-705, March 30, 2000.

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1MHz

VBW $\geq$ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

8.5. Uncertainty

The measurement uncertainty is defined as ± 0.1 us

8.6. Test Result



Product	:	Bluetooth Headset
Test Item	:	Time of Occupancy (Dwell Time)
Test Site	:	AC-6
Test Mode	:	Transmit (3DH1)

Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	131.2	< 400	Pass

Test Time Period: $0.4 \times 79 = 31.6$ sec, Hopping Times Within 1sec: $40/50$ msec=800 hops/sec.

- 2441MHz, The Maximum Occupancy Time Within 31.6sec: $[(410.0 \mu s \times 800)/79] \times 31.6 = 131.2$ msec

Channel 39 (2441MHz)-(3DH1)

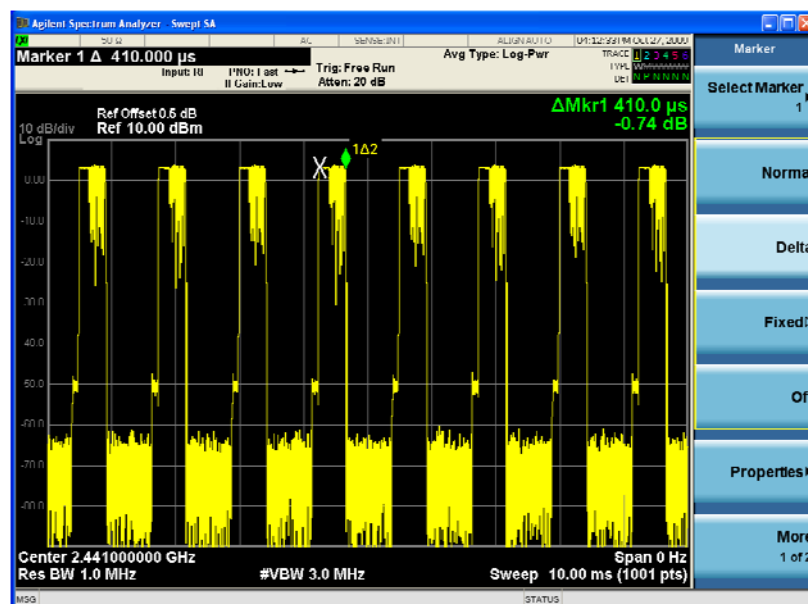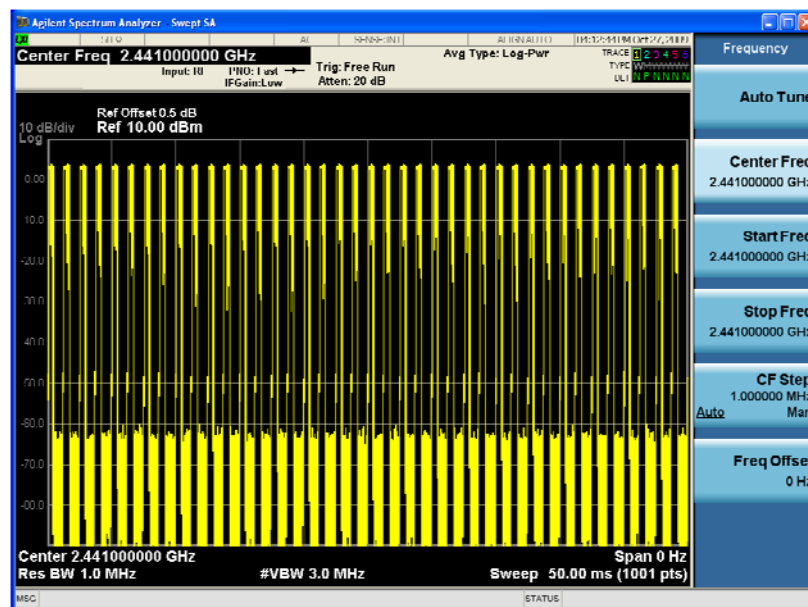



Product	:	Bluetooth Headset
Test Item	:	Time of Occupancy (Dwell Time)
Test Site	:	AC-6
Test Mode	:	Transmit (3DH3)

Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	262.4	< 400	Pass

Test Time Period: $0.4 \times 79 = 31.6\text{sec}$, Hopping Times Within 1sec: $20/50\text{msec} = 400\text{hops/sec}$.

- 2441MHz, The Maximum Occupancy Time Within 31.6sec: $[(1.64 \text{ ms} \times 400) / 79] \times 31.6 = 262.4\text{msec}$

Channel 39 (2441MHz) - (3DH3)

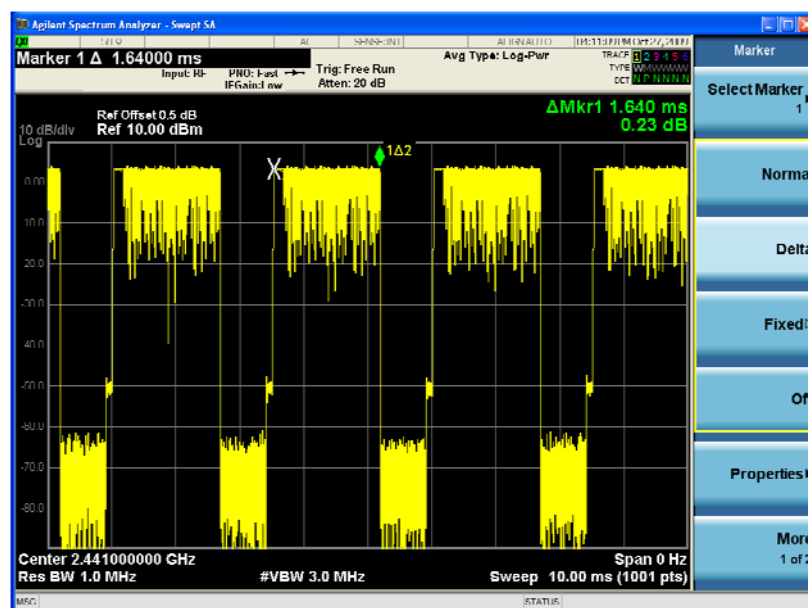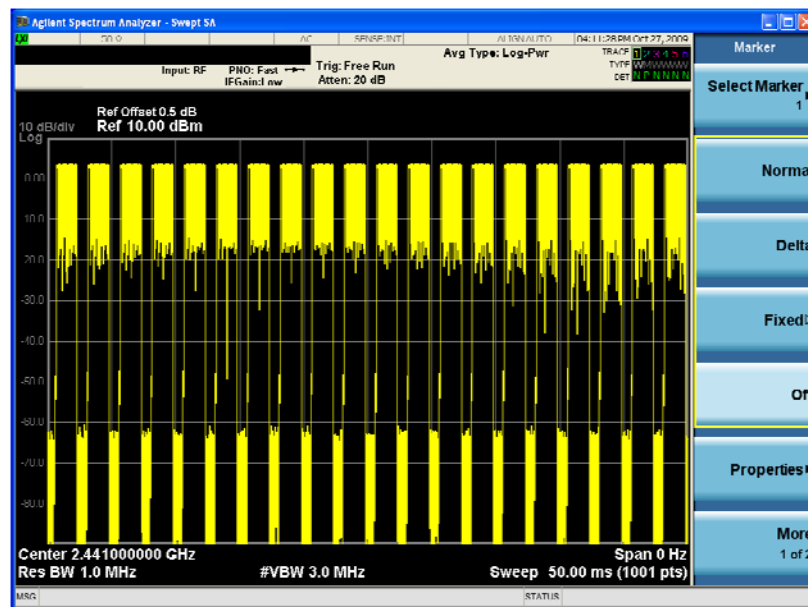



Product	:	Bluetooth Headset
Test Item	:	Time of Occupancy (Dwell Time)
Test Site	:	AC-6
Test Mode	:	Transmit (3DH5)

Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	324.8	< 400	Pass

Test Time Period: $0.4 \times 79 = 31.6\text{sec}$, Hopping Times Within 1sec: $14/50\text{msec} = 280\text{ hops/sec}$.

- 2441MHz, The Maximum Occupancy Time Within 31.6sec: $[(2.9\text{ ms} \times 280)/79] \times 31.6 = 324.8\text{msec}$

Channel 39 (2441MHz) - (3DH5)

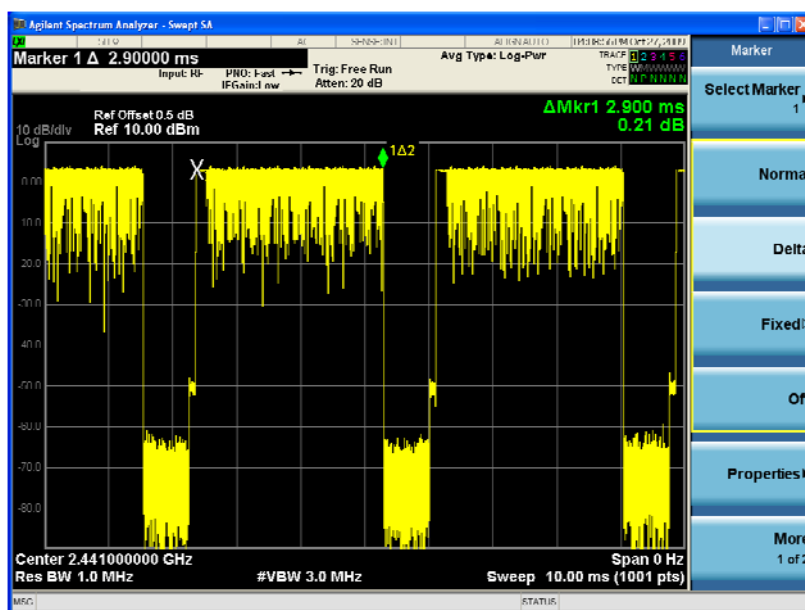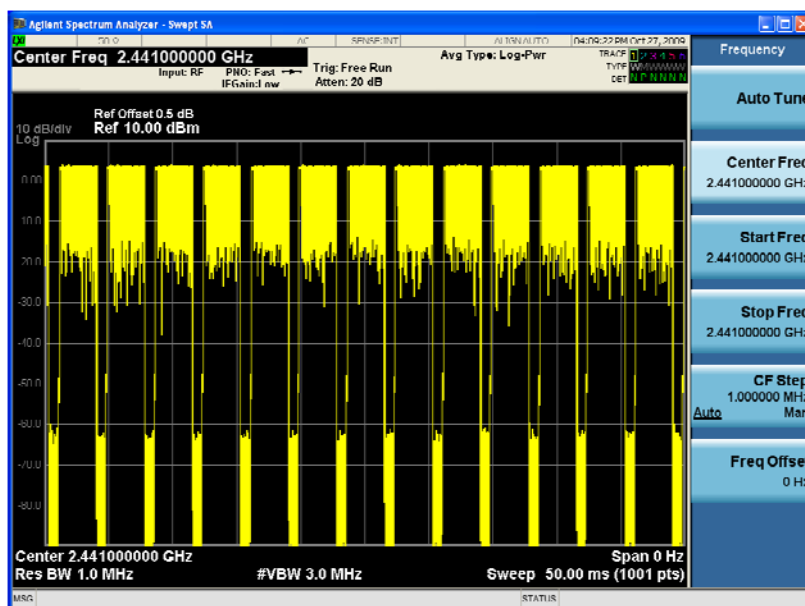

9. Peak Output Power


9.1. Test Equipment

Peak Output Power / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2009/05/06
Coaxial Cable	Huber+Suhner	AC6-RF	09	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/30

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

9.2. Test Setup

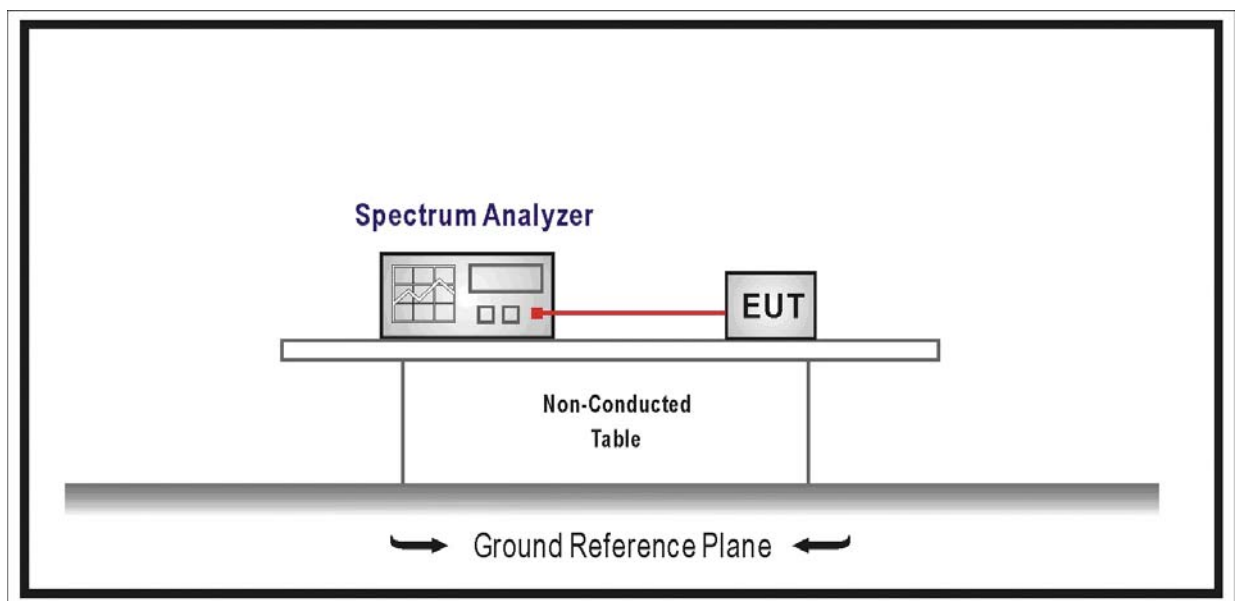

9.3. Limit

- For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
- For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

Note: the conducted output power limit specified above is based on the use the antennas with directional gains that do not exceed 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values above, as appropriate, by the amount in dB that the directional gain of antenna exceeds 6 dBi.

9.4. Test Procedure

According to FCC Public Notice DA 00-705, March 30, 2000.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (don't forget added the external attenuation and cable loss).

9.5. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB

9.6. Test Result

Product	:	Bluetooth Handsfree Car Kit
Test Item	:	Power Output
Test Mode	:	Mode 1: Transmit by DH5

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Cable Loss (dBm)	Total Power (dBm)	Limit (dBm)	Result
0	2402	3.99	0.5	4.49	30.00	Pass
39	2441	4.21	0.5	4.71	30.00	Pass
78	2480	4.15	0.5	4.65	30.00	Pass

Product	:	Bluetooth Handsfree Car Kit
Test Item	:	Power Output
Test Mode	:	Mode 2: Transmit by 3DH5

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Cable Loss (dBm)	Total Power (dBm)	Limit (dBm)	Result
0	2402	3.94	0.5	4.44	30.00	Pass
39	2441	4.22	0.5	4.72	30.00	Pass
78	2480	4.18	0.5	4.68	30.00	Pass

10. Band-edge Compliance of RF Conducted Emissions


10.1. Test Equipment

Band-edge Compliance of RF Conducted Emissions / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2009/05/06
Coaxial Cable	Huber+Suhner	AC4-RF	09	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/30

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

10.2. Test Setup

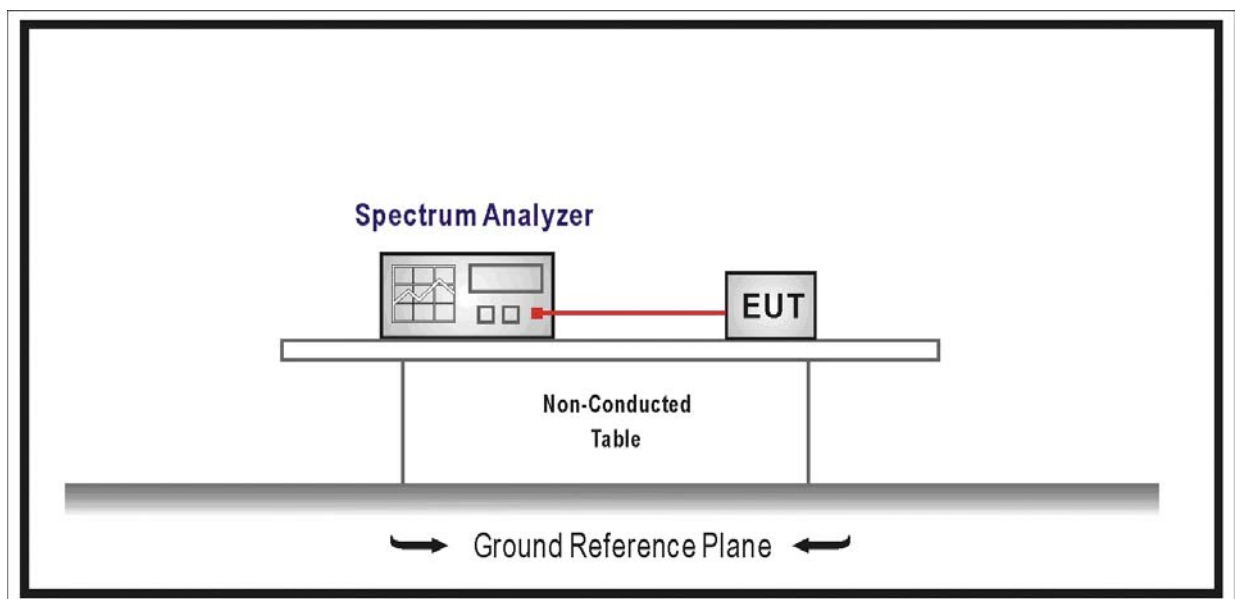

10.3. Limit

- Intentional radiators operating under the alternative provisions to the general emission limits as contained in 15.217 through 15.257 and in Subpart E of FCC part 15, must be designed to ensure that 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is

produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) of FCC part 15 is not required.

10.4. Test Procedure

According to FCC Public Notice DA 00-705, March 30, 2000.

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation.

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge.

Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

10.5. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB

10.6. Test Result

Product	:	Bluetooth Headset
Test Item	:	Band-edge Compliance of RF Conducted Emissions
Test Mode	:	Mode 1: Transmit (DH5)

Channel 00 (2402MHz)



Channel 78 (2480MHz)



Product	:	Bluetooth Headset
Test Item	:	Band-edge Compliance of RF Conducted Emissions
Test Mode	:	Mode 2: Transmit (3DH5)

Channel 00 (2402MHz)



Channel 78 (2480MHz)



11. Spurious RF Conducted Emissions


11.1. Test Equipment

Spurious RF Conducted Emissions / AC-6

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2009/05/06
Coaxial Cable	Huber+Suhner	AC6-RF	09	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH007	2009/03/30

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

11.2. Test Setup

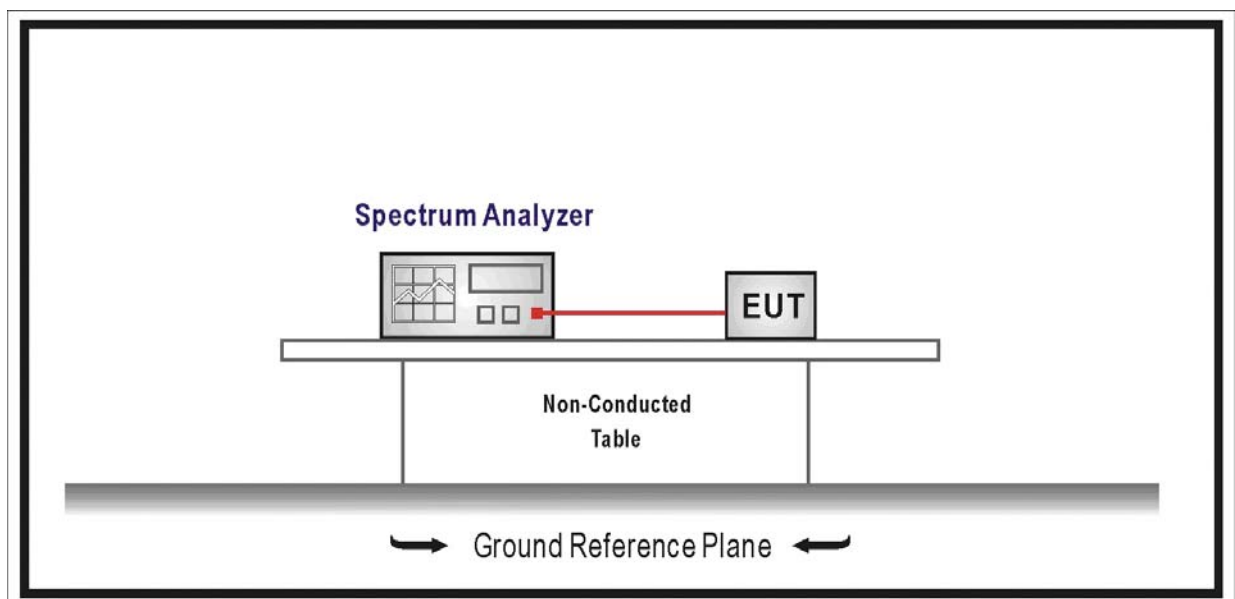

11.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this

paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) of FCC part 15 is not required.

11.4. Test Procedure

According to FCC Public Notice DA 00-705, March 30, 2000.

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

11.5. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB

11.6. Test Result

Product	:	Bluetooth Headset
Test Item	:	Spurious RF Conducted Emissions
Test Mode	:	Mode 1: Transmit (DH5)

Channel 00 (2402MHz)



Channel 39 (2441MHz)



Channel 78 (2480MHz)



Product	:	Bluetooth Headset
Test Item	:	Spurious RF Conducted Emissions
Test Site	:	AC-6
Test Mode	:	Mode 2: Transmit (3DH5)

Channel 00 (2402MHz)



Channel 39 (2441MHz)



Channel 78 (2480MHz)




12. Radiated Emission Band Edge

12.1. Test Equipment

☒ Radiated Emission Band Edge / AC-5

Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9020A	MY49100159	2009/05/06
EMI Test Receiver	R&S	ESCI	100573	2009/05/10
Preamplifier	Quietek	AP-025C	QT-AP003	2008/11/24
Preamplifier	Quietek	AP-180C	CHM-0602012	2008/11/24
Bilog Type Antenna	Schaffner	CBL6112B	2932	2008/11/21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	496	2008/11/24
50ohm Coaxial Switch	Anritsu	MP59B	6200447304	2008/11/24
Coaxial Cable	Huber+Suhner	AC2-C	04	2008/11/24
Temperature/Humidity Meter	zhicheng	ZC1-2	QT-TH002	2009/03/30

12.2. Test Setup

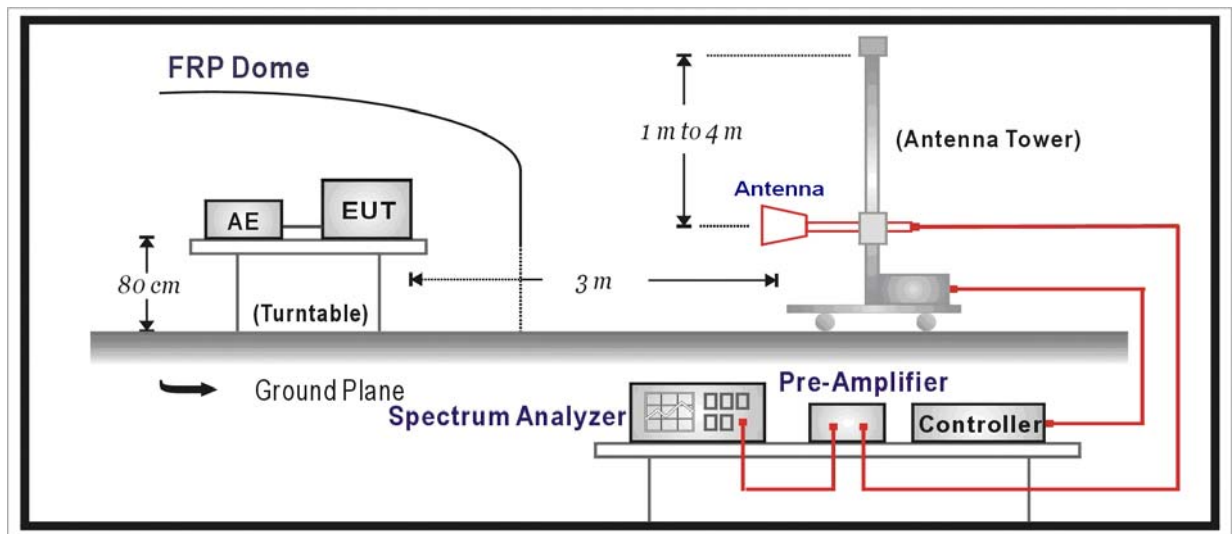

12.3. Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) of FCC part 15.

12.4. Test Procedure

According to FCC Public Notice DA 00-705, March 30, 2000.

This test is required for any spurious emission or modulation product that falls in a Restricted Band, as defined in Section 15.205 of FCC part 15. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being

corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b) of FCC part 15.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209 of FCC Part 15. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit of FCC part 15.

If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative "marker-delta" method may be employed.

12.5. Uncertainty

The measurement uncertainty above 1G is defined as $\pm 3.9 \text{ dB}$
below 1G is defined as $\pm 3.8 \text{ dB}$


12.6. Test Result

All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;


Average detector: RBW = 1MHz, VBW = 10Hz, sweep time = auto.

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:23
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
Probe : 9120D_499(1-18GHz) - HORIZONTAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1: Transmit at 2402MHz By DH5

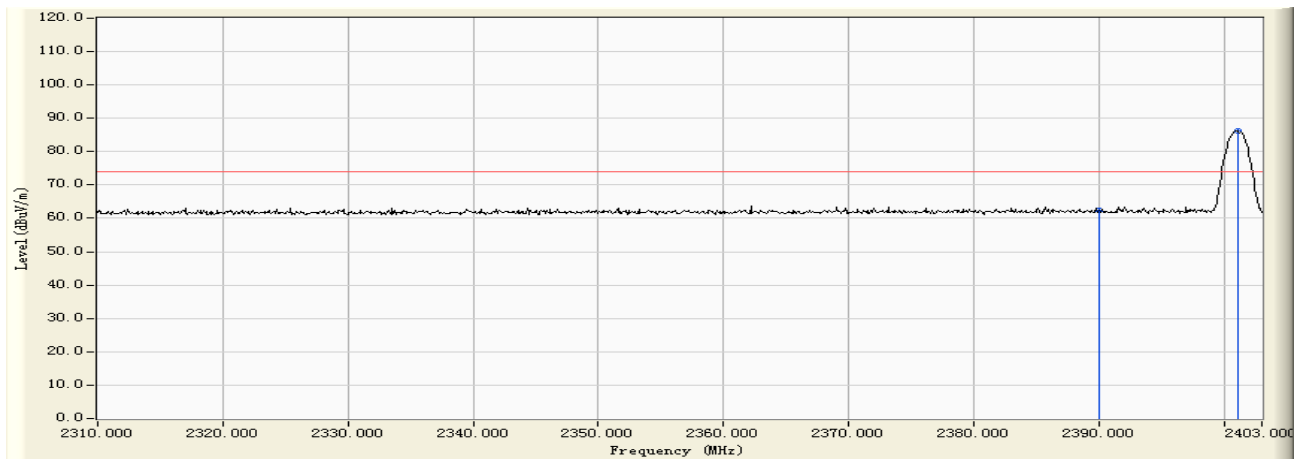


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	31.184	31.125	62.309	-11.661	73.970	PEAK
2	*	2401.140	31.184	55.173	86.357	N/A	N/A	PEAK

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:23
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
Probe : 9120D_499(1-18GHz) - HORIZONTAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1: Transmit at 2402MHz By DH5

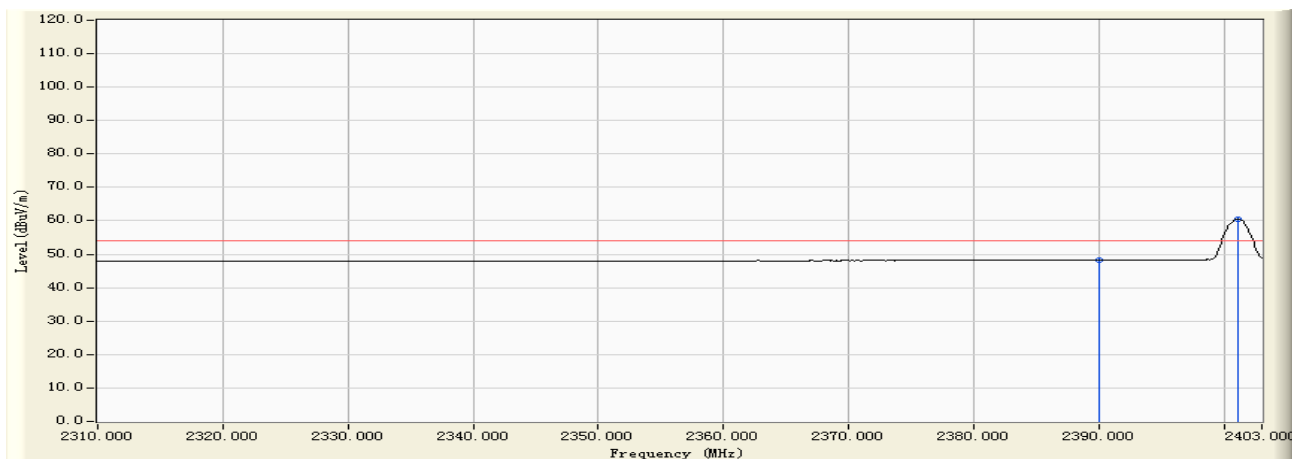


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	31.184	17.077	48.261	-5.709	53.970	AVERAGE
2	*	2401.047	31.184	29.236	60.420	N/A	N/A	AVERAGE

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:27
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
Probe : 9120D_499(1-18GHz) - VERTICAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1: Transmit at 2402MHz By DH5

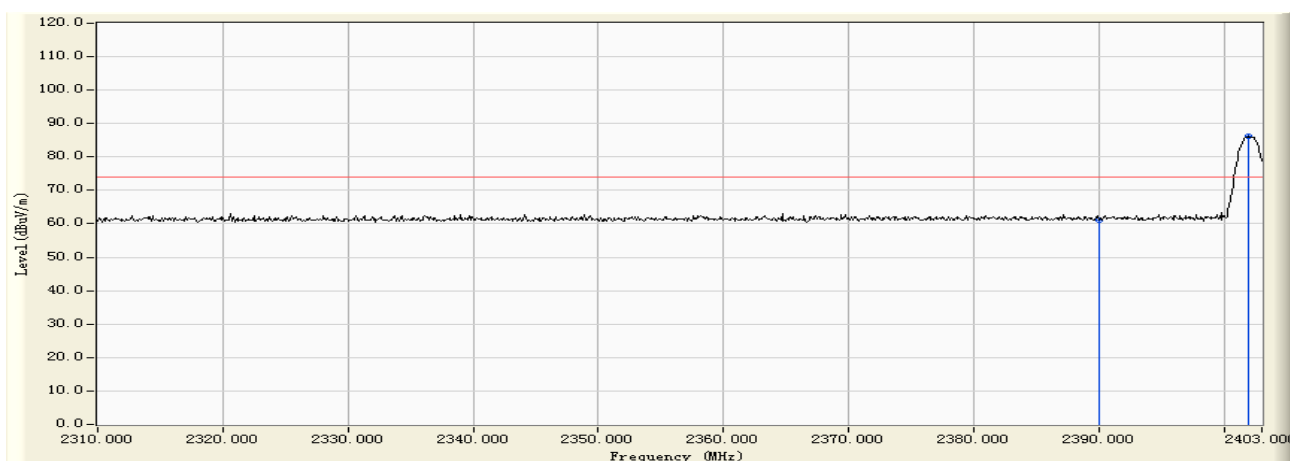


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	31.184	30.087	61.271	-12.699	73.970	PEAK
2	*	2401.884	31.184	54.934	86.118	N/A	N/A	PEAK

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:27
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
Probe : 9120D_499(1-18GHz) - VERTICAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1: Transmit at 2402MHz By DH5

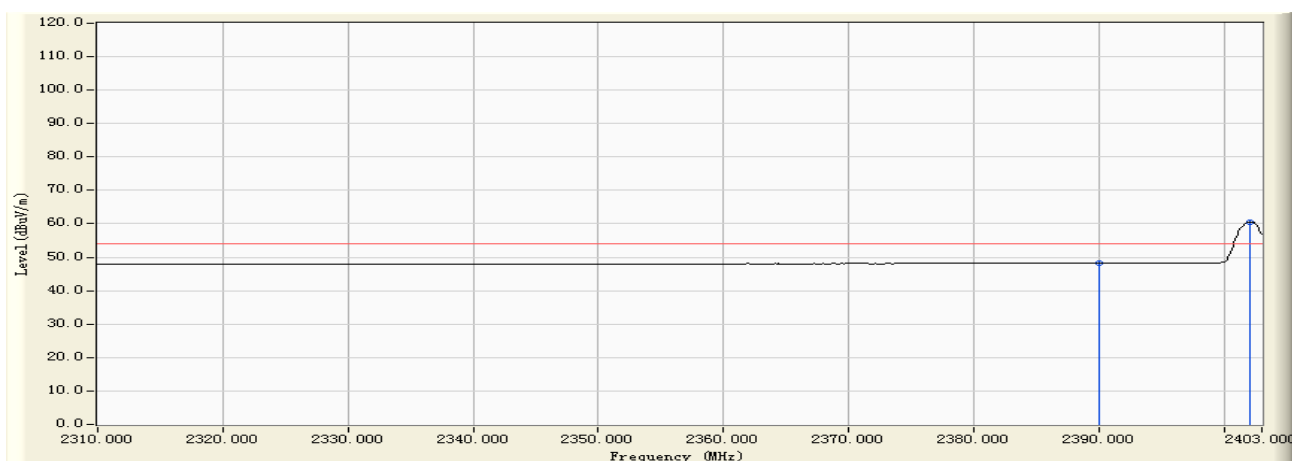


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	31.184	17.032	48.216	-5.754	53.970	AVERAGE
2	*	2402.070	31.184	29.453	60.637	N/A	N/A	AVERAGE

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:32
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
Probe : 9120D_499(1-18GHz) - HORIZONTAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1: Transmit at 2480MHz By DH5

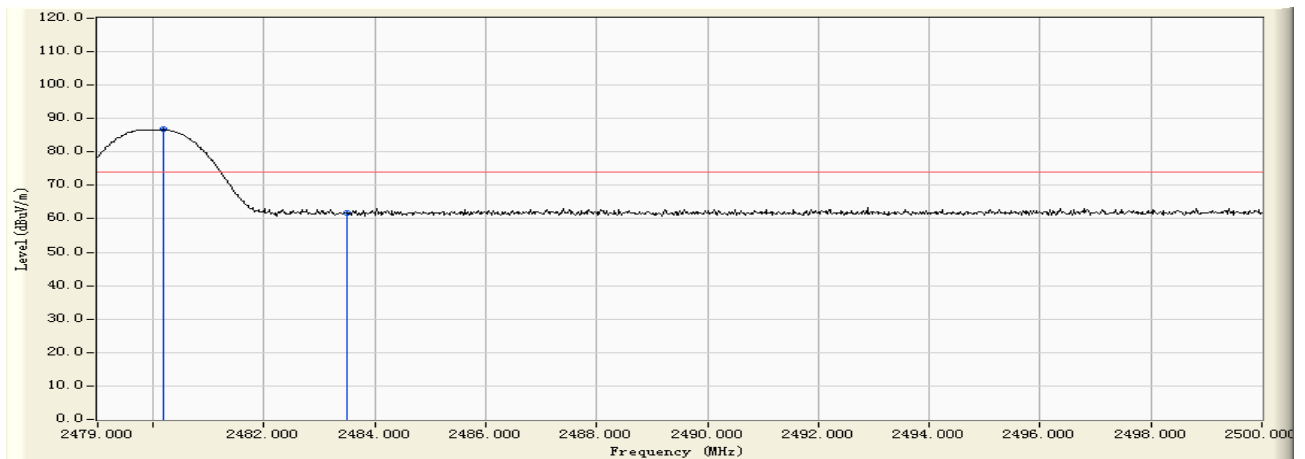


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.176	31.214	55.506	86.720	N/A	N/A	PEAK
2		2483.500	31.212	30.443	61.655	-12.315	73.970	PEAK

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:32
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
Probe : 9120D_499(1-18GHz) - HORIZONTAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1: Transmit at 2480MHz By DH5

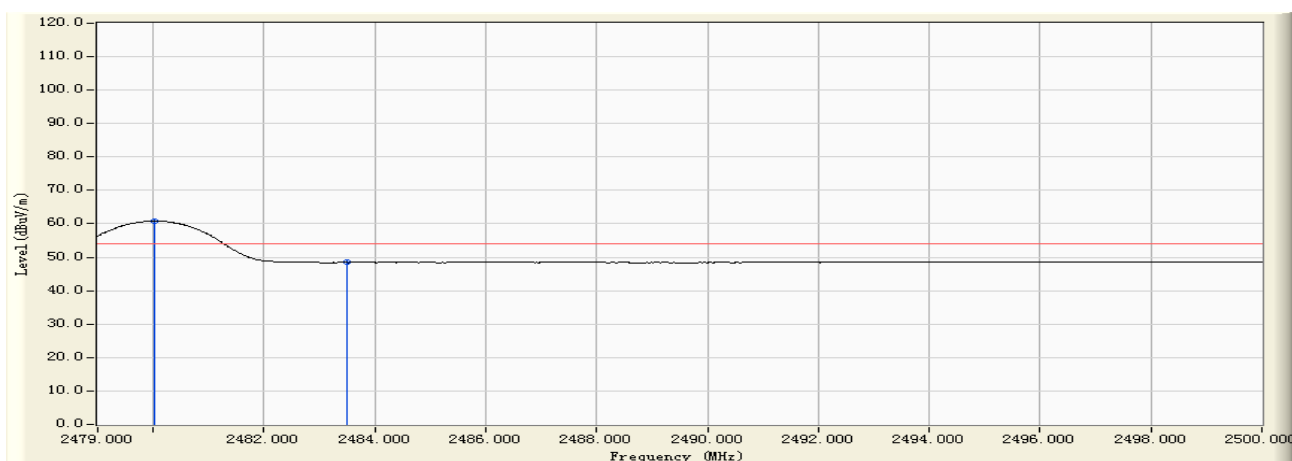


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.029	31.214	29.607	60.821	N/A	N/A	AVERAGE
2		2483.500	31.212	17.212	48.424	-5.546	53.970	AVERAGE

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:35
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
Probe : 9120D_499(1-18GHz) - VERTICAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1: Transmit at 2480MHz By DH5

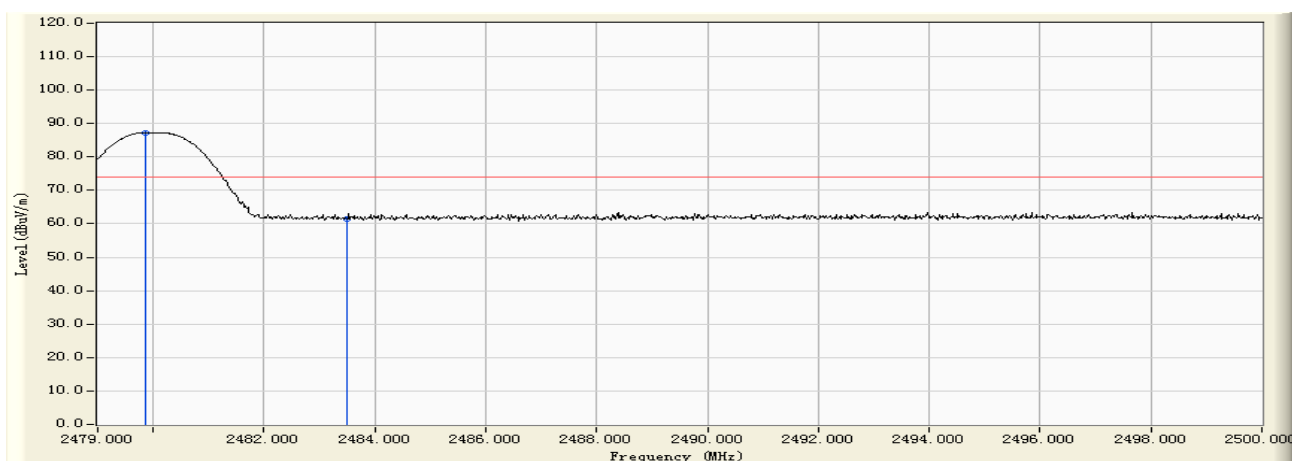


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2479.861	31.214	56.130	87.344	N/A	N/A	PEAK
2		2483.500	31.212	30.289	61.501	-12.469	73.970	PEAK

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:35
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
Probe : 9120D_499(1-18GHz) - VERTICAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 1: Transmit at 2480MHz By DH5

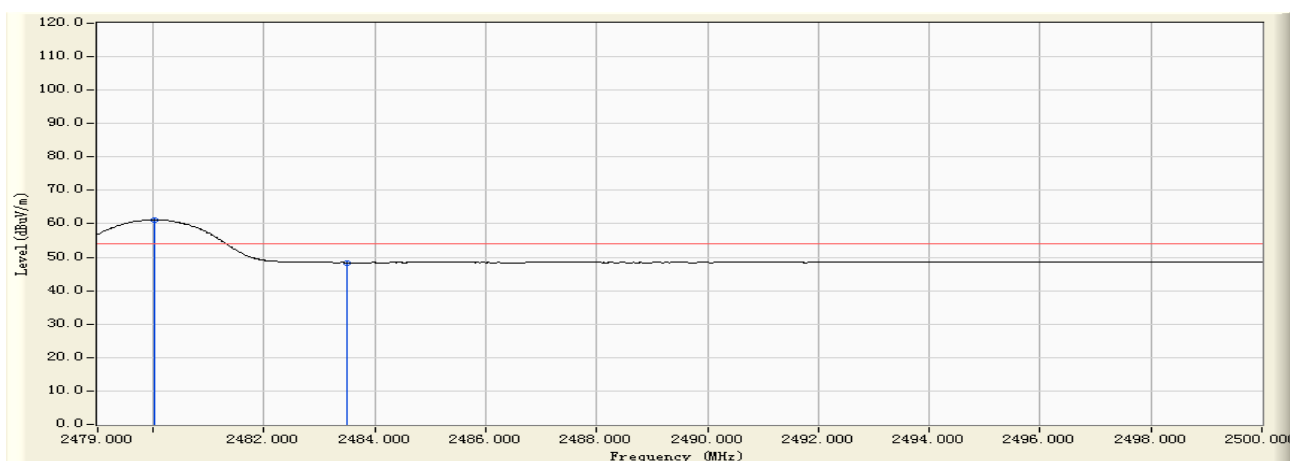


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.029	31.214	30.006	61.220	N/A	N/A	AVERAGE
2		2483.500	31.212	17.182	48.394	-5.576	53.970	AVERAGE

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:41
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
Probe : 9120D_499(1-18GHz) - HORIZONTAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 2: Transmit at 2402MHz By 3DH5

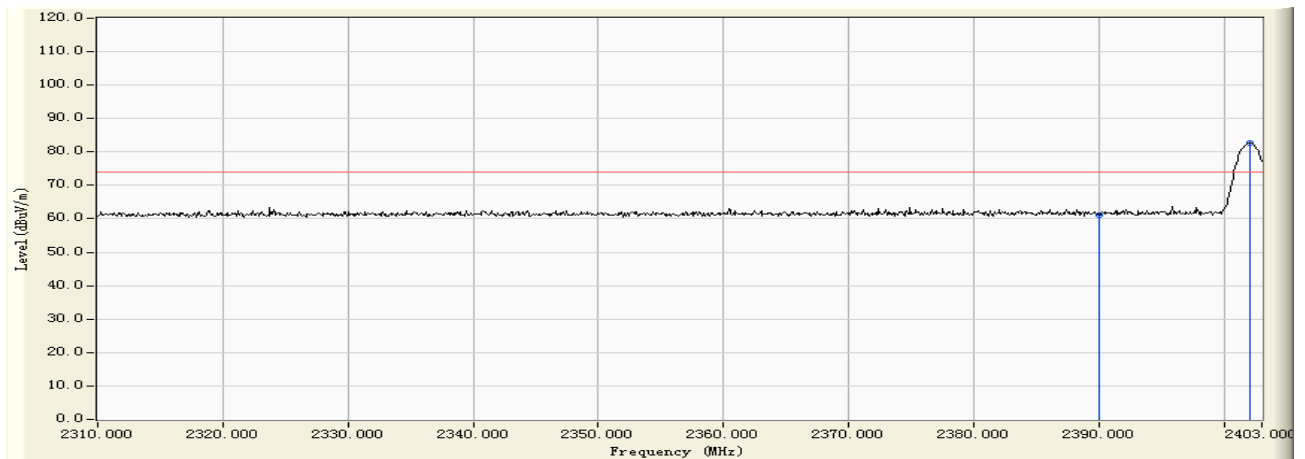


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	31.184	30.079	61.263	-12.707	73.970	PEAK
2	*	2402.070	31.184	51.636	82.820	N/A	N/A	PEAK

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:41
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
Probe : 9120D_499(1-18GHz) - HORIZONTAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 2: Transmit at 2402MHz By 3DH5

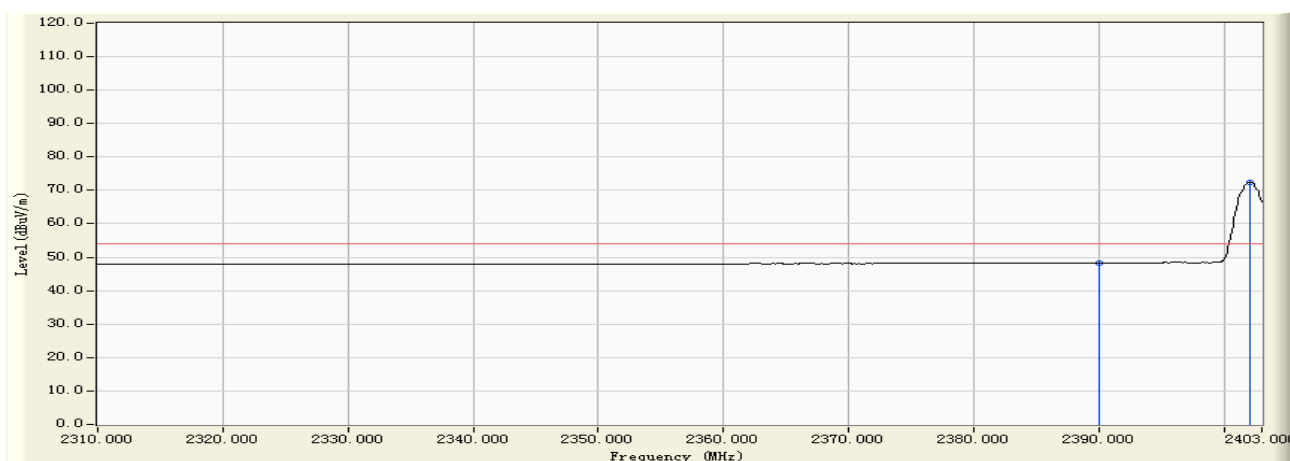


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	31.184	17.035	48.219	-5.751	53.970	AVERAGE
2	*	2402.070	31.184	41.351	72.535	N/A	N/A	AVERAGE

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:44
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
Probe : 9120D_499(1-18GHz) - VERTICAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 2: Transmit at 2402MHz By 3DH5

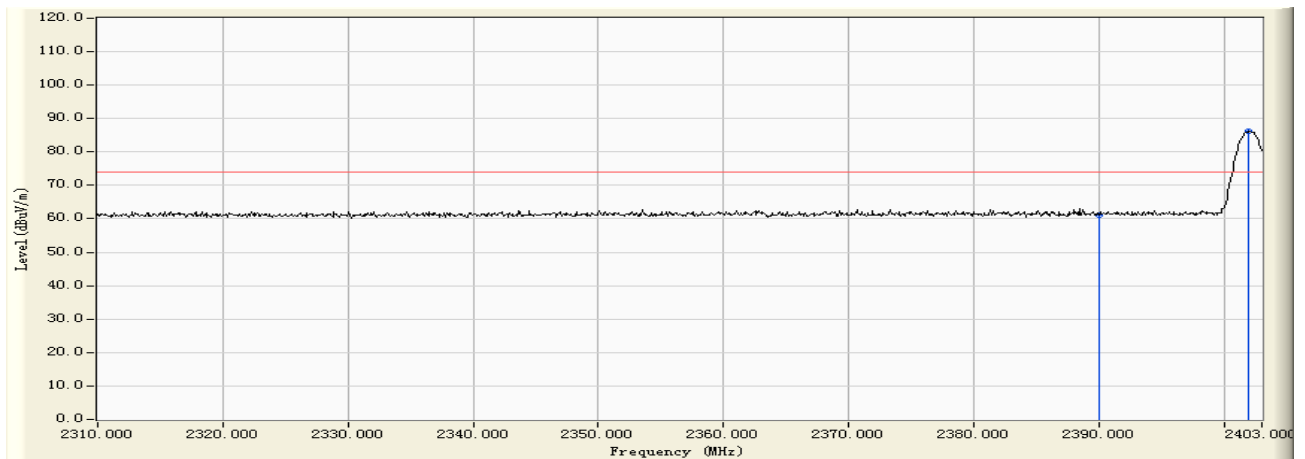


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	31.184	30.099	61.283	-12.687	73.970	PEAK
2	*	2401.977	31.184	55.044	86.228	N/A	N/A	PEAK

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:44
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
Probe : 9120D_499(1-18GHz) - VERTICAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 2: Transmit at 2402MHz By 3DH5

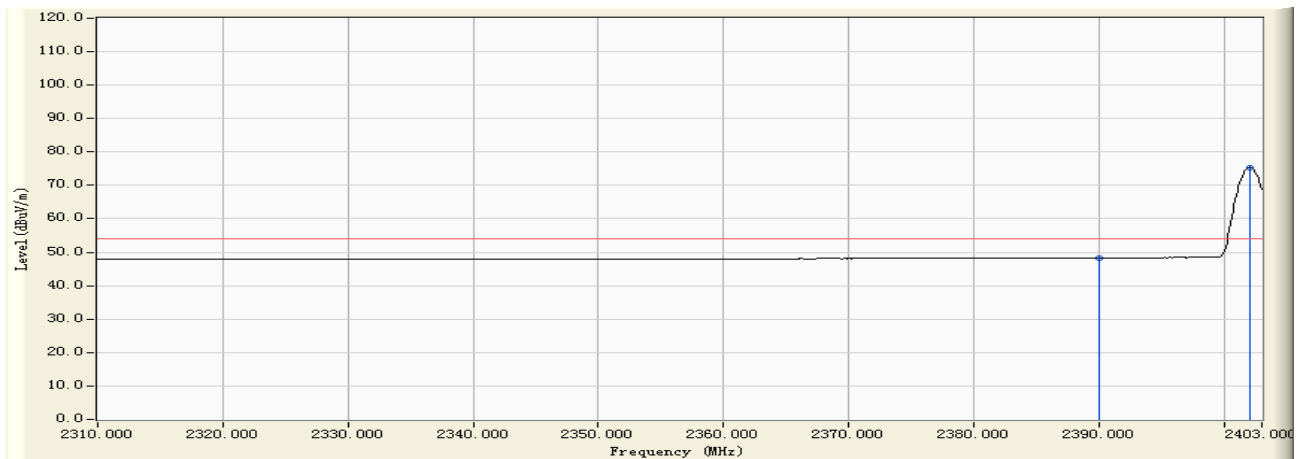


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2390.000	31.184	17.057	48.241	-5.729	53.970	AVERAGE
2	*	2402.070	31.184	44.069	75.253	N/A	N/A	AVERAGE

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:52
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
Probe : 9120D_499(1-18GHz) - HORIZONTAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 2: Transmit at 2480MHz By 3DH5

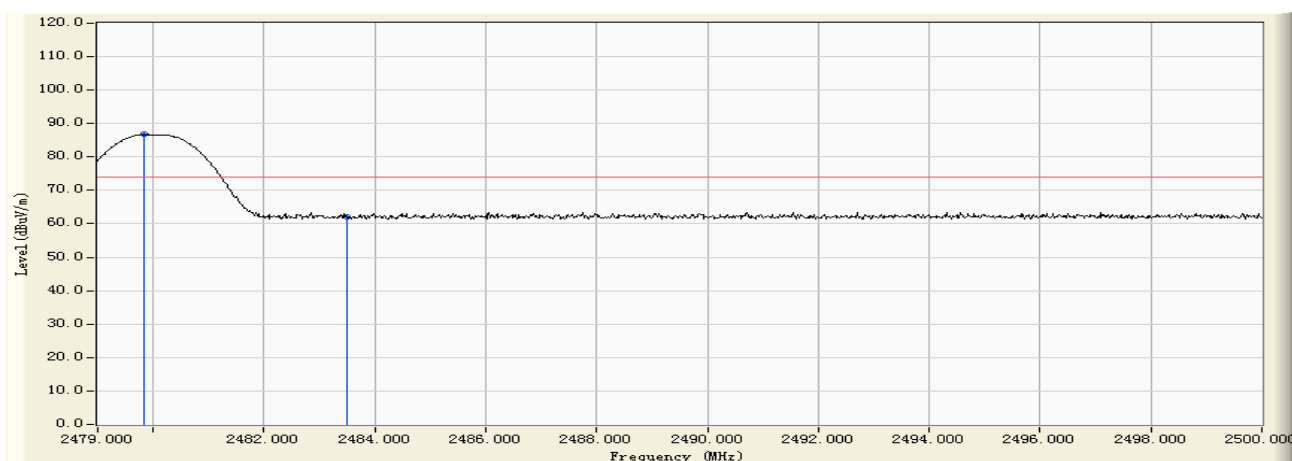


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2479.840	31.215	55.537	86.751	N/A	N/A	PEAK
2		2483.500	31.212	30.746	61.958	-12.012	73.970	PEAK

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:53
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
Probe : 9120D_499(1-18GHz) - HORIZONTAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 2: Transmit at 2480MHz By 3DH5

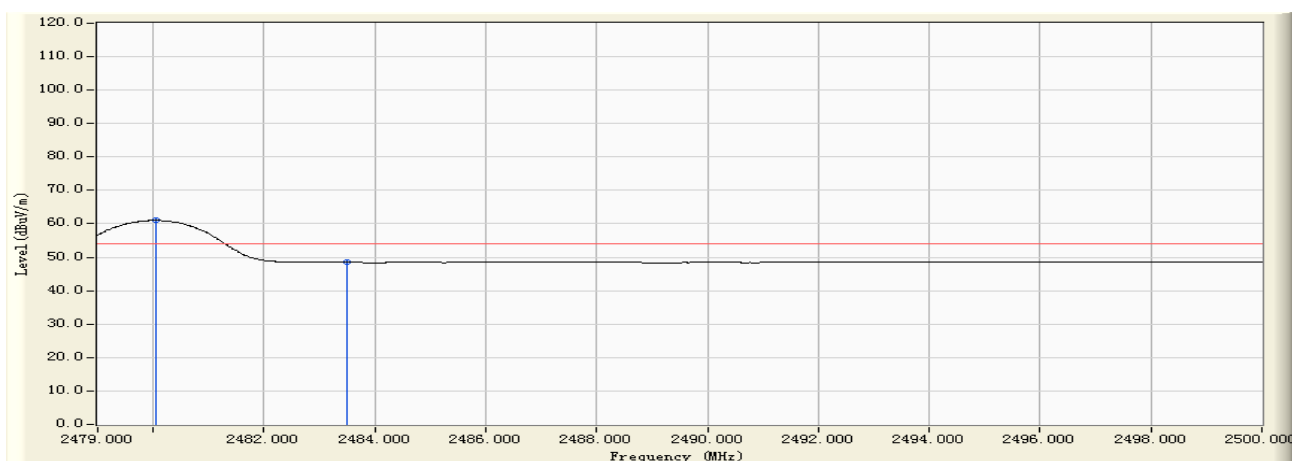


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.050	31.214	29.793	61.007	N/A	N/A	AVERAGE
2		2483.500	31.212	17.246	48.458	-5.512	53.970	AVERAGE

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:57
Limit : FCC_SpartC_15.209_03M_PK	Margin : 0
Probe : 9120D_499(1-18GHz) - VERTICAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 2: Transmit at 2480MHz By 3DH5

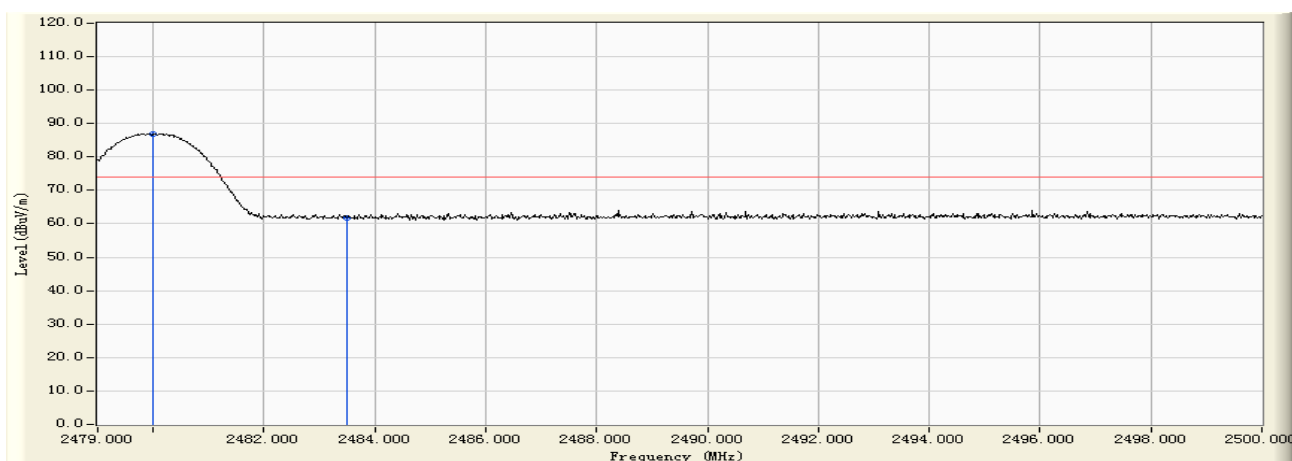

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2479.987	31.214	55.726	86.940	N/A	N/A	PEAK
2		2483.500	31.212	30.635	61.847	-12.123	73.970	PEAK

Engineer : Jame	
Site : AC-5 (3m Semi-Anechoic Chamber)	Time : 2009/10/28 - 19:57
Limit : FCC_SpartC_15.209_03M_AV	Margin : 0
Probe : 9120D_499(1-18GHz) - VERTICAL	Power : DC 3.7V
EUT : Bluetooth Handsfree Car Kit	Note : Mode 2: Transmit at 2480MHz By 3DH5

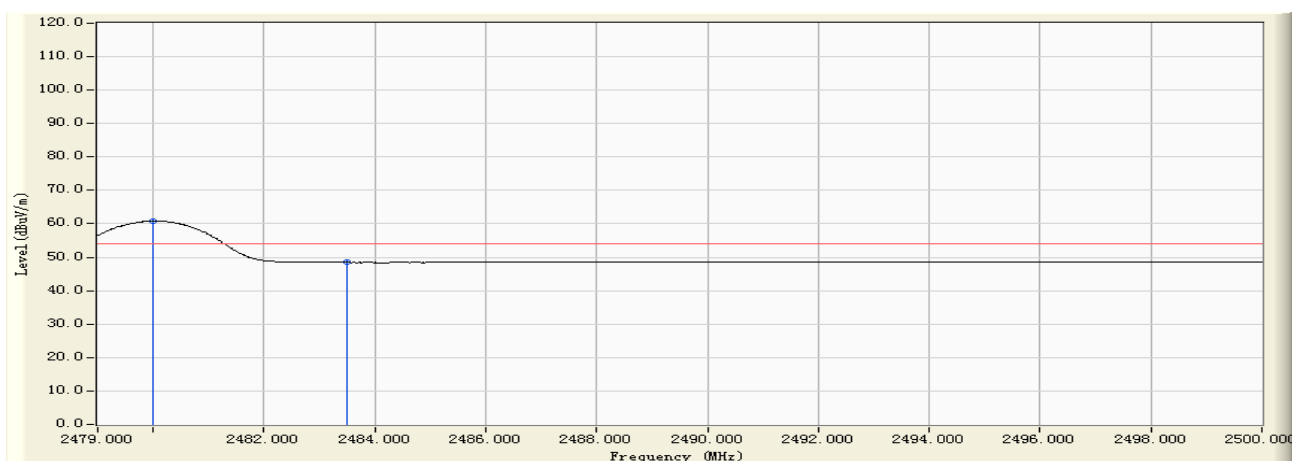

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2479.987	31.214	29.611	60.825	N/A	N/A	AVERAGE
2		2483.500	31.212	17.232	48.444	-5.526	53.970	AVERAGE