




# FCC RADIO TEST REPORT

**FCC ID** : TVE-241001  
**Equipment** : Network Security Gateway  
**Brand Name** : FORTINET   
**Model Name** : FortiWiFi 70G-POExxxxxxxxxx, FORTIWIFI-70G-POExxxxxxxxxx, FWF-70G-POExxxxxxxxxx, FortiWiFi 71G-POExxxxxxxxxx, FORTIWIFI-71G-POExxxxxxxxxx, FWF-71G-POExxxxxxxxxx (where "x" can be used as "0-9", or "A-Z", or "-", or blank for software changes or marketing purposes only)  
**Applicant** : Fortinet Inc.  
909 Kifer Rd., Sunnyvale, CA 94086, United States  
**Manufacturer** : Fortinet Inc.  
909 Kifer Rd., Sunnyvale, CA 94086, United States  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Feb. 12, 2025 and testing was performed from Feb. 13, 2025 to Feb. 26, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



---

Approved by: Louis Wu

**Sportun International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	6
1.4 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test.....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system .....	9
2.5 EUT Operation Test Setup .....	9
2.6 Measurement Results Explanation Example.....	10
<b>3 Test Result.....</b>	<b>11</b>
3.1 6dB and 99% Bandwidth Measurement .....	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement .....	13
3.4 Conducted Band Edges and Spurious Emission Measurement .....	14
3.5 Radiated Band Edges and Spurious Emission Measurement .....	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
<b>4 List of Measuring Equipment .....</b>	<b>22</b>
<b>5 Measurement Uncertainty .....</b>	<b>24</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission Test Data</b>	
<b>Appendix D. Duty Cycle Plots</b>	
<b>Appendix E. Setup Photographs</b>	



## History of this test report



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Lucy Wu



## 1 General Description

### 1.1 Product Feature of Equipment Under Test

Product Feature	
<b>General Specs</b> Bluetooth-LE, Wi-Fi 2.4GHz 802.11b/g/n/ax and Wi-Fi 5GHz 802.11a/n/ac/ax.	
<b>Antenna Type</b> Bluetooth-LE: Monopole Antenna	
Antenna information	
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)   1.53

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

Model differences description		
Model Feature	FWF-71G-POE	FWF-70G-POE
M.2 SSD	V	X

**Remark:** All the tests were performed with Model: FWF-71G-POE.

### 1.2 Modification of EUT

No modifications made to the EUT during the testing.



## 1.3 Testing Location

<b>Test Site</b>	Sportun International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sportun Site No.</b> TH05-HY, CO07-HY, 03CH11-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

## 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-




## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
	Mode 7: Bluetooth Tx CH00_2402 MHz_125kbps
	Mode 8: Bluetooth Tx CH19_2440 MHz_125kbps
	Mode 9: Bluetooth Tx CH39_2480 MHz_125kbps
	Mode 10: Bluetooth Tx CH00_2402 MHz_500kbps
	Mode 11: Bluetooth Tx CH19_2440 MHz_500kbps
	Mode 12: Bluetooth Tx CH39_2480 MHz_500kbps
AC Conducted Emission	Mode 1: Bluetooth-LE Link +Adapter
<b>Remark:</b>	
1. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	
2. For Radiated Spurious Emission above 18GHz and below 1GHz, the modulation and the data rate picked for testing are determined by the worst from Remark 1.	
3. The detailed Radiated test modes are shown in Appendix C.	

## 2.3 Connection Diagram of Test System

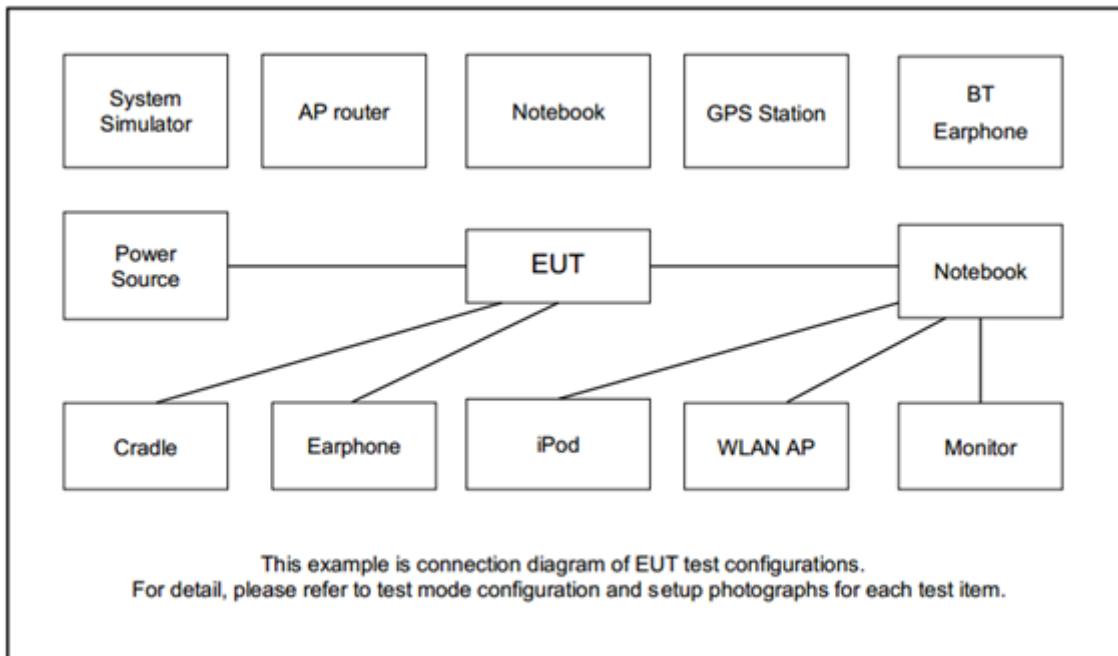

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Mobile Phone	Asus	Zenfone5	MSQX00QSA	N/A	N/A
2.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

## 2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term v4.106” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



## 2.6 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * \text{RBW}$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

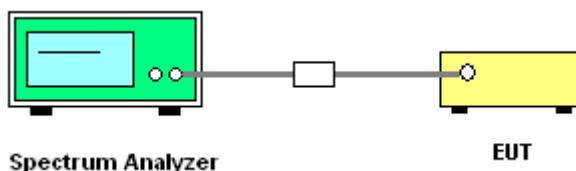

##### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

##### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

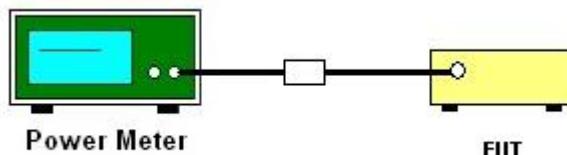

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

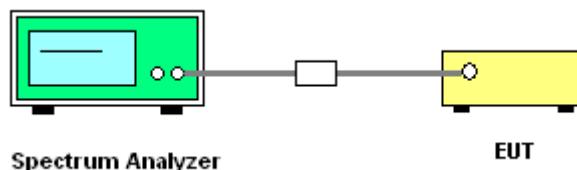

#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

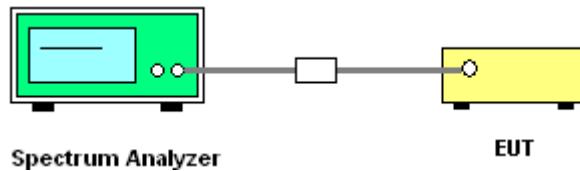

### 3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

### 3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



## 3.5 Radiated Band Edges and Spurious Emission Measurement

### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.



### 3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:


  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated test below 30MHz

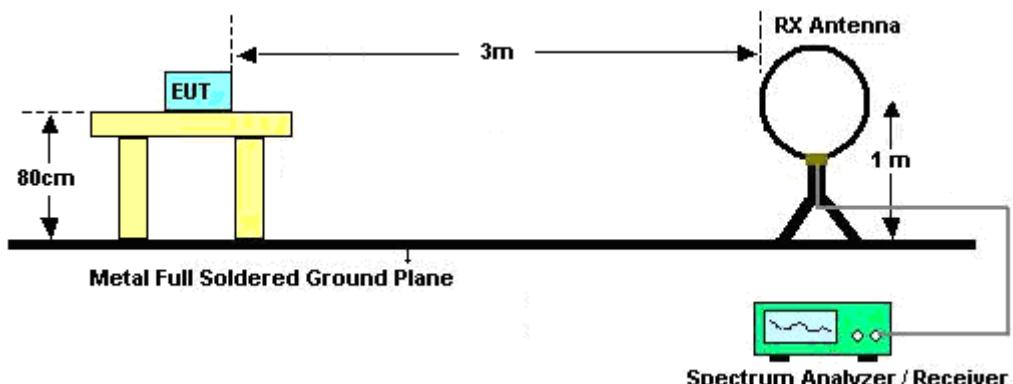


For radiated test from 30MHz to 1GHz

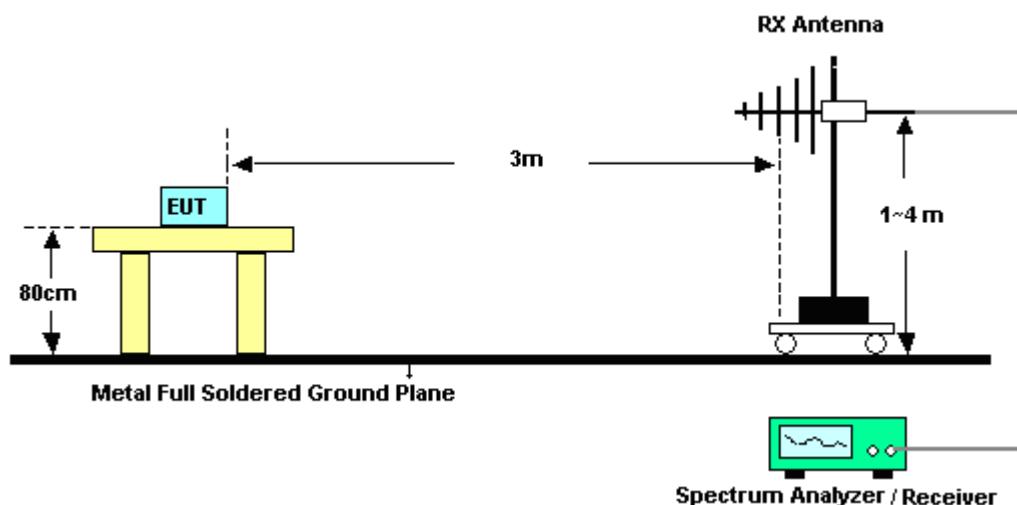

For radiated test from 1GHz to 18GHz

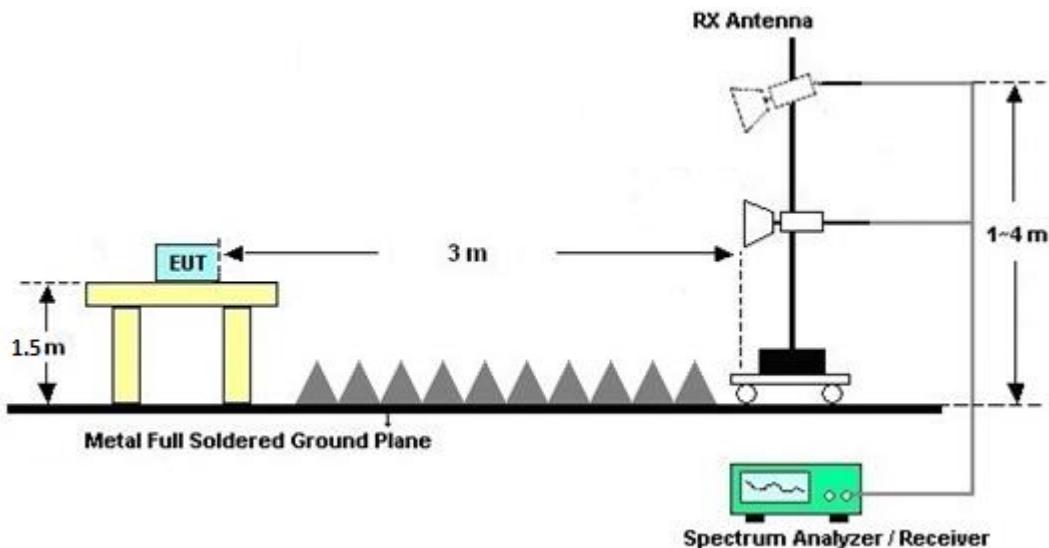

For radiated test above 18GHz

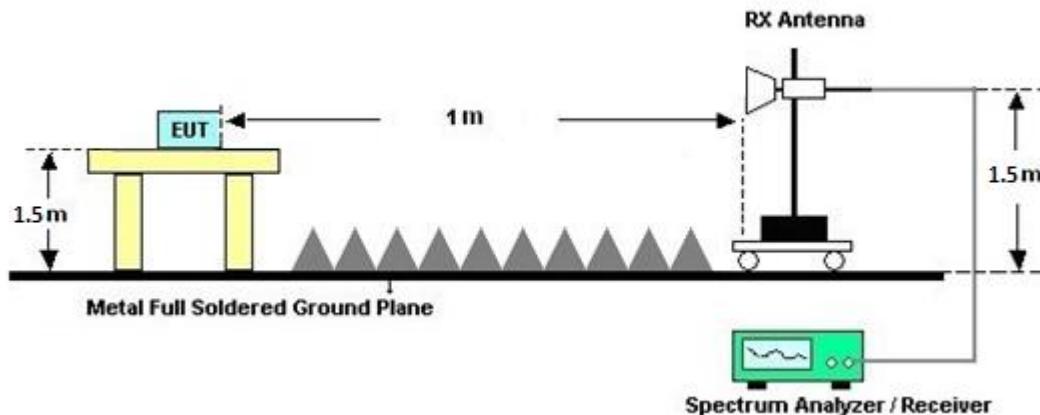

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

### 3.5.7 Duty Cycle

Please refer to Appendix D.

### 3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.



## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

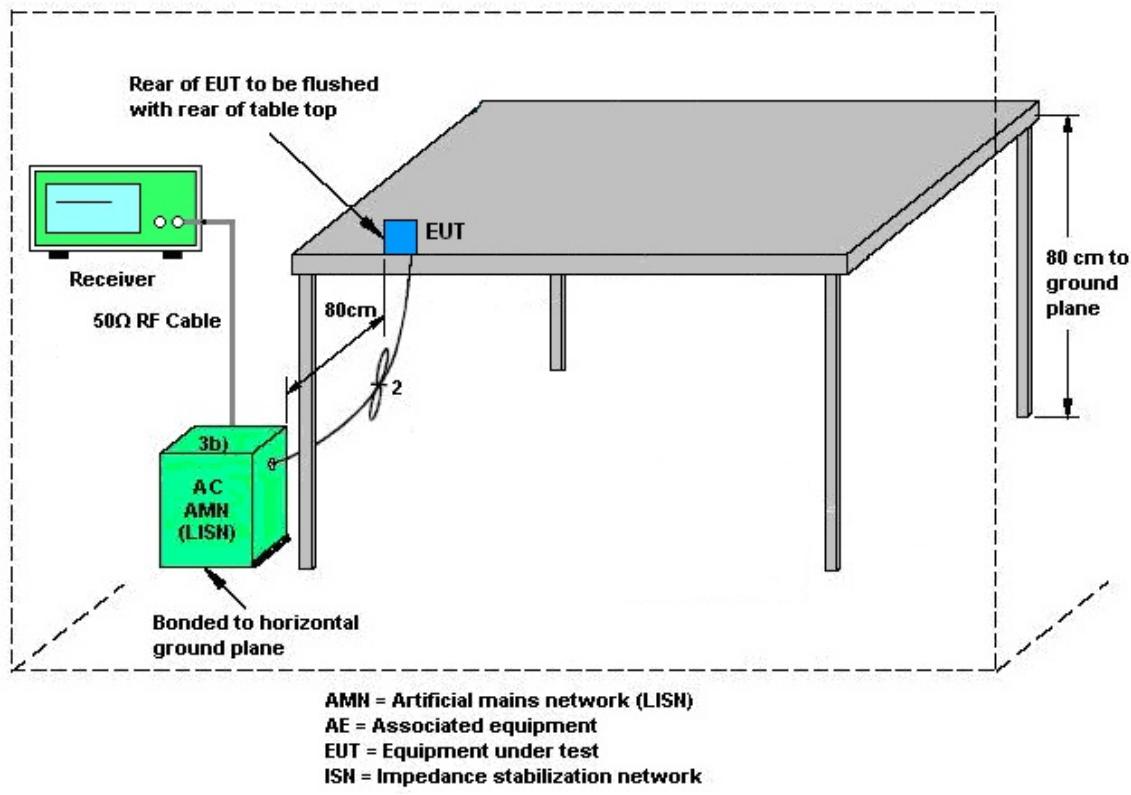

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## 3.7 Antenna Requirements

### 3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### 3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	40103 & 07	30MHz~1GHz	Apr. 12, 2024	Feb. 13, 2025~Feb. 18, 2025	Apr. 11, 2025	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Feb. 13, 2025~Feb. 18, 2025	Aug. 28, 2025	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 28, 2024	Feb. 13, 2025~Feb. 18, 2025	Aug. 27, 2025	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jun. 24, 2024	Feb. 13, 2025~Feb. 18, 2025	Jun. 23, 2025	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 07, 2024	Feb. 13, 2025~Feb. 18, 2025	Dec. 06, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 25, 2024	Feb. 13, 2025~Feb. 18, 2025	Mar. 24, 2025	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-303	17100018000 55007	1GHz~18GHz	Jun. 13, 2024	Feb. 13, 2025~Feb. 18, 2025	Jun. 12, 2025	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Sep. 02, 2024	Feb. 13, 2025~Feb. 18, 2025	Sep. 01, 2025	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 14, 2024	Feb. 13, 2025~Feb. 18, 2025	Oct. 13, 2025	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Jul. 19, 2024	Feb. 13, 2025~Feb. 18, 2025	Jul. 18, 2025	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 13, 2025~Feb. 18, 2025	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Feb. 13, 2025~Feb. 18, 2025	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Feb. 13, 2025~Feb. 18, 2025	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Feb. 13, 2025~Feb. 18, 2025	N/A	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200722	N/A	Mar. 13, 2024	Feb. 13, 2025~Feb. 18, 2025	Mar. 12, 2025	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Aug. 29, 2024	Feb. 13, 2025~Feb. 18, 2025	Aug. 28, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	May 23, 2024	Feb. 13, 2025~Feb. 18, 2025	May 22, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 06, 2024	Feb. 13, 2025~Feb. 18, 2025	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 06, 2024	Feb. 13, 2025~Feb. 18, 2025	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 06, 2024	Feb. 13, 2025~Feb. 18, 2025	Mar. 05, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-30 00-18000-60SS	SN3	3GHz High Pass Filter	Sep. 10, 2024	Feb. 13, 2025~Feb. 18, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 10, 2024	Feb. 13, 2025~Feb. 18, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 10, 2024	Feb. 13, 2025~Feb. 18, 2025	Sep. 09, 2025	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPTEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Feb. 17, 2025–Feb. 26, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 35 (NO:109)	10MHz~6GHz	Jan. 04, 2025	Feb. 17, 2025–Feb. 26, 2025	Jan. 03, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Feb. 17, 2025–Feb. 26, 2025	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Feb. 17, 2025–Feb. 26, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Feb. 17, 2025–Feb. 26, 2025	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Feb. 19, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Feb. 19, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Feb. 19, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Feb. 19, 2025	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Feb. 19, 2025	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Feb. 19, 2025	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Feb. 19, 2025	Sep. 22, 2025	Conduction (CO07-HY)



## 5 Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	3.7 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	6.4 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	5.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	5.3 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_{C(y)}$ )	5.3 dB
---	--------

## Appendix A. Test Result of Conducted Test Items

Test Engineer:	Benny Ku				Temperature:	21~25		°C
Test Date:	2025/2/17~2025/2/26				Relative Humidity:	51~54		%

<b>TEST RESULTS DATA</b> <b><u>6dB and 99% Occupied Bandwidth</u></b>								
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.074	0.698	0.50	Pass
BLE	1Mbps	1	19	2440	1.058	0.695	0.50	Pass
BLE	1Mbps	1	39	2480	1.069	0.692	0.50	Pass

<b>TEST RESULTS DATA</b> <b><u>Average Power Table</u></b>										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	6.83	30.00	1.53	8.36	36.00	Pass
BLE	1Mbps	1	19	2440	6.59	30.00	1.53	8.12	36.00	Pass
BLE	1Mbps	1	39	2480	6.61	30.00	1.53	8.14	36.00	Pass

<b>TEST RESULTS DATA</b> <b><u>Peak Power Density</u></b>										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail	
BLE	1Mbps	1	0	2402	6.60	-3.09	1.53	8.00	Pass	
BLE	1Mbps	1	19	2440	6.59	-3.12	1.53	8.00	Pass	
BLE	1Mbps	1	39	2480	6.65	-3.41	1.53	8.00	Pass	

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.064	1.379	0.50	Pass
BLE	2Mbps	1	19	2440	2.060	1.339	0.50	Pass
BLE	2Mbps	1	39	2480	2.071	1.356	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	6.71	30.00	1.53	8.24	36.00	Pass
BLE	2Mbps	1	19	2440	6.61	30.00	1.53	8.14	36.00	Pass
BLE	2Mbps	1	39	2480	6.64	30.00	1.53	8.17	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	5.40	-6.34	1.53	8.00	Pass
BLE	2Mbps	1	19	2440	5.34	-7.29	1.53	8.00	Pass
BLE	2Mbps	1	39	2480	5.38	-7.07	1.53	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	125kbps	1	0	2402	1.089	0.725	0.50	Pass
BLE	125kbps	1	19	2440	1.081	0.701	0.50	Pass
BLE	125kbps	1	39	2480	1.085	0.716	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125kbps	1	0	2402	6.47	30.00	1.53	8.00	36.00	Pass
BLE	125kbps	1	19	2440	6.35	30.00	1.53	7.88	36.00	Pass
BLE	125kbps	1	39	2480	6.37	30.00	1.53	7.90	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	125kbps	1	0	2402	3.40	0.80	1.53	8.00	Pass
BLE	125kbps	1	19	2440	3.48	0.65	1.53	8.00	Pass
BLE	125kbps	1	39	2480	3.46	0.75	1.53	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	500kbps	1	0	2402	1.055	0.703	0.50	Pass
BLE	500kbps	1	19	2440	1.050	0.683	0.50	Pass
BLE	500kbps	1	39	2480	1.055	0.680	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500kbps	1	0	2402	6.48	30.00	1.53	8.01	36.00	Pass
BLE	500kbps	1	19	2440	6.39	30.00	1.53	7.92	36.00	Pass
BLE	500kbps	1	39	2480	6.41	30.00	1.53	7.94	36.00	Pass




**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	500kbps	1	0	2402	6.77	-4.54	1.53	8.00	Pass
BLE	500kbps	1	19	2440	6.72	-5.06	1.53	8.00	Pass
BLE	500kbps	1	39	2480	6.76	-5.50	1.53	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.


**6dB Bandwidth**

&lt;1Mbps&gt;

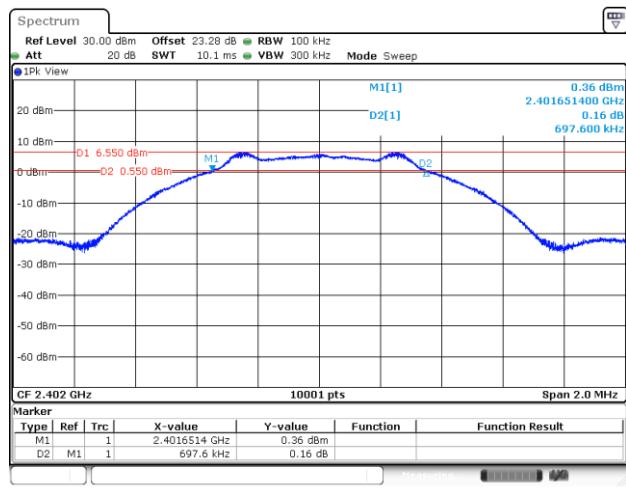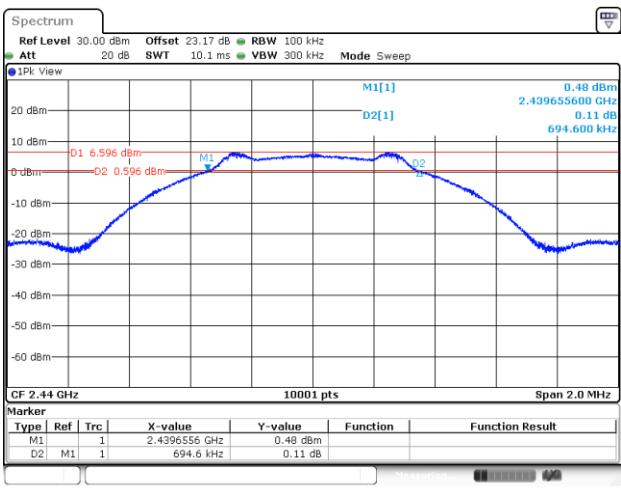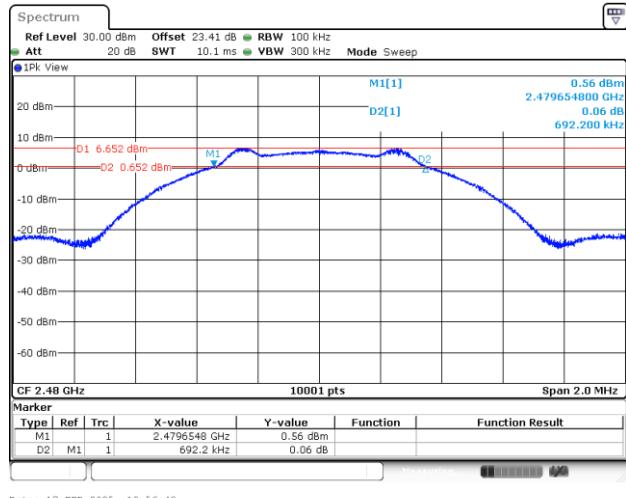**6 dB Bandwidth Plot on Channel 00****6 dB Bandwidth Plot on Channel 19****6 dB Bandwidth Plot on Channel 39**




&lt;2Mbps&gt;

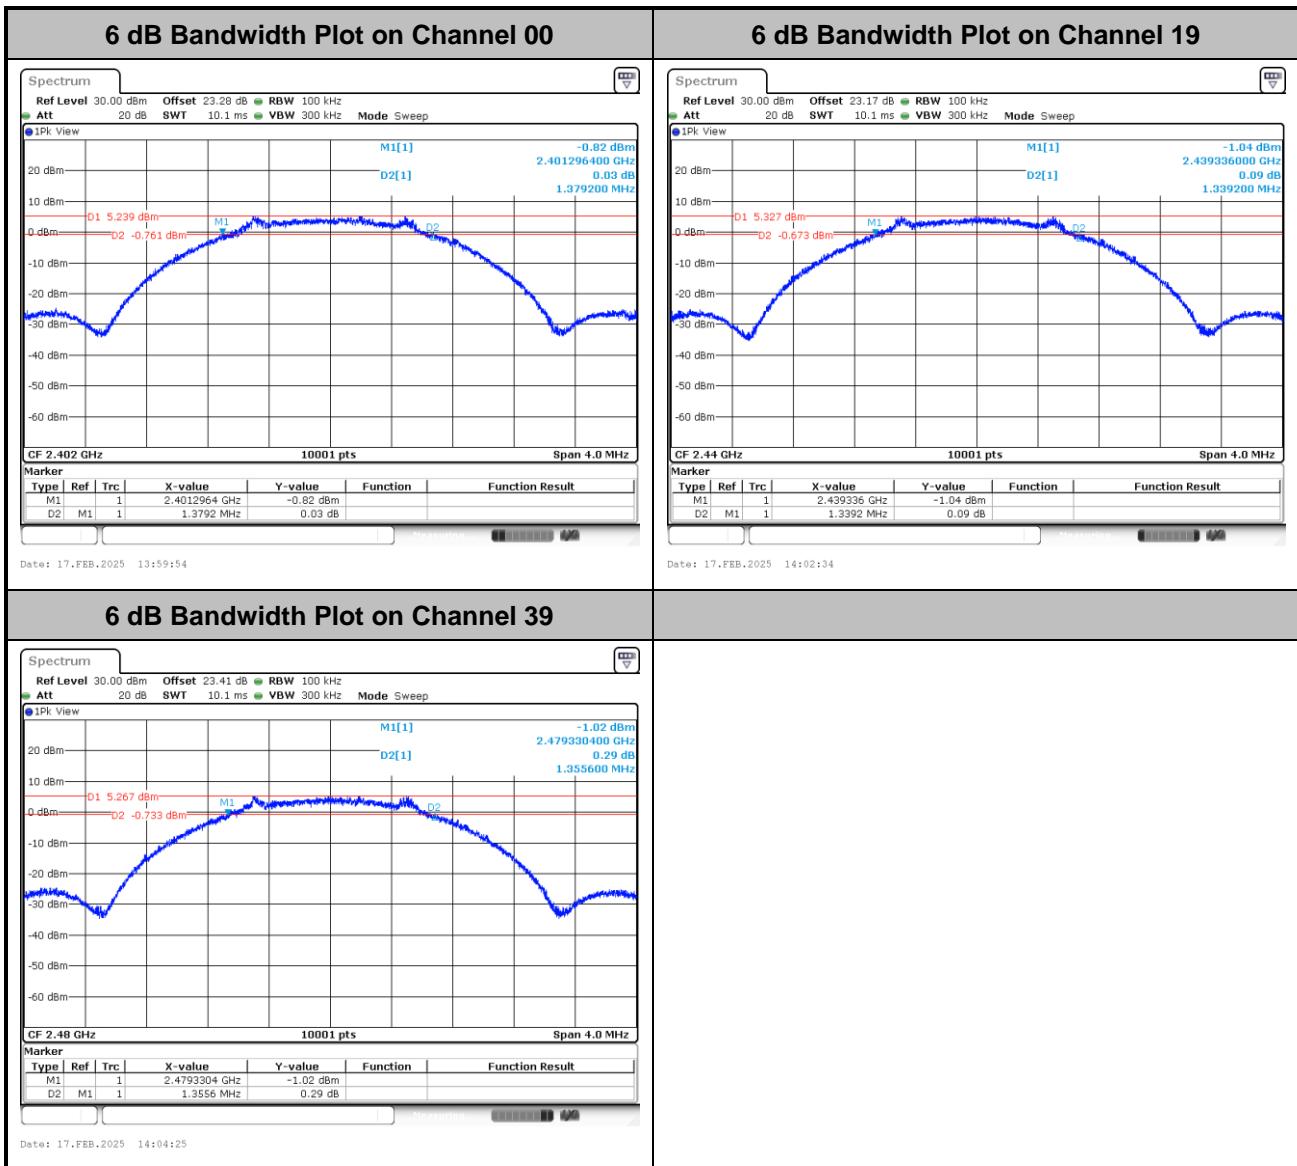




&lt;125Kbps&gt;

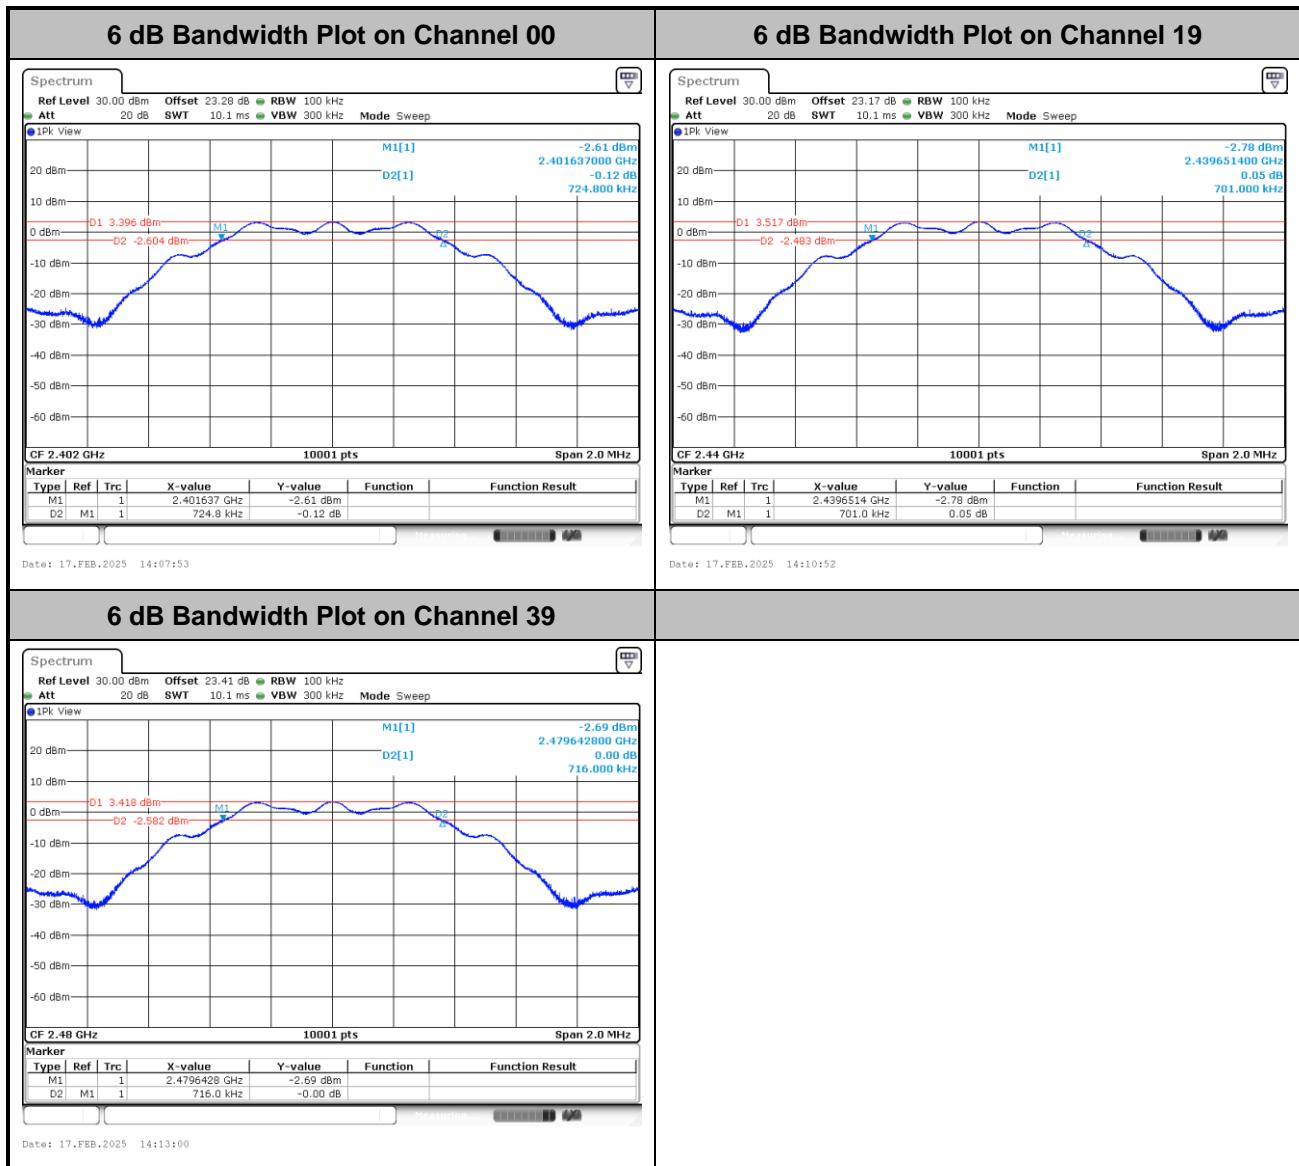






&lt;500Kbps&gt;

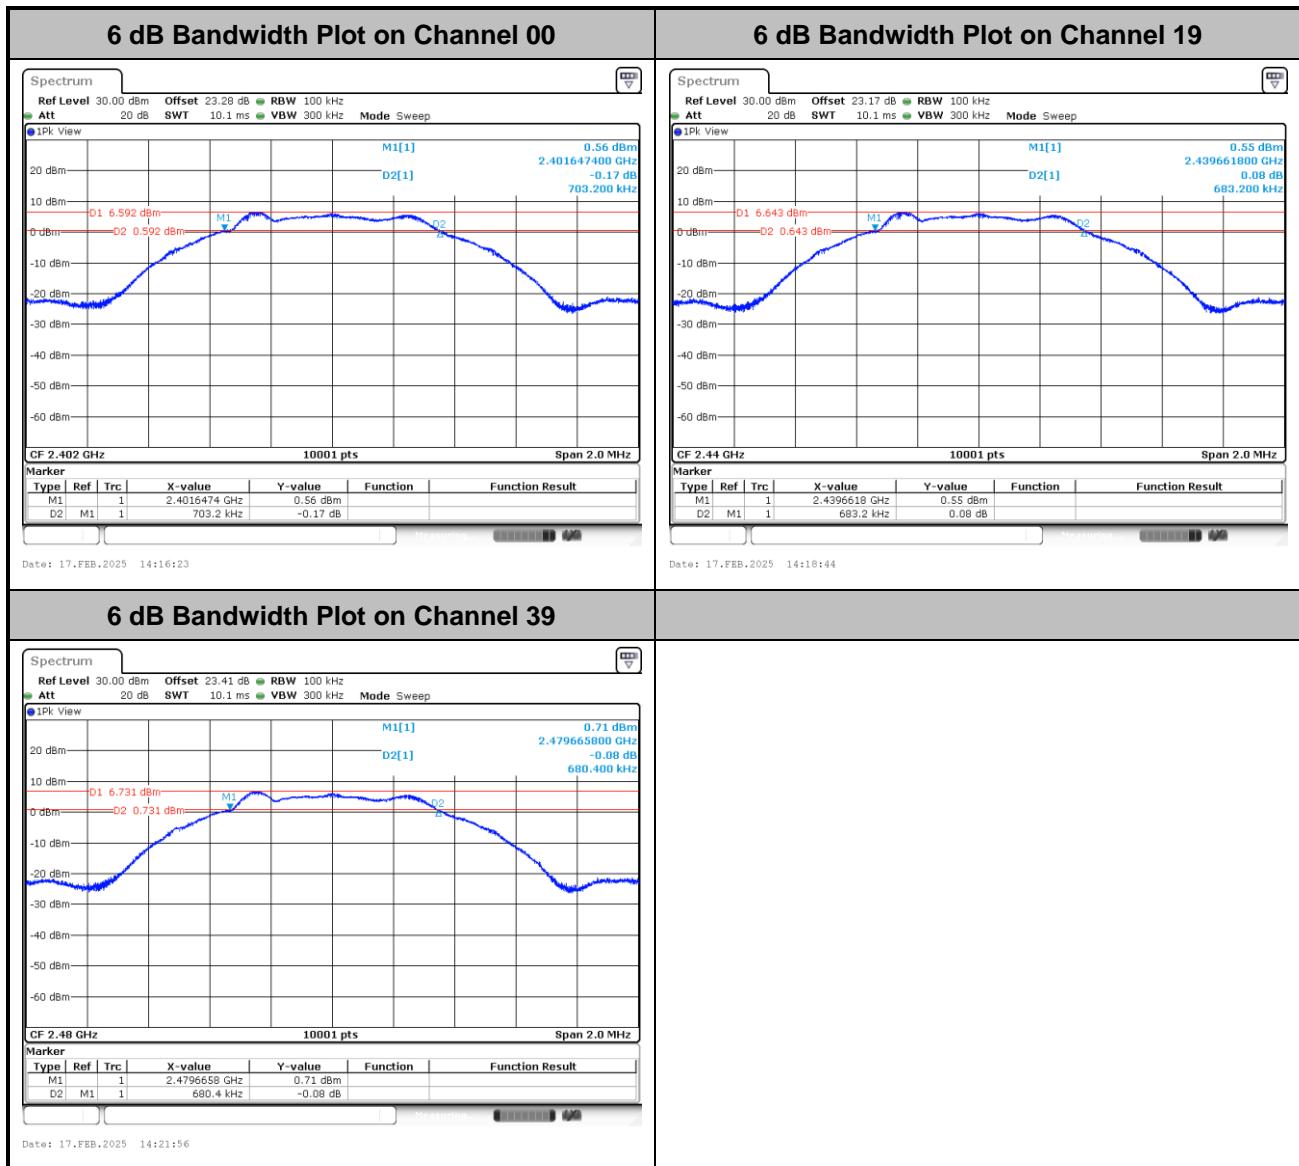


**99% Occupied Bandwidth**

&lt;1Mbps&gt;

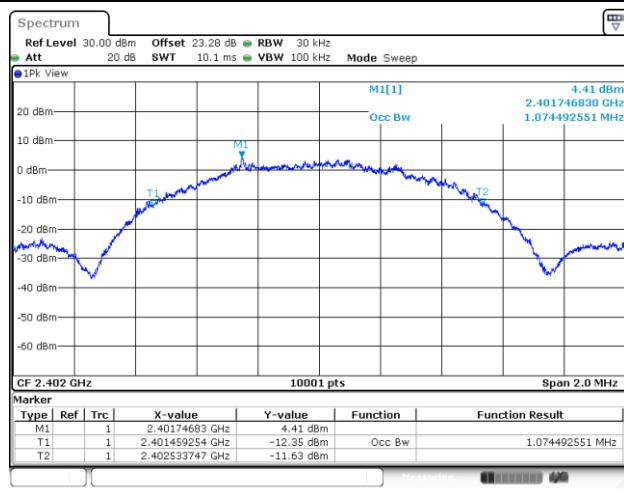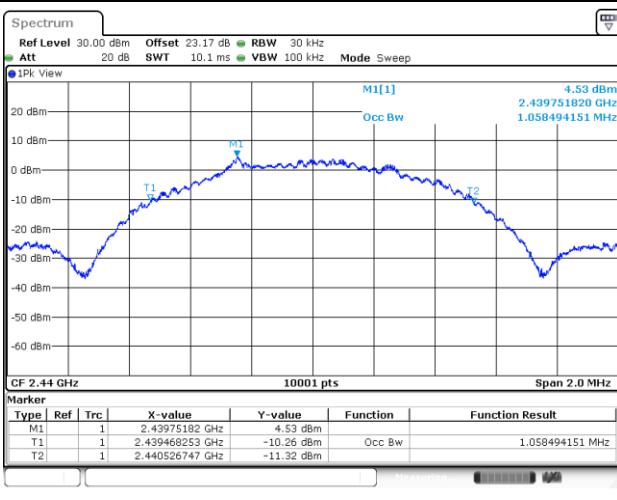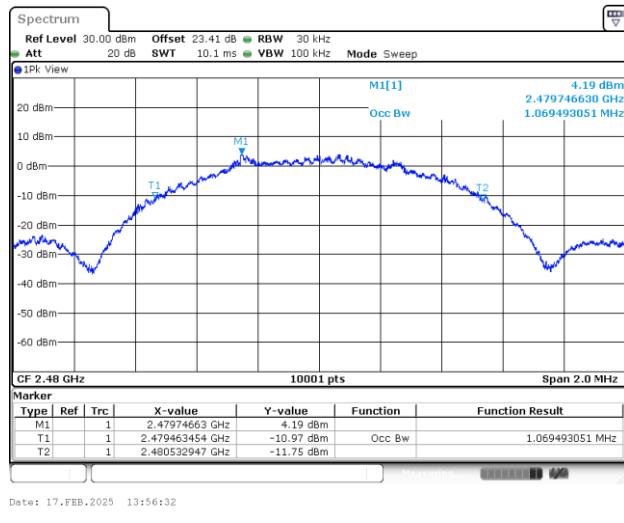**99% Occupied Bandwidth Plot on Channel 00****99% Occupied Bandwidth Plot on Channel 19****99% Occupied Bandwidth Plot on Channel 39**




&lt;2Mbps&gt;

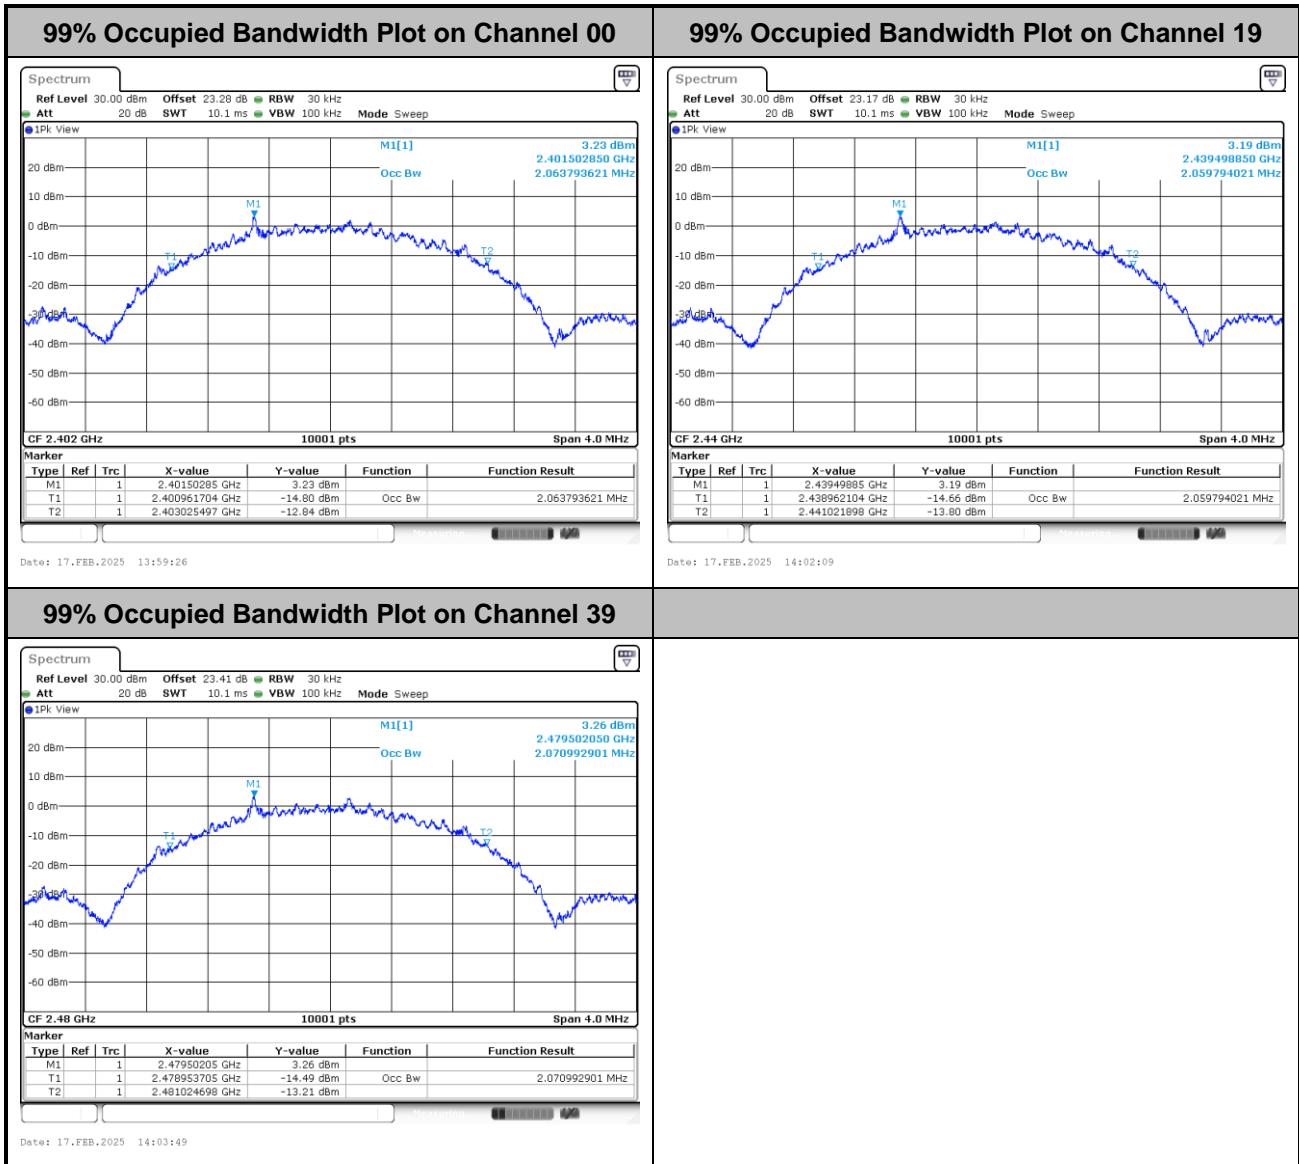




&lt;125Kbps&gt;

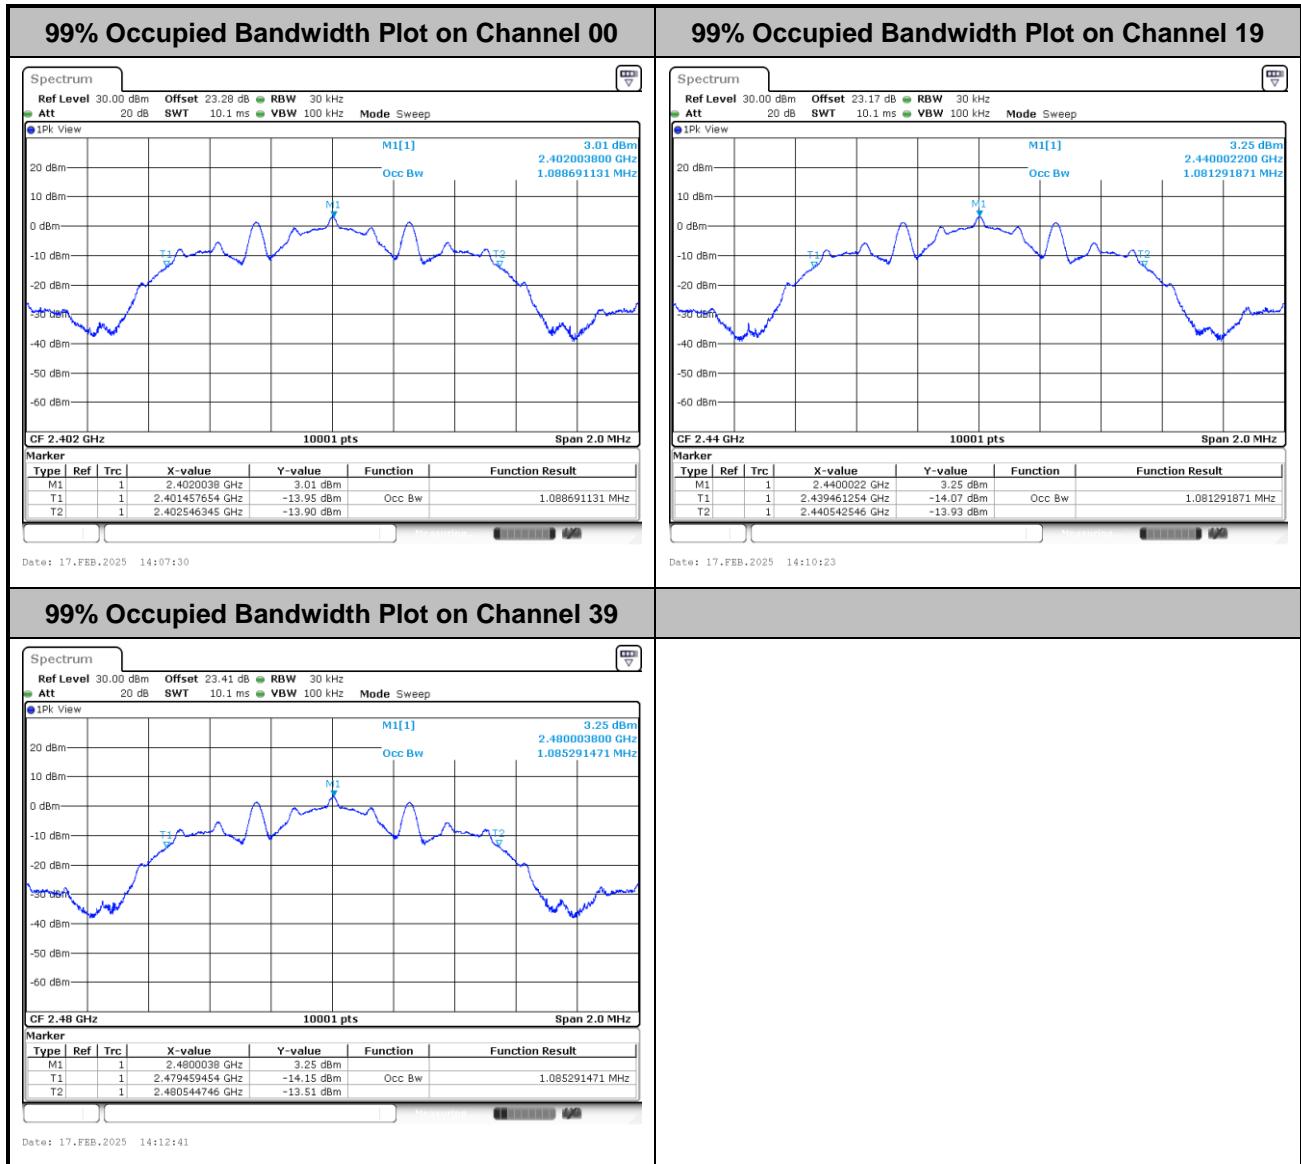




&lt;500Kbps&gt;

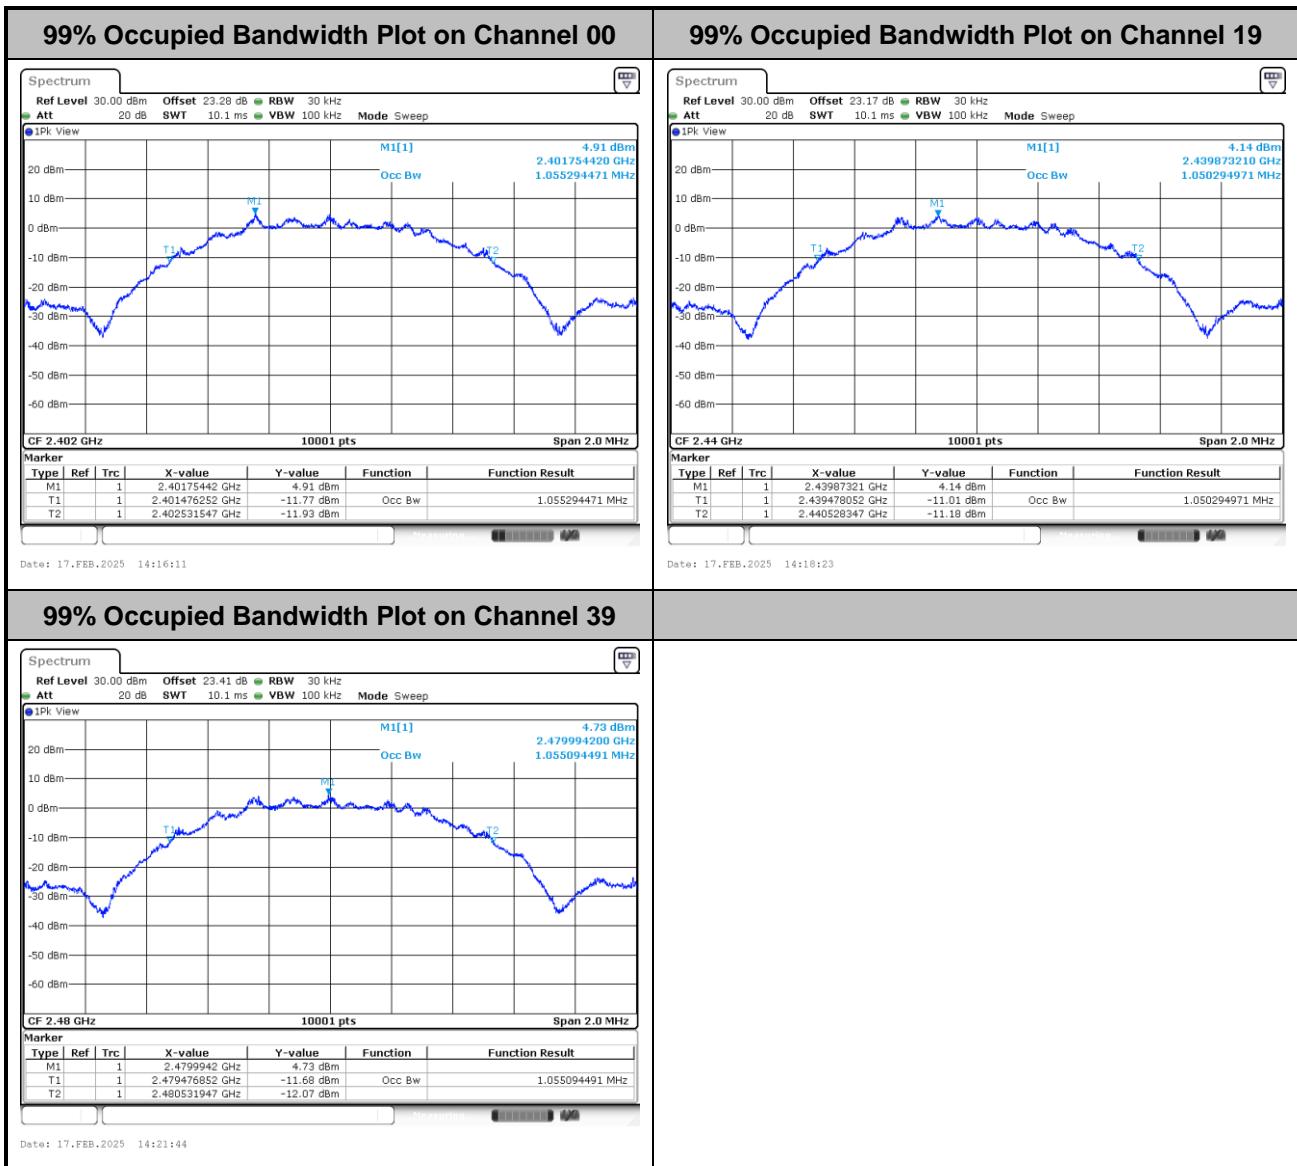


**Power Spectral Density (dBm/3kHz)**

&lt;1Mbps&gt;

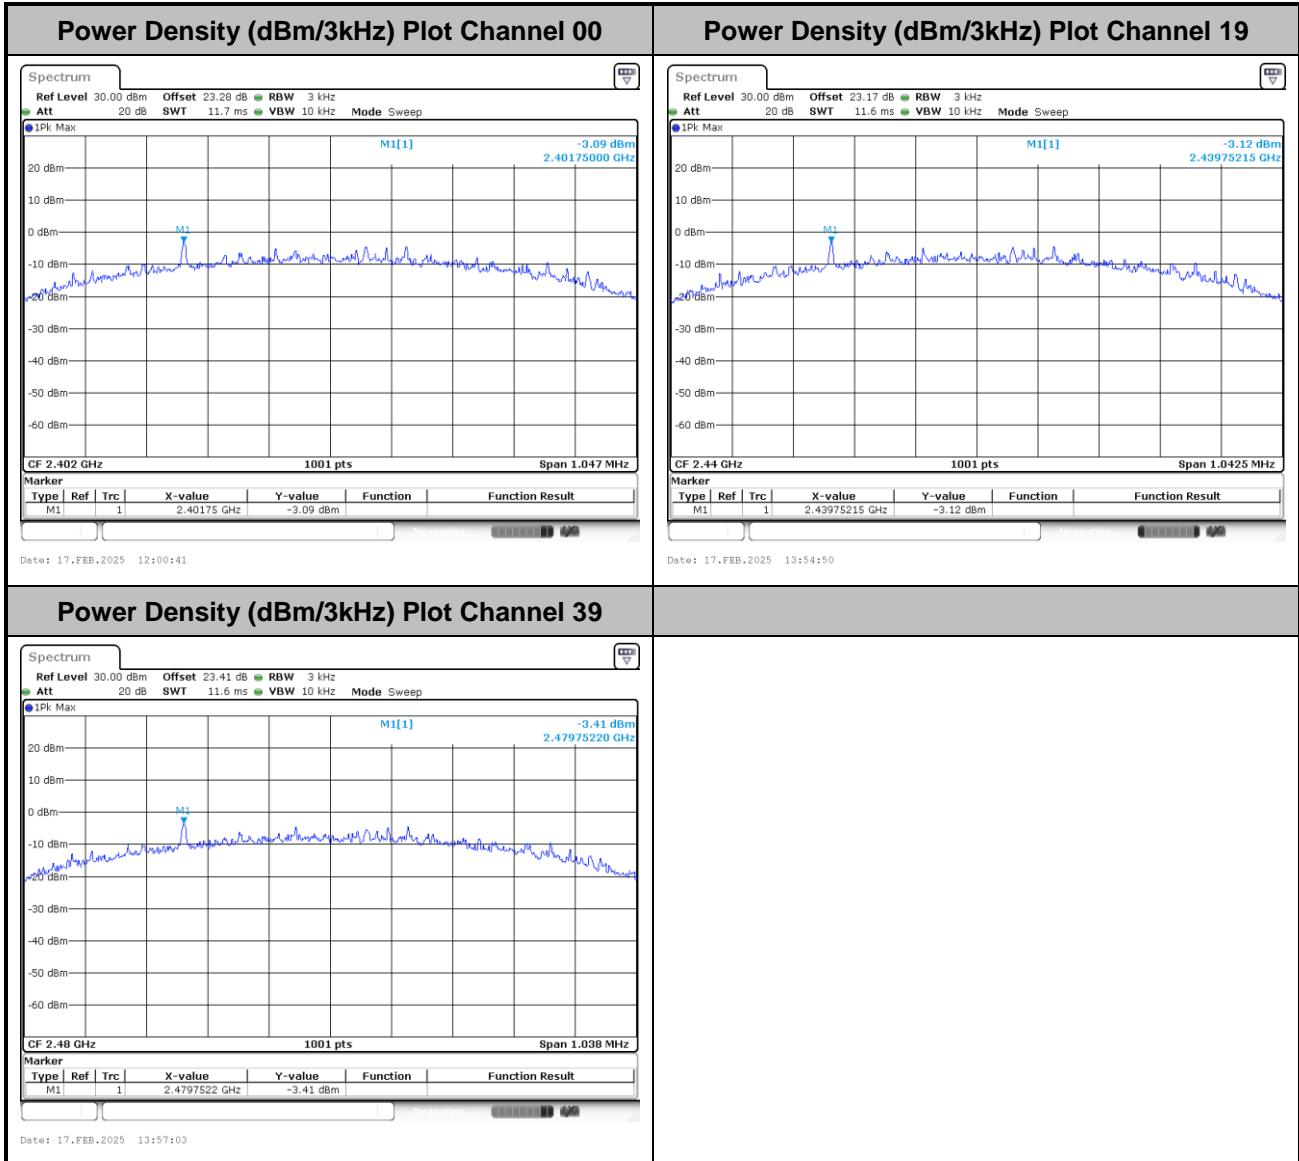




&lt;2Mbps&gt;

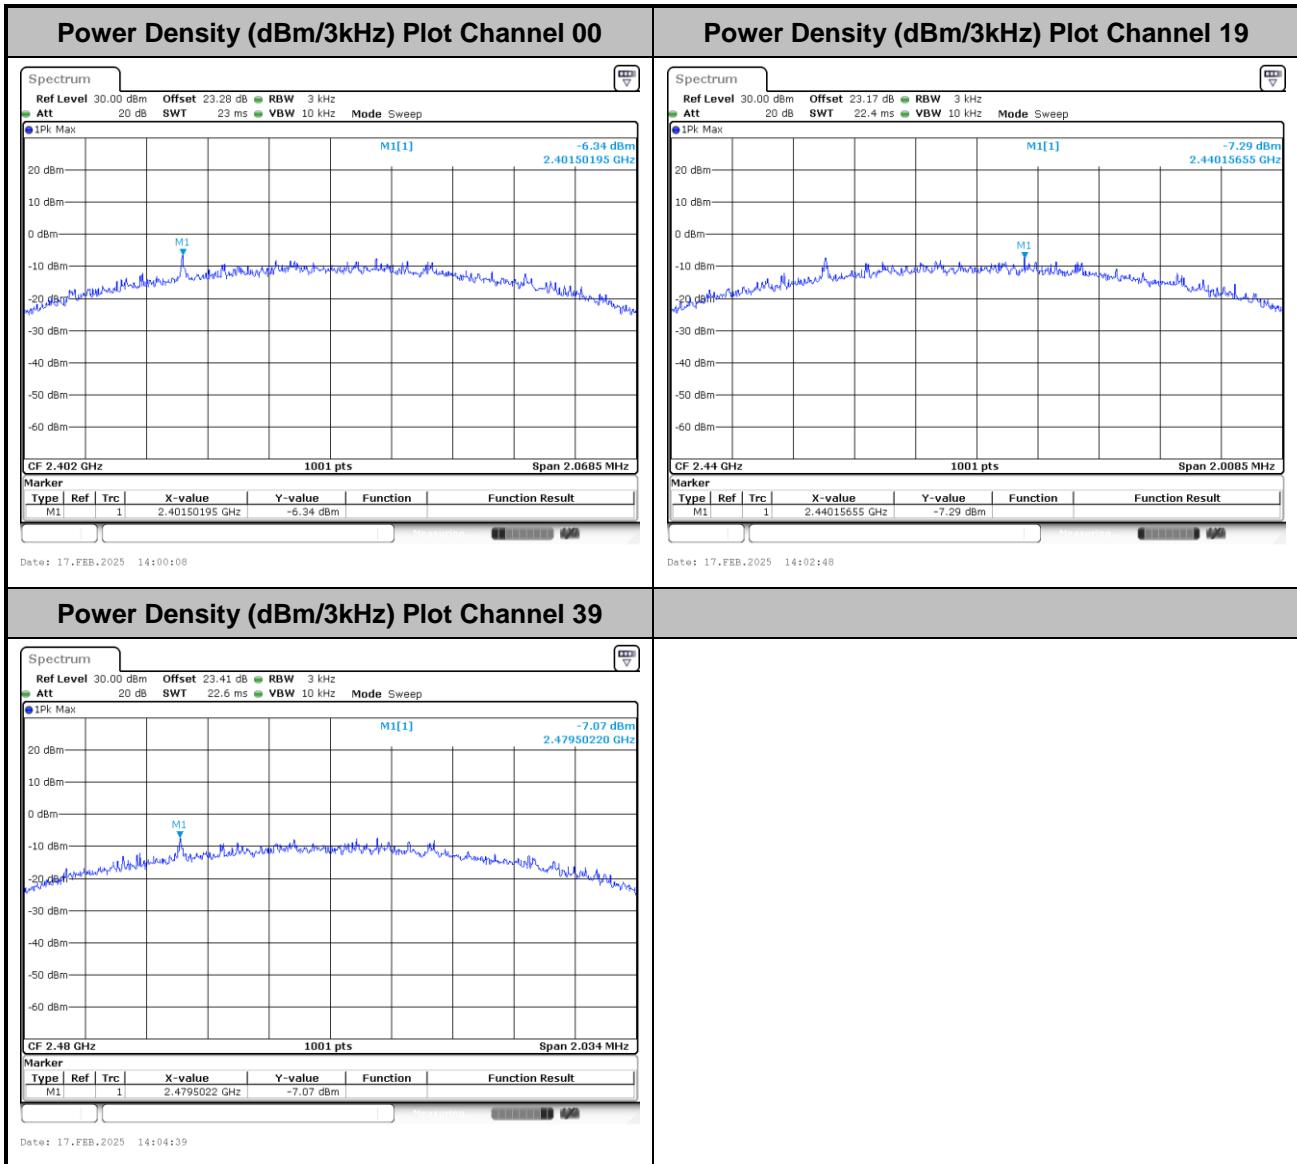




&lt;125Kbps&gt;

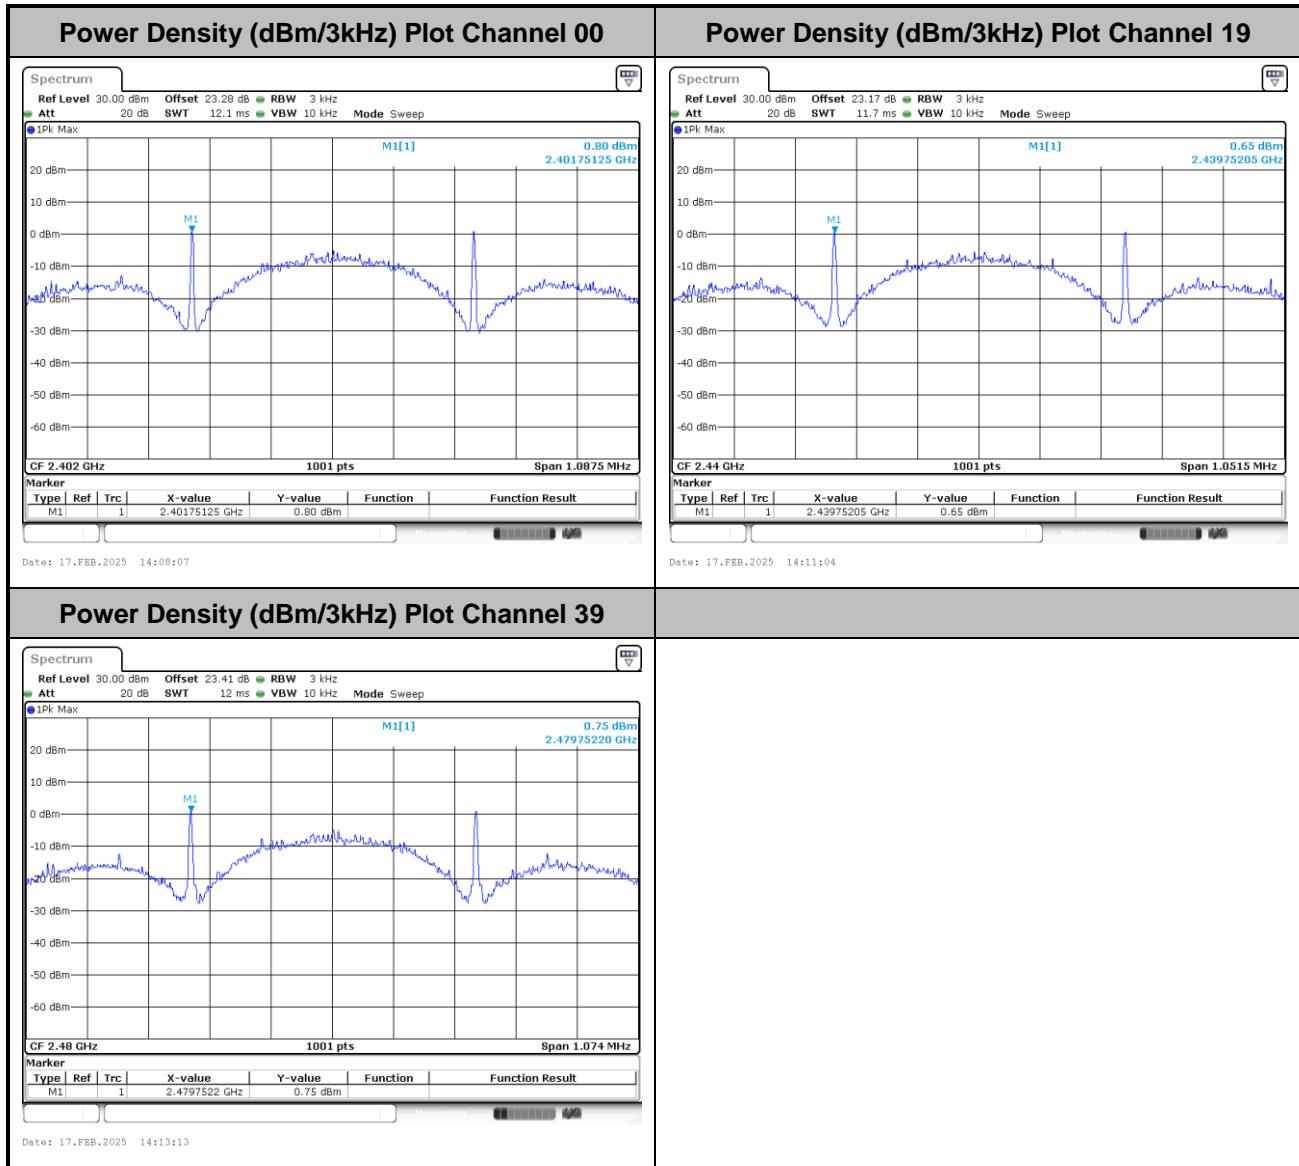





&lt;500Kbps&gt;

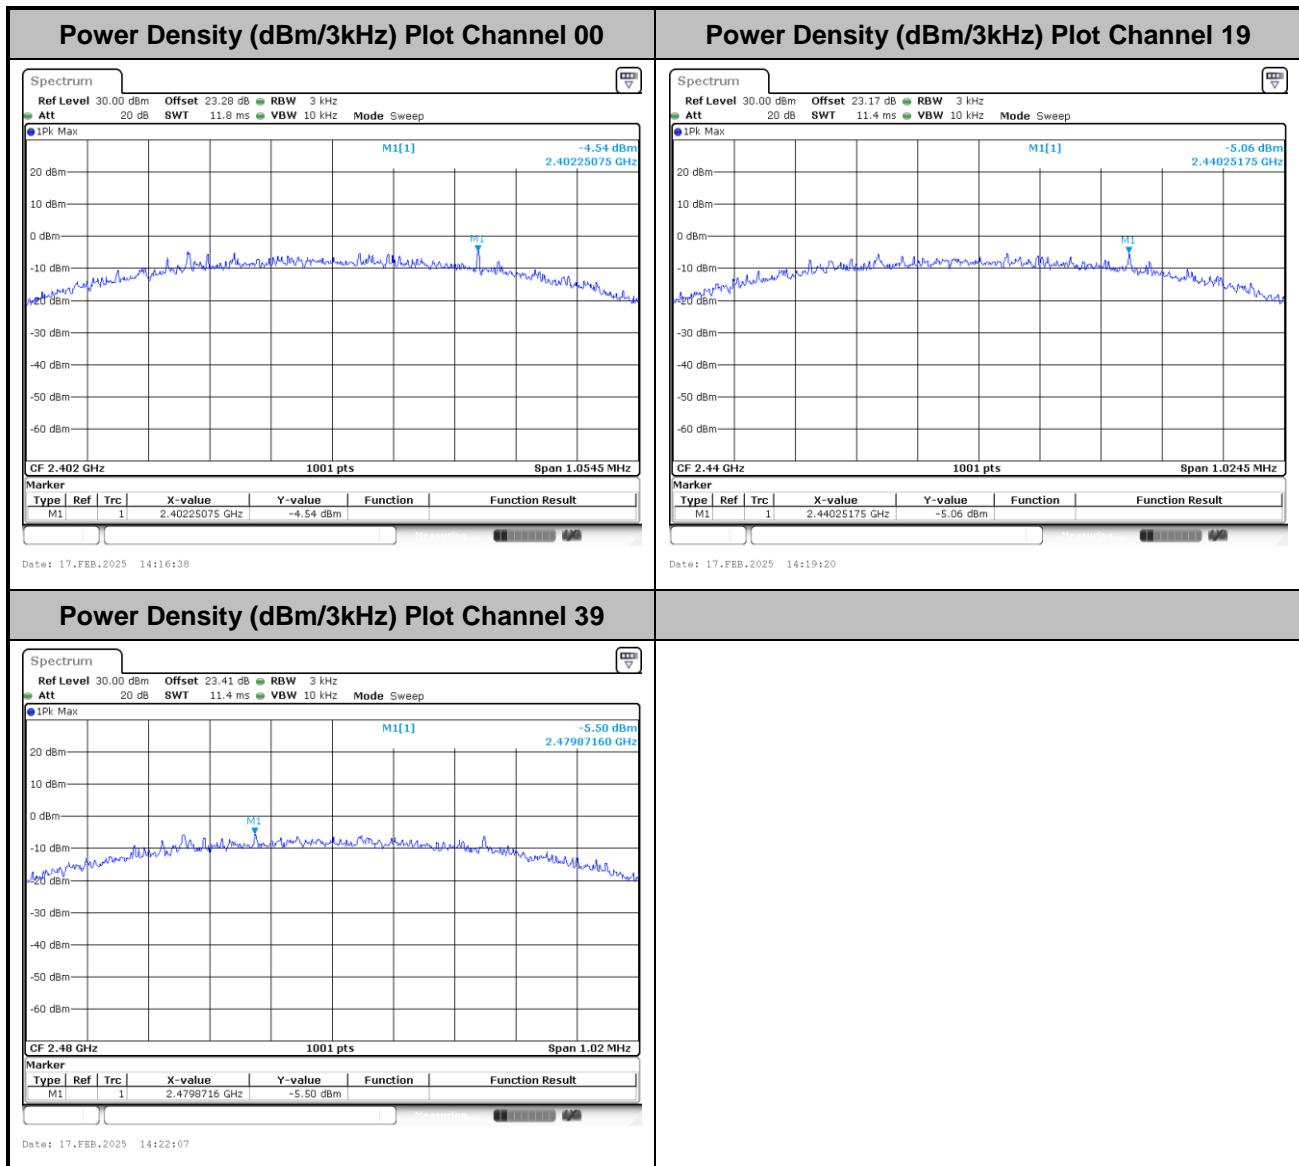


**Band Edge and Conducted Spurious Emission**

&lt;1Mbps&gt;

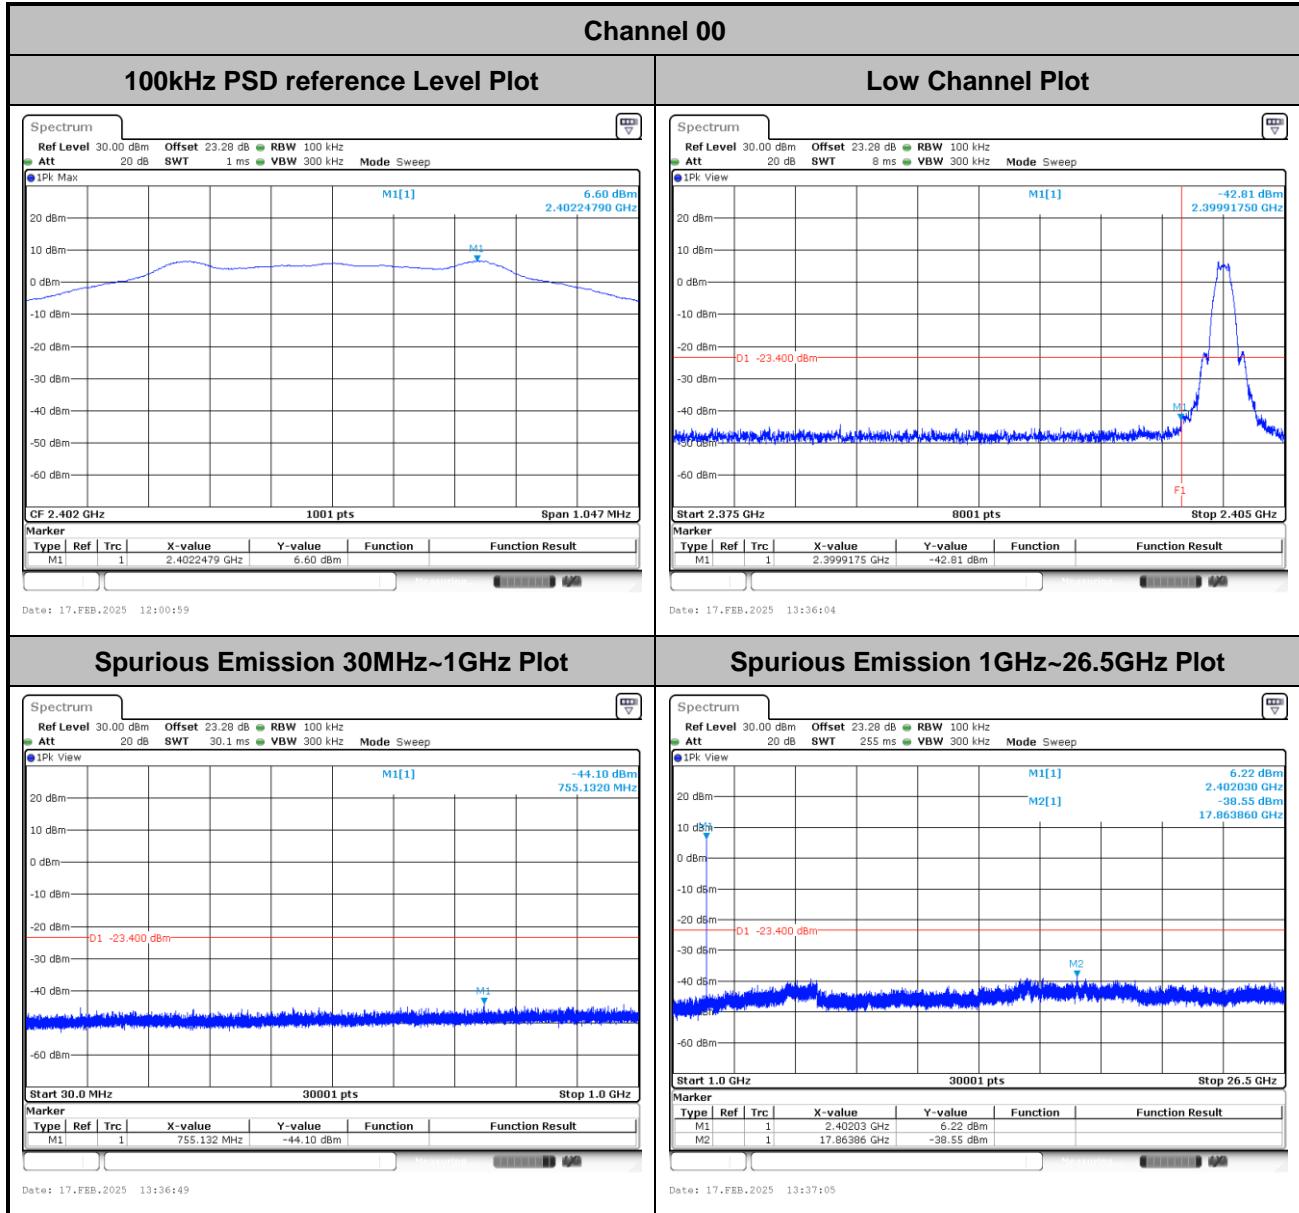


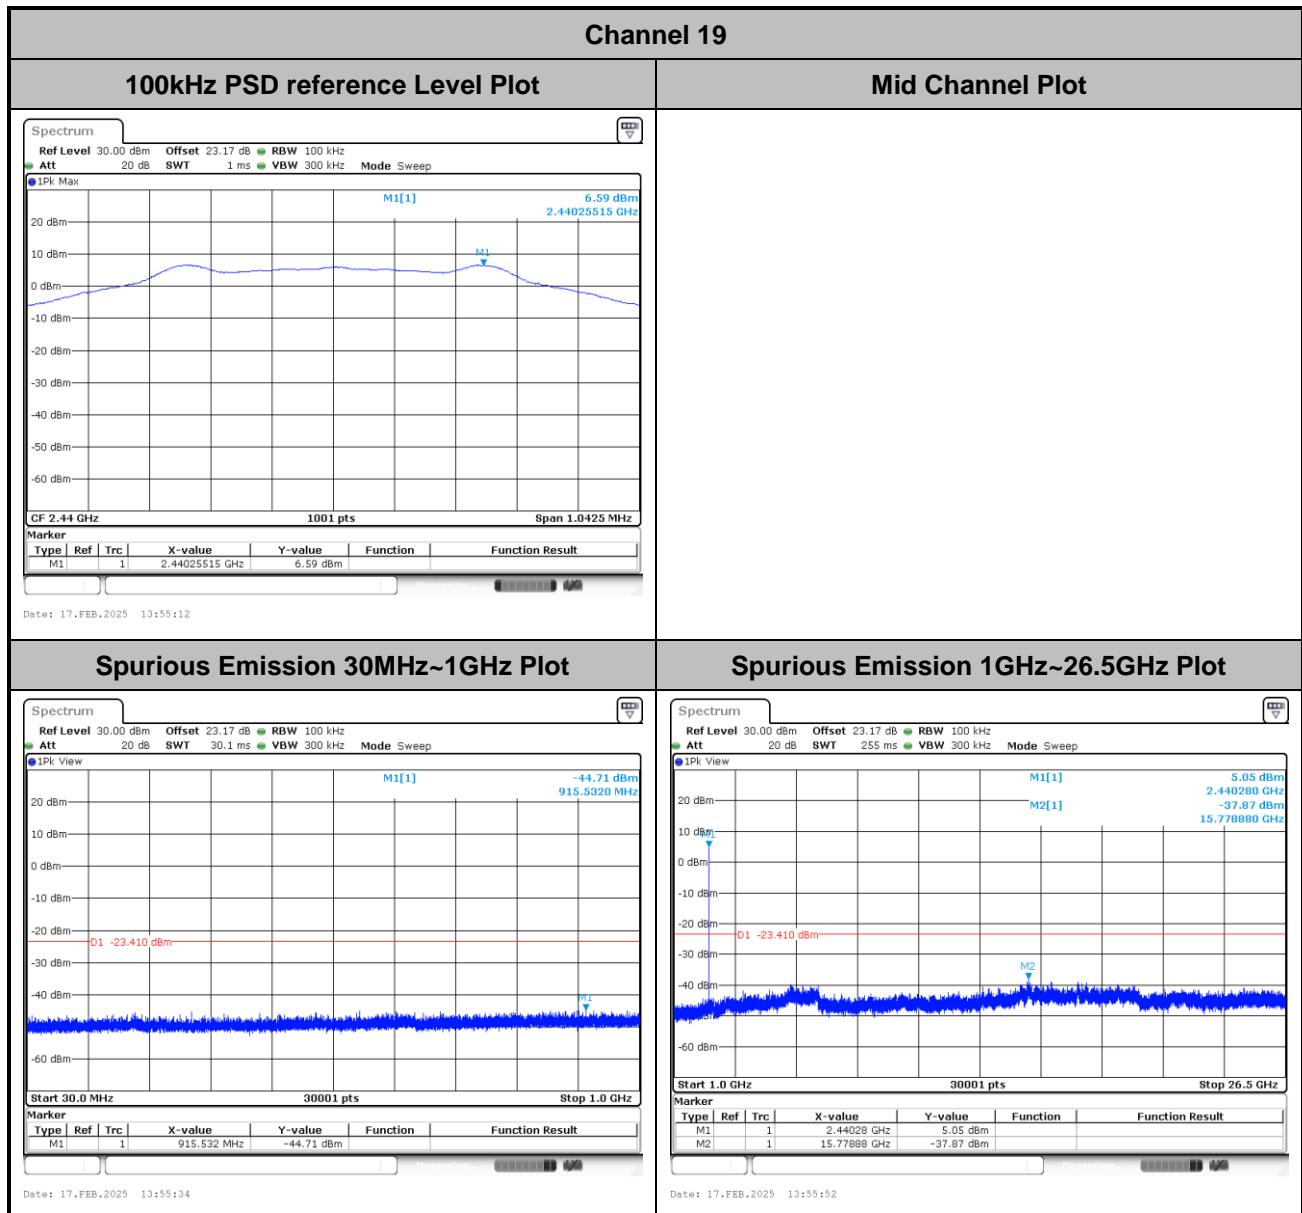


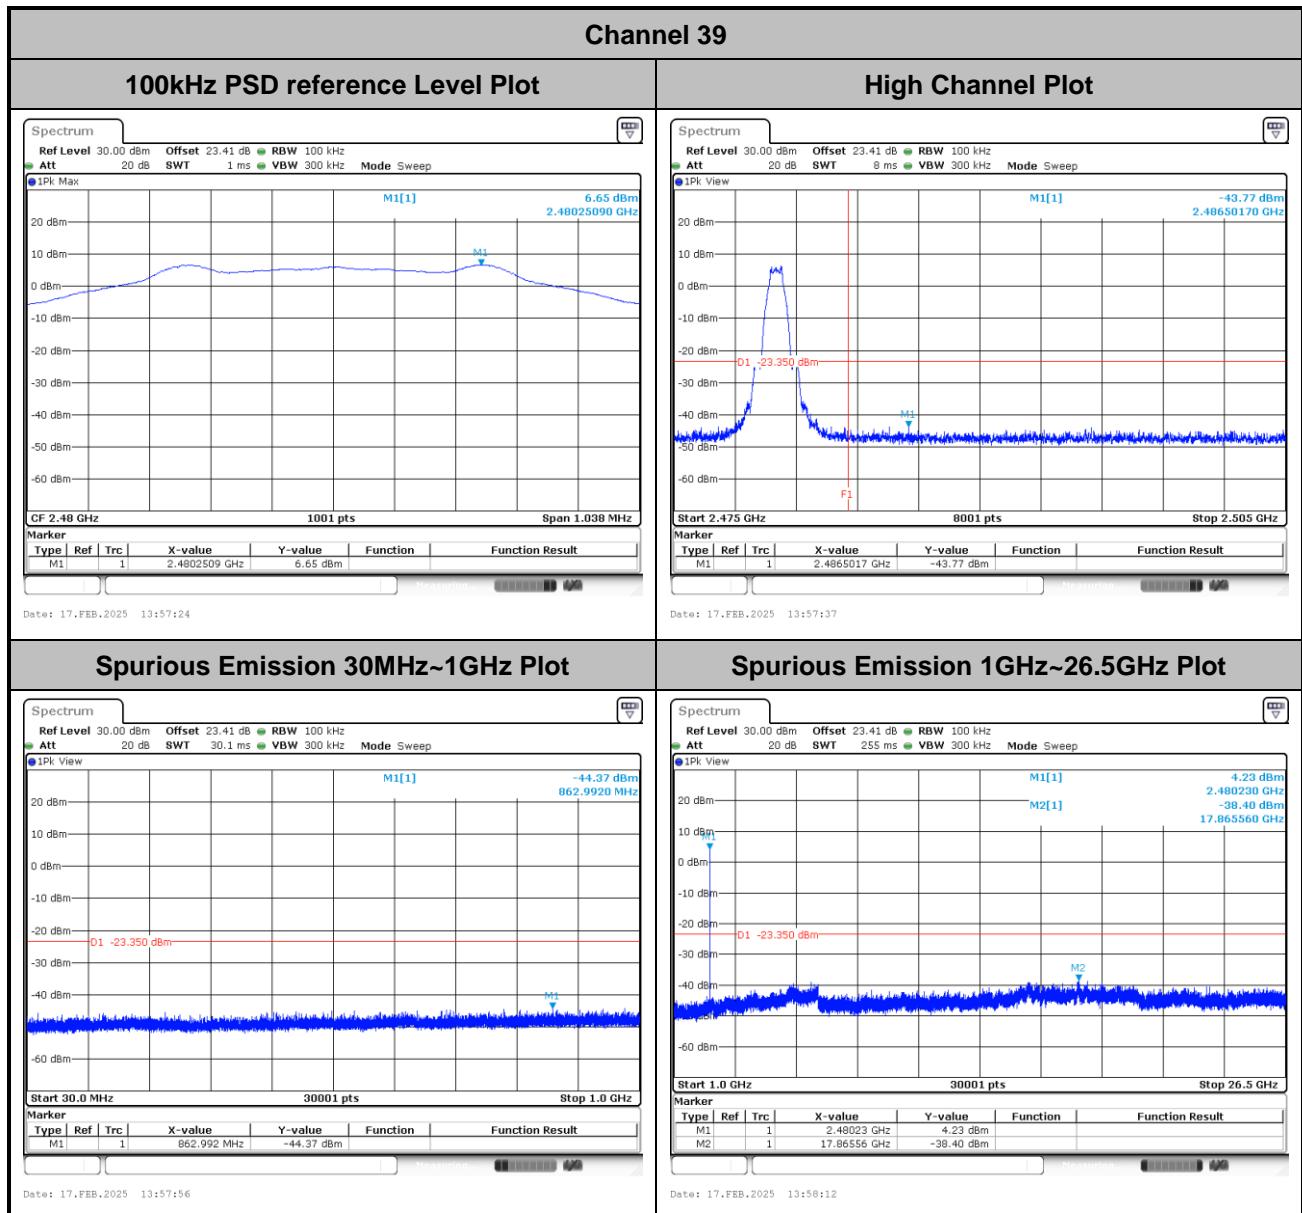




&lt;2Mbps&gt;

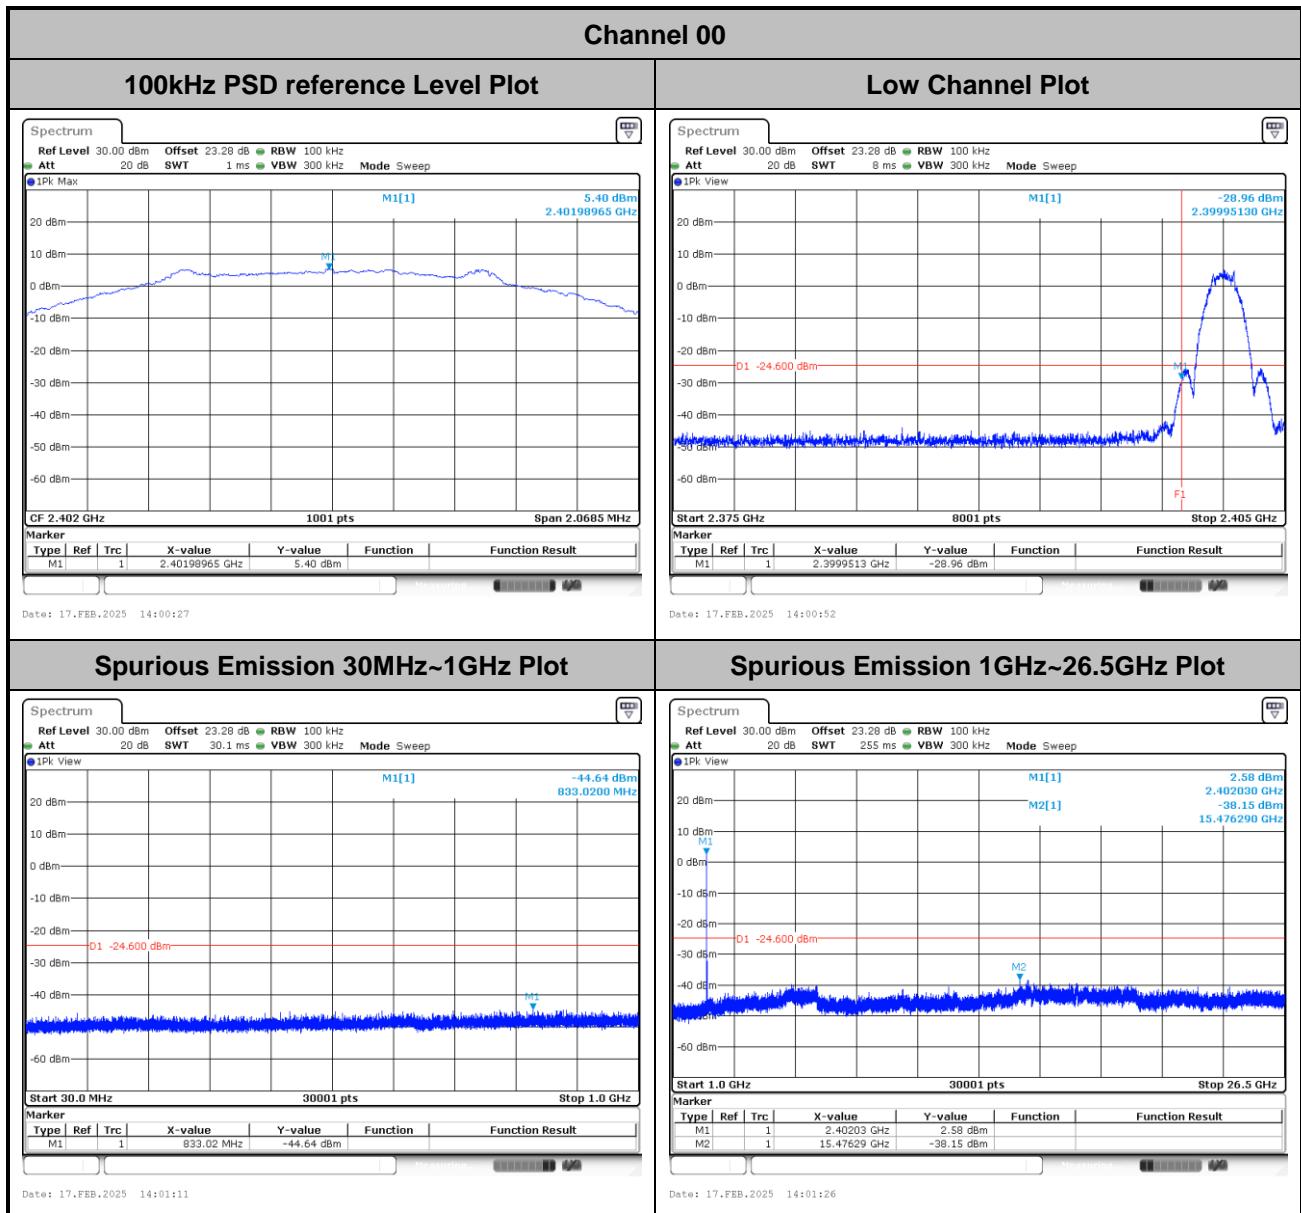


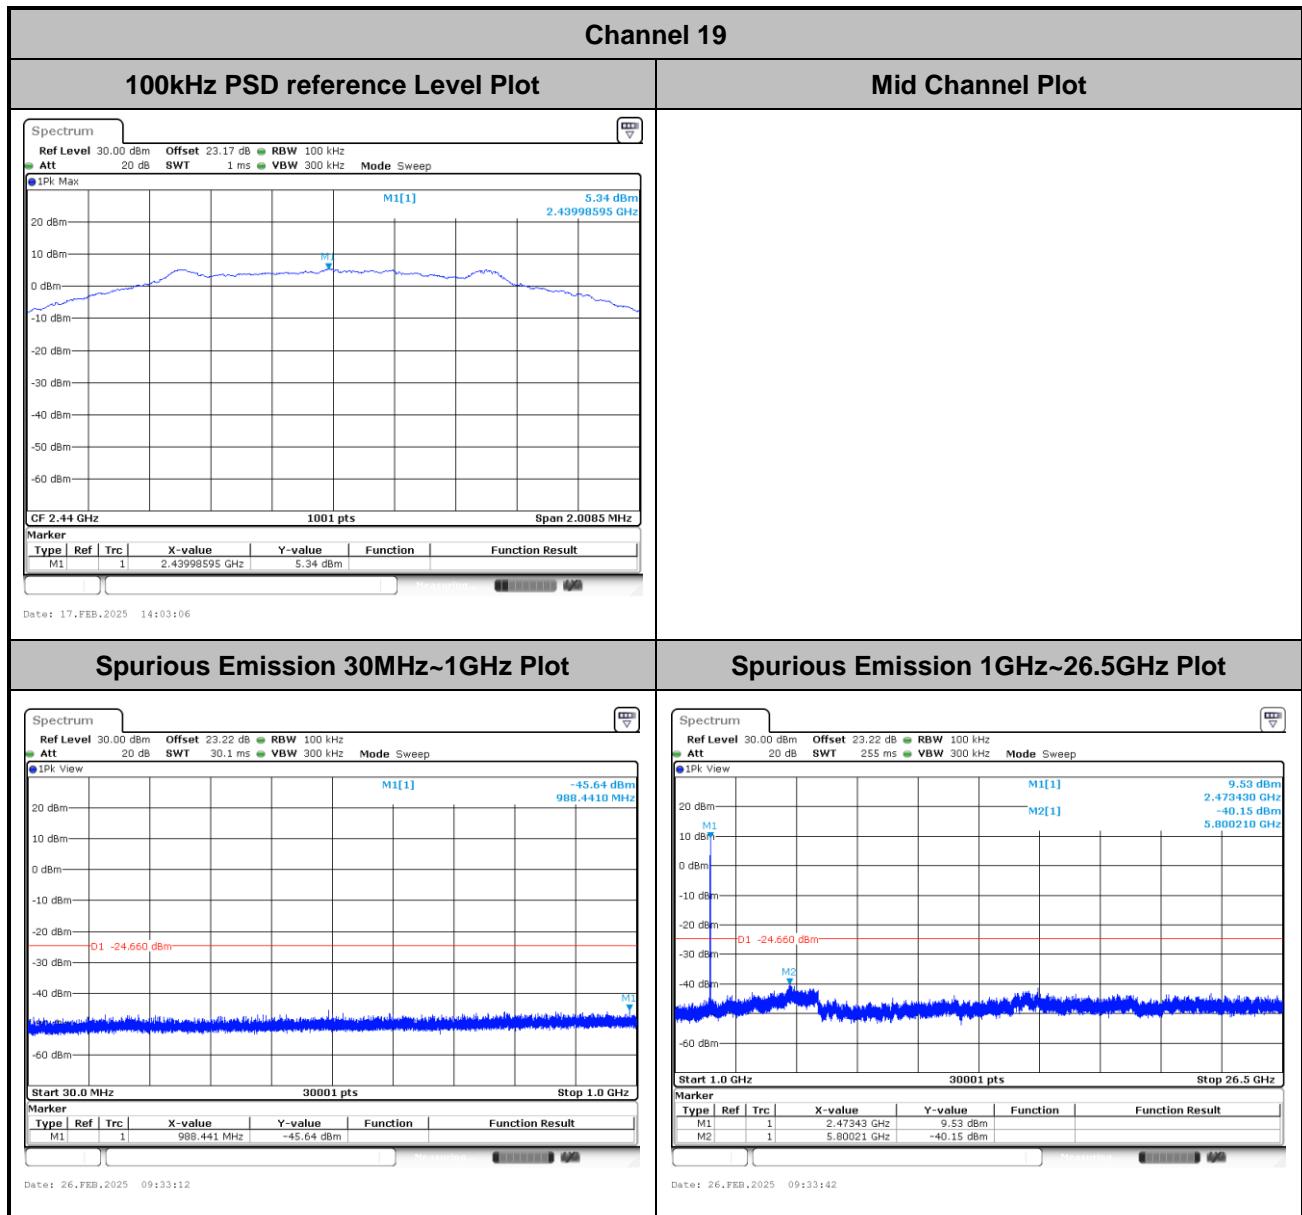


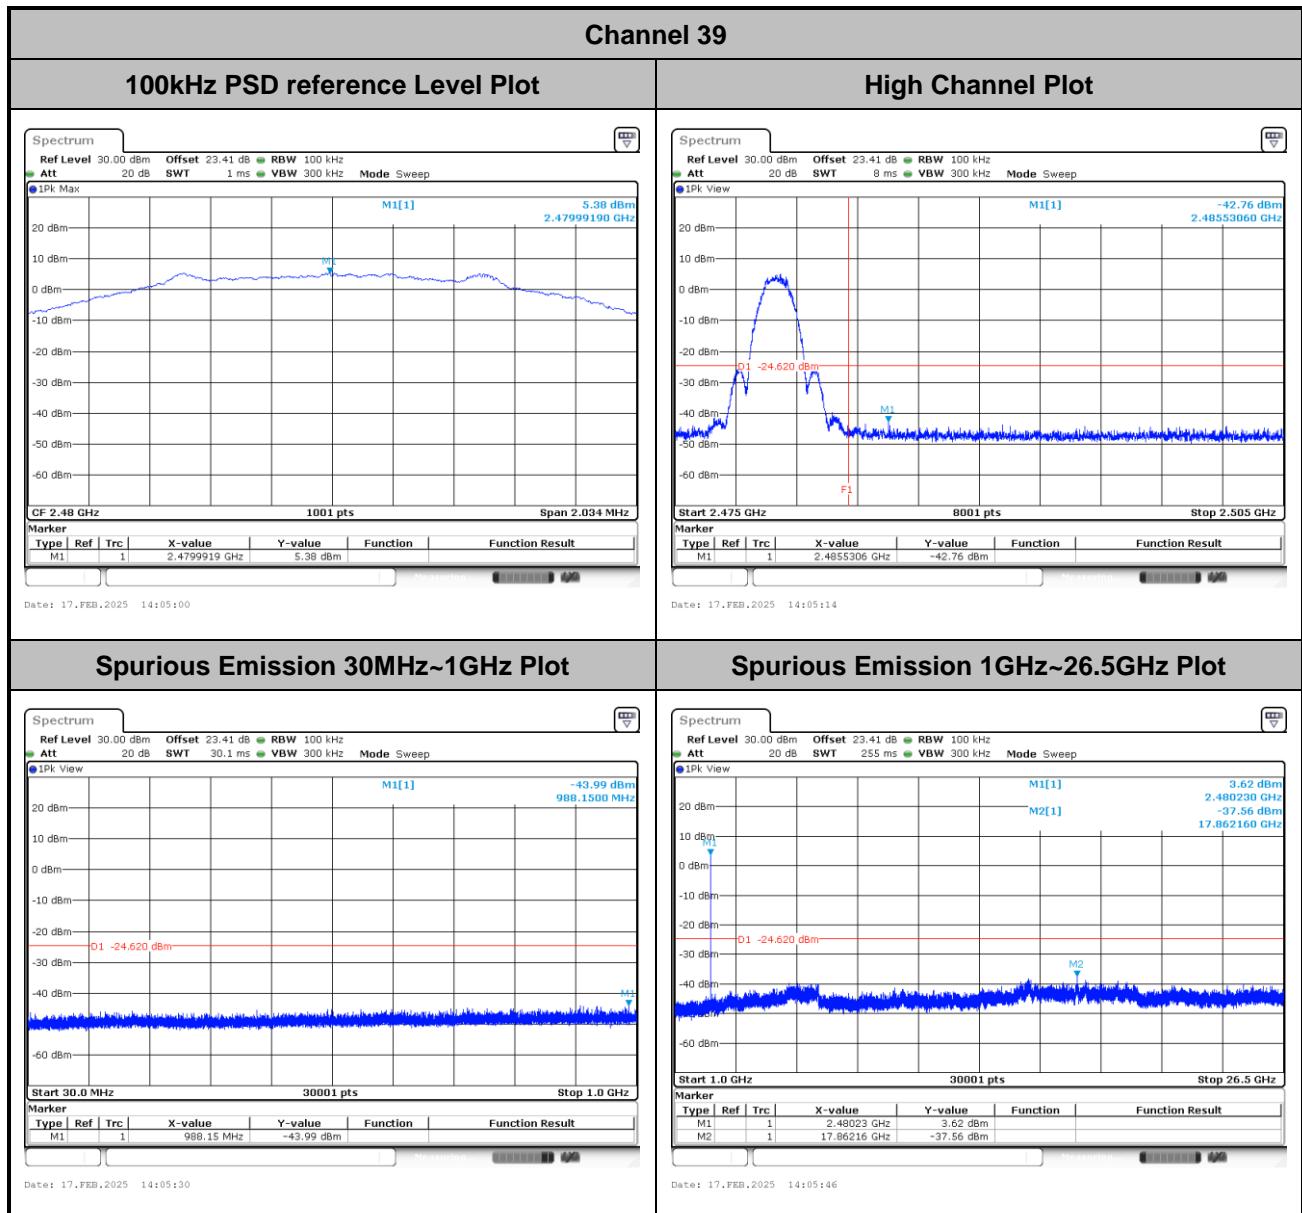




&lt;125Kbps&gt;

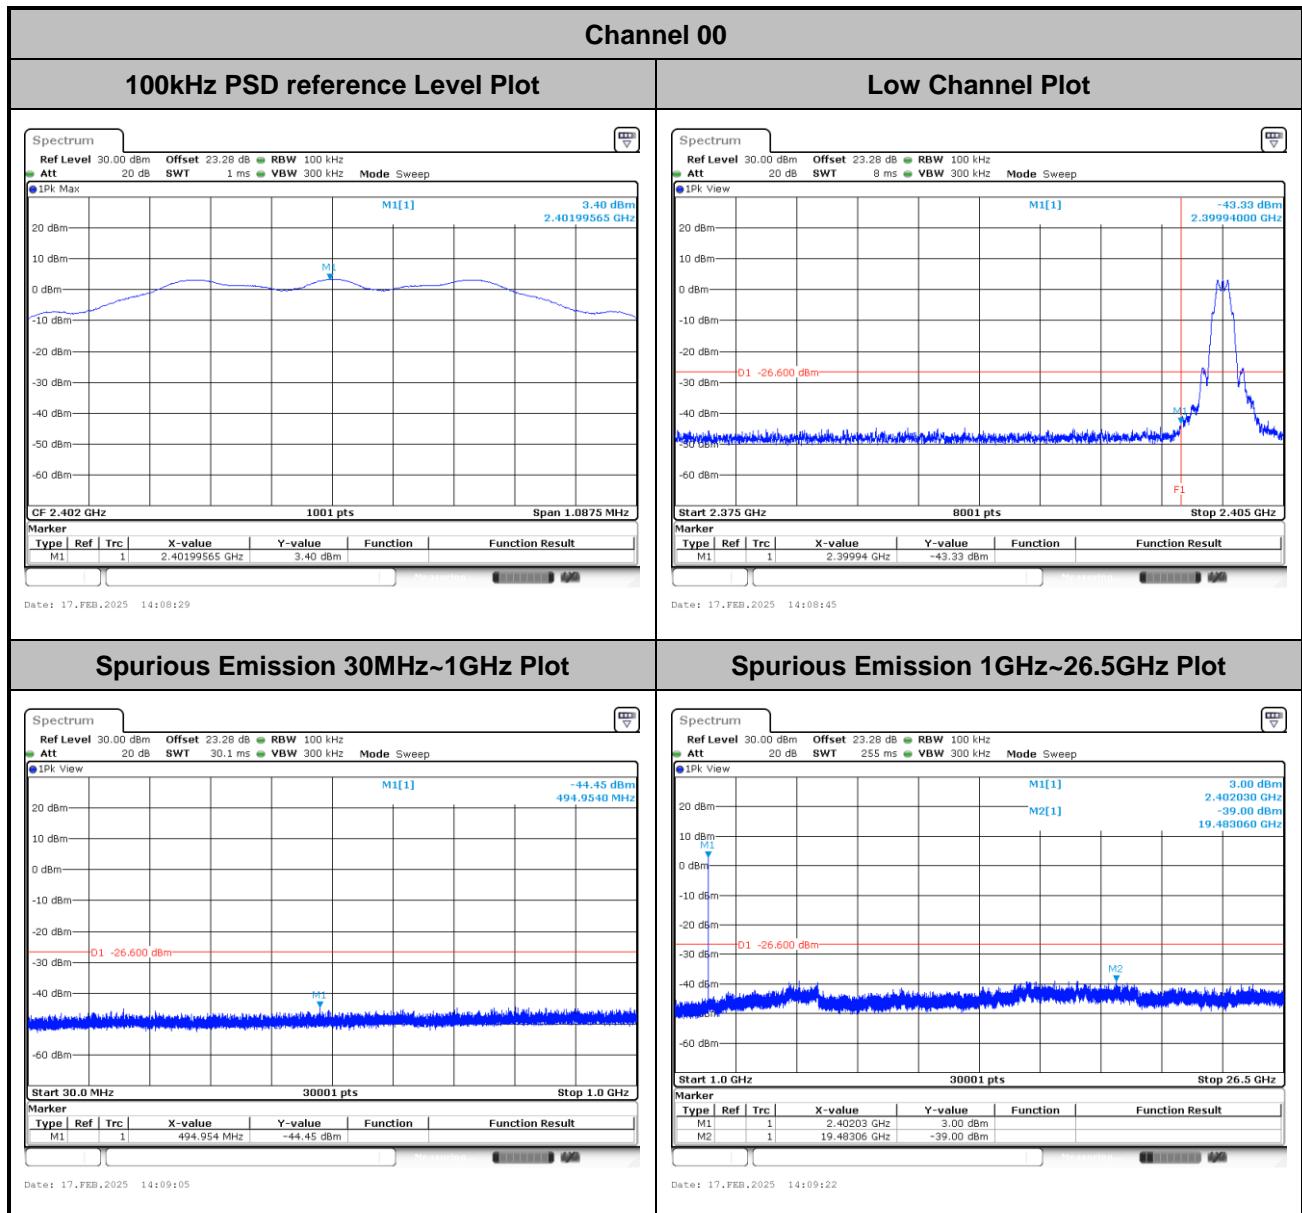


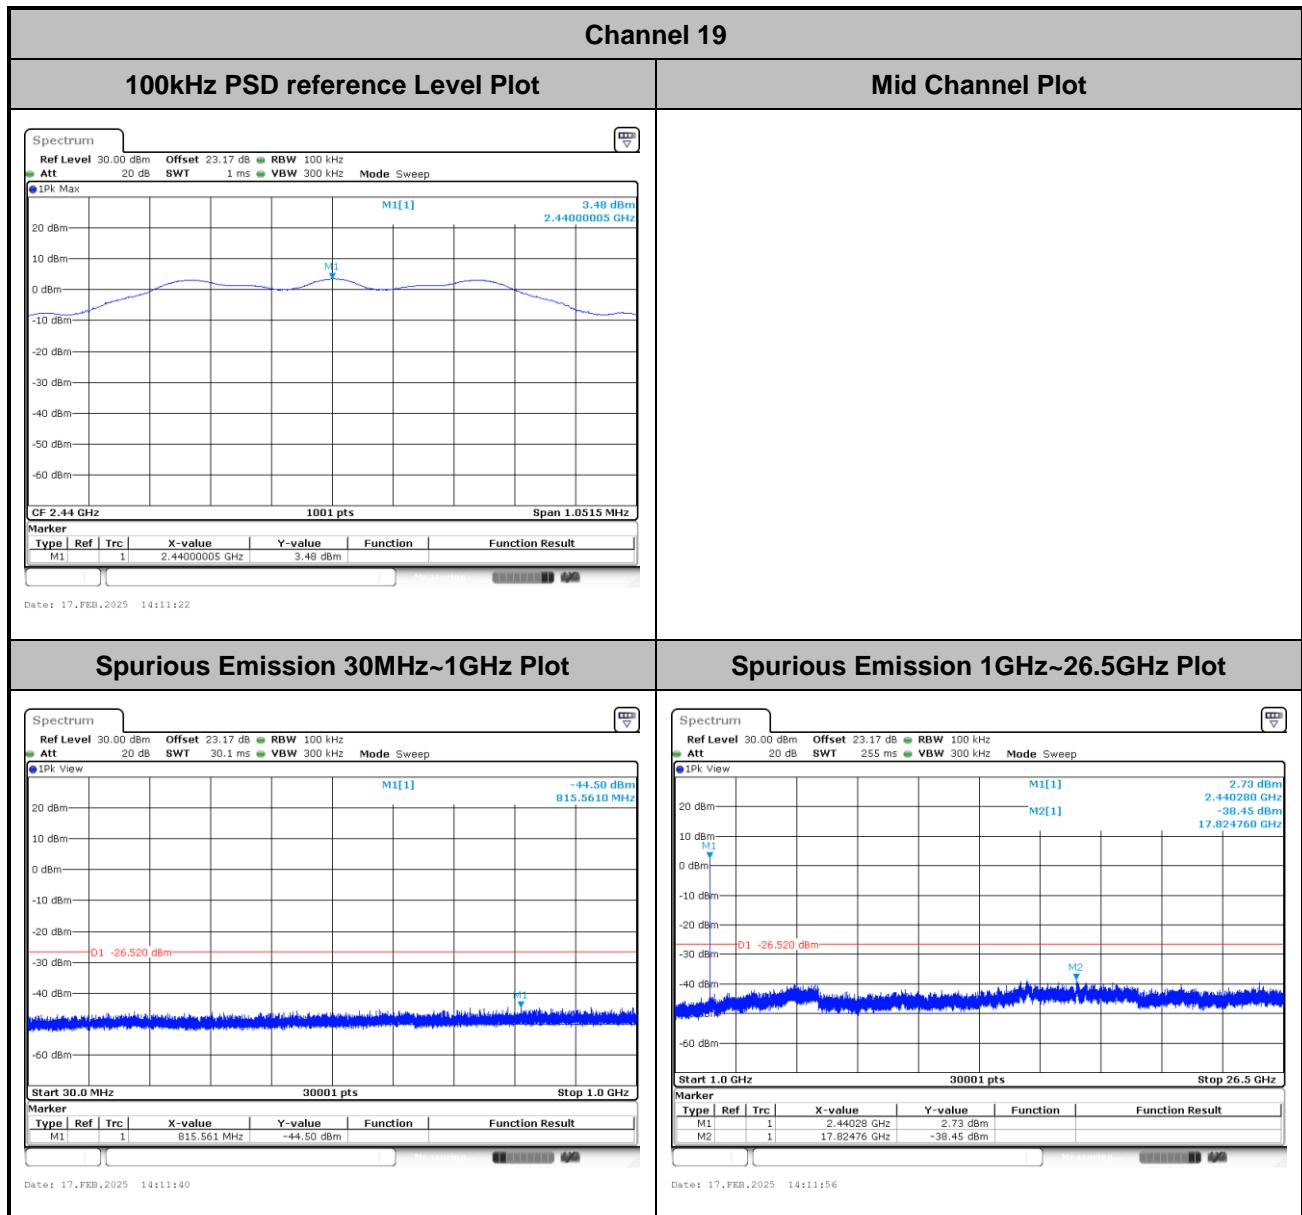


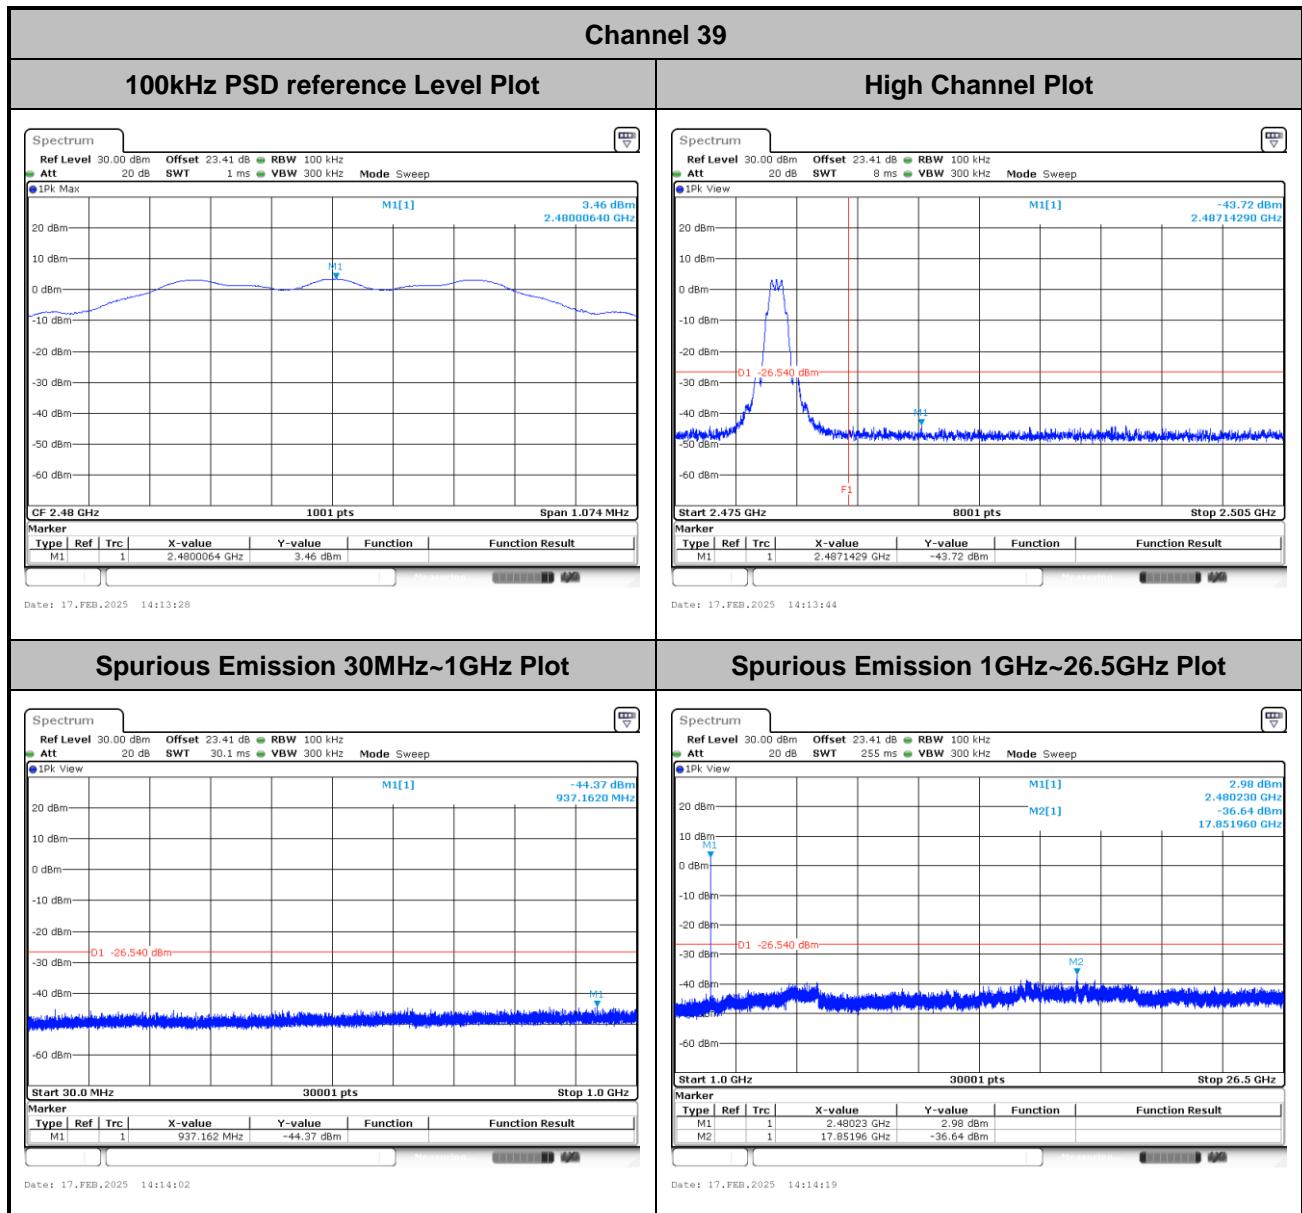




&lt;500Kbps&gt;

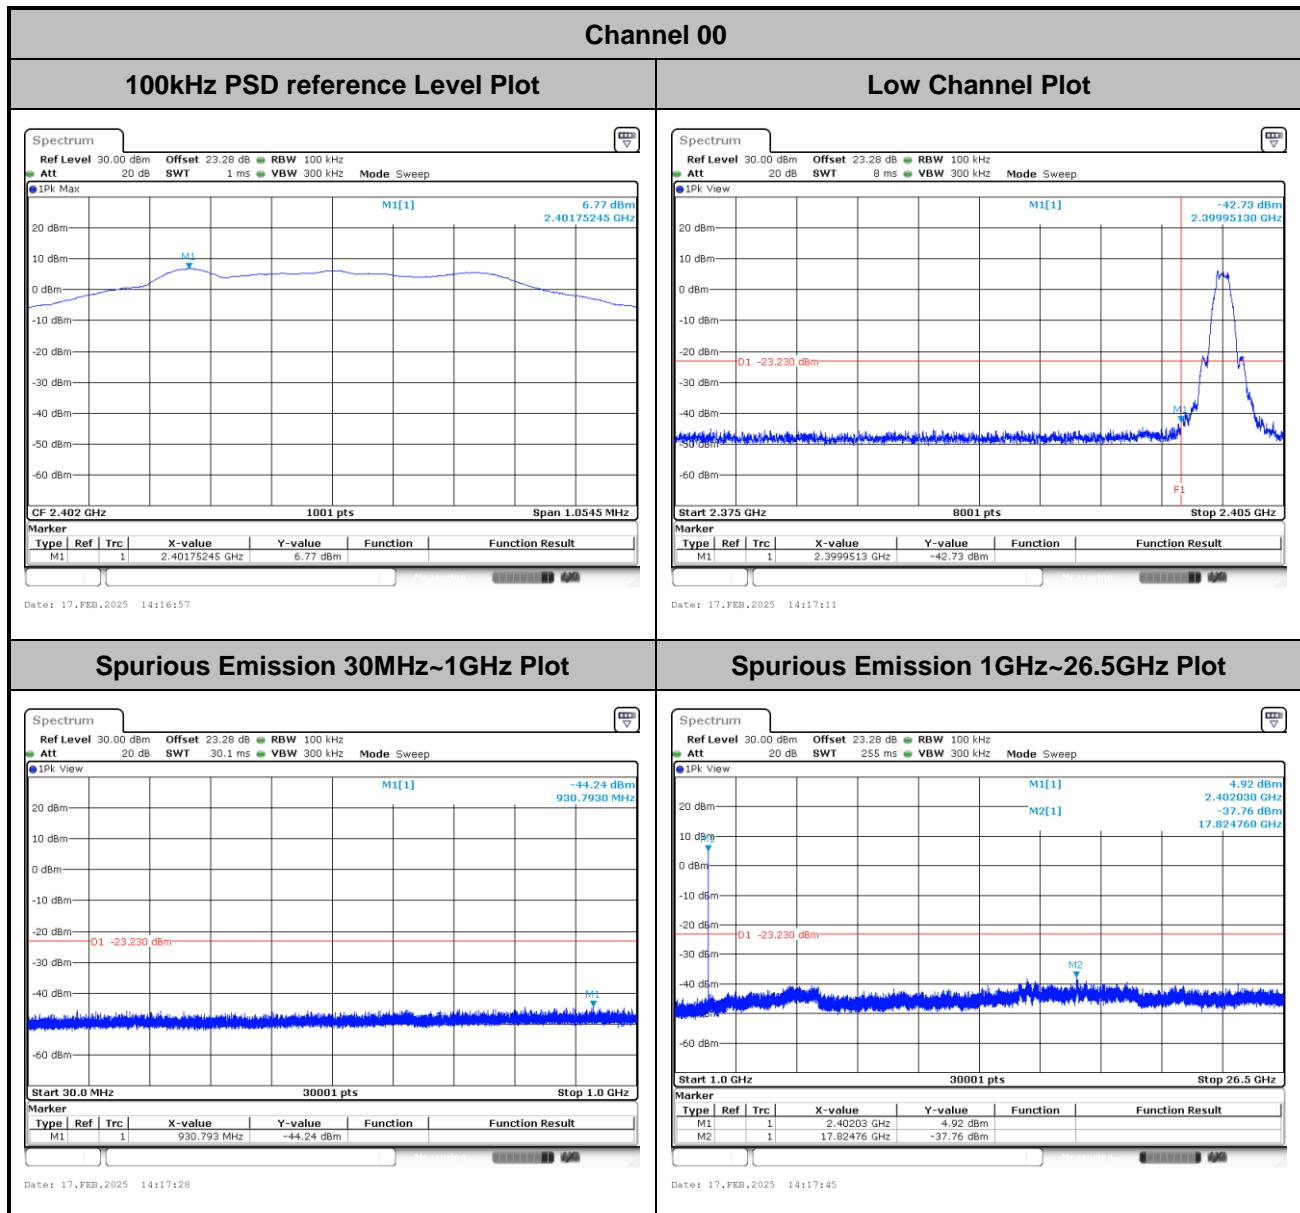

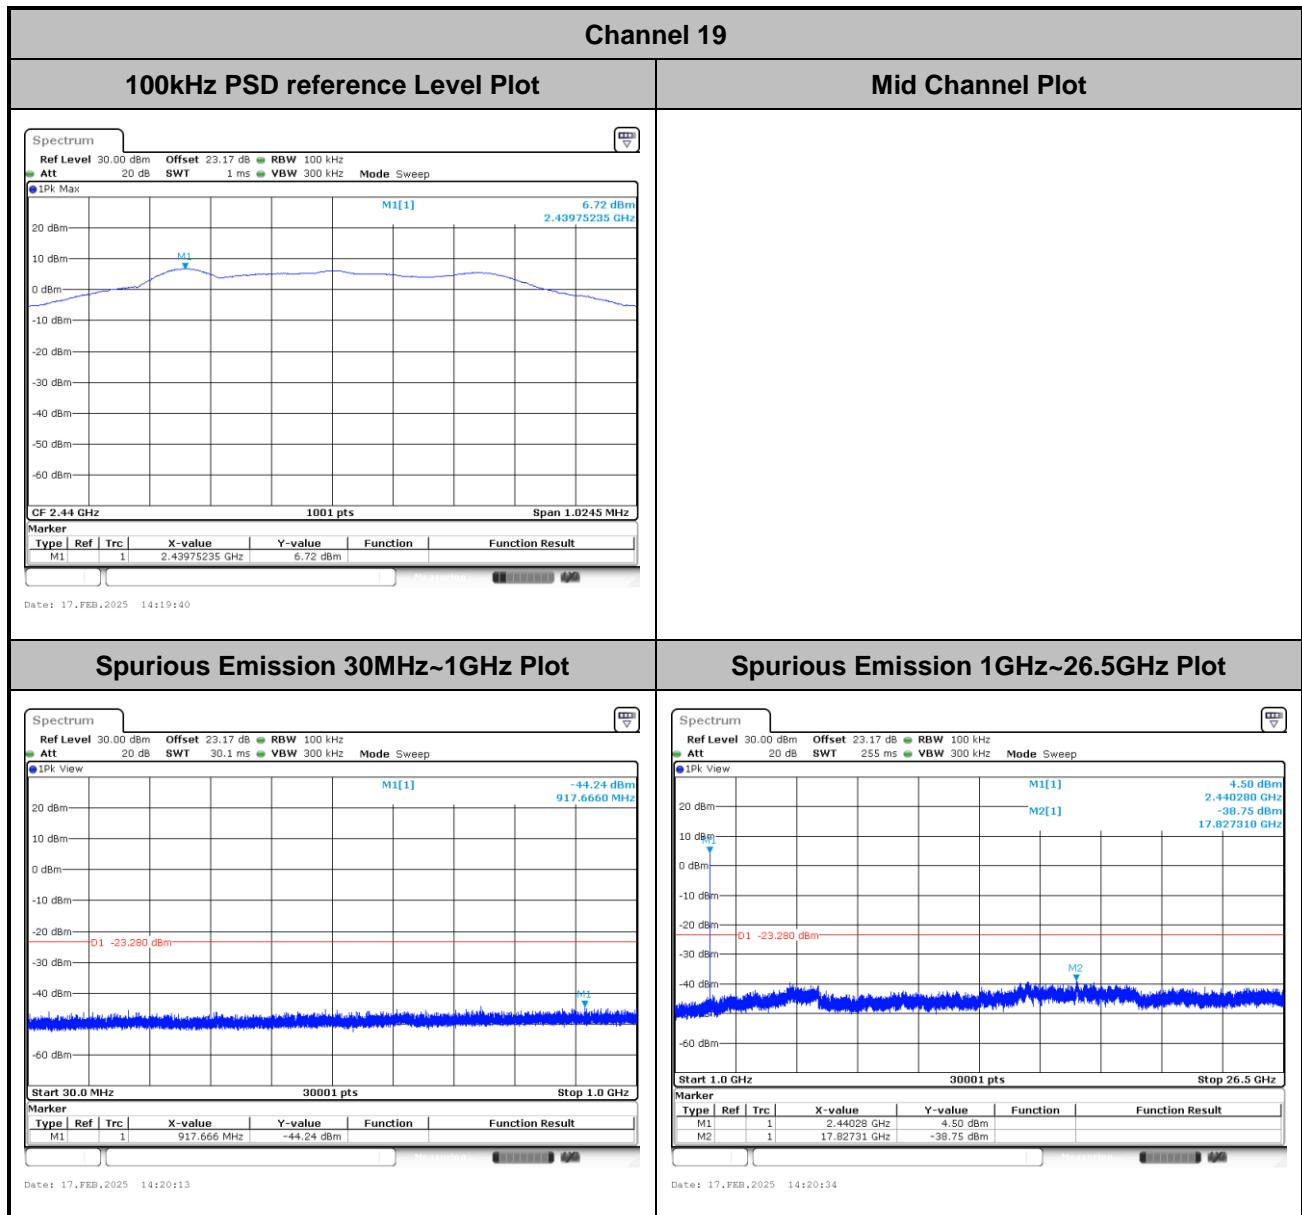

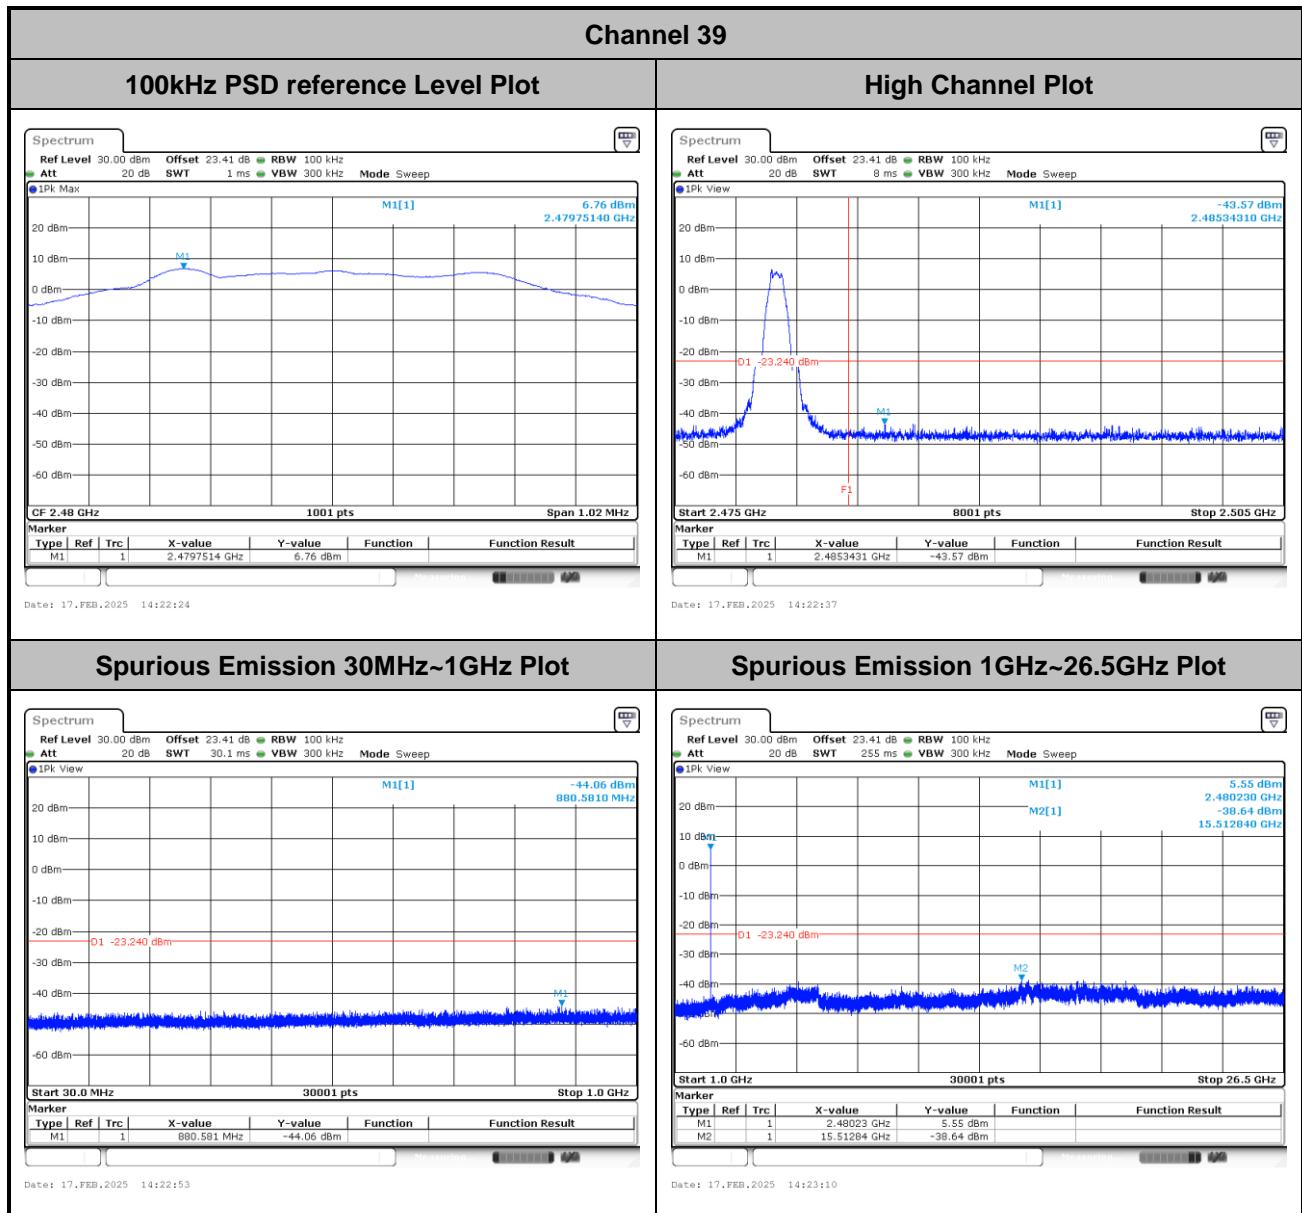




## **Appendix B. AC Conducted Emission Test Results**

<b>Test Engineer :</b>	Louis Chung	<b>Temperature :</b>	18.9~21.3°C
		<b>Relative Humidity :</b>	42.5~49.7%

**EUT Information**

Report NO : 4N1307  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

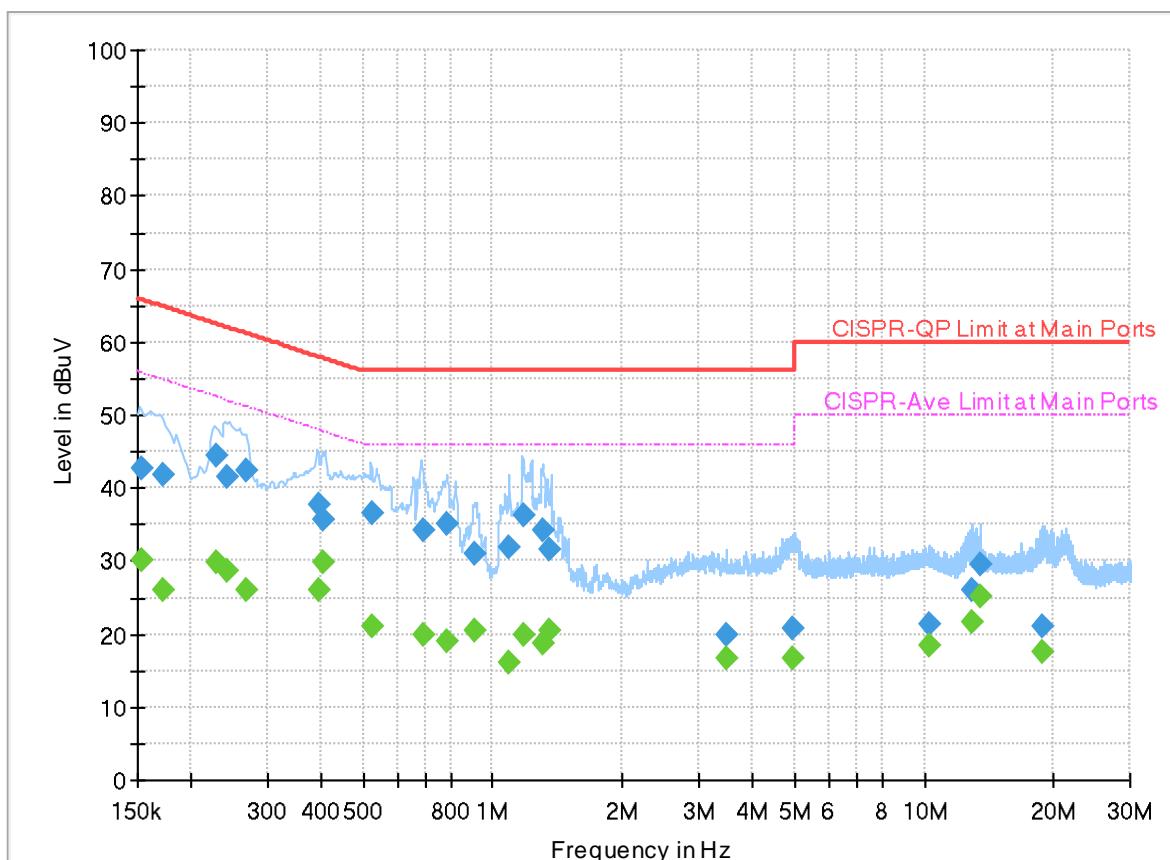**Final Result**


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.153443	---	30.12	55.81	25.69	L1	FLO	19.9
0.153443	42.70	---	65.81	23.11	L1	FLO	19.9
0.171510	---	25.98	54.89	28.91	L1	FLO	19.9
0.171510	41.86	---	64.89	23.03	L1	FLO	19.9
0.227850	---	29.91	52.53	22.62	L1	FLO	19.9
0.227850	44.50	---	62.53	18.03	L1	FLO	19.9
0.243240	---	28.72	51.99	23.27	L1	FLO	19.9
0.243240	41.59	---	61.99	20.40	L1	FLO	19.9
0.267630	---	26.01	51.19	25.18	L1	FLO	19.9
0.267630	42.33	---	61.19	18.86	L1	FLO	19.9
0.395250	---	25.88	47.95	22.07	L1	FLO	19.9
0.395250	37.83	---	57.95	20.12	L1	FLO	19.9
0.404250	---	29.69	47.77	18.08	L1	FLO	19.9
0.404250	35.62	---	57.77	22.15	L1	FLO	19.9
0.522960	---	21.15	46.00	24.85	L1	FLO	19.9
0.522960	36.64	---	56.00	19.36	L1	FLO	19.9
0.687120	---	19.94	46.00	26.06	L1	FLO	19.9
0.687120	34.34	---	56.00	21.66	L1	FLO	19.9
0.783510	---	19.00	46.00	27.00	L1	FLO	19.9

<b>0.783510</b>	<b>34.99</b>	<b>---</b>	<b>56.00</b>	<b>21.01</b>	<b>L1</b>	<b>FLO</b>	<b>19.9</b>
<b>0.908880</b>	<b>---</b>	<b>20.39</b>	<b>46.00</b>	<b>25.61</b>	<b>L1</b>	<b>FLO</b>	<b>19.9</b>
<b>0.908880</b>	<b>31.10</b>	<b>---</b>	<b>56.00</b>	<b>24.90</b>	<b>L1</b>	<b>FLO</b>	<b>19.9</b>
<b>1.095270</b>	<b>---</b>	<b>16.21</b>	<b>46.00</b>	<b>29.79</b>	<b>L1</b>	<b>FLO</b>	<b>19.9</b>
<b>1.095270</b>	<b>31.77</b>	<b>---</b>	<b>56.00</b>	<b>24.23</b>	<b>L1</b>	<b>FLO</b>	<b>19.9</b>
<b>1.176000</b>	<b>---</b>	<b>19.92</b>	<b>46.00</b>	<b>26.08</b>	<b>L1</b>	<b>FLO</b>	<b>19.9</b>
<b>1.176000</b>	<b>36.32</b>	<b>---</b>	<b>56.00</b>	<b>19.68</b>	<b>L1</b>	<b>FLO</b>	<b>19.9</b>
<b>1.306500</b>	<b>---</b>	<b>18.65</b>	<b>46.00</b>	<b>27.35</b>	<b>L1</b>	<b>FLO</b>	<b>19.9</b>
<b>1.306500</b>	<b>34.24</b>	<b>---</b>	<b>56.00</b>	<b>21.76</b>	<b>L1</b>	<b>FLO</b>	<b>19.9</b>
<b>1.358250</b>	<b>---</b>	<b>20.57</b>	<b>46.00</b>	<b>25.43</b>	<b>L1</b>	<b>FLO</b>	<b>20.0</b>
<b>1.358250</b>	<b>31.49</b>	<b>---</b>	<b>56.00</b>	<b>24.51</b>	<b>L1</b>	<b>FLO</b>	<b>20.0</b>
<b>3.488100</b>	<b>---</b>	<b>16.78</b>	<b>46.00</b>	<b>29.22</b>	<b>L1</b>	<b>FLO</b>	<b>20.0</b>
<b>3.488100</b>	<b>20.02</b>	<b>---</b>	<b>56.00</b>	<b>35.98</b>	<b>L1</b>	<b>FLO</b>	<b>20.0</b>
<b>4.967250</b>	<b>---</b>	<b>16.65</b>	<b>46.00</b>	<b>29.35</b>	<b>L1</b>	<b>FLO</b>	<b>20.0</b>
<b>4.967250</b>	<b>20.78</b>	<b>---</b>	<b>56.00</b>	<b>35.22</b>	<b>L1</b>	<b>FLO</b>	<b>20.0</b>
<b>10.322250</b>	<b>---</b>	<b>18.44</b>	<b>50.00</b>	<b>31.56</b>	<b>L1</b>	<b>FLO</b>	<b>20.1</b>
<b>10.322250</b>	<b>21.32</b>	<b>---</b>	<b>60.00</b>	<b>38.68</b>	<b>L1</b>	<b>FLO</b>	<b>20.1</b>
<b>12.944850</b>	<b>---</b>	<b>21.68</b>	<b>50.00</b>	<b>28.32</b>	<b>L1</b>	<b>FLO</b>	<b>20.1</b>
<b>12.944850</b>	<b>26.08</b>	<b>---</b>	<b>60.00</b>	<b>33.92</b>	<b>L1</b>	<b>FLO</b>	<b>20.1</b>
<b>13.560450</b>	<b>---</b>	<b>25.22</b>	<b>50.00</b>	<b>24.78</b>	<b>L1</b>	<b>FLO</b>	<b>20.1</b>
<b>13.560450</b>	<b>29.41</b>	<b>---</b>	<b>60.00</b>	<b>30.59</b>	<b>L1</b>	<b>FLO</b>	<b>20.1</b>
<b>18.888900</b>	<b>---</b>	<b>17.64</b>	<b>50.00</b>	<b>32.36</b>	<b>L1</b>	<b>FLO</b>	<b>20.1</b>
<b>18.888900</b>	<b>21.16</b>	<b>---</b>	<b>60.00</b>	<b>38.84</b>	<b>L1</b>	<b>FLO</b>	<b>20.1</b>

**EUT Information**

Report NO : 4N1307  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

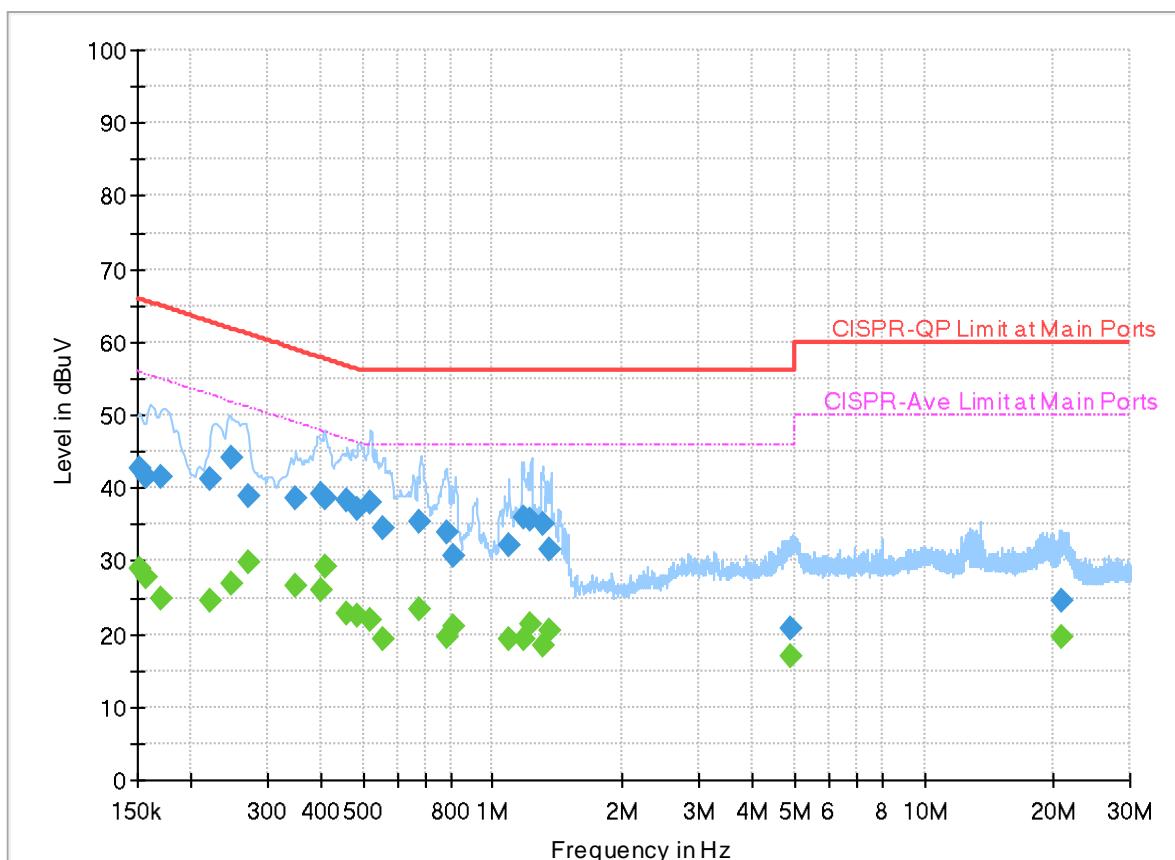**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.151080	---	29.07	55.94	26.87	N	FLO	20.0
0.151080	42.67	---	65.94	23.27	N	FLO	20.0
0.156750	---	27.84	55.63	27.79	N	FLO	19.9
0.156750	41.40	---	65.63	24.23	N	FLO	19.9
0.170340	---	24.75	54.94	30.19	N	FLO	19.9
0.170340	41.38	---	64.94	23.56	N	FLO	19.9
0.222000	---	24.42	52.74	28.32	N	FLO	19.9
0.222000	41.19	---	62.74	21.55	N	FLO	19.9
0.246300	---	26.92	51.88	24.96	N	FLO	19.9
0.246300	44.06	---	61.88	17.82	N	FLO	19.9
0.270870	---	29.79	51.09	21.30	N	FLO	19.9
0.270870	38.86	---	61.09	22.23	N	FLO	19.9
0.348810	---	26.56	48.99	22.43	N	FLO	19.9
0.348810	38.49	---	58.99	20.50	N	FLO	19.9
0.397500	---	25.89	47.91	22.02	N	FLO	19.9
0.397500	39.05	---	57.91	18.86	N	FLO	19.9
0.409200	---	29.22	47.67	18.45	N	FLO	19.9
0.409200	38.61	---	57.67	19.06	N	FLO	19.9
0.456000	---	22.92	46.77	23.85	N	FLO	19.9

<b>0.456000</b>	<b>38.25</b>	<b>---</b>	<b>56.77</b>	<b>18.52</b>	<b>N</b>	<b>FLO</b>	<b>19.9</b>
<b>0.485250</b>	<b>---</b>	<b>22.39</b>	<b>46.25</b>	<b>23.86</b>	<b>N</b>	<b>FLO</b>	<b>19.9</b>
<b>0.485250</b>	<b>37.09</b>	<b>---</b>	<b>56.25</b>	<b>19.16</b>	<b>N</b>	<b>FLO</b>	<b>19.9</b>
<b>0.516750</b>	<b>---</b>	<b>21.98</b>	<b>46.00</b>	<b>24.02</b>	<b>N</b>	<b>FLO</b>	<b>19.9</b>
<b>0.516750</b>	<b>37.92</b>	<b>---</b>	<b>56.00</b>	<b>18.08</b>	<b>N</b>	<b>FLO</b>	<b>19.9</b>
<b>0.556890</b>	<b>---</b>	<b>19.34</b>	<b>46.00</b>	<b>26.66</b>	<b>N</b>	<b>FLO</b>	<b>19.9</b>
<b>0.556890</b>	<b>34.63</b>	<b>---</b>	<b>56.00</b>	<b>21.37</b>	<b>N</b>	<b>FLO</b>	<b>19.9</b>
<b>0.676500</b>	<b>---</b>	<b>23.50</b>	<b>46.00</b>	<b>22.50</b>	<b>N</b>	<b>FLO</b>	<b>19.9</b>
<b>0.676500</b>	<b>35.27</b>	<b>---</b>	<b>56.00</b>	<b>20.73</b>	<b>N</b>	<b>FLO</b>	<b>19.9</b>
<b>0.786750</b>	<b>---</b>	<b>19.52</b>	<b>46.00</b>	<b>26.48</b>	<b>N</b>	<b>FLO</b>	<b>19.9</b>
<b>0.786750</b>	<b>34.06</b>	<b>---</b>	<b>56.00</b>	<b>21.94</b>	<b>N</b>	<b>FLO</b>	<b>19.9</b>
<b>0.813750</b>	<b>---</b>	<b>21.13</b>	<b>46.00</b>	<b>24.87</b>	<b>N</b>	<b>FLO</b>	<b>19.9</b>
<b>0.813750</b>	<b>30.66</b>	<b>---</b>	<b>56.00</b>	<b>25.34</b>	<b>N</b>	<b>FLO</b>	<b>19.9</b>
<b>1.086720</b>	<b>---</b>	<b>19.21</b>	<b>46.00</b>	<b>26.79</b>	<b>N</b>	<b>FLO</b>	<b>20.0</b>
<b>1.086720</b>	<b>32.02</b>	<b>---</b>	<b>56.00</b>	<b>23.98</b>	<b>N</b>	<b>FLO</b>	<b>20.0</b>
<b>1.176000</b>	<b>---</b>	<b>19.38</b>	<b>46.00</b>	<b>26.62</b>	<b>N</b>	<b>FLO</b>	<b>20.0</b>
<b>1.176000</b>	<b>35.99</b>	<b>---</b>	<b>56.00</b>	<b>20.01</b>	<b>N</b>	<b>FLO</b>	<b>20.0</b>
<b>1.223700</b>	<b>---</b>	<b>21.21</b>	<b>46.00</b>	<b>24.79</b>	<b>N</b>	<b>FLO</b>	<b>20.0</b>
<b>1.223700</b>	<b>35.53</b>	<b>---</b>	<b>56.00</b>	<b>20.47</b>	<b>N</b>	<b>FLO</b>	<b>20.0</b>
<b>1.303440</b>	<b>---</b>	<b>18.43</b>	<b>46.00</b>	<b>27.57</b>	<b>N</b>	<b>FLO</b>	<b>20.0</b>
<b>1.303440</b>	<b>34.95</b>	<b>---</b>	<b>56.00</b>	<b>21.05</b>	<b>N</b>	<b>FLO</b>	<b>20.0</b>
<b>1.358250</b>	<b>---</b>	<b>20.60</b>	<b>46.00</b>	<b>25.40</b>	<b>N</b>	<b>FLO</b>	<b>20.0</b>
<b>1.358250</b>	<b>31.52</b>	<b>---</b>	<b>56.00</b>	<b>24.48</b>	<b>N</b>	<b>FLO</b>	<b>20.0</b>
<b>4.889040</b>	<b>---</b>	<b>16.90</b>	<b>46.00</b>	<b>29.10</b>	<b>N</b>	<b>FLO</b>	<b>20.0</b>
<b>4.889040</b>	<b>20.86</b>	<b>---</b>	<b>56.00</b>	<b>35.14</b>	<b>N</b>	<b>FLO</b>	<b>20.0</b>
<b>20.868450</b>	<b>---</b>	<b>19.66</b>	<b>50.00</b>	<b>30.34</b>	<b>N</b>	<b>FLO</b>	<b>20.2</b>
<b>20.868450</b>	<b>24.62</b>	<b>---</b>	<b>60.00</b>	<b>35.38</b>	<b>N</b>	<b>FLO</b>	<b>20.2</b>



## Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Kevin Hsu, Fu Chen and Troye Hsieh	Temperature :	19.1~20.7°C
		Relative Humidity :	52.2~65.7%

### Note symbol

-L	Low channel location
-R	High channel location

## C1. Radiated Spurious Emission Test Modes






Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	SISO	Bluetooth-LE_GSFK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	SISO	Bluetooth-LE_GSFK	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	SISO	Bluetooth-LE_GSFK	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	SISO	Bluetooth-LE_GSFK	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	SISO	Bluetooth-LE_GSFK	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	SISO	Bluetooth-LE_GSFK	39	2480	2Mbps	-	-
Mode 7	2400-2483.5	SISO	Bluetooth-LE_GSFK	00	2402	125Kbps	-	-
Mode 8	2400-2483.5	SISO	Bluetooth-LE_GSFK	19	2440	125Kbps	-	-
Mode 9	2400-2483.5	SISO	Bluetooth-LE_GSFK	39	2480	125Kbps	-	-
Mode 10	2400-2483.5	SISO	Bluetooth-LE_GSFK	00	2402	500Kbps	-	-
Mode 11	2400-2483.5	SISO	Bluetooth-LE_GSFK	19	2440	500Kbps	-	-
Mode 12	2400-2483.5	SISO	Bluetooth-LE_GSFK	39	2480	500Kbps	-	-
Mode 13	2400-2483.5	SISO	Bluetooth-LE_GSFK	39	2480	125Kbps	-	SHF
Mode 14	2400-2483.5	SISO	Bluetooth-LE_GSFK	39	2480	125Kbps	-	LF



## C2. Summary of each worse mode


Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth-LE_GSFK	00	2389.76	41.84	54.00	-12.16	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSFK	00	4804.00	35.07	54.00	-18.93	V	Avg.	Pass	-	Harmonic
2	Bluetooth-LE_GSFK	19	2493.22	42.44	54.00	-11.56	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSFK	19	7320.00	47.57	54.00	-6.43	H	Avg.	Pass	-	Harmonic
3	Bluetooth-LE_GSFK	39	2483.52	44.34	54.00	-9.66	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSFK	39	7440.00	48.46	54.00	-5.54	H	Avg.	Pass	-	Harmonic
4	Bluetooth-LE_GSFK	00	2389.58	41.83	54.00	-12.17	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSFK	00	4804.00	32.79	54.00	-21.21	V	Avg.	Pass	-	Harmonic
5	Bluetooth-LE_GSFK	19	2499.10	42.46	54.00	-11.54	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSFK	19	7320.00	46.09	54.00	-7.91	H	Avg.	Pass	-	Harmonic
6	Bluetooth-LE_GSFK	39	2483.52	46.80	54.00	-7.20	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSFK	39	7440.00	47.27	54.00	-6.73	H	Avg.	Pass	-	Harmonic
7	Bluetooth-LE_GSFK	00	4804.00	34.59	54.00	-19.41	V	Avg.	Pass	-	Harmonic
8	Bluetooth-LE_GSFK	19	7320.00	47.46	54.00	-6.54	H	Avg.	Pass	-	Harmonic
9	Bluetooth-LE_GSFK	39	7440.00	49.04	54.00	-4.96	H	Avg.	Pass	-	Harmonic
10	Bluetooth-LE_GSFK	00	4804.00	34.72	54.00	-19.28	V	Avg.	Pass	-	Harmonic
11	Bluetooth-LE_GSFK	19	7320.00	47.22	54.00	-6.78	H	Avg.	Pass	-	Harmonic
12	Bluetooth-LE_GSFK	39	7440.00	48.54	54.00	-5.46	H	Avg.	Pass	-	Harmonic
13	Bluetooth-LE_GSFK	39	20975.00	50.35	74.00	-23.65	H	Peak	Pass	-	SHF
14	Bluetooth-LE_GSFK	39	30.97	34.74	40.00	-5.26	H	QP	Pass	-	LF

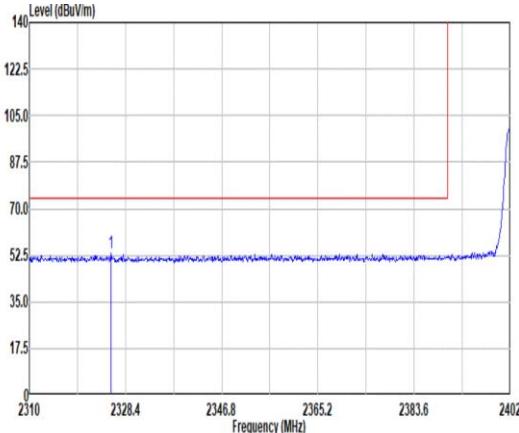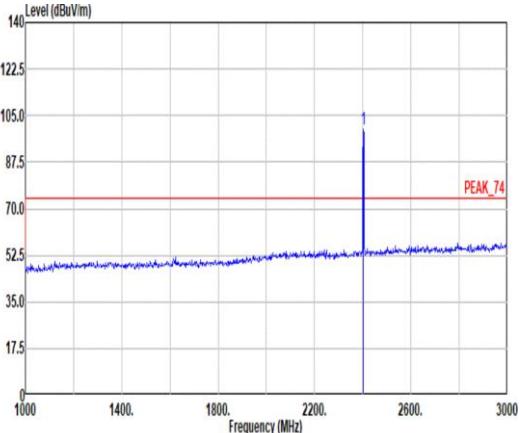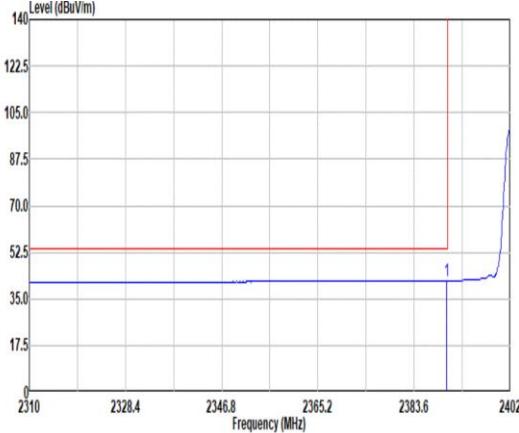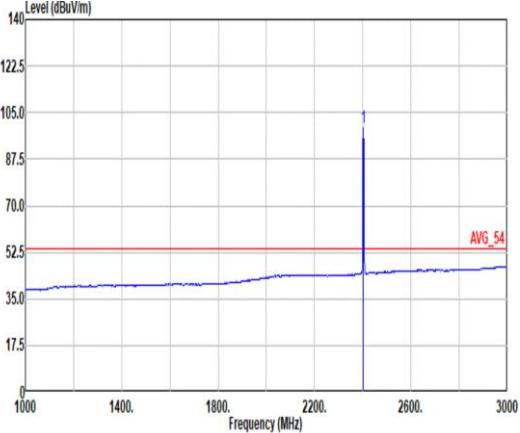


Mode	1																																																															
	Band Edge																																																															
	2400-2483.5_Bluetooth-LE_GSFK_CH00_2402MHz																																																															
ANT	SISO																																																															
Pol.	<b>Horizontal</b> 																																																															
Peak	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 9120D_01620_240028 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2325.55</td><td>53.27</td><td>74.00</td><td>-20.73</td><td>42.77</td><td>27.14</td><td>6.73</td><td>33.38</td><td>10.01</td><td>102 313 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2325.55	53.27	74.00	-20.73	42.77	27.14	6.73	33.38	10.01	102 313 PEAK	<b>Fundamental</b>  <p>Site : 03CH11-HY Condition: PEAK_74 3m 9120D_01620_240028 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2402.00</td><td>100.01</td><td>-----</td><td>-----</td><td>89.12</td><td>27.40</td><td>6.79</td><td>33.33</td><td>10.03</td><td>102 313 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.01	-----	-----	89.12	27.40	6.79	33.33	10.03	102 313 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2325.55	53.27	74.00	-20.73	42.77	27.14	6.73	33.38	10.01	102 313 PEAK																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2402.00	100.01	-----	-----	89.12	27.40	6.79	33.33	10.03	102 313 PEAK																																																						
Avg	 <p>Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240028 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2389.76</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>31.07</td><td>27.30</td><td>6.78</td><td>33.34</td><td>10.03</td><td>102 313 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.76	41.84	54.00	-12.16	31.07	27.30	6.78	33.34	10.03	102 313 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 9120D_01620_240028 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr> </thead> <tbody> <tr> <td>1</td><td>2402.00</td><td>99.47</td><td>-----</td><td>-----</td><td>88.58</td><td>27.40</td><td>6.79</td><td>33.33</td><td>10.03</td><td>102 313 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	99.47	-----	-----	88.58	27.40	6.79	33.33	10.03	102 313 AVERAGE
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2389.76	41.84	54.00	-12.16	31.07	27.30	6.78	33.34	10.03	102 313 AVERAGE																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	2402.00	99.47	-----	-----	88.58	27.40	6.79	33.33	10.03	102 313 AVERAGE																																																						







Mode	1																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GSFK_CH00_2402MHz																																																																																			
ANT	SISO																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240028 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBm</td><td>dBm</td><td>dB</td><td>dBm</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr> <tr> <td>1</td><td>2367.04</td><td>53.05</td><td>74.00</td><td>-20.95</td><td>42.41</td><td>27.28</td><td>6.77</td><td>33.35</td><td>10.02</td><td>398 342 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg		1	2367.04	53.05	74.00	-20.95	42.41	27.28	6.77	33.35	10.02	398 342 PEAK	<p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240028 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBm</td><td>dBm</td><td>dB</td><td>dBm</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr> <tr> <td>1</td><td>2402.00</td><td>98.71</td><td>-----</td><td>-----</td><td>87.82</td><td>27.40</td><td>6.79</td><td>33.33</td><td>10.03</td><td>398 342 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg		1	2402.00	98.71	-----	-----	87.82	27.40	6.79	33.33	10.03	398 342 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg																																																																												
1	2367.04	53.05	74.00	-20.95	42.41	27.28	6.77	33.35	10.02	398 342 PEAK																																																																										
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg																																																																												
1	2402.00	98.71	-----	-----	87.82	27.40	6.79	33.33	10.03	398 342 PEAK																																																																										
<p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240028 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBm</td><td>dBm</td><td>dB</td><td>dBm</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr> <tr> <td>1</td><td>2389.67</td><td>41.75</td><td>54.00</td><td>-12.25</td><td>30.98</td><td>27.30</td><td>6.78</td><td>33.34</td><td>10.03</td><td>398 342 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg		1	2389.67	41.75	54.00	-12.25	30.98	27.30	6.78	33.34	10.03	398 342 AVERAGE	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240028 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBm</td><td>dBm</td><td>dB</td><td>dBm</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr> <tr> <td>1</td><td>2402.00</td><td>98.11</td><td>-----</td><td>-----</td><td>87.22</td><td>27.40</td><td>6.79</td><td>33.33</td><td>10.03</td><td>398 342 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg		1	2402.00	98.11	-----	-----	87.22	27.40	6.79	33.33	10.03	398 342 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg																																																																												
1	2389.67	41.75	54.00	-12.25	30.98	27.30	6.78	33.34	10.03	398 342 AVERAGE																																																																										
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBm	dBm	dB	dBm	dB	dB	cm	deg																																																																												
1	2402.00	98.11	-----	-----	87.22	27.40	6.79	33.33	10.03	398 342 AVERAGE																																																																										

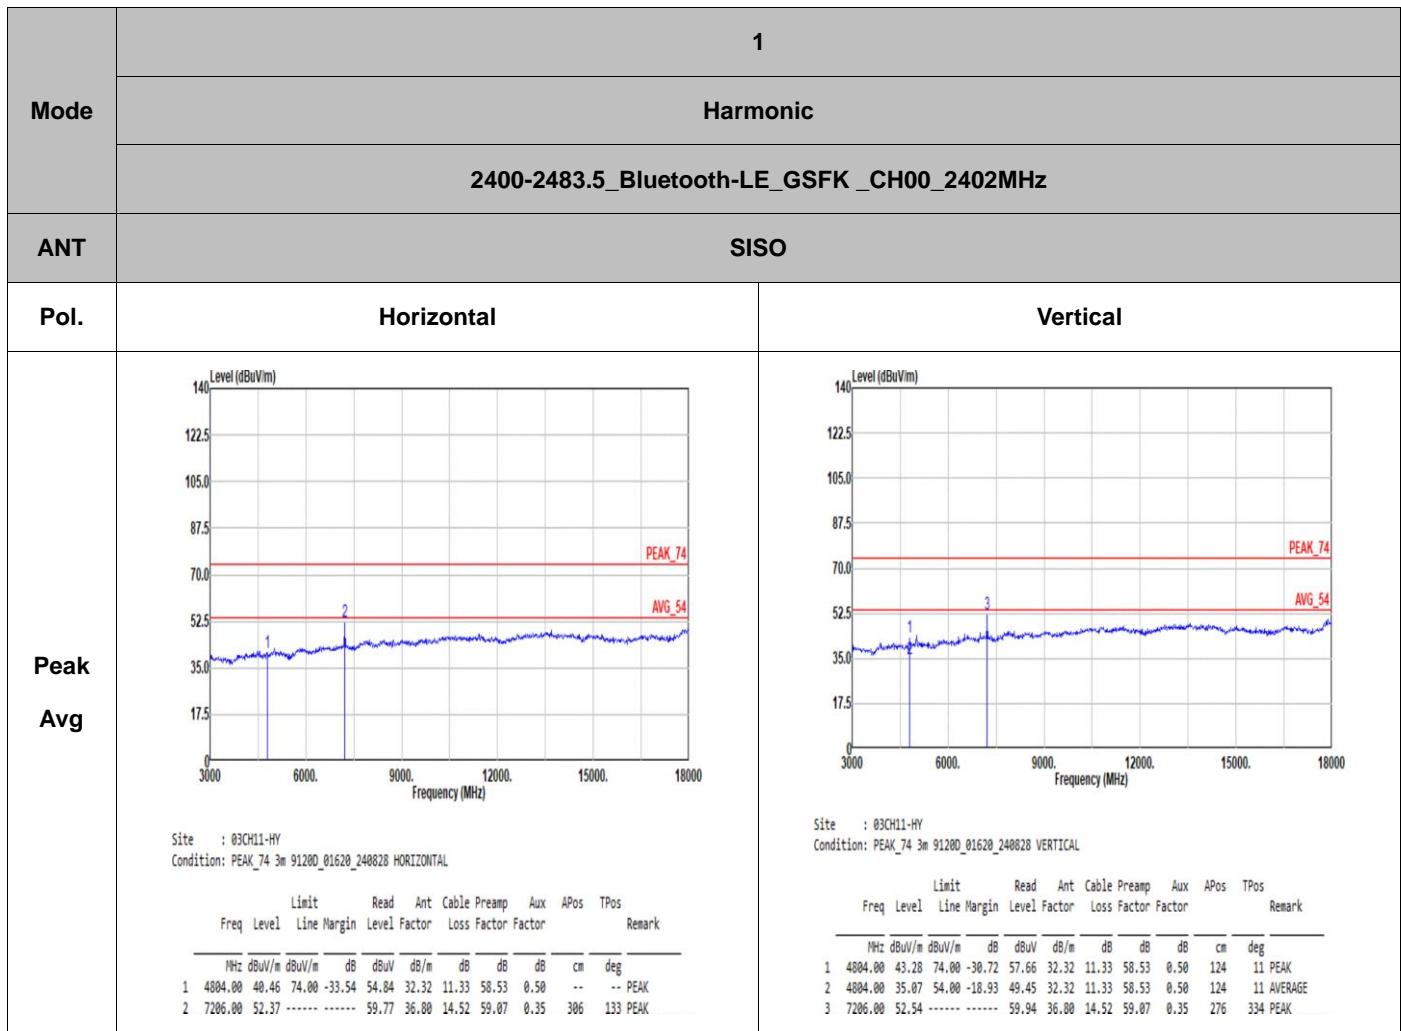



**Remark:** The unwanted signal 7206.000MHz 、7206.000MHz can be ignored since it falls within the non-restricted band and meet the requirements of 15.247 (d).

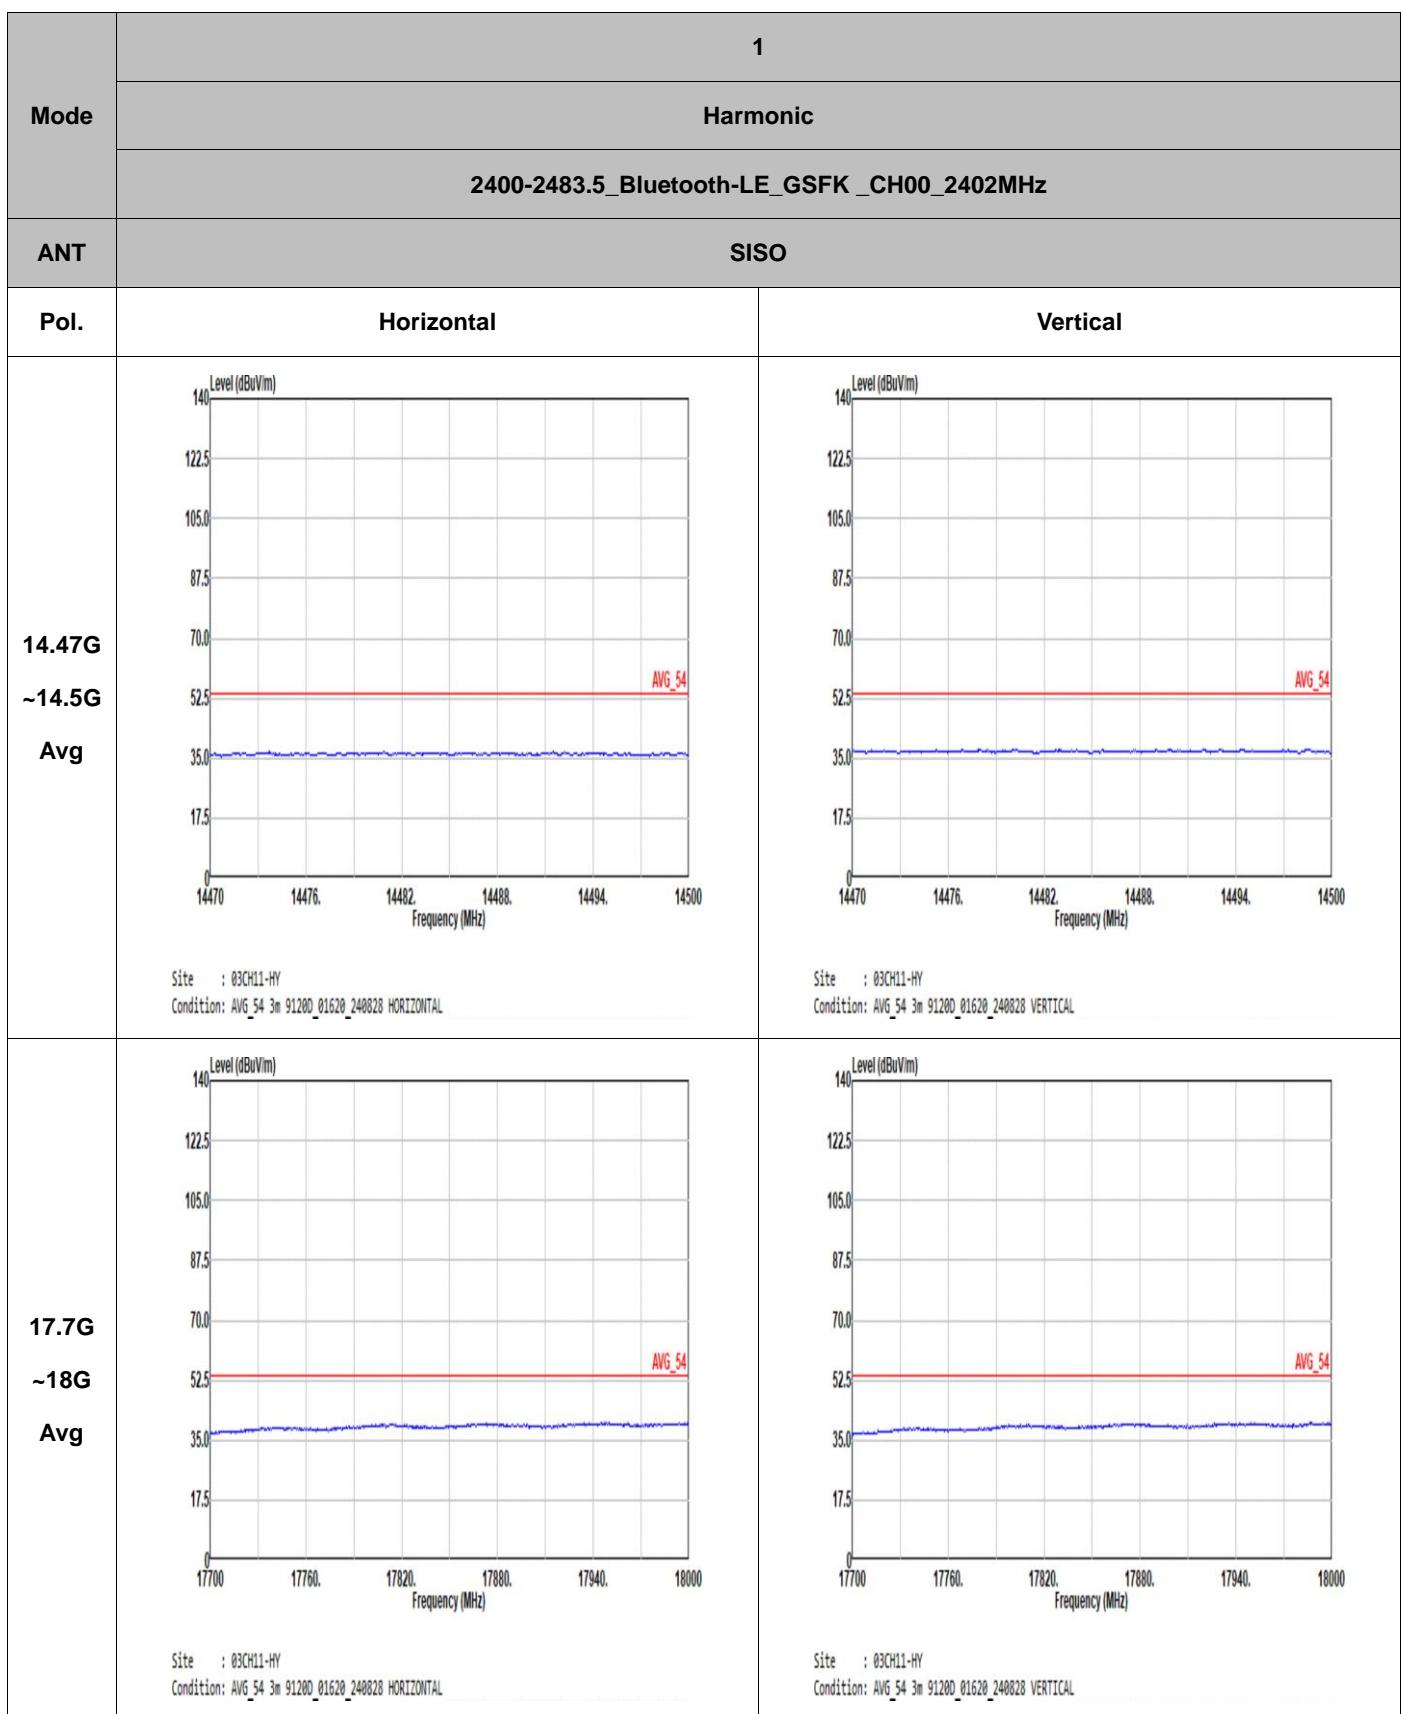

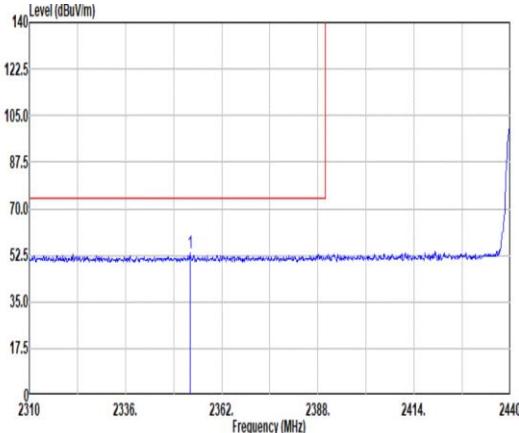
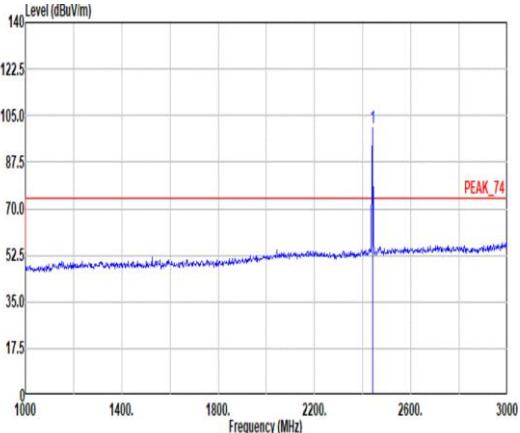
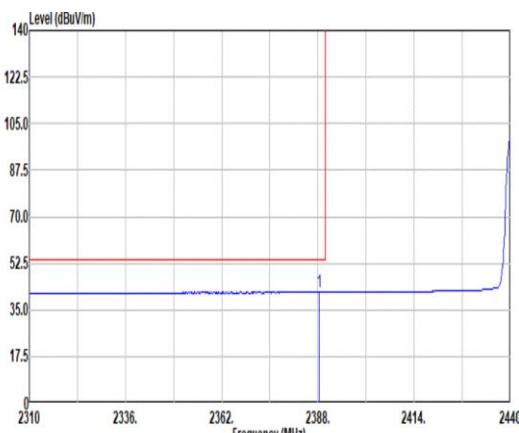
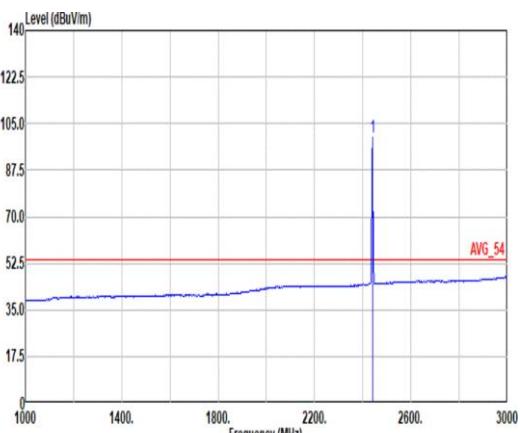


Mode	2																																																													
	Band Edge - L																																																													
	2400-2483.5_Bluetooth-LE_GSFK_CH19_2440MHz																																																													
ANT	SISO																																																													
Pol.	Horizontal	Fundamental																																																												
Peak	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240028 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>2353.42</td><td>53.24</td><td>74.00</td><td>-20.76</td><td>42.62</td><td>27.28</td><td>6.76</td><td>33.36</td><td>10.02</td><td>166 318 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	2353.42	53.24	74.00	-20.76	42.62	27.28	6.76	33.36	10.02	166 318 PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240028 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>2440.00</td><td>100.60</td><td>-----</td><td>-----</td><td>89.43</td><td>27.60</td><td>6.85</td><td>33.31</td><td>10.03</td><td>166 318 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	2440.00	100.60	-----	-----	89.43	27.60	6.85	33.31	10.03	166 318 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
2353.42	53.24	74.00	-20.76	42.62	27.28	6.76	33.36	10.02	166 318 PEAK																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
2440.00	100.60	-----	-----	89.43	27.60	6.85	33.31	10.03	166 318 PEAK																																																					
 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240028 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>2388.26</td><td>41.68</td><td>54.00</td><td>-12.32</td><td>30.93</td><td>27.28</td><td>6.78</td><td>33.34</td><td>10.03</td><td>166 318 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	2388.26	41.68	54.00	-12.32	30.93	27.28	6.78	33.34	10.03	166 318 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240028 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>2440.00</td><td>100.04</td><td>-----</td><td>-----</td><td>88.87</td><td>27.60</td><td>6.85</td><td>33.31</td><td>10.03</td><td>166 318 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	2440.00	100.04	-----	-----	88.87	27.60	6.85	33.31	10.03	166 318 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
2388.26	41.68	54.00	-12.32	30.93	27.28	6.78	33.34	10.03	166 318 AVERAGE																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																					
2440.00	100.04	-----	-----	88.87	27.60	6.85	33.31	10.03	166 318 AVERAGE																																																					

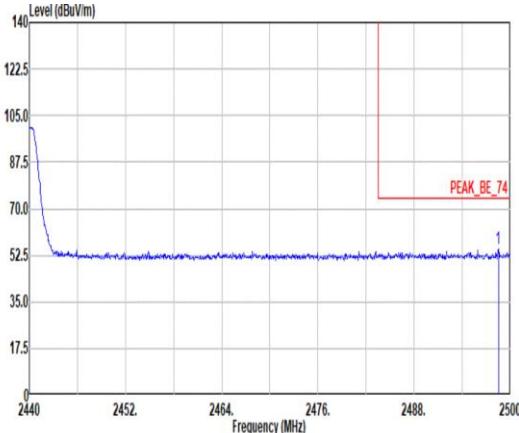
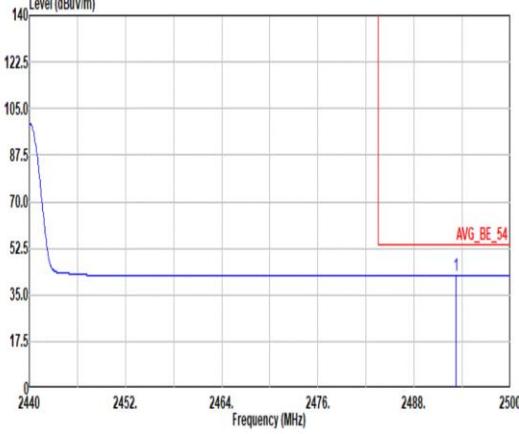


Mode	2																																									
	Band Edge - R																																									
	2400-2483.5_Bluetooth-LE_GSFK_CH19_2440MHz																																									
ANT	SISO																																									
Pol.	Horizontal	Fundamental																																								
Peak	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>2498.50</td><td>54.69</td><td>74.00</td><td>-19.31</td><td>43.10</td><td>27.98</td><td>6.93</td><td>33.27</td><td>10.03</td><td>166 318 PEAK</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	2498.50	54.69	74.00	-19.31	43.10	27.98	6.93	33.27	10.03	166 318 PEAK	Blank
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Level	Line Margin	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
2498.50	54.69	74.00	-19.31	43.10	27.98	6.93	33.27	10.03	166 318 PEAK																																	
Avg	 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>2493.22</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>30.85</td><td>27.90</td><td>6.93</td><td>33.27</td><td>10.03</td><td>166 318 AVERAGE</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	2493.22	42.44	54.00	-11.56	30.85	27.90	6.93	33.27	10.03	166 318 AVERAGE	Blank
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Level	Line Margin	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
2493.22	42.44	54.00	-11.56	30.85	27.90	6.93	33.27	10.03	166 318 AVERAGE																																	

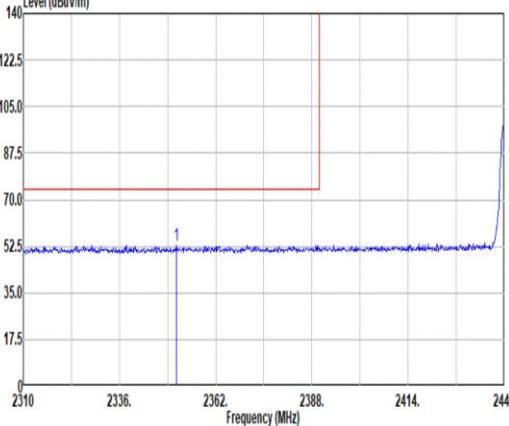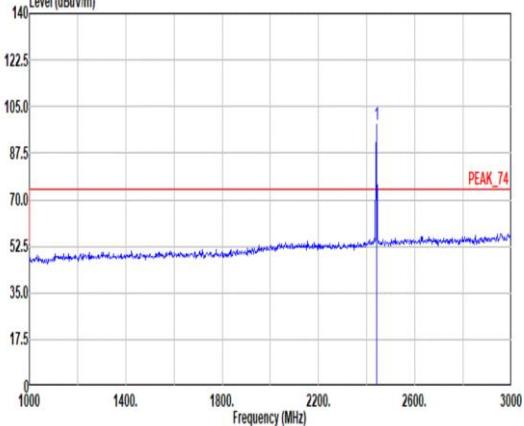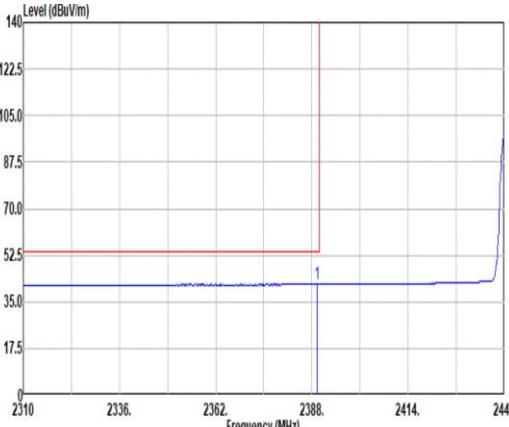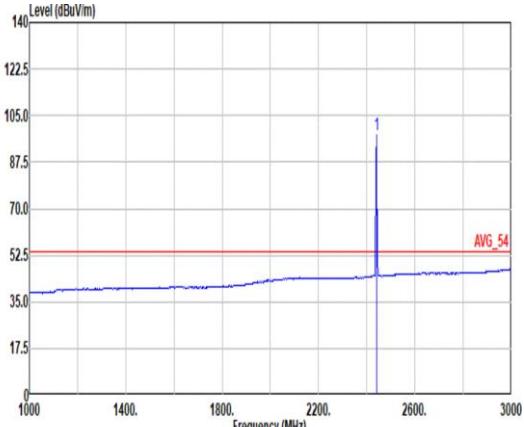

Mode	2																																																																																	
	Band Edge - L																																																																																	
	2400-2483.5_Bluetooth-LE_GSFK_CH19_2440MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240028 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr> <tr> <td>1 2351.34</td><td>52.96</td><td>74.00</td><td>-21.04</td><td>42.35</td><td>27.28</td><td>6.75</td><td>33.36</td><td>10.02</td><td>394 4 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2351.34	52.96	74.00	-21.04	42.35	27.28	6.75	33.36	10.02	394 4 PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240028 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr> <tr> <td>1 2440.00</td><td>98.24</td><td>-----</td><td>-----</td><td>87.07</td><td>27.60</td><td>6.85</td><td>33.31</td><td>10.03</td><td>394 4 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2440.00	98.24	-----	-----	87.07	27.60	6.85	33.31	10.03	394 4 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2351.34	52.96	74.00	-21.04	42.35	27.28	6.75	33.36	10.02	394 4 PEAK																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2440.00	98.24	-----	-----	87.07	27.60	6.85	33.31	10.03	394 4 PEAK																																																																									
 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240028 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr> <tr> <td>1 2389.43</td><td>41.64</td><td>54.00</td><td>-12.36</td><td>30.88</td><td>27.29</td><td>6.78</td><td>33.34</td><td>10.03</td><td>394 4 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.43	41.64	54.00	-12.36	30.88	27.29	6.78	33.34	10.03	394 4 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240028 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr> </thead> <tbody> <tr> <td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr> <tr> <td>1 2440.00</td><td>97.66</td><td>-----</td><td>-----</td><td>86.49</td><td>27.60</td><td>6.85</td><td>33.31</td><td>10.03</td><td>394 4 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2440.00	97.66	-----	-----	86.49	27.60	6.85	33.31	10.03	394 4 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2389.43	41.64	54.00	-12.36	30.88	27.29	6.78	33.34	10.03	394 4 AVERAGE																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2440.00	97.66	-----	-----	86.49	27.60	6.85	33.31	10.03	394 4 AVERAGE																																																																									

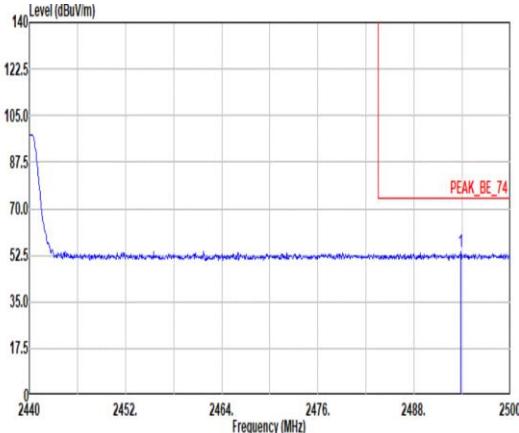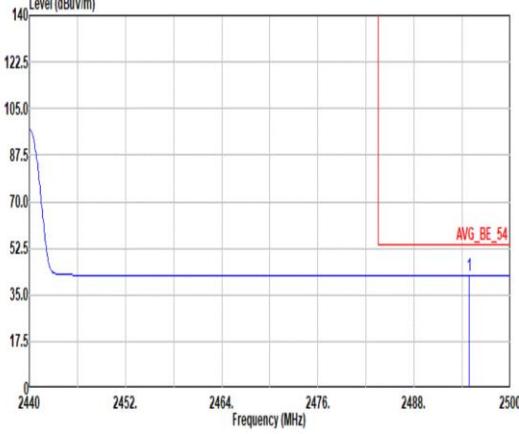

Mode	2																																									
	Band Edge - R																																									
	2400-2483.5_Bluetooth-LE_GSFK_CH19_2440MHz																																									
ANT	SISO																																									
Pol.	Vertical	Fundamental																																								
Peak	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240028 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SFT:Auto</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>2493.82</td><td>54.05</td><td>74.00</td><td>-19.95</td><td>42.46</td><td>27.98</td><td>6.93</td><td>33.27</td><td>10.03</td><td>394 4 PEAK</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	2493.82	54.05	74.00	-19.95	42.46	27.98	6.93	33.27	10.03	394 4 PEAK	Blank
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Level	Line Margin	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
2493.82	54.05	74.00	-19.95	42.46	27.98	6.93	33.27	10.03	394 4 PEAK																																	
Avg	 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240028 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SFT:Auto</p> <table><thead><tr><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>2494.90</td><td>42.43</td><td>54.00</td><td>-11.57</td><td>30.84</td><td>27.90</td><td>6.93</td><td>33.27</td><td>10.03</td><td>394 4 AVERAGE</td></tr></tbody></table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	2494.90	42.43	54.00	-11.57	30.84	27.90	6.93	33.27	10.03	394 4 AVERAGE	Blank
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Level	Line Margin	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
2494.90	42.43	54.00	-11.57	30.84	27.90	6.93	33.27	10.03	394 4 AVERAGE																																	

