

FCC SAR Test Report

FCC ID: TX2-RTL8822CE

Project No. : 1905H006
Equipment : 802.11a/b/g/n/ac RTL8822CE Combo module
Test Model : RTL8822CE
Applicant : Realtek Semiconductor Corp.
Address : No. 2, Innovation Road II, Hsinchu Science Park,
Hsinchu 300, Taiwan

Date of Receipt : Jun. 13, 2019
Date of Test : Jul. 13, 2019 ~ Jul. 14, 2019
Issued Date : Jul. 23, 2019
Tested by : BTL Inc.

PREPARED BY : Rot . Liang (Rot Liang)

APPROVED BY : Herbort Liu (Herbort Liu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Certificate #5123.02

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents

	Page
1 . GENERAL SUMMARY	6
2 . RF EMISSIONS MEASUREMENT	7
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 STATEMENT OF COMPLIANCE	8
3.2 GENERAL DESCRIPTION OF EUT	9
3.3 LABORATORY ENVIRONMENT	10
3.4 MAIN TEST INSTRUMENTS	11
4 . SAR MEASUREMENTS SYSTEM CONFIGURATION	12
4.1 SAR MEASUREMENT SET-UP	12
4.1.1 TEST SETUP LAYOUT	12
4.2 DASY5 E-FIELD PROBE SYSTEM	13
4.2.1 EX3DV4 PROBE SPECIFICATION	13
4.2.2 E-FIELD PROBE CALIBRATION	14
4.2.3 OTHER TEST EQUIPMENT	15
4.2.4 SCANNING PROCEDURE	16
4.2.5 SPATIAL PEAK SAR EVALUATION	17
4.2.6 DATA STORAGE AND EVALUATION	18
4.2.7 DATA EVALUATION BY SEMCAD	19
5 . SYSTEM VERIFICATION PROCEDURE	21
5.1 TISSUE VERIFICATION	21
5.2 SYSTEM CHECK	22
5.3 SYSTEM CHECK PROCEDURE	22
6 . SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	23
6.1 SAR MEASUREMENT VARIABILITY	23
7 . OPERATIONAL CONDITIONS DURING TEST	24
7.1 SAR TEST CONFIGURATION	24
7.1.1 WIFI TEST CONFIGURATION	24
7.2 TEST POSITION	26
7.2.1 TABLET MODE	26
7.2.2 NOTEBOOK MODE	28
8 . TEST RESULT	29
8.1 CONDUCTED POWER RESULTS	29

Table of Contents

	Page
8.1.1 CONDUCTED POWER MEASUREMENTS OF WIFI 2.4G	29
8.1.2 CONDUCTED POWER MEASUREMENTS OF WIFI 5.2G	32
8.1.3 CONDUCTED POWER MEASUREMENTS OF WIFI 5.3G	35
8.1.4 CONDUCTED POWER MEASUREMENTS OF WIFI 5.6G	38
8.1.5 CONDUCTED POWER MEASUREMENTS OF WIFI 5.8G	41
8.1.6 CONDUCTED POWER MEASUREMENTS OF BT	44
8.2 SAR TEST RESULTS	45
8.2.1 SAR MEASUREMENT RESULT	46
8.3 MULTIPLE TRANSMITTER EVALUATION	48
8.3.1 STAND-ALONE SAR TEST EXCLUSION	48
8.3.2 SIMULTANEOUS TRANSMISSION CONDITIONS	49
8.3.3 SIMULTANEOUS TRANSMISSION CONLCUSION	50
APPENDIX	55
1. TEST LAYOUT	55
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate	
Appendix D. Photographs of the Test Set-Up	
Appendix E. Antenna location and standalone SAR test exclusion	

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Jul. 23, 2019

1. GENERAL SUMMARY

Equipment	802.11a/b/g/n/ac RTL8822CE Combo module
Brand Name	Realtek
Test Model	RTL8822CE
Manufacturer	Realtek Semiconductor Corp.
Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
Standard(s)	<p>ANSI Std C95.1-1992 Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz. (IEEE Std C95.1-1991)</p> <p>IEEE Std 1528-2013 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques</p> <p>KDB616217 D04 SAR for laptop and tablets v01r02</p> <p>KDB447498 D01 General RF Exposure Guidance v06</p> <p>KDB248227 D01 802. 11 Wi-Fi SAR v02r02</p> <p>KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04</p> <p>KDB865664 D02 SAR Reporting v01r02</p> <p>KDB690783 D01 SAR Listings on Grants v01r03</p>

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCC SAR-1-1905H006) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of A2LA according to the ISO/IEC 17025 quality assessment standard and technical standard(s).

2. RF EMISSIONS MEASUREMENT

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **SAR room** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792

2.2 MEASUREMENT UNCERTAINTY

Note: Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is $< 1.5 \text{ W/kg}$, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

3. GENERAL INFORMATION

3.1 STATEMENT OF COMPLIANCE

Mode	Highest Body Reported SAR-1g (W/kg)
2.4G WLAN	1.32
5.3G WLAN	0.85
5.6G WLAN	0.93
5.8G WLAN	0.88
Bluetooth	0.13

Note: The highest SAR for body and simultaneous transmission exposure conditions are 1.32W/kg and 1.56W/kg respectively.

Note:

The device is in compliance with Specific Absorption Rate(SAR)for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013

3.2 GENERAL DESCRIPTION OF EUT

Equipment	802.11a/b/g/n/ac RTL8822CE Combo module								
Test Model	RTL8822CE								
Test Sample	Sample 1	Engineering Sample No.: SH190614384-1							
	Sample 2	Engineering Sample No.: SH190614384							
S/N	Sample 1	1298513100024							
	Sample 2	1298513200028							
Modulation	WiFi(DSSS/OFDM), BT(GFSK/π/4-DQPSK/8-DPSK)								
Operation Frequency Range(s)	Band	TX (MHz)		RX (MHz)					
	Bluetooth	2400-2483.5							
	2.4G WIFI	2400-2483.5							
	5.2G WLAN	5150-5250							
	5.3G WLAN	5250-5350							
	5.6G WLAN	5470-5725							
	5.8G WLAN	5725-5850							
Test Channels (low-mid-high)	0-39-78 (BT)								
	0-19-39 (BLE)								
	1-6-11-12-13 (2.4G WIFI 802.11b/g/n HT20, VHT20)								
	3-6-9-10-11 (2.4G WIFI 802.11n HT40, VHT40)								
	5G WLAN	5.2G WLAN	5.3G WLAN	5.6G WLAN	5.8G WLAN				
	802.11a/n HT20/ ac VHT 20	36-40-44-48	52-56-60-64	100-104-108- 112-116-132- 136-140	149-153-157- 161-165				
	802.11n HT40/ ac VHT 40	38-46	54-62	102-110-118- 126-134	151-159				
	802.11ac VHT80	42	58	106-122	155				
	Ant Part Number	Band	Ant Gain(dBi)		Vendor				
	Ant B DC33001L910 Aux antenna	2.4G-2.5G	-2.88		Awan				
		5.15G-5.25G	0.88						
		5.25G-5.35G	2.84						
		5.47G-5.725G	0.26						
		5.725G-5.85G	-0.91						
	Ant A DC33001L900 Main antenna	2.4G	-1.47		Pulse				
		5.15G-5.25G	1.44						
		5.25G-5.35G	0.79						
		5.47G-5.725G	1.50						
		5.725G-5.85G	0.55						
Antenna Information	Ant B DC3001LC10 Aux antenna	2.4G	-4.27		Pulse				
		5.15G-5.25G	0.65						
		5.25G-5.35G	0.60						
		5.47G-5.725G	0.84						
		5.725G-5.85G	0.43						
	Ant A DC3001LC00 Main antenna	2.4G	-2.96						
		5.15G-5.25G	1.87						
		5.25G-5.35G	1.38						
		5.47G-5.725G	0.46						
		5.725G-5.85G	1.18						

Note:

1. Ant B refers to aux antenna, Ant A refers to main antenna.

2. Implementation in the following platform

Model: Lenovo Yoga C740-15IML

Product name: Notebook Computer

Brand name: Lenovo

3.3 LABORATORY ENVIRONMENT

Temperature	Min. = 18°C, Max. = 25°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

3.4 MAIN TEST INSTRUMENTS

Item	Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Interval
1	Data Acquisition Electronics	Speag	DAE4	1390	May 25, 2019	1 Year
2	E-field Probe	Speag	EX3DV4	3685	Mar. 25, 2019	1 Year
3	System Validation Dipole	Speag	D2450V2	919	Jun. 11, 2018	3 Years
4	System Validation Dipole	Speag	D5GHzV2	1160	Jun. 20, 2018	3 Years
5	ELI4 Phantom	Speag	ELI4 Phantom V5.0	1222	N/A	N/A
6	Power Amplifier	Mini-Circuits	ZHL-42W+	QA1333003	Feb. 25, 2019	1 Year
7	Power Amplifier	Mini-Circuits	ZVE-8G+	520701341	Feb. 25, 2019	1 Year
8	DC Source	Iteck	OT6154	M00157	Oct. 12, 2018	1 Year
9	ENA Network Analyzer	Agilent	E5071C	MY46102965	Mar. 10, 2019	1 Year
10	MXG Analog Signal Generator	Agilent	N5181A	MY49060710	Aug. 11, 2018	1 Year
11	Signal Generator	Agilent	E4438C	MY4907131	Mar. 10, 2019	1 Year
12	P-series power meter	Agilent	N1911A	MY45100473	Aug. 11, 2018	1 Year
13	Wideband power sensor	Agilent	N1921A	MY51100041	Aug. 11, 2018	1 Year
14	Peak Power Analyzer	Keysight	8990B	MY51000506	Nov. 26, 2018	1 Year
15	Wideband Power Sensor	Keysight	N1923A	MY58310004	Nov. 26, 2018	1 Year
16	Dielectric Assessment Kit	Speag	DAK-3.5	1226	N/A	N/A
17	Dual directional coupler	Woken	TS-PCC0M-05	107090019	Mar. 10, 2019	1 Year
18	Coupler	Woken	0110A05601O-10	COM5BNW1A2	Mar. 10, 2019	1 Year
19	Digital Thermometer	LKM	DTM3000	3519	Jul. 08, 2019	1 Year
20	Thermohygrometer	Parkoo	JR609	N/A	Aug. 23, 2018	1 Year

Note:

1. "N/A" denotes no model name, serial No. or calibration specified.
2.
 - 1) Per KDB865664 D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
 - a) There is no physical damage on the dipole;
 - b) System check with specific dipole is within 10% of calibrated value;
 - c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement;
 - d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.
 - 2) Network analyzer probe calibration against air, distilled water and a short block performed before measuring liquid parameters.


4. SAR MEASUREMENTS SYSTEM CONFIGURATION

4.1 SAR MEASUREMENT SET-UP

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

4.1.1 TEST SETUP LAYOUT

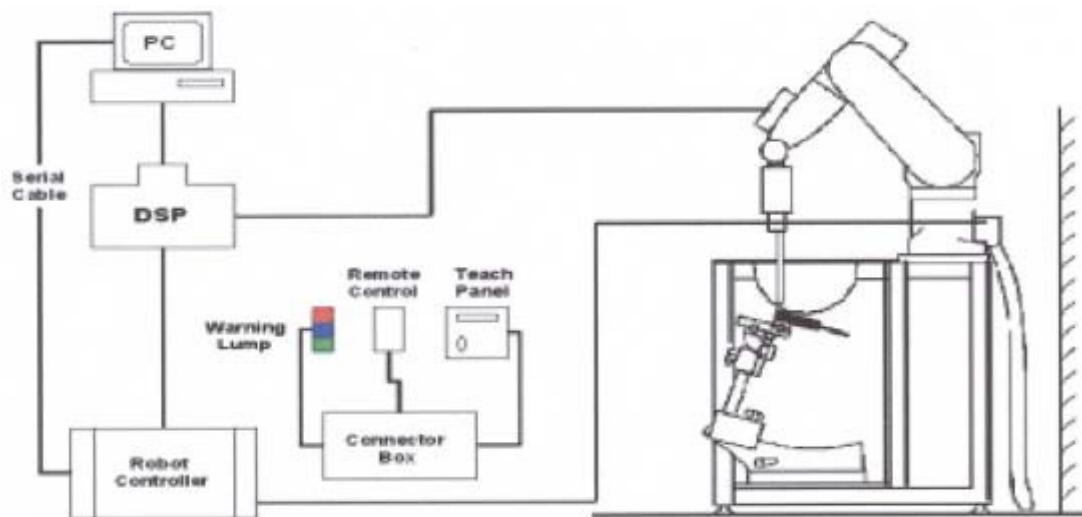

4.2 DASY5 E-FIELD PROBE SYSTEM

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

4.2.1 EX3DV4 PROBE SPECIFICATION

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm



EX3DV4 E-field Probe

4.2.2 E-FIELD PROBE CALIBRATION

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermostat-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt =Exposure time(30 seconds),

C =Heat capacity of tissue (brain or muscle),

ΔT =Temperature increase due to RF exposure.

$$\text{Or SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where: σ = Simulated Tissue Conductivity,

ρ =Tissue density (kg/m³).

4.2.3 OTHER TEST EQUIPMENT

4.2.3.1. Device Holder for Transmitters

Construction: Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices (e.g., laptops, cameras, etc.) It is light weight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam

4.2.3.2 Phantom

Model	ELI4 Phantom	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Shell Thickness	2±0.1 mm	
Filling Volume	Approx. 30 liters	
Dimensions	Length: 600 mm ; Width: 190mm Height: adjustable feet	
Available	Special	

4.2.4 SCANNING PROCEDURE

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

- Area Scan

The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6 GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.

- Zoom Scan

A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} \leq 8\text{mm}$, $2\text{-}4\text{GHz} \leq 5\text{ mm}$ and $4\text{-}6\text{ GHz} \leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} \leq 5\text{ mm}$, $3\text{-}4\text{ GHz} \leq 4\text{mm}$ and $4\text{-}6\text{GHz} \leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength - also show the liquid depth.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximum Area Scan resolution ($\Delta x_{area}, \Delta y_{area}$)	Maximum Zoom Scan spatial resolution ($\Delta x_{Zoom}, \Delta y_{Zoom}$)	Maximum Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid		Graded Grad	
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)^*$	$\Delta z_{Zoom}(n>1)^*$	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥22mm

4.2.5 SPATIAL PEAK SAR EVALUATION

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points(with 8mm horizontal resolution) or 7 x 7 x 7 points(with 5mm horizontal resolution) or 8 x 8 x 7 points(with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting "Graph Evaluated".
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computer mathematic, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computer mathematic, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

4.2.6 DATA STORAGE AND EVALUATION

4.2.6.1 Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

4.2.7 DATA EVALUATION BY SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Norm _i , a_{i0} , a_{i1} , a_{i2}
	Conversion factor	ConvF _i
	Diode compression point	Dcp _i
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multi meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With V_i = compensated signal of channel i ($i = x, y, z$)
 U_i = input signal of channel i ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

$$\text{H-field probes: } H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i ($i = x, y, z$)
[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m
= conductivity in [mho/m] or [Siemens/m]
= equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total field strength in V/m
 H_{tot} = total magnetic field strength in A/m

5. SYSTEM VERIFICATION PROCEDURE

5.1 TISSUE VERIFICATION

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
Body 2450	-	31.4	-	0.1	-	-	68.5	-
Body 5G	-	-	-	-	-	10.7	78.6	10.7

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Verification									
Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Targeted Conductivity (σ)	Targeted Permittivity (ϵ_r)	Deviation Conductivity (σ) (%)	Deviation Permittivity (ϵ_r) (%)	Date
Body	2450	22.4	2.036	52.010	1.95	52.7	4.41	-1.31	Jul. 13, 2019
Body	5300	22.5	5.406	48.894	5.42	48.9	-0.26	-0.01	Jul. 13, 2019
Body	5500	22.4	5.714	48.566	5.65	48.6	1.13	-0.07	Jul. 14, 2019
Body	5600	22.3	5.871	48.311	5.77	48.5	1.75	-0.39	Jul. 14, 2019
Body	5800	22.5	6.127	47.810	6.00	48.2	2.12	-0.81	Jul. 14, 2019

Note:

- 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

5.2 SYSTEM CHECK

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.


System Check	Date	Frequency (MHz)	Targeted SAR-1g (W/kg)	Measured SAR-1g (W/kg)	normalized SAR-1g (W/kg)	Deviation (%)	Dipole S/N
Body	Jul. 13, 2019	2450	50.80	13.10	52.40	3.15	919
Body	Jul. 13, 2019	5300	72.30	7.19	71.90	-0.55	1160
Body	Jul. 14, 2019	5500	76.20	7.39	73.90	-3.02	1160
Body	Jul. 14, 2019	5600	77.70	7.85	78.50	1.03	1160
Body	Jul. 14, 2019	5800	76.60	8.02	80.20	4.70	1160

5.3 SYSTEM CHECK PROCEDURE

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW(below 3GHz) or 100mW(3-6GHz). To adjust this power a power meter is used.

The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system ($\pm 10\%$).

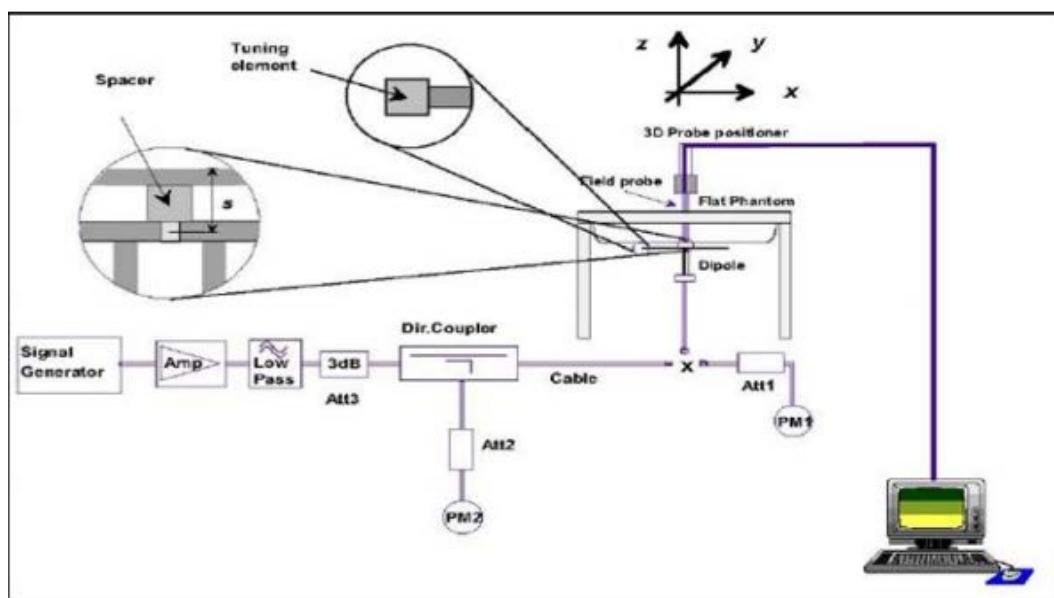

6. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

6.1 SAR MEASUREMENT VARIABILITY

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is $< 0.80 \text{ W/kg}$; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is $\geq 0.80 \text{ W/kg}$, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45 \text{ W/kg}$ ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is $\geq 1.5 \text{ W/kg}$ and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in section 8.2.

7. OPERATIONAL CONDITIONS DURING TEST

7.1 SAR TEST CONFIGURATION

7.1.1 WIFI TEST CONFIGURATION

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal.

2.4G

Mode	802.11b	802.11g	802.11n HT20	802.11n HT40	VHT20	VHT40
Duty cycle	100%					
Crest factor	1					

5G

Mode	802.11a	802.11n HT20	802.11n HT40	802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
Duty cycle	100%					
Crest factor	1					

For WiFi SAR testing, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The test procedures in KDB 248227 D01 are applied.

7.1.1.1 2.4G SAR Test Requirements

802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8 \text{ W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is $> 0.8 \text{ W/kg}$, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is $> 1.2 \text{ W/kg}$, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$.

SAR Test Requirements for OFDM configurations

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, each stand alone. And frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.1.1.2 5G SAR Test Requirements

◊ U-NII-1 and U-NII-2A Band

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is $\leq 1.2 \text{ W/kg}$, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

◊ U-NII-2C, U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, they must be considered for SAR testing. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels.¹¹ When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

7.1.1.3 OFDM transmission mode and SAR test channel selection

For the 2.4GHz and 5GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations(for example 802.11a, 802.11n and 802.11ac, or 802.11g and 802.11n, with the same channel bandwidth, modulation, and data rate, etc.), the lower order 802.11 mode(i.e.802.11a then 802.11n and 802.11ac, or 802.11g then 802.11n) is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

7.1.1.4 Initial test configuration procedure

For OFDM, in both 2.4G and 5GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output powers is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output power will be the initial test configuration.


When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurement.

7.2 TEST POSITION

7.2.1 TABLET MODE

The device does not have telephone receiver. Next to the ear operation is not supported. So the additional Head SAR testing for this device is not required.

Body operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. The distance between the device and the phantom was kept 0mm.

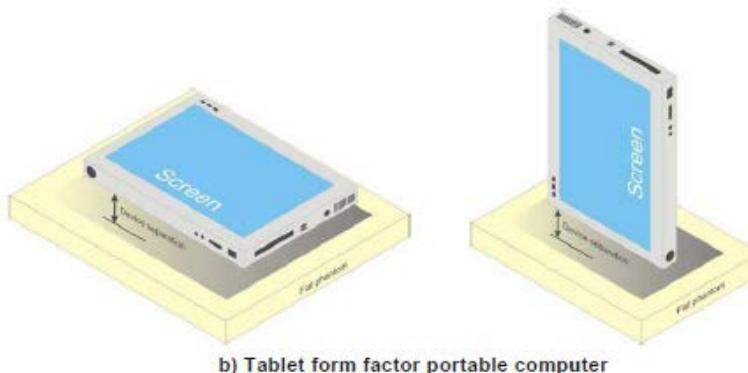

Note: A separation distance 0mm is commonly used for body tablet, to represent a spacing provided by intended accessories.

The overall diagonal dimension of the display section of a tablet is 42.61cm > 20cm, Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the Tablet touching the phantom. SAR evaluation for the front surface of tablet display screens are generally not necessary.

The SAR Exclusion Threshold in KDB 447498 D01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned adjacent the phantom and the edge containing the antenna positioned perpendicular to the phantom.

SAR test reduction and exclusion guidance

(1) The SAR exclusion threshold for distances < 50mm is defined by the following equation:

$$\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

The test exclusions are applicable only when the minimum test separation distance is $\leq 50\text{mm}$ and for transmission frequencies between 100MHz and 6GHz. When the minimum test separation distance is $< 5\text{mm}$, a distance of 5mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

(2) The SAR exclusion threshold for distances $> 50\text{mm}$ is defined by the following equation, as illustrated in KDB 447498 D01 Appendix B:

a) at 100 MHz to 1500 MHz

$$[\text{Power allowed at numeric Threshold at } 50 \text{ mm in step 1}) + (\text{test separation distance} - 50 \text{ mm}) \cdot (f_{(\text{MHz})}/150)] \text{ mW}$$


b) at $> 1500\text{MHz}$ and $\leq 6\text{GHz}$

$$[\text{Power allowed at numeric Threshold at } 50 \text{ mm in step 1}) + (\text{test separation distance} - 50 \text{ mm}) \cdot 10] \text{ mW}$$

The location of the antenna inside EUT and standalone SAR test exclusion, please refer to Appendix E.

7.2.2 NOTEBOOK MODE

This DUT was tested in 2 different positions. They are back of keyboard and back of screen as illustrated below:

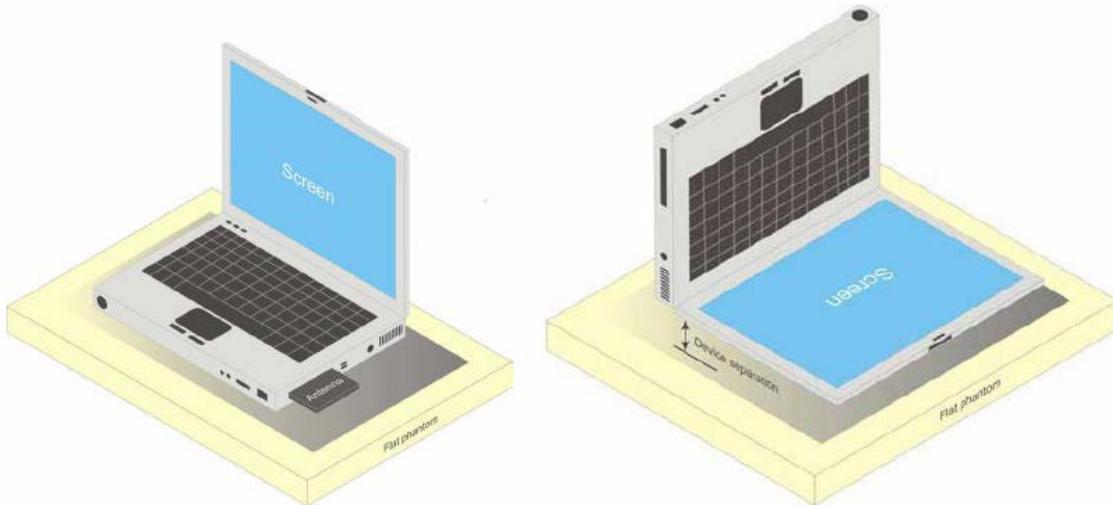

SAR testing to ensure safety of bystanders or people other than the user is not specifically covered in the harmonized standards but it is a consideration for declaration of compliance to the Directive.

Therefore, the manufacturer is encouraged to ensure that the RF exposure and SAR assessments do cover the safety of all persons, during the normal intended use of the device. For example, this may apply to a device where normal intended use could locate the transmitting antenna at a safe distance from the user but a closer distance to other persons located or standing nearby.

Therefore, we tested the position at the back of the screen, which is bystander SAR. Since the integrated antenna is located at the back of the display screen, the test distance we tested is 25mm.

8. TEST RESULT

8.1 CONDUCTED POWER RESULTS

8.1.1 CONDUCTED POWER MEASUREMENTS OF WIFI 2.4G

SISO Ant B

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
802.11b	1	2412	1	16.50	16.25
	6	2437		16.50	16.27
	11	2462		16.50	16.27
	12	2467		15.00	14.37
	13	2472		11.00	9.75
802.11g	1	2412	6	14.00	13.62
	6	2437		14.50	14.25
	11	2462		14.00	13.58
	12	2467		11.50	10.79
	13	2472		8.50	7.72
802.11n HT20	1	2412	6.5	14.00	13.88
	6	2437		14.50	14.27
	11	2462		14.00	13.87
	12	2467		11.50	10.85
	13	2472		8.50	7.72
802.11n HT40	3	2422	13.5	14.00	13.84
	6	2437		14.50	14.31
	9	2452		14.00	13.85
	10	2457		11.50	10.88
	11	2462		8.00	7.26
VHT20	1	2412	6.5	14.00	13.52
	6	2437		14.50	14.33
	11	2462		14.00	13.61
	12	2467		11.50	10.67
	13	2472		8.50	7.81
VHT40	3	2422	13.5	14.00	13.75
	6	2437		14.50	14.37
	9	2452		14.00	13.68
	10	2457		11.50	10.76
	11	2462		8.00	7.25

SISO Ant A

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune up	Average Power(dBm)
802.11b	1	2412	1	16.50	16.24
	6	2437		16.50	16.36
	11	2462		16.50	16.23
	12	2467		15.00	14.38
	13	2472		11.00	9.76
802.11g	1	2412	6	14.00	13.75
	6	2437		14.50	14.17
	11	2462		14.00	13.71
	12	2467		11.50	10.58
	13	2472		8.50	7.78
802.11n HT20	1	2412	6.5	14.00	13.71
	6	2437		14.50	14.25
	11	2462		14.00	13.77
	12	2467		11.50	10.75
	13	2472		8.50	7.81
802.11n HT40	3	2422	13.5	14.00	13.74
	6	2437		14.50	14.23
	9	2452		14.00	13.65
	10	2457		11.50	10.67
	11	2462		8.00	7.27
VHT20	1	2412	6.5	14.00	13.62
	6	2437		14.50	14.18
	11	2462		14.00	13.77
	12	2467		11.50	10.75
	13	2472		8.50	7.63
VHT40	3	2422	13.5	14.00	13.65
	6	2437		14.50	14.15
	9	2452		14.00	13.58
	10	2457		11.50	10.63
	11	2462		8.00	7.17

MIMO (Ant A+Ant B)

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT B Average Power(dBm)	ANT A Average Power(dBm)	Max. Tune up	Total Average Power(dBm)
802.11b	1	2412	1	13.33	13.21	16.50	16.28
	6	2437		13.22	13.38	16.50	16.31
	11	2462		13.24	13.26	16.50	16.26
	12	2467		13.35	13.23	17.50	16.30
	13	2472		9.71	9.82	13.50	12.78
802.11g	1	2412	6	13.41	13.09	16.50	16.26
	6	2437		13.28	13.31	16.50	16.31
	11	2462		13.35	13.19	16.50	16.28
	12	2467		10.69	10.75	14.50	13.73
	13	2472		7.57	7.85	11.50	10.72
802.11n HT20	1	2412	13	13.27	13.17	16.50	16.23
	6	2437		13.18	13.35	16.50	16.28
	11	2462		13.29	13.22	16.50	16.27
	12	2467		10.68	10.82	14.50	13.76
	13	2472		7.84	7.59	11.50	10.73
802.11n HT40	3	2422	27	12.74	12.71	16.00	15.74
	6	2437		13.35	13.22	16.50	16.30
	9	2452		13.19	13.25	16.50	16.23
	10	2457		10.78	10.84	14.50	13.82
	11	2462		7.35	7.32	11.00	10.35
VHT20	1	2412	13	13.32	13.42	16.50	16.38
	6	2437		13.26	13.27	16.50	16.28
	11	2462		13.32	13.25	16.50	16.30
	12	2467		10.82	10.75	14.50	13.80
	13	2472		7.75	7.68	11.50	10.73
VHT40	3	2422	27	12.72	12.87	16.00	15.81
	6	2437		13.32	13.36	16.50	16.35
	9	2452		13.35	13.31	16.50	16.34
	10	2457		10.76	10.75	14.50	13.77
	11	2462		7.34	7.28	11.00	10.32

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) Per KDB248227 D01, for WiFi 2.4GHz, the highest measured maximum output power Channel for DSSS modes (802.11b) was selected for SAR measurement. SAR for OFDM modes(2.4GHz 802.11g/n) was not required When the highest reported SAR for DSSS is adjusted by the ratio of OFDM modes (802.11g/n) to DSSS modes(802.11b)specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- 3) The tested channel results are marks in bold.

8.1.2 CONDUCTED POWER MEASUREMENTS OF WIFI 5.2G

SISO Ant B

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune-up	Average Power(dBm)
5.2G	802.11a	36	5180	6	12.50	12.33
		40	5200		12.50	12.26
		44	5220		12.50	12.33
		48	5240		12.50	12.32
	802.11n HT20	36	5180	MCS0	12.50	12.24
		40	5200		12.50	12.29
		44	5220		12.50	12.34
		48	5240		12.50	12.35
	802.11n HT40	38	5190	MCS0	12.50	12.32
		46	5230		12.50	12.27
	802.11ac VHT20	36	5180	MCS0	12.50	12.28
		40	5200		12.50	12.27
		44	5220		12.50	12.34
		48	5240		12.50	12.27
	802.11ac VHT40	38	5190	MCS0	12.50	12.22
		46	5230		12.50	12.27
	802.11ac VHT80	42	5210	MCS0	12.50	12.19

SISO Ant A

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune-up	Average Power(dBm)
5.2G	802.11a	36	5180	6	12.50	12.29
		40	5200		12.50	12.30
		44	5220		12.50	12.44
		48	5240		12.50	12.27
	802.11n HT20	36	5180	MCS0	12.50	12.39
		40	5200		12.50	12.46
		44	5220		12.50	12.33
		48	5240		12.50	12.35
	802.11n HT40	38	5190	MCS0	12.50	12.26
		46	5230		12.50	12.17
	802.11ac VHT20	36	5180	MCS0	12.50	12.22
		40	5200		12.50	12.29
		44	5220		12.50	12.36
		48	5240		12.50	12.41
	802.11ac VHT40	38	5190	MCS0	12.50	12.05
		46	5230		12.50	12.17
	802.11ac VHT80	42	5210	MCS0	12.50	12.28

MIMO (Ant A+Ant B)

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT B Average Power(dBm)	ANT A Average Power(dBm)	Max. Tune-up	Total Average Power(dBm)
5.2G	802.11a	36	5180	6	9.37	9.15	12.50	12.27
		40	5200		9.24	9.28	12.50	12.27
		44	5220		9.26	9.27	12.50	12.28
		48	5240		9.22	9.41	12.50	12.33
	802.11n HT20	36	5180	MCS8	9.32	9.31	12.50	12.33
		40	5200		9.23	9.38	12.50	12.32
		44	5220		9.30	9.37	12.50	12.35
		48	5240		9.33	9.36	12.50	12.36
	802.11n HT40	38	5190	MCS8	9.13	9.25	12.50	12.20
		46	5230		9.30	9.27	12.50	12.30
	802.11ac VHT20	36	5180	MCS8	9.33	9.21	12.50	12.28
		40	5200		9.35	9.29	12.50	12.33
		44	5220		9.40	9.27	12.50	12.35
		48	5240		9.38	9.35	12.50	12.38
	802.11ac VHT40	38	5190	MCS8	9.25	9.27	12.50	12.27
		46	5230		9.37	9.24	12.50	12.32
	802.11ac VHT80	42	5210	MCS8	9.21	9.28	12.50	12.26

Note: The Average conducted power of WiFi is measured with RMS detector.

8.1.3 CONDUCTED POWER MEASUREMENTS OF WIFI 5.3G

SISO Ant B

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune-up	Average Power(dBm)
5.3G	802.11a	52	5260	6	12.50	12.24
		56	5280		12.50	12.19
		60	5300		12.50	12.31
		64	5320		12.50	12.28
	802.11n HT20	52	5260	MCS0	12.50	12.22
		56	5280		12.50	12.19
		60	5300		12.50	12.35
		64	5320		12.50	12.31
	802.11n HT40	54	5270	MCS0	12.50	12.32
		62	5310		12.50	12.19
	802.11ac VHT20	52	5260	MCS0	12.50	12.21
		56	5280		12.50	12.22
		60	5300		12.50	12.23
		64	5320		12.50	12.18
	802.11ac VHT40	54	5270	MCS0	12.50	12.32
		62	5310		12.50	12.29
	802.11ac VHT80	58	5290	MCS0	12.50	12.23

SISO Ant A

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune-up	Average Power(dBm)
5.3G	802.11a	52	5260	6	12.50	12.40
		56	5280		12.50	12.31
		60	5300		12.50	12.32
		64	5320		12.50	12.22
	802.11n HT20	52	5260	MCS0	12.50	12.21
		56	5280		12.50	12.44
		60	5300		12.50	12.34
		64	5320		12.50	12.34
	802.11n HT40	54	5270	MCS0	12.50	12.21
		62	5310		12.50	12.08
	802.11ac VHT20	52	5260	MCS0	12.50	12.26
		56	5280		12.50	12.16
		60	5300		12.50	12.31
		64	5320		12.50	12.39
	802.11ac VHT40	54	5270	MCS0	12.50	12.28
		62	5310		12.50	12.20
	802.11ac VHT80	58	5290	MCS0	12.50	12.36

MIMO (Ant A+Ant B)

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT B Average Power(dBm)	ANT A Average Power(dBm)	Max. Tune-up	Total Average Power(dBm)
5.3G	802.11a	52	5260	6	9.36	9.23	12.50	12.31
		56	5280		9.38	9.28	12.50	12.34
		60	5300		9.22	9.28	12.50	12.26
		64	5320		9.30	9.32	12.50	12.32
	802.11n HT20	52	5260	MCS8	9.33	9.23	12.50	12.29
		56	5280		9.37	9.30	12.50	12.35
		60	5300		9.31	9.33	12.50	12.33
		64	5320		9.30	9.34	12.50	12.33
	802.11n HT40	54	5270	MCS8	9.38	9.27	12.50	12.34
		62	5310		9.25	9.31	12.50	12.29
	802.11ac VHT20	52	5260	MCS8	9.23	9.17	12.50	12.21
		56	5280		9.35	9.26	12.50	12.32
		60	5300		9.32	9.31	12.50	12.33
		64	5320		9.36	9.28	12.50	12.33
	802.11ac VHT40	54	5270	MCS8	9.38	9.28	12.50	12.34
		62	5310		9.36	9.27	12.50	12.33
	802.11ac VHT80	58	5290	MCS8	9.41	9.23	12.50	12.33

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) The tested channel results are marks in bold.

8.1.4 CONDUCTED POWER MEASUREMENTS OF WIFI 5.6G

SISO Ant B

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune-up	Average Power(dBm)
5.6G	802.11a	100	5500	6	12.50	12.35
		104	5520		12.50	12.37
		108	5540		12.50	12.38
		112	5560		12.50	12.27
		116	5580		12.50	12.32
		132	5660		12.50	12.31
		136	5680		12.50	12.19
		140	5700		12.50	12.26
	802.11n HT20	100	5500	MCS0	12.50	12.22
		104	5520		12.50	12.24
		108	5540		12.50	12.25
		112	5560		12.50	12.31
		116	5580		12.50	12.28
		132	5660		12.50	12.19
		136	5680		12.50	12.16
		140	5700		12.50	12.29
	802.11n HT40	102	5510	MCS0	12.50	12.25
		110	5550		12.50	12.38
		118	5590		12.50	12.32
		126	5630		12.50	12.26
		134	5670		12.50	12.23
	802.11ac VHT20	100	5500	MCS0	12.50	12.18
		104	5520		12.50	12.27
		108	5540		12.50	12.32
		112	5560		12.50	12.35
		116	5580		12.50	12.37
		132	5660		12.50	12.28
		136	5680		12.50	12.21
		140	5700		12.50	12.25
	802.11ac VHT40	102	5510	MCS0	12.50	12.28
		110	5550		12.50	12.45
		118	5590		12.50	12.37
		126	5630		12.50	12.35
		134	5670		12.50	12.23
	802.11ac VHT80	106	5530	MCS0	12.50	12.36
		122	5610		12.50	12.33

SISO Ant A

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune-up	Average Power(dBm)
5.6G	802.11a	100	5500	6	12.50	12.23
		104	5520		12.50	12.30
		108	5540		12.50	12.48
		112	5560		12.50	12.15
		116	5580		12.50	12.27
		132	5660		12.50	12.42
		136	5680		12.50	12.31
		140	5700		12.50	12.37
	802.11n HT20	100	5500	MCS0	12.50	12.22
		104	5520		12.50	12.35
		108	5540		12.50	12.49
		112	5560		12.50	12.31
		116	5580		12.50	12.42
		132	5660		12.50	12.44
		136	5680		12.50	12.42
		140	5700		12.50	12.34
	802.11n HT40	102	5510	MCS0	12.50	12.11
		110	5550		12.50	12.20
		118	5590		12.50	12.22
		126	5630		12.50	12.16
		134	5670		12.50	12.28
	802.11ac VHT20	100	5500	MCS0	12.50	12.15
		104	5520		12.50	12.24
		108	5540		12.50	12.25
		112	5560		12.50	12.41
		116	5580		12.50	12.08
		132	5660		12.50	12.20
		136	5680		12.50	12.22
		140	5700		12.50	12.28
	802.11ac VHT40	102	5510	MCS0	12.50	12.29
		110	5550		12.50	12.38
		118	5590		12.50	12.19
		126	5630		12.50	12.12
		134	5670		12.50	12.26
	802.11ac VHT80	106	5530	MCS0	12.50	12.26
		122	5610		12.50	12.13

MIMO (Ant A+Ant B)

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT B Average Power(dBm)	ANT A Average Power(dBm)	Max. Tune-up	Total Average Power(dBm)
5.6G	802.11a	100	5500	6	9.31	9.15	12.50	12.24
		104	5520		9.42	9.24	12.50	12.34
		108	5540		9.36	9.32	12.50	12.35
		112	5560		9.45	9.38	12.50	12.43
		116	5580		9.40	9.36	12.50	12.39
		132	5660		9.36	9.31	12.50	12.35
		136	5680		9.38	9.29	12.50	12.35
		140	5700		9.34	9.28	12.50	12.32
	802.11n HT20	100	5500	MCS8	9.30	9.31	12.50	12.32
		104	5520		9.20	9.38	12.50	12.30
		108	5540		9.42	9.40	12.50	12.42
		112	5560		9.40	9.36	12.50	12.39
		116	5580		9.32	9.34	12.50	12.34
		132	5660		9.38	9.18	12.50	12.29
		136	5680		9.20	9.34	12.50	12.28
		140	5700		9.30	9.14	12.50	12.23
	802.11n HT40	102	5510	MCS8	9.23	9.26	12.50	12.26
		110	5550		9.35	9.22	12.50	12.30
		118	5590		9.41	9.27	12.50	12.35
		126	5630		9.28	9.32	12.50	12.31
		134	5670		9.36	9.16	12.50	12.27
	802.11ac VHT20	100	5500	MCS8	9.31	9.16	12.50	12.25
		104	5520		9.32	9.22	12.50	12.28
		108	5540		9.33	9.28	12.50	12.32
		112	5560		9.27	9.31	12.50	12.30
		116	5580		9.12	9.33	12.50	12.24
		132	5660		9.13	9.32	12.50	12.24
		136	5680		9.36	9.16	12.50	12.27
		140	5700		9.25	9.24	12.50	12.26
	802.11ac VHT40	102	5510	MCS8	9.26	9.24	12.50	12.26
		110	5550		9.28	9.19	12.50	12.25
		118	5590		9.34	9.26	12.50	12.31
		126	5630		9.22	9.31	12.50	12.28
		134	5670		9.31	9.25	12.50	12.29
	802.11ac VHT80	106	5530	MCS8	9.24	9.16	12.50	12.21
		122	5610		9.19	9.32	12.50	12.27

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) The tested channel results are marks in bold.

8.1.5 CONDUCTED POWER MEASUREMENTS OF WIFI 5.8G

SISO Ant B

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune-up	Average Power(dBm)
5.8G	802.11a	149	5745	6	12.50	12.24
		153	5765		12.50	12.26
		157	5785		12.50	12.22
		161	5805		12.50	12.19
		165	5825		12.50	12.17
	802.11n HT20	149	5745	MCS0	12.50	12.23
		153	5765		12.50	12.21
		157	5785		12.50	12.24
		161	5805		12.50	12.32
		165	5825		12.50	12.27
	802.11n HT40	151	5755	MCS0	12.50	12.29
		159	5795		12.50	12.15
	802.11ac VHT20	149	5745	MCS0	12.50	12.26
		153	5765		12.50	12.31
		157	5785		12.50	12.32
		161	5805		12.50	12.25
		165	5825		12.50	12.28
	802.11ac VHT40	151	5755	MCS0	12.50	12.26
		159	5795		12.50	12.31
	802.11ac VHT80	155	5775	MCS0	12.50	12.27

SISO Ant A

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Max. Tune-up	Average Power(dBm)
5.8G	802.11a	149	5745	6	12.50	12.41
		153	5765		12.50	12.47
		157	5785		12.50	12.31
		161	5805		12.50	12.37
		165	5825		12.50	12.36
	802.11n HT20	149	5745	MCS0	12.50	12.44
		153	5765		12.50	12.26
		157	5785		12.50	12.19
		161	5805		12.50	12.14
		165	5825		12.50	12.04
	802.11n HT40	151	5755	MCS0	12.50	12.15
		159	5795		12.50	12.18
	802.11ac VHT20	149	5745	MCS0	12.50	12.23
		153	5765		12.50	12.31
		157	5785		12.50	12.37
		161	5805		12.50	12.28
		165	5825		12.50	12.16
	802.11ac VHT40	151	5755	MCS0	12.50	12.31
		159	5795		12.50	12.24
	802.11ac VHT80	155	5775	MCS0	12.50	12.28

MIMO (Ant A+Ant B)

Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	ANT B Average Power(dBm)	ANT A Average Power(dBm)	Max. Tune-up	Total Average Power(dBm)
5.8G	802.11a	149	5745	6	9.28	9.35	12.50	12.33
		153	5765		9.34	9.38	12.50	12.37
		157	5785		9.37	9.27	12.50	12.33
		161	5805		9.25	9.22	12.50	12.25
		165	5825		9.36	9.16	12.50	12.27
	802.11n HT20	149	5745	MCS8	9.32	9.25	12.50	12.30
		153	5765		9.20	9.36	12.50	12.29
		157	5785		9.28	9.33	12.50	12.32
		161	5805		9.35	9.36	12.50	12.37
		165	5825		9.30	9.25	12.50	12.29
	802.11n HT40	151	5755	MCS8	9.38	9.18	12.50	12.29
		159	5795		9.21	9.17	12.50	12.20
	802.11ac VHT20	149	5745	MCS8	9.38	9.31	12.50	12.36
		153	5765		9.35	9.26	12.50	12.32
		157	5785		9.28	9.22	12.50	12.26
		161	5805		9.24	9.24	12.50	12.25
		165	5825		9.31	9.17	12.50	12.25
	802.11ac VHT40	151	5755	MCS8	9.37	9.15	12.50	12.27
		159	5795		9.38	9.21	12.50	12.31
	802.11ac VHT80	155	5775	MCS8	9.35	9.17	12.50	12.27

Note:

- 1) The Average conducted power of WiFi is measured with RMS detector.
- 2) The tested channel results are marks in bold.

8.1.6 CONDUCTED POWER MEASUREMENTS OF BT

BT	Average Conducted Power(dBm)			
	Max.	CH0	CH39	CH78
	Tune up	2402MHz	2441MHz	2480MHz
DH5	6.00	4.17	4.21	4.09
2DH5	6.00	4.05	4.08	4.02
3DH5	6.00	4.02	4.09	4.01

BT	Average Conducted Power(dBm)			
	Max.	CH0	CH19	CH39
	Tune up	2402MHz	2441MHz	2480MHz
BLE(1M)	6.00	4.17	4.06	4.03
BLE(2M)	4.00	3.34	2.87	2.67

Note: The tested channel results are marks in bold.

8.2 SAR TEST RESULTS

General Notes:

- 1) Per KDB447498 D01, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: $\leq 0.8 \text{ W/kg}$ or 2.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$. When the maximum output power variation across the required test channels is $> \frac{1}{2} \text{ dB}$, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8 \text{ W/kg}$; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR $< 1.45 \text{ W/kg}$, only one repeated measurement is required.
- 4) Per KDB941225 D06, the DUT Dimension is bigger than $9 \text{ cm} \times 5 \text{ cm}$, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is $\leq 1.2 \text{ W/kg}$, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is $> 1.5 \text{ W/kg}$, or $> 7.0 \text{ W/kg}$ for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing.

WLAN Notes:

1. For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak)SAR is used as the initial test position. When the reported SAR of the initial test position is $\leq 0.4 \text{ W/kg}$, further SAR measurement is not required for the other (remaining) test positions. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is $\leq 0.8 \text{ W/kg}$ or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 for 2.4GHZ WIFI single transmission chain operations, the highest measured maximum output power Channel for DSSS was selected for SAR measurement. SAR for OFDM modes(2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.1 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 for 5GHZ WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed power. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2W/kg. See Section 7.1 for more information.

8.2.1 SAR MEASUREMENT RESULT

1. SAR Measurement Result of 2.4G WiFi

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Platform	Ant	Ant Vendor	Data Rate	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 1g SAR
T01	802.11b	6	Rear Face	0	Tablet	B	Awan	1	16.5	16.27	0.09	0.399	0.172	0.421
T03	802.11b	6	Bottom Side	0	Tablet	B	Awan	1	16.5	16.27	0.03	0.513	0.205	0.541
T04	802.11b	6	Back of Screen	2.5	Notebook	B	Awan	1	16.5	16.27	-0.01	0.032	0.004	0.034
T05	802.11b	6	Back of Keyboard	0	Notebook	B	Awan	1	16.5	16.27	0.04	1.01	0.409	1.065
T06	802.11b	1	Back of Keyboard	0	Notebook	B	Awan	1	16.5	16.25	0.04	1.25	0.502	1.324
T07	802.11b	11	Back of Keyboard	0	Notebook	B	Awan	1	16.5	16.27	0.03	0.78	0.312	0.822
T08	802.11b	1	Back of Keyboard	0	Notebook	B	Pulse	1	16.5	16.25	-0.06	1.17	0.472	1.239
T09	802.11b	1	Back of Keyboard (1st repeated)	0	Notebook	B	Awan	1	16.5	16.25	-0.02	1.19	0.48	1.261
T10	802.11b	1	Back of Keyboard (2nd repeated)	0	Notebook	B	Awan	1	16.5	16.25	0.01	1.21	0.487	1.282
T12	802.11b	6	Rear Face	0	Tablet	A	Awan	1	16.5	16.36	0.05	0.704	0.281	0.727
T14	802.11b	6	Bottom Side	0	Tablet	A	Awan	1	16.5	16.36	-0.05	1.21	0.485	1.250
T15	802.11b	6	Back of Screen	2.5	Notebook	A	Awan	1	16.5	16.36	0.01	0.047	0.008	0.049
T16	802.11b	6	Back of Keyboard	0	Notebook	A	Awan	1	16.5	16.36	0.02	0.945	0.391	0.976
T17	802.11b	1	Bottom Side	0	Tablet	A	Awan	1	16.5	16.24	0.08	1.04	0.422	1.104
T18	802.11b	11	Bottom Side	0	Tablet	A	Awan	1	16.5	16.23	-0.05	1.17	0.469	1.245
T19	802.11b	6	Bottom Side	0	Tablet	A	Pulse	1	16.5	16.36	-0.02	1.16	0.448	1.198
T20	802.11b	6	Bottom Side (1st repeated)	0	Tablet	A	Awan	1	16.5	16.36	0.01	1.15	0.442	1.188
T21	802.11b	6	Bottom Side (2nd repeated)	0	Tablet	A	Awan	1	16.5	16.36	-0.07	1.19	0.468	1.229

Note: The value with boldface is the maximum SAR Value of each test band.

2. SAR Measurement Result of BT

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Platform	Ant	Ant Vendor	Data Rate	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 1g SAR
T23	BT DH5	39	Rear Face	0	Tablet	B	Awan	1	6	4.21	0.01	0.061	0.061	0.092
T25	BT DH5	39	Bottom Side	0	Tablet	B	Awan	1	6	4.21	0.09	0.067	0.061	0.101
T26	BT DH5	39	Back of Screen	2.5	Notebook	B	Awan	1	6	4.21	-0.02	<0.001	<0.001	<0.001
T27	BT DH5	39	Back of Keyboard	0	Notebook	B	Awan	1	6	4.21	0.01	0.083	0.068	0.125
T28	BT DH5	0	Back of Keyboard	0	Notebook	B	Awan	1	6	4.17	0.02	0.074	0.065	0.113
T29	BT DH5	78	Back of Keyboard	0	Notebook	B	Awan	1	6	4.09	0.06	0.069	0.064	0.107
T30	BT DH5	39	Back of Keyboard	0	Notebook	B	Pulse	1	6	4.21	-0.01	0.072	0.065	0.109

Note: The value with boldface is the maximum SAR Value of each test band.

3. SAR Measurement Result of 5G WiFi

Test No.	Band	Channel	Test Position	Separation Distance (cm)	Platform	Ant	Ant Vendor	Data Rate	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 1g SAR
T32	802.11ac80	58	Rear Face	0	Tablet	B	Awan	mcs0	12.5	12.23	-0.05	0.437	0.275	0.465
T34	802.11ac80	58	Bottom Side	0	Tablet	B	Awan	mcs0	12.5	12.23	0.04	0.468	0.283	0.498
T35	802.11ac80	58	Back of Screen	2.5	Notebook	B	Awan	mcs0	12.5	12.23	0.05	0.134	0.035	0.143
T36	802.11ac80	58	Back of Keyboard	0	Notebook	B	Awan	mcs0	12.5	12.23	0.06	0.797	0.426	0.848
T37	802.11ac80	58	Back of Keyboard	0	Notebook	B	Pulse	mcs0	12.5	12.23	-0.09	0.68	0.375	0.724
T40	802.11ac80	58	Rear Face	0	Tablet	A	Awan	mcs0	12.5	12.36	0.16	0.395	0.297	0.408
T42	802.11ac80	58	Bottom Side	0	Tablet	A	Awan	mcs0	12.5	12.36	-0.09	0.458	0.302	0.473
T43	802.11ac80	58	Back of Screen	2.5	Notebook	A	Awan	mcs0	12.5	12.36	-0.02	0.107	0.052	0.111
T44	802.11ac80	58	Back of Keyboard	0	Notebook	A	Awan	mcs0	12.5	12.36	-0.08	0.446	0.326	0.461
T45	802.11ac80	58	Bottom Side	0	Tablet	A	Pulse	mcs0	12.5	12.36	0.02	0.449	0.304	0.464
T47	802.11ac80	106	Rear Face	0	Tablet	B	Awan	mcs0	12.5	12.36	-0.04	0.494	0.319	0.510
T49	802.11ac80	106	Bottom Side	0	Tablet	B	Awan	mcs0	12.5	12.36	-0.04	0.632	0.358	0.653
T50	802.11ac80	106	Back of Screen	2.5	Notebook	B	Awan	mcs0	12.5	12.36	0.12	0.029	0.005	0.030
T51	802.11ac80	106	Back of Keyboard	0	Notebook	B	Awan	mcs0	12.5	12.36	0.02	0.887	0.497	0.916
T52	802.11ac80	122	Back of Keyboard	0	Notebook	B	Awan	mcs0	12.5	12.33	-0.05	0.743	0.413	0.773
T54	802.11ac80	106	Back of Keyboard	0	Notebook	B	Pulse	mcs0	12.5	12.36	0.01	0.846	0.478	0.874
T55	802.11ac80	106	Back of Keyboard (1st repeated)	0	Notebook	B	Awan	mcs0	12.5	12.36	-0.06	0.864	0.48	0.892
T58	802.11ac80	106	Rear Face	0	Tablet	A	Awan	mcs0	12.5	12.26	-0.04	0.665	0.412	0.703
T60	802.11ac80	106	Bottom Side	0	Tablet	A	Awan	mcs0	12.5	12.26	0.17	0.856	0.46	0.905
T61	802.11ac80	106	Back of Screen	2.5	Notebook	A	Awan	mcs0	12.5	12.26	0.06	0.059	0.008	0.062
T62	802.11ac80	106	Back of Keyboard	0	Notebook	A	Awan	mcs0	12.5	12.26	-0.09	0.878	0.515	0.928
T63	802.11ac80	122	Back of Keyboard	0	Notebook	A	Awan	mcs0	12.5	12.13	0.08	0.727	0.453	0.792
T65	802.11ac80	106	Back of Keyboard	0	Notebook	A	Pulse	mcs0	12.5	12.26	-0.02	0.863	0.493	0.912
T66	802.11ac80	106	Back of Keyboard (1st repeated)	0	Notebook	A	Awan	mcs0	12.5	12.26	0.12	0.852	0.457	0.900
T69	802.11ac80	155	Rear Face	0	Tablet	B	Awan	mcs0	12.5	12.27	-0.07	0.453	0.32	0.478
T71	802.11ac80	155	Bottom Side	0	Tablet	B	Awan	mcs0	12.5	12.27	-0.08	0.633	0.363	0.667
T72	802.11ac80	155	Back of Screen	2.5	Notebook	B	Awan	mcs0	12.5	12.27	0.02	0.047	0.007	0.049
T73	802.11ac80	155	Back of Keyboard	0	Notebook	B	Awan	mcs0	12.5	12.27	-0.08	0.83	0.501	0.875
T74	802.11ac80	155	Back of Keyboard	0	Notebook	B	Pulse	mcs0	12.5	12.27	0.03	0.815	0.486	0.859
T75	802.11ac80	155	Back of Keyboard (1st repeated)	0	Notebook	B	Awan	mcs0	12.5	12.27	-0.02	0.809	0.456	0.853
T78	802.11ac80	155	Rear Face	0	Tablet	A	Awan	mcs0	12.5	12.28	-0.07	0.599	0.397	0.630
T80	802.11ac80	155	Bottom Side	0	Tablet	A	Awan	mcs0	12.5	12.28	-0.02	0.776	0.433	0.816
T81	802.11ac80	155	Back of Screen	2.5	Notebook	A	Awan	mcs0	12.5	12.28	0.02	0.065	0.010	0.068
T82	802.11ac80	155	Back of Keyboard	0	Notebook	A	Awan	mcs0	12.5	12.28	-0.02	0.761	0.472	0.801
T83	802.11ac80	155	Bottom Side	0	Tablet	A	Pulse	mcs0	12.5	12.28	0.11	0.754	0.441	0.793

Note: The value with boldface is the maximum SAR Value of each test band.

8.3 MULTIPLE TRANSMITTER EVALUATION

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v06.

The location of the antennas inside the EUT, please refer to Appendix E.

8.3.1 STAND-ALONE SAR TEST EXCLUSION

Per FCC KDB 447498D01, SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions, including network hand-offs, is greater than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Body
1	WLAN 2.4GHz Ant B + WLAN 2.4GHz Ant A	Yes
2	WLAN 5.2GHz Ant B + WLAN 5.2GHz Ant A	Yes
3	WLAN 5.3GHz Ant B + WLAN 5.3GHz Ant A	Yes
4	WLAN 5.6GHz Ant B + WLAN 5.6GHz Ant A	Yes
5	WLAN 5.8GHz Ant B + WLAN 5.8GHz Ant A	Yes
6	BT Ant B + WLAN 2.4GHz Ant A	Yes
7	BT Ant B + WLAN 5.2GHz Ant A	Yes
8	BT Ant B + WLAN 5.3GHz Ant A	Yes
9	BT Ant B + WLAN 5.6GHz Ant A	Yes
10	BT Ant B + WLAN 5.8GHz Ant A	Yes

Note: Only the Ant B supports BT function.

8.3.2 SIMULTANEOUS TRANSMISSION CONDITIONS

About WIFI and Bluetooth transmit simultaneously

Band	Position	Front Face	Rear Face	Right Side	Left Side	Bottom Side	Back of Screen	Back of Keyboard
Ant B	WiFi 2.4G	/	0.421	/	/	0.541	0.034	1.324
	WiFi 5.2G	/	/	/	/	/	/	/
	WiFi 5.3G	/	0.465	/	/	0.498	0.143	0.848
	WiFi 5.6G	/	0.510	/	/	0.653	0.030	0.916
	WiFi 5.8G	/	0.478	/	/	0.667	0.049	0.875
	BT	/	0.092	/	/	0.101	<0.001	0.125
Ant A	WiFi 2.4G	/	0.727	/	/	1.250	0.049	0.976
	WiFi 5.2G	/	/	/	/	/	/	/
	WiFi 5.3G	/	0.408	/	/	0.473	0.111	0.461
	WiFi 5.6G	/	0.703	/	/	0.905	0.062	0.928
	WiFi 5.8G	/	0.630	/	/	0.816	0.068	0.801
MAX $\sum \text{SAR}_{1g}$		/	1.213	/	/	Refer to SPLSR results	0.254	Refer to SPLSR results

Test Position	Reported SAR_{1g}	Ant A WiFi 2.4G	Ant A WiFi 5.3G	Ant A WiFi 5.6G	Ant A WiFi 5.8G	MAX $\sum \text{SAR}_{1g}$
Bottom Side	Ant B WiFi 2.4G	1.791	/	/	/	Refer to SPLSR result (1)
	Ant B WiFi 5.3G	/	0.971	/	/	0.971
	Ant B WiFi 5.6G	/	/	1.558	/	1.558
	Ant B WiFi 5.8G	/	/	/	1.483	1.483
	BT	1.351	0.574	1.006	0.917	1.351

Test Position	Reported SAR_{1g}	Ant A WiFi 2.4G	Ant A WiFi 5.3G	Ant A WiFi 5.6G	Ant A WiFi 5.8G	MAX $\sum \text{SAR}_{1g}$
Back of Keyboard	Ant B WiFi 2.4G	2.300	/	/	/	Refer to SPLSR result (2)
	Ant B WiFi 5.3G	/	1.309	/	/	1.309
	Ant B WiFi 5.6G	/	/	1.844	/	Refer to SPLSR result (3)
	Ant B WiFi 5.8G	/	/	/	1.676	Refer to SPLSR result (4)
	BT	1.101	0.586	1.053	0.926	1.101

Note: (1) MAX. $\sum \text{SAR}_{1g} < 1.6 \text{ W/Kg}$, the SAR to peak location separation ratio should not be considered, otherwise, see section 8.3.3 for more information.

(2) The highest simultaneous SAR value=1.558W/Kg, per KDB690783 D01.

8.3.3 SIMULTANEOUS TRANSMISSION CONLCUSION

According to KDB447498 D01, When the sum of SAR is larger than limit, SAR test exclusion is determined by the SAR to peak location separation ratio(SPLSR).When the SAR to peak location ratio for each pair of antennas is 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion. When 10-g SAR applies, the ratio must be ≤ 0.10 .

When SAR is measured for both antennas in the pair the peak location separation distance is computed by the following formula:


$$\text{Distance}_{\text{Tx1-Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

$$\text{SPLS Ratio} = (\text{SAR}_1 + \text{SAR}_2)^{1.5}/R_i$$

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location should be translated onto the test device to determine the peak location separation for the antenna pair. The ERP location on the phantom is aligned with the ERP location on the handset, with 6mm separation in the z coordinate due to the ear spacer. A measured peak location can be translated onto the handset, with respect to the ERP location, by ignoring the 6 mm offset in the z coordinate. The assumed peak location of the antenna with estimated SAR can also be determined with respect to the ERP location on the handset. The peak location separation distance is estimated by the x and y coordinated of the peaks, referenced to the ERP location. While flat phantoms are not expected to have these issues, the same peak translation approach should be applied to determine peak location separation.

1) The sum of aggregate 1g SAR was above 1.6 W/kg for Bottom Side configuration with Ant A WIFI 2.4G and Ant B WIFI 2.4G.


The Peak SAR location is as below:

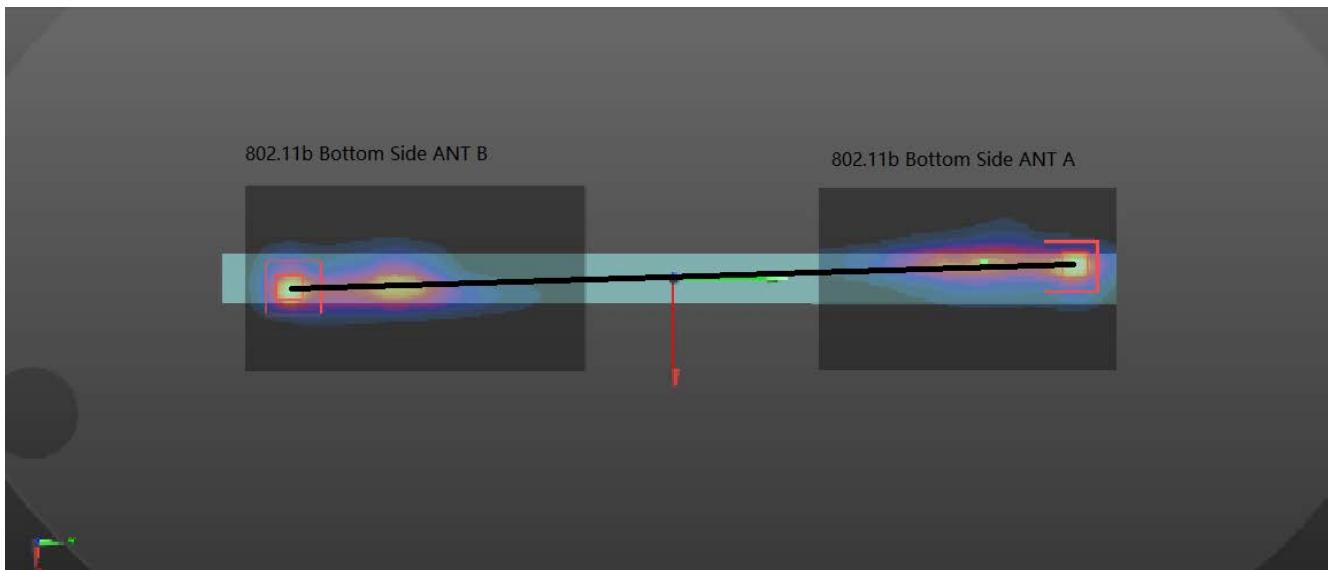

Mode	Reported SAR _{1g}	Peak SAR _{1g}	X	Y	Z	D(mm)	SPLSR	Ratio Limit	Simultaneous SAR
	mW/g	mW/g	m	m	m				
Ant A WiFi 2.4G	1.250	1.33	-0.006	0.162	-0.178	314.2	0.008	0.04	No
Ant B WiFi 2.4G	0.541	0.49	0.0045	-0.152	-0.178				

2) The sum of aggregate 1g SAR was above 1.6 W/kg for Back of Keyboard configuration with Ant A WiFi 2.4G and Ant B WiFi 2.4G.


The Peak SAR location is as below:

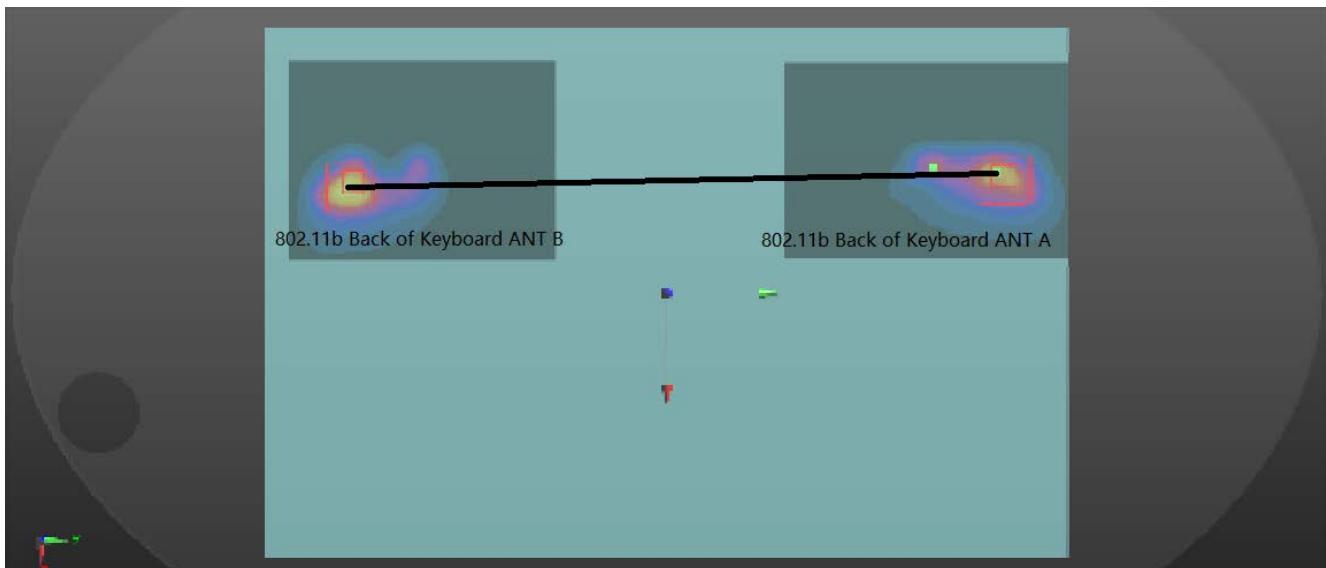

Mode	Reported SAR _{1g}	Peak SAR _{1g}	X	Y	Z	D(mm)	SPLSR	Ratio Limit	Simultaneous SAR
	mW/g	mW/g	m	m	m				
Ant A WiFi 2.4G	0.976	1.12	-0.054	0.15	-0.177	295.1	0.012	0.04	No
Ant B WiFi 2.4G	1.324	1.17	-0.0465	-0.145	-0.178				

3) The sum of aggregate 1g SAR was above 1.6 W/kg for Back of Keyboard configuration with Ant A WiFi 5.6G and Ant B WiFi 5.6G.


The Peak SAR location is as below:

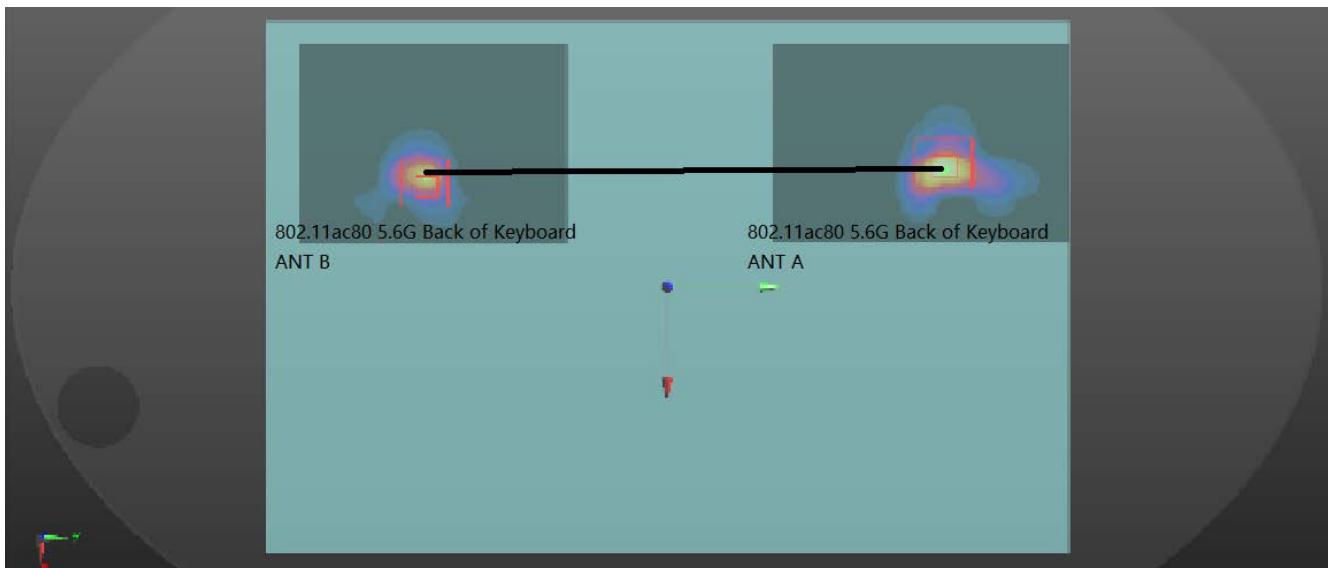

Mode	Reported SAR _{1g}	Peak SAR _{1g}	X	Y	Z	D(mm)	SPLSR	Ratio Limit	Simultaneous SAR
	mW/g	mW/g	m	m	m				
Ant A WiFi 5.6G	1.61	0.928	-0.053	0.129	-0.179	229.3	0.011	0.04	No
Ant B WiFi 5.6G	1.49	0.916	-0.042	-0.1	-0.18				

4) The sum of aggregate 1g SAR was above 1.6 W/kg for Back of Keyboard configuration with Ant A WIFI 5.8G and Ant B WIFI 5.8G.

The Peak SAR location is as below:

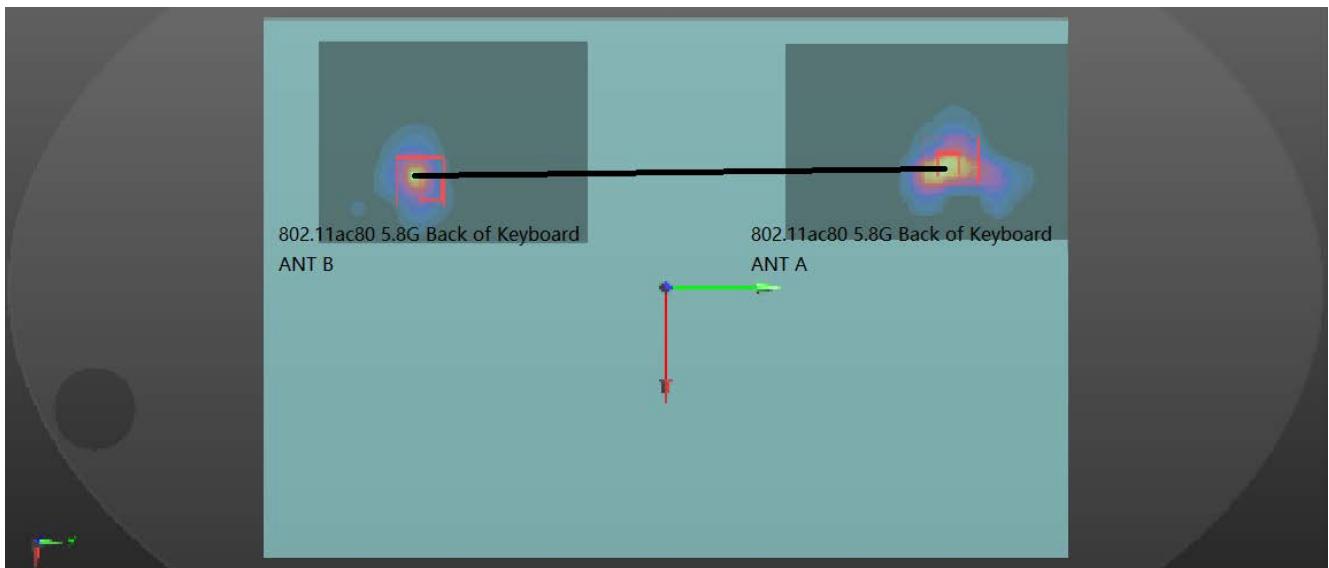

Mode	Reported SAR _{1g}	Peak SAR _{1g}	X	Y	Z	D(mm)	SPLSR	Ratio Limit	Simultaneous SAR
	mW/g	mW/g	m	m	m				
Ant A WiFi 5.8G	1.36	0.801	-0.053	0.128	-0.18	217.3	0.010	0.04	No
Ant B WiFi 5.8G	1.18	0.875	-0.042	-0.089	-0.181				

APPENDIX


1. Test Layout

Specific Absorption Rate Test Layout



Liquid depth in the flat Phantom ($\geq 15\text{cm}$ depth)

MSL2300MHz-2700MHz_16.5cm

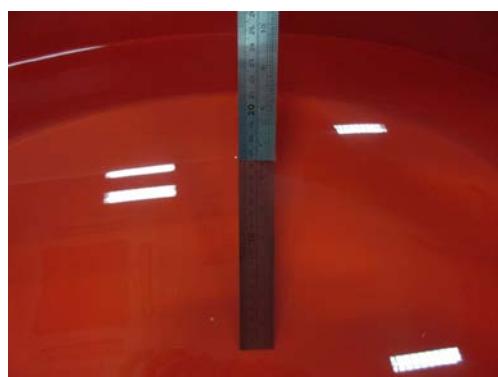

MSL5GHz_15.2cm



Appendix A. SAR Plots of System Verification

(Pls See BTL-FCC SAR-1-1905H006_Appendix A.)

Appendix B. SAR Plots of SAR Measurement

(Pls See BTL-FCC SAR-1-1905H006_Appendix B.)

Appendix C. Calibration Certificate

(Pls See BTL-FCC SAR-1-1905H006_Appendix C.)

Appendix D. Photographs of the Test Set-Up

(Pls See BTL-FCC SAR-1-1905H006_Appendix D.)

Appendix E. Antenna location and standalone SAR test exclusion

(Pls See BTL-FCC SAR-1-1905H006_Appendix E.)

End of Test Report