

# TEST REPORT

**Applicant:** Realtek Semiconductor Corp.  
**Address:** No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan  
**Equipment Type:** 11be RTL8922AE Combo module  
**Model Name:** RTL8922AE  
**Brand Name:** N/A  
**FCC ID:** TX2-RTL8922AE  
**Test Standard:** FCC 47 CFR Part 2.1093  
(refer to section 3.1)  
**Maximum SAR:** Body 2.4GHz(1 g): 0.12 W/kg  
Body 5GHz(1 g): 0.26 W/kg  
Body 6GHz(1 g): 0.15 W/kg  
**Sample Arrival Date:** Sep. 14, 2024  
**Test Date:** Oct. 15, 2024 - Oct. 19, 2024  
**Date of Issue:** Nov. 08, 2024

**ISSUED BY:**

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Xu Rui**Checked by:** Zong Liyao**Approved by:** Tolan Tu

(Testing Director)



**Revision History**

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Nov. 08, 2024</u>	<u>Initial Issue</u>

**TABLE OF CONTENTS**

1	GENERAL INFORMATION .....	4
1.1	Test Laboratory .....	4
1.2	Test Location .....	4
1.3	Test Environment Condition .....	4
2	PRODUCT INFORMATION .....	5
2.1	Applicant Information .....	5
2.2	Manufacturer Information .....	5
2.3	General Description for Equipment under Test (EUT) .....	5
2.4	Ancillary Equipment .....	6
2.5	Technical Information .....	6
3	SUMMARY OF TEST RESULT .....	8
3.1	Test Standards .....	8
3.2	Device Category and SAR Limit .....	9
3.3	Test Result Summary .....	10
3.4	Test Uncertainty .....	11
4	MEASUREMENT SYSTEM .....	12
4.1	Specific Absorption Rate (SAR) Definition .....	12
4.2	DASY SAR System .....	13
5	SYSTEM VERIFICATION .....	20
5.1	Purpose of System Check .....	20
5.2	System Check Setup .....	20
6	TEST POSITION CONFIGURATIONS .....	21
6.1	Laptop Exposure Condition .....	21
7	MEASUREMENT PROCEDURE .....	22

7.1	Measurement Process Diagram.....	22
7.2	SAR Scan General Requirement .....	23
7.3	Measurement Procedure.....	24
7.4	Area & Zoom Scan Procedure .....	24
7.5	Interim Procedures for WIFI 6E .....	24
8	CONDUCTED RF OUPUT POWER.....	25
8.1	WIFI.....	25
8.2	Bluetooth .....	70
9	TEST EXCLUSION CONSIDERATION.....	71
9.1	Antenna Location Sketch .....	71
9.2	SAR Test Consideration Table .....	73
10	TEST RESULT .....	76
10.1	Bluetooth .....	77
10.2	WIFI 2.4GHz.....	77
10.3	WIFI 5GHz.....	78
10.4	WIFI 6GHz.....	79
11	SAR Measurement Variability.....	80
12	SIMULTANEOUS TRANSMISSION.....	81
12.1	Simultaneous Transmission Mode Considerations .....	82
12.2	Sum SAR of Simultaneous Transmission .....	83
13	TEST EQUIPMENTS LIST .....	84
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT .....	85
ANNEX B	SYSTEM CHECK RESULT.....	86
ANNEX C	TEST DATA.....	97
ANNEX D	EUT EXTERNAL PHOTOS .....	123
ANNEX E	SAR TEST SETUP PHOTOS.....	123
ANNEX F	CALIBRATION REPORT .....	123
ANNEX G	TUNE-UP PROCEDURE .....	123

## 1 GENERAL INFORMATION

### 1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

### 1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China <input checked="" type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

### 1.3 Test Environment Condition

Ambient Temperature	18°C to 25°C
Ambient Relative Humidity	30% to 70%

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	Realtek Semiconductor Corp.
Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

### 2.2 Manufacturer Information

Manufacturer	Realtek Semiconductor Corp.
Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

### 2.3 General Description for Equipment under Test (EUT)

EUT Name	11be RTL8922AE Combo module
Model Name Under Test	RTL8922AE
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

#### 2.3.1 Host Information:

Product Name	Notebook Computer
Model Name	IdeaPad Slim 5 14ARP10, IdeaPad Slim 5 14AHP10, IdeaPad Slim 5 14AKP10
Brand Name	Lenovo

#### 2.3.2 Antenna Information:

Antenna Port	Model Name	Antenna Manufacturer	Antenna Type	Antenna Gain (dBi)								
				2.4 GHz	5.15-5.25 GHz	5.25-5.35 GHz	5.47-5.725 GHz	5.725-5.895 GHz	5.925-6.425 GHz	6.425-6.525 GHz	6.525-6.875 GHz	6.875-7.125 GHz
Main Antenna	AYP6Y-200097	AWAN	PIFA	1.96	2.33	2.33	2.39	2.40	2.25	1.95	2.14	2.21
Auxiliary Antenna	AYP6Y-200097		PIFA	1.91	2.71	2.71	2.31	2.79	2.85	1.94	2.12	2.71
Main Antenna	F-0G-XZ-0386-000-K0	Speed	PIFA	1.96	2.81	3.12	2.76	3.15	3.16	3.34	2.64	3.17
Auxiliary Antenna	F-0G-XZ-0386-000-K0		PIFA	2.46	1.19	1.97	1.87	3.21	2.72	3.25	3.12	3.06

## 2.4 Ancillary Equipment

Note: Not applicable.

## 2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n, VHT, 802.11ac, 802.11ax and 802.11be
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	2.4G WLAN; 5G WLAN; 6G WLAN; Bluetooth
802.11b/g	2412 ~ 2472 MHz
VHT20/VHT40	2412 ~ 2472 MHz
802.11ax(HE20/HE40)	2412 ~ 2472 MHz
802.11be(EHT20/EHT40)	2412 ~ 2472 MHz
802.11a	5150 ~ 5250 MHz 5250 ~ 5350 MHz 5470 ~ 5725 MHz 5725 ~ 5850 MHz 5815 ~ 5885 MHz
802.11n(HT20/HT40)	5150 ~ 5250 MHz 5250 ~ 5350 MHz 5470 ~ 5725 MHz 5725 ~ 5850 MHz 5815 ~ 5885 MHz
802.11ac(VHT20/VHT40/VHT80)	5150 ~ 5250 MHz 5250 ~ 5350 MHz 5470 ~ 5725 MHz 5725 ~ 5850 MHz 5815 ~ 5885 MHz
802.11ax(HE20/HE40/HE80)	5150 ~ 5250 MHz 5250 ~ 5350 MHz 5470 ~ 5725 MHz 5725 ~ 5850 MHz 5815 ~ 5885 MHz
802.11be(EHT20/EHT40/EHT80)	5150 ~ 5250 MHz 5250 ~ 5350 MHz 5470 ~ 5725 MHz 5725 ~ 5850 MHz 5815 ~ 5885 MHz
802.11ac(VHT160)/ 802.11ax(HE160)/ 802.11be(EHT160)	5150 ~ 5250 MHz 5470 ~ 5725 MHz 5815 ~ 5885 MHz
802.11a/	5925 ~ 6425 MHz

	802.11ax(HE20/HE40/HE80/ HE160)	6425 ~ 6525 MHz
	802.11be(EHT20/EHT40/EHT80/ EHT160)	6525 ~ 6875 MHz
	Bluetooth	6875 ~ 7125 MHz
	Bluetooth	2402 ~ 2480 MHz
Antenna Type	WLAN	PIFA
	Bluetooth	PIFA
Hotspot Function	N/A	
Exposure Category	General Population/Uncontrolled exposure	
Product Type	Portable Device	
EUT Type	<input checked="" type="checkbox"/> Production unit	<input type="checkbox"/> Identical prototype

### 3 SUMMARY OF TEST RESULT

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	ANSI C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	KDB 447498 D04 v01	447498 D04 Interim General RF Exposure Guidance v01
4	KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
5	KDB 865664 D02 v01r02	RF Exposure Reporting
6	KDB 248227 D01 v02r02	SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters
7	KDB 616217 D04 v01r02	SAR for laptop and tablets
8	IEC/IEEE 62209-1528:2020	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)

### 3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

**General Population/Uncontrolled Exposure:** Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**Occupational/Controlled Exposure:** Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

### 3.3 Test Result Summary

#### 3.3.1 Highest SAR (1 g Value)

Equipment Class	Band	Antenna	Maximum Scaled SAR (W/kg)	Maximum Report SAR (W/kg)
			Body (0mm)	Body (0mm)
DTS	2.4G WIFI	Aux.	0.10	<b>0.26</b>
	2.4G WIFI	Main	0.11	
U-NII-2A	5.3G WIFI	Aux.	0.24	
	5.3G WIFI	Main	0.25	
U-NII-2C	5.6G WIFI	Aux.	0.14	
	5.6G WIFI	Main	0.21	
U-NII-3	5.8G WIFI	Aux.	0.16	
	5.8G WIFI	Main	0.09	
U-NII-4	5.9G WIFI	Aux.	0.24	
	5.9G WIFI	Main	<b>0.26</b>	
U-NII-5/6/7/8	6G WIFI	Aux.	0.11	
	6G WIFI	Main	0.15	
DSS	Bluetooth	Aux.	0.12	
Limit (W/kg)			1.60	
Verdict			Pass	

#### 3.3.2 Highest Simultaneous Transmission SAR Values (1 g Value)

Equipment Class	Maximum Report SAR (W/kg)	SPLSR
	Body (0mm)	
	1g SAR	
DTS	0.36	/
NII	<b>0.63</b>	/
DSS	<b>0.63</b>	/
Limit (W/kg)	1.60	0.04
Verdict	Pass	Pass

Note: The simultaneous transmission SAR detail please refer to section 12.

### **3.4 Test Uncertainty**

According to KDB 865664 D01, when the highest measured 1 g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

The maximum 1 g SAR for the EUT in this report is 0.26 W/kg, which is lower than 1.5 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

## 4 MEASUREMENT SYSTEM

### 4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\mathbf{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$\mathbf{SAR} = \frac{\sigma E^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,

$\rho$  is the mass density of the tissue and  $E$  is the RMS electrical field strength.

## 4.2 DASY SAR System

### 4.2.1 DASY SAR System Diagram

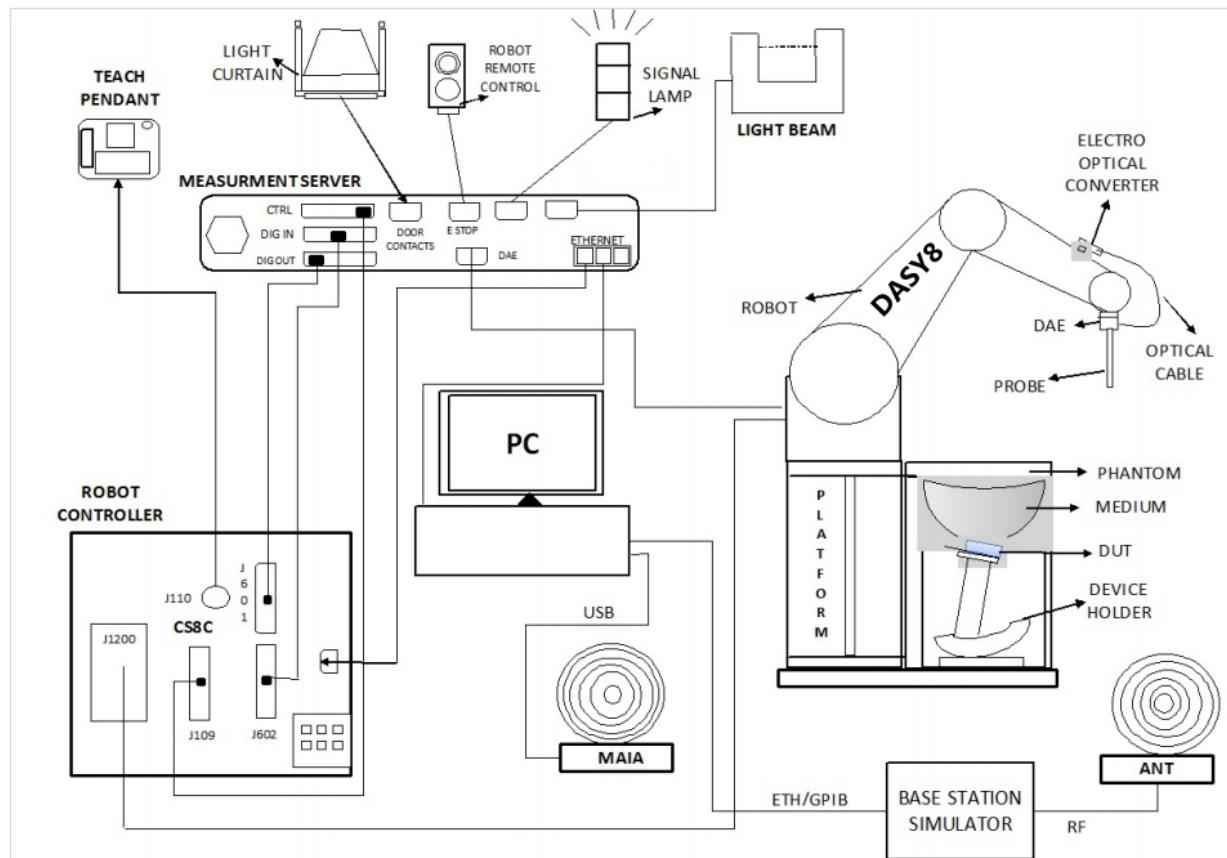


The DASY system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
6. The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

#### 4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:

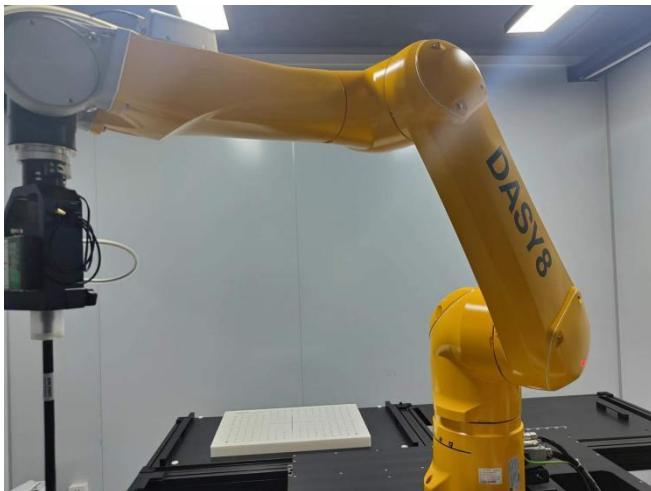

- **High precision**  
(repeatability  $\pm 0.02$  mm)
- **High reliability**  
(industrial design)
- **Low maintenance costs**  
(virtually maintenance free due to direct drive gears; no belt drives)
- **Jerk-free straight movements**  
(brush less synchron motors; no stepper motors)
- **Low ELF interference**  
(motor control \_elds shielded via the closed metallic construction shields)

#### 4.2.3 E-Field Probe

The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4 SN: 7893 & EX3DV4 SN: 7510 with following specifications is used.

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	4 MHz to 10 GHz; Linearity: $\pm 0.2$ dB
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis); $\pm 0.4$ dB in HSL (rotation normal to probe axis)
Dynamic range	5 $\mu$ W/g to $> 100$ mW/g; Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)



#### E-Field Probe Calibration Process

Probe calibration is realized, in compliance with IEC/IEEE 62209-1528 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the IEC/IEEE 62209-1528 annexe technique using reference guide at the five frequencies.

#### 4.2.4 Data Acquisition Electronics


The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



- Input Impedance: 200MOhm
- The Inputs: Symmetrical and Floating
- Common Mode Rejection: Above 80dB

#### 4.2.5 Phantoms

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of below 10 GHz. ELI V8.0 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI V8.0 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.

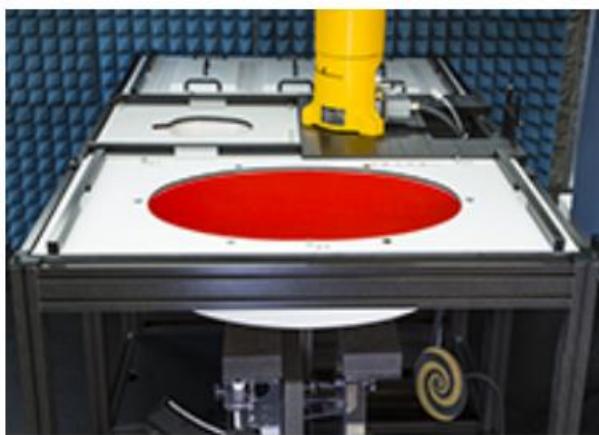

• Flat phantom

**Photo of Phantom SN2159**



Serial Number	Shell Thickness (mm)	Major ellipse axis (mm)	Minor axis(mm)
SN 2159 ELI V8.0	2.0 ± 0.2	600	400

#### 4.2.6 Device Holder


The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used. Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. Incompliance with CENELEC, the tilt angle uncertainty is lower than 1°.

#### 4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

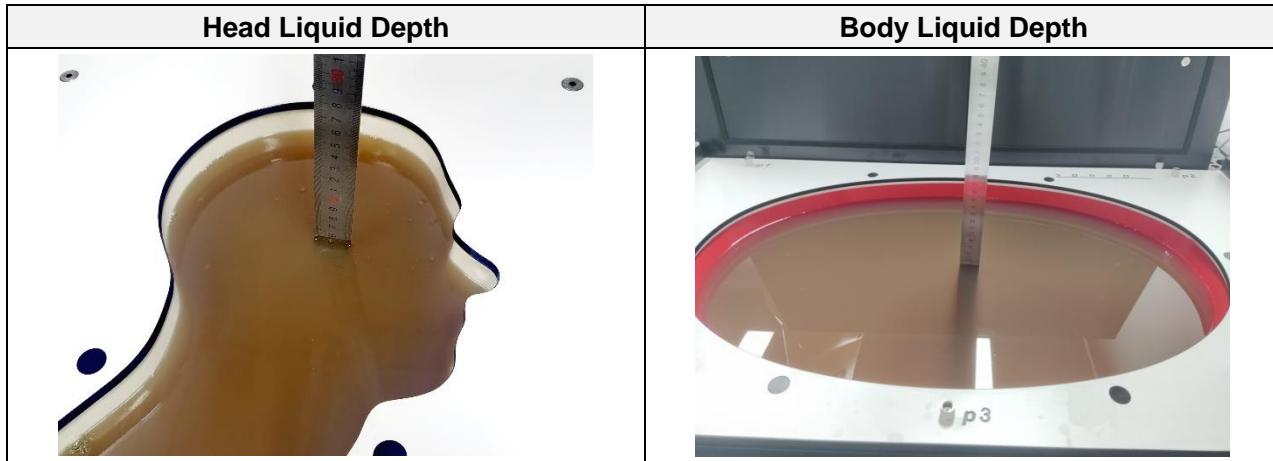

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

The following table gives the recipes for tissue simulating liquid.

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Head WideBand	SPEAG HBBL600-10000V6	600-10000	Ethanediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2,4-diol, Alkoxylated alcohol


## 5 SYSTEM VERIFICATION

### 5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 5.2 System Check Setup


In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

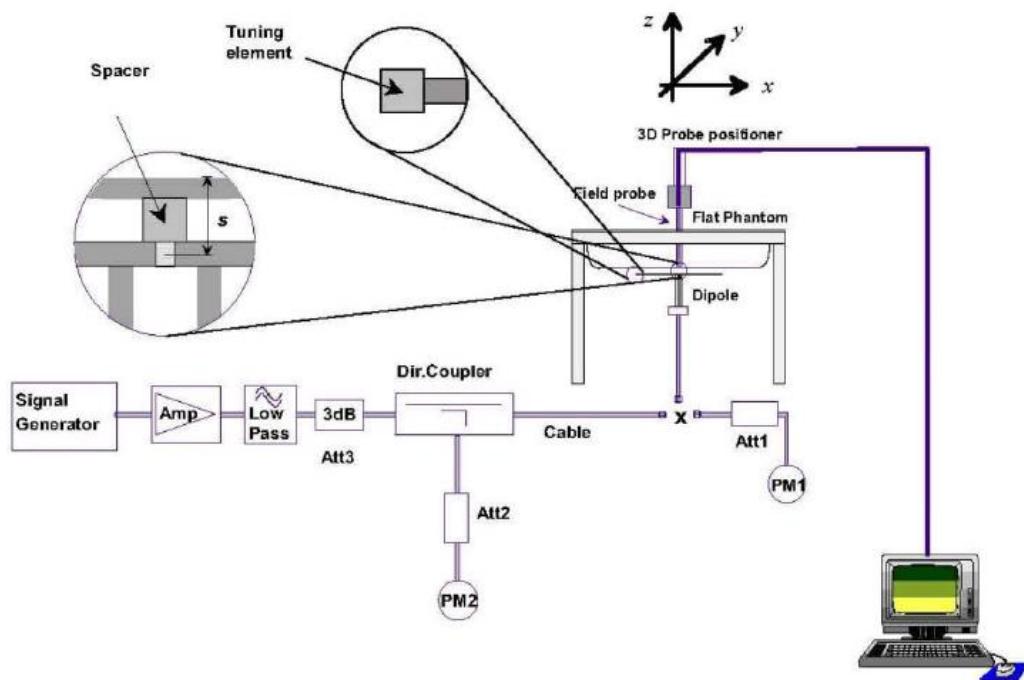

## 6 TEST POSITION CONFIGURATIONS


### 6.1 Laptop Exposure Condition

This DUT should consider one position which is bottom of laptop touching with phantom 0 mm air gap and the screen portion of the device shall be an open position at a 90° angle.

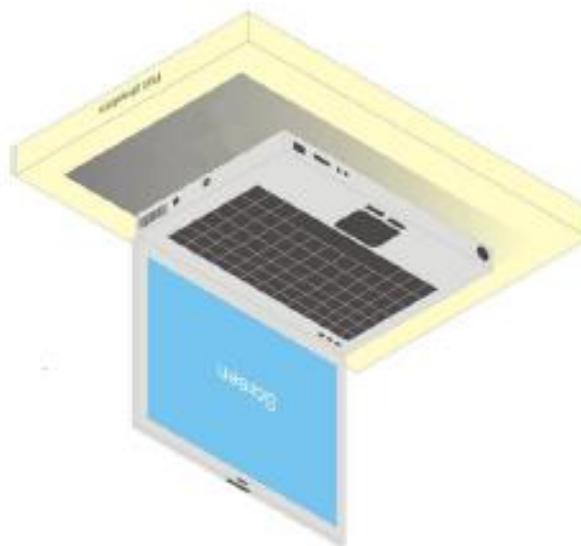

## 7 MEASUREMENT PROCEDURE

## 7.1 Measurement Process Diagram

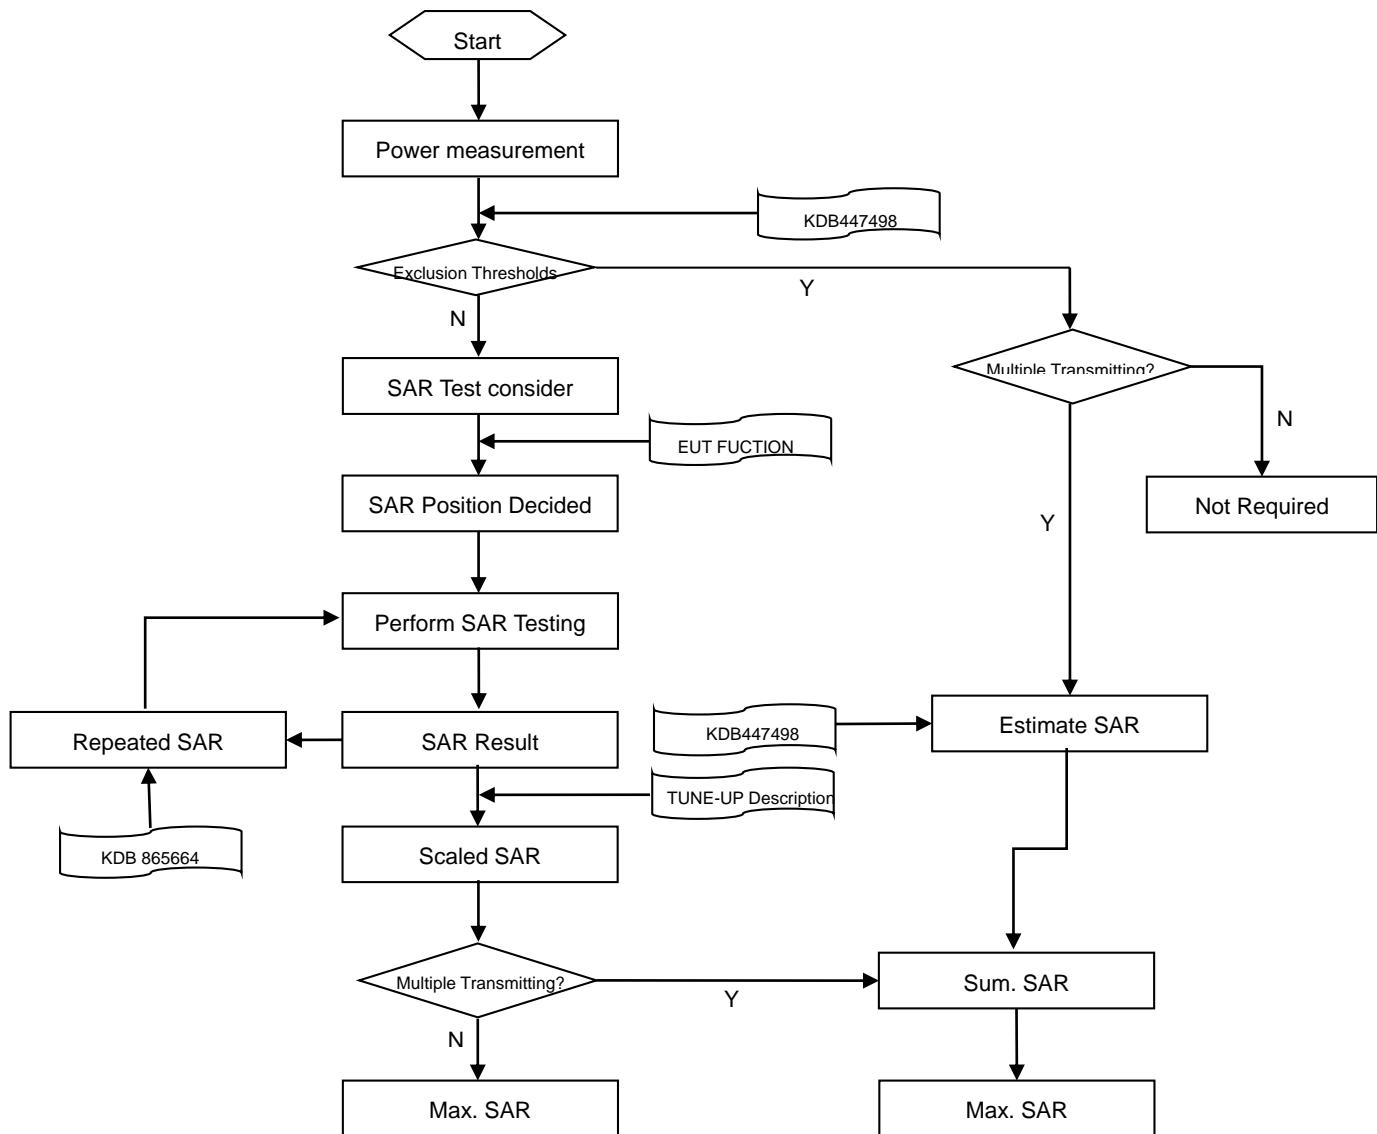

## 7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

		≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5±1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30°±1°	20°±1°
		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
Maximum area scan spatial resolution: $\Delta x$ Area , $\Delta y$ Area			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.
Maximum zoom scan spatial resolution: $\Delta x$ Zoom , $\Delta y$ Zoom		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z$ Zoom (n)		3–4 GHz: ≤ 4 mm
			4–5 GHz: ≤ 3 mm
			5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	3–4 GHz: ≤ 3 mm
			4–5 GHz: ≤ 2.5 mm
		Δz Zoom (n>1): between subsequent points	5–6 GHz: ≤ 2 mm
Minimum zoom scan volume	x, y, z	≥30 mm	3–4 GHz: ≥ 28 mm 4–5 GHz: ≥ 25 mm 5–6 GHz: ≥ 22 mm
Note:			
1. $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.			
2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

## 7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8 \* 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

## 7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

## 7.5 Interim Procedures for WIFI 6E

Interim procedures for FCC radio frequency (RF) exposure evaluations of U-NII 6-7 GHz band portable devices have been made available during the TCB workshop in April 2021. The procedure is summarized below:

- a. Evaluate SAR / APD with DASY6 Module SAR V16.0 or higher. The configurations to be tested are defined in the relevant Knowledge Database (KDB). The psSAR and absorbed psPD are reported.
- b. For the configuration with the highest SAR, evaluate the incident power density with DASY6 Module mmWave V2.4.2 or higher. The incident psPD must be adjusted per amount that the measurement uncertainty exceeds 30% before it is included in the test report.

## 8 CONDUCTED RF OUTPUT POWER

### 8.1 WIFI

#### 8.1.1 2.4G WIFI (Aux. Antenna)

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	15.72	16.00	Yes
		6	2437	15.63	16.00	Yes
		11	2462	<b>15.81</b>	16.00	Yes
		12	2467	13.19	14.00	No
		13	2472	10.34	11.00	No
	802.11g	1	2412	15.61	16.00	No
		6	2437	14.77	16.00	No
		11	2462	15.18	16.00	No
		12	2467	14.83	15.50	No
		13	2472	14.54	15.50	No
	VHT20	1	2412	14.88	16.00	No
		6	2437	15.43	16.00	No
		11	2462	15.52	16.00	No
		12	2467	14.57	15.50	No
		13	2472	14.54	15.50	No
	VHT40	3	2422	15.49	16.00	No
		6	2437	15.33	16.00	No
		9	2452	15.29	16.00	No
		10	2457	14.64	15.50	No
		11	2462	14.55	15.50	No
	802.11ax(HE20) (SU)	1	2412	15.16	16.00	No
		6	2437	15.44	16.00	No
		11	2462	15.68	16.00	No
		12	2467	14.80	15.50	No
		13	2472	14.77	15.50	No
	802.11ax(HE40) (SU)	3	2422	15.43	16.00	No
		6	2437	15.69	16.00	No
		9	2452	15.02	16.00	No
		10	2457	14.72	15.50	No
		11	2462	14.61	15.50	No
	802.11be(EHT20) (SU)	1	2412	15.51	16.00	No
		6	2437	15.21	16.00	No
		11	2462	15.54	16.00	No
		12	2467	14.56	15.50	No
		13	2472	14.78	15.50	No

802.11be(EHT40) (SU)	3	2422	15.19	16.00	No	
	6	2437	14.97	16.00	No	
	9	2452	15.51	16.00	No	
	10	2457	14.52	15.50	No	
	11	2462	14.80	15.50	No	
	802.11be(EHT20) (RU26)/0	1	2412	14.88	16.00	No
	802.11be(EHT20) (RU26)/4	6	2437	15.66	16.00	No
	802.11be(EHT20) (RU26)/8	11	2462	15.19	16.00	No
	802.11be(EHT20) (RU26)/8	12	2467	15.13	15.50	No
	802.11be(EHT20) (RU26)/8	13	2472	13.08	13.50	No
	802.11be(EHT20) (RU52)/37	1	2412	15.35	16.00	No
	802.11be(EHT20) (RU52)/39	6	2437	15.28	16.00	No
	802.11be(EHT20) (RU52)/40	11	2462	15.15	16.00	No
	802.11be(EHT20) (RU52)/40	12	2467	15.21	15.50	No
	802.11be(EHT20) (RU52)/40	13	2472	15.10	15.50	No
	802.11be(EHT20) (RU106)/53	1	2412	15.49	16.00	No
	802.11be(EHT20) (RU106)/54	6	2437	15.14	16.00	No
	802.11be(EHT20) (RU106)/55	11	2462	15.54	16.00	No
	802.11be(EHT20) (RU106)/56	12	2467	15.23	15.50	No
	802.11be(EHT20) (RU106)/57	13	2472	15.20	15.50	No
Note: According KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$ . Adjusted SAR = Report SAR * (max power (OFDM)/ max power (DSSS)) = 0.099 * (39.81mW/39.81mW) = 0.099 W/Kg, so the 2.4G OFDM SAR test is not required.						

**8.1.2 2.4G WIFI (Main Antenna)**

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	15.67	16.00	Yes
		6	2437	<b>15.91</b>	16.00	Yes
		11	2462	15.68	16.00	Yes
		12	2467	13.19	14.00	No
		13	2472	10.36	11.00	No
	802.11g	1	2412	15.00	16.00	No
		6	2437	15.51	16.00	No
		11	2462	15.11	16.00	No
		12	2467	14.69	15.50	No
		13	2472	14.43	15.50	No
	VHT20	1	2412	14.75	16.00	No
		6	2437	14.97	16.00	No
		11	2462	15.37	16.00	No
		12	2467	14.65	15.50	No
		13	2472	14.88	15.50	No
	VHT40	3	2422	15.59	16.00	No
		6	2437	15.23	16.00	No
		9	2452	15.59	16.00	No
		10	2457	14.67	15.50	No
		11	2462	14.77	15.50	No
	802.11ax(HE20) (SU)	1	2412	15.53	16.00	No
		6	2437	15.40	16.00	No
		11	2462	15.46	16.00	No
		12	2467	14.76	15.50	No
		13	2472	14.55	15.50	No
	802.11ax(HE40) (SU)	3	2422	15.56	16.00	No
		6	2437	15.10	16.00	No
		9	2452	15.31	16.00	No
		10	2457	14.80	15.50	No
		11	2462	14.56	15.50	No
	802.11be(EHT20) (SU)	1	2412	15.23	16.00	No
		6	2437	15.65	16.00	No
		11	2462	15.51	16.00	No
		12	2467	14.52	15.50	No
		13	2472	14.76	15.50	No
	802.11be(EHT40) (SU)	3	2422	15.28	16.00	No
		6	2437	15.27	16.00	No
		9	2452	15.43	16.00	No
		10	2457	14.70	15.50	No

		11	2462	14.70	15.50	No
802.11be(EHT20) (RU26)/0	1	2412	14.98	16.00	No	
802.11be(EHT20) (RU26)/4	6	2437	15.12	16.00	No	
802.11be(EHT20) (RU26)/8	11	2462	15.29	16.00	No	
802.11be(EHT20) (RU26)/8	12	2467	15.09	15.50	No	
802.11be(EHT20) (RU26)/8	13	2472	13.14	13.50	No	
802.11be(EHT20) (RU52)/37	1	2412	15.67	16.00	No	
802.11be(EHT20) (RU52)/39	6	2437	15.09	16.00	No	
802.11be(EHT20) (RU52)/40	11	2462	15.44	16.00	No	
802.11be(EHT20) (RU52)/40	12	2467	15.19	15.50	No	
802.11be(EHT20) (RU52)/40	13	2472	15.23	15.50	No	
802.11be(EHT20) (RU106)/53	1	2412	15.70	16.00	No	
802.11be(EHT20) (RU106)/54	6	2437	15.66	16.00	No	
802.11be(EHT20) (RU106)/55	11	2462	15.30	16.00	No	
802.11be(EHT20) (RU106)/56	12	2467	15.20	15.50	No	
802.11be(EHT20) (RU106)/57	13	2472	15.08	15.50	No	
<p>Note: According KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is <math>\leq 1.2</math> W/kg.</p> <p>Adjusted SAR = Report SAR * (max power (OFDM)/ max power (DSSS)) = 0.111 * (39.81mW/39.81mW) = 0.111 W/Kg, so the 2.4G OFDM SAR test is not required.</p>						

**8.1.3 2.4G WIFI (MIMO)**

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	18.76	19.00	No
		6	2437	18.72	19.00	No
		11	2462	18.82	19.00	No
		12	2467	16.27	17.00	No
		13	2472	11.61	12.00	No
	802.11g	1	2412	18.70	19.00	No
		6	2437	18.88	19.00	No
		11	2462	18.95	19.00	No
		12	2467	18.24	19.00	No
		13	2472	18.09	19.00	No
	VHT20	1	2412	18.73	19.00	No
		6	2437	18.87	19.00	No
		11	2462	18.66	19.00	No
		12	2467	18.26	19.00	No
		13	2472	18.20	19.00	No
	VHT40	3	2422	18.66	19.00	No
		6	2437	18.44	19.00	No
		9	2452	18.84	19.00	No
		10	2457	18.20	19.00	No
		11	2462	18.06	19.00	No
	802.11ax(HE20) (SU)	1	2412	18.77	19.00	No
		6	2437	18.90	19.00	No
		11	2462	18.86	19.00	No
		12	2467	18.24	19.00	No
		13	2472	18.27	19.00	No
	802.11ax(HE40) (SU)	3	2422	18.69	19.00	No
		6	2437	18.65	19.00	No
		9	2452	18.82	19.00	No
		10	2457	18.28	19.00	No
		11	2462	18.14	19.00	No
	802.11be(EHT20) (SU)	1	2412	18.76	19.00	No
		6	2437	18.74	19.00	No
		11	2462	18.72	19.00	No
		12	2467	18.23	19.00	No
		13	2472	18.04	19.00	No
	802.11be(EHT40) (SU)	3	2422	18.65	19.00	No
		6	2437	18.85	19.00	No
		9	2452	18.93	19.00	No
		10	2457	18.21	19.00	No

		11	2462	18.04	19.00	No
802.11be(EHT20) (RU26)/0	1	2412	18.87	19.00	No	
802.11be(EHT20) (RU26)/4	6	2437	18.87	19.00	No	
802.11be(EHT20) (RU26)/8	11	2462	18.95	19.00	No	
802.11be(EHT20) (RU26)/8	12	2467	18.21	19.00	No	
802.11be(EHT20) (RU26)/8	13	2472	16.01	17.00	No	
802.11be(EHT20) (RU52)/37	1	2412	18.96	19.00	No	
802.11be(EHT20) (RU52)/39	6	2437	18.45	19.00	No	
802.11be(EHT20) (RU52)/40	11	2462	18.46	19.00	No	
802.11be(EHT20) (RU52)/40	12	2467	18.33	19.00	No	
802.11be(EHT20) (RU52)/40	13	2472	17.33	18.00	No	
802.11be(EHT20) (RU106)/53	1	2412	18.60	19.00	No	
802.11be(EHT20) (RU106)/54	6	2437	18.86	19.00	No	
802.11be(EHT20) (RU106)/55	11	2462	18.48	19.00	No	
802.11be(EHT20) (RU106)/56	12	2467	18.07	19.00	No	
802.11be(EHT20) (RU106)/57	13	2472	18.05	19.00	No	
<p>Note: For WiFi SAR testing was performed on single antenna RF power in SISO mode that is larger to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission used more conservative "Max. (main ant) + Max. (aux. ant)" method to determine SAR compliance. When the sum of 1-g SISO transmission SAR measurement is &lt;1.6 W/kg, or the SPLSR value ≤0.04 the MIMO SAR test is not required.</p>						

**8.1.4 5G WIFI (Aux. Antenna)**

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	15.27	16.00	No
		40	5200	15.33	16.00	No
		48	5240	15.15	16.00	No
	802.11n(HT20)	36	5180	15.49	16.00	No
		40	5200	14.88	16.00	No
		48	5240	15.51	16.00	No
	802.11n(HT40)	38	5190	15.11	16.00	No
		46	5230	15.21	16.00	No
	802.11ac(VHT20)	36	5180	15.16	16.00	No
		40	5200	15.26	16.00	No
		48	5240	15.25	16.00	No
	802.11ac(VHT40)	38	5190	14.95	16.00	No
		46	5230	15.54	16.00	No
	802.11ac(VHT80)	42	5210	15.33	16.00	No
	802.11ac(VHT160)	50	5250	10.33	11.00	No
	802.11ax(HE20) (SU)	36	5180	15.24	16.00	No
		40	5200	15.65	16.00	No
		48	5240	15.31	16.00	No
	802.11ax(HE40) (SU)	38	5190	14.84	16.00	No
		46	5230	15.23	16.00	No
	802.11ax(HE80) (SU)	42	5210	15.51	16.00	No
	802.11ax(HE160) (SU)	50	5250	10.17	11.00	No
	802.11be(EHT20) (SU)	36	5180	15.56	16.00	No
		40	5200	15.08	16.00	No
		48	5240	15.23	16.00	No
	802.11be(EHT40) (SU)	38	5190	15.38	16.00	No
		46	5230	15.42	16.00	No
	802.11be(EHT80) (SU)	42	5210	14.87	16.00	No
	802.11be(EHT160) (SU)	50	5250	10.56	11.00	No
	802.11ax(HE20) (RU26)/0	36	5180	11.33	12.00	No
	802.11ax(HE20) (RU26)/4	40	5200	14.97	16.00	No
	802.11ax(HE20) (RU26)/8	48	5240	15.10	16.00	No
	802.11ax(HE20)	36	5180	14.60	16.00	No

	(RU52)/37					
	802.11ax(HE20) (RU52)/39	40	5200	15.21	16.00	No
	802.11ax(HE20) (RU52)/40	48	5240	14.95	16.00	No
	802.11ax(HE20) (RU106)/53	36	5180	15.58	16.00	No
	802.11ax(HE20) (RU106)/53	40	5200	15.34	16.00	No
	802.11ax(HE20) (RU106)/54	48	5240	15.54	16.00	No
	802.11be(EHT20) (RU26)/0	36	5180	11.27	12.00	No
	802.11be(EHT20) (RU26)/4	40	5200	14.89	16.00	No
	802.11be(EHT20) (RU26)/8	48	5240	15.16	16.00	No
	802.11be(EHT20) (RU52)/37	36	5180	14.07	16.00	No
	802.11be(EHT20) (RU52)/39	40	5200	15.09	16.00	No
	802.11be(EHT20) (RU52)/40	48	5240	15.49	16.00	No
	802.11be(EHT20) (RU106)/53	36	5180	15.19	16.00	No
	802.11be(EHT20) (RU106)/53	40	5200	14.80	16.00	No
	802.11be(EHT20) (RU106)/54	48	5240	15.11	16.00	No
5.3 (5.25~5.35)	802.11a	52	5260	15.61	16.00	No
		60	5300	15.13	16.00	No
		64	5320	15.10	16.00	No
	802.11n(HT20)	52	5260	15.31	16.00	No
		60	5300	15.54	16.00	No
		64	5320	14.94	16.00	No
	802.11n(HT40)	54	5270	15.09	16.00	No
		62	5310	15.84	16.00	No
	802.11ac(VHT20)	52	5260	15.47	16.00	No
		60	5300	15.18	16.00	No
		64	5320	15.45	16.00	No
	802.11ac(VHT40)	54	5270	14.86	16.00	No
		62	5310	15.60	16.00	No
	802.11ac(VHT80)	58	5290	<b>15.51</b>	16.00	Yes

802.11ax(HE20) (SU)	52	5260	15.51	16.00	No
	60	5300	15.36	16.00	No
	64	5320	15.15	16.00	No
802.11ax(HE40) (SU)	54	5270	15.33	16.00	No
	62	5310	15.51	16.00	No
802.11ax(HE80) (SU)	58	5290	15.12	16.00	No
802.11be(EHT20) (SU)	52	5260	14.94	16.00	No
	60	5300	15.43	16.00	No
	64	5320	15.34	16.00	No
802.11be(EHT40) (SU)	54	5270	15.17	16.00	No
	62	5310	15.18	16.00	No
802.11be(EHT80) (SU)	58	5290	14.89	16.00	No
802.11ax(HE20) (RU26)/0	52	5260	15.21	16.00	No
802.11ax(HE20) (RU26)/4	60	5300	15.02	16.00	No
802.11ax(HE20) (RU26)/8	64	5320	10.61	11.00	No
802.11ax(HE20) (RU52)/37	52	5260	15.41	16.00	No
802.11ax(HE20) (RU52)/39	60	5300	15.34	16.00	No
802.11ax(HE20) (RU52)/40	64	5320	12.96	15.00	No
802.11ax(HE20) (RU106)/53	52	5260	14.77	16.00	No
802.11ax(HE20) (RU106)/53	60	5300	15.40	16.00	No
802.11ax(HE20) (RU106)/54	64	5320	14.94	16.00	No
802.11be(EHT20) (RU26)/0	52	5260	15.18	16.00	No
802.11be(EHT20) (RU26)/4	60	5300	15.14	16.00	No
802.11be(EHT20) (RU26)/8	64	5320	10.78	12.00	No
802.11be(EHT20) (RU52)/37	52	5260	15.44	16.00	No
802.11be(EHT20) (RU52)/39	60	5300	15.27	16.00	No
802.11be(EHT20)	64	5320	13.31	15.00	No

	(RU52)/40					
	802.11be(EHT20) (RU106)/53	52	5260	15.60	16.00	No
	802.11be(EHT20) (RU106)/53	60	5300	15.36	16.00	No
	802.11be(EHT20) (RU106)/54	64	5320	15.20	16.00	No
5.6 (5.47~5.725)	802.11a	100	5500	15.58	16.00	No
		116	5580	15.15	16.00	No
		140	5700	14.91	16.00	No
		144	5720	15.49	16.00	No
	802.11n(HT20)	100	5500	15.11	16.00	No
		116	5580	15.29	16.00	No
		140	5700	15.50	16.00	No
		144	5720	15.33	16.00	No
	802.11n(HT40)	102	5510	15.36	16.00	No
		110	5550	15.30	16.00	No
		134	5670	14.80	16.00	No
		142	5710	15.85	16.00	No
	802.11ac(VHT20)	100	5500	15.34	16.00	No
		116	5580	14.73	16.00	No
		140	5700	15.02	16.00	No
		144	5720	15.71	16.00	No
	802.11ac(VHT40)	102	5510	15.51	16.00	No
		110	5550	15.15	16.00	No
		134	5670	15.13	16.00	No
		142	5710	15.64	16.00	No
	802.11ac(VHT80)	106	5530	<b>15.86</b>	16.00	Yes
		122	5610	15.78	16.00	Yes
		138	5690	15.55	16.00	Yes
	802.11ac(VHT160)	114	5570	13.39	14.00	No
	802.11ax(HE20) (SU)	100	5500	15.79	16.00	No
		116	5580	15.50	16.00	No
		140	5700	15.40	16.00	No
		144	5720	15.61	16.00	No
	802.11ax(HE40) (SU)	102	5510	15.26	16.00	No
		110	5550	15.02	16.00	No
		134	5670	15.29	16.00	No
		142	5710	15.66	16.00	No
	802.11ax(HE80) (SU)	106	5530	15.20	16.00	No
		122	5610	15.74	16.00	No
		138	5690	15.57	16.00	No
	802.11ax(HE160)	114	5570	12.91	14.00	No

(SU)					
802.11be(EHT20) (SU)	100	5500	14.91	16.00	No
	116	5580	15.10	16.00	No
	140	5700	15.10	16.00	No
	144	5720	15.30	16.00	No
802.11be(EHT40) (SU)	102	5510	15.24	16.00	No
	110	5550	15.35	16.00	No
	134	5670	15.26	16.00	No
	142	5710	15.06	16.00	No
802.11be(EHT80) (SU)	106	5530	15.20	16.00	No
	122	5610	15.51	16.00	No
	138	5690	15.66	16.00	No
802.11be(EHT160) (SU)	114	5570	13.50	14.00	No
802.11ax(HE20) (RU26)/0	100	5500	9.59	10.00	No
802.11ax(HE20) (RU26)/4	116	5580	15.11	16.00	No
802.11ax(HE20) (RU26)/8	140	5700	8.15	10.00	No
802.11ax(HE20) (RU26)/8	144	5720	13.51	14.50	No
802.11ax(HE20) (RU52)/37	100	5500	12.46	13.00	No
802.11ax(HE20) (RU52)/39	116	5580	15.42	16.00	No
802.11ax(HE20) (RU52)/40	140	5700	10.41	12.00	No
802.11ax(HE20) (RU52)/40	144	5720	15.65	16.00	No
802.11ax(HE20) (RU106)/53	100	5500	15.12	16.00	No
802.11ax(HE20) (RU106)/53	116	5580	14.84	16.00	No
802.11ax(HE20) (RU106)/54	140	5700	13.27	14.00	No
802.11ax(HE20) (RU106)/54	144	5720	15.44	16.00	No
802.11be(EHT20) (RU26)/0	100	5500	9.35	10.00	No
802.11be(EHT20) (RU26)/4	116	5580	15.10	16.00	No
802.11be(EHT20)	140	5700	8.18	9.00	No

	(RU26)/8					
	802.11be(EHT20) (RU26)/8	144	5720	13.75	14.50	No
	802.11be(EHT20) (RU52)/37	100	5500	12.69	14.00	No
	802.11be(EHT20) (RU52)/39	116	5580	15.18	16.00	No
	802.11be(EHT20) (RU52)/39	140	5700	10.19	11.50	No
	802.11be(EHT20) (RU52)/40	144	5720	15.15	16.00	No
	802.11be(EHT20) (RU106)/53	100	5500	15.55	16.00	No
	802.11be(EHT20) (RU106)/53	116	5580	15.14	16.00	No
	802.11be(EHT20) (RU106)/54	140	5700	13.92	14.50	No
	802.11be(EHT20) (RU106)/54	144	5720	15.40	16.00	No
5.8 (5.725~5.85)	802.11a	149	5745	15.26	16.00	No
		157	5785	15.30	16.00	No
		165	5825	15.61	16.00	No
	802.11n(HT20)	149	5745	15.85	16.00	No
		157	5785	15.56	16.00	No
		165	5825	15.59	16.00	No
	802.11n(HT40)	151	5755	15.38	16.00	No
		159	5795	15.54	16.00	No
	802.11ac(VHT20)	149	5745	15.73	16.00	No
		157	5785	15.61	16.00	No
		165	5825	15.73	16.00	No
	802.11ac(VHT40)	151	5755	15.22	16.00	No
		159	5795	15.61	16.00	No
	802.11ac(VHT80)	155	5775	<b>15.75</b>	16.00	Yes
	802.11ax(HE20) (SU)	149	5745	15.48	16.00	No
		157	5785	15.11	16.00	No
		165	5825	15.40	16.00	No
	802.11ax(HE40) (SU)	151	5755	15.11	16.00	No
		159	5795	15.28	16.00	No
	802.11ax(HE80) (SU)	155	5775	15.15	16.00	No
	802.11be(EHT20) (SU)	149	5745	15.46	16.00	No
		157	5785	15.46	16.00	No
		165	5825	15.74	16.00	No

	802.11be(EHT40) (SU)	151	5755	15.39	16.00	No
		159	5795	15.47	16.00	No
	802.11be(EHT80) (SU)	155	5775	15.64	16.00	No
	802.11ax(HE20) (RU26)/0	149	5745	15.43	16.00	No
	802.11ax(HE20) (RU26)/4	157	5785	15.59	16.00	No
	802.11ax(HE20) (RU26)/8	165	5825	15.62	16.00	No
	802.11ax(HE20) (RU52)/37	149	5745	15.40	16.00	No
	802.11ax(HE20) (RU52)/39	157	5785	14.99	16.00	No
	802.11ax(HE20) (RU52)/40	165	5825	14.99	16.00	No
	802.11ax(HE20) (RU106)/53	149	5745	15.63	16.00	No
	802.11ax(HE20) (RU106)/54	157	5785	15.29	16.00	No
	802.11ax(HE20) (RU106)/54	165	5825	15.66	16.00	No
	802.11be(EHT20) (RU26)/0	149	5745	15.48	16.00	No
	802.11be(EHT20) (RU26)/4	157	5785	15.48	16.00	No
	802.11be(EHT20) (RU26)/8	165	5825	15.46	16.00	No
	802.11be(EHT20) (RU52)/37	149	5745	15.22	16.00	No
	802.11be(EHT20) (RU52)/39	157	5785	14.95	16.00	No
	802.11be(EHT20) (RU52)/40	165	5825	15.37	16.00	No
	802.11be(EHT20) (RU106)/53	149	5745	15.14	16.00	No
	802.11be(EHT20) (RU106)/53	157	5785	15.65	16.00	No
	802.11be(EHT20) (RU106)/54	165	5825	15.40	16.00	No
5.9 (5.815 ~ 5.885)	802.11a	169	5845	15.60	16.00	No
		173	5865	15.64	16.00	No
		177	5885	15.57	16.00	No

		169	5845	15.54	16.00	No
	802.11n(HT20)	173	5865	15.32	16.00	No
		177	5885	15.39	16.00	No
		167	5835	15.47	16.00	No
	802.11n(HT40)	175	5875	15.52	16.00	No
		169	5845	15.23	16.00	No
	802.11ac(VHT20)	173	5865	15.27	16.00	No
		177	5885	15.45	16.00	No
		167	5835	15.24	16.00	No
	802.11ac(VHT40)	175	5875	15.40	16.00	No
		171	5855	15.53	16.00	No
	802.11ac(VHT80)	163	5815	<b>15.62</b>	16.00	Yes
	802.11ax(HE20) (SU)	169	5845	15.56	16.00	No
		173	5865	15.58	16.00	No
		177	5885	15.15	16.00	No
	802.11ax(HE40) (SU)	167	5835	15.54	16.00	No
		175	5875	15.53	16.00	No
	802.11ax(HE80) (SU)	171	5855	15.58	16.00	No
	802.11ax(HE160) (SU)	163	5815	15.39	16.00	No
	802.11be(EHT20) (SU)	169	5845	15.81	16.00	No
		173	5865	15.38	16.00	No
		177	5885	15.11	16.00	No
	802.11be(EHT40) (SU)	167	5835	15.41	16.00	No
		175	5875	15.26	16.00	No
	802.11be(EHT80) (SU)	171	5855	15.39	16.00	No
	802.11be(EHT160) (SU)	163	5815	15.23	16.00	No
	802.11be(EHT20) (RU26)/0	169	5845	12.26	14.00	No
	802.11be(EHT20) (RU26)/4	173	5865	11.34	13.00	No
	802.11be(EHT20) (RU26)/8	177	5885	11.25	13.00	No
	802.11be(EHT20) (RU52)/37	169	5845	13.65	15.00	No
	802.11be(EHT20) (RU52)/39	173	5865	13.09	15.00	No
	802.11be(EHT20) (RU52)/40	177	5885	13.39	15.00	No
	802.11be(EHT20)	169	5845	14.73	16.00	No

	(RU106)/53					
	802.11be(EHT20) (RU106)/54	173	5865	14.69	16.00	No
	802.11be(EHT20) (RU106)/54	177	5885	14.36	16.00	No

Note: When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.

**8.1.5 5G WIFI (Main Antenna)**

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	15.34	16.00	No
		40	5200	15.77	16.00	No
		48	5240	15.11	16.00	No
	802.11n(HT20)	36	5180	15.50	16.00	No
		40	5200	15.44	16.00	No
		48	5240	15.23	16.00	No
	802.11n(HT40)	38	5190	15.04	16.00	No
		46	5230	15.23	16.00	No
	802.11ac(VHT20)	36	5180	15.66	16.00	No
		40	5200	14.87	16.00	No
		48	5240	15.10	16.00	No
	802.11ac(VHT40)	38	5190	15.26	16.00	No
		46	5230	15.81	16.00	No
	802.11ac(VHT80)	42	5210	15.40	16.00	No
	802.11ac(VHT160)	50	5250	10.85	11.00	No
	802.11ax(HE20) (SU)	36	5180	15.09	16.00	No
		40	5200	15.20	16.00	No
		48	5240	15.49	16.00	No
	802.11ax(HE40) (SU)	38	5190	15.75	16.00	No
		46	5230	15.06	16.00	No
	802.11ax(HE80) (SU)	42	5210	15.09	16.00	No
	802.11ax(HE160) (SU)	50	5250	10.06	11.00	No
	802.11be(EHT20) (SU)	36	5180	15.63	16.00	No
		40	5200	15.30	16.00	No
		48	5240	15.48	16.00	No
	802.11be(EHT40) (SU)	38	5190	15.31	16.00	No
		46	5230	15.08	16.00	No
	802.11be(EHT80) (SU)	42	5210	15.58	16.00	No
	802.11be(EHT160) (SU)	50	5250	10.08	11.00	No
	802.11ax(HE20) (RU26)/0	36	5180	11.19	12.00	No
	802.11ax(HE20) (RU26)/4	40	5200	15.00	16.00	No
	802.11ax(HE20) (RU26)/8	48	5240	15.17	16.00	No
	802.11ax(HE20)	36	5180	14.43	16.00	No

	(RU52)/37					
	802.11ax(HE20) (RU52)/39	40	5200	15.24	16.00	No
	802.11ax(HE20) (RU52)/40	48	5240	15.05	16.00	No
	802.11ax(HE20) (RU106)/53	36	5180	15.39	16.00	No
	802.11ax(HE20) (RU106)/53	40	5200	15.46	16.00	No
	802.11ax(HE20) (RU106)/54	48	5240	15.35	16.00	No
	802.11be(EHT20) (RU26)/0	36	5180	11.16	12.00	No
	802.11be(EHT20) (RU26)/4	40	5200	14.88	16.00	No
	802.11be(EHT20) (RU26)/8	48	5240	15.18	16.00	No
	802.11be(EHT20) (RU52)/37	36	5180	14.38	16.00	No
	802.11be(EHT20) (RU52)/39	40	5200	15.49	16.00	No
	802.11be(EHT20) (RU52)/40	48	5240	15.25	16.00	No
	802.11be(EHT20) (RU106)/53	36	5180	15.11	16.00	No
	802.11be(EHT20) (RU106)/53	40	5200	15.01	16.00	No
	802.11be(EHT20) (RU106)/54	48	5240	15.06	16.00	No
5.3 (5.25~5.35)	802.11a	52	5260	15.14	16.00	No
		60	5300	15.54	16.00	No
		64	5320	15.03	16.00	No
	802.11n(HT20)	52	5260	15.80	16.00	No
		60	5300	15.23	16.00	No
		64	5320	14.94	16.00	No
	802.11n(HT40)	54	5270	15.81	16.00	No
		62	5310	15.04	16.00	No
	802.11ac(VHT20)	52	5260	15.47	16.00	No
		60	5300	15.36	16.00	No
		64	5320	15.46	16.00	No
	802.11ac(VHT40)	54	5270	15.25	16.00	No
		62	5310	15.53	16.00	No
	802.11ac(VHT80)	58	5290	<b>15.58</b>	16.00	Yes

802.11ax(HE20) (SU)	52	5260	15.16	16.00	No
	60	5300	15.09	16.00	No
	64	5320	15.04	16.00	No
802.11ax(HE40) (SU)	54	5270	15.30	16.00	No
	62	5310	14.91	16.00	No
802.11ax(HE80) (SU)	58	5290	15.43	16.00	No
802.11be(EHT20) (SU)	52	5260	15.60	16.00	No
	60	5300	15.73	16.00	No
	64	5320	15.34	16.00	No
802.11be(EHT40) (SU)	54	5270	15.29	16.00	No
	62	5310	15.26	16.00	No
802.11be(EHT80) (SU)	58	5290	14.72	15.00	No
802.11ax(HE20) (RU26)/0	52	5260	14.98	16.00	No
802.11ax(HE20) (RU26)/4	60	5300	14.81	16.00	No
802.11ax(HE20) (RU26)/8	64	5320	10.65	11.00	No
802.11ax(HE20) (RU52)/37	52	5260	15.31	16.00	No
802.11ax(HE20) (RU52)/39	60	5300	15.33	16.00	No
802.11ax(HE20) (RU52)/40	64	5320	12.87	15.00	No
802.11ax(HE20) (RU106)/53	52	5260	15.20	16.00	No
802.11ax(HE20) (RU106)/53	60	5300	15.53	16.00	No
802.11ax(HE20) (RU106)/54	64	5320	15.21	16.00	No
802.11be(EHT20) (RU26)/0	52	5260	15.19	16.00	No
802.11be(EHT20) (RU26)/4	60	5300	14.88	16.00	No
802.11be(EHT20) (RU26)/8	64	5320	10.74	12.00	No
802.11be(EHT20) (RU52)/37	52	5260	15.27	16.00	No
802.11be(EHT20) (RU52)/39	60	5300	15.33	16.00	No
802.11be(EHT20)	64	5320	13.76	15.00	No

	(RU52)/40					
	802.11be(EHT20) (RU106)/53	52	5260	14.96	16.00	No
	802.11be(EHT20) (RU106)/53	60	5300	14.87	16.00	No
	802.11be(EHT20) (RU106)/54	64	5320	15.59	16.00	No
5.6 (5.47~5.725)	802.11a	100	5500	15.21	16.00	No
		116	5580	15.35	16.00	No
		140	5700	15.27	16.00	No
		144	5720	15.48	16.00	No
	802.11n(HT20)	100	5500	15.08	16.00	No
		116	5580	15.32	16.00	No
		140	5700	15.48	16.00	No
		144	5720	15.55	16.00	No
	802.11n(HT40)	102	5510	15.71	16.00	No
		110	5550	15.39	16.00	No
		134	5670	15.70	16.00	No
		142	5710	15.17	16.00	No
	802.11ac(VHT20)	100	5500	15.07	16.00	No
		116	5580	15.48	16.00	No
		140	5700	15.49	16.00	No
		144	5720	15.17	16.00	No
	802.11ac(VHT40)	102	5510	15.29	16.00	No
		110	5550	15.40	16.00	No
		134	5670	15.67	16.00	No
		142	5710	15.50	16.00	No
	802.11ac(VHT80)	106	5530	<b>15.62</b>	16.00	Yes
		122	5610	15.50	16.00	Yes
		138	5690	15.58	16.00	Yes
	802.11ac(VHT160)	114	5570	13.38	14.00	No
	802.11ax(HE20) (SU)	100	5500	15.19	16.00	No
		116	5580	15.50	16.00	No
		140	5700	14.98	16.00	No
		144	5720	15.20	16.00	No
	802.11ax(HE40) (SU)	102	5510	15.52	16.00	No
		110	5550	14.89	16.00	No
		134	5670	15.50	16.00	No
		142	5710	15.12	16.00	No
	802.11ax(HE80) (SU)	106	5530	15.37	16.00	No
		122	5610	15.30	16.00	No
		138	5690	15.24	16.00	No
	802.11ax(HE160)	114	5570	12.78	14.00	No

(SU)					
802.11be(EHT20) (SU)	100	5500	15.48	16.00	No
	116	5580	15.46	16.00	No
	140	5700	15.52	16.00	No
	144	5720	15.37	16.00	No
802.11be(EHT40) (SU)	102	5510	15.25	16.00	No
	110	5550	15.54	16.00	No
	134	5670	15.51	16.00	No
	142	5710	15.86	16.00	No
802.11be(EHT80) (SU)	106	5530	14.95	16.00	No
	122	5610	15.15	16.00	No
	138	5690	15.68	16.00	No
802.11be(EHT160) (SU)	114	5570	13.21	14.00	No
802.11ax(HE20) (RU26)/0	100	5500	9.34	10.00	No
802.11ax(HE20) (RU26)/4	116	5580	15.05	16.00	No
802.11ax(HE20) (RU26)/8	140	5700	8.04	10.00	No
802.11ax(HE20) (RU26)/8	144	5720	13.88	14.50	No
802.11ax(HE20) (RU52)/37	100	5500	12.10	13.00	No
802.11ax(HE20) (RU52)/39	116	5580	15.56	16.00	No
802.11ax(HE20) (RU52)/40	140	5700	10.63	12.00	No
802.11ax(HE20) (RU52)/40	144	5720	15.21	16.00	No
802.11ax(HE20) (RU106)/53	100	5500	15.10	16.00	No
802.11ax(HE20) (RU106)/53	116	5580	15.23	16.00	No
802.11ax(HE20) (RU106)/54	140	5700	13.01	14.00	No
802.11ax(HE20) (RU106)/54	144	5720	15.27	16.00	No
802.11be(EHT20) (RU26)/0	100	5500	9.31	10.00	No
802.11be(EHT20) (RU26)/4	116	5580	14.95	16.00	No
802.11be(EHT20)	140	5700	8.13	9.00	No

	(RU26)/8					
	802.11be(EHT20) (RU26)/8	144	5720	14.08	14.50	No
	802.11be(EHT20) (RU52)/37	100	5500	12.52	14.00	No
	802.11be(EHT20) (RU52)/39	116	5580	15.03	16.00	No
	802.11be(EHT20) (RU52)/39	140	5700	10.57	11.50	No
	802.11be(EHT20) (RU52)/40	144	5720	15.77	16.00	No
	802.11be(EHT20) (RU106)/53	100	5500	15.33	16.00	No
	802.11be(EHT20) (RU106)/53	116	5580	15.28	16.00	No
	802.11be(EHT20) (RU106)/54	140	5700	14.11	14.50	No
	802.11be(EHT20) (RU106)/54	144	5720	15.15	16.00	No
5.8 (5.725~5.85)	802.11a	149	5745	15.11	16.00	No
		157	5785	15.42	16.00	No
		165	5825	15.25	16.00	No
	802.11n(HT20)	149	5745	15.11	16.00	No
		157	5785	15.51	16.00	No
		165	5825	15.31	16.00	No
	802.11n(HT40)	151	5755	15.32	16.00	No
		159	5795	15.48	16.00	No
	802.11ac(VHT20)	149	5745	15.45	16.00	No
		157	5785	15.62	16.00	No
		165	5825	15.22	16.00	No
	802.11ac(VHT40)	151	5755	15.06	16.00	No
		159	5795	15.57	16.00	No
	802.11ac(VHT80)	155	5775	<b>15.73</b>	16.00	Yes
	802.11ax(HE20) (SU)	149	5745	14.86	16.00	No
		157	5785	15.29	16.00	No
		165	5825	15.69	16.00	No
	802.11ax(HE40) (SU)	151	5755	15.09	16.00	No
		159	5795	15.50	16.00	No
	802.11ax(HE80) (SU)	155	5775	15.16	16.00	No
	802.11be(EHT20) (SU)	149	5745	15.41	16.00	No
		157	5785	15.42	16.00	No
		165	5825	14.97	16.00	No

	802.11be(EHT40) (SU)	151	5755	15.16	16.00	No
		159	5795	15.34	16.00	No
	802.11be(EHT80) (SU)	155	5775	15.38	16.00	No
	802.11ax(HE20) (RU26)/0	149	5745	15.46	16.00	No
	802.11ax(HE20) (RU26)/4	157	5785	15.09	16.00	No
	802.11ax(HE20) (RU26)/8	165	5825	15.37	16.00	No
	802.11ax(HE20) (RU52)/37	149	5745	15.54	16.00	No
	802.11ax(HE20) (RU52)/39	157	5785	14.89	16.00	No
	802.11ax(HE20) (RU52)/40	165	5825	15.48	16.00	No
	802.11ax(HE20) (RU106)/53	149	5745	15.84	16.00	No
	802.11ax(HE20) (RU106)/54	157	5785	15.17	16.00	No
	802.11ax(HE20) (RU106)/54	165	5825	15.43	16.00	No
	802.11be(EHT20) (RU26)/0	149	5745	15.44	16.00	No
	802.11be(EHT20) (RU26)/4	157	5785	15.48	16.00	No
	802.11be(EHT20) (RU26)/8	165	5825	15.01	16.00	No
	802.11be(EHT20) (RU52)/37	149	5745	15.53	16.00	No
	802.11be(EHT20) (RU52)/39	157	5785	15.15	16.00	No
	802.11be(EHT20) (RU52)/40	165	5825	15.57	16.00	No
	802.11be(EHT20) (RU106)/53	149	5745	15.36	16.00	No
	802.11be(EHT20) (RU106)/53	157	5785	15.14	16.00	No
	802.11be(EHT20) (RU106)/54	165	5825	15.14	16.00	No
5.9 (5.815 ~ 5.885)	802.11a	169	5845	15.58	16.00	No
		173	5865	15.89	16.00	No
		177	5885	15.86	16.00	No

		169	5845	15.66	16.00	No
	802.11n(HT20)	173	5865	15.50	16.00	No
		177	5885	15.30	16.00	No
		167	5835	15.31	16.00	No
	802.11n(HT40)	175	5875	15.55	16.00	No
		169	5845	15.86	16.00	No
	802.11ac(VHT20)	173	5865	15.34	16.00	No
		177	5885	15.63	16.00	No
		167	5835	15.29	16.00	No
	802.11ac(VHT40)	175	5875	15.78	16.00	No
		171	5855	15.60	16.00	No
	802.11ac(VHT80)	163	5815	<b>15.95</b>	16.00	Yes
	802.11ax(HE20) (SU)	169	5845	15.62	16.00	No
		173	5865	15.31	16.00	No
		177	5885	15.40	16.00	No
	802.11ax(HE40) (SU)	167	5835	15.32	16.00	No
		175	5875	15.47	16.00	No
	802.11ax(HE80) (SU)	171	5855	15.78	16.00	No
	802.11ax(HE160) (SU)	163	5815	15.41	16.00	No
	802.11be(EHT20) (SU)	169	5845	15.66	16.00	No
		173	5865	15.09	16.00	No
		177	5885	15.36	16.00	No
	802.11be(EHT40) (SU)	167	5835	15.42	16.00	No
		175	5875	15.40	16.00	No
	802.11be(EHT80) (SU)	171	5855	15.86	16.00	No
	802.11be(EHT160) (SU)	163	5815	15.50	16.00	No
	802.11be(EHT20) (RU26)/0	169	5845	12.23	14.00	No
	802.11be(EHT20) (RU26)/4	173	5865	11.42	13.00	No
	802.11be(EHT20) (RU26)/8	177	5885	11.21	13.00	No
	802.11be(EHT20) (RU52)/37	169	5845	13.49	15.00	No
	802.11be(EHT20) (RU52)/39	173	5865	13.78	15.00	No
	802.11be(EHT20) (RU52)/40	177	5885	13.46	15.00	No
	802.11be(EHT20)	169	5845	14.50	16.00	No

	(RU106)/53					
	802.11be(EHT20) (RU106)/54	173	5865	14.31	16.00	No
	802.11be(EHT20) (RU106)/54	177	5885	14.69	16.00	No

Note: When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.

**8.1.6 5G WIFI (MIMO)**

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	18.25	19.00	No
		40	5200	18.11	19.00	No
		48	5240	18.44	19.00	No
	802.11n(HT20)	36	5180	18.60	19.00	No
		40	5200	18.33	19.00	No
		48	5240	18.42	19.00	No
	802.11n(HT40)	38	5190	18.47	19.00	No
		46	5230	18.31	19.00	No
	802.11ac(VHT20)	36	5180	18.77	19.00	No
		40	5200	18.89	19.00	No
		48	5240	18.73	19.00	No
	802.11ac(VHT40)	38	5190	18.93	19.00	No
		46	5230	18.76	19.00	No
	802.11ac(VHT80)	42	5210	18.89	19.00	No
	802.11ac(VHT160)	50	5250	13.17	14.00	No
	802.11ax(HE20) (SU)	36	5180	18.79	19.00	No
		40	5200	18.72	19.00	No
		48	5240	18.93	19.00	No
	802.11ax(HE40) (SU)	38	5190	18.75	19.00	No
		46	5230	18.94	19.00	No
	802.11ax(HE80) (SU)	42	5210	18.88	19.00	No
	802.11ax(HE160) (SU)	50	5250	13.23	14.00	No
	802.11be(EHT20) (SU)	36	5180	18.51	19.00	No
		40	5200	18.59	19.00	No
		48	5240	18.90	19.00	No
	802.11be(EHT40) (SU)	38	5190	18.82	19.00	No
		46	5230	18.84	19.00	No
	802.11be(EHT80) (SU)	42	5210	18.72	19.00	No
	802.11be(EHT160) (SU)	50	5250	12.39	14.00	No
	802.11ax(HE20) (RU26)/0	36	5180	12.52	13.50	No
	802.11ax(HE20) (RU26)/4	40	5200	12.51	13.50	No
	802.11ax(HE20) (RU26)/8	48	5240	12.48	13.50	No
	802.11ax(HE20)	36	5180	15.83	16.50	No

	(RU52)/37					
	802.11ax(HE20) (RU52)/39	40	5200	15.95	16.50	No
	802.11ax(HE20) (RU52)/40	48	5240	15.62	16.50	No
	802.11ax(HE20) (RU106)/53	36	5180	18.83	19.00	No
	802.11ax(HE20) (RU106)/53	40	5200	18.81	19.00	No
	802.11ax(HE20) (RU106)/54	48	5240	18.76	19.00	No
	802.11be(EHT20) (RU26)/0	36	5180	12.91	14.00	No
	802.11be(EHT20) (RU26)/4	40	5200	12.95	14.00	No
	802.11be(EHT20) (RU26)/8	48	5240	12.72	14.00	No
	802.11be(EHT20) (RU52)/37	36	5180	16.06	17.00	No
	802.11be(EHT20) (RU52)/39	40	5200	15.93	17.00	No
	802.11be(EHT20) (RU52)/40	48	5240	15.72	17.00	No
	802.11be(EHT20) (RU106)/53	36	5180	18.90	19.00	No
	802.11be(EHT20) (RU106)/53	40	5200	18.96	19.00	No
	802.11be(EHT20) (RU106)/54	48	5240	18.59	19.00	No
5.3 (5.25~5.35)	802.11a	52	5260	18.88	19.00	No
		60	5300	18.87	19.00	No
		64	5320	18.94	19.00	No
	802.11n(HT20)	52	5260	18.89	19.00	No
		60	5300	18.90	19.00	No
		64	5320	18.86	19.00	No
	802.11n(HT40)	54	5270	18.70	19.00	No
		62	5310	18.61	19.00	No
	802.11ac(VHT20)	52	5260	18.67	19.00	No
		60	5300	18.70	19.00	No
		64	5320	18.72	19.00	No
	802.11ac(VHT40)	54	5270	19.00	19.00	No
		62	5310	18.96	19.00	No
	802.11ac(VHT80)	58	5290	18.72	19.00	No

802.11ax(HE20) (SU)	52	5260	18.79	19.00	No
	60	5300	18.68	19.00	No
	64	5320	18.95	19.00	No
802.11ax(HE40) (SU)	54	5270	18.78	19.00	No
	62	5310	18.77	19.00	No
802.11ax(HE80) (SU)	58	5290	18.89	19.00	No
802.11be(EHT20) (SU)	52	5260	18.78	19.00	No
	60	5300	18.75	19.00	No
	64	5320	18.61	19.00	No
802.11be(EHT40) (SU)	54	5270	18.88	19.00	No
	62	5310	18.76	19.00	No
802.11be(EHT80) (SU)	58	5290	18.54	19.00	No
802.11ax(HE20) (RU26)/0	52	5260	18.84	19.00	No
802.11ax(HE20) (RU26)/4	60	5300	18.84	19.00	No
802.11ax(HE20) (RU26)/8	64	5320	18.67	19.00	No
802.11ax(HE20) (RU52)/37	52	5260	15.78	16.50	No
802.11ax(HE20) (RU52)/39	60	5300	15.75	16.50	No
802.11ax(HE20) (RU52)/40	64	5320	15.95	16.50	No
802.11ax(HE20) (RU106)/53	52	5260	18.57	19.00	No
802.11ax(HE20) (RU106)/53	60	5300	18.74	19.00	No
802.11ax(HE20) (RU106)/54	64	5320	18.76	19.00	No
802.11be(EHT20) (RU26)/0	52	5260	11.96	13.50	No
802.11be(EHT20) (RU26)/4	60	5300	12.19	13.50	No
802.11be(EHT20) (RU26)/8	64	5320	12.17	13.50	No
802.11be(EHT20) (RU52)/37	52	5260	15.64	16.50	No
802.11be(EHT20) (RU52)/39	60	5300	15.62	16.50	No
802.11be(EHT20)	64	5320	15.75	16.50	No

	(RU52)/40					
	802.11be(EHT20) (RU106)/53	52	5260	18.81	19.00	No
	802.11be(EHT20) (RU106)/53	60	5300	18.52	19.00	No
	802.11be(EHT20) (RU106)/54	64	5320	18.84	19.00	No
5.6 (5.47~5.725)	802.11a	100	5500	18.73	19.00	No
		116	5580	18.70	19.00	No
		140	5700	18.93	19.00	No
		144	5720	18.79	19.00	No
	802.11n(HT20)	100	5500	18.93	19.00	No
		116	5580	18.94	19.00	No
		140	5700	18.88	19.00	No
		144	5720	18.71	19.00	No
	802.11n(HT40)	102	5510	18.84	19.00	No
		110	5550	18.75	19.00	No
		134	5670	18.83	19.00	No
		142	5710	18.86	19.00	No
	802.11ac(VHT20)	100	5500	18.91	19.00	No
		116	5580	18.90	19.00	No
		140	5700	18.81	19.00	No
		144	5720	18.79	19.00	No
	802.11ac(VHT40)	102	5510	18.53	19.00	No
		110	5550	18.70	19.00	No
		134	5670	18.86	19.00	No
		142	5710	18.69	19.00	No
	802.11ac(VHT80)	106	5530	18.82	19.00	No
		122	5610	18.98	19.00	No
		138	5690	18.98	19.00	No
	802.11ac(VHT160)	114	5570	15.89	17.00	No
	802.11ax(HE20) (SU)	100	5500	18.82	19.00	No
		116	5580	18.87	19.00	No
		140	5700	18.80	19.00	No
		144	5720	18.79	19.00	No
	802.11ax(HE40) (SU)	102	5510	18.79	19.00	No
		110	5550	19.00	19.00	No
		134	5670	18.88	19.00	No
		142	5710	18.71	19.00	No
	802.11ax(HE80) (SU)	106	5530	18.58	19.00	No
		122	5610	18.81	19.00	No
		138	5690	18.52	19.00	No
	802.11ax(HE160)	114	5570	18.51	19.00	No

(SU)					
802.11be(EHT20) (SU)	100	5500	18.85	19.00	No
	116	5580	18.77	19.00	No
	140	5700	18.69	19.00	No
	144	5720	18.98	19.00	No
802.11be(EHT40) (SU)	102	5510	18.84	19.00	No
	110	5550	18.88	19.00	No
	134	5670	18.86	19.00	No
	142	5710	18.87	19.00	No
802.11be(EHT80) (SU)	106	5530	18.84	19.00	No
	122	5610	18.82	19.00	No
	138	5690	18.72	19.00	No
802.11be(EHT160) (SU)	114	5570	15.61	17.00	No
802.11ax(HE20) (RU26)/0	100	5500	12.24	13.00	No
802.11ax(HE20) (RU26)/4	116	5580	11.99	13.00	No
802.11ax(HE20) (RU26)/8	140	5700	12.15	13.00	No
802.11ax(HE20) (RU26)/8	144	5720	12.22	13.00	No
802.11ax(HE20) (RU52)/37	100	5500	15.95	16.50	No
802.11ax(HE20) (RU52)/39	116	5580	15.85	16.50	No
802.11ax(HE20) (RU52)/40	140	5700	16.06	16.50	No
802.11ax(HE20) (RU52)/40	144	5720	15.88	16.50	No
802.11ax(HE20) (RU106)/53	100	5500	18.57	19.00	No
802.11ax(HE20) (RU106)/53	116	5580	18.60	19.00	No
802.11ax(HE20) (RU106)/54	140	5700	15.93	17.00	No
802.11ax(HE20) (RU106)/54	144	5720	14.88	15.00	No
802.11be(EHT20) (RU26)/0	100	5500	12.51	13.50	No
802.11be(EHT20) (RU26)/4	116	5580	12.39	13.50	No
802.11be(EHT20)	140	5700	11.06	12.00	No

	(RU26)/8					
	802.11be(EHT20) (RU26)/8	144	5720	12.53	13.50	No
	802.11be(EHT20) (RU52)/37	100	5500	16.45	16.50	No
	802.11be(EHT20) (RU52)/39	116	5580	16.50	16.50	No
	802.11be(EHT20) (RU52)/39	140	5700	14.25	15.00	No
	802.11be(EHT20) (RU52)/40	144	5720	15.86	16.50	No
	802.11be(EHT20) (RU106)/53	100	5500	18.39	19.00	No
	802.11be(EHT20) (RU106)/53	116	5580	18.38	19.00	No
	802.11be(EHT20) (RU106)/54	140	5700	15.85	17.00	No
	802.11be(EHT20) (RU106)/54	144	5720	15.91	16.00	No
5.8 (5.725~5.85)	802.11a	149	5745	18.51	19.00	No
		157	5785	18.67	19.00	No
		165	5825	18.55	19.00	No
	802.11n(HT20)	149	5745	18.54	19.00	No
		157	5785	18.51	19.00	No
		165	5825	18.72	19.00	No
	802.11n(HT40)	151	5755	18.59	19.00	No
		159	5795	18.64	19.00	No
	802.11ac(VHT20)	149	5745	18.55	19.00	No
		157	5785	18.69	19.00	No
		165	5825	18.57	19.00	No
	802.11ac(VHT40)	151	5755	18.40	19.00	No
		159	5795	18.49	19.00	No
	802.11ac(VHT80)	155	5775	18.56	19.00	No
	802.11ax(HE20) (SU)	149	5745	18.52	19.00	No
		157	5785	18.41	19.00	No
		165	5825	18.99	19.00	No
	802.11ax(HE40) (SU)	151	5755	18.53	19.00	No
		159	5795	18.97	19.00	No
	802.11ax(HE80) (SU)	155	5775	18.97	19.00	No
	802.11be(EHT20) (SU)	149	5745	18.81	19.00	No
		157	5785	18.67	19.00	No
		165	5825	18.86	19.00	No

	802.11be(EHT40) (SU)	151	5755	18.78	19.00	No
		159	5795	18.66	19.00	No
	802.11be(EHT80) (SU)	155	5775	18.83	19.00	No
	802.11ax(HE20) (RU26)/0	149	5745	18.57	19.00	No
	802.11ax(HE20) (RU26)/4	157	5785	18.62	19.00	No
	802.11ax(HE20) (RU26)/8	165	5825	18.70	19.00	No
	802.11ax(HE20) (RU52)/37	149	5745	18.96	19.00	No
	802.11ax(HE20) (RU52)/39	157	5785	18.91	19.00	No
	802.11ax(HE20) (RU52)/40	165	5825	18.53	19.00	No
	802.11ax(HE20) (RU106)/53	149	5745	18.74	19.00	No
	802.11ax(HE20) (RU106)/54	157	5785	18.68	19.00	No
	802.11ax(HE20) (RU106)/54	165	5825	18.63	19.00	No
	802.11be(EHT20) (RU26)/0	149	5745	18.95	19.00	No
	802.11be(EHT20) (RU26)/4	157	5785	18.87	19.00	No
	802.11be(EHT20) (RU26)/8	165	5825	18.74	19.00	No
	802.11be(EHT20) (RU52)/37	149	5745	18.85	19.00	No
	802.11be(EHT20) (RU52)/39	157	5785	18.74	19.00	No
	802.11be(EHT20) (RU52)/40	165	5825	18.82	19.00	No
	802.11be(EHT20) (RU106)/53	149	5745	18.94	19.00	No
	802.11be(EHT20) (RU106)/53	157	5785	18.79	19.00	No
	802.11be(EHT20) (RU106)/54	165	5825	18.70	19.00	No
5.9 (5.815 ~ 5.885)	802.11a	169	5845	18.99	19.00	No
		173	5865	18.69	19.00	No
		177	5885	18.63	19.00	No

		169	5845	18.67	19.00	No
	802.11n(HT20)	173	5865	18.78	19.00	No
		177	5885	18.78	19.00	No
	802.11n(HT40)	167	5835	18.80	19.00	No
		175	5875	18.54	19.00	No
	802.11ac(VHT20)	169	5845	18.87	19.00	No
		173	5865	18.78	19.00	No
		177	5885	18.80	19.00	No
	802.11ac(VHT40)	167	5835	18.77	19.00	No
		175	5875	18.80	19.00	No
	802.11ac(VHT80)	171	5855	18.71	19.00	No
	802.11ac(VHT160)	163	5815	15.78	17.00	No
	802.11ax(HE20) (SU)	169	5845	18.82	19.00	No
		173	5865	18.51	19.00	No
		177	5885	18.96	19.00	No
	802.11ax(HE40) (SU)	167	5835	18.72	19.00	No
		175	5875	18.73	19.00	No
	802.11ax(HE80) (SU)	171	5855	18.78	19.00	No
	802.11ax(HE160) (SU)	163	5815	15.93	17.00	No
	802.11be(EHT20) (SU)	169	5845	18.55	19.00	No
		173	5865	18.69	19.00	No
		177	5885	18.76	19.00	No
	802.11be(EHT40) (SU)	167	5835	18.94	19.00	No
		175	5875	18.95	19.00	No
	802.11be(EHT80) (SU)	171	5855	18.79	19.00	No
	802.11be(EHT160) (SU)	163	5815	15.97	17.00	No
	802.11be(EHT20) (RU26)/0	169	5845	11.16	12.00	No
	802.11be(EHT20) (RU26)/4	173	5865	11.00	12.00	No
	802.11be(EHT20) (RU26)/8	177	5885	11.13	12.00	No
	802.11be(EHT20) (RU52)/37	169	5845	13.80	15.00	No
	802.11be(EHT20) (RU52)/39	173	5865	13.79	15.00	No
	802.11be(EHT20) (RU52)/40	177	5885	13.81	15.00	No
	802.11be(EHT20)	169	5845	15.78	16.50	No

	(RU106)/53					
	802.11be(EHT20) (RU106)/54	173	5865	15.77	16.50	No
	802.11be(EHT20) (RU106)/54	177	5885	16.04	16.50	No

Note: For WiFi SAR testing was performed on single antenna RF power in SISO mode that is larger to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission used more conservative "Max. (main ant) + Max. (aux. ant)" method to determine SAR compliance. When the sum of 1-g SISO transmission SAR measurement is <1.6 W/kg, or the SPLSR value ≤0.04 the MIMO SAR test is not required.

**8.1.7 6G WIFI (Aux. Antenna)**

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
6 (5.925~7.125)	802.11a	1	5955	6.00	7.00	No
		49	6195	5.66	7.00	No
		93	6415	5.98	7.00	No
		97	6435	5.66	7.00	No
		105	6475	5.67	7.00	No
		113	6515	5.78	7.00	No
		117	6535	5.60	7.00	No
		149	6695	6.17	7.00	No
		181	6855	6.02	7.00	No
		185	6875	5.45	7.00	No
		189	6895	5.93	7.00	No
		209	6995	5.80	7.00	No
		229	7095	5.60	7.00	No
		233	7115	6.10	7.00	No
	802.11ax(HE20) (SU)	1	5955	5.73	7.00	No
		49	6195	5.90	7.00	No
		93	6415	5.89	7.00	No
		97	6435	6.13	7.00	No
		105	6475	5.80	7.00	No
		113	6515	5.80	7.00	No
		117	6535	6.08	7.00	No
		149	6695	5.49	7.00	No
		181	6855	5.59	7.00	No
		185	6875	6.11	7.00	No
		209	6995	5.74	7.00	No
		233	7115	5.48	7.00	No
	802.11ax(HE40) (SU)	3	5965	8.75	10.00	No
		51	6205	9.15	10.00	No
		91	6405	8.90	10.00	No
		99	6445	9.09	10.00	No
		107	6485	8.43	10.00	No
		115	6525	8.58	10.00	No
		123	6565	9.13	10.00	No
		147	6685	8.89	10.00	No
		179	6845	9.09	10.00	No
		187	6885	8.75	10.00	No
		195	6925	9.25	10.00	No
		211	7005	8.80	10.00	No
		227	7085	8.73	10.00	No

802.11ax(HE80) (SU)	7	5985	11.89	13.00	No
	55	6225	11.76	13.00	No
	87	6385	11.80	13.00	No
	103	6465	12.06	13.00	No
	119	6545	11.90	13.00	No
	135	6625	11.76	13.00	No
	151	6705	12.06	13.00	No
	167	6785	11.86	13.00	No
	183	6865	12.21	13.00	No
	199	6945	11.98	13.00	No
	215	7025	11.80	13.00	No
	15	6025	12.57	13.00	Yes
802.11ax(HE160) (SU)	47	6185	<b>12.93</b>	13.00	Yes
	79	6345	<b>12.93</b>	13.00	Yes
	111	6505	12.57	13.00	Yes
	143	6665	12.37	13.00	Yes
	175	6825	12.74	13.00	Yes
	207	6985	12.68	13.00	Yes
	1	5955	6.25	7.00	No
802.11be(EHT20) (SU)	49	6195	5.92	7.00	No
	93	6415	5.67	7.00	No
	97	6435	5.47	7.00	No
	105	6475	5.94	7.00	No
	113	6515	5.80	7.00	No
	117	6535	5.77	7.00	No
	149	6695	5.61	7.00	No
	181	6855	5.84	7.00	No
	185	6875	6.02	7.00	No
	209	6995	5.75	7.00	No
	233	7115	5.69	7.00	No
	3	5965	8.85	10.00	No
802.11be(EHT40) (SU)	51	6205	8.59	10.00	No
	91	6405	8.57	10.00	No
	99	6445	9.21	10.00	No
	107	6485	9.14	10.00	No
	115	6525	8.81	10.00	No
	123	6565	8.57	10.00	No
	147	6685	8.65	10.00	No
	179	6845	8.87	10.00	No
	187	6885	8.54	10.00	No
	195	6925	8.73	10.00	No
	211	7005	8.81	10.00	No
	227	7085	9.08	10.00	No

802.11be(EHT80) (SU)	7	5985	11.90	13.00	No
	55	6225	12.28	13.00	No
	87	6385	11.72	13.00	No
	103	6465	11.91	13.00	No
	119	6545	11.70	13.00	No
	135	6625	11.63	13.00	No
	151	6705	11.57	13.00	No
	167	6785	11.72	13.00	No
	183	6865	11.63	13.00	No
	199	6945	12.00	13.00	No
	215	7025	11.93	13.00	No
	15	6025	11.62	13.00	No
802.11be(EHT160) (SU)	47	6185	12.11	13.00	No
	79	6345	11.86	13.00	No
	111	6505	11.71	13.00	No
	143	6665	11.90	13.00	No
	175	6825	11.84	13.00	No
	207	6985	12.12	13.00	No
	1	5955	-2.28	-1.00	No
802.11be(EHT20) (RU26)	49	6195	-2.16	-1.00	No
	93	6415	-2.18	-1.00	No
	97	6435	-2.28	-1.00	No
	105	6475	-2.33	-1.00	No
	113	6515	-1.83	-1.00	No
	117	6535	-1.71	-1.00	No
	149	6695	-2.40	-1.00	No
	181	6855	-2.58	-1.00	No
	185	6875	-2.39	-1.00	No
	209	6995	-2.48	-1.00	No
	233	7115	-1.86	-1.00	No
	1	5955	0.00	1.50	No
802.11be(EHT20) (RU52)	49	6195	0.26	1.50	No
	93	6415	0.32	1.50	No
	97	6435	0.44	1.50	No
	105	6475	0.39	1.50	No
	113	6515	0.27	1.50	No
	117	6535	0.31	1.50	No
	149	6695	0.03	1.50	No
	181	6855	0.18	1.50	No
	185	6875	0.57	1.50	No
	209	6995	0.35	1.50	No
	233	7115	0.73	1.50	No
802.11be(EHT20)	1	5955	3.35	4.50	No

(RU106)	49	6195	3.24	4.50	No
	93	6415	3.35	4.50	No
	97	6435	3.44	4.50	No
	105	6475	3.61	4.50	No
	113	6515	3.15	4.50	No
	117	6535	2.92	4.50	No
	149	6695	2.94	4.50	No
	181	6855	3.45	4.50	No
	185	6875	3.25	4.50	No
	209	6995	2.79	4.50	No
	233	7115	3.42	4.50	No

Note: When multiple channel bandwidth configurations in a frequency band have the same maximum tune-up output power, the test configuration is determined by applying the following steps sequentially.

1) The largest channel bandwidth configuration is selected between the multiple configurations in a frequency band with the same maximum tune-up output power.

**8.1.8 6G WIFI (Main Antenna)**

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
6 (5.925~7.125)	802.11a	1	5955	5.43	7.00	No
		49	6195	6.02	7.00	No
		93	6415	5.88	7.00	No
		97	6435	5.57	7.00	No
		105	6475	5.95	7.00	No
		113	6515	5.73	7.00	No
		117	6535	6.16	7.00	No
		149	6695	5.72	7.00	No
		181	6855	5.53	7.00	No
		185	6875	6.04	7.00	No
		189	6895	5.81	7.00	No
		209	6995	5.55	7.00	No
		229	7095	5.95	7.00	No
		233	7115	5.87	7.00	No
	802.11ax(HE20) (SU)	1	5955	6.14	7.00	No
		49	6195	5.58	7.00	No
		93	6415	5.69	7.00	No
		97	6435	5.57	7.00	No
		105	6475	5.92	7.00	No
		113	6515	5.53	7.00	No
		117	6535	5.57	7.00	No
		149	6695	6.19	7.00	No
		181	6855	5.69	7.00	No
		185	6875	5.60	7.00	No
		209	6995	5.57	7.00	No
		233	7115	5.43	7.00	No
	802.11ax(HE40) (SU)	3	5965	8.57	10.00	No
		51	6205	8.56	10.00	No
		91	6405	8.95	10.00	No
		99	6445	8.61	10.00	No
		107	6485	8.93	10.00	No
		115	6525	8.66	10.00	No
		123	6565	8.95	10.00	No
		147	6685	9.12	10.00	No
		179	6845	8.95	10.00	No
		187	6885	8.72	10.00	No
		195	6925	8.32	10.00	No
		211	7005	8.60	10.00	No
		227	7085	8.76	10.00	No

802.11ax(HE80) (SU)	7	5985	11.96	13.00	No
	55	6225	11.52	13.00	No
	87	6385	11.99	13.00	No
	103	6465	12.20	13.00	No
	119	6545	12.17	13.00	No
	135	6625	12.03	13.00	No
	151	6705	12.08	13.00	No
	167	6785	11.61	13.00	No
	183	6865	11.77	13.00	No
	199	6945	12.15	13.00	No
	215	7025	12.01	13.00	No
	15	6025	12.89	13.00	Yes
802.11ax(HE160) (SU)	47	6185	<b>12.92</b>	13.00	Yes
	79	6345	12.81	13.00	Yes
	111	6505	12.80	13.00	Yes
	143	6665	12.91	13.00	Yes
	175	6825	12.75	13.00	Yes
	207	6985	12.49	13.00	Yes
	1	5955	5.87	7.00	No
802.11be(EHT20) (SU)	49	6195	5.76	7.00	No
	93	6415	5.90	7.00	No
	97	6435	5.54	7.00	No
	105	6475	6.13	7.00	No
	113	6515	5.57	7.00	No
	117	6535	5.82	7.00	No
	149	6695	6.15	7.00	No
	181	6855	6.10	7.00	No
	185	6875	5.83	7.00	No
	209	6995	5.49	7.00	No
	233	7115	5.77	7.00	No
	3	5965	9.12	10.00	No
802.11be(EHT40) (SU)	51	6205	8.73	10.00	No
	91	6405	9.01	10.00	No
	99	6445	9.19	10.00	No
	107	6485	8.69	10.00	No
	115	6525	9.01	10.00	No
	123	6565	9.12	10.00	No
	147	6685	8.69	10.00	No
	179	6845	8.69	10.00	No
	187	6885	9.18	10.00	No
	195	6925	8.91	10.00	No
	211	7005	9.13	10.00	No
	227	7085	8.96	10.00	No

802.11be(EHT80) (SU)	7	5985	11.69	13.00	No
	55	6225	11.58	13.00	No
	87	6385	11.42	13.00	No
	103	6465	11.81	13.00	No
	119	6545	11.63	13.00	No
	135	6625	12.06	13.00	No
	151	6705	11.77	13.00	No
	167	6785	11.93	13.00	No
	183	6865	12.08	13.00	No
	199	6945	11.83	13.00	No
	215	7025	11.57	13.00	No
	15	6025	12.25	13.00	No
802.11be(EHT160) (SU)	47	6185	11.69	13.00	No
	79	6345	11.65	13.00	No
	111	6505	11.96	13.00	No
	143	6665	12.16	13.00	No
	175	6825	11.80	13.00	No
	207	6985	11.57	13.00	No
	1	5955	-1.70	-1.00	No
802.11be(EHT20) (RU26)	49	6195	-2.10	-1.00	No
	93	6415	-1.94	-1.00	No
	97	6435	-2.41	-1.00	No
	105	6475	-2.48	-1.00	No
	113	6515	-2.39	-1.00	No
	117	6535	-2.04	-1.00	No
	149	6695	-2.30	-1.00	No
	181	6855	-2.25	-1.00	No
	185	6875	-1.82	-1.00	No
	209	6995	-2.05	-1.00	No
	233	7115	-2.02	-1.00	No
	1	5955	0.46	1.50	No
802.11be(EHT20) (RU52)	49	6195	0.27	1.50	No
	93	6415	0.31	1.50	No
	97	6435	0.74	1.50	No
	105	6475	0.58	1.50	No
	113	6515	0.47	1.50	No
	117	6535	0.73	1.50	No
	149	6695	0.55	1.50	No
	181	6855	0.24	1.50	No
	185	6875	0.56	1.50	No
	209	6995	0.46	1.50	No
	233	7115	0.72	1.50	No
802.11be(EHT20)	1	5955	3.10	4.50	No

(RU106)	49	6195	3.44	4.50	No
	93	6415	3.77	4.50	No
	97	6435	3.42	4.50	No
	105	6475	3.44	4.50	No
	113	6515	3.23	4.50	No
	117	6535	3.15	4.50	No
	149	6695	3.17	4.50	No
	181	6855	3.21	4.50	No
	185	6875	3.52	4.50	No
	209	6995	3.68	4.50	No
	233	7115	3.23	4.50	No

Note: When multiple channel bandwidth configurations in a frequency band have the same maximum tune-up output power, the test configuration is determined by applying the following steps sequentially.

1) The largest channel bandwidth configuration is selected between the multiple configurations in a frequency band with the same maximum tune-up output power.

**8.1.9 6G WIFI (MIMO)**

Band (GHz)	Mode	Channel	Freq. (MHz)	Conducted Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
6 (5.925~7.125)	802.11a	1	5955	5.66	4.00	No
		49	6195	5.65	4.00	No
		93	6415	5.84	4.00	No
		97	6435	5.44	4.00	No
		105	6475	5.60	4.00	No
		113	6515	5.85	4.00	No
		117	6535	5.46	4.00	No
		149	6695	5.81	4.00	No
		181	6855	5.98	4.00	No
		185	6875	5.39	4.00	No
		189	6895	5.71	4.00	No
		209	6995	5.76	4.00	No
		229	7095	5.61	4.00	No
		233	7115	5.85	4.00	No
	802.11ax(HE20) (SU)	1	5955	5.55	7.00	No
		49	6195	5.67	7.00	No
		93	6415	5.48	7.00	No
		97	6435	6.03	7.00	No
		105	6475	5.58	7.00	No
		113	6515	5.52	7.00	No
		117	6535	5.79	7.00	No
		149	6695	5.40	7.00	No
		181	6855	5.37	7.00	No
		185	6875	5.91	7.00	No
		209	6995	5.56	7.00	No
		233	7115	5.27	7.00	No
	802.11ax(HE40) (SU)	3	5965	8.42	10.00	No
		51	6205	9.08	10.00	No
		91	6405	8.87	10.00	No
		99	6445	8.98	10.00	No
		107	6485	8.19	10.00	No
		115	6525	8.49	10.00	No
		123	6565	8.89	10.00	No
		147	6685	8.78	10.00	No
		179	6845	8.82	10.00	No
		187	6885	8.53	10.00	No
		195	6925	9.00	10.00	No
		211	7005	8.51	10.00	No
		227	7085	8.44	10.00	No

802.11ax(HE80) (SU)	7	5985	11.65	13.00	No
	55	6225	11.76	13.00	No
	87	6385	11.73	13.00	No
	103	6465	11.99	13.00	No
	119	6545	11.78	13.00	No
	135	6625	11.76	13.00	No
	151	6705	11.94	13.00	No
	167	6785	11.84	13.00	No
	183	6865	12.05	13.00	No
	199	6945	11.81	13.00	No
	215	7025	11.61	13.00	No
	15	6025	12.21	13.00	No
802.11ax(HE160) (SU)	47	6185	11.97	13.00	No
	79	6345	12.25	13.00	No
	111	6505	12.45	13.00	No
	143	6665	12.53	13.00	No
	175	6825	12.66	13.00	No
	207	6985	12.52	13.00	No
	1	5955	6.20	7.00	No
	49	6195	5.92	7.00	No
802.11be(EHT20) (SU)	93	6415	5.40	7.00	No
	97	6435	5.26	7.00	No
	105	6475	5.78	7.00	No
	113	6515	5.65	7.00	No
	117	6535	5.84	7.00	No
	149	6695	5.73	7.00	No
	181	6855	5.57	7.00	No
	185	6875	5.96	7.00	No
	209	6995	5.43	7.00	No
	233	7115	5.35	7.00	No
	3	5965	8.62	10.00	No
	51	6205	8.36	10.00	No
802.11be(EHT40) (SU)	91	6405	8.14	10.00	No
	99	6445	8.90	10.00	No
	107	6485	9.05	10.00	No
	115	6525	8.52	10.00	No
	123	6565	8.45	10.00	No
	147	6685	8.26	10.00	No
	179	6845	8.76	10.00	No
	187	6885	8.32	10.00	No
	195	6925	8.60	10.00	No
	211	7005	8.43	10.00	No
	227	7085	8.95	10.00	No

802.11be(EHT80) (SU)	7	5985	11.74	13.00	No
	55	6225	12.02	13.00	No
	87	6385	11.60	13.00	No
	103	6465	11.62	13.00	No
	119	6545	11.63	13.00	No
	135	6625	11.44	13.00	No
	151	6705	11.60	13.00	No
	167	6785	11.44	13.00	No
	183	6865	11.44	13.00	No
	199	6945	11.83	13.00	No
	215	7025	11.68	13.00	No
	15	6025	11.46	13.00	No
802.11be(EHT160) (SU)	47	6185	11.93	13.00	No
	79	6345	11.74	13.00	No
	111	6505	11.50	13.00	No
	143	6665	11.81	13.00	No
	175	6825	11.46	13.00	No
	207	6985	11.76	13.00	No
	1	5955	-2.44	-1.00	No
802.11be(EHT20) (RU26)	49	6195	-2.41	-1.00	No
	93	6415	-2.49	-1.00	No
	97	6435	-2.56	-1.00	No
	105	6475	-2.54	-1.00	No
	113	6515	-2.25	-1.00	No
	117	6535	-1.90	-1.00	No
	149	6695	-2.58	-1.00	No
	181	6855	-2.72	-1.00	No
	185	6875	-2.64	-1.00	No
	209	6995	-2.56	-1.00	No
	233	7115	-1.97	-1.00	No
	1	5955	-0.23	1.50	No
802.11be(EHT20) (RU52)	49	6195	0.11	1.50	No
	93	6415	0.18	1.50	No
	97	6435	0.45	1.50	No
	105	6475	0.12	1.50	No
	113	6515	0.01	1.50	No
	117	6535	0.15	1.50	No
	149	6695	-0.22	1.50	No
	181	6855	-0.05	1.50	No
	185	6875	0.44	1.50	No
	209	6995	0.18	1.50	No
	233	7115	0.39	1.50	No
802.11be(EHT20)	1	5955	3.17	4.50	No

(RU106)	49	6195	3.07	4.50	No
	93	6415	3.11	4.50	No
	97	6435	3.46	4.50	No
	105	6475	3.47	4.50	No
	113	6515	2.96	4.50	No
	117	6535	2.95	4.50	No
	149	6695	2.85	4.50	No
	181	6855	3.31	4.50	No
	185	6875	3.14	4.50	No
	209	6995	2.60	4.50	No
	233	7115	3.28	4.50	No

Note: For WiFi SAR testing was performed on single antenna RF power in SISO mode that is larger to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission used more conservative "Max. (main ant) + Max. (aux. ant)" method to determine SAR compliance. When the sum of 1-g SISO transmission SAR measurement is <1.6 W/kg, or the SPLSR value ≤0.04 the MIMO SAR test is not required.

## 8.2 Bluetooth

### 8.2.1 Bluetooth (Aux. Antenna)


Mode	GFSK			$\pi/4$ -DQPSK		
Channel	0	39	78	0	39	78
Frequency (MHz)	2402	2441	2480	2402	2441	2480
Average Power (dBm)	12.20	12.18	<b>12.40</b>	9.93	10.19	9.97
Tune-Up Limit (dBm)	12.50	12.50	12.50	11.00	11.00	11.00
SAR Test Require	Yes	Yes	Yes	No	No	No
Mode	8-DPSK			/		
Channel	0	39	78	/	/	/
Frequency (MHz)	2402	2441	2480	/	/	/
Average Power (dBm)	10.21	9.91	10.01	/	/	/
Tune-Up Limit (dBm)	11.00	11.00	11.00	/	/	/
SAR Test Require	No	No	No	/	/	/
Mode	BLE-1Mbps			BLE-2Mbps		
Channel	0	19	39	1	19	38
Frequency (MHz)	2402	2440	2480	2404	2440	2478
Average Power (dBm)	11.47	11.19	11.43	11.40	11.08	11.48
Tune-Up Limit (dBm)	12.00	12.00	12.00	12.00	12.00	12.00
SAR Test Require	No	No	No	No	No	No

Note: Since Bluetooth BR mode is the maximum output power mode, SAR measurements were performed with test software using DH5 modulation, and SAR measurement is not required for the EDR and LE. When the secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode.

The Bluetooth duty cycle is 76.39% as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation.


#### Duty Cycle


##### Bluetooth-GFSK

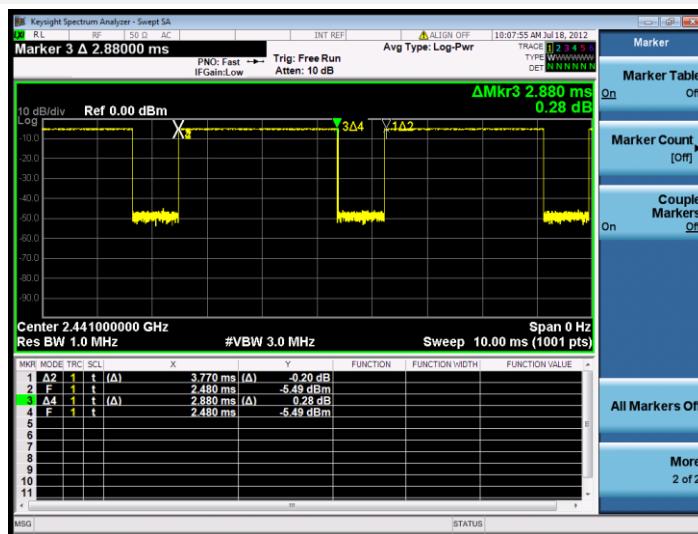

## 9 TEST EXCLUSION CONSIDERATION

### 9.1 Antenna Location Sketch

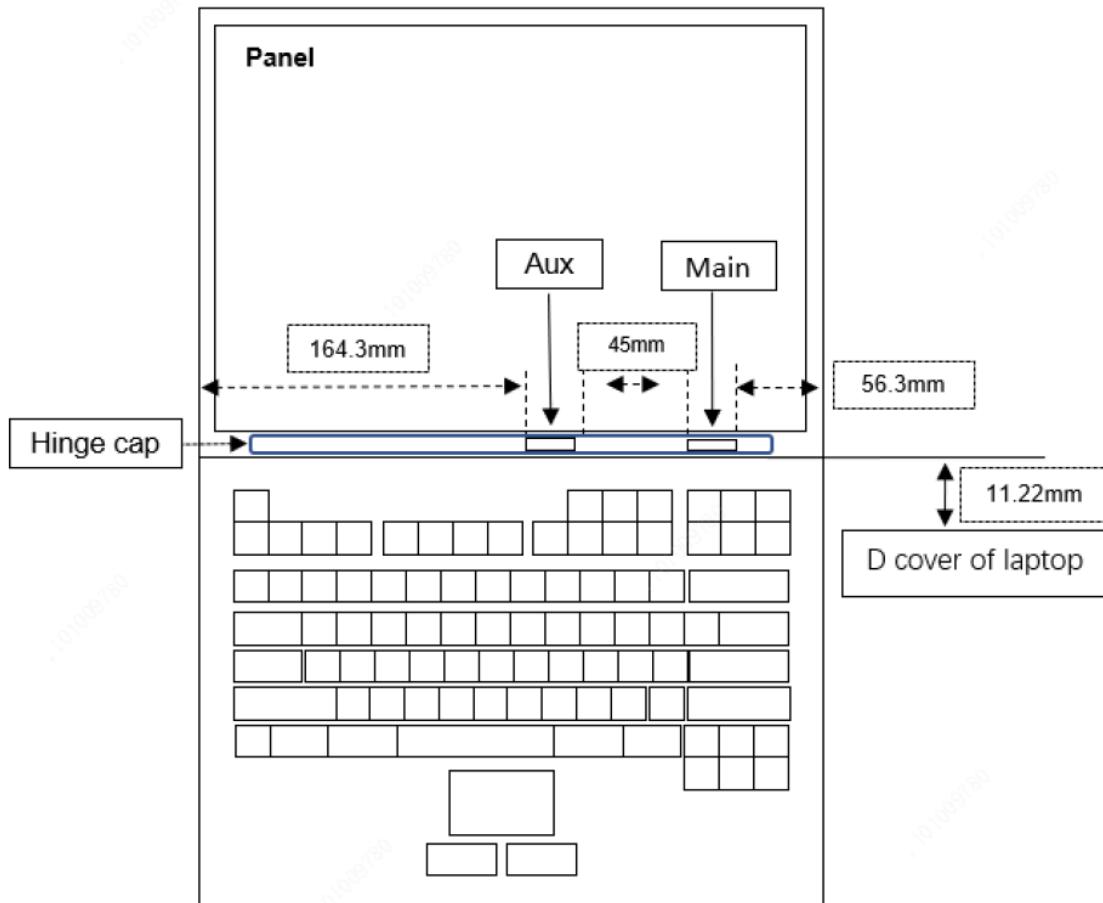

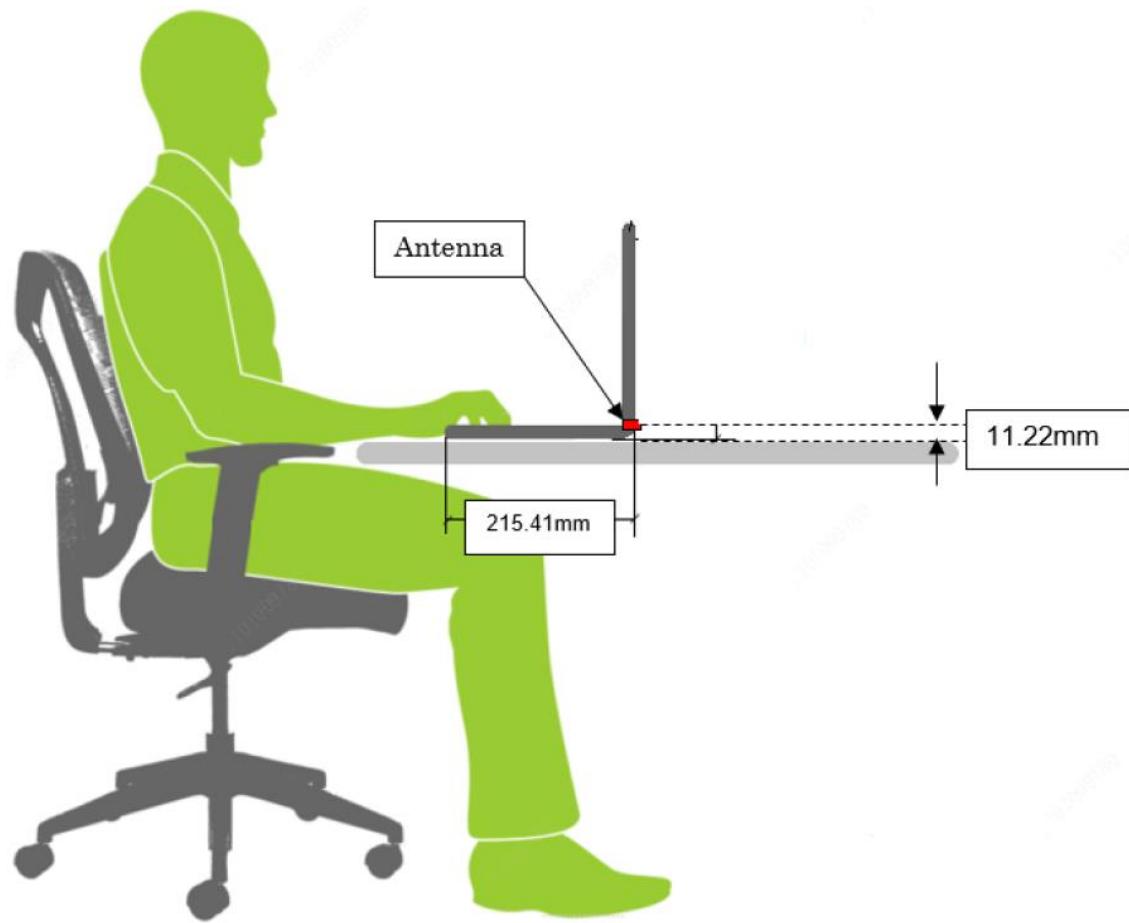

Antenna	Support Bands
Aux.	WLAN 2.4G/5G/6G/BT
Main	WLAN 2.4G/5G/6G

## 9.2 SAR Test Consideration Table

According with FCC KDB 447498 D04, Appendix B, The SAR-based exemption formula applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold  $P_{th}$  (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). The following table shows the power threshold from 5mm to 50mm.

Power Thresholds (mW)					
Frequency (MHz)	At separation distance of $\leq 5$ mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
300	39 mW	65 mW	88 mW	110 mW	129 mW
450	22 mW	44 mW	67 mW	89 mW	112 mW
835	9 mW	25 mW	44 mW	66 mW	90 mW
1900	3 mW	12 mW	26 mW	44 mW	66 mW
2450	3 mW	10 mW	22 mW	38 mW	59 mW
3600	2 mW	8 mW	18 mW	32 mW	49 mW
5800	1 mW	6 mW	14 mW	25 mW	40 mW
Frequency (MHz)	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of 50 mm
300	148 mW	166 mW	184 mW	201 mW	217 mW
450	135 mW	158 mW	180 mW	203 mW	226 mW
835	116 mW	145 mW	175 mW	207 mW	240 mW
1900	92 mW	122 mW	157 mW	195 mW	236 mW
2450	83 mW	111 mW	143 mW	179 mW	219 mW
3600	71 mW	96 mW	125 mW	158 mW	195 mW
5800	58 mW	80 mW	106 mW	136 mW	169 mW

### 9.2.1 SAR Test Consideration

This host is a Handheld Console PC, under normal use the RF exposure scenarios are shown in the table below:

RF Exposure Position		RF Exposure Scenarios					
Bottom Side		Body					

#### Aux. Antenna Body RF exposure scenarios

Test Position Configurations	Mode	Bluetooth	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3	U-NII-4
Calculated Frequency(MHz)		2480	2462	5320	5710	5825	5925
Bottom Side	Distance to User (mm)			11.22			
	Max. Peak Power (dBm)	12.50	16.00	16.00	16.00	16.00	16.00
	Max. Peak Power (mW)	17.78	39.81	39.81	39.81	39.81	39.81
	Exclusion Threshold (mW)	12.67	12.73	7.86	7.52	7.43	7.35
	SAR Test Required	Yes	Yes	Yes	Yes	Yes	Yes

#### Main Antenna Body RF exposure scenarios

Test Position Configurations	Mode	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3	U-NII-4
Calculated Frequency(MHz)		2462	5320	5710	5825	5925
Bottom Side	Distance to User (mm)			11.22		
	Max. Peak Power (dBm)	16.00	16.00	16.00	16.00	16.00
	Max. Peak Power (mW)	39.81	39.81	39.81	39.81	39.81
	Exclusion Threshold (mW)	12.73	7.86	7.52	7.43	7.35
	SAR Test Required	Yes	Yes	Yes	Yes	Yes

## Note:

1. Maximum power is the source-based time-average power and represents the maximum RF output power including tune-up tolerance among production units
2. Per KDB 447498 D04, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. Per KDB 447498 D04, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
4. Per KDB 447498 D04, for separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive), the threshold  $P_{th}$  (mW) is given by Following:

$$P_{th} (mW) = \begin{cases} ERP_{20cm} (d/20cm)^x & d \leq 20cm \\ ERP_{20cm} & 20cm < d \leq 40cm \end{cases}$$

where

$$x = -\log_{10} \left( \frac{60}{ERP_{20cm} \sqrt{f}} \right)$$

- a.  $f$ (GHz) is the RF channel transmit frequency in GHz
- b.  $d$  is the separation distance (cm), The result is rounded to one decimal place for comparison
- c.  $ERP_{20cm}$  are determined by:

$$ERP_{20cm} (mW) = f(x) = \begin{cases} 2040f & 0.3GHz \leq f < 1.5GHz \\ 3060 & 1.5GHz \leq f \leq 6GHz \end{cases}$$

5. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.8. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
6. Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
  - a. When KDB Publication 447498 D04 SAR test exclusion applies to the OFDM configuration.
  - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
7. Per KDB 248227 D01 SAR is not required for the following U-NII-1 and U-NII-2A bands conditions.
  - a. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
  - b. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

## 10 TEST RESULT

1. The reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WIFI signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".
  - c. For WIFI/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Absorbed power density (APD) using a 4cm<sup>2</sup> averaging area is reported based on SAR measurements.
3. Per KDB 447498 D04, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8 \text{ W/kg}$  or  $2.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\leq 100 \text{ MHz}$
  - $\leq 0.6 \text{ W/kg}$  or  $1.5 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4 \text{ W/kg}$  or  $1.0 \text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200 \text{ MHz}$
4. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8 \text{ W/kg}$

**10.1 Bluetooth**

Mode	Antenna	Antenna	State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
<b>Body</b>																
DH5	Speed	Aux.	Laptop	Bottom Side	0	78	2480	0.00	0.090	12.40	12.50	1.023	76.39	1.309	<b>0.121</b>	1#
					0	0	2402	-0.06	0.074	12.20	12.50	1.072	76.39	1.309	0.104	/
					0	39	2441	0.00	0.064	12.18	12.50	1.076	76.39	1.309	0.090	/
	AWAN	Aux.	Laptop	Bottom Side	0	78	2480	0.02	0.083	12.40	12.50	1.023	76.39	1.309	0.111	/
					0	0	2402	0.09	0.077	12.20	12.50	1.072	76.39	1.309	0.108	/
					0	39	2441	0.05	0.062	12.18	12.50	1.076	76.39	1.309	0.087	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

**10.2 WIFI 2.4GHz**

Mode	Antenna	Antenna	State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
<b>Body</b>																
802.11b	Speed	Aux.	Laptop	Bottom Side	0	11	2462	0.08	0.095	15.81	16.00	1.045	100.00	1.000	<b>0.099</b>	2#
					0	1	2412	0.11	0.088	15.72	16.00	1.067	100.00	1.000	0.094	/
					0	6	2437	-0.12	0.074	15.63	16.00	1.089	100.00	1.000	0.081	/
	AWAN	Aux.	Laptop	Bottom Side	0	11	2462	0.17	0.085	15.81	16.00	1.045	100.00	1.000	0.089	/
					0	1	2412	0.00	0.086	15.72	16.00	1.067	100.00	1.000	0.092	/
					0	6	2437	-0.12	0.072	15.63	16.00	1.089	100.00	1.000	0.078	/
	Speed	Main	Laptop	Bottom Side	0	6	2437	-0.03	0.109	15.91	16.00	1.021	100.00	1.000	<b>0.111</b>	3#
					0	1	2412	0.05	0.101	15.67	16.00	1.079	100.00	1.000	0.109	/
					0	11	2462	0.05	0.100	15.68	16.00	1.076	100.00	1.000	0.108	/
	AWAN	Main	Laptop	Bottom Side	0	6	2437	0.09	0.098	15.91	16.00	1.021	100.00	1.000	0.100	/
					0	1	2412	-0.11	0.094	15.67	16.00	1.079	100.00	1.000	0.101	/
					0	11	2462	0.06	0.099	15.68	16.00	1.076	100.00	1.000	0.107	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

**10.3WIFI 5GHz**

Fre. Band	Mode	Antenna Manufacturer	Antenna	State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
<b>Body</b>																	
5.2& 5.3G	802.11 ac80	AWAN	Aux.	Laptop	Bottom Side	0	58	5290	-0.05	0.188	15.51	16.00	1.119	100.00	1.000	0.210	/
		Speed	Aux.	Laptop	Bottom Side	0	58	5290	-0.06	0.215	15.51	16.00	1.119	100.00	1.000	<b>0.241</b>	4#
		AWAN	Main	Laptop	Bottom Side	0	58	5290	-0.03	0.230	15.58	16.00	1.102	100.00	1.000	<b>0.253</b>	5#
		Speed	Main	Laptop	Bottom Side	0	58	5290	-0.10	0.211	15.58	16.00	1.102	100.00	1.000	0.233	/
5.6G	802.11 ac80	AWAN	Aux.	Laptop	Bottom Side	0	106	5530	0.01	0.111	15.86	16.00	1.033	100.00	1.000	0.115	/
						0	122	5610	0.11	0.121	15.78	16.00	1.052	100.00	1.000	0.127	/
						0	138	5690	0.17	0.108	15.55	16.00	1.109	100.00	1.000	0.120	/
		Speed	Aux.	Laptop	Bottom Side	0	106	5530	0.02	0.134	15.86	16.00	1.033	100.00	1.000	<b>0.138</b>	6#
						0	122	5610	0.02	0.114	15.78	16.00	1.052	100.00	1.000	0.120	/
						0	138	5690	0.09	0.115	15.55	16.00	1.109	100.00	1.000	0.128	/
		Speed	Main	Laptop	Bottom Side	0	106	5530	-0.09	0.168	15.62	16.00	1.091	100.00	1.000	0.183	/
						0	122	5610	0.11	0.177	15.50	16.00	1.122	100.00	1.000	0.199	/
						0	138	5690	0.08	0.185	15.58	16.00	1.102	100.00	1.000	0.204	/
		AWAN	Main	Laptop	Bottom Side	0	106	5530	0.01	0.192	15.62	16.00	1.091	100.00	1.000	<b>0.209</b>	7#
						0	122	5610	0.04	0.183	15.50	16.00	1.122	100.00	1.000	0.205	/
						0	138	5690	0.04	0.176	15.58	16.00	1.102	100.00	1.000	0.194	/
5.8G	802.11 ac80	Speed	Aux.	Laptop	Bottom Side	0	155	5775	-0.09	0.150	15.75	16.00	1.059	100.00	1.000	<b>0.159</b>	8#
		AWAN	Aux.	Laptop	Bottom Side	0	155	5775	-0.08	0.144	15.75	16.00	1.059	100.00	1.000	0.152	/
		Speed	Main	Laptop	Bottom Side	0	155	5775	-0.04	0.087	15.73	16.00	1.064	100.00	1.000	<b>0.093</b>	9#
		AWAN	Main	Laptop	Bottom Side	0	155	5775	-0.01	0.077	15.73	16.00	1.064	100.00	1.000	0.082	/
5.9G	802.11 ac160	Speed	Aux.	Laptop	Bottom Side	0	163	5815	0.04	0.224	15.62	16.00	1.091	100.00	1.000	<b>0.244</b>	10#
		AWAN	Aux.	Laptop	Bottom Side	0	163	5815	0.08	0.215	15.62	16.00	1.091	100.00	1.000	0.235	/
		Speed	Main	Laptop	Bottom Side	0	163	5815	-0.04	0.258	15.95	16.00	1.012	100.00	1.000	<b>0.261</b>	11#
		AWAN	Main	Laptop	Bottom Side	0	163	5815	0.08	0.232	15.95	16.00	1.012	100.00	1.000	0.235	/

Note: Refer to ANNEX C for the detailed test data for each test configuration.

## 10.4WIFI 6GHz

Mode	Antenn a	Antenn a	State	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Measur ed APD (W/m <sup>2</sup> )	Scaled APD (W/m <sup>2</sup> )	Meas. No.
<b>Body</b>																		
802.11 ax160	AWAN Speed	Aux.	Laptop	Bottom Side	0	47	6185	0.09	0.105	12.93	13.00	1.016	100.00	1.000	0.107	0.697	<b>0.708</b>	12#
					0	15	6025	0.06	0.065	12.57	13.00	1.104	100.00	1.000	0.072	0.429	0.474	/
					0	79	6345	0.08	0.054	12.93	13.00	1.016	100.00	1.000	0.055	0.361	0.367	/
					0	111	6505	0.11	0.074	12.57	13.00	1.104	100.00	1.000	0.082	0.493	0.544	/
					0	143	6665	0.09	0.035	12.37	13.00	1.156	100.00	1.000	0.040	0.233	0.269	/
					0	175	6825	0.07	0.037	12.74	13.00	1.062	100.00	1.000	0.039	0.245	0.260	/
					0	207	6985	0.00	0.028	12.68	13.00	1.076	100.00	1.000	0.030	0.186	0.200	/
	Speed	Aux.	Laptop	Bottom Side	0	47	6185	0.07	0.072	12.93	13.00	1.016	100.00	1.000	0.073	0.478	0.486	/
					0	15	6025	-0.05	0.088	12.57	13.00	1.104	100.00	1.000	0.097	0.583	0.644	/
					0	79	6345	0.12	0.043	12.93	13.00	1.016	100.00	1.000	0.044	0.287	0.292	/
					0	111	6505	-0.05	0.054	12.57	13.00	1.104	100.00	1.000	0.060	0.361	0.399	/
					0	143	6665	0.18	0.038	12.37	13.00	1.156	100.00	1.000	0.044	0.250	0.289	/
					0	175	6825	-0.04	0.029	12.74	13.00	1.062	100.00	1.000	0.031	0.191	0.203	/
					0	207	6985	-0.09	0.024	12.68	13.00	1.076	100.00	1.000	0.026	0.162	0.174	/
	AWAN Speed	Main	Laptop	Bottom Side	0	47	6185	0.07	0.150	12.92	13.00	1.019	100.00	1.000	0.153	1.250	<b>1.274</b>	13#
					0	15	6025	-0.06	0.074	12.89	13.00	1.026	100.00	1.000	0.076	0.616	0.632	/
					0	79	6345	-0.09	0.122	12.81	13.00	1.045	100.00	1.000	0.127	1.016	1.062	/
					0	111	6505	0.10	0.101	12.80	13.00	1.047	100.00	1.000	0.106	0.841	0.881	/
					0	143	6665	-0.03	0.068	12.91	13.00	1.021	100.00	1.000	0.069	0.566	0.578	/
					0	175	6825	-0.03	0.064	12.75	13.00	1.059	100.00	1.000	0.068	0.533	0.564	/
					0	207	6985	0.11	0.099	12.49	13.00	1.125	100.00	1.000	0.111	0.825	0.928	/
	Speed	Main	Laptop	Bottom Side	0	47	6185	-0.04	0.128	12.92	13.00	1.019	100.00	1.000	0.130	1.066	1.086	/
					0	15	6025	-0.02	0.068	12.89	13.00	1.026	100.00	1.000	0.070	0.566	0.581	/
					0	79	6345	0.12	0.073	12.81	13.00	1.045	100.00	1.000	0.076	0.608	0.635	/
					0	111	6505	0.14	0.067	12.80	13.00	1.047	100.00	1.000	0.070	0.558	0.584	/
					0	143	6665	-0.10	0.058	12.91	13.00	1.021	100.00	1.000	0.059	0.483	0.493	/
					0	175	6825	-0.11	0.080	12.75	13.00	1.059	100.00	1.000	0.085	0.666	0.705	/
					0	207	6985	-0.04	0.077	12.49	13.00	1.125	100.00	1.000	0.087	0.641	0.721	/

Note: Refer to ANNEX C for the detailed test data for each test configuration.

## 11 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

Note: For product specific 1g SAR, the highest measured 1g SAR is 0.258  $< 0.80$  W/kg, repeated measurement is not required.

## 12 SIMULTANEOUS TRANSMISSION

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

According KDB 447498 D04, simultaneous transmission:

- a) SPLSR =  $(\text{SAR1} + \text{SAR2})^{1.5} / R_i$  (min. separation distance, mm), and the peak separation distance is determined from the square root of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$ , where  $(x_1, y_1, z_1)$  and  $(x_2, y_2, z_2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan.  
SAR1 is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition.  
SAR2 is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition as the first.
- b) If SPLSR  $\leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
- c) Simultaneously transmission SAR measurement, and the reported multi-band SAR  $< 1.6\text{W/kg}$ .

## 12.1 Simultaneous Transmission Mode Considerations

No.	Simultaneous Tx Combination	Body
1	Bluetooth + WLAN 2.4GHz (Antenna Main)	Yes
2	Bluetooth + WLAN 5GHz (Antenna Auxiliary)	Yes
3	Bluetooth + WLAN 6GHz (Antenna Auxiliary)	Yes
4	Bluetooth + WLAN 5GHz (Antenna Main)	Yes
5	Bluetooth + + WLAN 6GHz (Antenna Main)	Yes
6	WLAN 2.4GHz (Antenna Main) + WLAN 2.4GHz (Antenna Auxiliary)	Yes
7	WLAN 2.4GHz (Antenna Main) + WLAN 5GHz (Antenna Auxiliary)	Yes
8	WLAN 2.4GHz (Antenna Auxiliary) + WLAN 5GHz (Antenna Main)	Yes
9	WLAN 2.4GHz (Antenna Main) + WLAN 6GHz (Antenna Auxiliary)	Yes
10	WLAN 2.4GHz (Antenna Auxiliary) + WLAN 6GHz (Antenna Main)	Yes
11	WLAN 5GHz (Antenna Auxiliary) + WLAN 5GHz (Antenna Main)	Yes
12	WLAN 5GHz (Antenna Auxiliary) + WLAN 6GHz (Antenna Main)	Yes
13	WLAN 5GHz (Antenna Auxiliary) + WLAN 6GHz (Antenna Main)	Yes
14	WLAN 5GHz (Antenna Main)+WLAN 6GHz (Antenna Auxiliary)	Yes
15	Bluetooth + WLAN 5GHz (Antenna Auxiliary) + WLAN 5GHz (Antenna Main)	Yes
16	Bluetooth + WLAN 6GHz (Antenna Auxiliary) + WLAN 6GHz (Antenna Main)	Yes

**Note:**

1. The EUT supports the Antenna Auxiliary with TX/RX diversity function for WLAN and Bluetooth, the Antenna Main with TX/RX diversity function for WLAN.
2. WLAN 2.4GHz and Bluetooth will not be transmitting from the Antenna Auxiliary at same time.

## 12.2 Sum SAR of Simultaneous Transmission

### 12.2.1 Body Simultaneous Transmission SAR Evaluation for WLAN Antenna with Bluetooth

State	Position	Stand alone SAR						
		1	2	3	4	5	6	7
		Bluetooth	WLAN 2.4GHz (Antenna Auxiliary)	WLAN 2.4GHz (Antenna Main)	WLAN 5GHz MAX (Antenna Auxiliary)	WLAN 5GHz MAX (Antenna Main)	WLAN 6GHz (Antenna Auxiliary)	WLAN 6GHz (Antenna Main)
Laptop	Bottom Side 0mm	0.121	0.099	0.111	0.244	0.261	0.107	0.153
SUM SAR								
Sum SAR (1+3)	Sum SAR (2+3)	Sum SAR (2+5)	Sum SAR (3+4)	Sum SAR (2+7)	Sum SAR (3+6)	Sum SAR (1+4+5)	Sum SAR (1+6+7)	
0.232	0.210	0.360	0.355	0.252	0.218	<b>0.626</b>	0.381	

Note:

1: The highest Summed 1g SAR is 0.626 W/Kg < 1.60 W/kg, so Simultaneous Transmission SAR test is not required.

## 13 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Test Software	Speag	DASY8	16.2.2.1588	N/A	N/A
2450MHz Validation Dipole	Speag	D2450V2	SN: 952	2024/05/07	2027/05/06
5GHz Validation Dipole	Speag	D5GHzV2	SN: 1200	2024/05/09	2027/05/08
6.5GHz Validation Dipole	Speag	D6.5GHzV2	SN: 1037	2024/05/28	2027/05/27
Data Acquisition Electronics	Speag	DAE4	SN: 1711	2024/03/18	2025/03/17
E-Field Probe	Speag	EX3DV4	SN: 7893	2024/09/05	2025/09/04
E-Field Probe	Speag	EX3DV4	SN: 7510	2024/06/25	2025/06/24
Signal Generator	R&S	SMB100A	177746	2024/04/24	2025/04/23
Power Meter	R&S	NRVD-B2	835843/014	2024/08/08	2025/08/07
Power Sensor	R&S	NRV-Z4	100381	2024/08/08	2025/08/07
Power Sensor	R&S	NRV-Z2	100211	2024/08/08	2025/08/07
Network Analyzer	Agilent	E5071C	MY46103472	2023/11/14	2024/11/13
Thermometer	Elitech	RC-4HC	EF720B004811	2023/11/25	2024/11/24
Thermometer	Elitech	RC-4HC	EF7216002985	2023/11/17	2024/11/16
Power Amplifier	SATIMO	6552B	22374	N/A	N/A
Dielectric Probe Kit	Speag	DAK3.5	SN: 1312	N/A	N/A
Phantom	Speag	ELI V8.0	SN: 2159	N/A	N/A
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

Note: For dipole antennas, BALUN has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss is within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) is within 5 Ohms of calibrated measurement.

## ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using a DAK3.5 Dielectric Probe Kit.

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity ( $\sigma$ ) (S/m)	Meas. Permittivity ( $\epsilon$ )	Target Conductivity ( $\sigma$ ) (S/m)	Target Permittivity ( $\epsilon$ )	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2024.10.15	Head	2450	21.6	1.78	38.12	1.80	39.20	-1.11	-2.76
2024.10.16	Head	5250	21.5	4.66	35.88	4.71	35.93	-1.06	-0.14
2024.10.17	Head	5600	21.2	5.06	35.68	5.07	35.53	-0.20	0.42
2024.10.18	Head	5750	21.7	5.17	35.98	5.22	35.36	-0.96	1.75
2024.10.19	Head	6500	21.5	6.22	34.36	6.07	34.46	2.47	-0.29

Note: The tolerance limit of Conductivity and Permittivity is  $\pm 5\%$ .

## ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %.

Head liquid 1g

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2024.10.15	Head	2450	100	5.170	51.70	52.60	-1.71
2024.10.16	Head	5250	100	7.670	76.70	77.70	-1.29
2024.10.17	Head	5600	100	7.930	79.30	81.30	-2.46
2024.10.18	Head	5750	100	7.960	79.60	77.60	2.58
2024.10.19	Head	6500	100	29.600	296.00	299.00	-1.00

Note: The tolerance limit of System validation  $\pm 10\%$ .

# System Performance Check Data (2450MHz)

## Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band UID	Group, Channel Number	Frequency [MHz],	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		D2450	CW, 0--	2450.0, 2450	7.75	1.78	38.1	22.4	21.6

## Hardware Setup

Phantom ELI V8.0 (20deg probe tilt) - 2159	TSL, Measured Date HBBL-600-10000 2024-10-15	Probe, Calibration Date EX3DV4 - SN7510, 2024-06-25	DAE, Calibration Date DAE4 Sn1711, 2024-03-18
--	--	---	---

## Scan Setup

			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 30.0	Date	2024-10-15	2024-10-15
Grid Steps [mm]	8.0 x 10.0	5.0 x 5.0 x 1.5	psSAR1g [W/kg]	5.12	5.17
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	2.32	2.42
Graded Grid	Yes	Yes	Power Drift [dB]	0.13	0.05
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		78.4
			Dist 3dB Peak [mm]		8.8

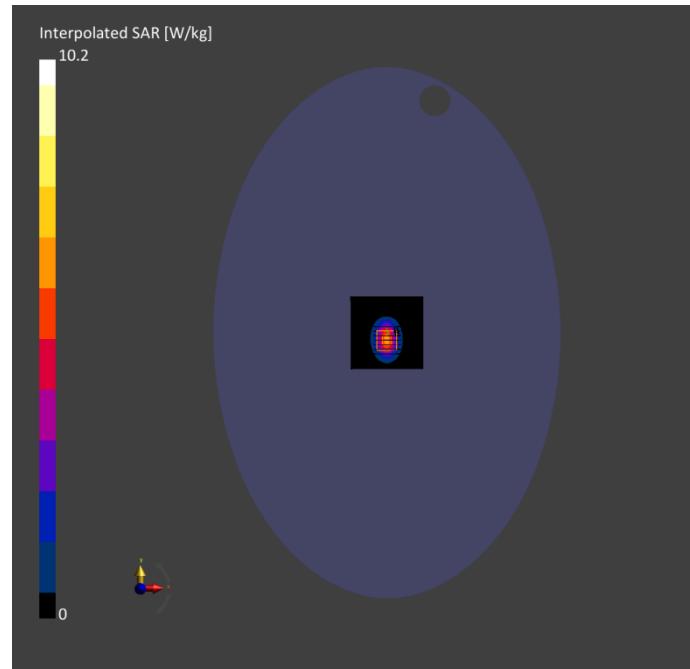

# System Performance Check Data (5250MHz)

## Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band UID	Group, Channel Number	Frequency [MHz],	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		D5GH z	CW, 0--	5250.0, 5250	5.74	4.66	35.9	22.6	21.5

## Hardware Setup

Phantom ELI V8.0 (20deg probe tilt) - 2159	TSL, Measured Date HBBL-600-10000 2024-10-16	Probe, Calibration Date EX3DV4 - SN7510, 2024-06-25	DAE, Calibration Date DAE4 Sn1711, 2024-03-18
--	--	---	---

## Scan Setup

			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0	Date	2024-10-16	2024-10-16
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	psSAR1g [W/kg]	7.32	7.67
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	2.18	2.25
Graded Grid	Yes	Yes	Power Drift [dB]	-0.08	0.07
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	All points	All points	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		59.1
			Dist 3dB Peak [mm]		8.5

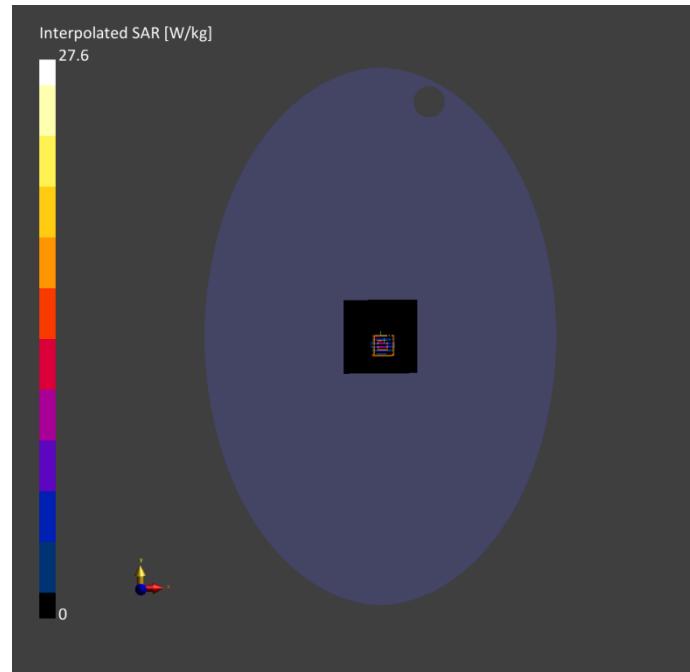

# System Performance Check Data (5600MHz)

## Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band UID	Group, Channel Number	Frequency [MHz], Factor	Conversion	TSL Conductivit y [S/m]	TSL Permittivity	Ambient Temperatu re [°C]	Liquid Temperatu re [°C]
Flat, HSL		D5GH z	CW, 0--	5600.0, 5600	5.00	5.06	35.7	22.9	21.2

## Hardware Setup

Phantom ELI V8.0 (20deg probe tilt) - 2159	TSL, Measured Date HBBL-600-10000 2024-10-17	Probe, Calibration Date EX3DV4 - SN7510, 2024-06-25	DAE, Calibration Date DAE4 Sn1711, 2024-03-18
--	---	--	--

## Scan Setup

			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0	Date	2024-10-17	2024-10-17
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	psSAR1g [W/kg]	7.47	7.93
Sensor Surface [mm]	3.0	1.4	psSAR10g	2.18	2.34
Graded Grid	Yes	Yes	[W/kg]	-0.04	0.11
Grading Ratio	1.5	1.4	Power Drift [dB]	Disabled	Disabled
MAIA	N/A	N/A	Power Scaling		
Surface Detection	All points	All points	Scaling Factor		
Scan Method	Measured	Measured	[dB]		
			TSL Correction	No correction	No correction
			M2/M1 [%]		63.1
			Dist 3dB Peak		7.4
			[mm]		

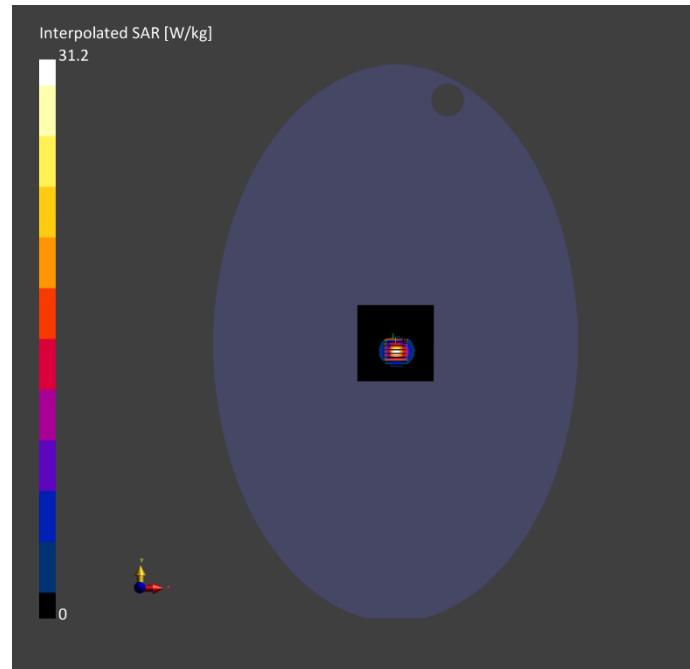

# System Performance Check Data (5750MHz)

## Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band UID	Group, Channel Number	Frequency [MHz], Factor	Conversion	TSL Conductivit y [S/m]	TSL Permittivity	Ambient Temperatu re [°C]	Liquid Temperatu re [°C]
Flat, HSL		D5GH z	CW, 0--	5750.0, 5750	5.04	5.17	36.0	22.4	21.7

## Hardware Setup

Phantom ELI V8.0 (20deg probe tilt) - 2159	TSL, Measured Date HBBL-600-10000 2024-10-18	Probe, Calibration Date EX3DV4 - SN7510, 2024-06-25	DAE, Calibration Date DAE4 Sn1711, 2024-03-18
--	---	--	--

## Scan Setup

			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0	Date	2024-10-18	2024-10-18
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	psSAR1g [W/kg]	6.91	7.96
Sensor Surface [mm]	3.0	1.4	psSAR10g	1.87	2.24
Graded Grid	Yes	Yes	[W/kg]	-0.02	0.12
Grading Ratio	1.5	1.4	Power Drift [dB]	Disabled	Disabled
MAIA	N/A	N/A	Power Scaling	Scaling Factor	
Surface Detection	All points	All points	Scaling Factor	[dB]	
Scan Method	Measured	Measured	TSL Correction	No correction	No correction
			M2/M1 [%]		58.9
			Dist 3dB Peak		8.1
			[mm]		

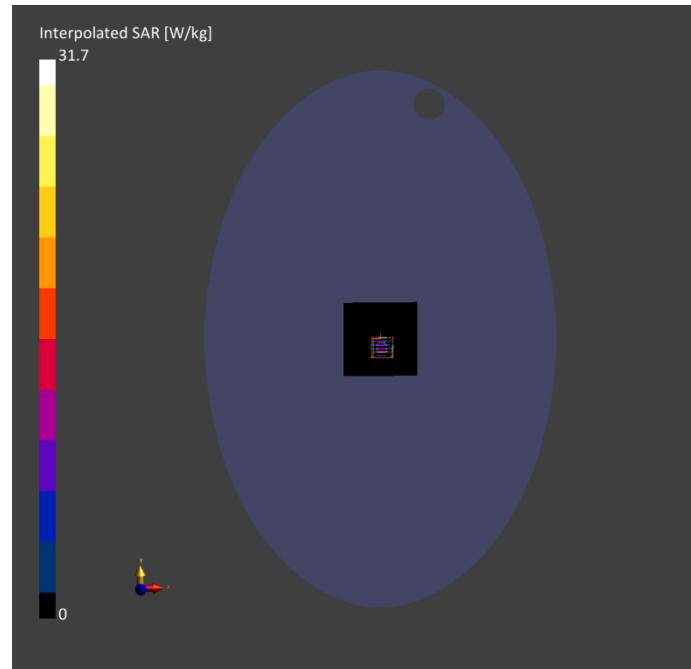

# System Performance Check Data (6500MHz)

## Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	Validated on band	CW, 0--	6500.0, 6500	5.11	6.22	34.4	22.8	21.5	

## Hardware Setup

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2024-10-19	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1711, 2024-03-18

## Scan Setup

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0	Date	2024-10-19	2024-10-19
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	psSAR1g [W/kg]	22.65	29.6
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	4.62	5.36
Graded Grid	Yes	Yes	APD 4cm <sup>2</sup> [W/m <sup>2</sup> ]		137
Grading Ratio	1.5	1.4	Power Drift [dB]	-0.01	0.06
MAIA	N/A	N/A	Power Scaling	Disabled	Disabled
Surface Detection	All points	All points	Scaling Factor [dB]		
Scan Method	Measured	Measured	TSL Correction M2/M1 [%]	No correction	No correction
			Dist 3dB Peak [mm]		49.4
					4.4

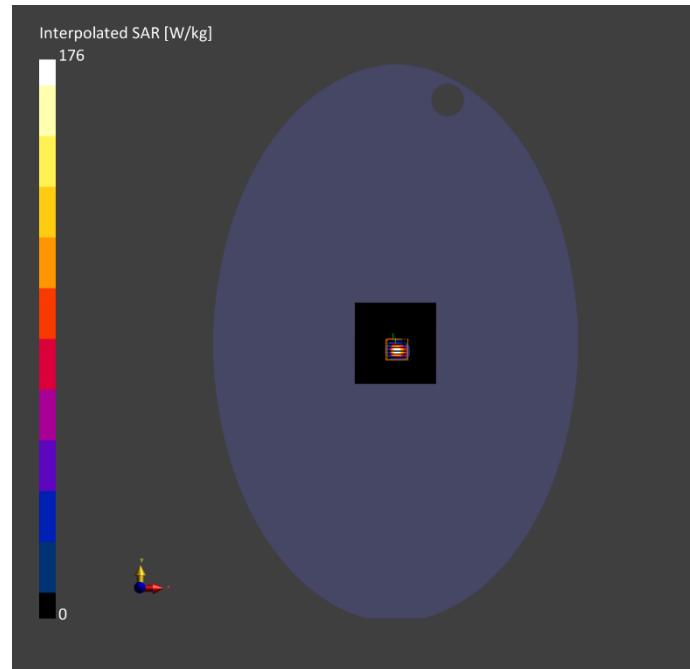

## ANNEX C TEST DATA

### Meas.1 Body Plane with Bottom Side 0mm on 78 Channel in Bluetooth mode with Antenna Auxiliary

#### Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversio n Factor	TSL Conductiv ity [S/m]	TSL Permittivit y	Ambient Temperat ure [°C]	Liquid Temperat ure [°C]
Flat, HSL	EDGE BOTTOM, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2480.0, 78	7.75	1.82	37.9	22.4	21.6

#### Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2024-10-15	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

#### Scan Setup

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	30.0 x 30.0 x 30.0	Date	2024-10-15	2024-10-15
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.099	0.090
Sensor Surface [mm]	3.0	1.4	psSAR10g	0.047	0.040
Graded Grid	Yes	Yes	[W/kg]	-0.01	0.00
Grading Ratio	1.5	1.5	Power Drift [dB]	Power Scaling	Disabled
MAIA	Y	Y	Scaling Factor	Disabled	Disabled
Surface Detection	All points	All points	[dB]	TSL Correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]	No correction	44.9
			Dist 3dB Peak [mm]	Dist 3dB Peak [mm]	8.9

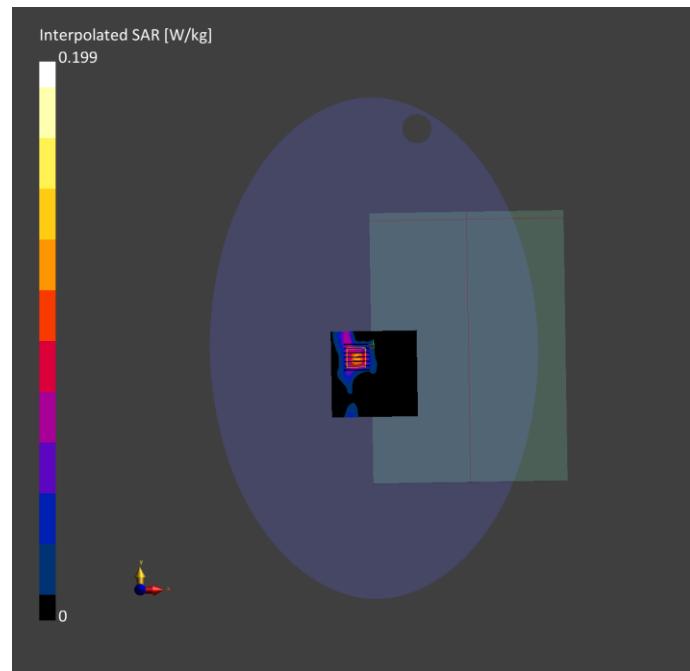

**Meas.2 Body Plane with Bottom Side 0mm on 11 Channel in IEEE802.11b mode with Antenna Auxiliary****Exposure Conditions**


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversio n Factor	TSL Conductiv ity [S/m]	TSL Permittivit y	Ambient Temperat ure [°C]	Liquid Temperat ure [°C]
Flat, HSL	EDGE BOTTOM, 0.00	WLAN 2.4GH	WLAN, 10012-CAB	2462.0, 11	7.75	1.78	38.0	22.4	21.6

**Hardware Setup**

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2024-10-15	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

**Scan Setup**

			Measurement Results		
			Area Scan	Zoom Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	30.0 x 30.0 x 30.0	Date	2024-10-15	2024-10-15
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.093	0.095
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.047	0.042
Graded Grid	Yes	Yes	Power Drift [dB]	0.25	0.08
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor [dB]		
Surface	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Detection			M2/M1 [%]		55.3
Scan Method	Measured	Measured	Dist 3dB Peak [mm]		9.2

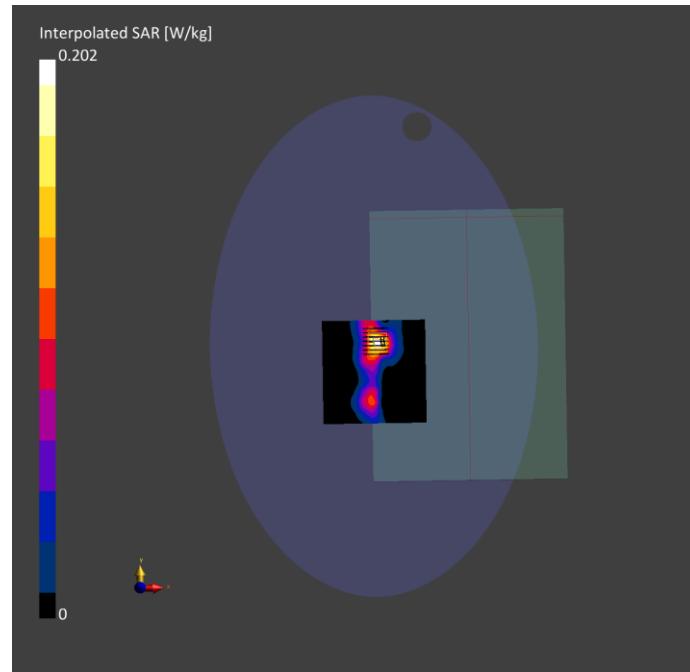

**Meas.3 Body Plane with Bottom Side 0mm on 6 Channel in IEEE802.11b mode with Antenna Main**
**Exposure Conditions**


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversio n Factor	TSL Conductiv ity [S/m]	TSL Permittivit y	Ambient Temperat ure [°C]	Liquid Temperat ure [°C]
Flat, HSL	EDGE BOTTOM, 0.00	WLAN 2.4GH	WLAN, 10012-CAB	2437.0, 6	7.75	1.77	38.3	22.4	21.6

**Hardware Setup**

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2024-10-15	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

**Scan Setup**

	Area Scan	Zoom Scan	Measurement Results		
			Date	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	30.0 x 30.0 x 30.0	psSAR1g [W/kg]	2024-10-15	0.103
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR10g	0.052	0.051
Sensor Surface [mm]	3.0	1.4	[W/kg]		
Graded Grid	Yes	Yes	Power Drift [dB]	-0.16	-0.03
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor		
Surface	VMS + 6p	VMS + 6p	[dB]		
Detection			TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		46.4
			Dist 3dB Peak		10.6
			[mm]		

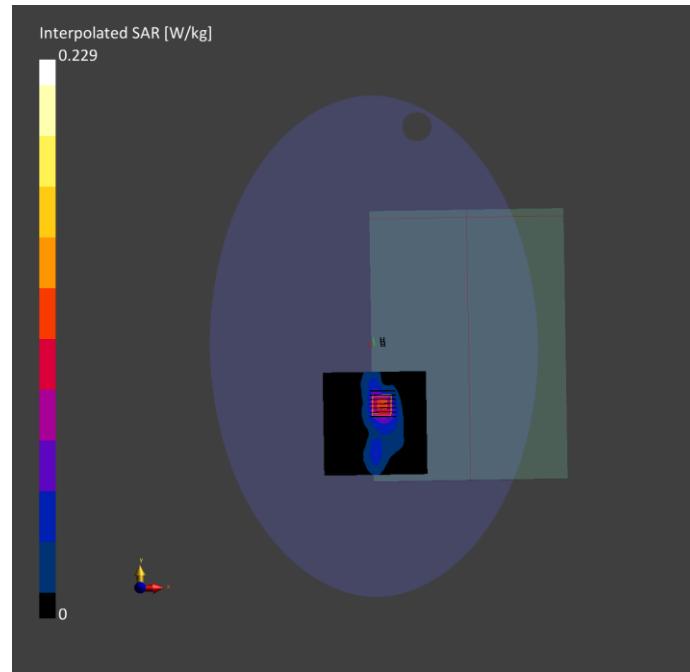

**Meas.4 Body Plane with Bottom Side 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Auxiliary****Exposure Conditions**


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversio n Factor	TSL Conductiv ity [S/m]	TSL Permittivit y	Ambient Temperat ure [°C]	Liquid Temperat ure [°C]
Flat, HSL	EDGE BOTTOM, 0.00	WLAN 5GHz	WLAN, 10544-AAD	5290.0, 58	5.74	4.73	34.8	22.6	21.5

**Hardware Setup**

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2024-10-16	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

**Scan Setup**

			Measurement Results		
			Area Scan	Zoom Scan	Area Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0	Date	2024-10-16	2024-10-16
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR1g [W/kg]	0.197	0.215
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.075	0.066
Graded Grid	Yes	Yes	Power Drift [dB]	-0.11	-0.06
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		55.7
			Dist 3dB Peak [mm]		7.5

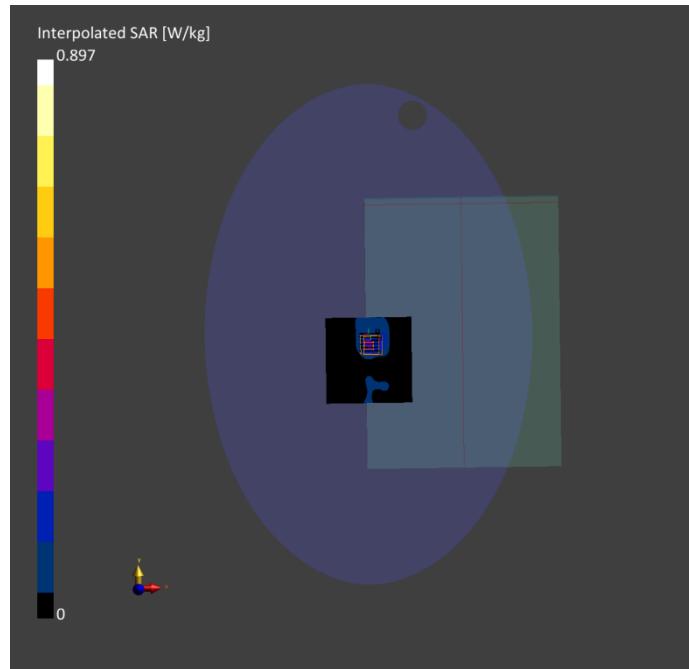

**Meas.5 Body Plane with Bottom Side 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Main****Exposure Conditions**


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversio n Factor	TSL Conductiv ity [S/m]	TSL Permittivit y	Ambient Temperat ure [°C]	Liquid Temperat ure [°C]
Flat, HSL	EDGE BOTTOM, 0.00	WLAN 5GHz	WLAN, 10544-AAD	5290.0, 58	5.74	4.73	34.8	22.6	21.5

**Hardware Setup**

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2024-10-16	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

**Scan Setup**

	Area Scan	Zoom Scan	Measurement Results		
			Date	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0	psSAR1g [W/kg]	2024-10-16	2024-10-16
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR10g	0.294	0.230
Sensor Surface [mm]	3.0	1.4	[W/kg]	0.111	0.088
Graded Grid	Yes	Yes	Power Drift [dB]	0.11	-0.03
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor		
Surface	VMS + 6p	VMS + 6p	[dB]		
Detection			TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		58.2
			Dist 3dB Peak		11.6
			[mm]		

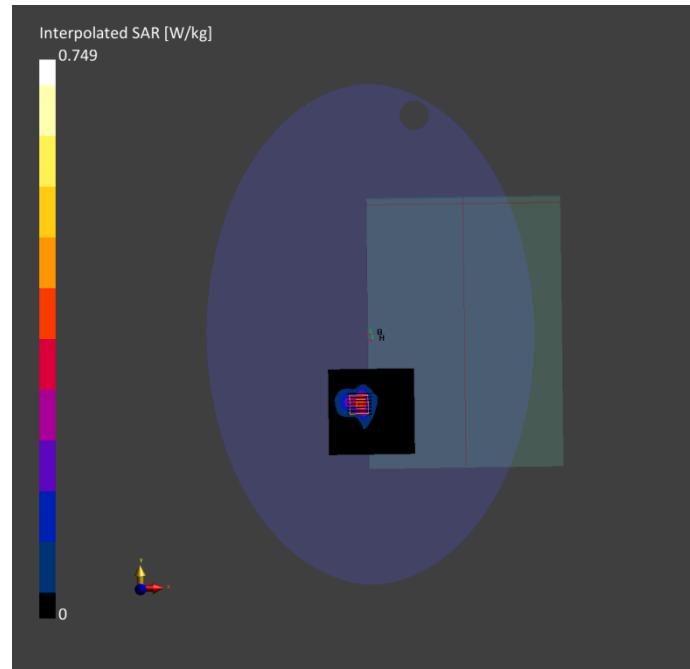

**Meas.6 Body Plane with Bottom Side 0mm on 106 Channel in IEEE802.11ac80 mode with Antenna Auxiliary****Exposure Conditions**


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversio n Factor	TSL Conductiv ity [S/m]	TSL Permittivit y	Ambient Temperat ure [°C]	Liquid Temperat ure [°C]
Flat, HSL	EDGE BOTTOM, 0.00	WLAN 5GHz	WLAN, 10544-AAD	5530.0, 106	5.11	4.93	35.7	22.9	21.2

**Hardware Setup**

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2024-10-17	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

**Scan Setup**

	Area Scan	Zoom Scan	Measurement Results		
			Date	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0	psSAR1g [W/kg]	2024-10-17	0.142
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR10g	0.051	0.037
Sensor Surface [mm]	3.0	1.4	[W/kg]		
Graded Grid	Yes	Yes	Power Drift [dB]	-0.17	0.02
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor		
Surface	VMS + 6p	VMS + 6p	[dB]		
Detection			TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		58.2
			Dist 3dB Peak		6.6
			[mm]		

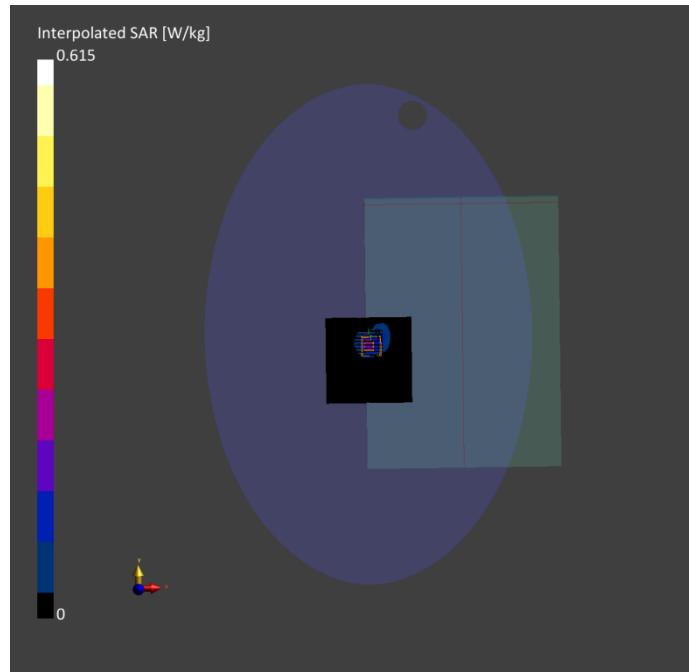

**Meas.7 Body Plane with Bottom Side 0mm on 106 Channel in IEEE802.11ac80 mode with Antenna Main**
**Exposure Conditions**


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversio n Factor	TSL Conductiv ity [S/m]	TSL Permittivit y	Ambient Temperat ure [°C]	Liquid Temperat ure [°C]
Flat, HSL	EDGE BOTTOM, 0.00	WLAN 5GHz	WLAN, 10544-AAD	5530.0, 106	5.11	4.93	35.7	22.9	21.2

**Hardware Setup**

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2024-10-17	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

**Scan Setup**

	Area Scan	Zoom Scan	Measurement Results		
			Date	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0	psSAR1g [W/kg]	2024-10-17	2024-10-17
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR10g	0.253	0.192
Sensor Surface [mm]	3.0	1.4	[W/kg]	0.102	0.060
Graded Grid	Yes	Yes	Power Drift [dB]	-0.17	0.01
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor		
Surface	VMS + 6p	VMS + 6p	[dB]		
Detection			TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		59.9
			Dist 3dB Peak		5.7
			[mm]		

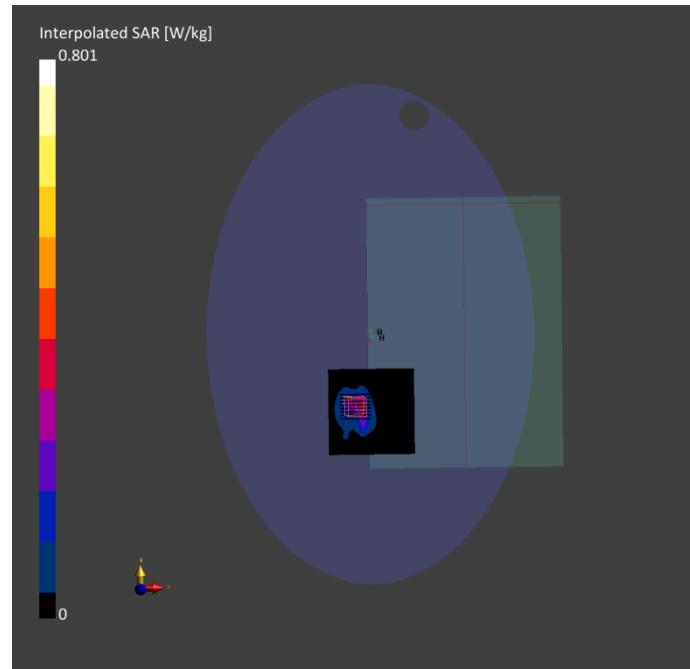

**Meas.8 Body Plane with Bottom Side 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Auxiliary****Exposure Conditions**


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversio n Factor	TSL Conductiv ity [S/m]	TSL Permittivit y	Ambient Temperat ure [°C]	Liquid Temperat ure [°C]
Flat, HSL	EDGE BOTTOM, 0.00	WLAN 5GHz	WLAN, 10544-AAD	5775.0, 155	5.04	5.19	35.7	22.4	21.7

**Hardware Setup**

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2024-10-18	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

**Scan Setup**

	Area Scan	Zoom Scan	Measurement Results		
			Date	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0	psSAR1g [W/kg]	2024-10-18	2024-10-18
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR10g	0.142	0.150
Sensor Surface [mm]	3.0	1.4	[W/kg]	0.041	0.036
Graded Grid	Yes	Yes	Power Drift [dB]	0.09	-0.09
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor		
Surface	VMS + 6p	VMS + 6p	[dB]		
Detection			TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		51.4
			Dist 3dB Peak		5.6
			[mm]		

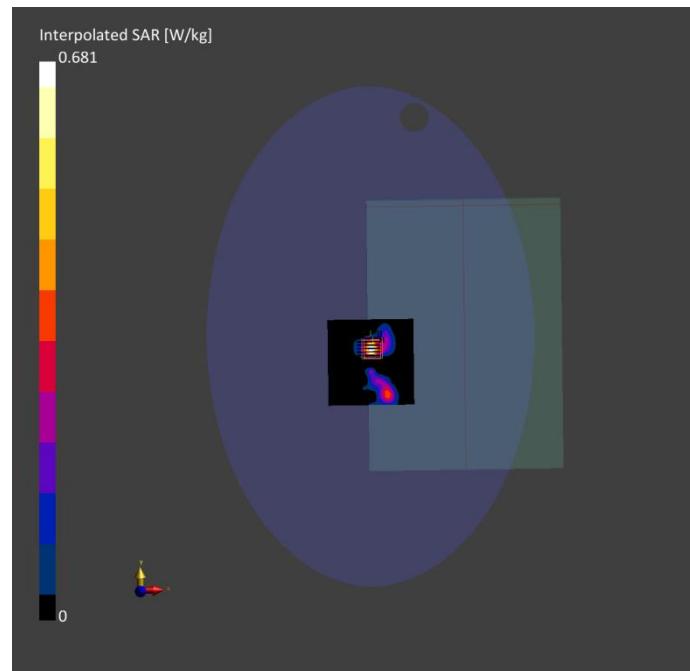

**Meas.9 Body Plane with Bottom Side 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Main****Exposure Conditions**


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversio n Factor	TSL Conductiv ity [S/m]	TSL Permittivit y	Ambient Temperat ure [°C]	Liquid Temperat ure [°C]
Flat, HSL	EDGE BOTTOM, 0.00	WLAN 5GHz	WLAN, 10544-AAD	5775.0, 155	5.04	5.19	35.7	22.4	21.7

**Hardware Setup**

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2024-10-18	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

**Scan Setup**

	Area Scan	Zoom Scan	Measurement Results		
			Date	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0	psSAR1g [W/kg]	2024-10-18	2024-10-18
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR10g	0.090	0.087
Sensor Surface [mm]	3.0	1.4	[W/kg]	0.031	0.023
Graded Grid	Yes	Yes	Power Drift [dB]	0.04	-0.04
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor		
Surface	VMS + 6p	VMS + 6p	[dB]		
Detection			TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		54.6
			Dist 3dB Peak		4.8
			[mm]		

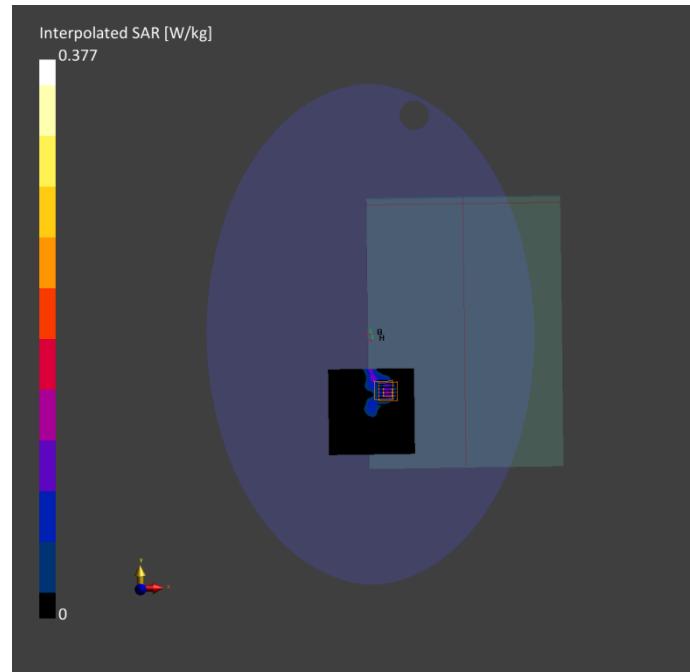

**Meas.10 Body Plane with Bottom Side 0mm on 163 Channel in IEEE802.11ac160 mode with Antenna Auxiliary****Exposure Conditions**


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 0.00	Custo m Band	CW, 10554-AAE	5815.0, 5815000	5.04	5.21	34.3	22.4	21.7

**Hardware Setup**

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2024-10-18	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

**Scan Setup**

	Area Scan		Zoom Scan		Measurement Results		
					Date	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0		24.0 x 24.0 x 22.0		psSAR1g [W/kg]	2024-10-18	2024-10-18
Grid Steps [mm]	10.0 x 10.0		4.0 x 4.0 x 2.0		psSAR10g [W/kg]	0.236	0.224
Sensor Surface [mm]	3.0		1.4		Power Drift [dB]	0.076	0.042
Graded Grid	Yes		Yes		Power Scaling	0.08	-0.04
Grading Ratio	1.5		1.4		Scaling Factor	Disabled	Disabled
MAIA	Y		Y		[dB]		
Surface Detection	VMS + 6p		All points		TSL Correction	No correction	No correction
Scan Method	Measured		Measured		M2/M1 [%]		45.5
					Dist 3dB Peak [mm]		5.8

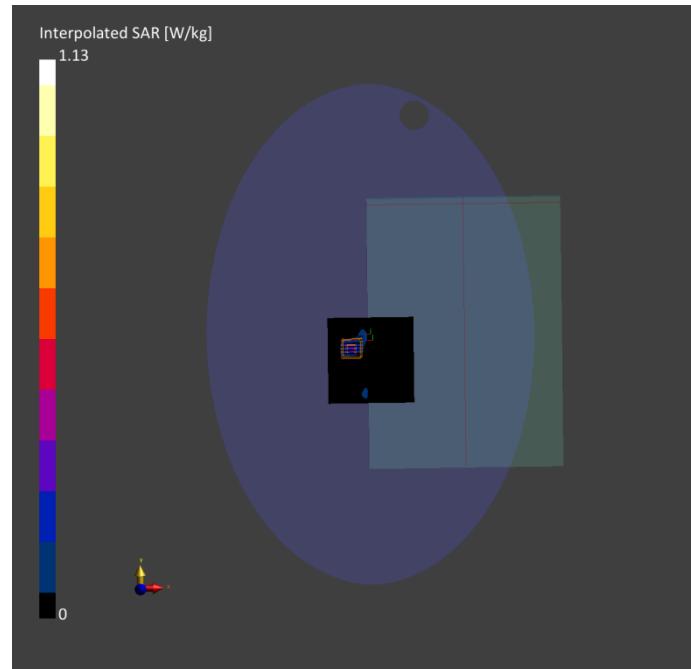

**Meas.11 Body Plane with Bottom Side 0mm on 163 Channel in IEEE802.11ac160 mode with Antenna Main****Exposure Conditions**


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE BOTTOM, 0.00	Custo m Band	CW, 10554-AAE	5815.0, 5815000	5.04	5.21	34.3	22.4	21.7

**Hardware Setup**

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2024-10-18	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

**Scan Setup**

			Measurement Results		
			Area Scan	Zoom Scan	Area Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0	Date	2024-10-18	2024-10-18
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR1g [W/kg]	0.251	0.258
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.103	0.087
Graded Grid	Yes	Yes	Power Drift [dB]	0.05	-0.04
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		50.1
			Dist 3dB Peak [mm]		7.9

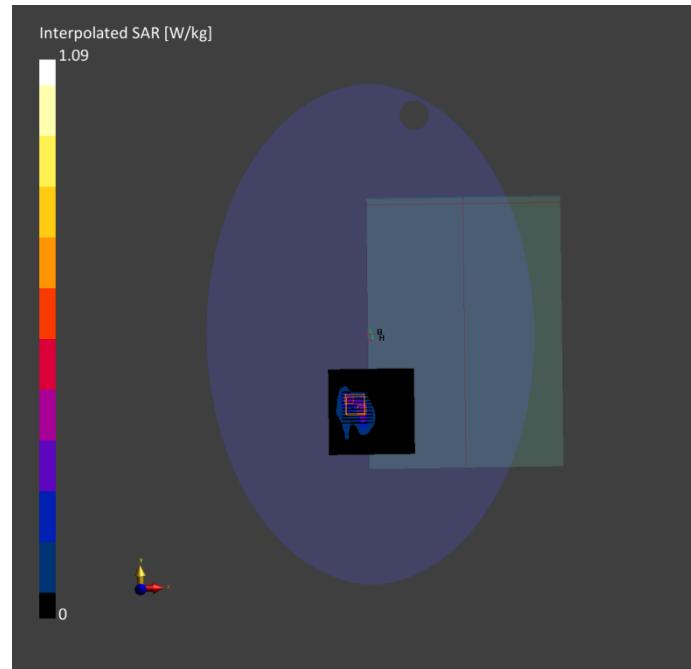

**Meas.12 Body Plane with Bottom Side 0mm on 47 Channel in IEEE802.11ax160 mode with Antenna Auxiliary**
**Exposure Conditions**


Phantom Section, TSL	Position, Test Distance [mm]	Band UID	Group, Channel Number	Frequency [MHz], n Factor	Conversio n Factor	TSL Conductiv ity [S/m]	TSL Permittivit y	Ambient Temperat ure [°C]	Liquid Temperat ure [°C]
Flat, HSL	EDGE BOTTOM, 0.00	U-NII-5 10743-AAC	WLAN, 47	6185.0, 5.11		5.74	35.3	22.8	21.5

**Hardware Setup**

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2024-10-19	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1711, 2024-03-18

**Scan Setup**

	Area Scan	Zoom Scan	Measurement Results		
			Date	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	22.0 x 22.0 x 22.0	psSAR1g [W/kg]	2024-10-19	2024-10-19
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	psSAR10g	0.095	0.105
Sensor Surface [mm]	3.0	1.4	[W/kg]	0.030	0.031
Graded Grid	Yes	Yes	APD 4cm <sup>2</sup>		0.697
Grading Ratio	1.5	1.4	[W/m <sup>2</sup> ]	0.06	0.09
MAIA	Y	Y	Power Drift [dB]	Disabled	Disabled
Surface Detection	VMS + 6p	VMS + 6p	Power Scaling		
Scan Method	Measured	Measured	Scaling Factor [dB]	No correction	No correction
			TSL Correction		
			M2/M1 [%]		61.6
			Dist 3dB Peak [mm]		4.6

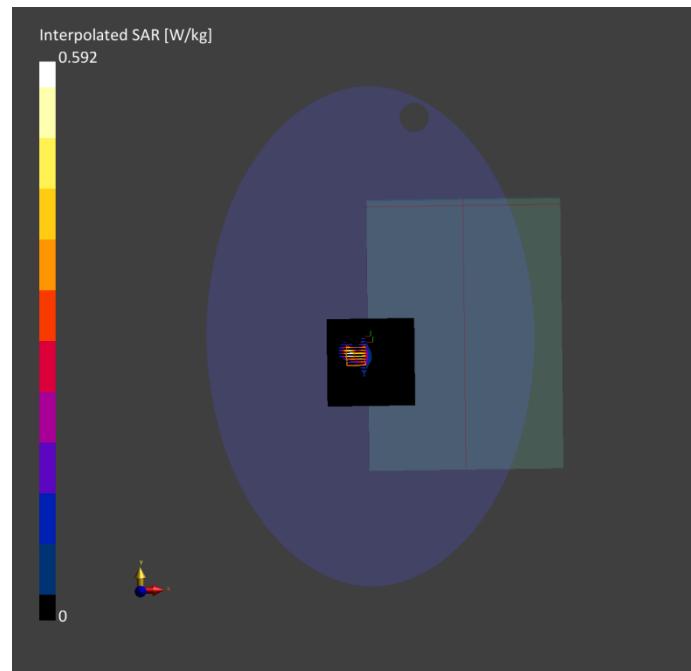

**Meas.13 Body Plane with Bottom Side 0mm on 47 Channel in IEEE802.11ax160 mode with Antenna Main**
**Exposure Conditions**


Phantom Section, TSL	Position, Test Distance [mm]	Band UID	Group, Channel Number	Frequency [MHz], n Factor	Conversio n Factor	TSL Conductiv ity [S/m]	TSL Permittivit y	Ambient Temperat ure [°C]	Liquid Temperat ure [°C]
Flat, HSL	EDGE BOTTOM, 0.00	U-NII-5 10743-AAC	WLAN, 47	6185.0, 5.11		5.74	35.3	22.8	21.5

**Hardware Setup**

Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000	2024-10-19	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1711, 2024-03-18

**Scan Setup**

	Area Scan	Zoom Scan	Measurement Results		
			Date	Area Scan	Zoom Scan
Grid Extents [mm]	102.0 x 102.0	22.0 x 22.0 x 22.0	psSAR1g [W/kg]	2024-10-19	2024-10-19
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	psSAR10g	0.162	0.150
Sensor Surface [mm]	3.0	1.4	[W/kg]	0.059	0.056
Graded Grid	Yes	Yes	APD 4cm <sup>2</sup>		1.25
Grading Ratio	1.5	1.4	[W/m <sup>2</sup> ]	0.12	0.07
MAIA	Y	Y	Power Drift [dB]	Disabled	Disabled
Surface	VMS + 6p	VMS + 6p	Power Scaling		
Detection			Scaling Factor		
Scan Method	Measured	Measured	[dB]		
			TSL Correction	No correction	No correction
			M2/M1 [%]		62.6
			Dist 3dB Peak		6.7
			[mm]		

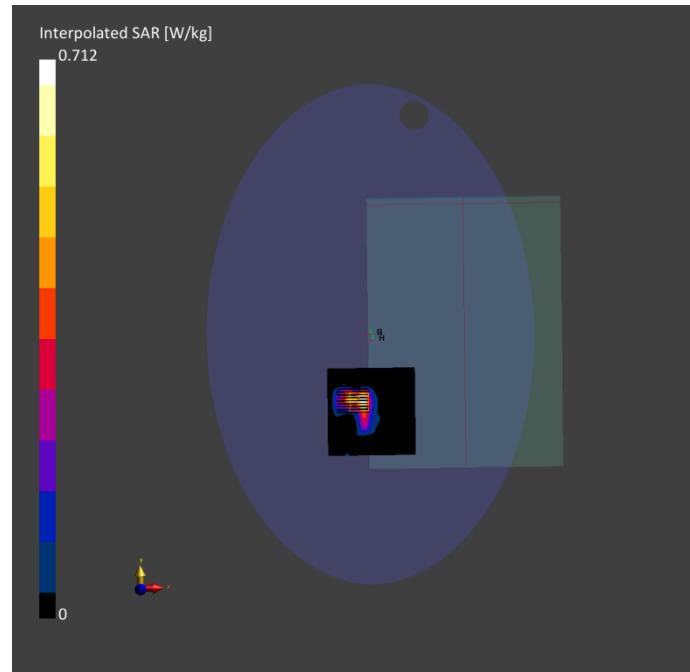

## **ANNEX D EUT EXTERNAL PHOTOS**

Please refer the document “BL-SZ2490694-AW.pdf”.

## **ANNEX E SAR TEST SETUP PHOTOS**

Please refer the document “BL-SZ2490694-AS-1.pdf”.

## **ANNEX F CALIBRATION REPORT**

Please refer the document “BL-SZ2490694-AC-2.pdf”.

## **ANNEX G TUNE-UP PROCEDURE**

Please refer the document “BL-SZ2490694-AT-3.pdf”.

## Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--