

FCC Measurement/Technical Report on

50165

Bluetooth® / Bluetooth® Low Energy /
WLAN Wireless Module

FCC ID: TXH-50165

IC: 6315A-50165

Test Report Reference: MDE_COGNEX_1803_FCC_05

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Deutsche
Akkreditierungsstelle
D-PL-12140-01-01
D-PL-12140-01-02
D-PL-12140-01-03

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH
Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Frank Spiller
Bernhard Retka
Alexandre Norré-Oudard

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas
Group Company*
www.7layers.com

Table of Contents

1 Applied Standards and Test Summary	3
1.1 Applied Standards	3
1.2 FCC-IC Correlation Table	4
1.3 Measurement Summary	5
2 Revision History / Signatures	9
3 Administrative Data	10
3.1 Testing Laboratory	10
3.2 Project Data	10
3.3 Applicant Data	10
3.4 Manufacturer Data	10
4 Test object Data	11
4.1 General EUT Description	11
4.2 EUT Main components	12
4.3 Ancillary Equipment	12
4.4 Auxiliary Equipment	13
4.5 EUT Setups	14
4.6 Operating Modes / Test Channels	14
4.7 Product labelling	14
4.8 Duty Cycle Plots	15
5 Test Results	18
5.1 Conducted Emissions at AC Mains	18
5.2 Occupied Bandwidth (6 dB)	23
5.3 Occupied Bandwidth (99%)	26
5.4 Peak Power Output	29
5.5 Spurious RF Conducted Emissions	33
5.6 Transmitter Spurious Radiated Emissions	37
5.7 Band Edge Compliance Conducted	47
5.8 Band Edge Compliance Radiated	53
5.9 Power Density	59
6 Test Equipment	63
7 Antenna Factors, Cable Loss and Sample Calculations	67
7.1 LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	67
7.2 Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	68
7.3 Antenna R&S HL562 (30 MHz – 1 GHz)	69
7.4 Antenna R&S HF907 (1 GHz – 18 GHz)	70
7.5 Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	71
7.6 Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	72
8 Photo Report	72
9 Measurement Uncertainties	73

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Type of Authorization

Certification for an Intentional Radiator.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-19 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz

Note:

The tests were selected and performed with reference to the FCC Public Notice "Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules, 558074 D01 15.247 Meas Guidance v05r02, 2019-04-02". ANSI C63.10–2013 is applied.

Note:

This test report comprises the tests for WLAN technology.

Bluetooth and Bluetooth Low Energy results have already been reported in other test reports.

1.2 FCC-IC CORRELATION TABLE

**Correlation of measurement requirements for
DTS (e.g. WLAN 2.4 GHz, BT LE) equipment
from
FCC and IC**

DTS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 5+A1+A2: 8.8
Occupied bandwidth	§ 15.247 (a) (2)	RSS-247 Issue 2: 5.2 (a)
Peak conducted output power	§ 15.247 (b) (3), (4)	RSS-247 Issue 2: 5.4 (d)
Transmitter spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 5+A1+A2: 6.13 / 8.9/8.10; RSS-247 Issue 2: 5.5
Transmitter spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 5+A1+A2: 6.13 / 8.9/8.10; RSS-247 Issue 2: 5.5
Band edge compliance	§ 15.247 (d)	RSS-247 Issue 2: 5.5
Power density	§ 15.247 (e)	RSS-247 Issue 2: 5.2 (b)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 5+A1+A2: 6.8
Receiver spurious emissions	–	–

1.3 MEASUREMENT SUMMARY

47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

§ 15.207

OP-Mode	Setup	Date	Final Result	
			FCC	IC
Conducted Emissions at AC Mains				
The measurement was performed according to ANSI C63.10				
Operating mode, Connection to AC mains				
worst case, via ancillary/auxiliary equipment	S02_AE02	2020-03-12	Passed	Passed
Remark: target power set to: 18 dBm				

47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

§ 15.247 (a) (2)

OP-Mode	Setup	Date	Final Result	
			FCC	IC
Occupied Bandwidth (6 dB)				
The measurement was performed according to ANSI C63.10				
Radio Technology, Operating Frequency				
WLAN b, high	S01_AH02	2020-02-14	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN b, low	S01_AH02	2020-02-14	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN b, mid	S01_AH02	2020-02-14	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN g, high	S01_AH02	2020-02-14	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN g, low	S01_AH02	2020-02-14	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN g, mid	S01_AH02	2020-02-14	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN n 20 MHz, high	S01_AH02	2020-02-17	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN n 20 MHz, low	S01_AH02	2020-02-17	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN n 20 MHz, mid	S01_AH02	2020-02-17	Passed	Passed
Remark: target power set to: 18 dBm				

47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

IC RSS-Gen & IC TRC-43; Ch. 6.7 & Ch. 8

OP-Mode	Setup	Date	Final Result	
			FCC	IC
Occupied Bandwidth (99%)				
The measurement was performed according to ANSI C63.10				
Radio Technology, Operating Frequency				
WLAN b, high	S01_AH02	2020-02-14	N/A	Performed
Remark: target power set to: 18 dBm				
WLAN b, low	S01_AH02	2020-02-14	N/A	Performed
Remark: target power set to: 18 dBm				
WLAN b, mid	S01_AH02	2020-02-14	N/A	Performed
Remark: target power set to: 18 dBm				
WLAN g, high	S01_AH02	2020-02-14	N/A	Performed
Remark: target power set to: 18 dBm				
WLAN g, low	S01_AH02	2020-02-14	N/A	Performed
Remark: target power set to: 18 dBm				
WLAN g, mid	S01_AH02	2020-02-14	N/A	Performed
Remark: target power set to: 18 dBm				
WLAN n 20 MHz, high	S01_AH02	2020-02-17	N/A	Performed
Remark: target power set to: 18 dBm				

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247
IC RSS-Gen & IC TRC-43; Ch. 6.7 & Ch. 8

OP-Mode	Setup	Date	Final Result	
			FCC	IC
Radio Technology, Operating Frequency				
WLAN n 20 MHz, low	S01_AH02	2020-02-17	N/A	Performed
Remark: target power set to: 18 dBm				
WLAN n 20 MHz, mid	S01_AH02	2020-02-17	N/A	Performed
Remark: target power set to: 18 dBm				

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247
§ 15.247 (b) (3)

OP-Mode	Setup	Date	Final Result	
			FCC	IC
Radio Technology, Operating Frequency,				
Measurement method				
WLAN b, high, conducted	S04_AI02	2021-06-25	Passed	Passed
Remark: target power set to: 16 dBm				
WLAN b, low, conducted	S04_AI02	2021-06-25	Passed	Passed
Remark: target power set to: 16 dBm				
WLAN b, mid, conducted	S04_AI02	2021-06-25	Passed	Passed
Remark: target power set to: 16 dBm				
WLAN g, high, conducted	S04_AI02	2021-06-25	Passed	Passed
Remark: target power set to: 14 dBm				
WLAN g, low, conducted	S04_AI02	2021-06-25	Passed	Passed
Remark: target power set to: 14 dBm				
WLAN g, mid, conducted	S04_AI02	2021-06-25	Passed	Passed
Remark: target power set to: 14 dBm				
WLAN n 20 MHz, high, conducted	S04_AI02	2021-06-25	Passed	Passed
Remark: target power set to: 12 dBm				
WLAN n 20 MHz, low, conducted	S04_AI02	2021-06-25	Passed	Passed
Remark: target power set to: 12 dBm				
WLAN n 20 MHz, mid, conducted	S04_AI02	2021-06-25	Passed	Passed
Remark: target power set to: 12 dBm				

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247
§ 15.247 (d)

OP-Mode	Setup	Date	Final Result	
			FCC	IC
Radio Technology, Operating Frequency				
WLAN b, high	S01_AH02	2020-02-17	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN b, low	S01_AH02	2020-02-17	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN b, mid	S01_AH02	2020-02-17	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN g, high	S01_AH02	2020-02-17	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN g, low	S01_AH02	2020-02-17	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN g, mid	S01_AH02	2020-02-17	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN n 20 MHz, high	S01_AH02	2020-02-17	Passed	Passed
Remark: target power set to: 18 dBm				

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247
§ 15.247 (d)
Spurious RF Conducted Emissions

The measurement was performed according to ANSI C63.10

OP-Mode	Setup	Date	Final Result	
			FCC	IC
Radio Technology, Operating Frequency				
WLAN n 20 MHz, low	S01_AH02	2020-02-17	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN n 20 MHz, mid	S01_AH02	2020-02-17	Passed	Passed
Remark: target power set to: 18 dBm				

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247
§ 15.247 (d)
Transmitter Spurious Radiated Emissions

The measurement was performed according to ANSI C63.10

OP-Mode	Setup	Date	Final Result	
			FCC	IC
Radio Technology, Operating Frequency, Measurement range				
WLAN b, high, 1 GHz - 26 GHz	S03_AL02	2020-05-15	Passed	Passed
Remark: target power set to: 16 dBm				
WLAN b, high, 30 MHz - 1 GHz	S01_AE02	2020-03-11	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN b, low, 1 GHz - 26 GHz	S03_AL02	2020-05-15	Passed	Passed
Remark: target power set to: 16 dBm				
WLAN b, low, 30 MHz - 1 GHz	S01_AE02	2020-03-11	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN b, mid, 1 GHz - 26 GHz	S03_AL02	2020-05-15	Passed	Passed
Remark: target power set to: 16 dBm				
WLAN b, mid, 30 MHz - 1 GHz	S01_AE02	2020-03-11	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN b, mid, 9 kHz - 30 MHz	S01_AE02	2020-03-11	Passed	Passed
Remark: target power set to: 18 dBm				
WLAN g, high, 1 GHz - 26 GHz	S03_AL02	2020-05-15	Passed	Passed
Remark: target power set to: 14 dBm; measurement range: 1-8 GHz				
WLAN g, low, 1 GHz - 26 GHz	S03_AL02	2020-05-15	Passed	Passed
Remark: target power set to: 14 dBm; measurement range: 1-8 GHz				
WLAN g, mid, 1 GHz - 26 GHz	S03_AL02	2020-05-15	Passed	Passed
Remark: target power set to: 14 dBm; measurement range: 1-8 GHz				
WLAN n 20 MHz, high, 1 GHz - 26 GHz	S03_AL02	2020-05-15	Passed	Passed
Remark: target power set to: 12 dBm; measurement range: 1-8 GHz				
WLAN n 20 MHz, low, 1 GHz - 26 GHz	S03_AL02	2020-05-16	Passed	Passed
Remark: target power set to: 12 dBm; measurement range: 1-8 GHz				
WLAN n 20 MHz, mid, 1 GHz - 26 GHz	S03_AL02	2020-05-16	Passed	Passed
Remark: target power set to: 12 dBm; measurement range: 1-8 GHz				

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247
§ 15.247 (d)
Band Edge Compliance Conducted

The measurement was performed according to ANSI C63.10

OP-Mode	Setup	Date	Final Result	
			FCC	IC
Radio Technology, Operating Frequency, Band Edge				
WLAN b, high, high	S04_AI02	2021-06-25	Passed	Passed
Remark: target power set to: 16 dBm				

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247
§ 15.247 (d)

Band Edge Compliance Conducted

The measurement was performed according to ANSI C63.10

OP-Mode	Setup	Date	Final Result	
			FCC	IC
Radio Technology, Operating Frequency, Band Edge				
WLAN b, low, low Remark: target power set to: 16 dBm	S04_AI02	2021-06-25	Passed	Passed
WLAN g, high, high Remark: target power set to: 14 dBm	S04_AI02	2021-06-25	Passed	Passed
WLAN g, low, low Remark: target power set to: 14 dBm	S04_AI02	2021-06-25	Passed	Passed
WLAN n 20 MHz, high, high Remark: target power set to: 12 dBm	S04_AI02	2021-06-25	Passed	Passed
WLAN n 20 MHz, low, low Remark: target power set to: 12 dBm	S04_AI02	2021-06-25	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247
§ 15.247 (d)

Band Edge Compliance Radiated

The measurement was performed according to ANSI C63.10

OP-Mode	Setup	Date	Final Result	
			FCC	IC
Radio Technology, Operating Frequency, Band Edge				
WLAN b, high, high Remark: target power set to: 16 dBm	S03_AL02	2020-05-15	Passed	Passed
WLAN g, high, high Remark: target power set to: 14 dBm	S03_AL02	2020-05-15	Passed	Passed
WLAN n 20 MHz, high, high Remark: target power set to: 12 dBm	S03_AL02	2020-05-15	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247
§ 15.247 (e)

Power Density

The measurement was performed according to ANSI C63.10

OP-Mode	Setup	Date	Final Result	
			FCC	IC
Radio Technology, Operating Frequency				
WLAN b, high Remark: RBW = 100 kHz; target power set to: 16 dBm	S04_AI02	2021-06-25	Passed	Passed
WLAN b, low Remark: RBW = 100 kHz; target power set to: 16 dBm	S04_AI02	2021-06-25	Passed	Passed
WLAN b, mid Remark: RBW = 100 kHz; target power set to: 16 dBm	S04_AI02	2021-06-25	Passed	Passed
WLAN g, high Remark: RBW = 100 kHz; target power set to: 14 dBm	S04_AI02	2021-06-25	Passed	Passed
WLAN g, low Remark: RBW = 100 kHz; target power set to: 14 dBm	S04_AI02	2021-06-25	Passed	Passed
WLAN g, mid Remark: RBW = 100 kHz; target power set to: 14 dBm	S04_AI02	2021-06-25	Passed	Passed
WLAN n 20 MHz, high Remark: RBW = 100 kHz; target power set to: 12 dBm	S04_AI02	2021-06-25	Passed	Passed

47 CFR CHAPTER I FCC PART 15
Subpart C §15.247
§ 15.247 (e)
Power Density

The measurement was performed according to ANSI C63.10

OP-Mode	Setup	Date	Final Result	
			FCC	IC
Radio Technology, Operating Frequency WLAN n 20 MHz, low Remark: RBW = 100 kHz; target power set to: 12 dBm	S04_AI02	2021-06-25	Passed	Passed
WLAN n 20 MHz, mid Remark: RBW = 100 kHz; target power set to: 12 dBm	S04_AI02	2021-06-25	Passed	Passed

N/A: Not applicable

N/P: Not performed

2 REVISION HISTORY / SIGNATURES

Report version control				
Version	Release date	Change Description	Version validity	
initial	2021-08-10	--	valid	
--	--	--	--	

COMMENT: -



 (responsible for accreditation scope)
 Dipl.-Ing. Daniel Gall



 (responsible for testing and report)
 Dipl.-Ing. Andreas Petz



 7 layers GmbH, Borsigstr. 11
 40880 Ratingen, Germany
 Phone +49 (0)2102 749 0

3 ADMINISTRATIVE DATA

3.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAkkS D-PL-12140-01-01 | -02 | -03
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
ISED CAB Identifier: DE0007; ISED#: 3699A
Responsible for accreditation scope: Dipl.-Ing. Daniel Gall
Report Template Version: 2021-01-13

3.2 PROJECT DATA

Responsible for testing and report: Dipl.-Ing. Andreas Petz
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2021-08-10
Testing Period: 2020-02-14 to 2021-06-25

3.3 APPLICANT DATA

Company Name: Cognex Germany Aachen GmbH
Address: Krefelder Straße 218
52070 Aachen
Germany
Contact Person: Simon Juenger

3.4 MANUFACTURER DATA

Company Name: please see Applicant Data

4 TEST OBJECT DATA

4.1 GENERAL EUT DESCRIPTION

Kind of Device product description	Cognex wireless module 50165 for integration in Cognex 8700 series Handheld Readers and Base Stations
Product name	Bluetooth® / Bluetooth® Low Energy / WLAN Wireless Module
Type	50165
Declared EUT data by the supplier	
Voltage Type	DC
Voltage Level	5 V
Antenna / Gain	4.0 dBi
Tested Modulation Type	mode b: DSSS, BPSK mode g: OFDM, BPSK mode n: OFDM, BPSK
General product description	wireless communication module for Cognex industrial vision systems
Specific product description for the EUT	WLAN and Bluetooth transceiver of Cognex wireless module 50165 for integration in Cognex 8700 series Handheld Readers and Base Stations
EUT ports (connected cables during testing):	UART, SDIO, I2C, +5V, GND
Tested data rates	mode b: 1 Mbps mode g: 6 Mbps mode n: MCS0
Special software used for testing	the firmware accepts control commands which can be entered at a terminal emulation

4.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
#ae02	DE1408000ae02	
Sample Parameter	Value	
Serial No.	-	
HW Version	IDI88 RC	
SW Version	Diags2 0.12	
Comment		

Sample Name	Sample Code	Description
#ah02	DE1408000ah02	
Sample Parameter	Value	
Serial No.	-	
HW Version	IDI88 RC	
SW Version	Diags2 0.12	
Comment		

Sample Name	Sample Code	Description
#a102	DE1408000ai02	
Sample Parameter	Value	
Serial No.	-	
HW Version	IDI88 RC	
SW Version	Diags2 0.12	
Comment		

Sample Name	Sample Code	Description
#al02	DE1408000al02	
Sample Parameter	Value	
Serial No.	-	
HW Version	IDI88 RC	
SW Version	Diags2 0.12	
Comment		

NOTE: The short description is used to simplify the identification of the EUT in this test report.

4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-

4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, HW, SW, S/N)	Description
AC adapter (DE1408000ACDC1)	GlobTek, GTM96060-0606-0.5, WR9QA1090EIAJ2CK5R6B, - , 786273123/19	Providing additional current to USB input of Base
AC adapter (DE1408000ANC1)	GlobTek, GTM96060-0606-0.5, WR9QA1090EIAJ2CK5R6B, - , 786356123/19	Providing additional current to USB input of Base
Cradle CRA1 (DE1408000CRA1)	Cognex, DM8700 series Base Station R00087, IDB83-RE, Diags2 0.12 , -	Part of Base Station modified to test modules
Cradle CRA3 (DE1408000CRA3)	Cognex, DM8700 series Base Station R00087, IDB83-RE, Diags2 0.12 , -	Part of Base Station modified to test modules
Cradle CRA4 (DE1408000CRA4)	Cognex, DM8700 series Base Station R00087, IDB83-RE, Diags2 0.12 , 1A2002XN000197	Part of Base Station modified to test modules
Cradle CRA7 (DE1408000CRA7)	Cognex, DM8700 series Base Station R00087, IDB83-RE, Diags2 0.12 , PCB label 557478	Part of Base Station modified to test modules
Laptop RE06	Fujitsu Ltd., Laptop RE06: Lifebook U758, - , - , DSAL009842	Lifebook U758

4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S01_AH02	#ah02, AC adapter (DE1408000ANC1), Cradle CRA3,	Module in Cradle, supplied by USB and ext. AC adapter (for conducted tests)
S01_AE02	#ae02, AC adapter (DE1408000ANC1), Cradle CRA1,	Module in Cradle, supplied by USB and ext. AC adapter (for radiated tests)
S02_AE02	#ae02, AC adapter (DE1408000ANC1), Cradle CRA1, Laptop RE06,	Module in Cradle, supplied by USB and ext. AC adapter, Laptop
S03_AL02	#al02, Cradle CRA4, AC adapter (DE1408000ACDC1),	Module in Cradle, supplied by USB and ext. AC adapter (for radiated tests)
S04_AI02	#ai02, AC adapter (DE1408000ANC1), Cradle CRA7,	Module in Cradle, supplied by USB and ext. AC adapter (for conducted tests)

4.6 OPERATING MODES / TEST CHANNELS

This chapter describes the operating modes of the EUTs used for testing.


WLAN 20 MHz Test Channels: Channel: Frequency [MHz]	2.4 GHz ISM 2400 - 2483.5 MHz		
	low	mid	high
	1	6	11
	2412	2437	2462

4.7 PRODUCT LABELLING


Please refer to the documentation of the applicant.

4.8 DUTY CYCLE PLOTS

mode b

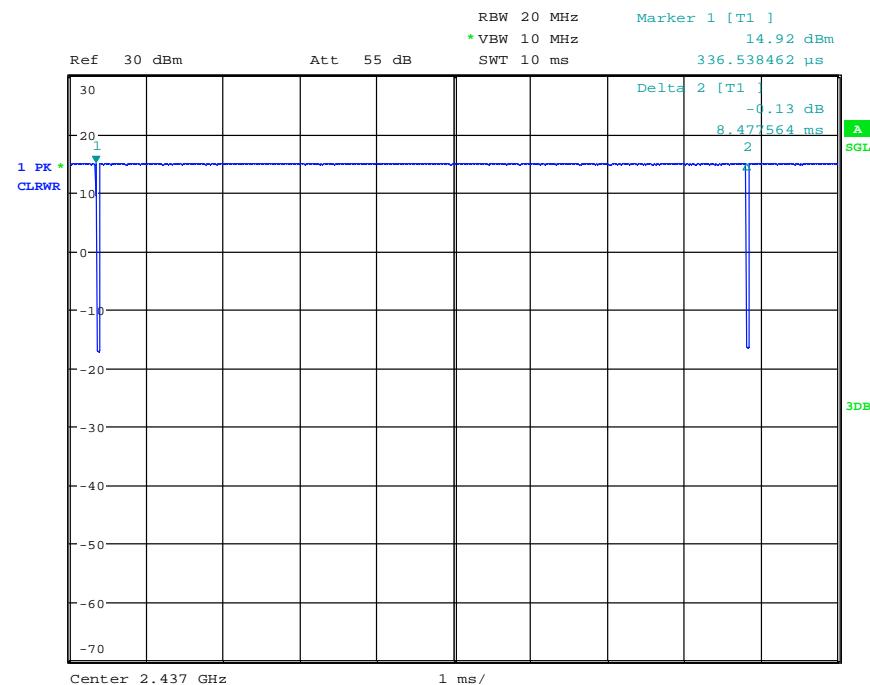


Date: 1.MAR.2021 20:23:28

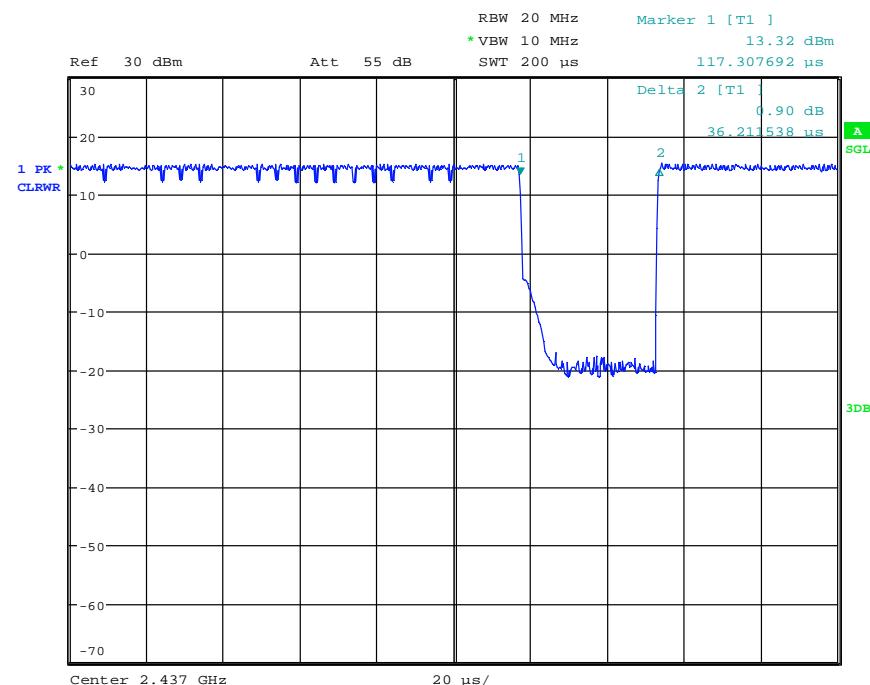


Date: 1.MAR.2021 20:36:57

mode g

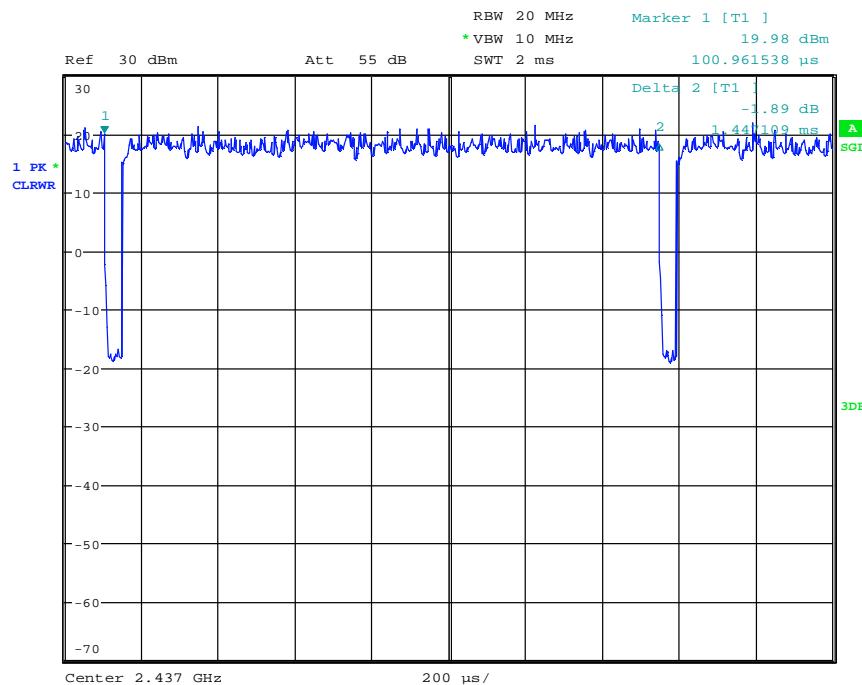


Date: 1.MAR.2021 20:41:09

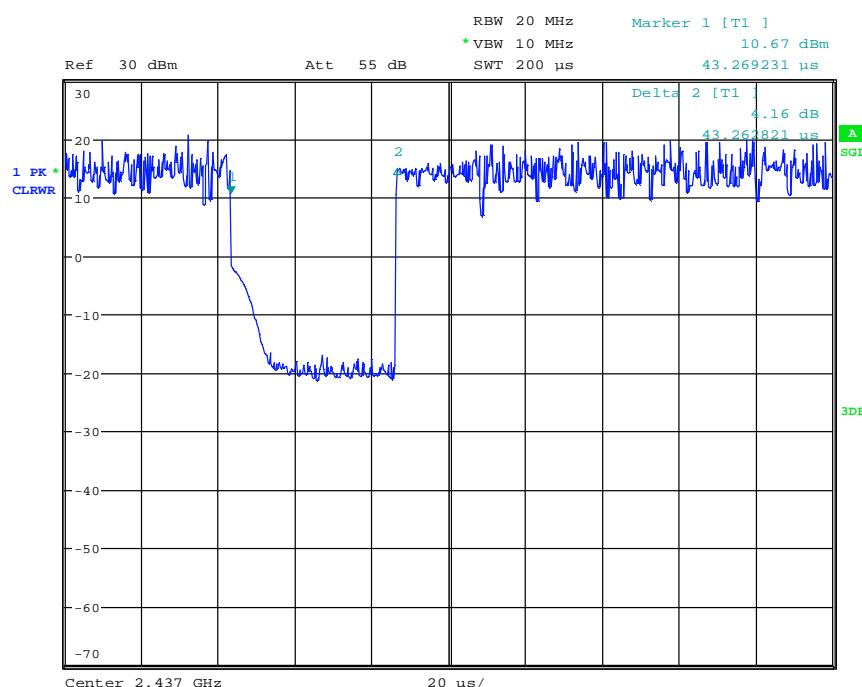


Date: 1.MAR.2021 20:39:46

mode n

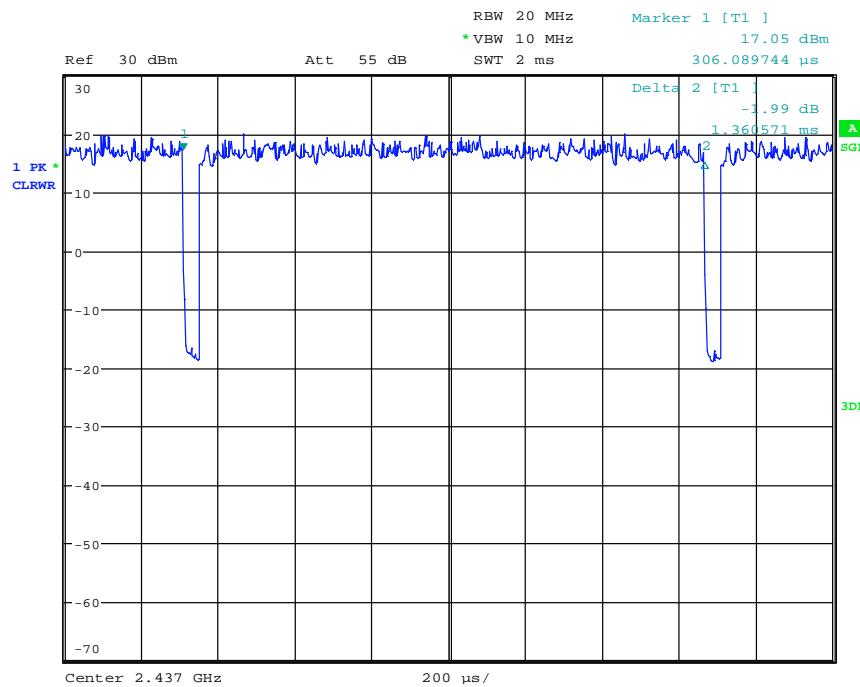

Date: 1.MAR.2021 20:43:29

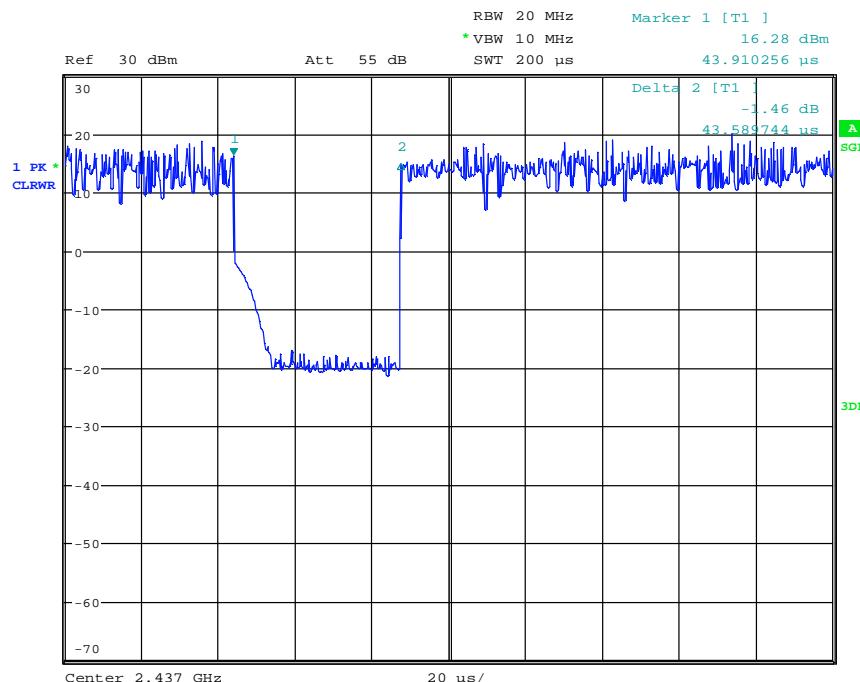

Date: 1.MAR.2021 20:44:44

5 TEST RESULTS


5.1 CONDUCTED EMISSIONS AT AC MAINS

Standard **FCC Part 15 Subpart C**

The test was performed according to:
 ANSI C63.10

5.1.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C 63.10. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

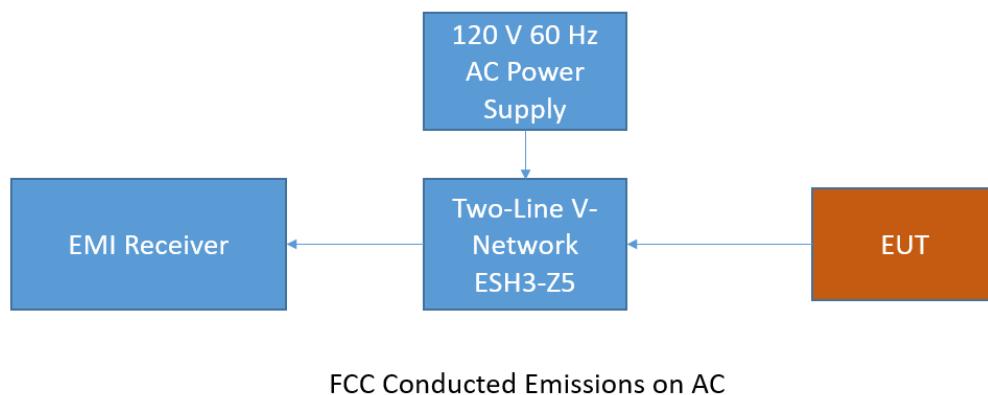

The measurement procedure consists of two steps. It is implemented into the EMI test software EMC-32 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak – Maxhold & Average
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 2.5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak & (CISPR) Average
- IF Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following

combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.207

Frequency (MHz)	QP Limits (dB μ V)	AV Limits (dB μ V)
0.15 – 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

Used conversion factor: Limit (dB μ V) = 20 log (Limit (μ V)/1 μ V).

5.1.3 TEST PROTOCOL

Temperature: 25 °C
 Air Pressure: 1005 hPa
 Humidity: 37 %

Power line	PE	Frequency [MHz]	Measured value QP [dB μ V]	Measured value AV [dB μ V]	Limit [dB μ V]	Margin [dB]
N	FLO	0.2535	42.13	---	61.6	19.5
L1	GND	0.267	---	41.99	51.2	9.2
L1	GND	0.26925	51.42	---	61.1	9.7
N	GND	0.294	55	---	60.4	5.4
L1	GND	0.29625	---	43.09	50.4	7.3
N	FLO	0.321	58.51	---	59.7	1.2
L1	GND	0.32775	---	45.28	49.5	4.2
N	GND	0.41325	50.15	---	57.6	7.4
L1	GND	0.41775	---	37.55	47.5	9.9
L1	GND	0.50775	---	33.37	46.0	12.6
N	FLO	0.51225	44.17	---	56.0	11.8
N	FLO	0.53025	45.59	---	56.0	10.4
L1	GND	0.537	---	34.76	46.0	11.2
L1	GND	0.59775	---	35.59	46.0	10.4
L1	FLO	0.59775	48.64	---	56.0	7.4
L1	GND	0.627	---	35.85	46.0	10.2
N	FLO	0.636	39.74	---	56.0	16.3
N	FLO	0.66975	46.37	---	56.0	9.6
L1	FLO	0.68775	---	35.81	46.0	10.2
N	FLO	0.7035	51.28	---	56.0	4.7
L1	GND	0.71925	---	37.86	46.0	8.1
N	FLO	0.73725	51.83	---	56.0	4.2
L1	GND	0.7485	---	38.05	46.0	8.0
L1	GND	0.75075	50.29	---	56.0	5.7
N	FLO	0.80025	49.79	---	56.0	6.2
L1	FLO	0.8025	---	36.12	46.0	9.9
N	FLO	1.25925	---	31.18	46.0	14.8
N	GND	1.2615	47.81	---	56.0	8.2
N	GND	1.8465	46.97	---	56.0	9.0
L1	FLO	1.851	---	30.6	46.0	15.4
N	GND	1.878	47.28	---	56.0	8.7
L1	FLO	1.887	---	31.9	46.0	14.1
L1	GND	2.09625	---	29.22	46.0	16.8
N	FLO	2.13675	44.01	---	56.0	12.0


Remark: Please see next sub-clause for the measurement plot.

5.1.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Operating mode = worst case, Connection to AC mains = via ancillary/auxiliary equipment (S02_AE02)

Common Information

Test Description: Conducted Emissions
 Test Standard: FCC §15.207, ANSI C63.10
 EUT / Setup Code: DE1408000 ae02 + AC adapter + Laptop + AC Adapter
 Operating Conditions: 120 V 60 Hz, Wifi 2.4 GHz (b-mode, CH:6 , 18dBm Power)
 Operator Name: MER
 Comment: -
 Legend: Trace: blue = PK, green = CISPR AV; Star: red or blue = critical frequency; Rhombus: blue = final QP, green = final CISPR AV
 Tested Port / used LISN: AC mains => ESH3-Z5
 Termination of other ports: AC of AUX => 2nd LISN ESH3-Z5 +50 Ohm

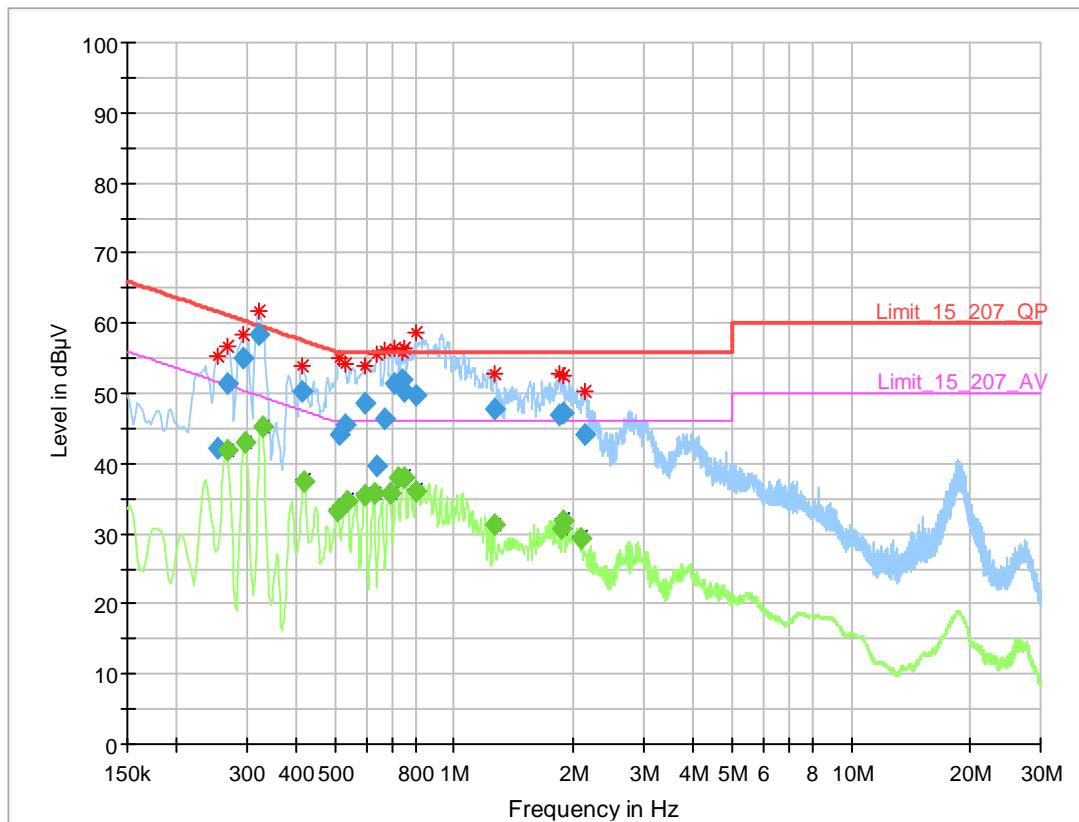

Final_Result

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	PE	Corr. (dB)
0.253500	42.13	---	61.64	19.52	1000.0	9.000	N	FLO	10.1
0.267000	---	41.99	51.21	9.22	1000.0	9.000	L1	GND	10.1
0.269250	51.42	---	61.14	9.72	1000.0	9.000	L1	GND	10.1
0.294000	55.00	---	60.41	5.41	1000.0	9.000	N	GND	10.1
0.296250	---	43.09	50.35	7.26	1000.0	9.000	L1	GND	10.1
0.321000	58.51	---	59.68	1.17	1000.0	9.000	N	FLO	10.1
0.327750	---	45.28	49.51	4.23	1000.0	9.000	L1	GND	10.1
0.413250	50.15	---	57.58	7.43	1000.0	9.000	N	GND	10.1
0.417750	---	37.55	47.49	9.94	1000.0	9.000	L1	GND	10.1
0.507750	---	33.37	46.00	12.63	1000.0	9.000	L1	GND	10.1
0.512250	44.17	---	56.00	11.83	1000.0	9.000	N	FLO	10.1
0.530250	45.59	---	56.00	10.41	1000.0	9.000	N	FLO	10.1
0.537000	---	34.76	46.00	11.24	1000.0	9.000	L1	GND	10.1
0.597750	---	35.59	46.00	10.41	1000.0	9.000	L1	GND	10.1
0.597750	48.64	---	56.00	7.36	1000.0	9.000	L1	FLO	10.1
0.627000	---	35.85	46.00	10.15	1000.0	9.000	L1	GND	10.1
0.636000	39.74	---	56.00	16.26	1000.0	9.000	N	FLO	10.1
0.669750	46.37	---	56.00	9.63	1000.0	9.000	N	FLO	10.1
0.687750	---	35.81	46.00	10.19	1000.0	9.000	L1	FLO	10.1
0.703500	51.28	---	56.00	4.72	1000.0	9.000	N	FLO	10.1
0.719250	---	37.86	46.00	8.14	1000.0	9.000	L1	GND	10.1
0.737250	51.83	---	56.00	4.17	1000.0	9.000	N	FLO	10.1
0.748500	---	38.05	46.00	7.95	1000.0	9.000	L1	GND	10.1
0.750750	50.29	---	56.00	5.71	1000.0	9.000	L1	GND	10.1
0.800250	49.79	---	56.00	6.21	1000.0	9.000	N	FLO	10.1
0.802500	---	36.12	46.00	9.88	1000.0	9.000	L1	FLO	10.1
1.259250	---	31.18	46.00	14.82	1000.0	9.000	N	FLO	10.2
1.261500	47.81	---	56.00	8.19	1000.0	9.000	N	GND	10.2
1.846500	46.97	---	56.00	9.03	1000.0	9.000	N	GND	10.2
1.851000	---	30.60	46.00	15.40	1000.0	9.000	L1	FLO	10.2
1.878000	47.28	---	56.00	8.72	1000.0	9.000	N	GND	10.2
1.887000	---	31.90	46.00	14.10	1000.0	9.000	L1	FLO	10.2
2.096250	---	29.22	46.00	16.78	1000.0	9.000	L1	GND	10.2
2.136750	44.01	---	56.00	11.99	1000.0	9.000	N	FLO	10.2

5.1.5 TEST EQUIPMENT USED

- Conducted Emissions FCC

5.2 OCCUPIED BANDWIDTH (6 DB)

Standard **FCC Part 15 Subpart C**

The test was performed according to:
 ANSI C63.10

5.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.


The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: Two times nominal bandwidth
- Trace: Maxhold
- Sweeps: Till stable (min. 500, max. 15000)
- Sweptime: Auto
- Detector: Peak

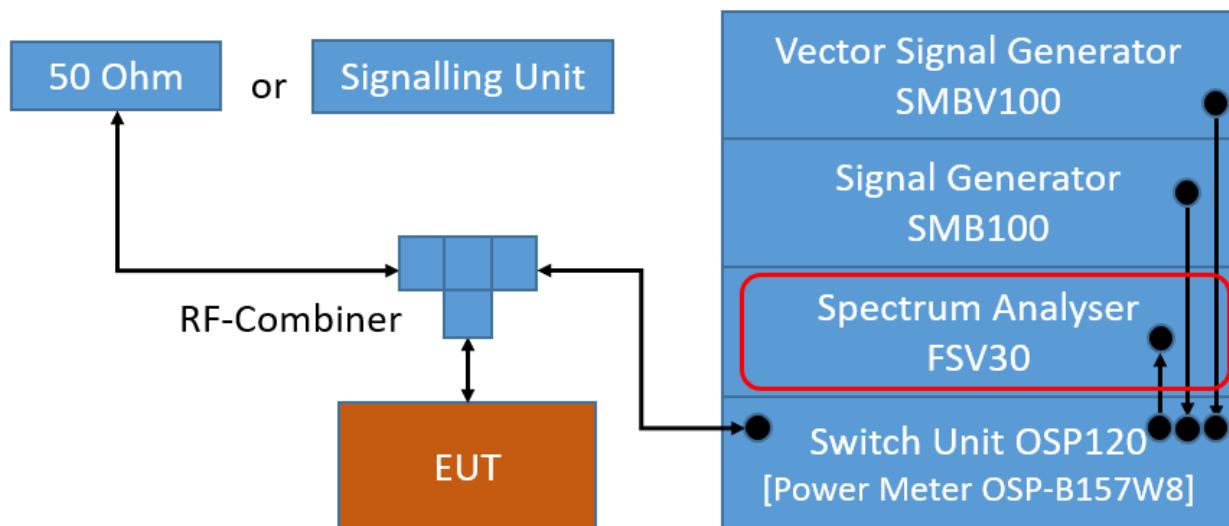

TS8997; Channel Bandwidth

5.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.2.3 TEST PROTOCOL

Ambient temperature: 26 °C
 Air Pressure: 1010 hPa
 Humidity: 32 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	9.2	0.5	8.7
	6	2437	9.2	0.5	8.7
	11	2462	9.2	0.5	8.7

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	16.2	0.5	15.7
	6	2437	16.4	0.5	15.9
	11	2462	15.3	0.5	14.8

WLAN n-Mode; 20 MHz; MCS0


Band	Channel No.	Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]	Margin to Limit [MHz]
2.4 GHz ISM	1	2412	17.4	0.5	16.9
	6	2437	17.2	0.5	16.7
	11	2462	15.3	0.5	14.8

Remark: Please see next sub-clause for the measurement plot.

5.2.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN b, Operating Frequency = low
(S01_AH02)

6 dB Bandwidth

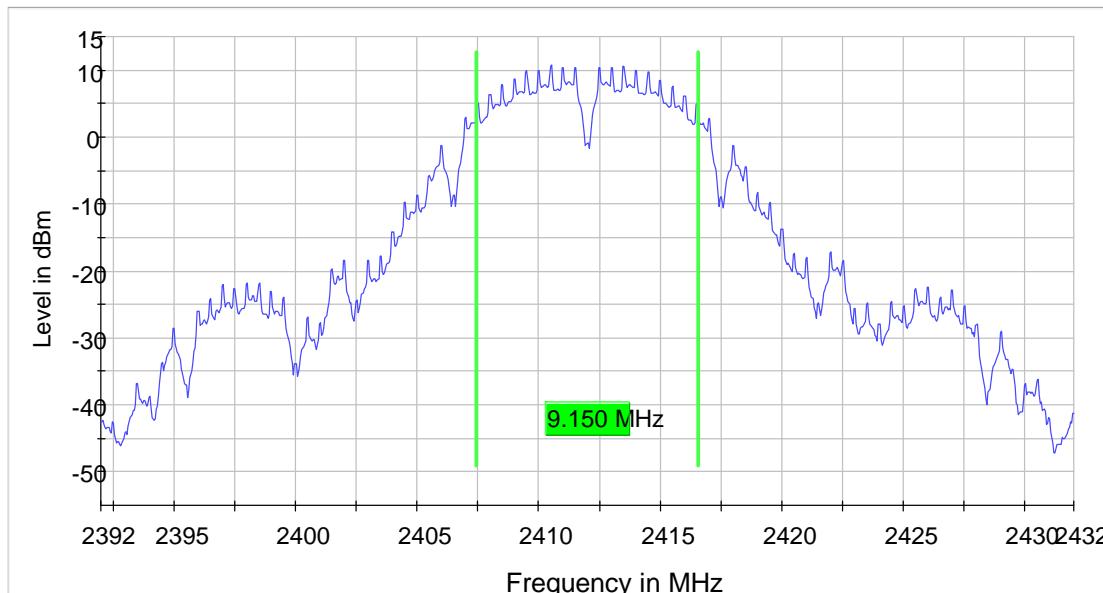

5.2.5 TEST EQUIPMENT USED

- R&S TS8997

5.3 OCCUPIED BANDWIDTH (99%)

Standard **FCC Part 15 Subpart C**

The test was performed according to:
 ANSI C63.10

5.3.1 TEST DESCRIPTION


The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Resolution Bandwidth (RBW): 1 to 5 % of the OBW
- Video Bandwidth (VBW): ≥ 3 times the RBW
- Span: 1.5 to 5 times the OBW
- Trace: Maxhold
- Sweeps: Till stable (min. 500, max. 75000)
- Sweptime: Auto
- Detector: Peak

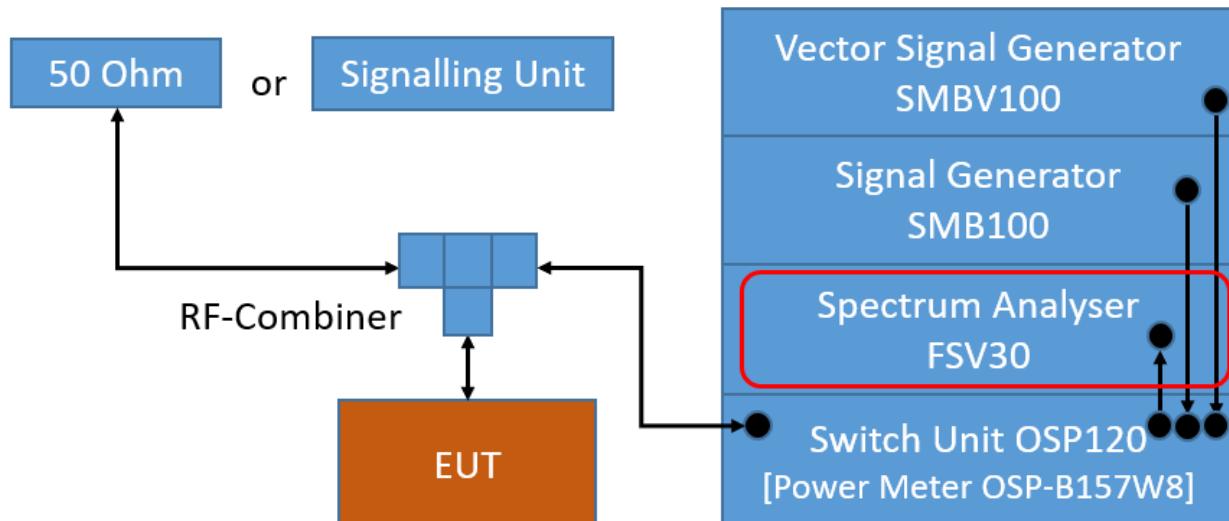

TS8997; Channel Bandwidth

5.3.2 TEST REQUIREMENTS / LIMITS

No applicable limit:

5.3.3 TEST PROTOCOL

Ambient temperature: 26 °C
 Air Pressure: 1010 hPa
 Humidity: 32 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	12.6
	6	2437	12.6
	11	2462	12.6

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	17.1
	6	2437	17.2
	11	2462	16.8


WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	99 % Bandwidth [MHz]
2.4 GHz ISM	1	2412	18.1
	6	2437	18.3
	11	2462	17.8

Remark: Please see next sub-clause for the measurement plot.

5.3.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN n 20 MHz, Operating Frequency = mid (S01_AH02)

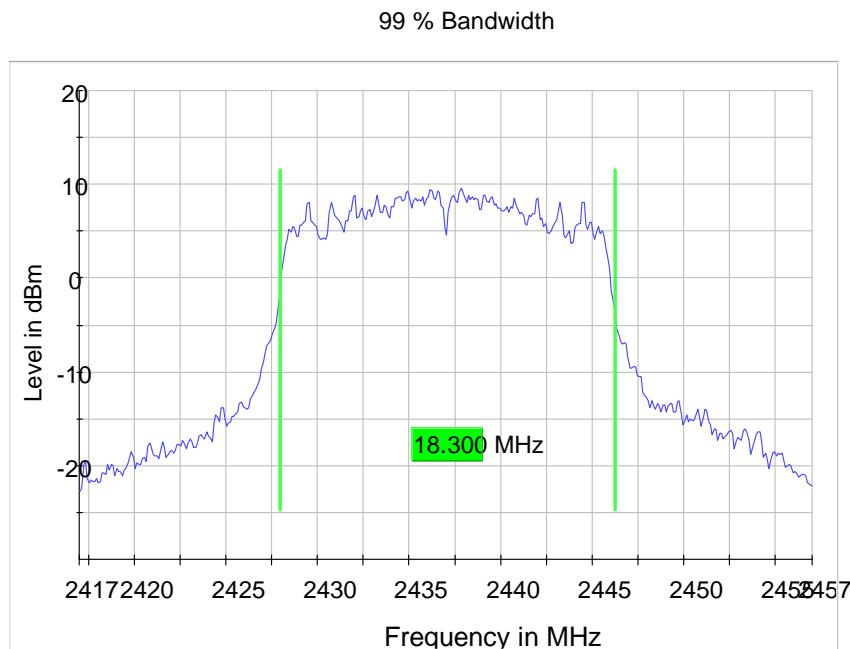

5.3.5 TEST EQUIPMENT USED

- R&S TS8997

5.4 PEAK POWER OUTPUT

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10

5.4.1 TEST DESCRIPTION

DTS EQUIPMENT:

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power.

Maximum peak conducted output power (e.g. Bluetooth Low Energy):

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

The reference level of the spectrum analyser was set higher than the output power of the EUT.


Analyser settings:

- Resolution Bandwidth (RBW): \geq DTS bandwidth
- Video Bandwidth (VBW): \geq 3 times RBW or maximum of analyzer
- Span: \geq 3 times RBW
- Trace: Maxhold
- Sweeps: Till stable (min. 300, max. 15000)
- Sweptime: Auto
- Detector: Peak


Maximum conducted average output power (e.g. WLAN):

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.


Measurement is performed using the gated RF average power meter integrated in the OSP 120 module OSP-B157W8 with signal bandwidth >300 MHz.

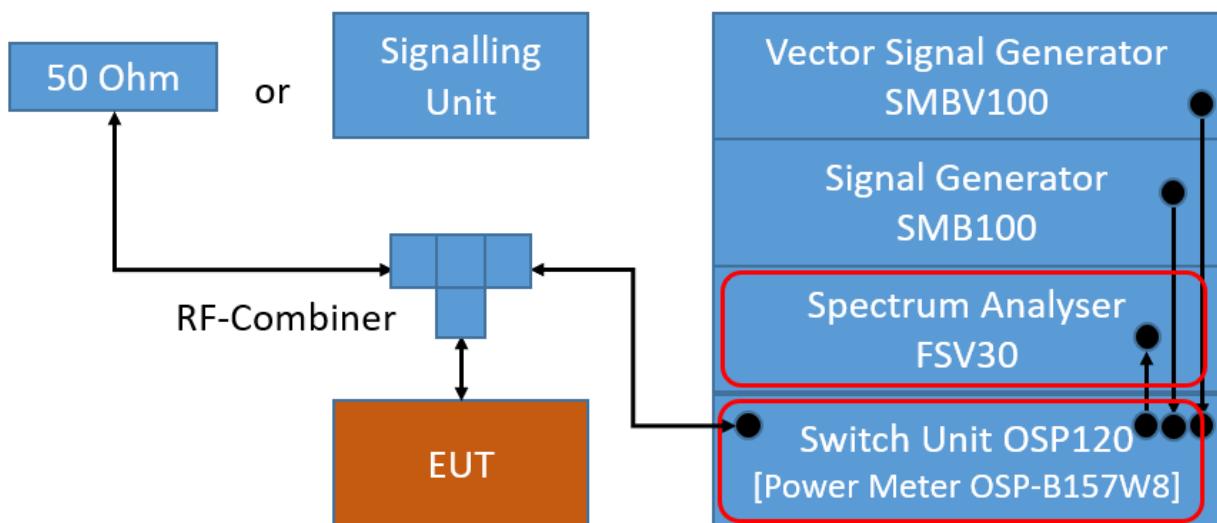

TS8997; Output Power

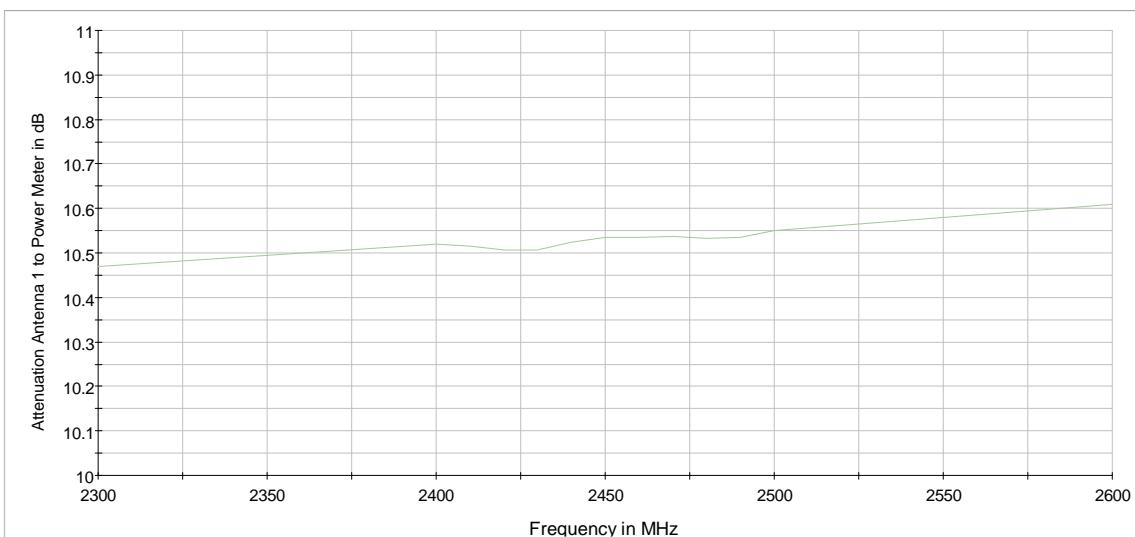

Attenuation of the measurement path to Power Meter

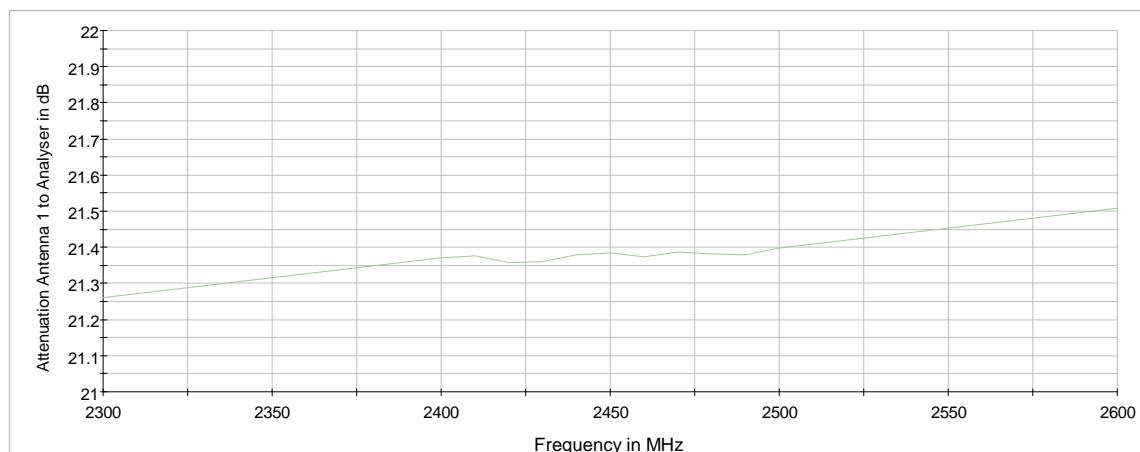

Attenuation of the measurement path to Analyser

5.4.2 TEST REQUIREMENTS / LIMITS

DTS devices:

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

==> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Frequency Hopping Systems:

FCC Part 15, Subpart C, §15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

FCC Part 15, Subpart C, §15.247 (b) (2)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

5.4.3 TEST PROTOCOL

Ambient temperature: 27 °C

Air Pressure: 1014 hPa

Humidity: 35 %

WLAN b-Mode; 20 MHz; 1

Mbit/s

Band	Channel No.	Frequency [MHz]	Max. Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	16.2	30.0	13.8	20.2
	6	2437	16.4	30.0	13.6	20.4
	11	2462	16.0	30.0	14.0	20.0

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	Max. Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	16.2	30.0	13.8	20.2
	6	2437	16.4	30.0	13.6	20.4
	11	2462	16.0	30.0	14.0	20.0

WLAN n-Mode; 20 MHz; MCS0

Band	Channel No.	Frequency [MHz]	Max. Average Power [dBm]	Limit [dBm]	Margin to Limit [dB]	E.I.R.P [dBm]
2.4 GHz ISM	1	2412	13.6	30.0	16.4	17.6
	6	2437	13.6	30.0	16.4	17.6
	11	2462	13.4	30.0	16.6	17.4

Remark: Please see next sub-clause for the measurement plot.

5.4.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Measured with power meter, no plot.

5.4.5 TEST EQUIPMENT USED

- R&S TS8997

5.5 SPURIOUS RF CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart C**

The test was performed according to:
 ANSI C63.10

5.5.1 TEST DESCRIPTION


The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.


Analyser settings:

- Frequency range: 30 – 26000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Trace: Maxhold
- Sweeps: Till Stable (max. 120)
- Sweep Time: Auto
- Detector: Peak

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance conducted". This value is used to calculate the 20 dBc or 30 dBc limit.

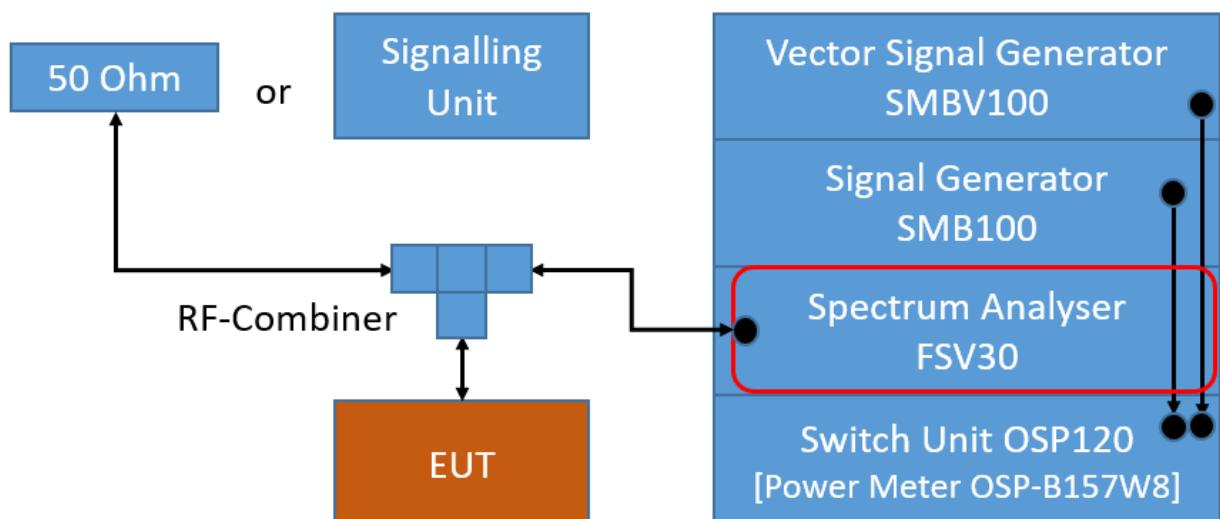

TS8997; Spurious RF Conducted Emissions

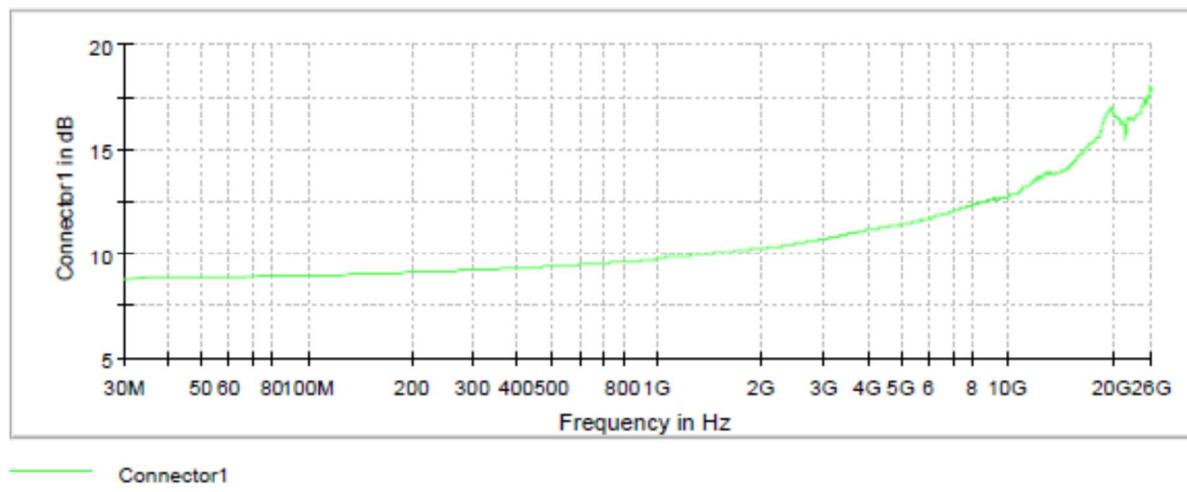

5.5.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.5.3 TEST PROTOCOL

Ambient temperature: 26 °C
 Air Pressure: 1010 hPa
 Humidity: 32 %

WLAN b-Mode; 20 MHz; 1 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2398.2	-29.4	PEAK	100	8.1	-21.9	7.5
6	2437	2395.0	-23.3	PEAK	100	10.3	-19.7	3.6
11	2462	2395.0	-22.6	PEAK	100	7.9	-22.1	0.5

WLAN g-Mode; 20 MHz; 6 Mbit/s

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2399.8	-26.8	PEAK	100	7.7	-22.3	4.5
6	2437	2395.0	-40.0	PEAK	100	6.7	-23.3	16.7
11	2462	2488.5	-28.8	PEAK	100	8.1	-21.9	6.9


WLAN n-Mode; 20 MHz; MCS0

Channel No	Channel Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2399.8	-27.2	PEAK	100	6.2	-23.8	3.4
6	2437	22247.2	-39.8	PEAK	100	5.6	-24.4	15.4
11	2462	2488.5	-31.5	PEAK	100	7.8	-22.2	9.3

Remark: Please see next sub-clause for the measurement plot.

5.5.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN b, Operating Frequency = high
 (S01_AH02)

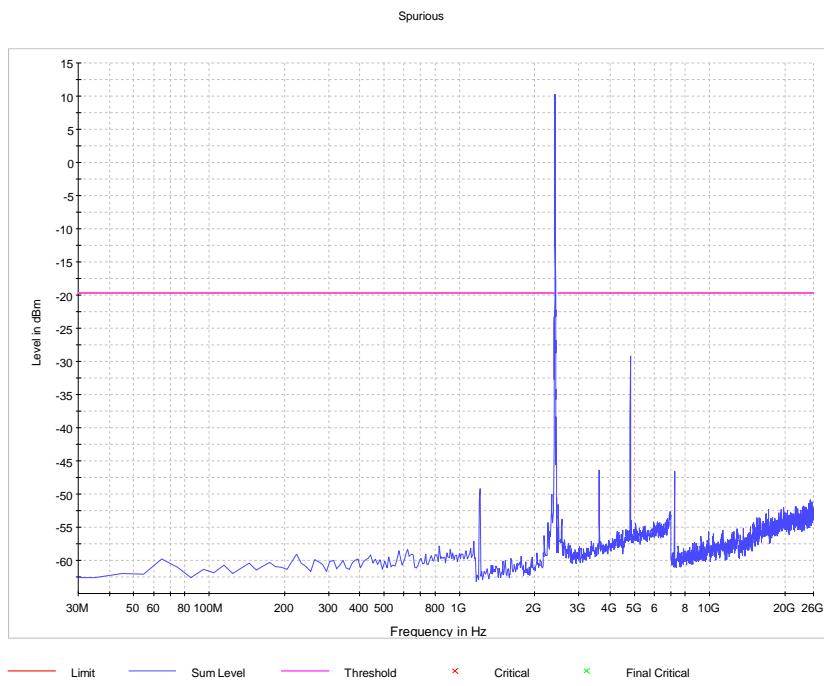

5.5.5 TEST EQUIPMENT USED

- R&S TS8997

5.6 TRANSMITTER SPURIOUS RADIATED EMISSIONS

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

5.6.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapters of ANSI C63.10:


- < 30 MHz: Chapter 6.4
- 30 MHz – 1 GHz: Chapter 6.5
- > 1 GHz: Chapter 6.6 (procedure according 6.6.5 used)

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered.

Below 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

1. Measurement up to 30 MHz

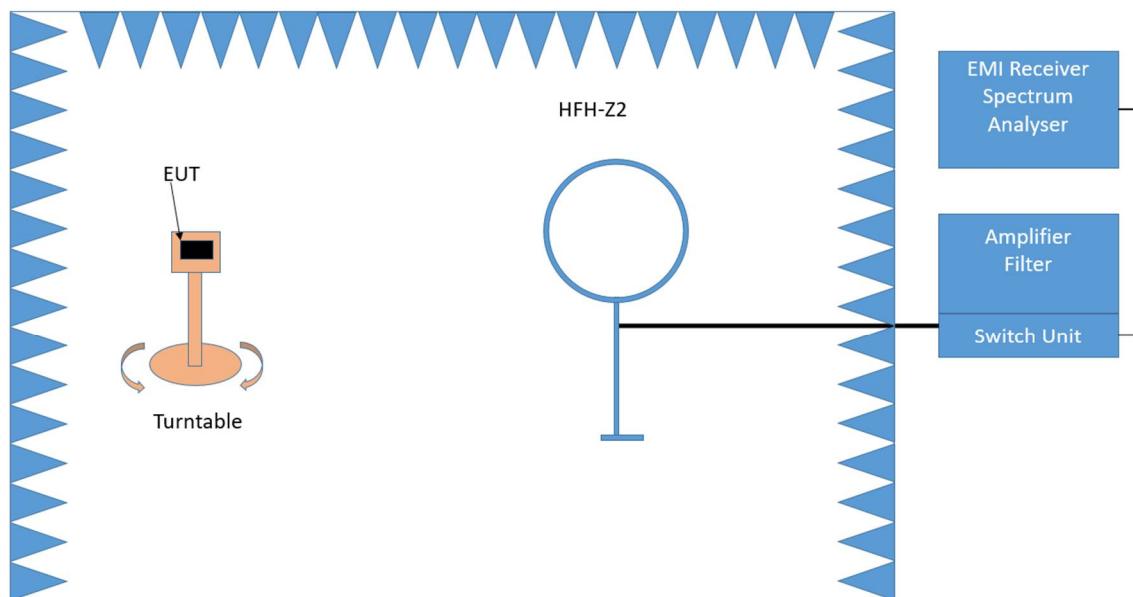

Test Setup; Spurious Emission Radiated (SAC), 9 kHz – 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Antenna height: 1 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 – 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)


Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Detector: Quasi-Peak (9 kHz – 150 kHz, Peak / Average 150 kHz- 30 MHz)
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

2. Measurement above 30 MHz and up to 1 GHz

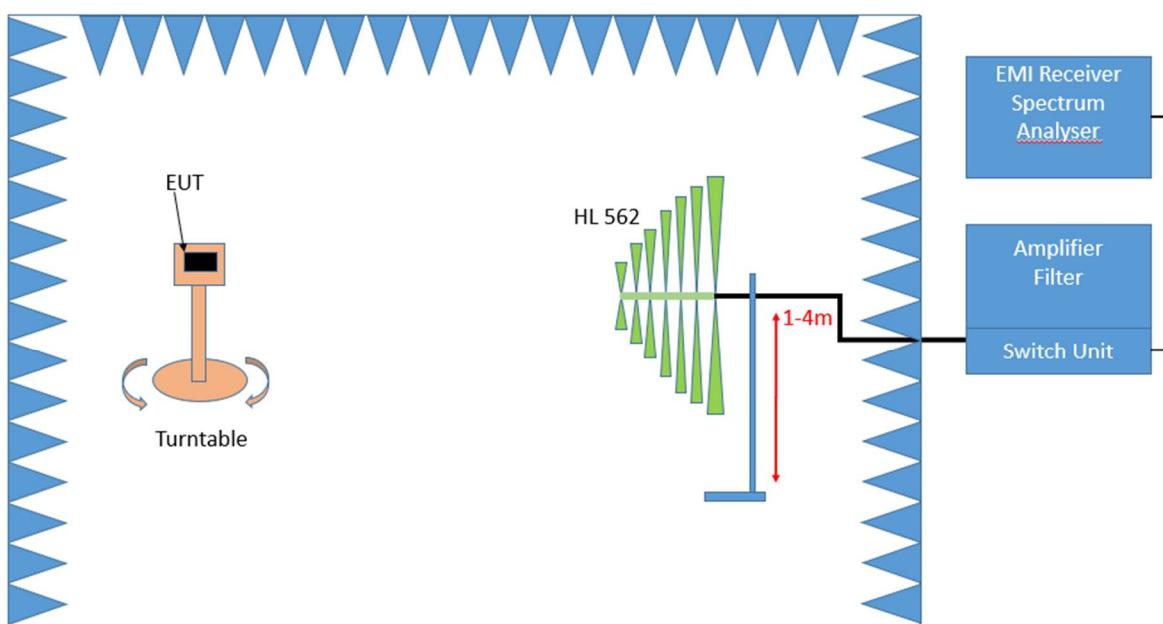

Test Setup; Spurious Emission Radiated (SAC), 30 MHz- 1GHz

Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range: -180° to 90°
- Turntable step size: 90°
- Height variation range: 1 – 4 m

- Height variation step size: 1.5 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by $\pm 45^\circ$ around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by ± 100 cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: 360 °
- Height variation range: 1 – 4 m
- Antenna Polarisation: max. value determined in step 1

Step 3: Final measurement with QP detector

With the settings determined in step 2, the final measurement will be performed:

EMI receiver settings for step 3:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s


After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

Above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

3. Measurement above 1 GHz

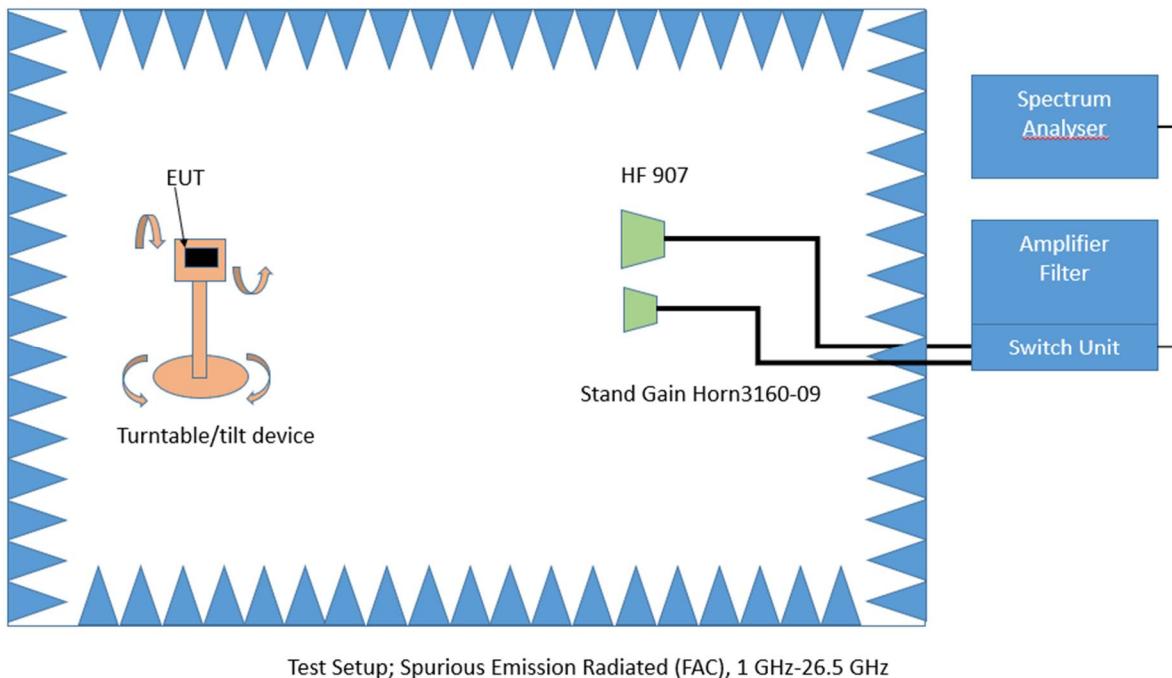

Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Spectrum analyser settings:

- Detector: Peak, Average
- RBW = 1 MHz
- VBW = 3 MHz

Step 2:

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

Spectrum analyser settings:

- Detector: Peak

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / CISPR Average
- Measured frequencies: in step 1 determined frequencies
- RBW = 1 MHz
- VBW = 3 MHz
- Measuring time: 1 s

5.6.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μ V/m)	Measurement distance (m)	Limits (dB μ V/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (μ V/m)	Measurement distance (m)	Limits (dB μ V/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b), there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dB μ V/m) = 20 log (Limit (μ V/m)/1 μ V/m)

5.6.3 TEST PROTOCOL

Ambient temperature:

23 - 24 °C

Air Pressure:

980 – 1009 hPa

Humidity:

34 - 35 %

WLAN b-Mode; 20 MHz; 1 Mbit/s

Applied duty cycle correction (AV): 0.0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
1	2412	150.0	28.8	QP	120	43.5	14.7	RB
1	2412	250.0	39.8	QP	120	46.0	6.2	RB
1	2412	2390.0	55.7	PEAK	1000	74.0	18.3	RB
1	2412	2390.0	45.9	AV	1000	54.0	8.1	RB
6	2437	150.0	26.4	QP	120	43.5	17.1	RB
6	2437	250.0	36.3	QP	120	46.0	9.7	RB
11	2462	150.0	30.2	QP	120	43.5	13.3	RB
11	2462	250.0	26.7	QP	120	46.0	19.3	RB
11	2462	400.0	28.9	QP	120	46.0	17.1	RB

WLAN g-Mode; 20 MHz; 6 Mbit/s

Applied duty cycle correction (AV): 0.3 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
1	2412	2389.7	73.8	PEAK	1000	74.0	0.2	RB
1	2412	2390.0	54.0	AV	1000	54.0	0.0	RB
6	2437	-	-	-	-	-	-	RB
11	2462	-	-	-	-	-	-	RB

WLAN n-Mode; 20 MHz; MCS0

Applied duty cycle correction (AV): 0.3 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
1	2412	2389.3	69.9	PEAK	1000	74.0	4.1	RB
1	2412	2389.9	47.1	AV	1000	54.0	6.9	RB
6	2437	-	-	-	-	-	-	RB
11	2462	-	-	-	-	-	-	RB


Remark: Please see next sub-clause for the measurement plot.

5.6.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN b, Operating Frequency = mid, Measurement range = 9 kHz - 30 MHz
 (S01_AE02)

Common Information

Test Description: Radiated Emissions, Test Site: Semi Anechoic Chamber @ 3 m
 Test Standard FCC15c247
 Operating Conditions: DE1408000 ae02, WLAN2.4 b-Mode CH:6 18dBm
 Operator Name: NEI
 Comment:

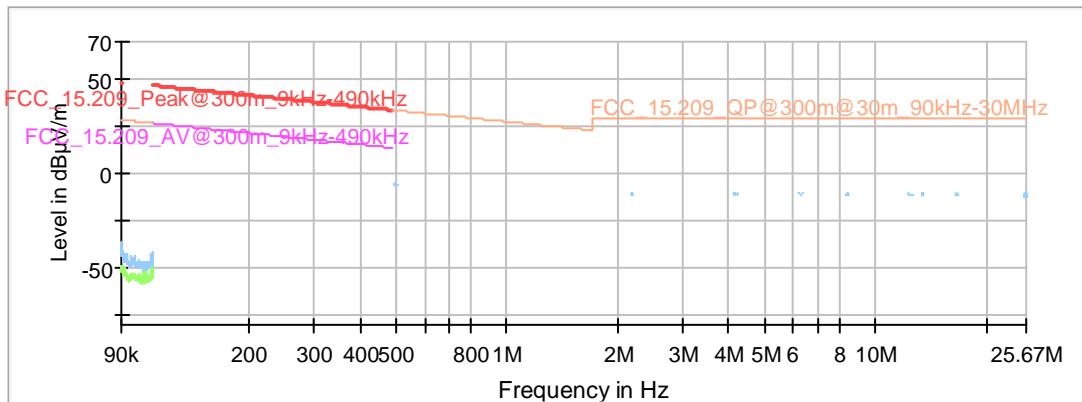

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin	Meas. Time (ms)	Bandwidth	Height	Pol	Azimuth	Corr. (dB/m)
---	---	---	---	---	---	---	---	---	---	---

EMI Auto Test Template: FCC_15c.247_9k-30M_x-y-Axis


Hardware Setup: H-Field_9k-30M_dBμV_m@3m_TT
 Measurement Type: Open-Area-Test-Site (SAC/FAR)
 Frequency Range: 90 kHz - 25.67 MHz
 Graphics Level Range: -80 dBμV/m - 70 dBμV/m

Preview Measurements:
 Scan Test Template: FCC15.209_RB_9k-30M_PRE

Adjustment:
 Template for Single Meas.: FCC15.209_RB_9k-30M_ADJUSTMENT

Final Measurements:
 Template for Single Meas.: FCC15.209_RB_9k-30M_Final


Radio Technology = WLAN b, Operating Frequency = low, Measurement range = 30 MHz - 1
 GHz
 (S01_AE02)

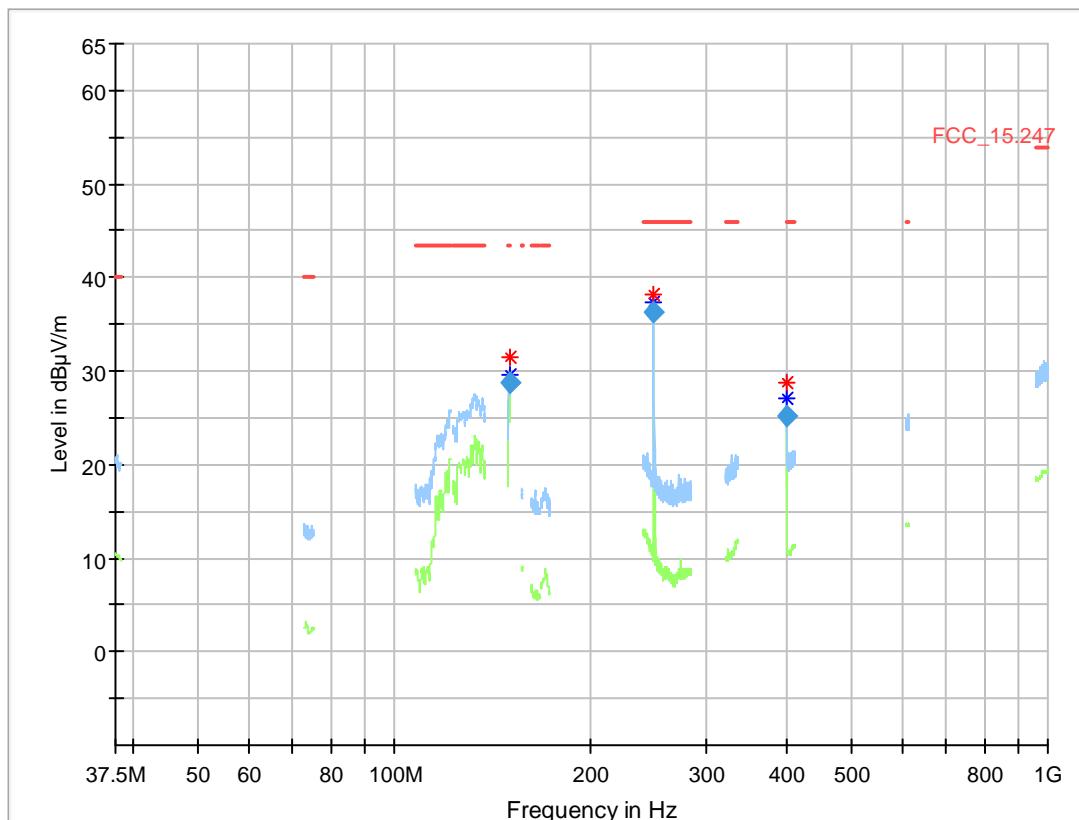

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin	Meas. Time (ms)	Bandwidth	Height	Pol	Azimuth	Corr. (dB/m)	Comment
149.990000	28.83	43.50	14.67	1000.0	120.000	217.0	H	13.0	9.2	
249.990000	36.30	46.00	9.70	1000.0	120.000	113.0	H	84.0	11.3	
399.990000	25.22	46.00	20.78	1000.0	120.000	102.0	H	-96.0	15.9	


Radio Technology = WLAN b, Operating Frequency = low, Measurement range = 1 GHz - 26 GHz
 (S03_AL02)

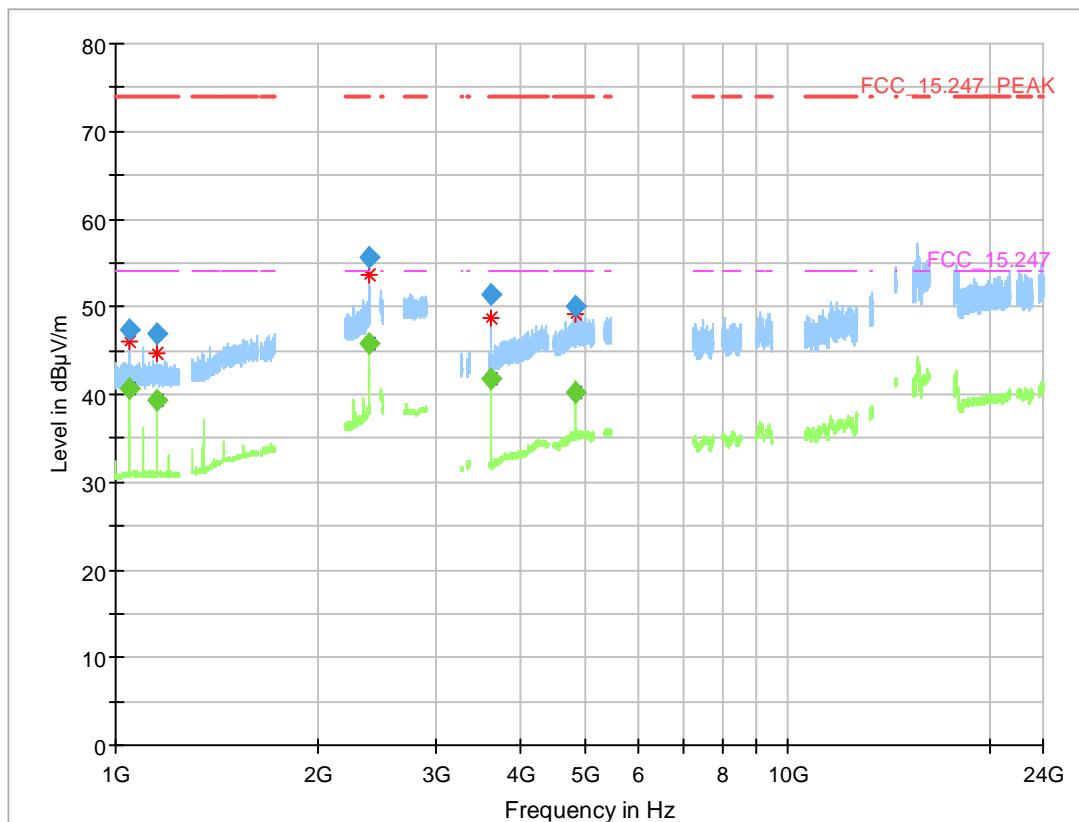

Final Result

Frequency (MHz)	MaxPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
1049.920	---	40.8	54.00	13.23	1000.0	1000.000	150.0	V	-92.0	105.0	-1.3
1049.920	47.3	---	74.00	26.71	1000.0	1000.000	150.0	H	145.0	15.0	-1.3
1150.000	---	39.4	54.00	14.61	1000.0	1000.000	150.0	H	151.0	75.0	-1.4
1150.000	46.9	---	74.00	27.09	1000.0	1000.000	150.0	H	120.0	-4.0	-1.4
2390.000	55.7	---	74.00	18.27	1000.0	1000.000	150.0	H	28.0	81.0	5.0
2390.000	---	45.9	54.00	8.09	1000.0	1000.000	150.0	V	-118.0	75.0	5.0
3616.800	51.5	---	74.00	22.50	1000.0	1000.000	150.0	H	150.0	103.0	1.2
3617.000	---	41.9	54.00	12.14	1000.0	1000.000	150.0	H	150.0	105.0	1.2
4824.025	---	40.3	54.00	13.70	1000.0	1000.000	150.0	H	-92.0	78.0	3.7
4824.025	50.0	---	74.00	23.95	1000.0	1000.000	150.0	H	-92.0	103.0	3.7

Radio Technology = WLAN g, Operating Frequency = low, Measurement range = 1 GHz - 26 GHz
 (S03_AL02)

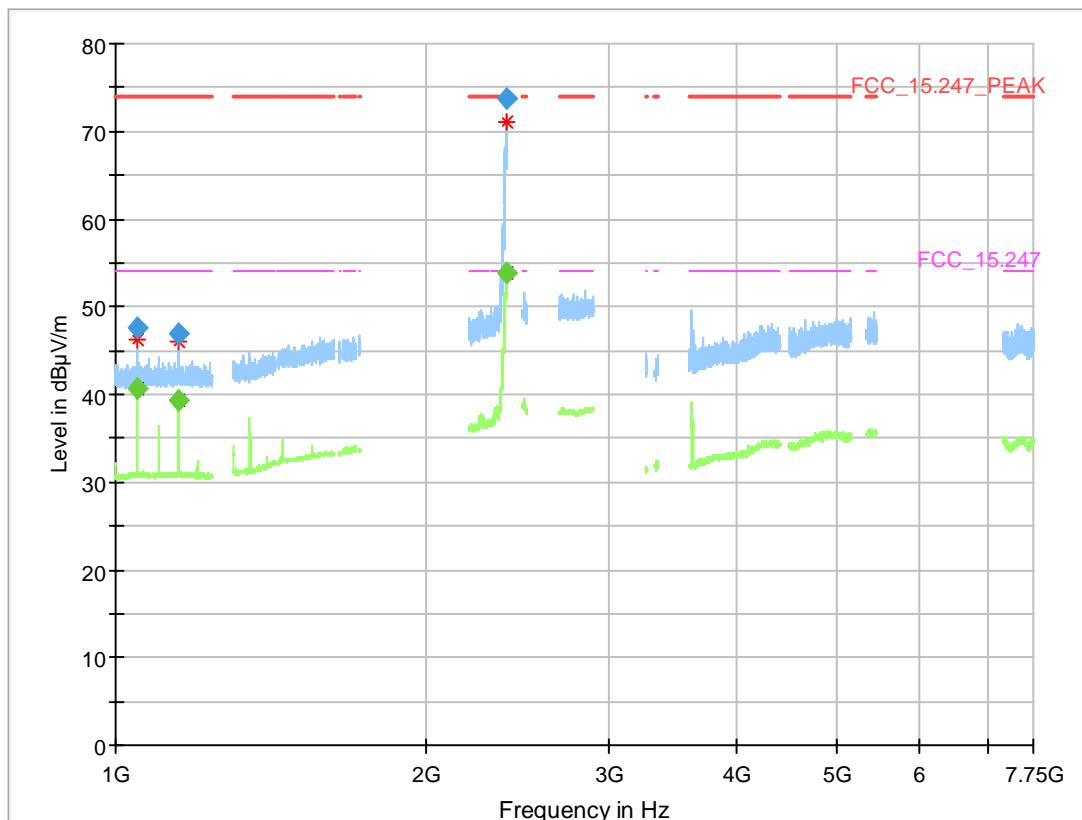

Final Result

Frequency (MHz)	MaxPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
1049.920	---	40.8	54.00	13.25	1000.0	1000.000	150.0	V	-92.0	105.0	-1.3
1050.160	47.6	---	74.00	26.44	1000.0	1000.000	150.0	V	-94.0	105.0	-1.3
1150.000	---	39.3	54.00	14.68	1000.0	1000.000	150.0	H	152.0	75.0	-1.4
1150.000	47.0	---	74.00	27.00	1000.0	1000.000	150.0	H	151.0	87.0	-1.4
2389.680	73.8	---	74.00	0.18	1000.0	1000.000	150.0	V	-118.0	75.0	5.0
2390.000	---	53.7	54.00	0.33	1000.0	1000.000	150.0	V	-118.0	75.0	5.0

5.6.5 TEST EQUIPMENT USED

- Radiated Emissions

5.7 BAND EDGE COMPLIANCE CONDUCTED

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10


5.7.1 TEST DESCRIPTION

For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room. The reference power was measured in the test case "Spurious RF Conducted Emissions".


The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyser settings:

- Lower Band Edge:
Measured range: 2310.0 MHz to 2483.5 MHz
- Upper Band Edge
Measured range: 2400.0 MHz to 2500 MHz
- Detector: Peak
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweptime: Auto
- Sweeps: Till stable (min. 300, max. 15000)
- Trace: Maxhold

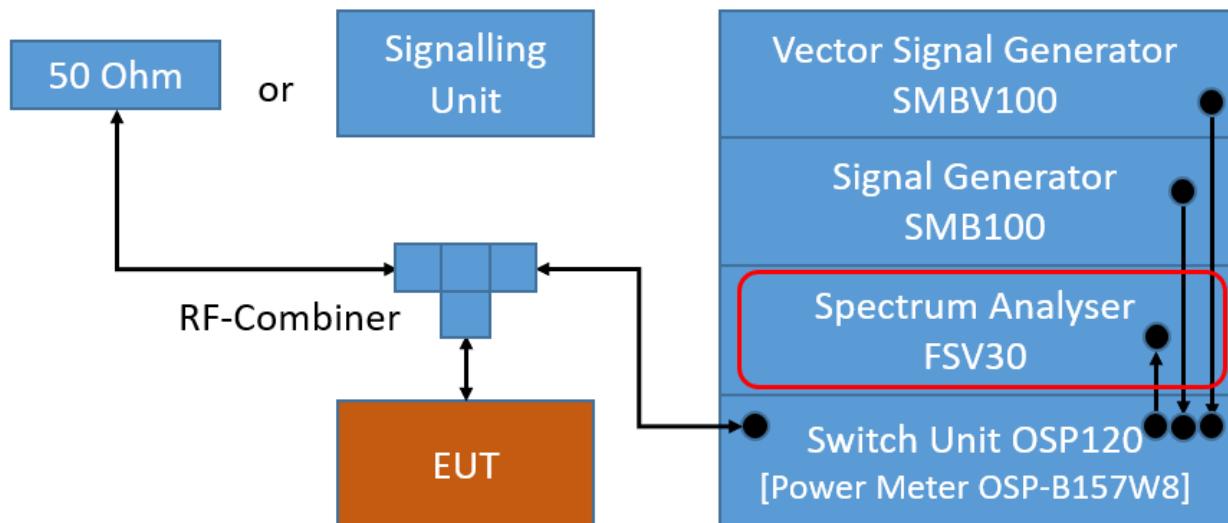

TS8997; Band Edge Conducted

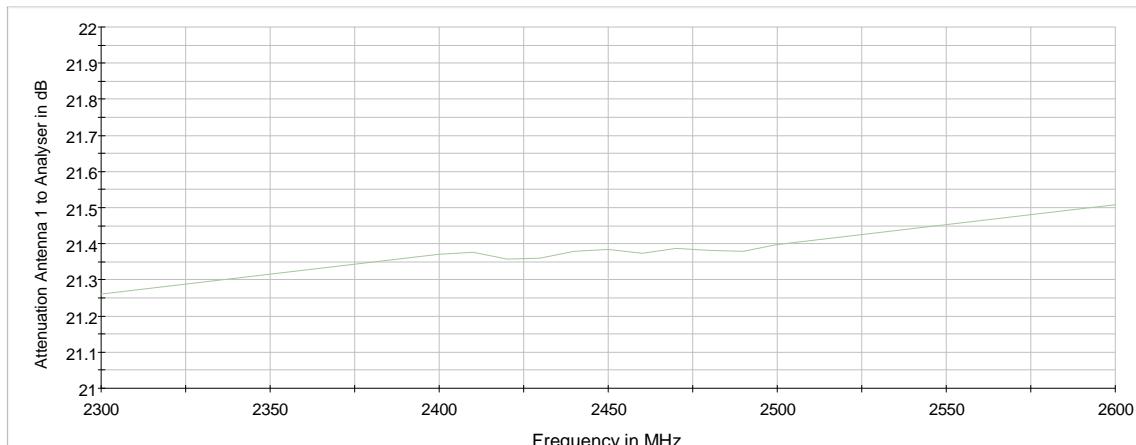

Attenuation of the measurement path

5.7.2 TEST REQUIREMENTS / LIMITS

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the conducted measurement the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

5.7.3 TEST PROTOCOL

Ambient temperature: 27 °C
 Air Pressure: 1014 hPa
 Humidity: 33 %

WLAN b-Mode; 20 MHz; 1 Mbit/s

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-26.0	PEAK	100	8.2	-21.8	4.2
11	2462	2483.5	-41.9	PEAK	100	8.0	-22.0	19.9

WLAN g-Mode; 20 MHz; 6 Mbit/s

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-26.0	PEAK	100	4.3	-25.7	0.3
11	2462	2483.5	-35.9	PEAK	100	4.4	-25.6	10.3


WLAN n-Mode; 20 MHz; MCS0

Channel No.	Channel Center Frequency [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBm]	Detector	RBW [kHz]	Ref. Level [dBm]	Limit [dBm]	Margin to Limit [dB]
1	2412	2400.0	-31.3	PEAK	100	2.2	-27.8	3.5
11	2462	2483.5	-42.1	PEAK	100	2.	-27.6	14.5


Remark: Please see next sub-clause for the measurement plot.

5.7.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Radio Technology = WLAN b, Operating Frequency = low, Band Edge = low
 (S04_AI02)

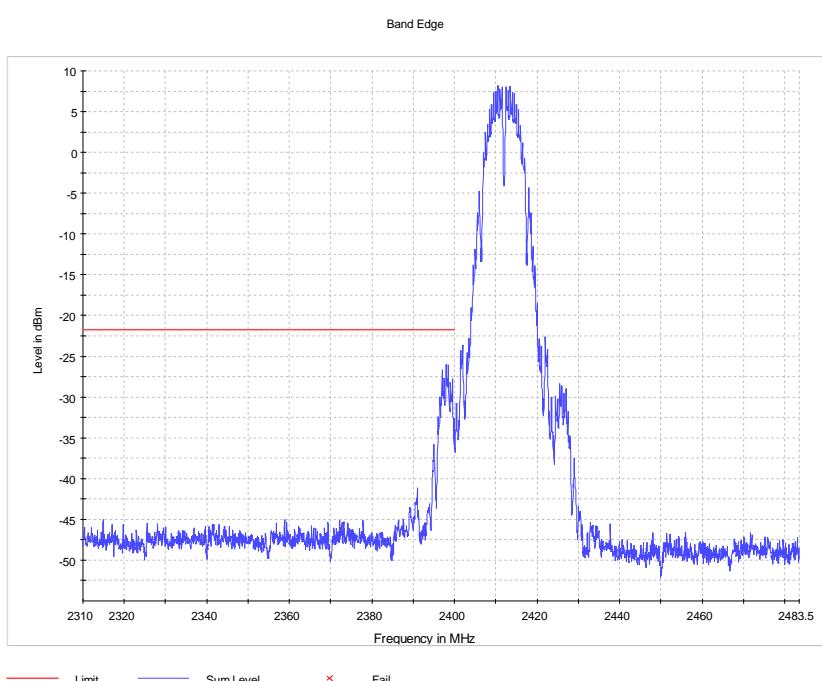


Radio Technology = WLAN b, Operating Frequency = high, Band Edge = high
 (S04_AI02)

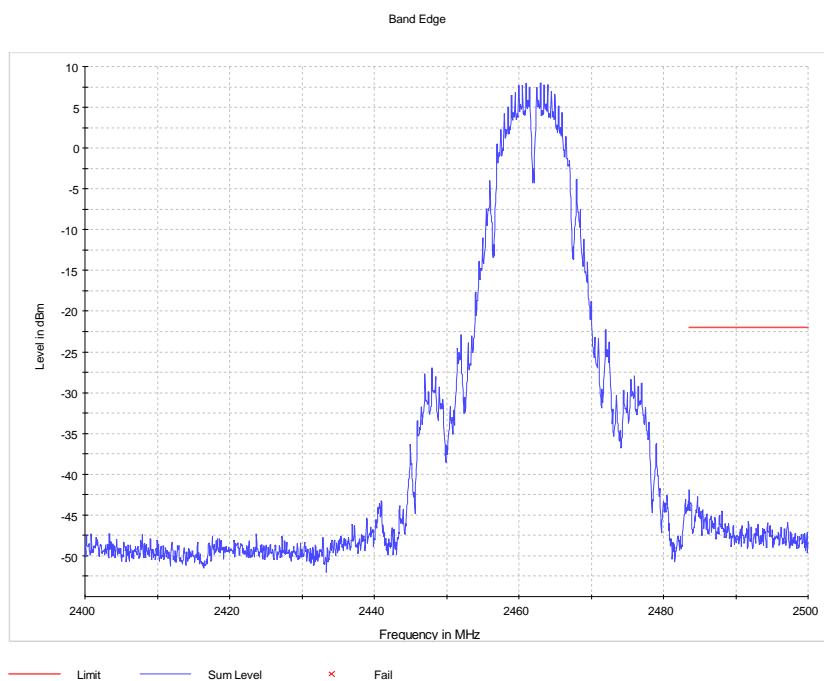


Radio Technology = WLAN g, Operating Frequency = low, Band Edge = low
 (S04_AI02)

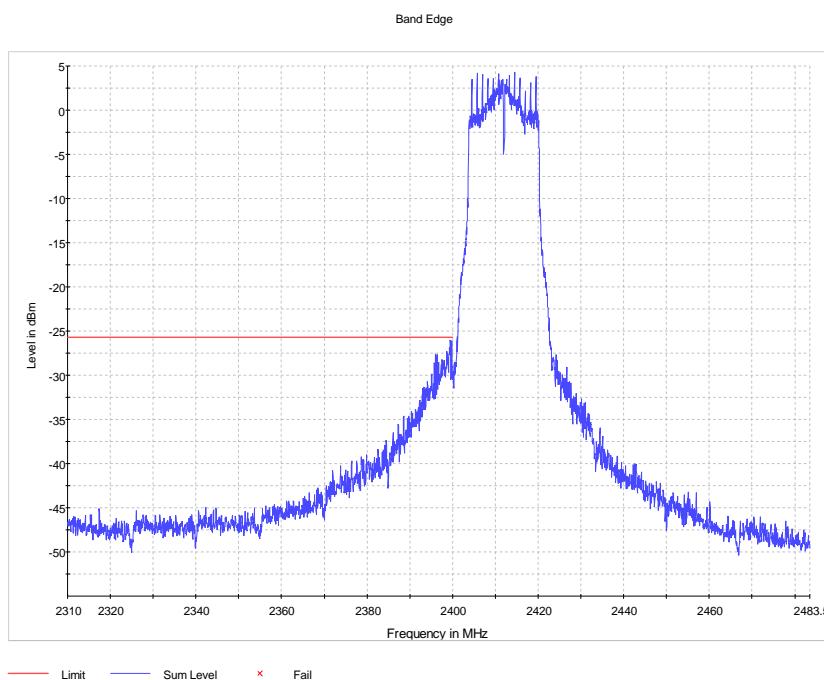


Radio Technology = WLAN g, Operating Frequency = high, Band Edge = high
 (S04_AI02)

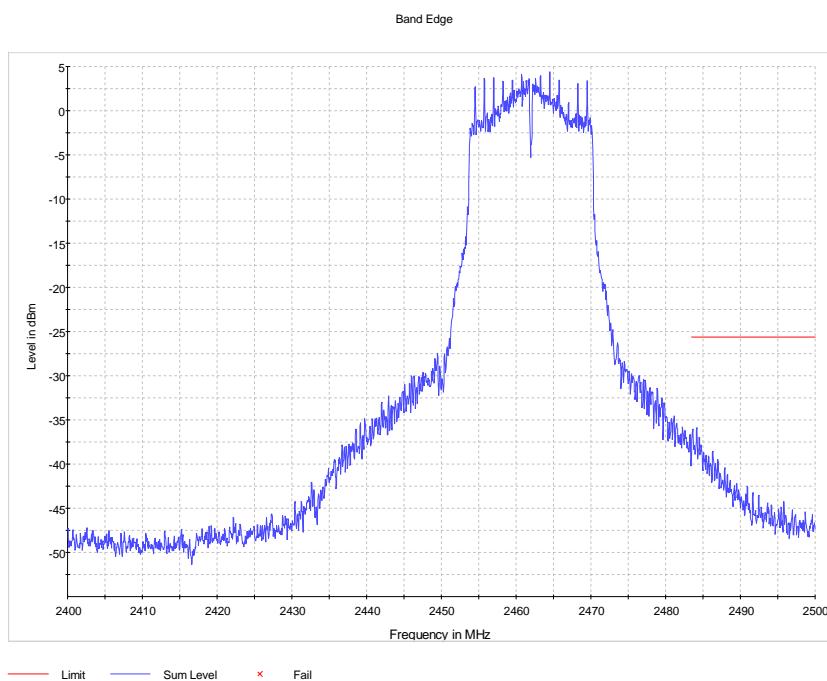

Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Band Edge = low
 (S04_AI02)

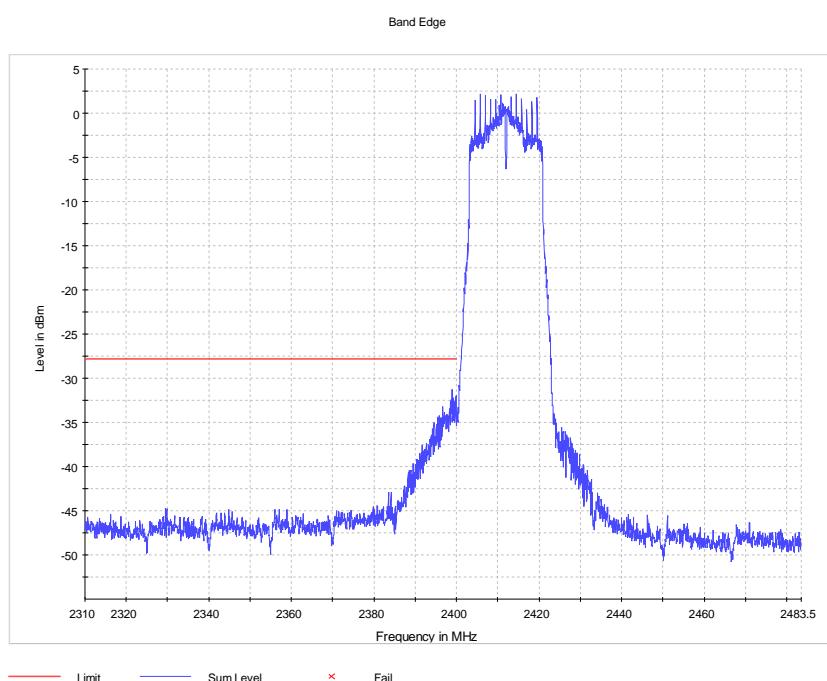

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Band Edge = high
(S04_AI02)

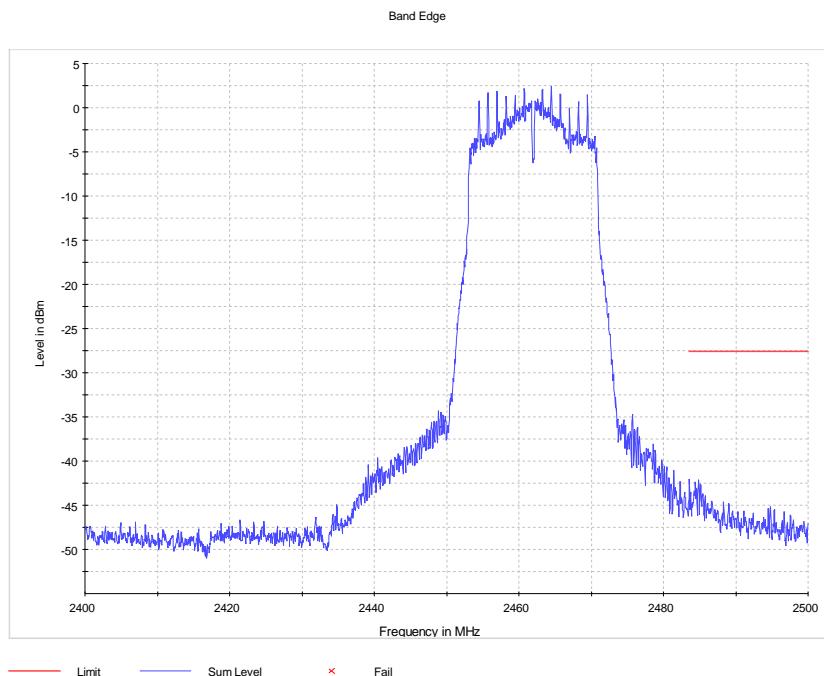

5.7.5 TEST EQUIPMENT USED

- R&S TS8997

5.8 BAND EDGE COMPLIANCE RADIATED

Standard **FCC Part 15 Subpart C**

The test was performed according to:

ANSI C63.10


5.8.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapter of ANSI C63.10: Chapter 6.10.5

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only (procedure according ANSI C63.10, chapter 6.6.5).

3. Measurement above 1 GHz

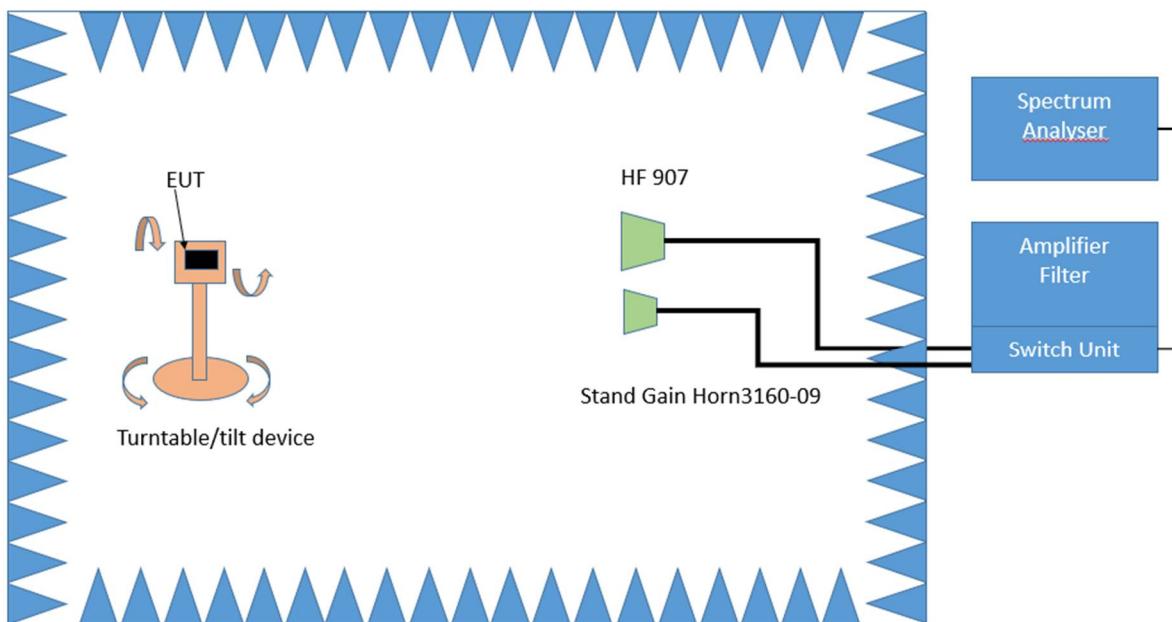

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Spectrum analyser settings:

- Detector: Peak, Average
- RBW = 1 MHz
- VBW = 3 MHz

Step 2:

The turn table azimuth will slowly vary by $\pm 22.5^\circ$.

The elevation angle will slowly vary by $\pm 45^\circ$

Spectrum analyser settings:

- Detector: Peak

Step 3:

Spectrum analyser settings for step 3:

- Detector: Peak / CISPR Average
- Measured frequencies: in step 1 determined frequencies
- RBW = 1 MHz
- VBW = 3 MHz
- Measuring time: 1 s

5.8.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μ V/m)	Measurement distance (m)	Limits (dB μ V/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (μ V/m)	Measurement distance (m)	Limits (dB μ V/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dB μ V/m) = 20 log (Limit (μ V/m)/1 μ V/m)

5.8.3 TEST PROTOCOL

WLAN b-Mode; 20 MHz; 1 Mbit/s

Applied duty cycle correction (AV): 0.0 dB

Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	59.2	PEAK	1000	74.0	14.8	BE
11	2462	2483.5	51.4	AV	1000	54.0	2.6	BE

WLAN g-Mode; 20 MHz; 6 Mbit/s

Applied duty cycle correction (AV): 0.3 dB

Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	71.9	PEAK	1000	74.0	2.1	BE
11	2462	2483.5	53.0	AV	1000	54.0	1.0	BE

WLAN n-Mode; 20 MHz; MCS0


Applied duty cycle correction (AV): 0.3 dB

Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dB μ V/m]	Detector	RBW [kHz]	Limit [dB μ V/m]	Margin to Limit [dB]	Limit Type
11	2462	2483.5	70.3	PEAK	1000	74.0	3.7	BE
11	2462	2483.5	44.8	AV	1000	54.0	9.2	BE

Remark: Please see next sub-clause for the measurement plot.

5.8.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Radio Technology = WLAN b, Operating Frequency = high, Band Edge = high
 (S03_AL02)

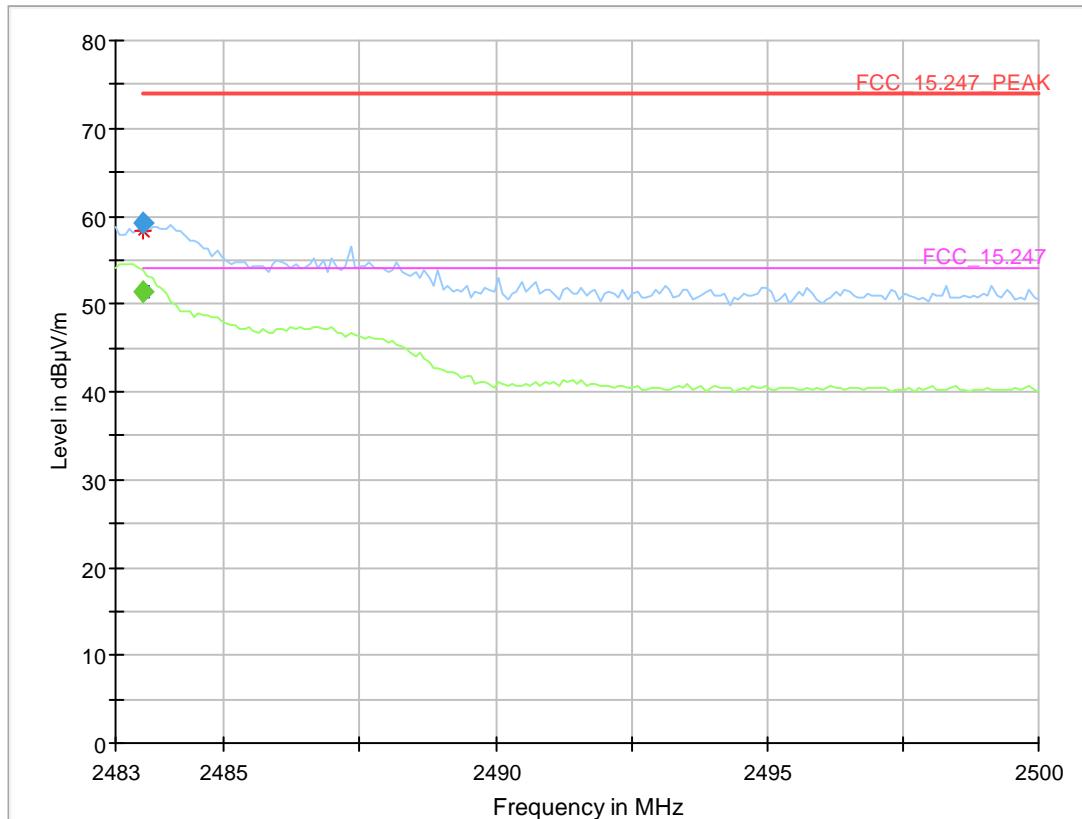

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin	Meas. Time (ms)	Bandwidth	Height	Pol	Azimuth	Elevation
2483.510	---	51.4	54.00	2.57	1000.0	1000.000	150.0	V	109.0	105.0
2483.510	59.2	---	74.00	14.75	1000.0	1000.000	150.0	V	109.0	105.0


Radio Technology = WLAN g, Operating Frequency = high, Band Edge = high
 (S03_AL02)

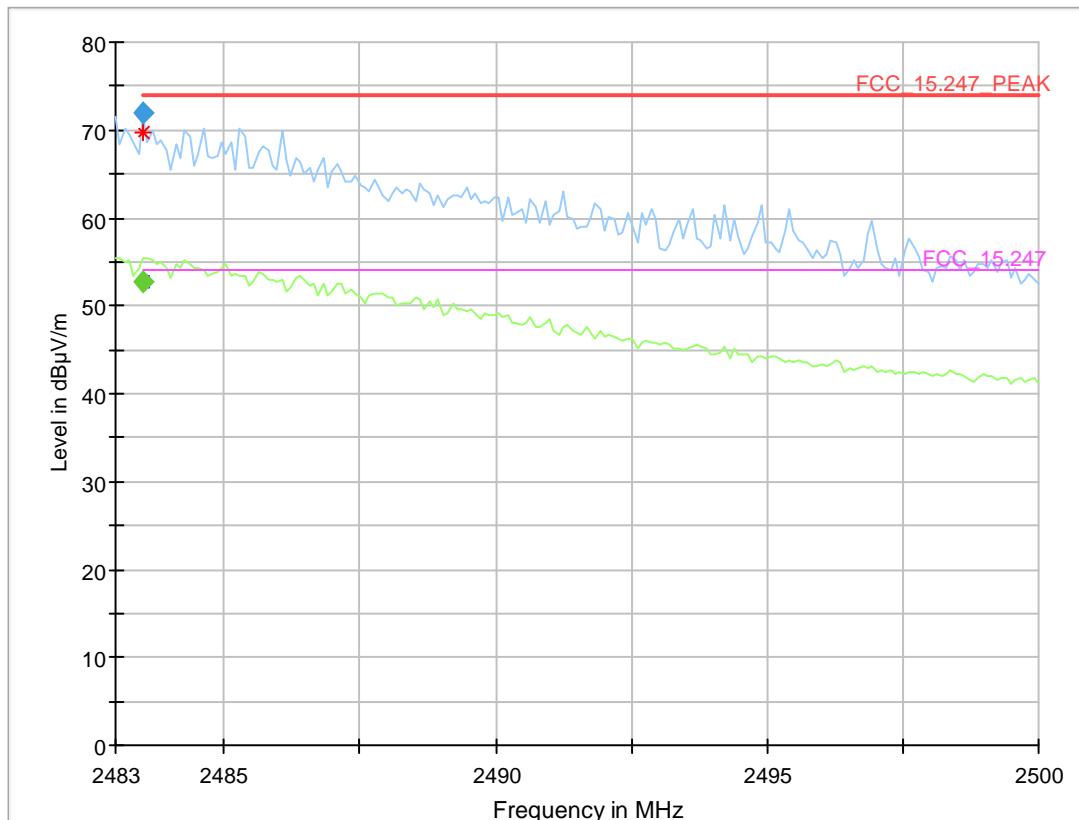

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	MARGIN	Meas. Time (ms)	Bandwidth	Height	Pol	Azimuth	Elevation
2483.510	---	52.7	54.00	1.34	1000.0	1000.000	150.0	V	109.0	105.0
2483.510	71.9	---	74.00	2.07	1000.0	1000.000	150.0	V	109.0	105.0

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Band Edge = high
 (S03_AL02)

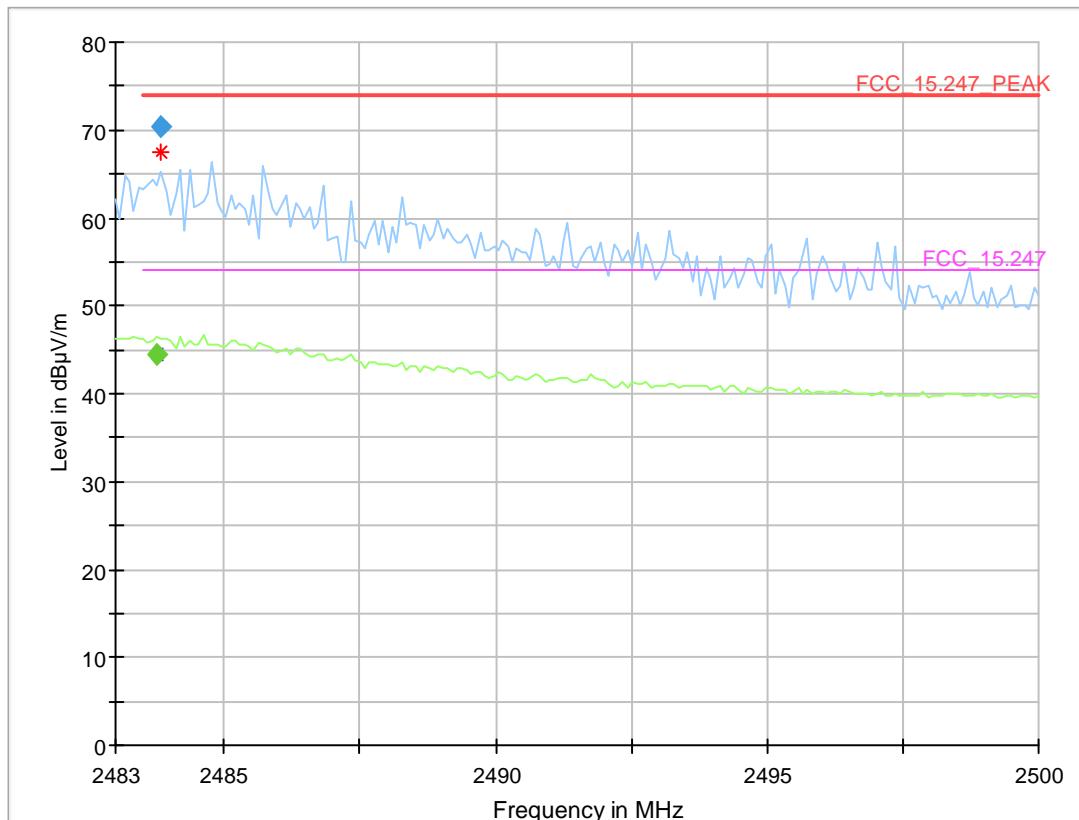

Final Result

Frequency (MHz)	MaxPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin	Meas. Time (ms)	Bandwidth	Height	Pol	Azimuth	Elevation
2483.765	---	44.5	54.00	9.48	1000.0	1000.000	150.0	V	109.0	105.0
2483.850	70.3	---	74.00	3.66	1000.0	1000.000	150.0	V	79.0	82.0

5.8.5 TEST EQUIPMENT USED

- Radiated Emissions

5.9 POWER DENSITY

Standard **FCC Part 15 Subpart C**

The test was performed according to:
ANSI C63.10

5.9.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Power Density measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) power density.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Maximum Peak Power Spectral Density (e.g. Bluetooth low energy):


Analyser settings:

- Resolution Bandwidth (RBW): 100 kHz, 10 kHz or 3 kHz
- Video Bandwidth (VBW): \geq 3 times RBW
- Trace: Maxhold
- Sweeps: Till stable (min. 200, max. 15000)
- Sweptime: Auto
- Detector: Peak


Maximum Average Power Spectral Density (e.g. WLAN):

Analyser settings:

- Resolution Bandwidth (RBW): 100 kHz, 10 kHz or 3 kHz
- Video Bandwidth (VBW): \geq 3 times RBW
- Sweep Points: \geq 2 times span / RBW
- Trace: Maxhold
- Sweeps: Till stable (max. 150)
- Sweptime: \leq Number of Sweep Points x minimum transmission duration
- Detector: RMS

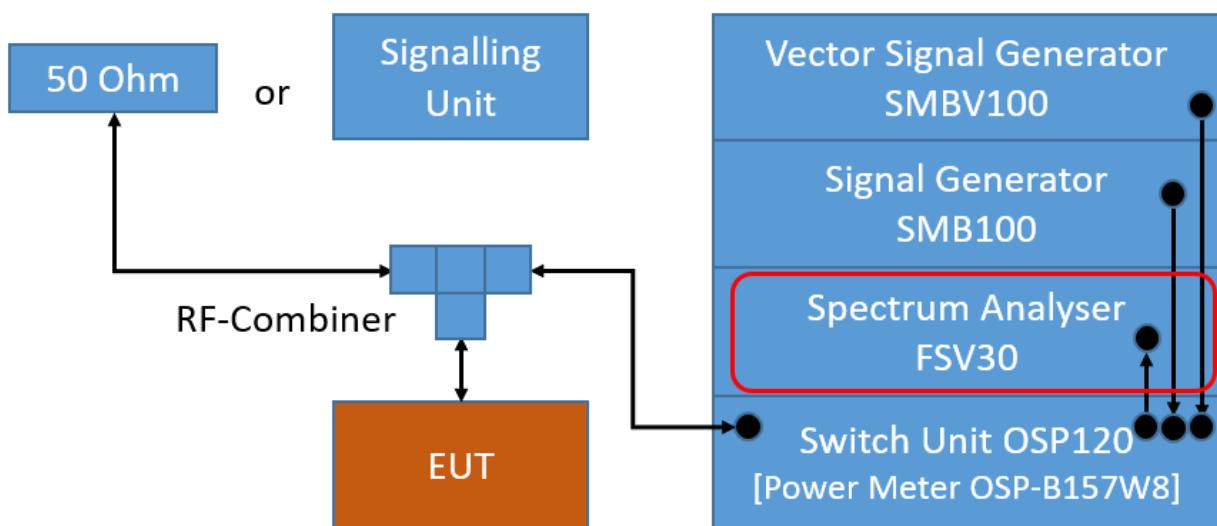

TS8997; Power Spectral Density

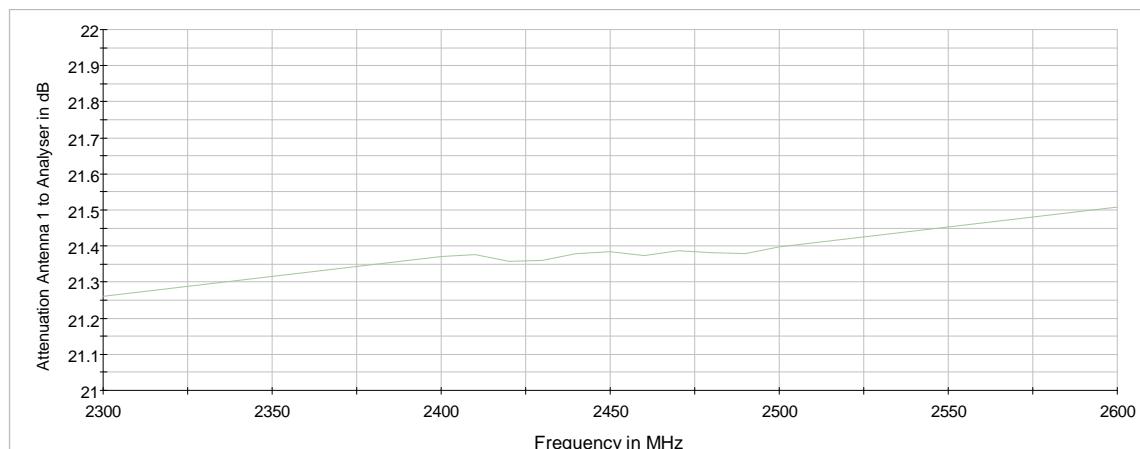

Attenuation of the measurement path

5.9.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

FCC Part 15, Subpart C, §15.247 (f)

(f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques.

...

The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

5.9.3 TEST PROTOCOL

Ambient temperature: 27 °C
 Air Pressure: 1014 hPa
 Humidity: 33 %
 WLAN b-Mode; 20 MHz; 1 Mbit/s

Band	Channel No.	Frequency [MHz]	Power Density [dBm/100kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	0.3	8.0	7.7
	6	2437	0.3	8.0	7.7
	11	2462	0.0	8.0	8.0

WLAN g-Mode; 20 MHz; 6 Mbit/s

Band	Channel No.	Frequency [MHz]	Power Density [dBm/100kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-1.8	8.0	9.8
	6	2437	-1.9	8.0	9.9
	11	2462	-1.7	8.0	9.7


WLAN n-Mode; 20 MHz;
 MCS0

Band	Channel No.	Frequency [MHz]	Power Density [dBm/100kHz]	Limit [dBm/3kHz]	Margin to Limit [dB]
2.4 GHz ISM	1	2412	-4.2	8.0	12.2
	6	2437	-4.4	8.0	12.4
	11	2462	-4.4	8.0	12.4

Remark: Please see next sub-clause for the measurement plot.

5.9.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN b, Operating Frequency = low
(S04_AI02)

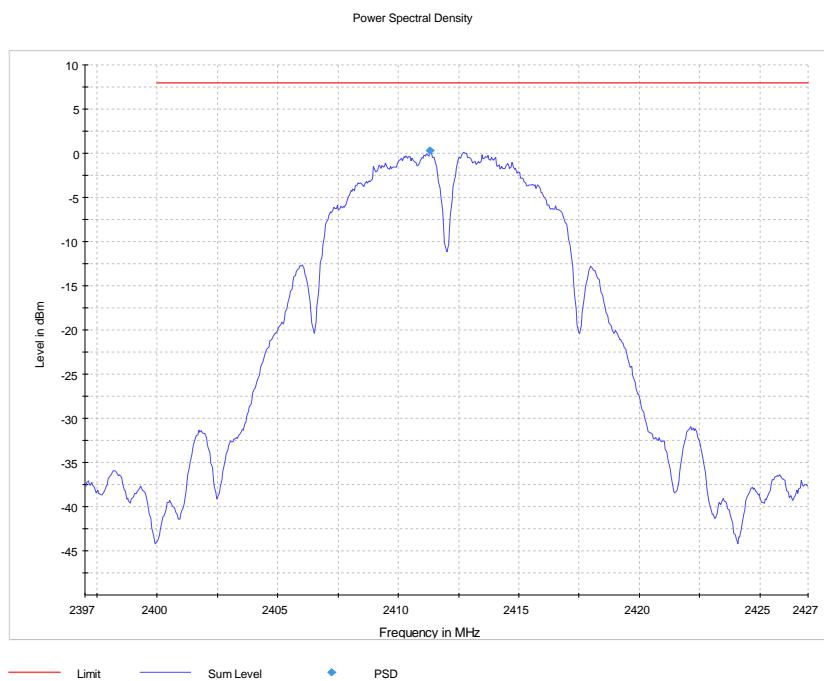

5.9.5 TEST EQUIPMENT USED

- R&S TS8997

6 TEST EQUIPMENT

1 Conducted Emissions FCC
 Conducted Emissions AC Mains for FCC standards

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	MFS	Rubidium Frequency Normal MFS	Datum GmbH	002	2019-10	2020-11
1.2	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2019-05	2021-05
1.3	SMBV100A	Vector Signal Generator 9 kHz - 3.2 GHz (GNSS / Broadcast Signalling Unit)	Rohde & Schwarz GmbH & Co. KG	260001	2018-01	2021-02
1.4	ESH3-Z5	Two-Line V-Network (AUX)	Rohde & Schwarz GmbH & Co. KG	828304/029	2019-06	2021-06
1.5	EP 1200/B, NA/B1	AC Source, Amplifier with integrated variable Oscillator	Spitzenberger & Spies GmbH & Co. KG	B6278		
1.6	Chroma 6404	AC Source	Chroma ATE INC.	64040001304		
1.7	Shielded Room 02	Shielded Room 4m x 3m	Frankonia Germany EMC Solution GmbH	-		
1.8	ESH3-Z5	Two-Line V-Network (EUT)	Rohde & Schwarz GmbH & Co. KG	829996/002	2019-06	2021-06
1.9	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2019-01	2021-01
1.10	Opus10 THI (8152.00)	T/H Logger 02	Lufft Mess- und Regeltechnik GmbH	7489	2019-05	2021-05

2 R&S TS8997
 2.4 and 5 GHz Bands Conducted Test Lab

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	SMB100A	Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	107695	2017-07	2020-07
2.2	FSV30	Signal Analyzer 10 Hz - 30 GHz	Rohde & Schwarz	103005	2018-04	2020-04
2.3	NGSM 32/10	Power Supply	Rohde & Schwarz GmbH & Co. KG	3456	2020-01	2022-01
2.4	Temperature Chamber KWP 120/70	Temperature Chamber Weiss 01	Weiss	59226012190010	2020-05	2022-05
2.5	Temperature Chamber VT 4002	Temperature Chamber Vötsch 03	Vötsch	58566002150010	2020-05	2022-05
2.6	Opus10 THI (8152.00)	T/H Logger 03	Lufft Mess- und Regeltechnik GmbH	7482	2019-06	2021-06
2.7	SMBV100A	Vector Signal Generator 9 kHz - 6 GHz	Rohde & Schwarz	259291	2019-11	2022-11

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.8	OSP120	Contains Power Meter and Switching Unit OSP-B157W8	Rohde & Schwarz	101158	2018-05	2021-05
2.9	Temperature Chamber VT 4002	Temperature Chamber Vötsch 05	Vötsch	58566080550010	2018-04	2020-05

3 Radiated Emissions
Lab to perform radiated emission tests

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.1	MFS	Rubidium Frequency Normal MFS	Datum GmbH	002	2019-10	2020-11
3.2	N5000/NP	Filter for EUT, 2 Lines, 250 V, 16 A	ETS-LINDGREN	241515		
3.3	Opus10 TPR (8253.00)	T/P Logger 13	Lufft Mess- und Regeltechnik GmbH	13936	2019-05	2021-05
3.4	ESW44	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz GmbH & Co. KG	101603	2019-12	2021-12
3.5	Anechoic Chamber 01	SAC/FAR, 10.58 m x 6.38 m x 6.00 m	Frankonia	none	2018-06	2021-06
3.6	HL 562 ULTRALOG	Biconical-log-per antenna (30 MHz - 3 GHz) with HL 562E biconicals	Rohde & Schwarz GmbH & Co. KG	830547/003	2018-07	2021-07
3.7	AMF-7D00101800-30-10P-R	Broadband Amplifier 100 MHz - 18 GHz	Miteq			
3.8	5HC2700/12750	High Pass Filter	Trilithic	9942012		
3.9	ASP 1.2/1.8-10 kg	Antenna Mast	Maturo GmbH	-		
3.10	Anechoic Chamber 03	FAR, 8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	2018-06	2020-06
3.11	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2020-04	2022-04
3.12	Opus10 THI (8152.00)	T/H Logger 10	Lufft Mess- und Regeltechnik GmbH	12488	2019-06	2021-06
3.13	PONTIS Con4101	PONTIS Camera Controller		6061510370		
3.14	NRVD	Power Meter	Rohde & Schwarz GmbH & Co. KG	828110/016	2019-08	2020-08
3.15	HF 906	Double-ridged horn	Rohde & Schwarz	357357/002	2018-09	2021-09

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.16	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785		
3.17	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069		
3.18	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright Instruments GmbH	09		
3.19	DS 420S	Turn Table 2 m diameter	HD GmbH	420/573/99		
3.20	4HC1600/12750 -1.5-KK	High Pass Filter	Trilithic	9942011		
3.21	JS4-00102600-42-5A	Broadband Amplifier 30 MHz - 26 GHz	Miteq	619368		
3.22	TT 1.5 WI	Turn Table	Maturo GmbH	-		
3.23	HL 562 ULTRALOG	Biconical-log-per Antenna (30 MHz - 3 GHz)	Rohde & Schwarz GmbH & Co. KG	100609	2019-05	2022-05
3.24	HF 906	Double-ridged horn	Rohde & Schwarz	357357/001	2018-03	2021-03
3.25	3160-10	Standard Gain / Pyramidal Horn Antenna 40 GHz	EMCO Elektronik GmbH	00086675		
3.26	MA4985-XP-ET	Bore Sight Antenna Mast	innco systems GmbH	none		
3.27	JUN-AIR Mod. 6-15	Air Compressor	JUN-AIR Deutschland GmbH	612582		
3.28	5HC3500/18000 -1.2-KK	High Pass Filter	Trilithic	200035008		
3.29	HFH2-Z2	Loop Antenna + 3 Axis Tripod	Rohde & Schwarz GmbH & Co. KG	829324/006	2018-01	2021-01
3.30	Opus10 THI (8152.00)	T/H Logger 12	Lufft Mess- und Regeltechnik GmbH	12482	2019-06	2021-06
3.31	SB4-100.OLD20-3T/10 Airwin 2 x 1.5 kW	Air compressor (oil-free)	airWin Kompressoren UG	901/00503		
3.32	JS4-00101800-35-5P	Broadband Amplifier 30 MHz - 18 GHz	Miteq	896037		
3.33	AS 620 P	Antenna Mast (pneumatic polarisation)	HD GmbH	620/37		
3.34	6005D (30 V / 5 A)	Laboratory Power Supply 120 V 60 Hz	PeakTech	81062045		
3.35	TD1.5-10kg	EUT Tilt Device (Rohacell)	Maturo GmbH	TD1.5-10kg/024/3790709		
3.36	Innco Systems CO3000	Controller for bore sight mast SAC	innco systems GmbH	CO3000/967/39371016/L		
3.37	NRV-Z1	Sensor Head B	Rohde & Schwarz GmbH & Co. KG	827753/006	2019-08	2020-08
3.38	HF 907-2	Double-ridged horn	Rohde & Schwarz	102817	2019-04	2022-04

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
3.39	PAS 2.5 - 10 kg	Antenna Mast	Maturo GmbH	-		
3.40	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324		
3.41	AM 4.0	Antenna Mast 4 m	Maturo GmbH	AM4.0/180/1192 0513		
3.42	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2018-07	2021-07

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

7.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency	Corr.	LISN insertion loss ESH3-Z5	cable loss (incl. 10 dB attenuator)
MHz	dB	dB	dB
0.15	10.1	0.1	10.0
5	10.3	0.1	10.2
7	10.5	0.2	10.3
10	10.5	0.2	10.3
12	10.7	0.3	10.4
14	10.7	0.3	10.4
16	10.8	0.4	10.4
18	10.9	0.4	10.5
20	10.9	0.4	10.5
22	11.1	0.5	10.6
24	11.1	0.5	10.6
26	11.2	0.5	10.7
28	11.2	0.5	10.7
30	11.3	0.5	10.8

Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

7.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency	AF HFH-Z2)	Corr.	cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-40 dB/ decade)	d_{limit} (meas. distance (limit))	d_{used} (meas. distance (used))
MHz	dB (1/m)	dB	dB	dB	dB	dB	dB	m	m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB } 1/\text{m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-40 * \text{LOG } (d_{\text{limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

7.3 ANTENNA R&S HL562 (30 MHZ – 1 GHZ)

($d_{\text{limit}} = 3 \text{ m}$)

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d_{limit} (meas. distance (limit))	d_{used} (meas. distance (used))
dB	dB	dB	dB	dB	m	m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

($d_{\text{limit}} = 10 \text{ m}$)

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB } 1/\text{m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction = $-20 * \text{LOG} (d_{\text{limit}}/d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit, attenuator & pre-amp)	cable loss 4 (to receiver)		
dB	dB	dB	dB		
0.99	0.31	-21.51	0.79		
1.44	0.44	-20.63	1.38		
1.87	0.53	-19.85	1.33		
2.41	0.67	-19.13	1.31		
2.78	0.86	-18.71	1.40		
2.74	0.90	-17.83	1.47		
2.82	0.86	-16.19	1.46		

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber)	cable loss 2 (inside chamber)	cable loss 3 (outside chamber)	cable loss 4 (switch unit, attenuator & pre-amp)	cable loss 5 (to receiver)	used for FCC 15.247
dB	dB	dB	dB	dB	
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency	AF R&S HF907	Corr.
MHz	dB (1/m)	dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber)	cable loss 2 (High Pass)	cable loss 3 (pre-amp)	cable loss 4 (inside chamber)	cable loss 5 (outside chamber)	cable loss 6 (to receiver)
dB	dB	dB	dB	dB	dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

Sample calculation

$$E (\text{dB } \mu\text{V/m}) = U (\text{dB } \mu\text{V}) + AF (\text{dB } 1/\text{m}) + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

7.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency	AF EMCO 3160-09	Corr.
MHz	dB (1/m)	dB
18000	40.2	-23.5
18500	40.2	-23.2
19000	40.2	-22.0
19500	40.3	-21.3
20000	40.3	-20.3
20500	40.3	-19.9
21000	40.3	-19.1
21500	40.3	-19.1
22000	40.3	-18.7
22500	40.4	-19.0
23000	40.4	-19.5
23500	40.4	-19.3
24000	40.4	-19.8
24500	40.4	-19.5
25000	40.4	-19.3
25500	40.5	-20.4
26000	40.5	-21.3
26500	40.5	-21.1

cable loss 1 (inside chamber)	cable loss 2 (pre- amp)	cable loss 3 (inside chamber)	cable loss 4 (switch unit)	cable loss 5 (to receiver)
dB	dB	dB	dB	dB
0.72	-35.85	6.20	2.81	2.65
0.69	-35.71	6.46	2.76	2.59
0.76	-35.44	6.69	3.15	2.79
0.74	-35.07	7.04	3.11	2.91
0.72	-34.49	7.30	3.07	3.05
0.78	-34.46	7.48	3.12	3.15
0.87	-34.07	7.61	3.20	3.33
0.90	-33.96	7.47	3.28	3.19
0.89	-33.57	7.34	3.35	3.28
0.87	-33.66	7.06	3.75	2.94
0.88	-33.75	6.92	3.77	2.70
0.90	-33.35	6.99	3.52	2.66
0.88	-33.99	6.88	3.88	2.58
0.91	-33.89	7.01	3.93	2.51
0.88	-33.00	6.72	3.96	2.14
0.89	-34.07	6.90	3.66	2.22
0.86	-35.11	7.02	3.69	2.28
0.90	-35.20	7.15	3.91	2.36

Sample calculation

$$E (\text{dB } \mu\text{V/m}) = U (\text{dB } \mu\text{V}) + AF (\text{dB } 1/\text{m}) + Corr. (\text{dB})$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

7.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

Frequency	AF EMCO 3160-10	Corr.
GHz	dB (1/m)	dB
26.5	43.4	-11.2
27.0	43.4	-11.2
28.0	43.4	-11.1
29.0	43.5	-11.0
30.0	43.5	-10.9
31.0	43.5	-10.8
32.0	43.5	-10.7
33.0	43.6	-10.7
34.0	43.6	-10.6
35.0	43.6	-10.5
36.0	43.6	-10.4
37.0	43.7	-10.3
38.0	43.7	-10.2
39.0	43.7	-10.2
40.0	43.8	-10.1

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/ decade)	d _{limit} (meas. distance (limit)	d _{used} (meas. distance (used)
dB	dB	dB	dB	dB	m	m
4.4				-9.5	3	1.0
4.4				-9.5	3	1.0
4.5				-9.5	3	1.0
4.6				-9.5	3	1.0
4.7				-9.5	3	1.0
4.7				-9.5	3	1.0
4.8				-9.5	3	1.0
4.9				-9.5	3	1.0
5.0				-9.5	3	1.0
5.1				-9.5	3	1.0
5.1				-9.5	3	1.0
5.2				-9.5	3	1.0
5.3				-9.5	3	1.0
5.4				-9.5	3	1.0
5.5				-9.5	3	1.0

Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB } 1/\text{m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

distance correction = $-20 * \text{LOG} (d_{\text{limit}}/ d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.


8 PHOTO REPORT

Please see separate photo report.

9 MEASUREMENT UNCERTAINTIES

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor) $k = 1.96$. This means, that the true value is in the corresponding interval with a probability of 95 %.

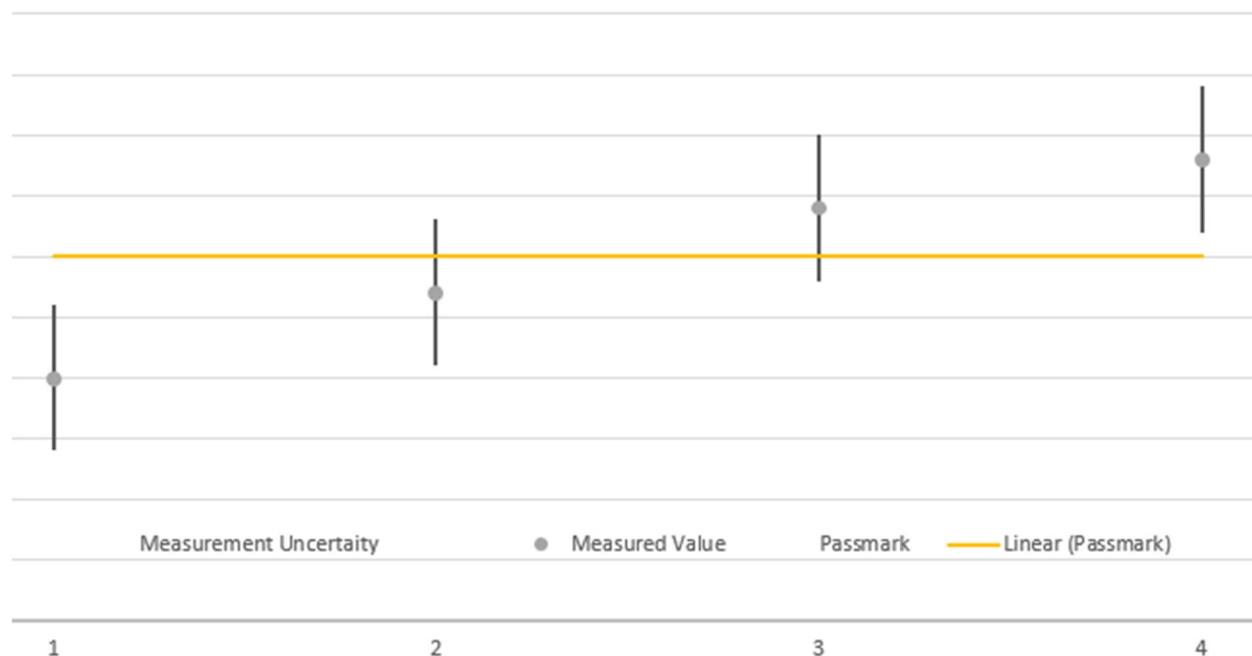

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so called shared risk principle.