

Korea Technology Institute Co., Ltd.

Page 1 of 13

Test Report

	_					
Test Report No.:	KTI06EF01001					
Registration No.:	99058					
Applicant:	Axxen Co., Ltd.					
Applicant Address:	608-2, Yeoksam-dong, Kanç	ınam-Gu, Seoul, Ko	rea			
Product:	USB MEMORY STICK					
FCC ID:	TXMXUS10	Model No.	XUS10			
Receipt No.:	05-1215	Date of receipt:	December 15, 2005			
Date of Issue:	January 02, 2006					
Testing location	Korea Technology Institute Co., Ltd.					
Testing location	51-19, Sanglim3-Ri, Docheok-Myeun, Gwangju-Shi, Gyeungki					
Test Standards:	FCC/ANSI. C63.4: 2003	FCC/ANSI. C63.4: 2003				
Rule Parts: FCC	Part 15, Class B					
Equipment Class:	Computing Device Peripher	Computing Device Peripheral				
Test Result:	The above-mentioned produced	uct has been tested	with compliance.			
Tested by:	Y. M. Lee	Approved by: G. C. Min				
·	/ Engineer		/President			
Youn	y Moon	G	Chlin			
Signature	Date	Signature	e Date			
Other Aspects:						
Abbreviations:	* OK, Pass=passed * Fail=	failed * N/A=not	applicable			

- This test report is not permitted to copy partly without our permission.
 - This test result is dependent on only equipment to be used.
 - This test result is based on a single evaluation of one sample of the above mentioned.
 - This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S Government.
 - We certify this test report has been based on the measurement standards that is traceable to the national or international standards.

	Kor	ea Technology Institute Co.,	Ltd. Page 2 of 13			
>>> Contents ««						
	Contents		2			
	List of Ta	bles	2			
	List of Fig	gures	2			
	List of Ph	otographs	2			
1.	General		3			
2.	Test Site		3			
	2.1 Locati	ion	3			
	2.2 List of	f Test and Measurement Instruments	4			
	2.3 Test D	Pata	4			
	2.4 Test E	invironment	4			
3.	Description	on of the tested samples	5			
	3.1 Rating	g and Physical characteristics	5			
	3.2 Subm	itted documents	5			
4.	Measuren	nent conditions	6			
	4.1 Modes	s of operation	6			
	4.2 List of	f peripherals	6			
	4.3 Uncer	tainty	6			
	4.4 Test S	7				
5.	Emission	Test	8			
	5.1 Condu	ucted Emissions	8			
	5.2 Radia	ted Emissions	12			
6.	Photogra	phs of the Test Set-up	14			
Annex1	Label		16			
Annex2	Photogra	phs of EUT	18~29			
≫ List	t of Tables	S				
Table	e 1	List of test and measurement equipment	4			
Table	e 2	Test Data. Conducted Emissions	11			
Table	e 3	Test Data. Radiated Emissions	13			
≫ List	t of Figure	es				
Figu	Figure 1 Spectral Diagram, LINE-PE					
Figu	re 2	Spectral Diagram, Neutral-PE	10			
≫ List	t of Photo	ographs				
Phot	tograph 1	Setup for Radiated Emissions	14			
Phot	tograph 2	Setup for Conducted Emissions	15			



Korea Technology Institute Co., Ltd.

Page 3 of 13

1. General

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. Korea Technology Institute Co., Ltd. performed all measurements reported herein. And were made under Chief Engineer's supervisor.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. Test Site

Korea Technology Institute Co., Ltd.

2.1 Location

51-19, Sanglim3-Ri, Docheok-Myeun, Gwangju-Shi, Gyeungki-Do, Korea

The Test Site is in compliance with ANSI C63.4/2003 for measurement of radio Interference.



Korea Technology Institute Co., Ltd.

Page 4 of 13

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

- Conducted Emissions

Kind of Equipment	Type	S/N	Calibrated until	
Spectrum Analyzer	R3261C	61720417	01.2006	
Field Strength Meter	ESIB40	100093	04.2006	
LISN	KNW407	8-1157-2	01.2006	
LISN	EM-7823	115019	04.2006	
Conducted Cable	N/A	N/A	11.2006	

- Radiated Emissions

Kind of Equipment	Type	S/N	Calibrated until
Field Strength Meter	ESPC	832827/011	06.2006
Spectrum Analyzer	R3261C	61720417	01.2006
Pre Amplifier	8447D	2944A06874	11.2006
Biconical Antenna	VHA9103	1111	01.2006
Logperiodic Antenna	UHALP9107	1568	01.2006
Horn Antenna	3115	6443	07.2006
Open Site Cable	N/A	N/A	11.2006
Antenna Mast	DETT-03	N/A	N/A
Antenna & Turntable controller	DETT-04	91X519	N/A

2.3 Test Date

Date of Application: December 15, 2005

Date of Test: December 29, 2005

2.4 Test Environment

See each test item's description.



Korea Technology Institute Co., Ltd. Page 5 of 13

3. Description of the tested samples

The EUT is a MP3 Player.

3.1. Rating and Physical Characteristics

Capacity	128MB, 256MB, 512MB, 1GB				
Interface	USB 1.1 / USB 2.0				
Power Supply	USB BUS POWER (4.5 ~ 5.5V)				
LED Represent	Blue Color LED — Connect / Stand by Status Blue Color LED (Blinking) — Transmitting / Receiving Data				
Demensions	40mm * 14mm * 7mm				
OS Support	- Windows 98, 98 SE, ME, 2000, XP or Later - Linux OS 2.4 - Macintosh OS 9.0 or Later				
Access Speed	- Read : 8MB / Sec - Write : 7MB / Sec				
Color	- Black & Nickel Silver - Blue & Nickel Silver - White & Nickel Silver / A Variety of color				

3.2 Submitted Documents

- User's Guide
- Block Diagram



Korea Technology Institute Co., Ltd.

Page 6 of 13

4. Measurement Conditions

Testing Input Voltage: AC 220V

USB BUS POWER (4.5 ~ 5.5V)

4.1 Modes of Operation

The EUT was in the following operation mode during all testing;

1) File transfer each disk.

4.2 Additional Equipment

DEVICE TYPE	Manufacturer	M/N	S/N	FCC ID
PC	COMPAQ COMPUTER	EvoD5M	6F28KN8ZH110	DOC
PC	CORPORATION	EVODSINI	6F28KN8ZH110 D	БОС
Monitor	HEWLETT PACKARD	Pavilion vf17	CNC5040351	DOC
Keyboard	COMPAQ COMPUTER	SDM4700P	B58A20CLPNLOLZ	DOC
	CORPORATION	3DIVI4700P	B30AZUCLPNLOLZ	ВОС
Mouse	logitech	M-S69	3892D101	DOC
Mouse	SEJIN ELECTRON INC.	SMB-400	0CIM004047	GJJS965M3
Printer	HEWLETT PACKARD	C4569A	SG6A7160PJ	DOC

4.3 Uncertainty

1) Radiated disturbance

Uc (Combined standard Uncertainty) = \pm 1.8dB

Expanded uncertainty U=KUc

K = 2

 \therefore U = \pm 3.6dB

2) Conducted disturbance


 $Uc = \pm 0.88dB$

 $U = KUc = 2 \times Uc = \pm 1.8dB$



Korea Technology Institute Co., Ltd. Page 7 of 13

4.4 Test Setup

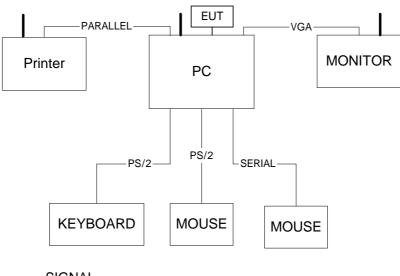

— SIGNAL

----- POWER



Korea Technology Institute Co., Ltd.

Page 8 of 13

5. EMISSION Test

5.1.Conducted Emissions

Result: Pass

The line-conducted facility is located inside a 2.3M x 3.5M x 5.5M shielded closure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 605-05. A 1m x 1.5m wooden table 80cm high is placed 80cm away from the conducting ground plane and 40cm away from the sidewall of the shielded room. Electro-Metroics Model EM-7823 (9kHz-30MHz)50ohm/50 uH Line-Impedance Stabilization Networks (LISN) are bonded to the shielded room.

The EUT is powered from the Electro-Metroics LISN and the support equipment is powered from the Kyoritsu LISN. Power to the LISN are filtered by a high-current high-insertion loss shield enclosures power line filters (100dB 14kHz-1GHz).

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure.

All electrical cables are shielded by copper pipe with inner diameter of 1".

If the EUT is a DC-Powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the Rohde & Schwarz LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, Support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was reexamined using EMI field Intensity meter (ESPC). The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10kHZ. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; if applicable; whichever determined the worst-case emission.


Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.



Korea Technology Institute Co., Ltd. Page 9 of 13


Figure 1: Spectral Diagram, LINE-PE

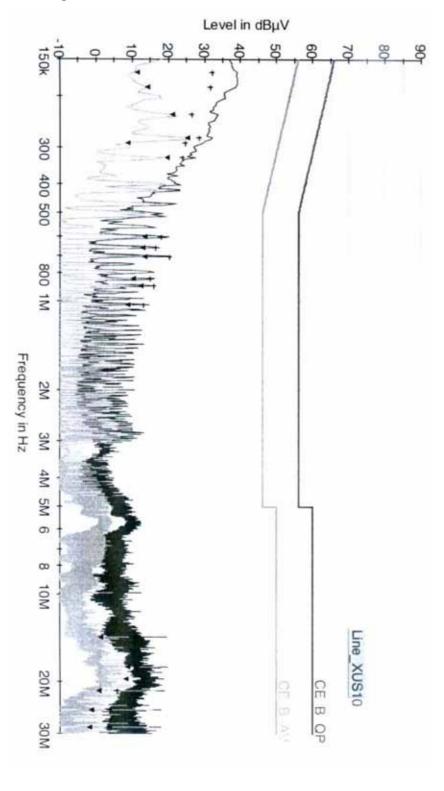



Korea Technology Institute Co., Ltd. Page 10 of 13

Figure 2: Spectral Diagram, NEUTRAL-PE

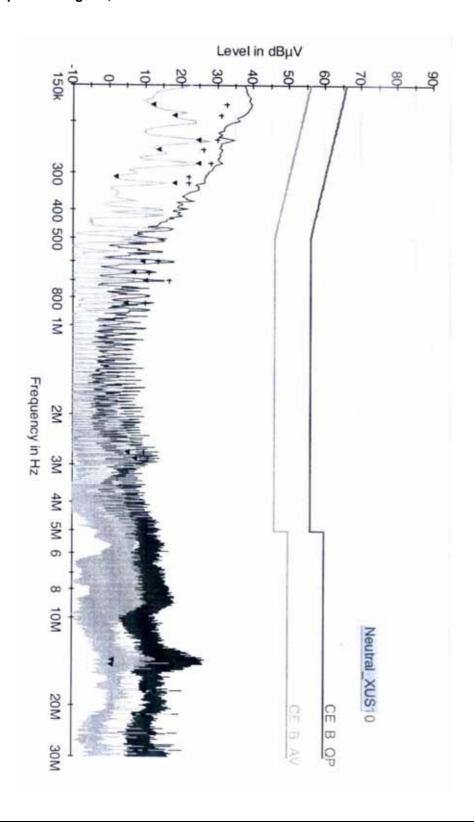



Korea Technology Institute Co., Ltd.

Page 11 of 13

Table 2: Test Data, Conducted Emissions

Frequency (MHz)	(1) Reading (dBμV)	Line	(2)C/F (dB)	(3)Actual (dBµV)	(4) Limit (dBμV)	(5) Margin (dB)
0.17	32.80	L2	0.17	32.97	64.96	31.99
0.19	31.70	L1	0.17	31.87	64.04	32.17
0.23	30.20	L2	0.17	30.37	62.45	32.08
0.25	26.30	L2	0.17	26.47	61.76	35.29
0.28	28.60	L1	0.17	28.77	60.82	32.05
0.29	24.80	L1	0.17	24.97	60.52	35.55

NOTES:

- All modes of operation were investigated
 And the worst-case emissions are reported.
- 2. All other emissions are non-significant.
- 3. All readings are calibrated by self-mode in receiver.
- 4. Measurements using CISPR Quasi-peak mode.
- 5. L1 = LINE-PE, L2 = NEUTRAL-PE
- 6. C/F = Correction Factor(LISN factor + Cable loss)
- 7. The limit for Class B digital device is 66dBuV to 56dBuV from 150KHz to 500KHz, 56dBuV from 500KHz to 5MHz, 60dBuV Above 5MHz.

▲ Margin Calculation



Korea Technology Institute Co., Ltd. Page 12 of 13

5.2 Radiated Emissions

Result: Pass

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband Amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and Investigated. The system configurations, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 1GHz using Biconical Antenna and LogPeriodic Antenna. Above 1GHz, Double ridged horn Antenna was used.

Final measurements were made outdoors at 3-meter test range using Schwarzbeck antennas. The test equipment was placed on a wooden table situated on a 4x4 meter area adjacent to the measurement area. Turntable was to protect from weather in the dome that made with Polyethylene film. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter (ESIB40). The detector function was set to CISPR quasi-peak or peak mode as appropriate and the bandwidth of the receiver was set to 120kHz or 1 MHz depending on the frequency or type or signal.

The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8meter high non-metallic 1 x 1.5 meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna and rotating the EUT in turns with three orthogonal axes for portable devices, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test. Each EME reported was calibrated using self-calibrating mode.



Korea Technology Institute Co., Ltd.

Page 13 of 13

Table 3: Test Data, Radiated Emissions

Frequency (MHz)	Pol.	Height [m]	Angle [°]	(1) Reading (dBμV)	(2) AFCL (dB/m)	(3) Actual (dΒμV/m)	(4) Limit (dΒμV/m)	(5) Margin (dB)
49.20	V	1.03	315	12.3	12.80	25.10	40.0	14.90
186.16	V	1.15	328	6.2	18.62	24.82	43.5	18.68
215.28	Н	3.78	117	3.4	19.34	23.81	43.5	19.69
283.68	V	1.27	306	8.3	22.00	30.30	46.0	15.70
501.16	V	2.02	332	9.1	23.62	32.72	46.0	13.28
797.20	Н	3.89	94	2.7	30.28	32.98	46.0	13.02

Table. Radiated Measurements at 3-meters

Notes: 1.All modes of operation were investigated.

And the worst-case emission are reported.

- 2.All other emission is non-significant.
- 3.All readings are calibrated by self-mode in receiver.
- 4. Measurements using CISPR quasi-peak mode.
- 5.AFCL = Antenna factor and cable loss
- 6.H = Horizontal, V = Vertical Polarization
- 7. The limit for Class B digital device is 100uV(40dBuV) from 30MHz to 88MHz, 150 uV (43.5dBuV) from 88MHz to 216MHz, 200uV(46dBuV) from 216MHz to 960MHz and 500 uV (54dBuV) from above 960MHz.
- **♠** Margin Calculation
- (5) Margin = (4) Limit (3) Actual

[(3) Actual = (1) Reading + (2) AFCL]