


FCC PART 15.227  
EMI MEASUREMENT AND TEST REPORT  
For  
**HEDWORTH LIMITED**

UNIT 7B, 2/F., TOWER 1 HARBOUR CENTRE, 1 HOK CHEUNG STREET, HUNG HOM,  
KOWLOON, Hong Kong

**FCC ID: TYGHS-1201-2**

February 14, 2006

<b>This Report Concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Equipment Type:</b> Transmitter, Optical Mouse
<b>Test Engineer:</b> <u>Merry Zhao</u> 	
<b>Report No.:</b> <u>RSZ06011701</u>	
<b>Test Date:</b> <u>January 20, 2006</u>	
<b>Reviewed By:</b> <u>Chris Zeng</u> 	
<b>Prepared By:</b> Bay Area Compliance Lab Corp. (ShenZhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, Guangdong 518038, P.R.China Tel: +86-755-33320018 Fax: +86-755-33320008	

**Note:** The test report is specially limited to the above company and this particular sample only.  
It may not be duplicated without prior written consent of Bay Area Compliance Lab Corp.  
(ShenZhen). This report **must not** be used by the client to claim product certification,  
approval, or endorsement by NVLAP, NIST or any agency of the US Government.

**TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
TEST FACILITY .....	3
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>4</b>
JUSTIFICATION .....	4
EUT EXERCISE SOFTWARE .....	4
SPECIAL ACCESSORIES.....	4
EQUIPMENT MODIFICATIONS .....	4
CONFIGURATION OF TEST SETUP .....	5
BLOCK DIAGRAM OF TEST SETUP .....	5
<b>SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>§15.203 - ANTENNA REQUIREMENT.....</b>	<b>7</b>
STANDARD APPLICABLE .....	7
<b>§15.205, §15.209, §15.227(A) - RADIATED EMISSIONS TEST .....</b>	<b>8</b>
MEASUREMENT UNCERTAINTY .....	8
EUT SETUP.....	8
EMI TEST RECEIVER SETUP .....	8
TEST EQUIPMENT LIST AND DETAILS.....	8
TEST PROCEDURE .....	8
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	9
TEST RESULTS SUMMARY .....	9
TEST DATA .....	9
<b>§15.227(B) - OUT OF BAND EMISSION .....</b>	<b>12</b>
EMI TEST RECEIVER SETUP .....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE .....	12
TEST DATA .....	12

## GENERAL INFORMATION

### Product Description for Equipment Under Test (EUT)

The *HEDWORTH LIMITED*'s product, model number: HS-1201/2 or the "EUT" as referred to in this report is a Transmitter of Optical Mouse. The EUT is measured approximately 8.5cm L x 5.0cm W x 3.0cm H. rated input voltage: DC 3 V battery.

*\* The test data gathered are from production sample, serial number: 0601040, provided by the manufacturer.*

### Objective

This Type approval report is prepared on behalf of *HEDWORTH LIMITED* in accordance with Part 2, Subpart J, and Part 15, Subparts A , B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules, sec 15.203, 15.205, 15.209 and sec 15.227.

### Related Submittal(s)/Grant(s)

No Related Submittals.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Test site used by Bay Area Compliance Lab Corp. (ShenZhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, Guangdong 518038, P.R.China.

Test site at Bay Area Compliance Lab Corp. (ShenZhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Lab Corp. (ShenZhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2007070.htm>.

---

## SYSTEM TEST CONFIGURATION

---

### **Justification**

The system was configured for testing in a typical fashion (as normally used by a typical user).

### **EUT Exercise Software**

N/A.

### **Special Accessories**

N/A.

### **Equipment Modifications**


Bay Area Compliance Lab Corp. (ShenZhen) has not done any modification on the EUT.

## Configuration of Test Setup



EUT

## Block Diagram of Test Setup

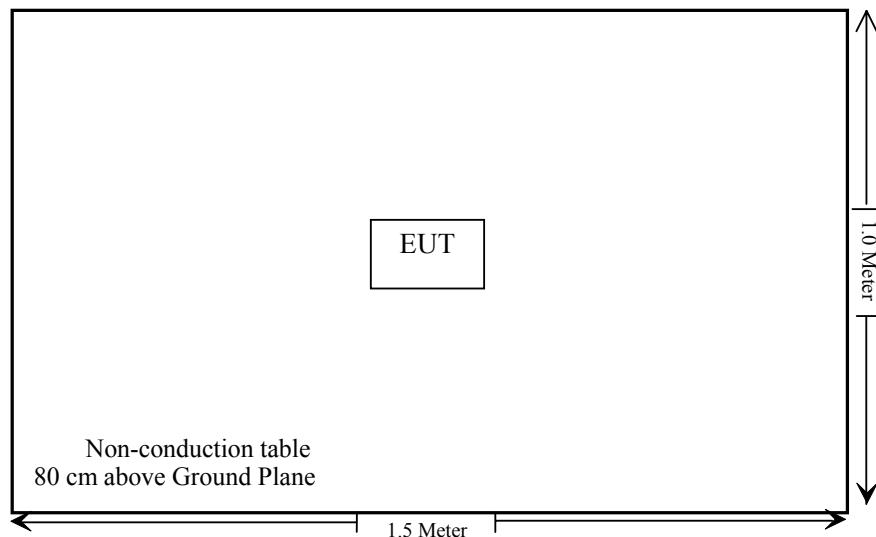

**SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna requirement	Compliant
§15.205	Restricted Band of operation	Compliant
§15.209	Radiated Emission Test	Compliant
§15.227(a)	Field Strength	Compliant
§15.227(b)	Out of Band Emission	Compliant

## **§15.203 - ANTENNA REQUIREMENT**

### **Standard Applicable**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a permanent antenna, fulfill the requirement of this section.

Test Result: Pass

## §15.205, §15.209, §15.227(a) - RADIATED EMISSIONS TEST

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Lab Corp. (ShenZhen) is  $\pm 4.0$  dB.

### EUT Setup

The radiated emission tests were performed in the chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15 Subpart C section 15.227 limits.

### EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated from 27 to 1000 MHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency	RB/W	VB/W	IF B/W
9 kHz-30 MHz	10 kHz	30 kHz	9 kHz
30 MHz-1 GHz	100 kHz	300 kHz	120 kHz

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2005-8-17	2006-8-17
HP	Amplifier	HP8447E	1937A01046	2005-8-17	2006-8-17
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2005-4-28	2006-4-28
ETS	Passive Loop Antenna	6512	00029604	2005-4-26	2006-4-26

\* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.227 & 15.209, with the worst margin reading of:

**-3.50 dB at 919.4690 MHz** in the **Horizontal** polarization.

## Test Data

### Environmental Conditions


Temperature:	22° C
Relative Humidity:	58%
ATM Pressure:	1016mbar

*Testing was performed by Merry Zhao on 2006-1-20.*

*Test Mode: Transmitting*

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC PART 15.227&15.209		
Frequency MHz	Meter Reading dB $\mu$ V/m		Angle Degree	Height Meter	Polar H/V	Antenna Loss dB	Cable Loss dB	Amplifier Gain dB	Corr. Ampl. dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
919.4690	42.78	60	1.2	H	22.80	3.63	26.71	42.50	46.00	-3.50*	PK(Harmonic)
143.6500	47.90	180	1.2	H	13.80	1.87	27.00	36.57	43.50	-6.93	PK(Spurious)
81.1300	49.15	45	1.2	H	8.40	0.81	26.87	31.49	40.00	-8.51	PK(Harmonic)
33.2580	31.77	45	1.2	V	24.10	0.37	27.02	29.22	40.00	-10.78	PK(Spurious)
54.0864	46.71	60	1.0	H	8.50	0.36	26.96	28.61	40.00	-11.39	PK(Harmonic)
151.7400	43.50	0	1.0	V	13.10	1.66	26.90	31.36	43.50	-12.14	PK(Spurious)
270.4320	43.44	45	1.0	H	12.60	2.39	26.28	32.15	46.00	-13.85	PK(Harmonic)
297.4750	39.29	45	1.0	H	13.80	2.61	26.48	29.22	46.00	-16.78	PK(Harmonic)
54.0864	37.38	90	1.2	V	8.50	0.36	26.96	19.28	40.00	-20.72	PK(Harmonic)
81.1300	36.86	180	1.2	V	8.40	0.81	26.87	19.20	40.00	-20.80	PK(Harmonic)
919.4690	24.65	45	1.2	V	22.80	3.63	26.71	24.37	46.00	-21.63	PK(Harmonic)
297.4750	30.37	35	3.8	V	13.80	2.61	26.48	20.30	46.00	-25.70	PK(Harmonic)
27.0432	48.15	289	1.0	H	24.10	0.37	27.02	45.60	80.00	-34.40	AV(Fundamental)
27.0432	40.15	35	3.8	V	24.10	0.37	27.02	37.60	80.00	-42.40	AV(Fundamental)
27.0432	49.88	289	1.0	H	24.10	0.37	27.02	47.33	100.00	-52.67	PK(Fundamental)
27.0432	41.01	35	3.8	V	24.10	0.37	27.02	38.46	100.00	-61.54	PK(Fundamental)


\* Within measurement uncertainty.

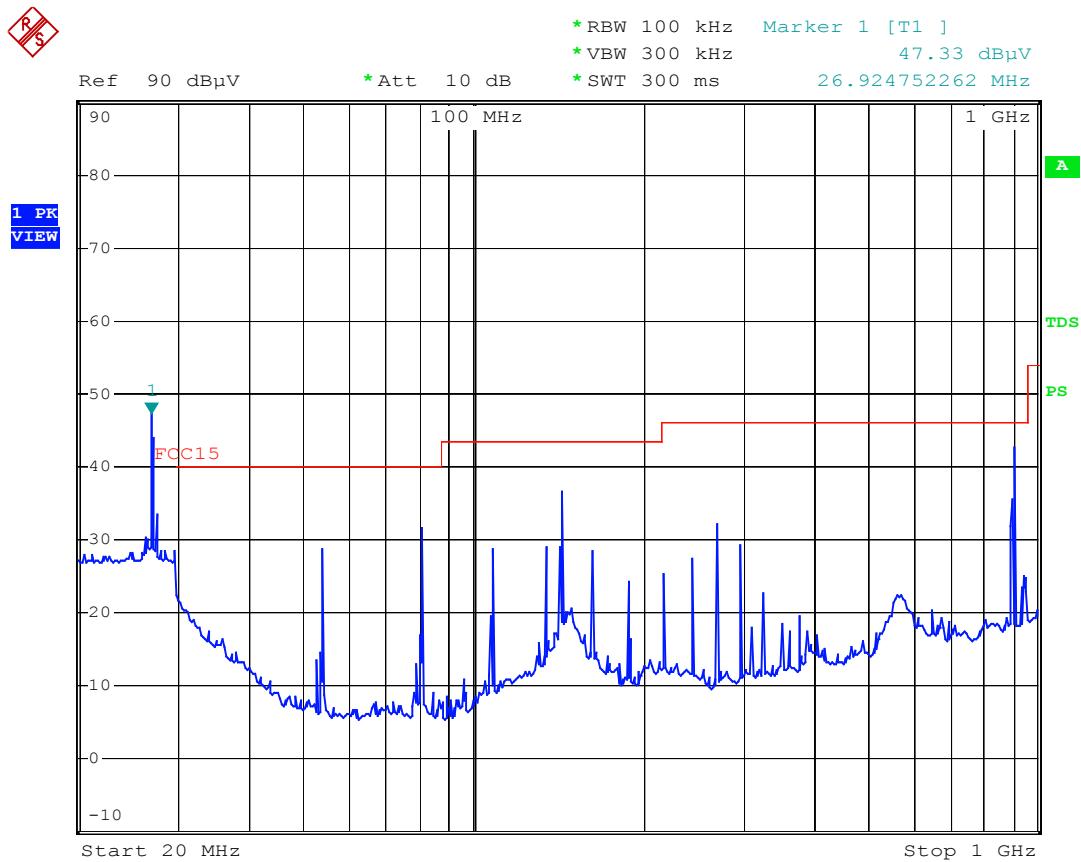

HEDWORTH OPTICAL MOUSE HS-1201/2 RADIATION EMISSION HORIZON

AL

Date: 20.JAN.2006 15:55:48

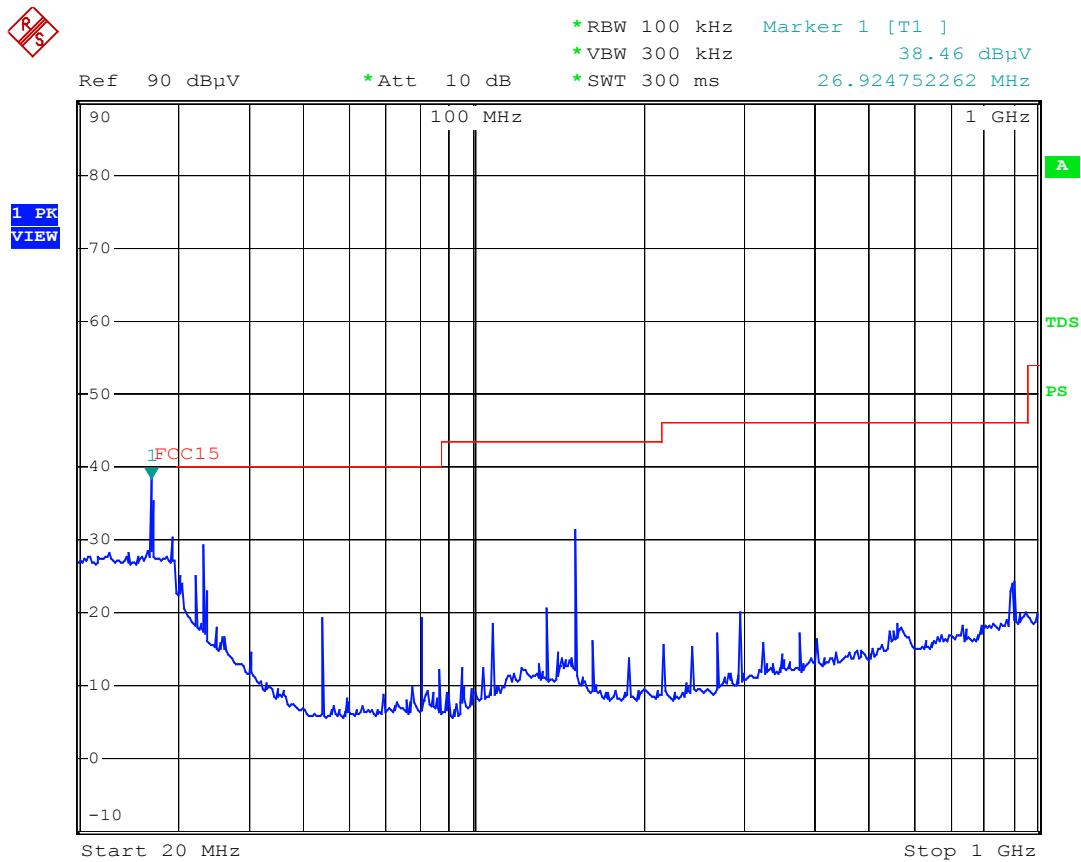

HEDWORTH OPTICAL MOUSE HS-1201/2 RADIATION EMISSION VERTICA

L

Date: 20.JAN.2006 16:03:47

## §15.227(b) - Out of Band Emission

### EMI Test Receiver Setup

The system was investigated from 26.8 MHz to 27.3 MHz.

During the out of band emission test, the EMI test receiver was set with the following configurations:

Frequency	RB/W	VB/W	SWT
26.8 MHz-27.3 MHz	10 kHz	30 kHz	Auto

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2005-8-17	2006-8-17
HP	Amplifier	HP8447E	1937A01046	2005-8-17	2006-8-17
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2005-4-28	2006-4-28
ETS	Passive Loop Antenna	6512	00029604	2005-4-26	2006-4-26

\* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Procedure

Reading the emission of 26.96 MHz and 27.28 MHz to ensure that the EUT complied with the FCC PART 15.227.

All data was recorded in the Peak detection mode.

### Test Data

#### Environmental Conditions

Temperature:	22° C
Relative Humidity:	58%
ATM Pressure:	1016mbar


Testing was performed by Merry Zhao on 2006-1-20.

Test Mode: Transmitting

The result has been complied with the 15.227(b), see the following plot:

Frequency MHz	Emission dB $\mu$ V/m	Limit dB $\mu$ V/m
26.96	14.89	40
27.28	14.00	40

Test Result: Pass

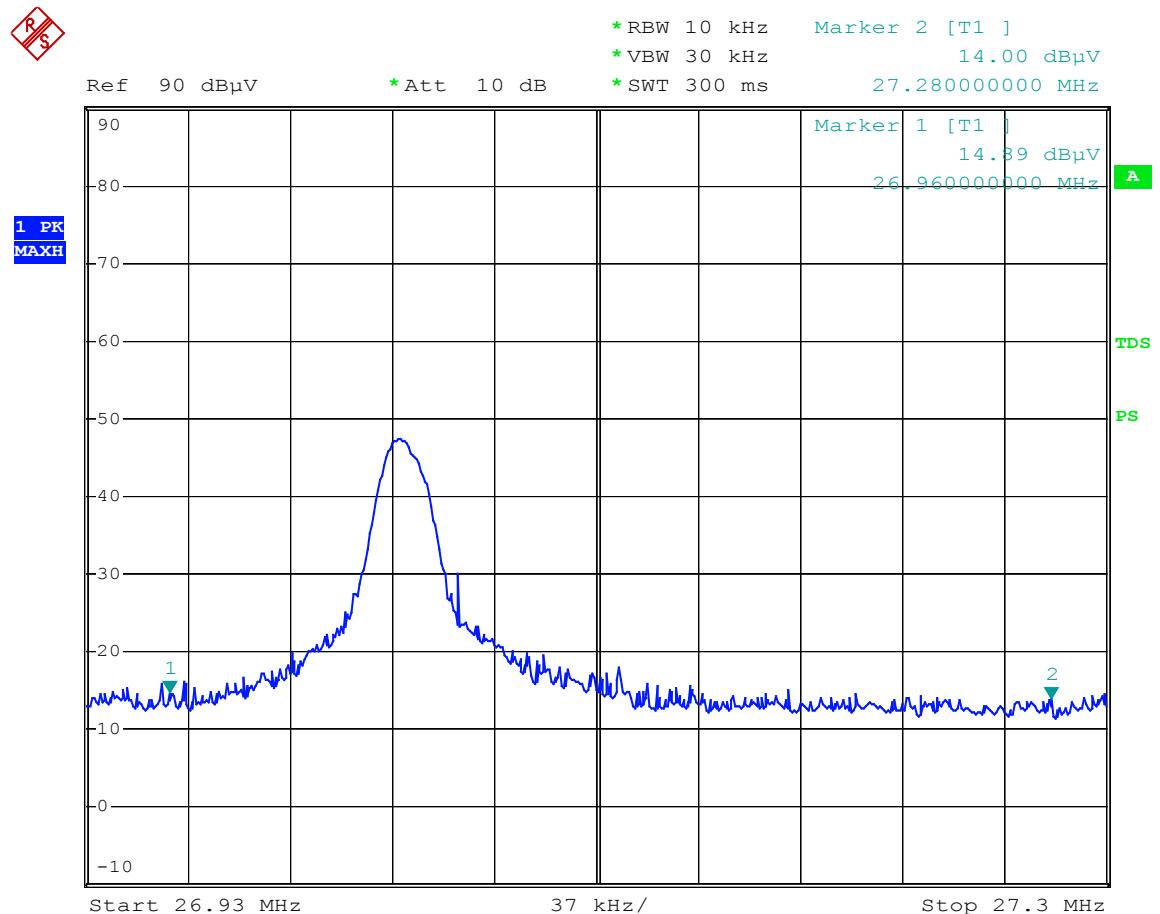

HEDWORTH OPTICAL MOUSE HS-1201/2 OUTOF BAND EMISSION

Date: 20.JAN.2006 16:56:45