

# FCC TEST REPORT

For

**Z-Wave 700s Table Top Sensor**

**Model Number: ZW6307, ZW6307A, ZW6307B, ZW6307C**

**FCC ID: U2ZZW6307**

**Report Number : WT208001515**

|                 |   |  |
|-----------------|---|--|
| Test Laboratory | : | Shenzhen Academy of Metrology and Quality Inspection           |
| Site Location   | : | NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China |
| Tel             | : | 0086-755-86928965  |
| Fax             | : | 0086-755-86009898-31396  |
| Web             | : | <a href="http://www.smq.com.cn">www.smq.com.cn</a>             |
| Email           | : | <a href="mailto:emcrf@smq.com.cn">emcrf@smq.com.cn</a>         |

## Test report declaration

Applicant : Sheenway Asia Ltd.  
Address : Room1313, 13/F, Austin Tower, 22-26 Austin Avenue, Tsim Sha Tsui, Kowloon, Hong Kong, China  
Manufacturer : Sheenway Asia Ltd.  
Address : Room1313, 13/F, Austin Tower, 22-26 Austin Avenue, Tsim Sha Tsui, Kowloon, Hong Kong, China  
EUT Description : Z-Wave 700s Table Top Sensor  
Model No. : ZW6307, ZW6307A, ZW6307B, ZW6307C  
FCC ID : U2ZZW6307


### Test Standards:


**FCC Part 15 (October 1, 2019 Edition)  
ANSI C63.10-2013**

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 15.249.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer:  Date: Oct.14, 2020  
(Zhou Fangai)

Checked by:  Date: Oct.14, 2020  
(Lin Yixiang)

Approved by:  Date: Oct.14, 2020  
(Lin Bin)

## TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>TEST REPORT DECLARATION.....</b>                              | <b>2</b>  |
| 1. <b>TEST RESULTS SUMMARY.....</b>                              | <b>4</b>  |
| 2. <b>GENERAL INFORMATION.....</b>                               | <b>5</b>  |
| 2.1. Report information.....                                     | 5         |
| 2.2. Laboratory Accreditation and Relationship to Customer ..... | 5         |
| 2.3. Measurement Uncertainty .....                               | 6         |
| 3. <b>PRODUCT DESCRIPTION.....</b>                               | <b>7</b>  |
| 3.1. EUT Description .....                                       | 7         |
| 3.2. Block Diagram of EUT Configuration .....                    | 7         |
| 3.3. Operating Condition of EUT .....                            | 7         |
| 3.4. Special Accessories .....                                   | 7         |
| 3.5. Equipment Modifications .....                               | 7         |
| 3.6. Support Equipment List.....                                 | 7         |
| 3.7. Test Conditions .....                                       | 8         |
| 4. <b>TEST EQUIPMENT USED.....</b>                               | <b>9</b>  |
| 5. <b>CONDUCTED EMISSION TEST.....</b>                           | <b>10</b> |
| 5.1. Test Standard and Limit .....                               | 10        |
| 5.2. Test Procedure.....   | 10        |
| 5.3. Test Arrangement .....                                      | 10        |
| 5.4. Test Data.....  | 10        |
| 6. <b>RADIATED EMISSION TEST .....</b>                           | <b>13</b> |
| 6.1. Test Standard and Limit .....                               | 13        |
| 6.2. Test Procedure.....   | 13        |
| 6.3. Test Arrangement .....                                      | 13        |
| 6.4. Test Data.....  | 14        |
| 7. <b>OCCUPIED BANDWIDTH .....</b>                               | <b>21</b> |
| 7.1. Test Standard and Limit .....                               | 21        |
| 7.2. Test Procedure.....   | 21        |
| 7.3. Test Arrangement .....                                      | 21        |
| 7.4. Test Data.....  | 21        |
| 8. <b>BAND EDGE.....</b>   | <b>23</b> |
| 8.1. Test Standard and Limit .....                               | 23        |
| 8.2. Band Edge FCC 15.249(d) Limit .....                         | 23        |
| 8.3. Test Procedure.....   | 23        |
| 8.4. Test Arrangement .....                                      | 23        |
| 8.5. Test Data.....  | 23        |
| 9. <b>ANTENNA REQUIREMENT .....</b>                              | <b>25</b> |

## 1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

| Test Items          | FCC Rules | Test Results |
|---------------------|-----------|--------------|
| Conducted Emission  | 15.207    | Pass         |
| Radiated Emission   | 15.249    | Pass         |
| Occupied Bandwidth  | 15.215    | Pass         |
| Band Edges          | 15.249    | Pass         |
| Antenna Requirement | 15.203    | Pass         |

Remark: "N/A" means "Not applicable."

## 2. GENERAL INFORMATION

### 2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting for false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacturer.

### 2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

### **2.3. Measurement Uncertainty**

Conducted Emission

9 kHz~150 kHz 3.7dB

150 kHz~30MHz 3.3dB

Radiated Emission

30MHz~1000MHz 4.3dB

1GHz~6GHz 4.6 dB

6GHz~18GHz 5.1dB


### 3. PRODUCT DESCRIPTION

#### 3.1. EUT Description

|                     |                                     |
|---------------------|-------------------------------------|
| Description         | : Z-Wave 700s Table Top Sensor      |
| Manufacturer        | : Sheenway Asia Ltd.                |
| Model Number        | : ZW6307, ZW6307A, ZW6307B, ZW6307C |
| Rated Input         | : Battery: DC 3V, USB: DC5V         |
| Power supply        | : AC 120V/60Hz                      |
| Operate Frequency   | : 908.4MHz, 916MHz                  |
| Modulation          | : 908.4MHz: FSK, 916MHz: GFSK       |
| Antenna Designation | : Monopole Antenna                  |

Remark: Comparing with ZW6307C, ZW6307 removes the temperature sensing component to reduce the temperature sensing function; Removes the luminosity sensing component to reduce the luminosity sensing function; Removes the humidity sensing component to reduce the humidity sensing function. Comparing with ZW6307C, ZW6307A removes the luminosity sensing component to reduce the luminosity sensing function; Removes the humidity sensing component to reduce the humidity sensing function. Comparing with ZW6307C, ZW6307B removes the humidity sensing component to reduce the humidity sensing function. The others circuit theory, electrical design and the critical components are exactly the same. The differences do not affect the RF performance. All the tests were performed on model ZW6307C.

#### 3.2. Block Diagram of EUT Configuration

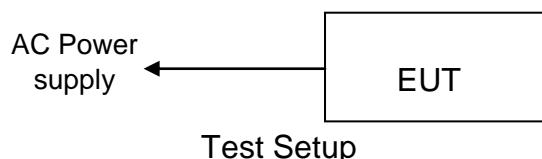

#### 3.3. Operating Condition of EUT

- Test Mode 1: Transmitting at 908.4MHz
- Test Mode 2: Transmitting at 916MHz

#### 3.4. Special Accessories

Not available for this EUT intended for grant.

#### 3.5. Equipment Modifications

Not available for this EUT intended for grant.

#### 3.6. Support Equipment List

**Table 2 Support Equipment List**

| Name       | Model No | S/N | Manufacturer |
|------------|----------|-----|--------------|
| AC adaptor | A8001    | --  | --           |

### **3.7. Test Conditions**

Date of test: Aug.06, 2020 – Aug.25, 2020

Date of EUT Receive: Jul.30, 2020

Temperature: (23-25) °C

Relative Humidity: (49-52) %

#### 4. TEST EQUIPMENT USED

Table 3 Test Equipment

| No.       | Equipment         | Manufacturer | Model No. | Last Cal.    | Cal. Interval |
|-----------|-------------------|--------------|-----------|--------------|---------------|
| SB9058/05 | Test Receiver     | R&S          | ESCI 3    | Sep.27,2019  | 1 Year        |
| SB4357    | AMN               | R&S          | ENN216    | Aug.27,2019  | 1 Year        |
| SB3436    | Test Receiver     | R&S          | ESI26     | Nov.07,2019  | 1 Year        |
| SB3955    | Broadband Antenna | Schwarzbeck  | VULB9163  | Jan.10,2020  | 1 Year        |
| SB8501/09 | Test Receiver     | R&S          | ESU40     | Feb.14,2020  | 1 Year        |
| SB3435    | Horn Antenna      | R&S          | HF906     | Dec.17,2019  | 1 Year        |
| SB9060    | Signal Analyzer   | R&S          | FSQ40     | May.18, 2020 | 1 Year        |

## 5. CONDUCTED EMISSION TEST

### 5.1. Test Standard and Limit

#### 5.1.1. Test Standard

FCC Part 15 15.207

#### 5.1.2. Test Limit

Table 4 Conducted Emission Test Limit

| Frequency     | Maximum RF Line Voltage (dB $\mu$ V) |               |
|---------------|--------------------------------------|---------------|
|               | Quasi-peak Level                     | Average Level |
| 150kHz~500kHz | 66 ~ 56 *                            | 56 ~ 46 *     |
| 500kHz~5MHz   | 56                                   | 46            |
| 5MHz~30MHz    | 60                                   | 50            |

\*Decreasing linearly with logarithm of the frequency

\*The lower limit shall apply at the transition frequency.

### 5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). An EMI test receiver is used to test the emissions from both sides of AC line. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

The bandwidth of EMI test receiver is set at 9 kHz.

### 5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

### 5.4. Test Data

The emissions don't show in below are too low against the limits. Refer to the test curves.


Test mode 1: Transmitting at 908.4MHz (worst-case)

Table 5 Conducted Emission Test Data


| Test mode: 1     |                       |                       |                       |                       |                         |                         |                |
|------------------|-----------------------|-----------------------|-----------------------|-----------------------|-------------------------|-------------------------|----------------|
| Frequency<br>MHz | Line                  |                       |                       |                       | QP<br>Reading<br>(dBuV) | AV<br>Reading<br>(dBuV) | Factor<br>(dB) |
|                  | QP<br>Level<br>(dBuV) | QP<br>Limit<br>(dBuV) | AV<br>Level<br>(dBuV) | AV<br>Limit<br>(dBuV) |                         |                         |                |
| 0.150            | 44.6                  | 66                    | 18.2                  | 56                    | 34.9                    | 8.5                     | 9.7            |
| 0.640            | 27.7                  | 56                    | 15.9                  | 46                    | 17.9                    | 6.1                     | 9.8            |
| 0.874            | 22.0                  | 56                    | 11.0                  | 46                    | 12.2                    | 1.2                     | 9.8            |
| 1.833            | 21.2                  | 56                    | 10.7                  | 46                    | 11.4                    | 0.9                     | 9.8            |
| 3.219            | 20.5                  | 56                    | 10.1                  | 46                    | 10.6                    | 0.2                     | 9.9            |
| 11.449           | 24.6                  | 60                    | 12.4                  | 50                    | 14.7                    | 2.5                     | 9.9            |
| Neutral          |                       |                       |                       |                       |                         |                         |                |
| Frequency<br>MHz | QP                    |                       |                       |                       | QP<br>Reading<br>(dBuV) | AV<br>Reading<br>(dBuV) | Factor<br>(dB) |
|                  | QP<br>Level<br>(dBuV) | QP<br>Limit<br>(dBuV) | AV<br>Level<br>(dBuV) | AV<br>Limit<br>(dBuV) |                         |                         |                |
| 0.231            | 35.8                  | 62.4                  | 10.5                  | 52.4                  | 26.1                    | 0.8                     | 9.7            |
| 0.618            | 19.5                  | 56                    | 7.6                   | 46                    | 9.7                     | -2.2                    | 9.8            |
| 0.541            | 18.6                  | 56                    | 7.5                   | 46                    | 8.8                     | -2.3                    | 9.8            |
| 0.874            | 15.3                  | 56                    | 6.6                   | 46                    | 5.5                     | -3.2                    | 9.8            |
| 2.544            | 12.4                  | 56                    | 5.3                   | 46                    | 2.5                     | -4.6                    | 9.9            |
| 10.068           | 20.1                  | 60                    | 12.3                  | 50                    | 10.2                    | 2.4                     | 9.9            |

REMARKS: 1. Emission level(dBuV)=Read Value(dBuV) + Correction Factor(dB)  
 2. Correction Factor(dB) =LISN Factor (dB) + Cable Factor (dB)+Limiter Factor(dB)  
 3. The other emission levels were very low against the limit.

## Line

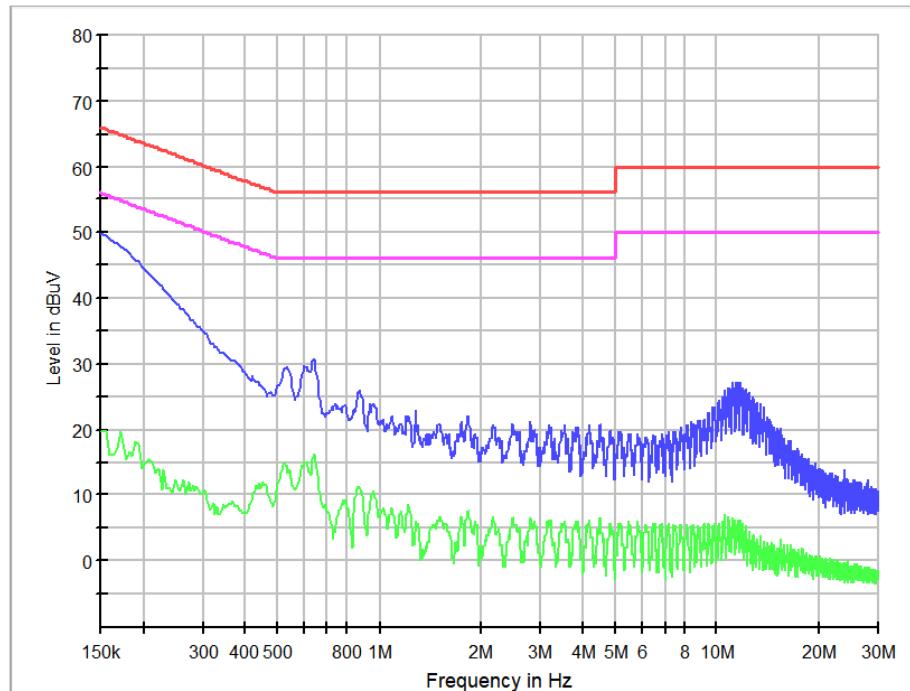

## Neutral

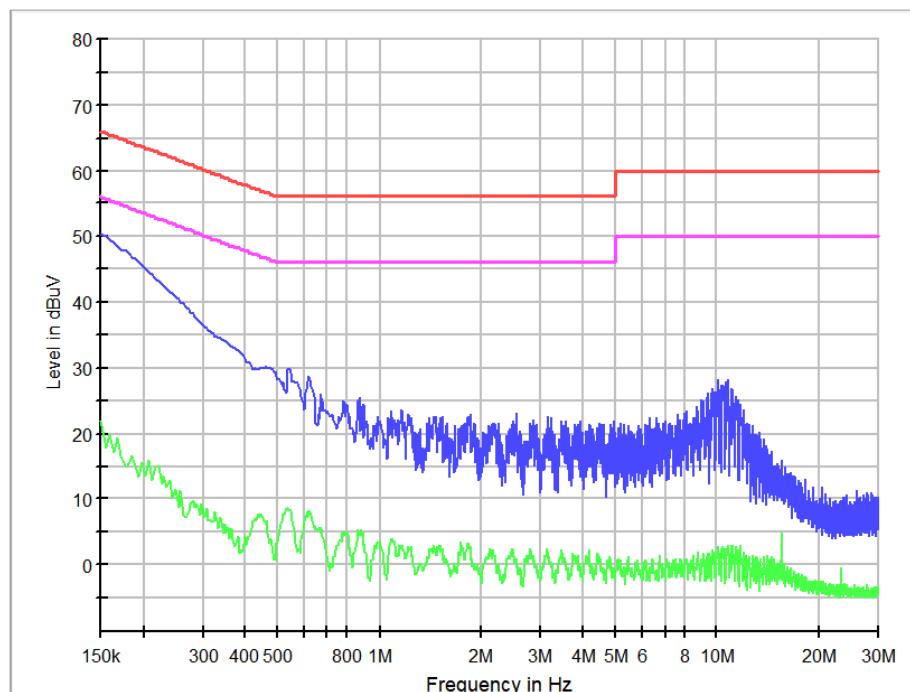

## 6. RADIATED EMISSION TEST

### 6.1. Test Standard and Limit

#### 6.1.1. Test Standard

FCC Part 15 15.249

#### 6.1.2. Test Limit

Table 6 Radiated Emission Test Limit

| FREQUENCY<br>MHz | FIELD<br>STRENGTHS<br>LIMITS<br>( $\mu$ V/m) | FIELD<br>STRENGTHS<br>LIMITS<br>dB ( $\mu$ V/m) |
|------------------|--|---|
| Fundamental      | 50000  | 94.0  |
| Harmonics        | 500  | 54.0  |
| 30 ~ 88          | 100  | 40.0  |
| 88 ~ 216         | 150  | 43.5  |
| 216 ~ 960        | 200  | 46.0  |
| 960 ~            | 500  | 54.0  |

\* The lower limit shall apply at the transition frequency.

\* The test distance is 3m.

### 6.2. Test Procedure

Radiated emission test below 1 GHz, test at SAC, the EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down to find out the maximum emission level. Radiated emission test above 1 GHz, test at FAR, the EUT is placed on a non-conductive table, which is 1.5 meter above ground. Broadband antenna is used as a receiving antenna at frequency range 30MHz to 1000MHz, Horn antenna is used as a receiving antenna at frequency range above 1GHz. Both horizontal and vertical polarization of the antenna is set on test, in order to find out the max emission, the relative positions of this EUT were rotated through three orthogonal axes.

The RBW of the EMI test receiver is:

30~1000MHz 120 KHz

1000~18000MHz 1MHz

### 6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture. The EUT shall be measured in the XYZ three positions, and the test data which was shown in the

follow was the worst case.

#### 6.4. Test Data

The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 7 Radiated Emission Test Data

| Test mode: 1    |              |                        |                       |                            |                                |                        |          |                |
|-----------------|--------------|------------------------|-----------------------|----------------------------|--------------------------------|------------------------|----------|----------------|
| Frequency (MHz) | Polarization | Correction Factor (dB) | Antenna Factor (dB/m) | Reading Value (dB $\mu$ V) | Emission Level dB ( $\mu$ V/m) | Limits dB ( $\mu$ V/m) | EUT axes | Note           |
| 32.546          | Vertical     | 0.7                    | 12.3                  | -0.3                       | 12.7                           | 40                     | X        | QP             |
| 38.851          | Vertical     | 0.7                    | 12.3                  | 6.6                        | 19.6                           | 40                     | X        | QP             |
| 98.991          | Vertical     | 1.1                    | 12.8                  | -7.8                       | 6.1                            | 43.5                   | X        | QP             |
| 141.913         | Vertical     | 1.3                    | 10.5                  | -2.0                       | 9.8                            | 43.5                   | X        | QP             |
| 583.870         | Vertical     | 3.0                    | 16.6                  | -5.5                       | 14.1                           | 46                     | X        | QP             |
| 908.399         | Vertical     | 3.9                    | 21.1                  | 48.3                       | 73.3                           | 94                     | X        | Fundamental QP |
| 5450.541        | Vertical     | -38.4                  | 34.3                  | 53.7                       | 49.6                           | 74                     | X        | PK             |
| 5450.541        | Vertical     | -38.4                  | 34.3                  | 43.4                       | 39.3                           | 54                     | X        | AV             |
| 9623.544        | Vertical     | -36.3                  | 37.1                  | 52.1                       | 52.9                           | 74                     | X        | PK             |
| 9623.544        | Vertical     | -36.3                  | 37.1                  | 38.0                       | 38.8                           | 54                     | X        | AV             |
| 41.882          | Horizontal   | 0.7                    | 13.6                  | -8.1                       | 6.2                            | 40                     | X        | QP             |
| 99.355          | Horizontal   | 1.1                    | 12.8                  | -8.0                       | 5.9                            | 43.5                   | X        | QP             |
| 242.430         | Horizontal   | 1.8                    | 12.1                  | -7.8                       | 6.1                            | 46                     | X        | QP             |
| 426.851         | Horizontal   | 2.5                    | 15.5                  | -8.5                       | 9.5                            | 46                     | X        | QP             |
| 718.942         | Horizontal   | 3.4                    | 18.8                  | -7.0                       | 15.2                           | 46                     | X        | QP             |
| 908.399         | Horizontal   | 3.9                    | 21.1                  | 51.5                       | 76.5                           | 94                     | X        | Fundamental QP |
| 5449.886        | Horizontal   | -38.4                  | 34.3                  | 52.4                       | 48.3                           | 74                     | X        | PK             |
| 5449.886        | Horizontal   | -38.4                  | 34.3                  | 40.1                       | 36.0                           | 54                     | X        | AV             |
| 9806.367        | Horizontal   | -35.6                  | 37.0                  | 50.8                       | 52.2                           | 74                     | X        | PK             |
| 9806.367        | Horizontal   | -35.6                  | 37.0                  | 37.2                       | 38.6                           | 54                     | X        | AV             |

Table 8 Radiated Emission Test Data

| Test mode: 2    |              |                        |                       |                            |                                |                        |          |                |
|-----------------|--------------|------------------------|-----------------------|----------------------------|--------------------------------|------------------------|----------|----------------|
| Frequency (MHz) | Polarization | Correction Factor (dB) | Antenna Factor (dB/m) | Reading Value (dB $\mu$ V) | Emission Level dB ( $\mu$ V/m) | Limits dB ( $\mu$ V/m) | EUT axes | Note           |
| 44.186          | Horizontal   | 0.7                    | 13.6                  | -9.2                       | 5.1                            | 40                     | X        | QP             |
| 99.355          | Horizontal   | 1.1                    | 12.8                  | -8.2                       | 5.7                            | 43.5                   | X        | QP             |
| 254.433         | Horizontal   | 1.9                    | 12.1                  | -7.5                       | 6.5                            | 46                     | X        | QP             |
| 420.061         | Horizontal   | 2.5                    | 15.5                  | -8.2                       | 9.8                            | 46                     | X        | QP             |
| 551.132         | Horizontal   | 2.8                    | 16.6                  | -6.3                       | 13.1                           | 46                     | X        | QP             |
| 916.001         | Horizontal   | 3.9                    | 21.1                  | 50.5                       | 75.5                           | 94                     | X        | Fundamental QP |
| 5496.412        | Horizontal   | -38.3                  | 34.3                  | 52.8                       | 48.8                           | 74                     | X        | PK             |
| 5496.412        | Horizontal   | -38.3                  | 34.3                  | 41.1                       | 37.1                           | 54                     | X        | AV             |
| 9967.725        | Horizontal   | -34.7                  | 37.0                  | 50.3                       | 52.6                           | 74                     | X        | PK             |
| 9967.725        | Horizontal   | -34.7                  | 37.0                  | 36.5                       | 38.8                           | 54                     | X        | AV             |
| 32.789          | Vertical     | 0.7                    | 12.3                  | 1.0                        | 14.0                           | 40                     | X        | QP             |
| 38.608          | Vertical     | 0.7                    | 12.3                  | 9.3                        | 22.3                           | 40                     | X        | QP             |
| 99.476          | Vertical     | 1.1                    | 12.8                  | -7.0                       | 6.9                            | 43.5.                  | X        | QP             |
| 142.641         | Vertical     | 1.3                    | 10.5                  | -1.5                       | 10.3                           | 43.5                   | X        | QP             |
| 592.236         | Vertical     | 3.0                    | 16.6                  | -4.0                       | 15.6                           | 46                     | X        | QP             |
| 916.002         | Vertical     | 3.9                    | 21.1                  | 49.3                       | 74.3                           | 94                     | X        | Fundamental QP |
| 5495.862        | Vertical     | -38.3                  | 34.3                  | 53.4                       | 49.4                           | 74                     | X        | PK             |
| 5495.862        | Vertical     | -38.3                  | 34.3                  | 42.4                       | 38.4                           | 54                     | X        | AV             |
| 9789.658        | Vertical     | -35.3                  | 37.1                  | 51.4                       | 53.2                           | 74                     | X        | PK             |
| 9789.658        | Vertical     | -35.3                  | 37.1                  | 37.4                       | 39.2                           | 54                     | X        | AV             |

Note: 1. Emission level ( $\mu$ V/m)=Reading Value( $\mu$ V) + Correction Factor(dB)+Antenna Factor (dB/m)

2. Correction Factor (dB) = Cable Factor (dB)+Amplifier Factor(dB)

3. No other spurious and harmonic emissions were reported greater than listed emissions above table.


Table 9 Restricted Band Radiated Emission Data

| MHz               | MHz                   | MHz             | GHz         |
|-------------------|-----------------------|-----------------|-------------|
| 0.090 - 0.110     | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15  |
| 0.495 - 0.505     | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46 |
| 2.1735 - 2.1905   | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75 |
| 4.125 - 4.128     | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2   |
| 4.20725 - 4.20775 | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5   |
| 6.215 - 6.218     | 74.8 - 75.2           | 1660 - 1710     |             |
| 6.26775 - 6.26825 | 108 - 121.94          | 1718.8 - 1722.2 |             |
| 6.31175 - 6.31225 | 123 - 138             | 2200 - 2300     |             |
| 8.291 - 8.294     | 149.9 - 150.05        | 2310 - 2390     |             |
| 8.362 - 8.366     | 156.52475 - 156.52525 | 2483.5 - 2500   |             |
| 8.37625 - 8.38675 | 156.7 - 156.9         | 2655 - 2900     |             |
| 8.41425 - 8.41475 | 162.0125 - 167.17     | 3260 - 3267     |             |
| 12.29 - 12.293    | 167.72 - 173.2        | 3332 - 3339     |             |
| 12.51975          | -                     | 3345.8 - 3358   |             |
| 12.52025          | 240 - 285             | 3600 - 4400     |             |
| 12.57675          | -                     |                 |             |
| 12.57725          |                       |                 |             |
| 13.36 - 13.41     |                       |                 |             |

All the emission levels of the above band were less than the limit 20dB.


### Test mode 1, below 1GHz, Horizontal

Copy of Field strength 30M-1GHz

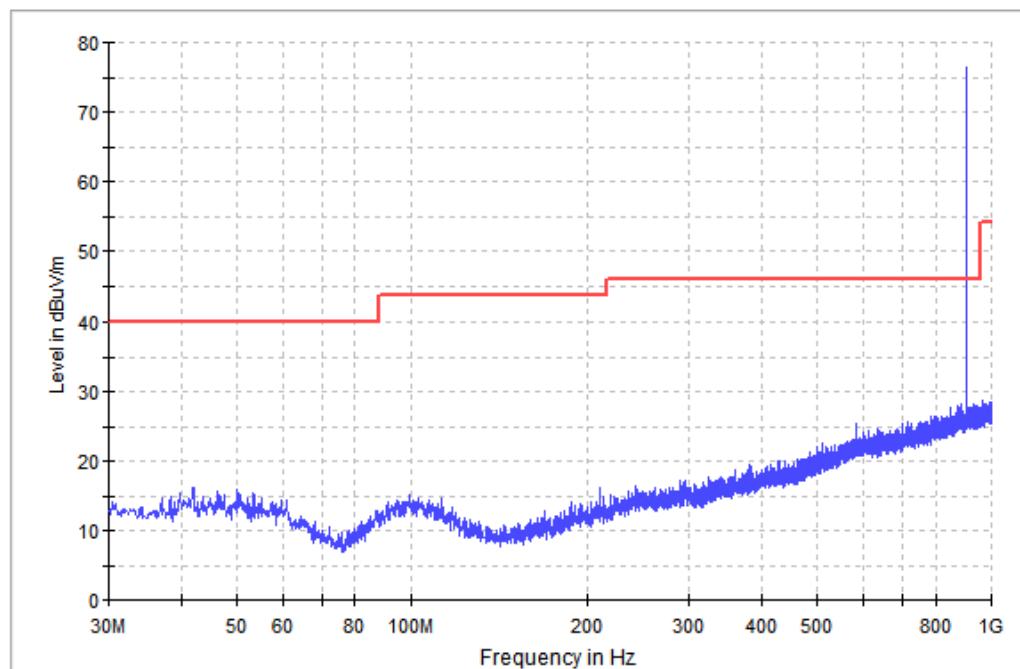


### Test mode 1, below 1GHz, Vertical


Copy of Field strength 30M-1GHz

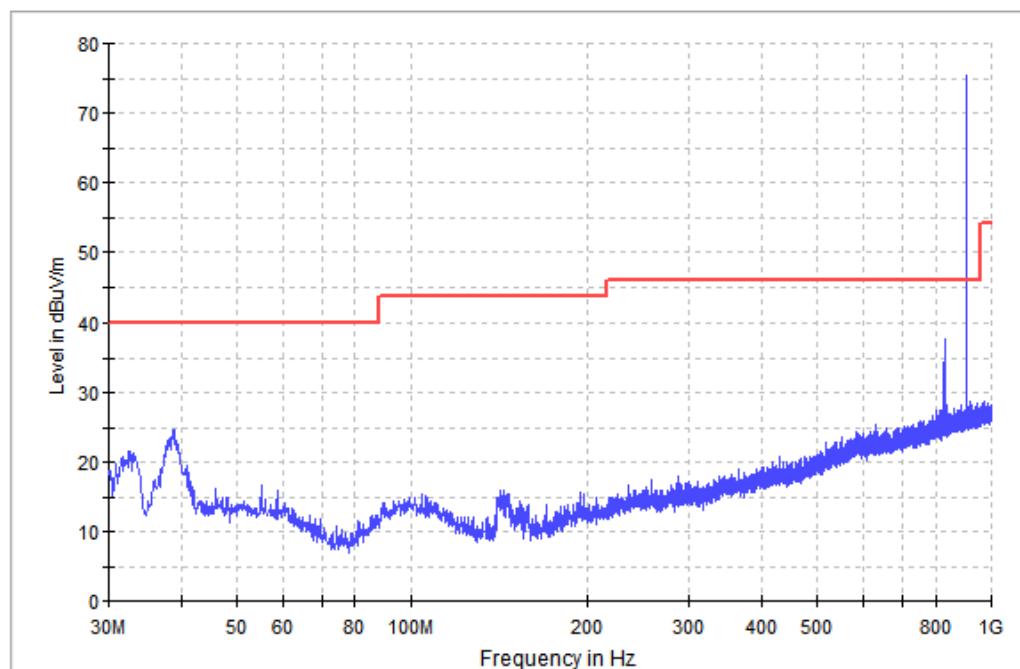

### Test mode 1, above 1GHz, Horizontal

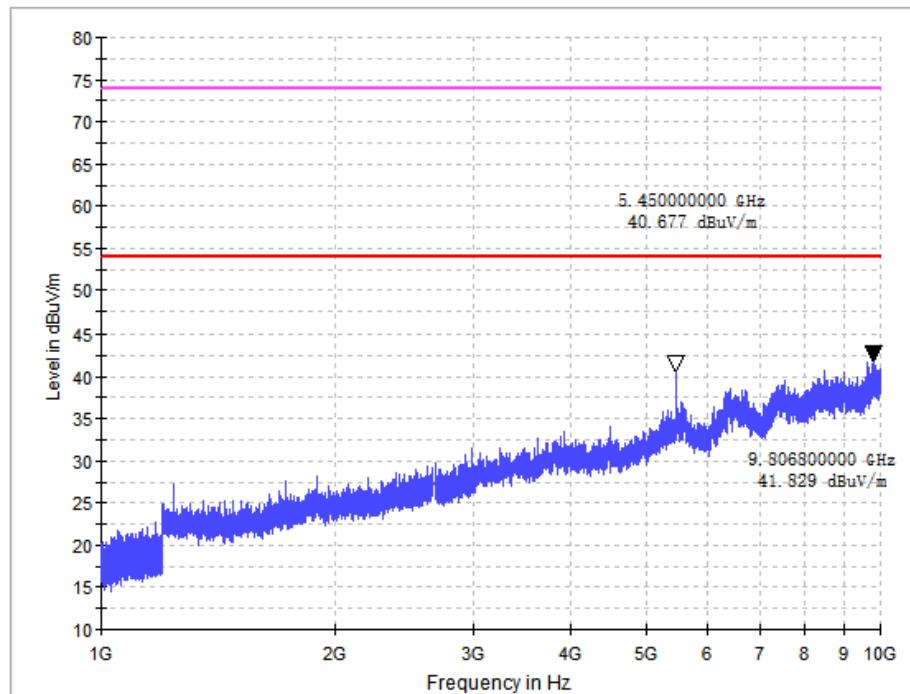


### Test mode 1, above 1GHz, Vertical

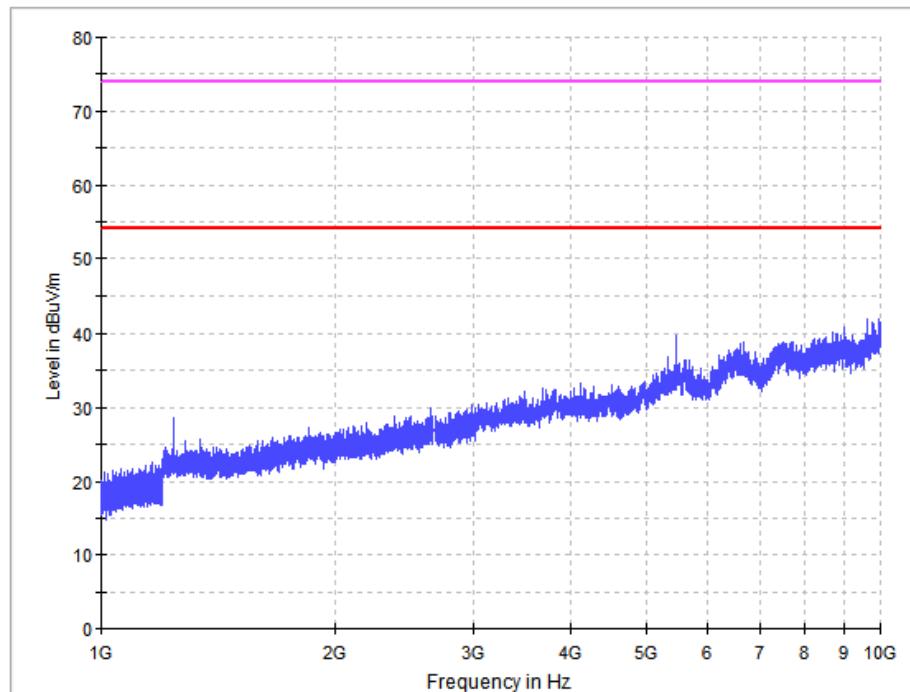


## Test mode 2, below 1GHz, Horizontal

Copy of Field strength 30M-1GHz

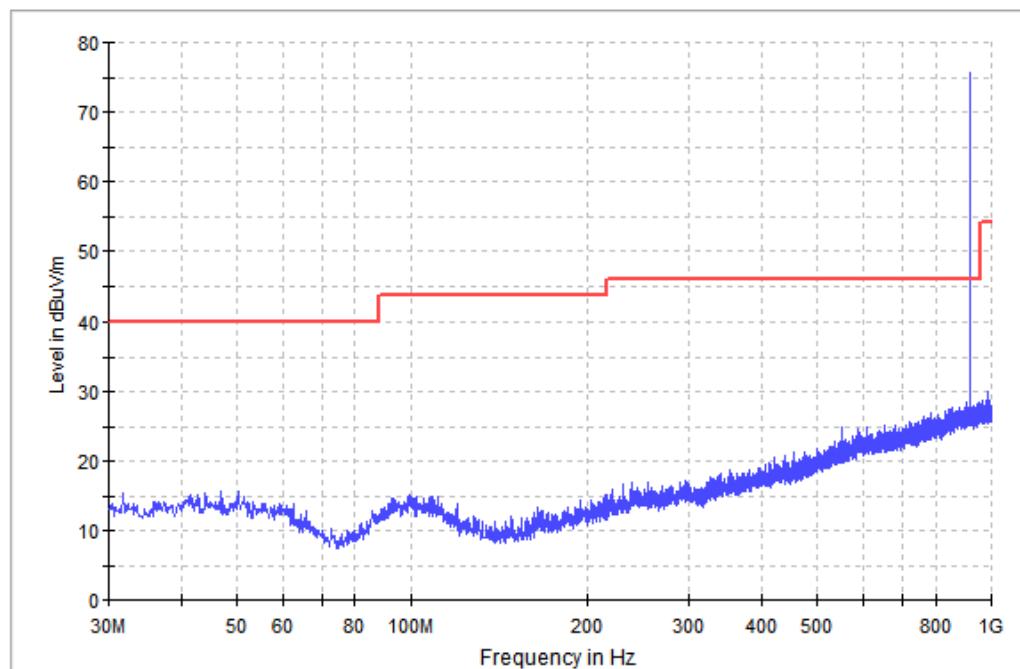


## Test mode 2, below 1GHz, Vertical


Copy of Field strength 30M-1GHz

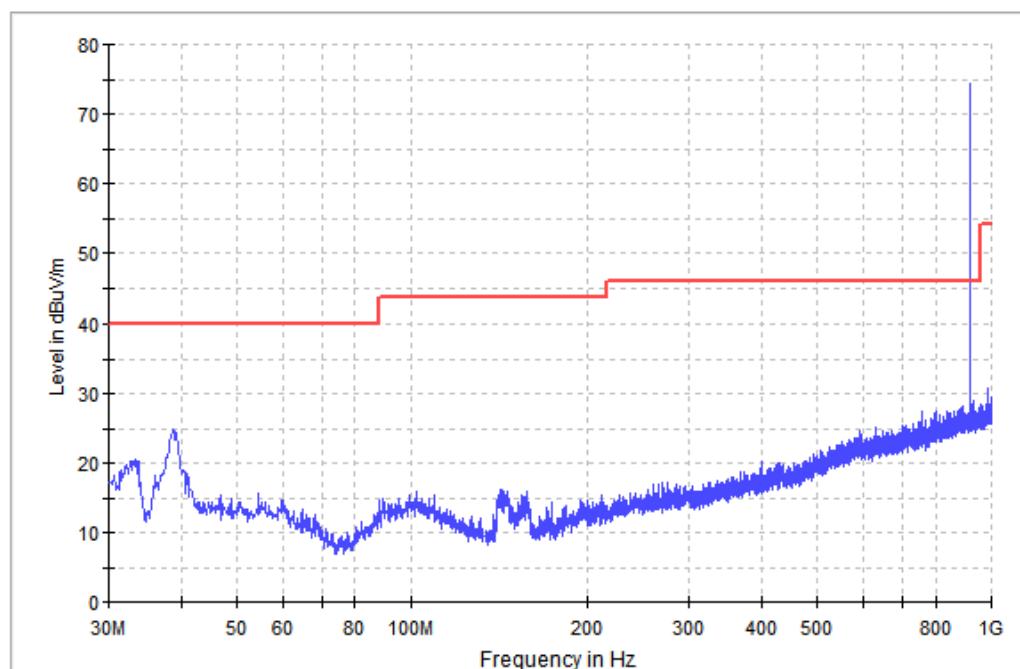

### Test mode 2, above 1GHz, Horizontal

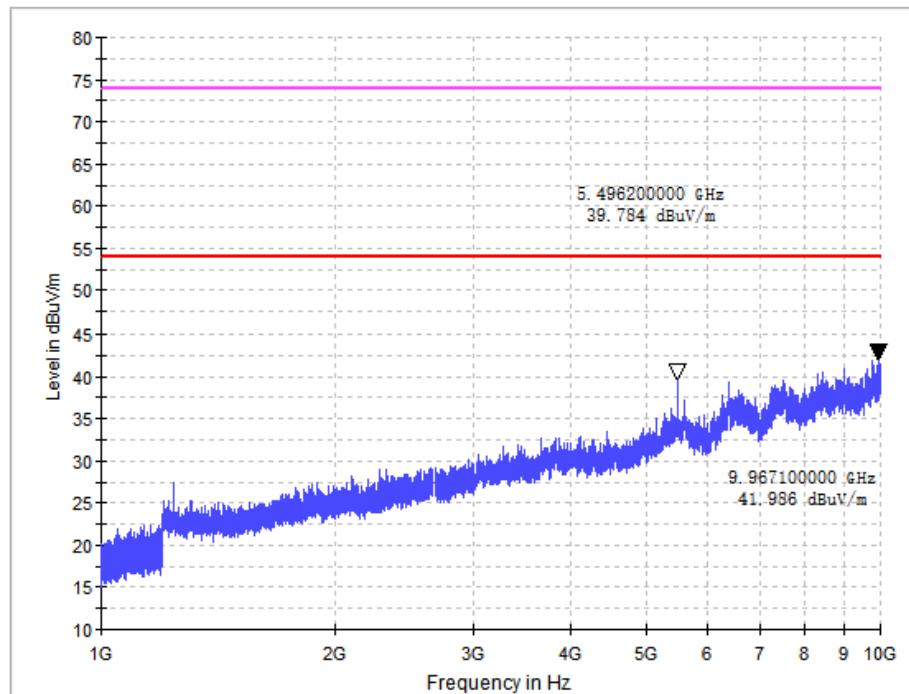

### Test mode 2, above 1GHz, Vertical

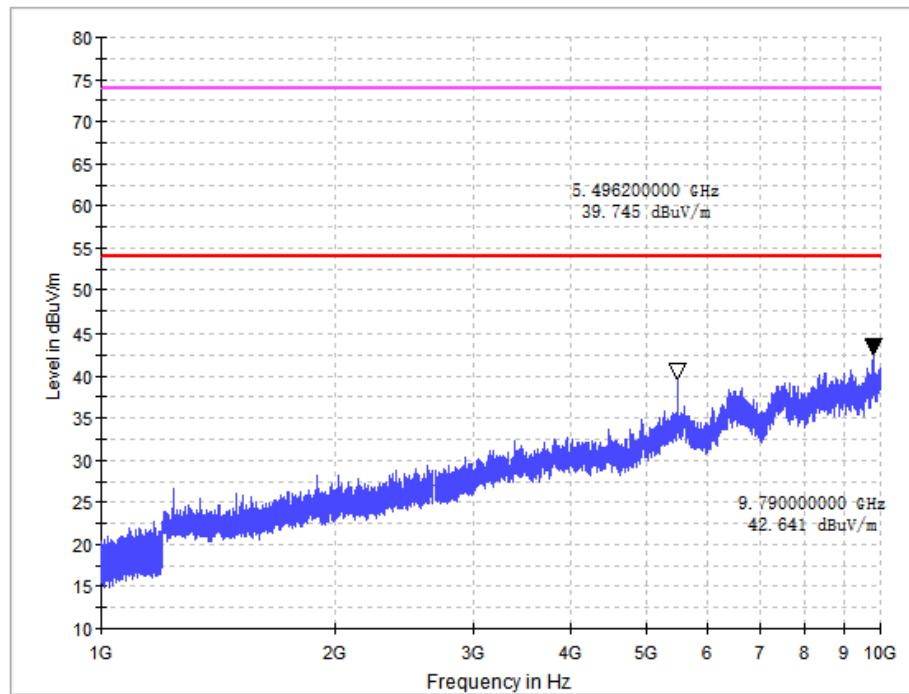

## 7. OCCUPIED BANDWIDTH

### 7.1. Test Standard and Limit

#### 7.1.1. Test Standard

FCC Part 15 15.215

### 7.2. Test Procedure


1. Set EUT as normal operation
2. Set EMI test receiver Center Frequency = fundamental frequency, RBW=1% to 5% of the OBW, VBW=3 times of RBW, Span=Wide enough to capture the complete power envelope.
3. Set EMI test receiver Max hold. Mark peak, -20dB.

### 7.3. Test Arrangement


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

### 7.4. Test Data

Transmitting at 908.4MHz: 20dB bandwidth =94.2 kHz

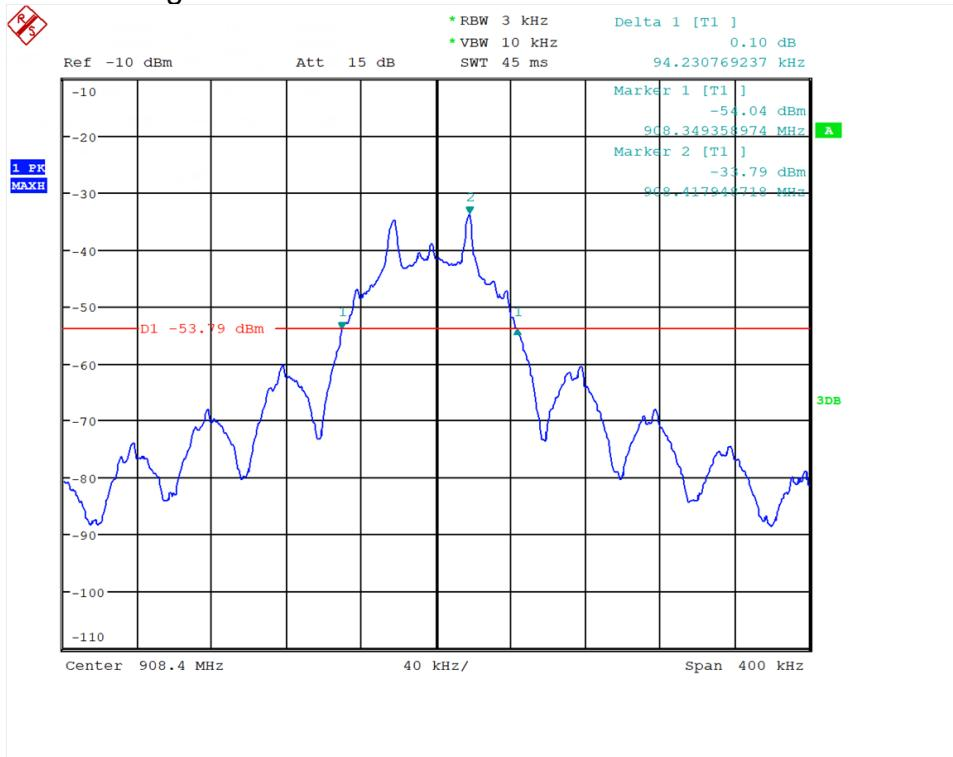

Transmitting at 916MHz: 20dB bandwidth =123.7 kHz

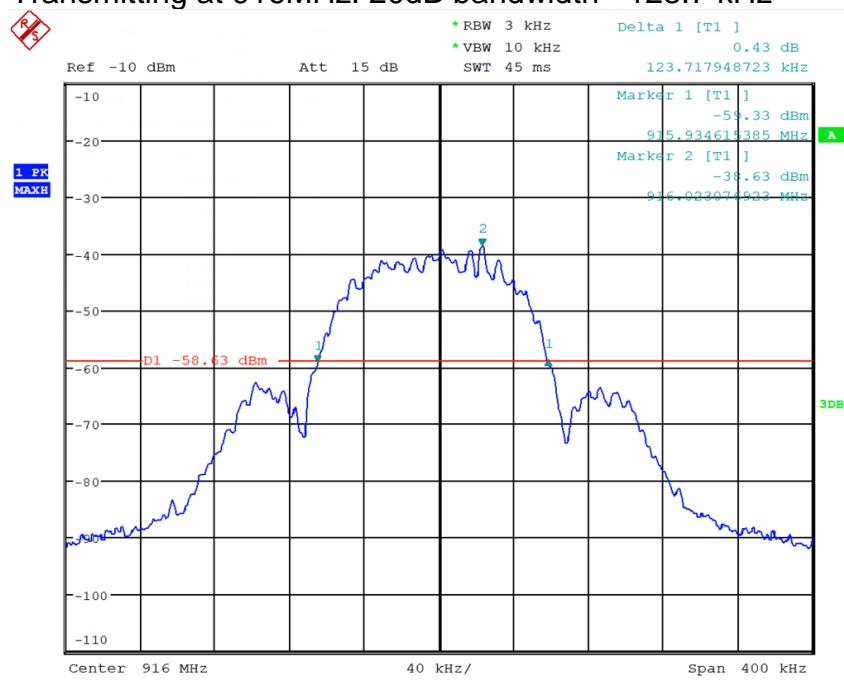

## **8. BAND EDGE**

### **8.1. Test Standard and Limit**

#### **8.1.1. Test Standard**

FCC Part 15 15.249

### **8.2. Band Edge FCC 15.249(d) Limit**

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation

### **8.3. Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instruments. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Measure the highest amplitude appearing on spectral display and set it as reference level. Plot the graph with marking the highest point and edge frequency.
4. Repeat above procedures until all measured frequencies were complete.

### **8.4. Test Arrangement**


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

### **8.5. Test Data**

All the emission outside 902 to 928 is lower than 46 dB ( $\mu$ V/m). The detailed information refers to test picture.


Transmitting at 908.4MHz

Band Ege blowe 1GHz

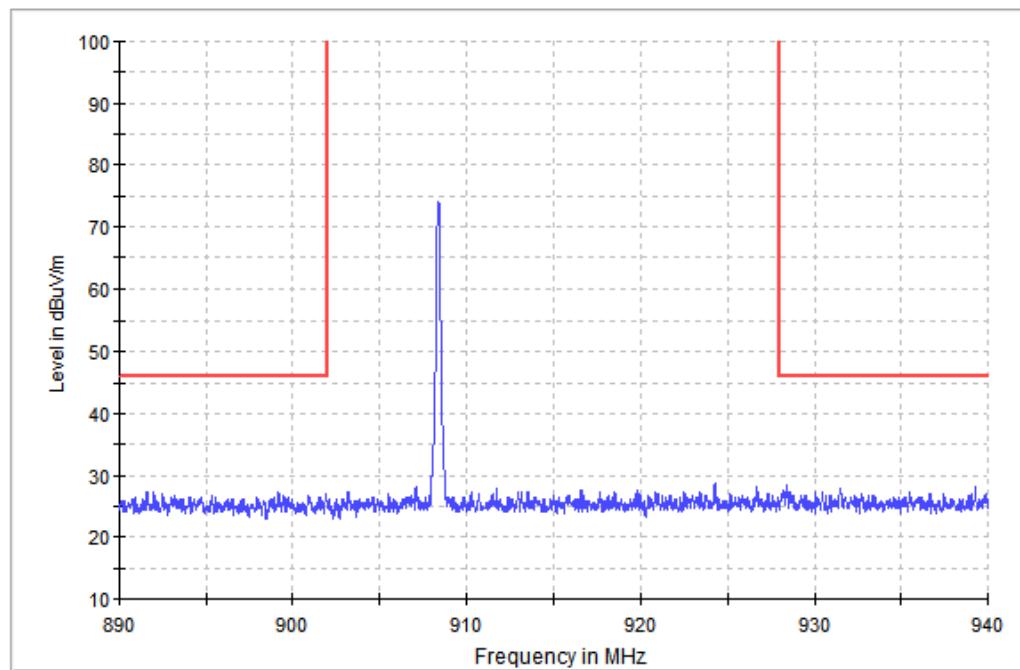

Transmitting at 916MHz

Band Ege blowe 1GHz

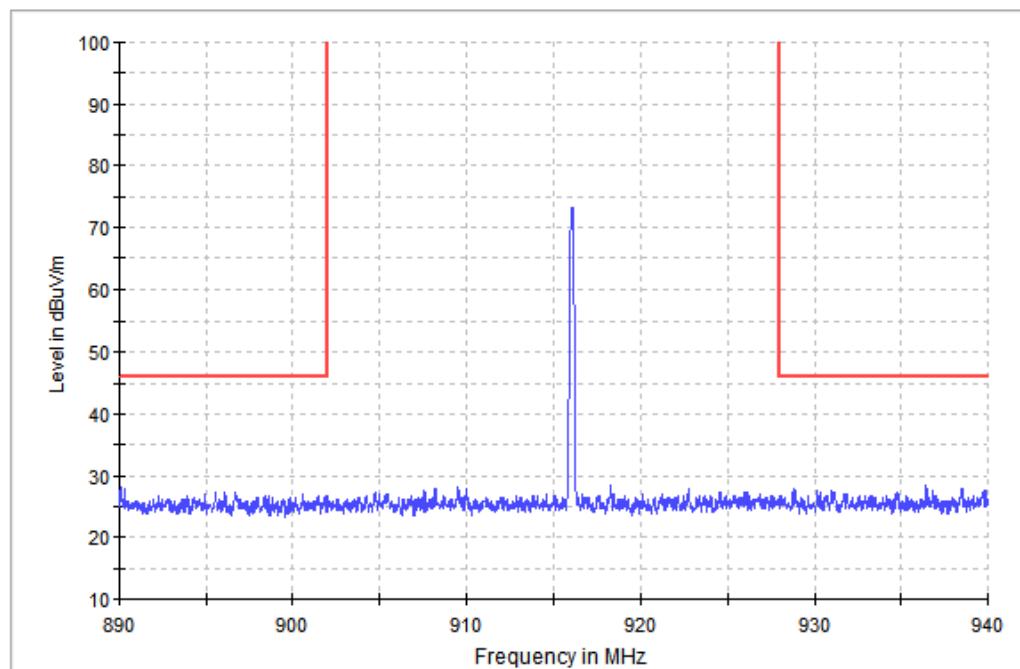

## **9. ANTENNA REQUIREMENT**

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT has a built in antenna which is integrated inside the enclosure, this is permanently attached antenna and meets the requirements of this section.

-----End of Report-----