



## 47 CFR PART 22H& 24E

# TEST REPORT

of

**M560**

Trade Name: Revol Wireless, Mobi PCS, Open Mobile  
Brand Name: Revol Wireless, Mobi PCS, Open Mobile  
Model Name: LYNX(Revol Wireless), EXPRESSION(Mobi PCS), V1(Open Mobile)  
Report No.: SZ10070023E01  
FCC ID.: U46-M560

*prepared for*

### Teleepoch Limited

2/F, R2-A North Gate, Shenzhen High-Tech Industrial Nanshan District, Shenzhen,  
Guang Dong, China

**Shenzhen Morlab Communications Technology Co., Ltd.**

**Morlab Laboratory**

3/F, Electronic Testing Building Shahe Road, Xili,  
Nanshan District, Shenzhen, 518055 P. R. China  
Tel: +86 755 86130398  
Fax: +86 755 86130218



**CTIA Authorized Test Lab.**  
LAB CODE 20081223-00

**NOTE:** This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.

## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
<b>2.1 Equipment under Test (EUT) Description .....</b>	<b>5</b>
<b>2.2 Test Standards and Results .....</b>	<b>6</b>
<b>2.3 Facilities and Accreditations .....</b>	<b>7</b>
2.3.1 Facilities .....	7
2.3.2 Test Equipments .....	7
2.3.3 Test Environment Conditions.....	7
<b>3. 47 CFR PART 2, PART 22H, PART 24E REQUIREMENTS .....</b>	<b>8</b>
<b>3.1 General Information.....</b>	<b>8</b>
3.1.1 Conducted Related Tests .....	8
3.1.2 Radiated Power and Spurious Emission Tests .....	9
3.1.3 Frequency Stability Test.....	10
<b>3.2 Frequencies.....</b>	<b>11</b>
3.2.1 Requirement .....	11
3.2.2 Test Procedure .....	11
3.2.3 Test Result.....	12
<b>3.3 Conducted RF Output Power.....</b>	<b>14</b>
3.3.1 Requirement .....	14
3.3.2 Test Procedure .....	14
3.3.3 Test Result.....	14
<b>3.4 Occupied Bandwidth .....</b>	<b>16</b>
3.4.1 Occupied Bandwidth Definition .....	16
3.4.2 Test Procedure .....	16
3.4.3 Test Result.....	16
<b>3.5 Conducted Spurious Emission.....</b>	<b>20</b>
3.5.1 Requirement .....	20
3.5.2 Test Procedure .....	20
3.5.3 Test Result.....	20
<b>3.6 Band Edge .....</b>	<b>24</b>

3.6.1	Requirement .....	24
3.6.2	Test Result .....	24
<b>3.7</b>	<b>Transmitter Radiated Power (EIRP/ERP) .....</b>	<b>27</b>
3.7.1	Requirement .....	27
3.7.2	Test Procedure .....	27
3.7.3	Test Result .....	27
<b>3.8</b>	<b>Radiated Spurious Emission.....</b>	<b>30</b>
3.8.1	Requirement .....	30
3.8.2	Test Procedure .....	30
3.8.3	Test Result .....	30
<b>3.9</b>	<b>Frequency Stability.....</b>	<b>38</b>
3.9.1	Requirement .....	38
3.9.2	Test Description .....	38
3.9.3	Test Procedure .....	38
3.9.4	Test Result .....	39

Change History		
Issue	Date	Reason for change
1.0	September 10, 2010	First edition

## 1. Test Result Certification

Equipment under Test: M560

Trade Name: Revol Wireless, Mobi PCS, Open Mobile

Brand Name: Revol Wireless, Mobi PCS, Open Mobile

Model Name: LYNX(Revol Wireless), EXPRESSION(Mobi PCS), V1(Open Mobile)

FCC ID: U46-M560

Applicant: Teleepoch Limited

2/F, R2-A North Gate, Shenzhen High-Tech Industrial Nanshan District, Shenzhen, Guang Dong, China

Manufacturer: Teleepoch Limited

5A, B1 Building, South Section, Hi-Tech Industrial Park Nanshan District, 518057, Shenzhen Guangdong Province, China

Test Standards: 47 CFR Part 2

47 CFR Part 22 Subpart H

47 CFR Part 24 Subpart E

Test Date(s): July 28, 2010 - September 09, 2010


Test Result: PASS

### \* We Hereby Certify That:

The equipment under test was tested by Shenzhen Morlab Communications Technology Co., Ltd. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related FCC rules.


The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by:

  
Cao Shaodong


Dated: 2010.9.10

Reviewed by:

  
Ni Yong

Dated: 2010.09.10

Approved by:

  
Shu Luan

Dated: 2010.9.10



## 2. General Information

### 2.1 Equipment under Test (EUT) Description

Description ..... M560  
Model Name ..... LYNX(Revol Wireless), EXPRESSION(Mobi PCS), V1(Open Mobile)  
Serial No. .... N/A  
MEID ..... N/A  
Hardware Version ..... M560\_V1.2  
Software Version..... M560\_V0.6  
Emission Designator..... 1M25F9W  
Modulation ..... CDMA 1X  
Frequency ..... Tx: 824.7 – 848.31 MHz; Rx: 869.7-893.31MHz  
Tx: 1851.25 MHz -1908.75 MHz; Rx: 1931.25 MHz-1988.75 MHz  
Power Supply: ..... Battery  
Brand name: 池航  
Model Name: 054050  
Capacitance: 1000mAh  
Rated voltage: 3.7V  
Charge limited: 4.2V+/-0.05 V  
Manufacturer: SHENZHEN CHIHANG TECHNOLOGY CO., LTD.  
Accessory Equipment:..... AC Adapter (Charger for Battery)  
Brand Name: Blue fox  
Model Name: BI05-050060-BdU  
Rated Input: ~ 100V-240V, 0.3A, 50- 60Hz  
Rated Output: == 5.0V, 0.6A  
Manufacturer: Bluefox Technologies Ltd.

#### NOTE:

1. The EUT is a model of CDMA 1X800/1900MHz digital mobile phone.
2. The normal configuration for the EUT is the Mobile Phone (MS) associated with ancillary equipments e.g. the Battery and/or the AC Adapter (Charger).
3. The transmitter (Tx) frequency arrangement of the CDMA 1900MHz band used by the EUT can be represented with the formula  $F(n)=1851.2+0.05*(n-25)$ ,  $25 \leq n \leq 1175$ ; the lowest, middle and highest channel numbers (ARFCNs) used and tested in this report are separately 25 (1851.2MHz), 600 (1880.0MHz) and 1175 (1908.7MHz).
4. For detailed features about the EUT, please see user manual supplied by the applicant.

## 2.2 Test Standards and Results

The objective of the report is to perform tests according to 47 CFR Part 2, Part 15 Part 22 for FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-09 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-09 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-09 Edition)	Personal Communications Services

Test detailed items and the results are as below:

No.	Rules	Test Type	Result
<b>FCC Part 22 Requirement</b>			
1	§2.106, §22.905	Frequencies	PASS
2	§2.1046	Conducted RF Output Power at Antenna Terminal	PASS
3	§2.1049	Occupied Bandwidth	PASS
4	§2.1051, §2.1057 §22.917	Conducted Spurious Emission at Antenna Terminal	PASS
5	§22.913	Transmitter Radiated Power (EIPR/ERP)	PASS
6	§2.1053, §2.1057 §22.917	Radiated Spurious Emission	PASS
7	§2.1055, §22.355	Frequency Stability	PASS
<b>FCC Part 24 Requirement</b>			
1	§2.106, §24.229	Frequencies	PASS
2	§2.1046	Conducted RF Output Power	PASS
3	§2.1049	20dB Occupied Bandwidth	PASS
4	§2.1055, §24.235	Frequency Stability	PASS
5	§2.1051, §2.1057, §24.238	Conducted Out of Band Emissions	PASS
6	§2.1051, §2.1057, §24.238	Band Edge	PASS
7	§24.232	Transmitter Radiated Power (EIPR/ERP)	PASS

## 2.3 Facilities and Accreditations

### 2.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is CNAS L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The site was constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22, the FCC registration number is 741109.

### 2.3.2 Test Equipments

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	Agilent	E5515C	GB43130131	2009.09	1year
Spectrum Analyzer	Agilent	E7405A	US44210471	2009.09	1year
Power Splitter	Weinschel	1506A	NW521	(n.a.)	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)	(n.a.)
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2009.09	2year
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2009.09	1year
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2009.09	1year
DC Power Supply	Good Will	GPS-3030DD	EF920938	2009.09	2year
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2009.09	1year

### 2.3.3 Test Environment Conditions


During the measurement, the environmental conditions were within the listed ranges:

Temperature:	20 - 25 °C
Relative Humidity:	40 - 60%
Atmospheric Pressure:	86-106kPa

### 3. 47 CFR Part 2, Part 22H, Part 24E Requirements


#### 3.1 General Information

##### 3.1.1 Conducted Related Tests

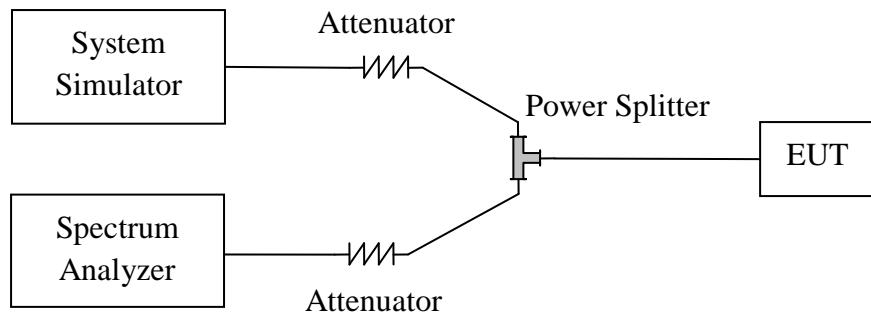


1. The EUT is coupled to the Spectrum Analyzer and the System Simulator with the suitable Attenuators through the Power Splitter; the path loss is calibrated to correct the reading.
2. The EUT is configured here as MS + Battery.
3. The EUT is commanded via the System Simulator (SS) to operate at the maximum output power .A communication link is established between the EUT and the SS.
4. The Spectrum Analyzer is set to max-peak detector function and maximum hold mode.

### 3.1.2 Radiated Power and Spurious Emission Tests

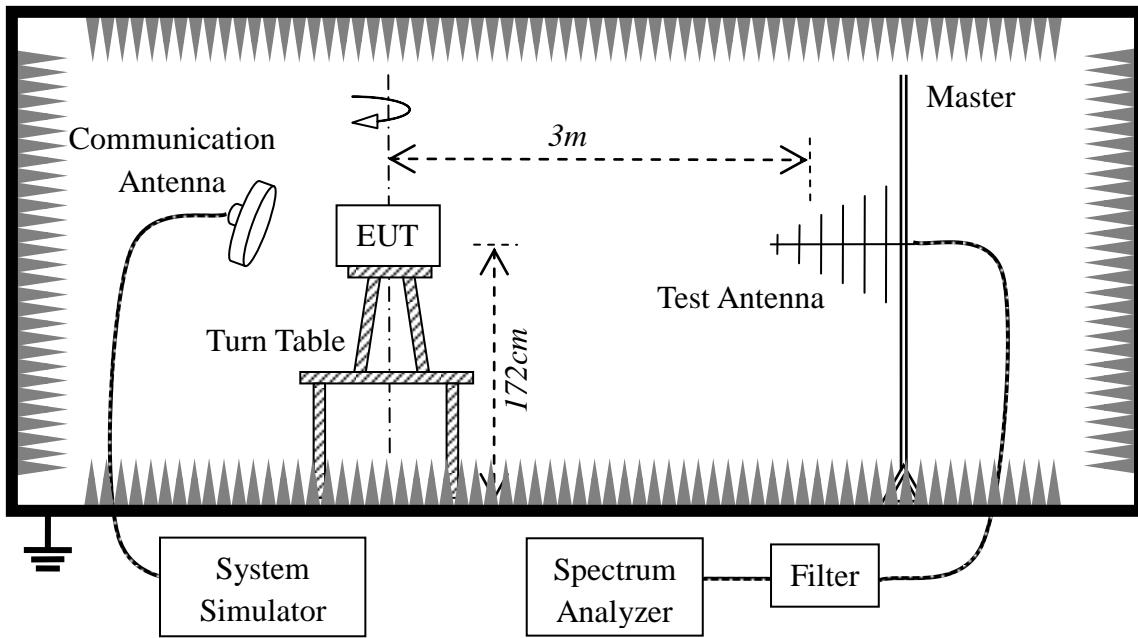

1. The test is performed in a full-Anechoic Chamber; the air loss of the site and the factors of the test system are pre-calibrated using the substitution method.
2. The EUT is configured as MS + Battery.
3. The EUT is placed on the vertical axis of a Turn Table 1.72 meters above the ground.
4. The Test Antenna is a bi-log one or a horn one, and the Test Antenna is at the same height as the EUT.
5. The EUT is commanded via the System Simulator (SS) to operate at the maximum output power. A communication link is established between the EUT and the SS.
6. The Spectrum Analyzer is set to max-peak detector function and maximum hold mode.

### 3.1.3 Frequency Stability Test

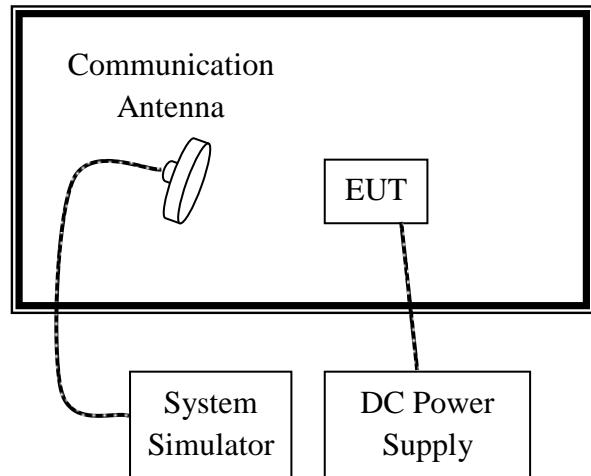

1. The test is performed in a Temperature Chamber.
2. The EUT is configured as MS + Battery.

## 3.2 Frequencies

### 3.2.1 Requirement

According to FCC §22.905, the frequencies blocks assignment for the Cellular Radiotelephone Service are listed as below.

- (a) Channel Block A:
  - Mobile 824 - 835MHz, Base 869 - 880MHz;
  - Mobile 845 - 846.5MHz, Base 890 - 891.5MHz
- (b) Channel Block B:
  - Mobile 835 - 845 MHz, Base 880 - 890MHz;
  - Mobile 846.5 - 849 MHz, Base 891.5 - 894MHz

According to FCC section 24.229, the frequencies available in the Broadband PCS services are listed as below, in accordance with the frequency allocations table of FCC section 2.106.


- (c) The following frequency blocks are available for assignment on an MTA basis:
  - Block A: 1850 - 1865MHz paired with 1930 - 1945MHz;
  - Block B: 1870 - 1885MHz paired with 1950 - 1965MHz
- (d) The following frequency blocks are available for assignment on a BTA basis:
  - Block C: 1895 - 1910 MHz paired with 1975 - 1990MHz;
  - Block D: 1865 - 1870 MHz paired with 1945 - 1950MHz;
  - Block E: 1885 - 1890 MHz paired with 1965 - 1970MHz;
  - Block F: 1890 - 1895 MHz paired with 1970 - 1975MHz.

### 3.2.2 Test Procedure


1. Perform test system setup as section 3.1.1.
2. The resolution bandwidth (RBW) of the Spectrum Analyzer was set to at lease 1% of the emission bandwidth of the fundamental emission of the transmitter, e.g. for GSM modulated signal (here used): RBW=VBW=3kHz, for CDMA modulated signal: RBW=VBW=30kHz.
3. The lowest and the highest channel were selected to perform tests respectively. Channel No.1013 (lowest) and 777(highest) for CDMA800 MHz band. Channel No.25 (lowest) and 1175(highest) for CDMA1900 MHz band
4. The MS operated at the maximum output power. Set the Spectrum Analyzer suitably to capture the waveform, search peak and mark, and then record the plot.

### 3.2.3 Test Result


The frequencies of the lowest channel and the highest channel are as the following figures.

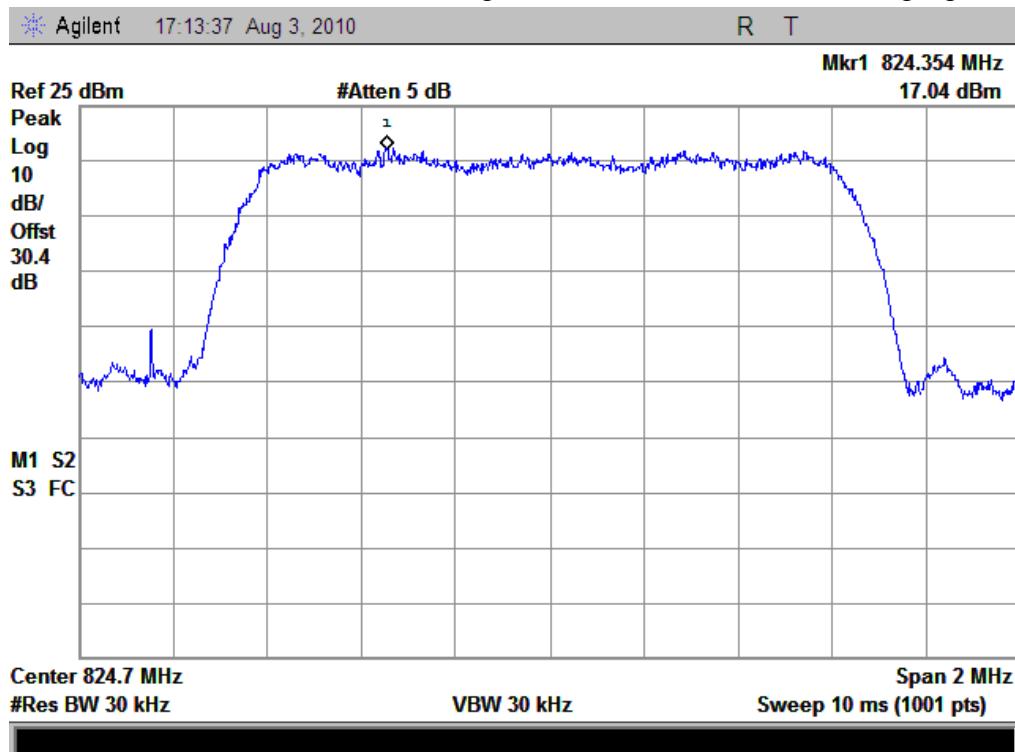


(Plot A: CDMA 800MHz Channel = 1013)

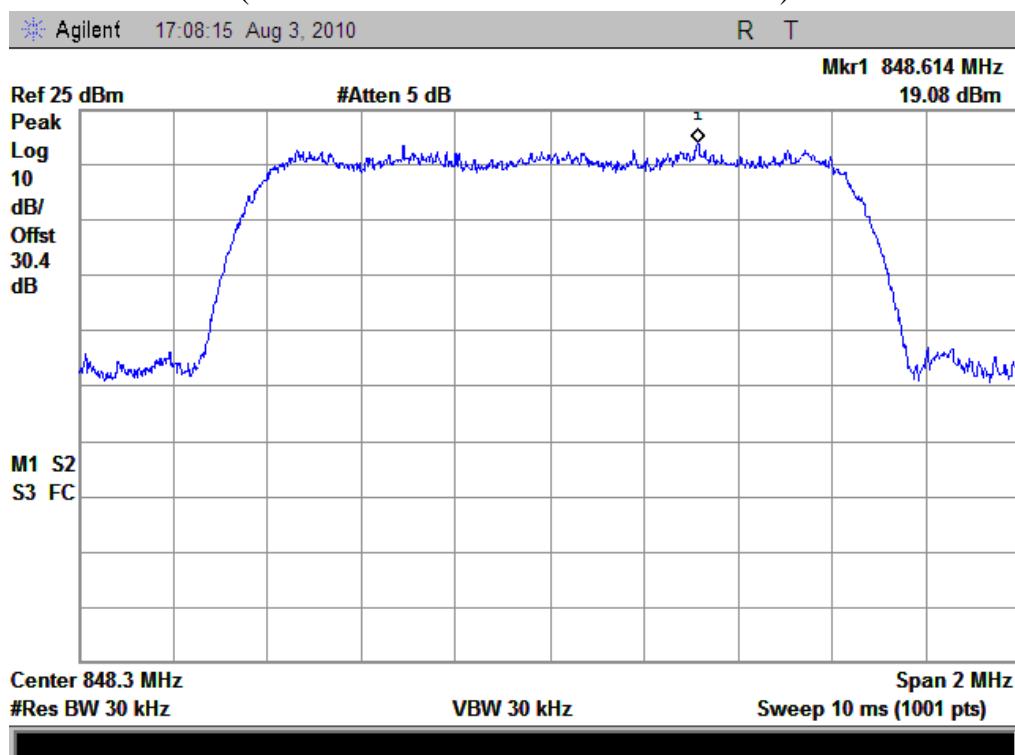

(Plot B: CDMA 800MHz Channel = 777)

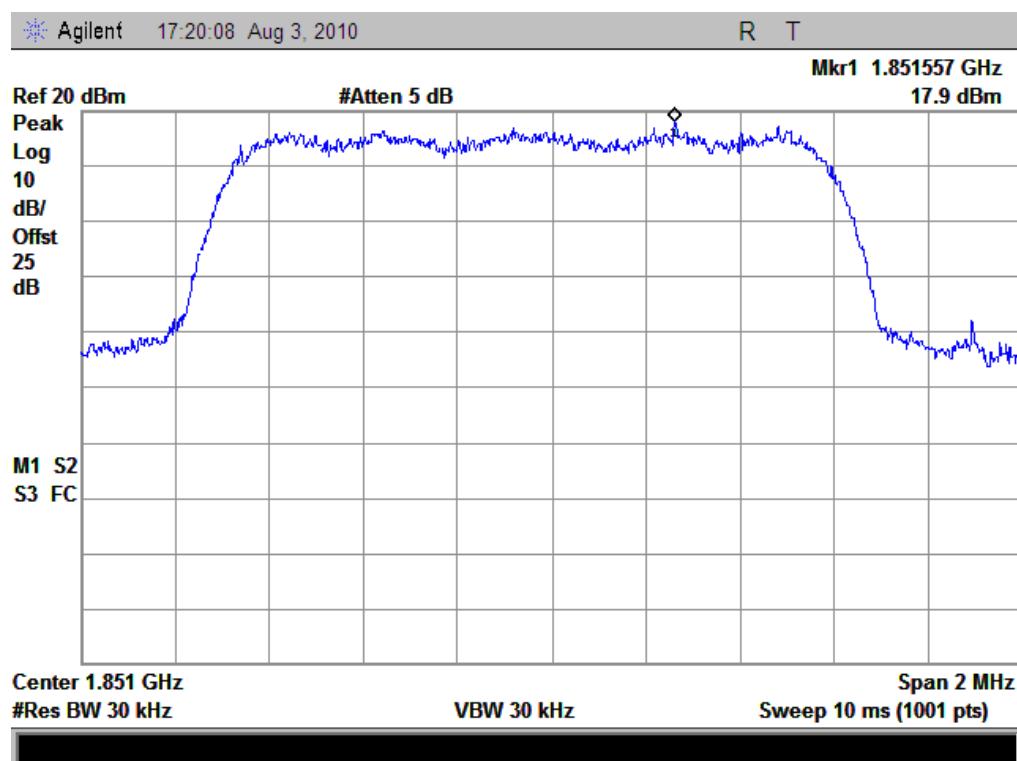

(Plot C: CDMA 1900MHz Channel = 25)

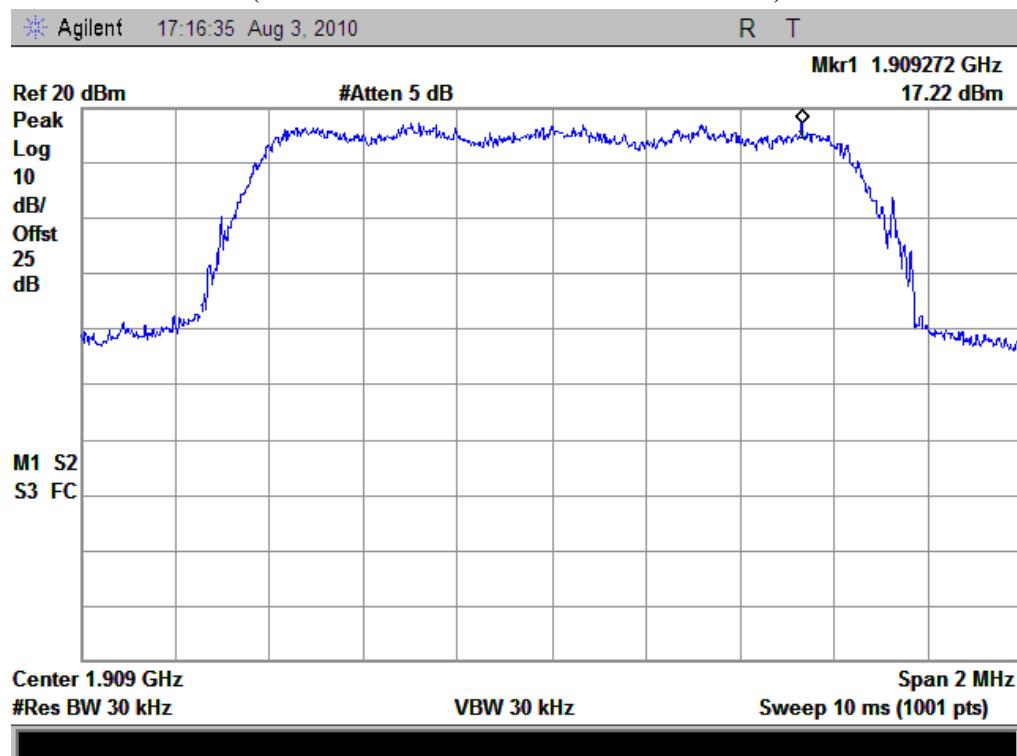

(Plot B: CDMA 1900MHz Channel = 1175)

### 3.3 Conducted RF Output Power

#### 3.3.1 Requirement


According to FCC §2.1046 (a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in §2.1033 (c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

#### 3.3.2 Test Procedure


1. Perform test system setup as section 3.1.1 (the radio frequency load attached to the EUT antenna terminal is  $50\Omega$ ).
2. The resolution bandwidth of the Spectrum Analyzer is set to be comparable to the emission bandwidth of the transmitter, e.g. for GSM modulated signal (here used):  $RBW=VBW=1\text{MHz}$ , for CDMA modulated signal:  $RBW=VBW=3\text{MHz}$ .
3. The low, middle and the high channels are selected to perform tests respectively.
4. Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; search peak and mark it; finally record the peak and the plot.

#### 3.3.3 Test Result

No.	Channel Number	Frequency (MHz)	Measured Power		Rated Power	
			dBm	W	dBm	W
CDMA 800MHz	1013	824.7	27.57	0.57	33	2
	384	836.52	27.34	0.54		
	777	848.31	27.48	0.56		
CDMA 1900MHz	25	1851.25	27.79	0.60	38.5	7
	600	1880.0	27.51	0.56		
	1175	1908.75	27.34	0.54		

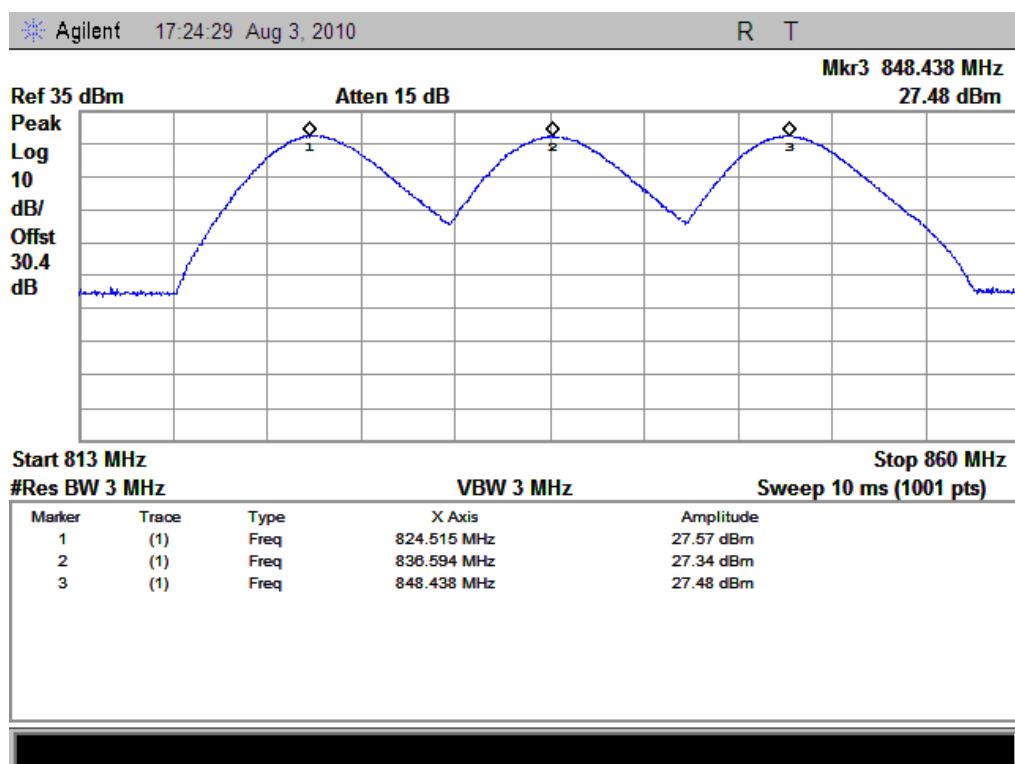

(Plot A: CDMA 800MHz Channel = 1013, 384, 777)

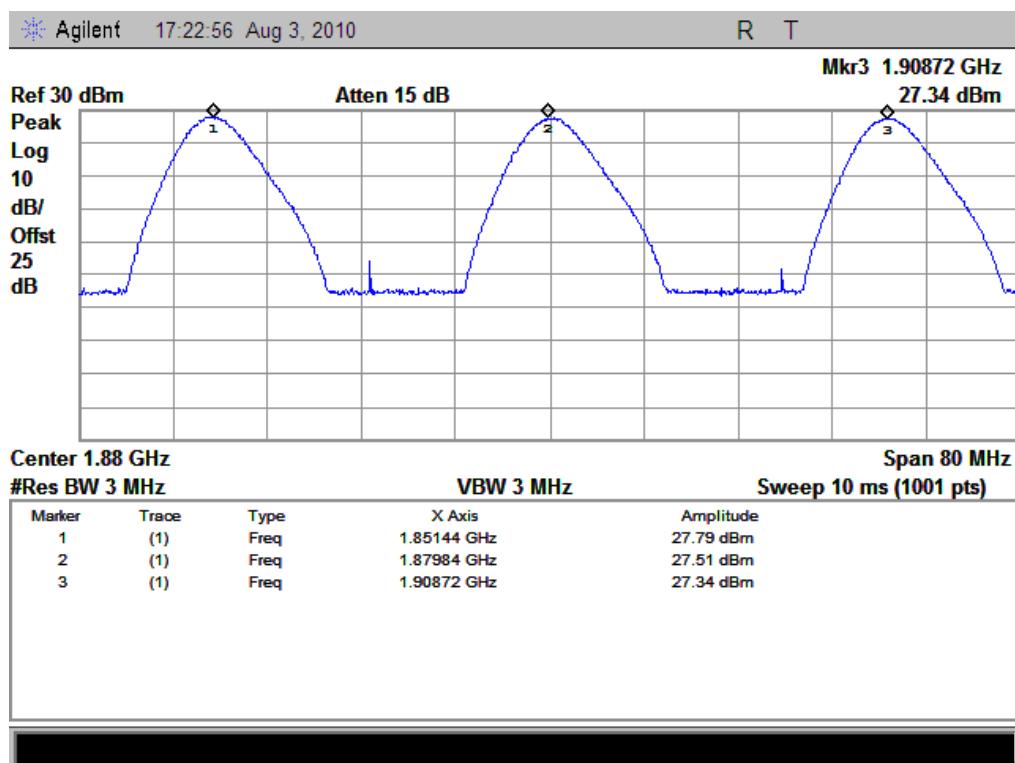

(Plot B: CDMA 1900MHz Channel = 25, 600, 1175)

### 3.4 Occupied Bandwidth

#### 3.4.1 Occupied Bandwidth Definition

According to FCC §2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.


Occupied bandwidth is also known as the 99% emission bandwidth. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

#### 3.4.2 Test Procedure


1. Perform test system setup as section 3.1.1.
2. The resolution bandwidth of the Spectrum Analyzer is set to at least one percent of the emission bandwidth, e.g. for GSM modulated signal (here used):  $RBW=VBW=3\text{kHz}$ , for CDMA modulated signal:  $RBW=VBW=30\text{kHz}$ .
3. The low, middle and the high channels are selected to perform tests respectively.
4. Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; search peak; make a line whose value is 20dB lower than the peak; mark two points which the line intersected the waveform at; finally record the delta of the two points as the occupied bandwidth and the plot.

#### 3.4.3 Test Result



Band	Channel	Frequency (MHz)	Measured 20dB Occupied Bandwidth (MHz)	Refer to Plot
CDMA 800MHz	1013	824.7	1.284	Plot A
	384	836.52	1.281	Plot B
	777	848.31	1.284	Plot C
CDMA 1900MHz	25	1851.25	1.278	Plot D
	600	1880.0	1.284	Plot E
	1175	1908.75	1.278	Plot F

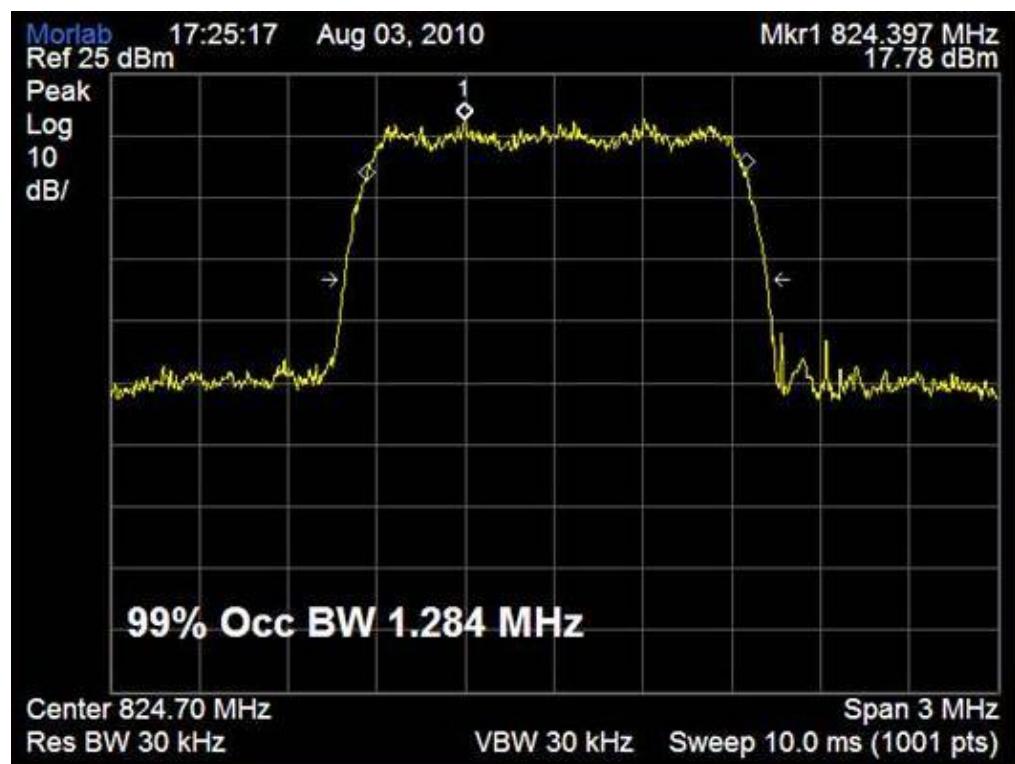


(Plot A: CDMA 800MHz Channel = 1013)

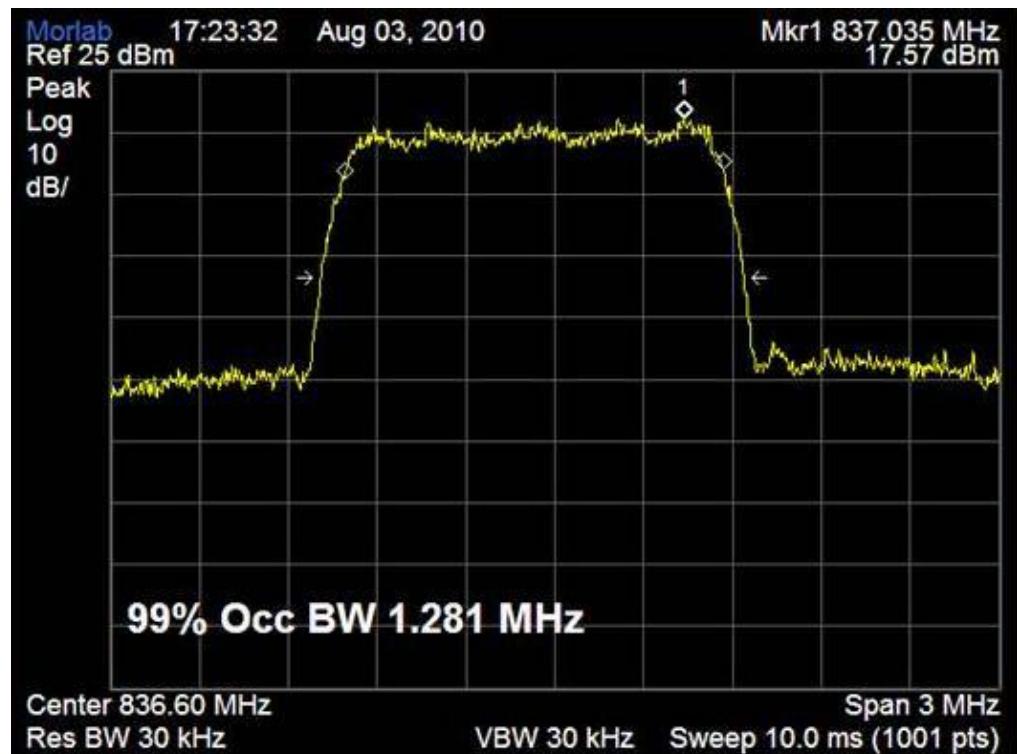


(Plot B: CDMA 800MHz Channel = 384)

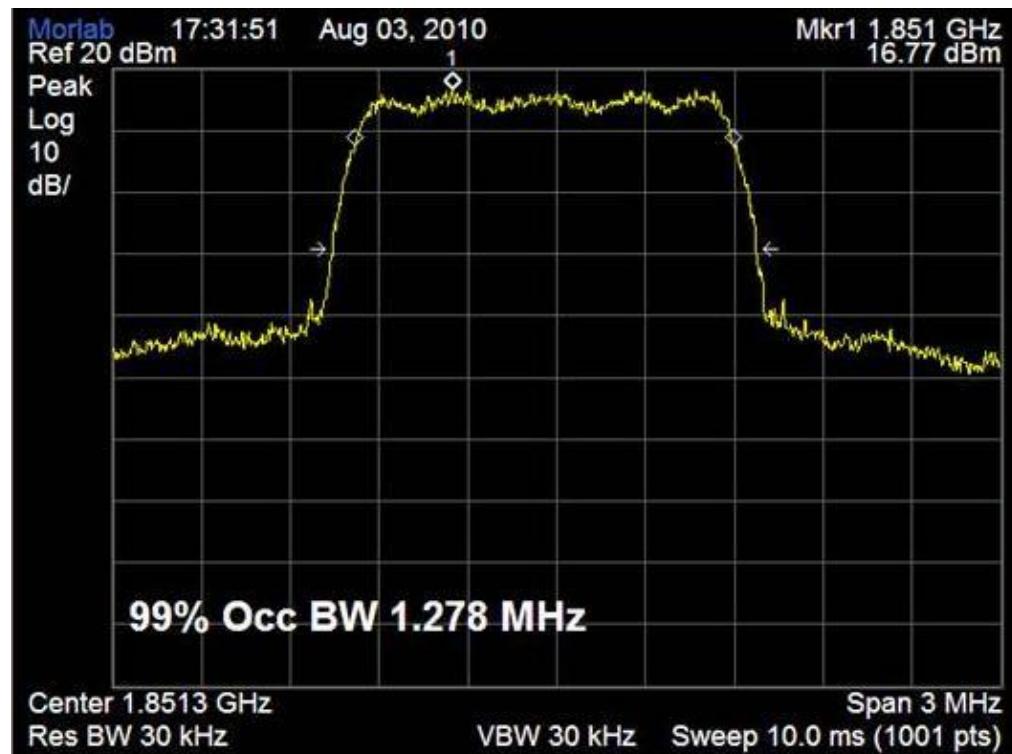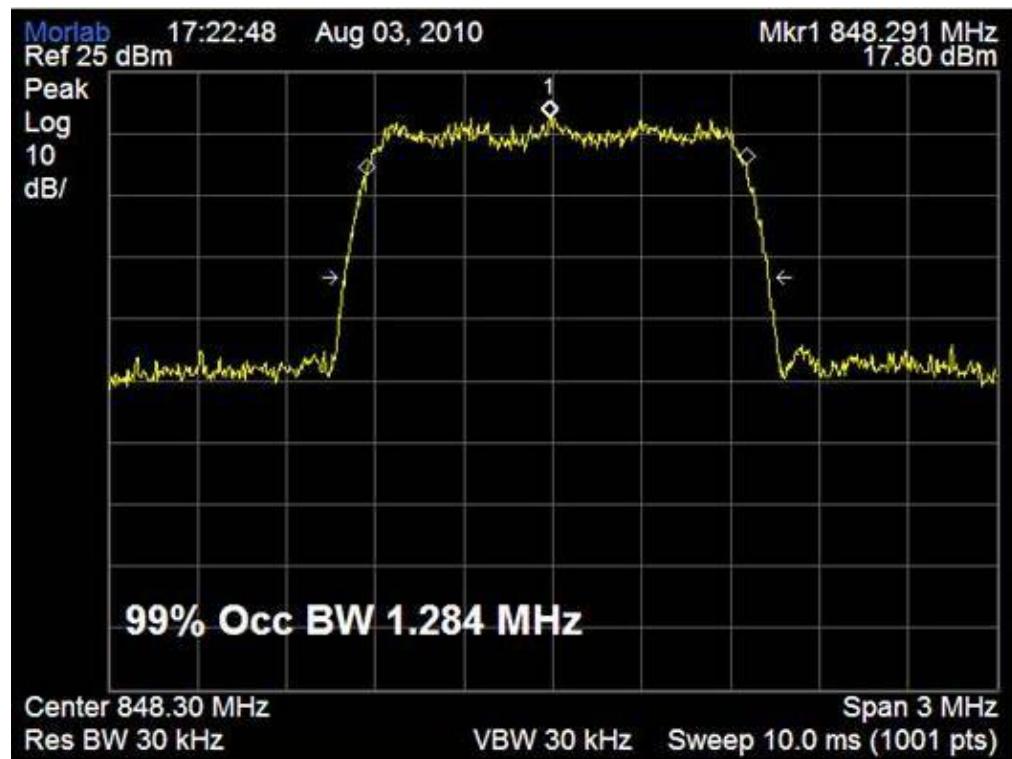

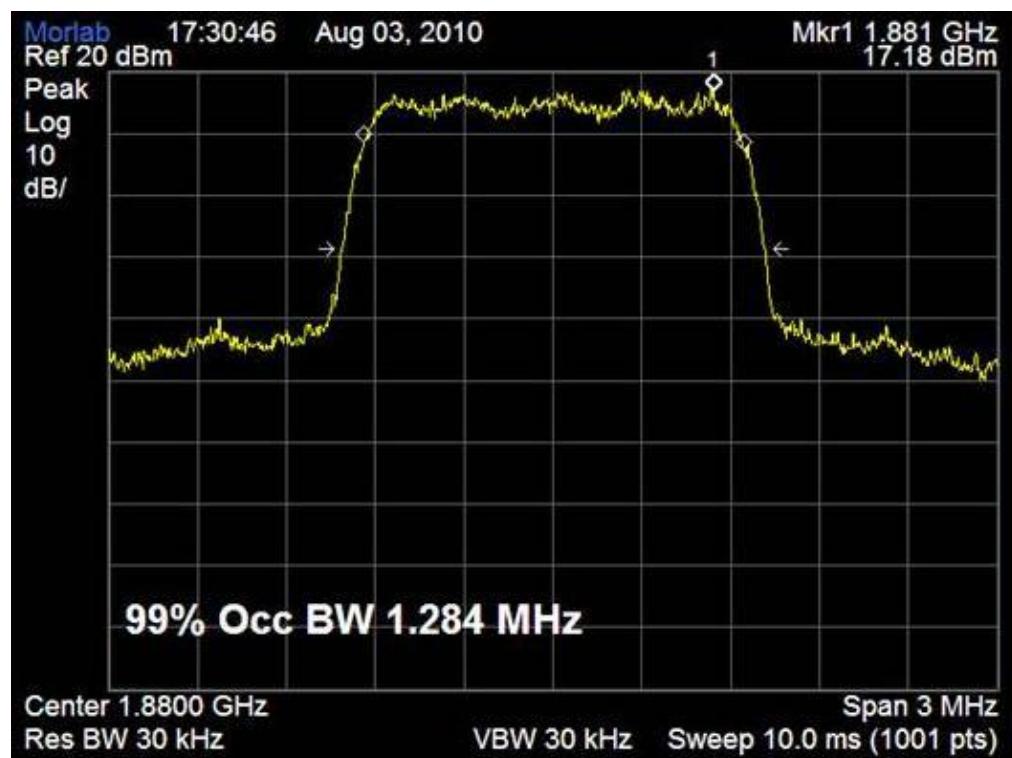

(Plot E: CDMA 1900MHz Channel = 600)

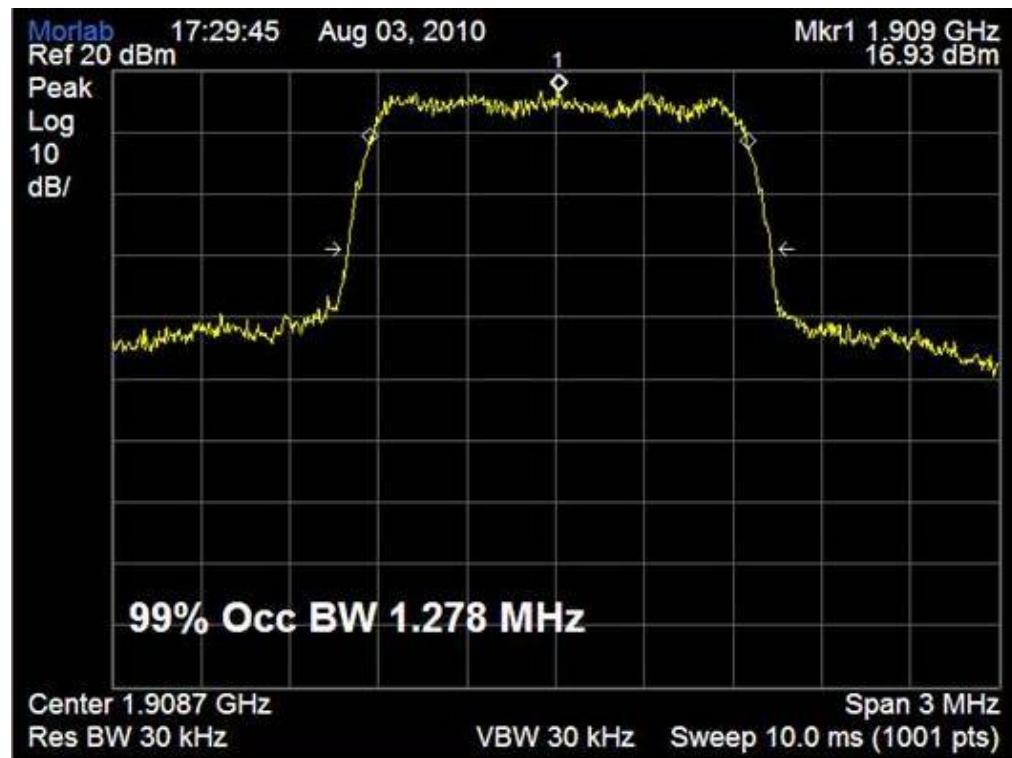

(Plot F: CDMA 1900MHz Channel = 1175)

### 3.5 Conducted Spurious Emission

#### 3.5.1 Requirement

According to FCC §22.917(a) and 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10\log(P)$  dB. This calculated to be -13dBm.

#### 3.5.2 Test Procedure

1. Perform test system setup as section 3.1.1.
2. Make a limit line whose value is -13dBm on the Spectrum Analyzer.
3. The lowest, middle and the highest channels are selected to perform tests respectively.
4. Set the RBW of the Spectrum Analyzer to 1MHz, and the measuring frequency range from 9kHz to 10<sup>th</sup> harmonic of the fundamental frequency (here used 10GHz); mark the fundamental frequency and the harmonics thereof; finally record the harmonics and the plot. Note: the measuring frequency range can be divided into several parts to perform tests.
5. In the 1MHz bands immediately outside and adjacent to the frequency block, the RBW of the Spectrum Analyzer was set to at least one percent of the emission bandwidth of the fundamental emission of the transmitter, e.g. for GSM modulated signal (here used): RBW=3kHz, for CDMA modulated signal: RBW=30kHz.



#### 3.5.3 Test Result


##### 3.5.3.1 Table for the Harmonics and Plots for the Spurious Emission

1. Table for the Harmonics:


No.	Channel	Frequency(MHz )	Measured Max Spurious Emission(dBm)	Limit(dBm)
CDMA 800MHz	1013	824.7	-22.12	-13
	384	836.52	-25.34	-13
	777	848.31	-19.67	-13
CDMA 1900MHz	25	1851.25	-36.13	-13
	600	1880.0	-34.88	-13
	1175	1908.75	-35.12	-13

2. Plot for Spurious Emission:

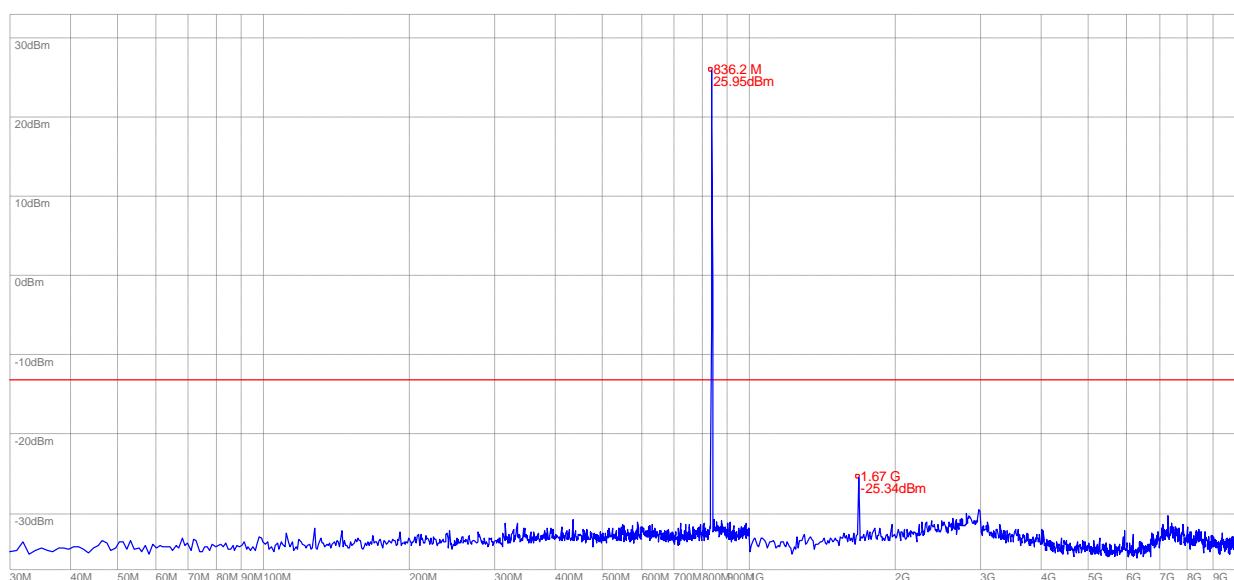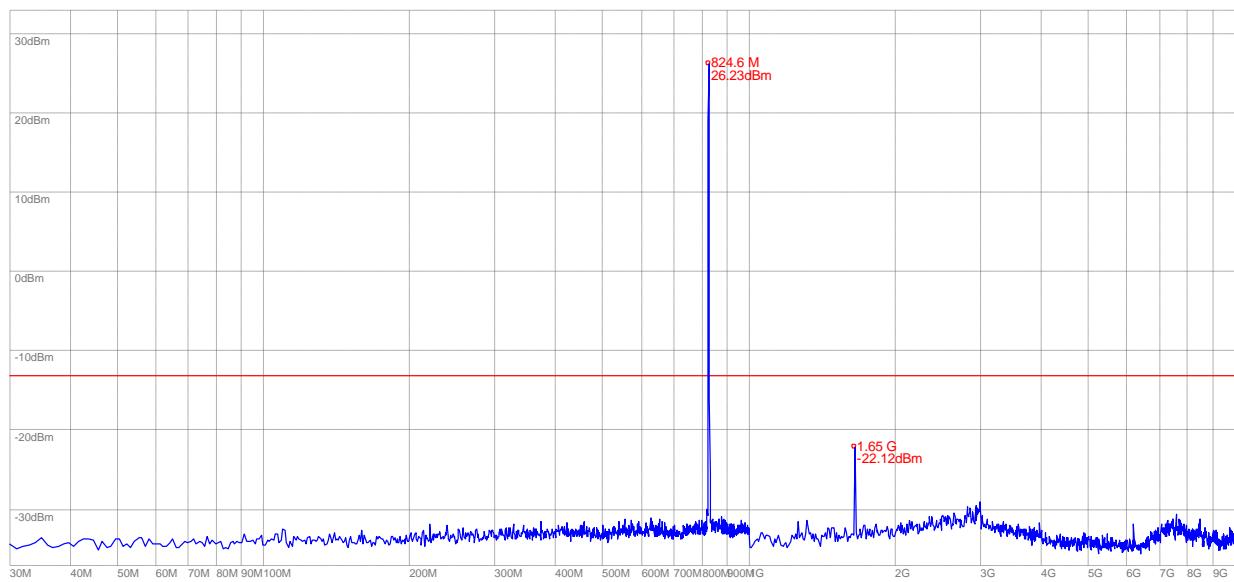


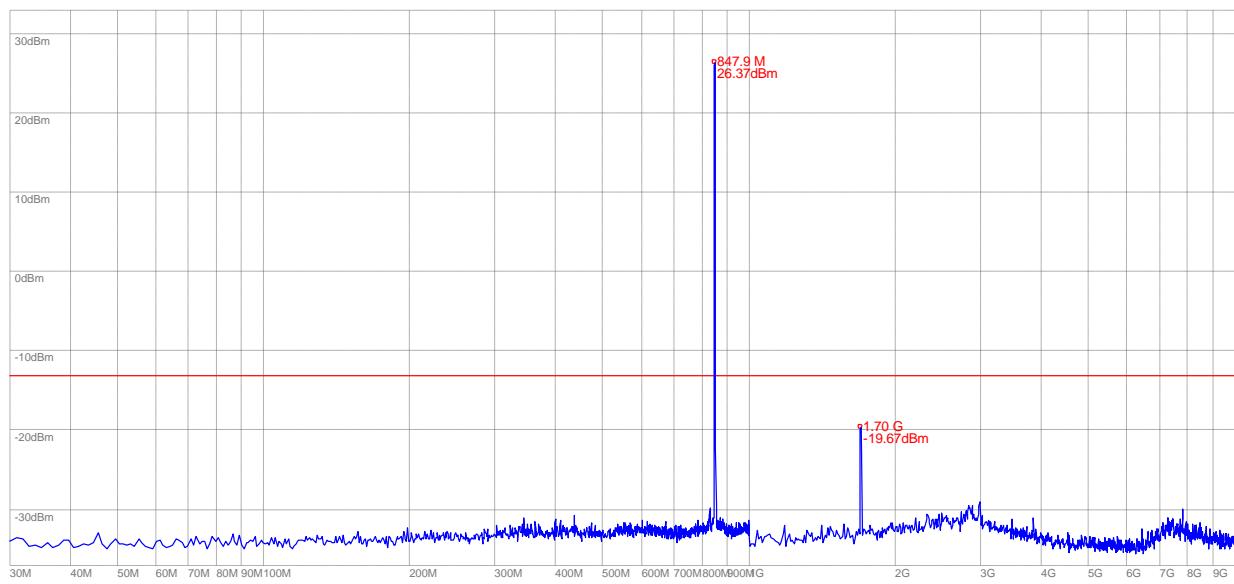


(Plot C: CDMA 800MHz Channel = 777, 30MHz to 3GHz)

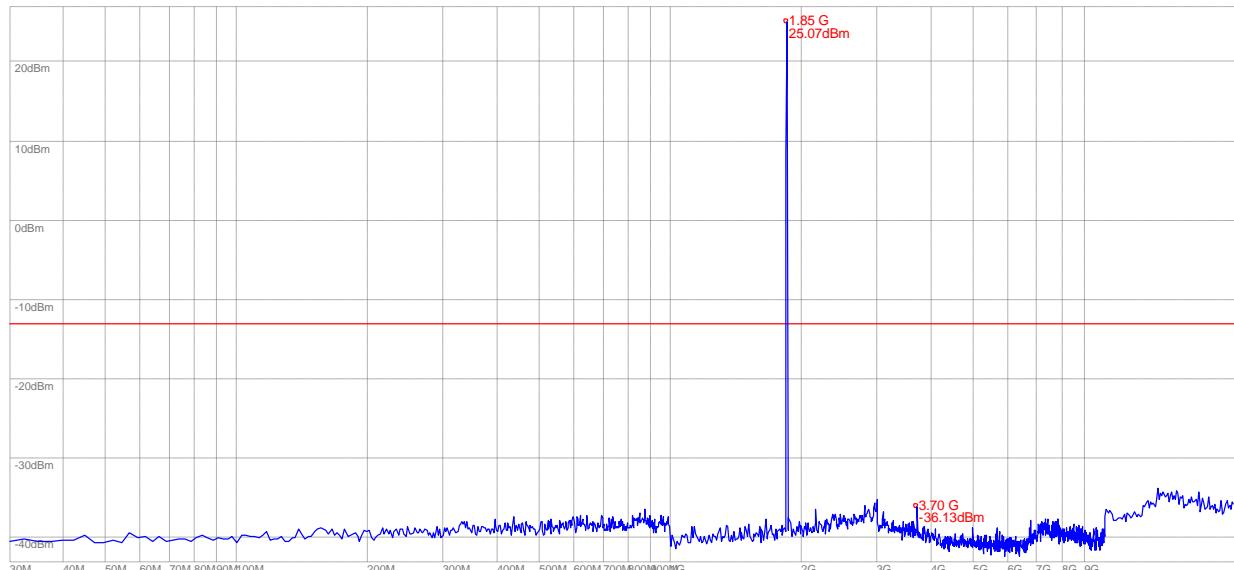

(Plot D: CDMA 1900MHz Channel = 25, 30MHz to 20GHz)

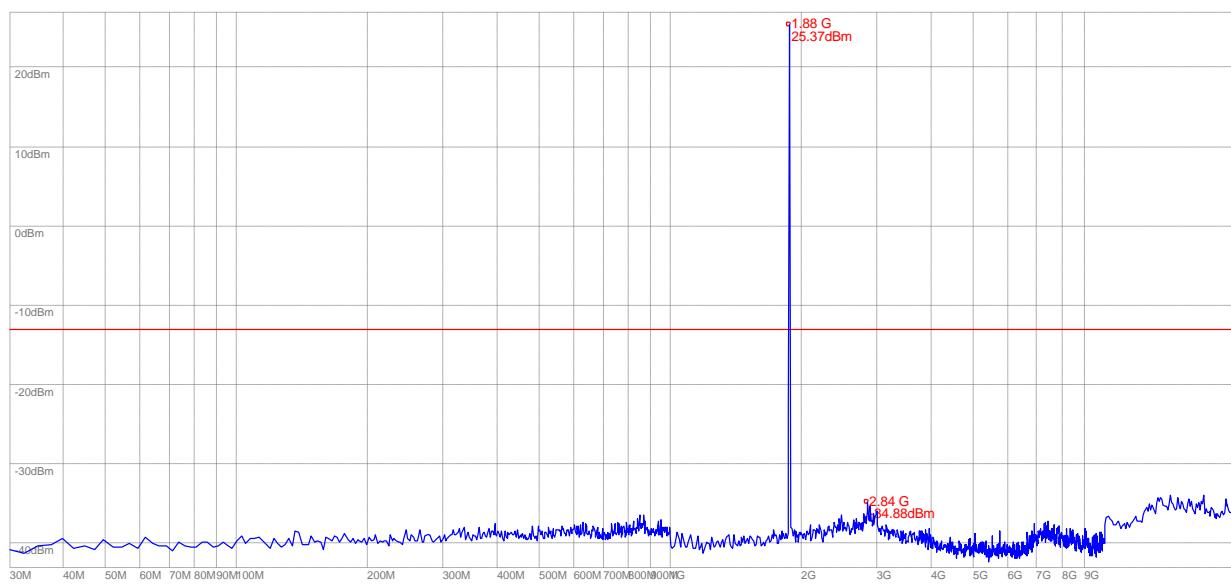

(Plot E: CDMA 1900MHz Channel = 600, 30MHz to 20GHz)

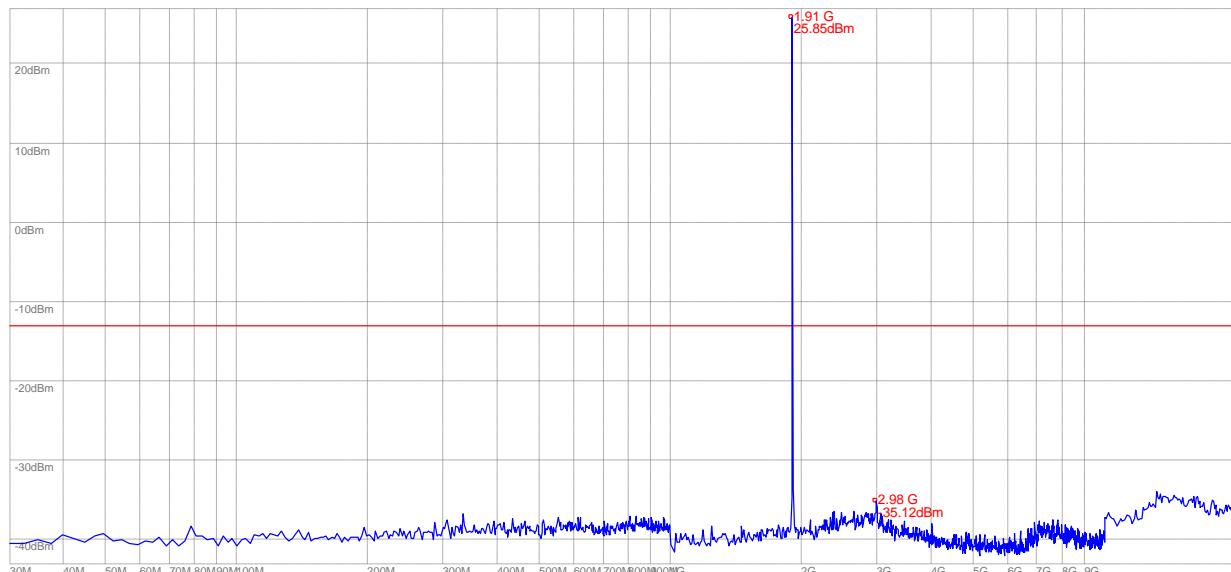

(Plot F: CDMA 1900MHz Channel = 1175, 30MHz to 20GHz)

## 3.6 Band Edge

### 3.6.1 Requirement

According to FCC section 22.917(b) and FCC section 24.238(b), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.


### 3.6.2 Test Result

The lowest and highest channels are tested to verify the band edge emissions.


#### 1. Test Verdict:

Band	Channe 1	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
CDMA 800MHz	1013	824.7	-16.42	Plot A	-13	PASS
	777	848.31	-13.31	Plot B		PASS
CDMA 1900MHz	25	1851.25	-23.46	Plot C	-13	PASS
	1175	1908.75	-23.24	Plot D		PASS


#### 2. Plot

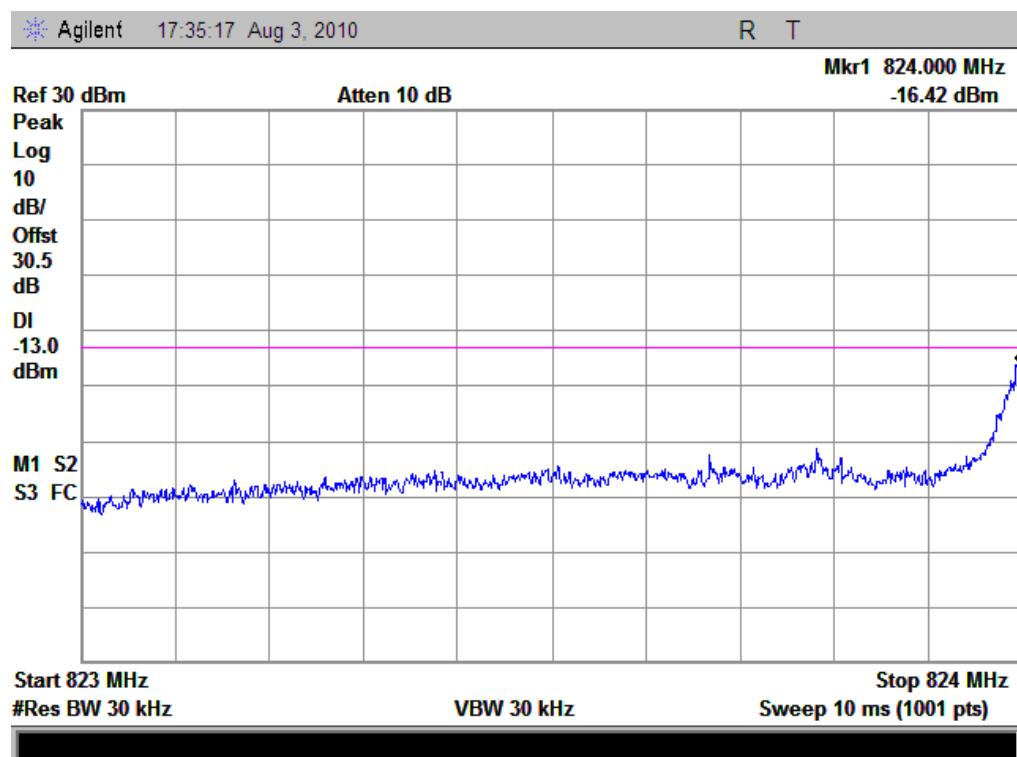


(Plot A: CDMA 800MHz Channel = 1013)

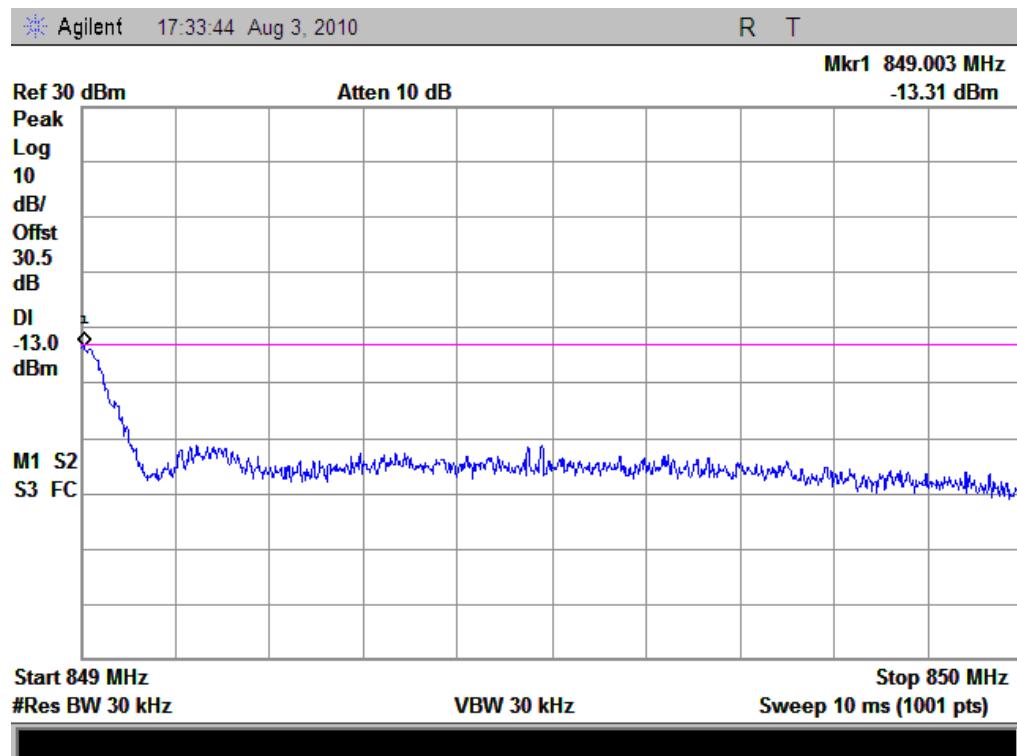

(Plot B: CDMA 800MHz Channel = 777)

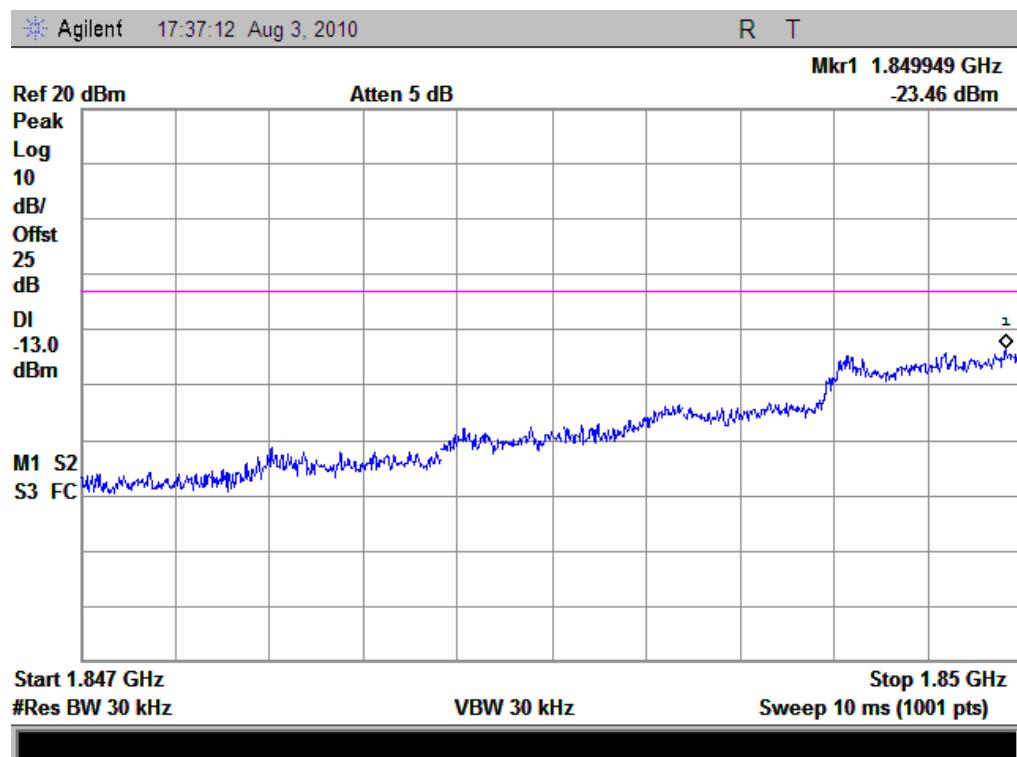

(Plot C: CDMA 1900MHz Channel = 25)

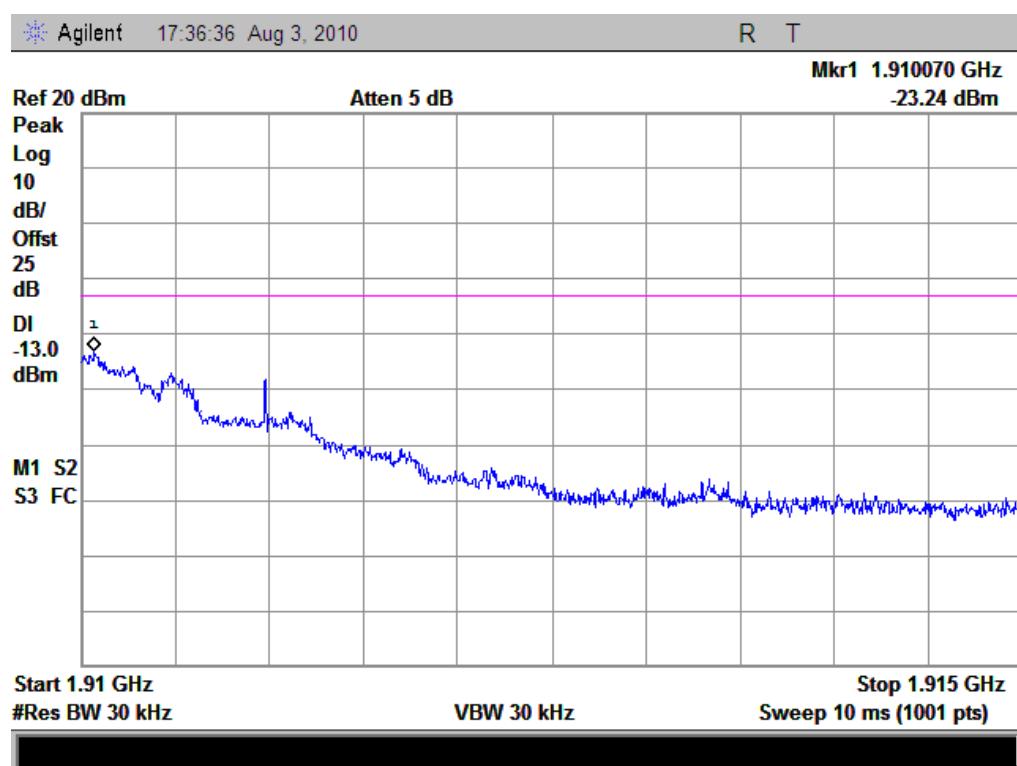

(Plot D: CDMA 1900MHz Channel = 1175)

### 3.7 Transmitter Radiated Power (EIRP/ERP)

#### 3.7.1 Requirement

According to FCC §22.913 and section 24.232, the ERP of Cellular mobile transmitters must not exceed 7 Watts and 2Watts.

#### 3.7.2 Test Procedure

1. Perform test system setup as section 3.1.2.
2. The resolution bandwidth of the Spectrum Analyzer is set to be comparable to the emission bandwidth of the transmitter, e.g. for GSM modulated signal (here used): RBW=VBW=1MHz, for CDMA modulated signal: RBW=VBW=3MHz.
3. The low, middle and the high channels are selected to perform tests respectively.
4. Employ the bi-log Test Antenna as the test system receiving antenna; set the polarization of the Test Antenna to be the same as that of the EUT transmitting antenna.
5. Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; actuate the Turn Table to turn from 0 degrees to 360 degrees to find the maximum reading via the Spectrum Analyzer, mark the peak; finally record the peak and the plot.

#### 3.7.3 Test Result

The substitution corrections are obtained as described below:

$$SCF_{Offset} = Pg(dBm) - \text{cable loss (dB)} + \text{antenna gain (dB)} - Pr(dBm)$$

Where Pg is the generator output power into the substitution antenna

Cable loss is the reduction in power between the generator and the substitution antenna

Antenna gain is the gain of the substitution antenna relative to an ideal half wave dipole antenna (for ERP) or isotropic radiator (for EIRP)

Pr is the spectrum analyzer reading

SCF<sub>Offset</sub> is substitution correction factor.

Calculation example:

Band	SCF <sub>Offset</sub>	Pg(dBm)	cable loss (dB)	antenna gain	Pr(dBm)
836M	38.7 dB	0 dBm	0.3 dB	7.94 dBd	-31.06 dBm
1880M	47 dB	0 dBm	1.3 dB	12.57 dBi	-35.73 dBm


During the test, the data of SCF<sub>Offset</sub> was added in the Test Spectrum Analyze, so Spectrum


Analyze reading is the final values which contain the data of  $SCF_{Offset}$ .

1. Test Verdict:

No.	Channel	Frequency (MHz)	Measured ERP/EIRP		Limit ERP/EIRP	
			dBm	W	dBm	W
CDMA	1013	824.7	28.17	0.66	38.5	7
800MH	384	836.52	28.51	0.71		
z	777	848.31	28.24	0.67		
CDMA	25	1851.25	25.13	0.33	33	2
1900M	600	1880.0	22.72	0.19		
Hz	1175	1908.75	22.72	0.19		

2. The plots:

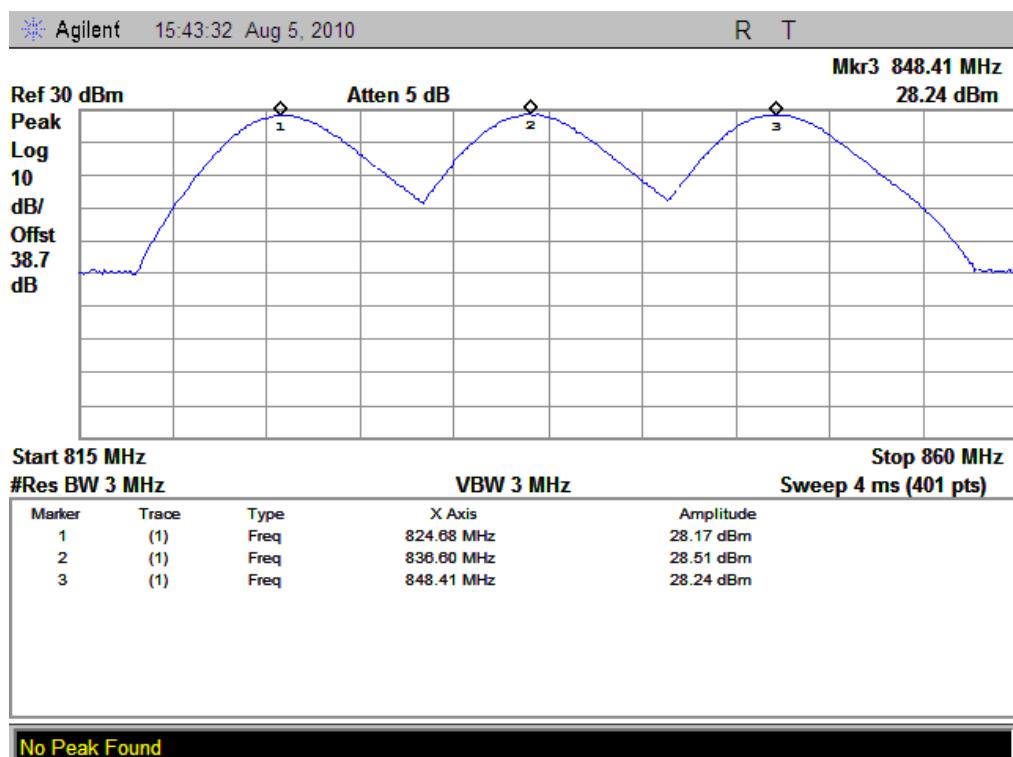

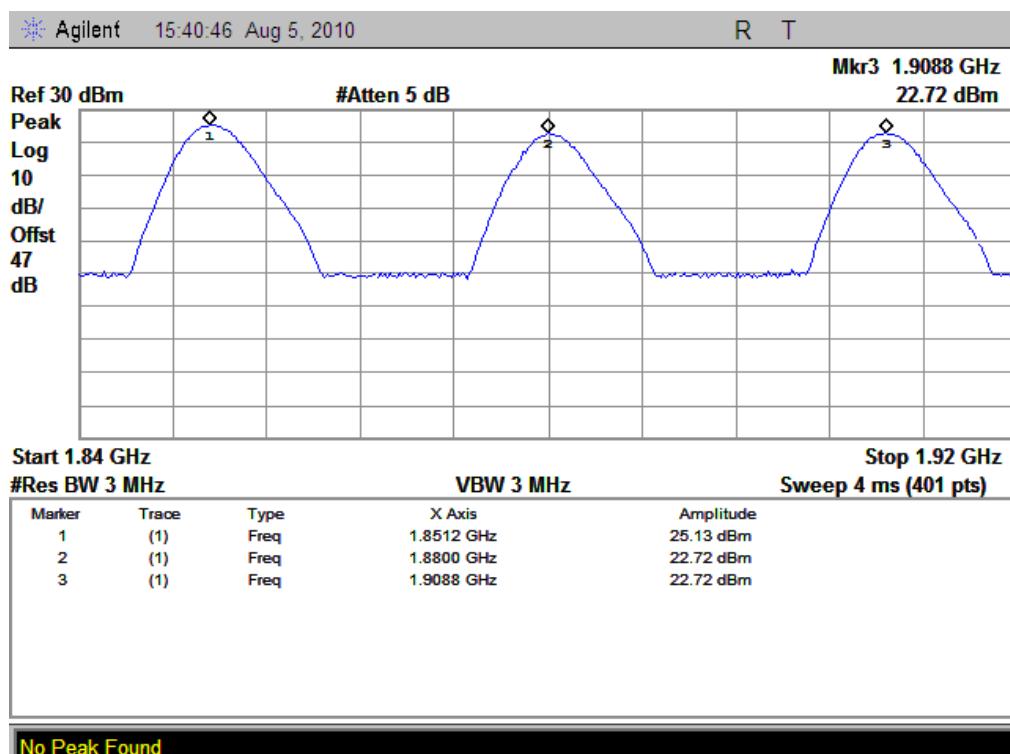

(Plot B: CDMA 1900MHz Channel = 25, 600, 1175)

## 3.8 Radiated Spurious Emission

### 3.8.1 Requirement

According to FCC §22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10*\log(P)$ dB. This calculated to be -13dBm.

### 3.8.2 Test Procedure

1. Perform test system setup as section 3.1.2.
2. Make a limit line whose value is -13dBm on the Spectrum Analyzer, and set the RBW of the Spectrum Analyzer to 1MHz.
3. The low, middle and the high channels are selected to perform tests respectively.
4. Employ the bi-log Test Antenna as the test system receiving antenna and set the frequency range of the Spectrum Analyzer from 30MHz to 3GHz.
5. The measurement is performed with the Test Antenna at both horizontal and vertical polarization respectively. Set the polarization of the Test Antenna to be horizontal.
6. Actuate the Turn Table to turn from 0 degrees to 360 degrees to find the maximum reading via the Spectrum Analyzer, mark the fundamental frequency and the harmonics thereof, after then record the harmonics and the plot.
7. Set the polarization of the Test Antenna to be vertical, then repeat step 6.
8. Employ the horn Test Antenna as the test system receiving antenna and set the frequency range of the Spectrum Analyzer from 3GHz to 10<sup>th</sup> harmonic of the fundamental frequency (here used 10GHz for CDMA800MHz and 20GHz for CDMA1900MHz).

### 3.8.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0 ° to 360 °, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)		Refer to Plot	Limit (dBm)	Verdict
			Test Antenna Horizontal	Test Antenna Vertical			
CDMA 800MHz	1013	824.7	-42.9	-40.9	Plot A.1/A.2	-13	PASS
	384	836.52	-49.2	-48.21	Plot B.1/B.2		PASS
	777	848.31	-52.1	-51.35	Plot C.1/C.2		PASS
CDMA 1900MHz	25	1851.25	-46.16	-25.3	Plot D.1/D.2	-13	PASS
	600	1880.0	-36.42	-30.52	Plot E.1/E.2		PASS
	1175	1908.75	-28.89	-27.39	Plot F.1/F.2		PASS

## 2. Test Plot for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.




(Plot A.1: CDMA 800MHz Channel = 1013, Test Antenna Horizontal)

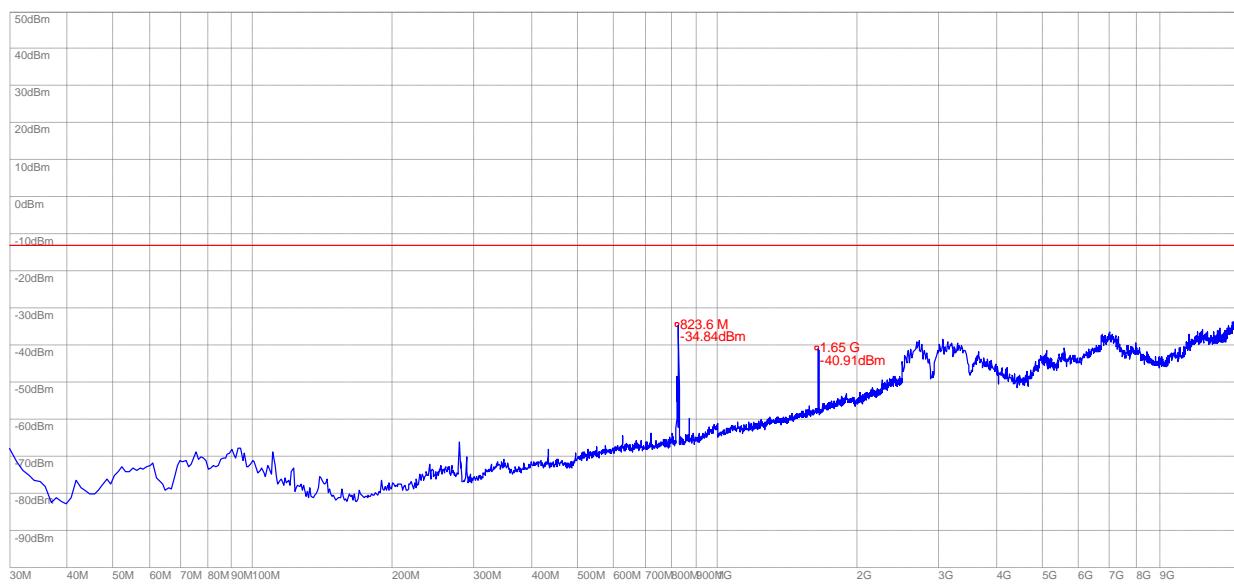


(Plot A.2: CDMA 800MHz Channel = 1013, Test Antenna Vertical)

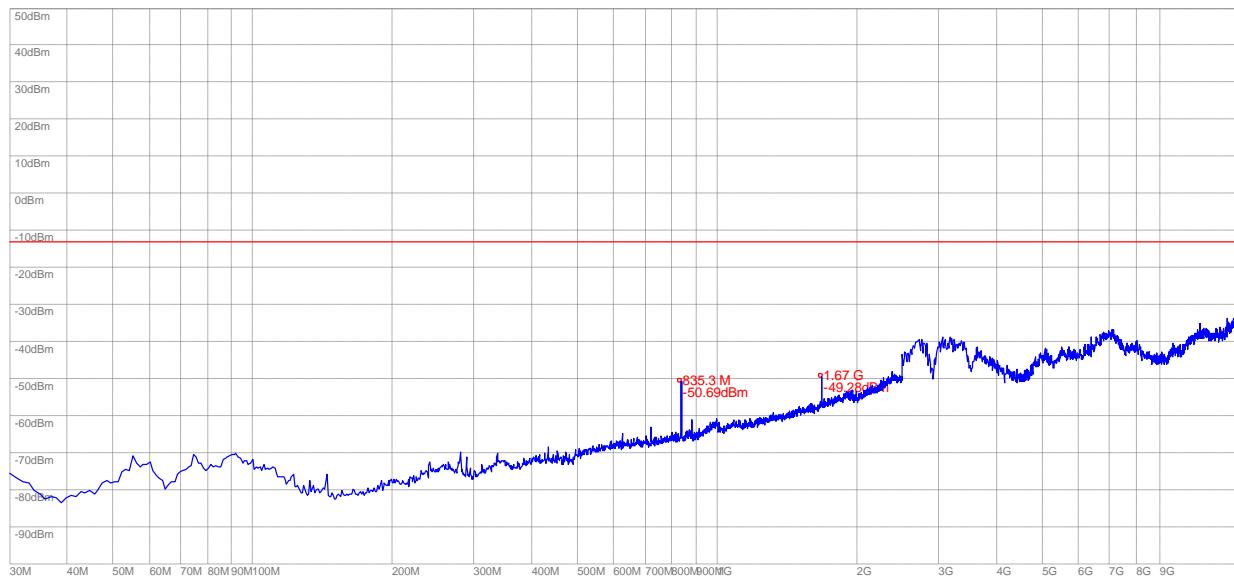


(Plot B.1: CDMA 800MHz Channel = 384, Test Antenna Horizontal)

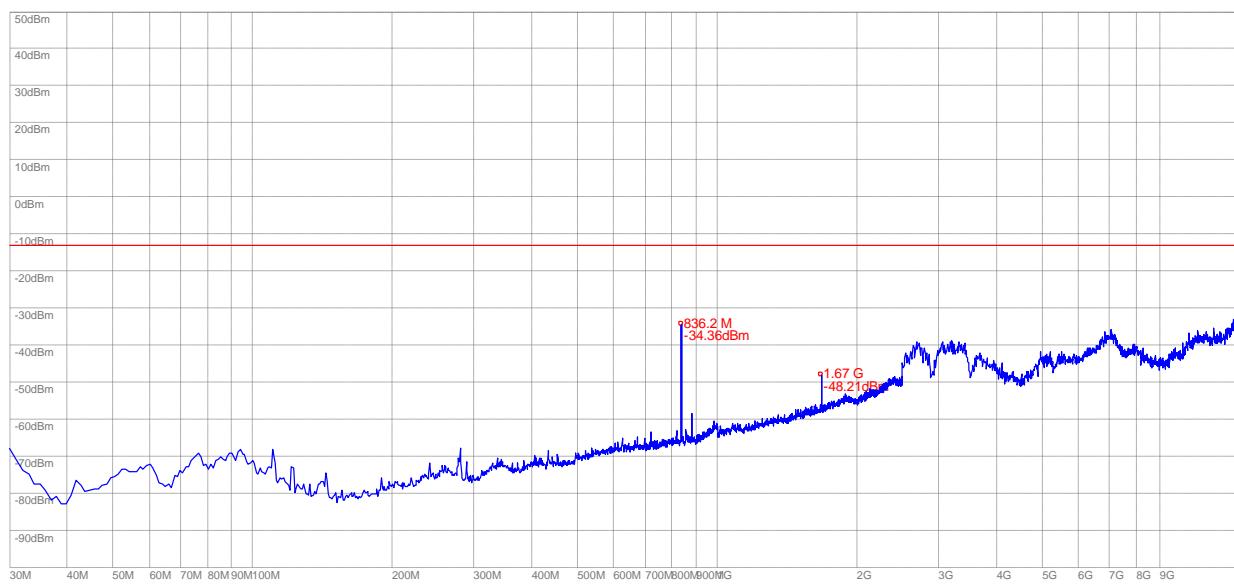


(Plot B.2: CDMA 800MHz Channel = 384, Test Antenna Vertical)

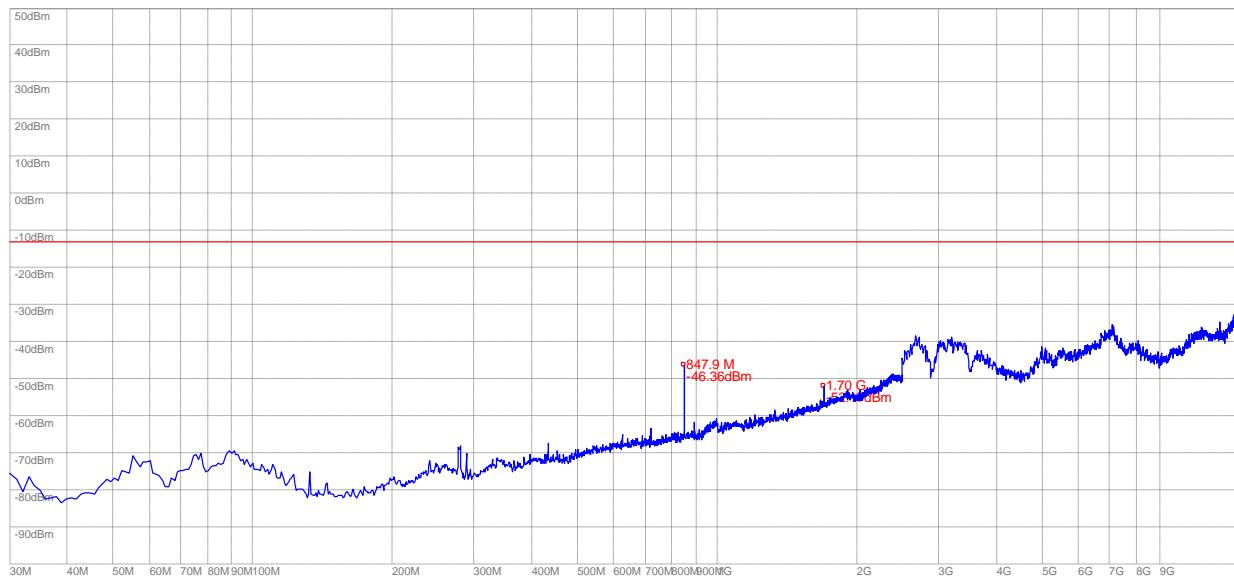


(Plot C.1: CDMA 800MHz Channel = 777, Test Antenna Horizontal)

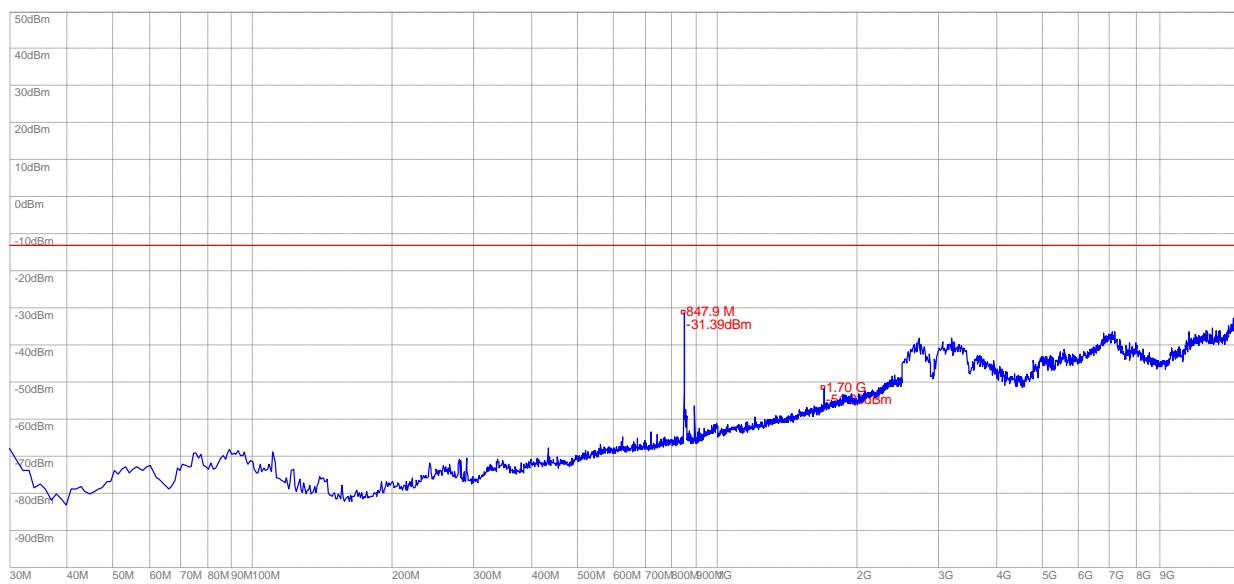


(Plot C.2: CDMA 800MHz Channel = 777, Test Antenna Vertical)

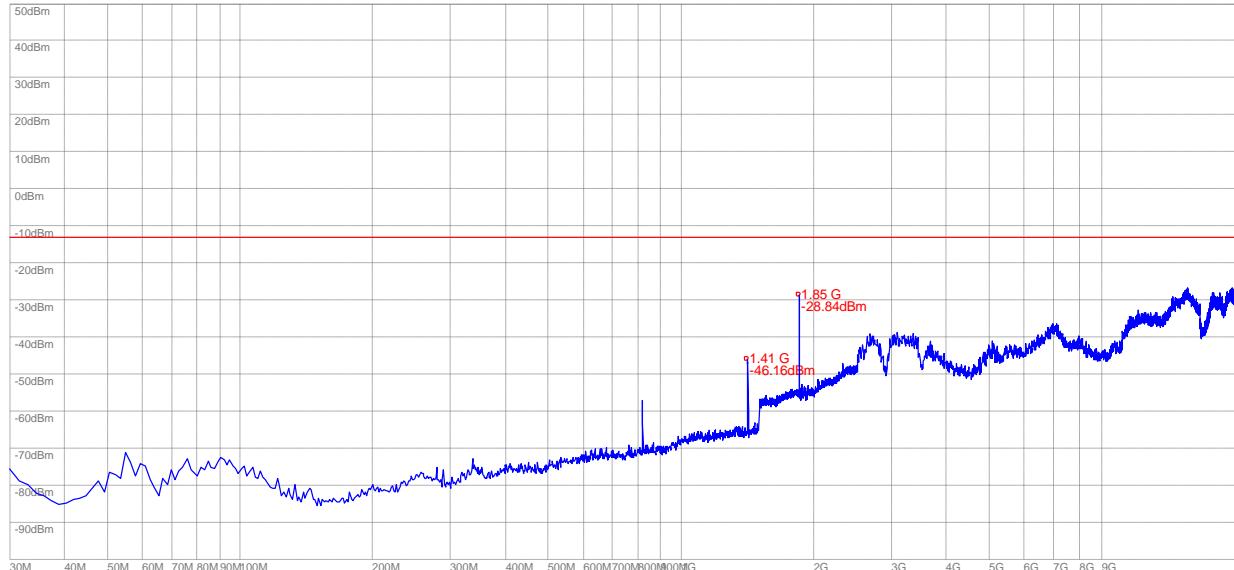


(Plot D.1: CDMA 1900MHz Channel = 25, Test Antenna Horizontal)

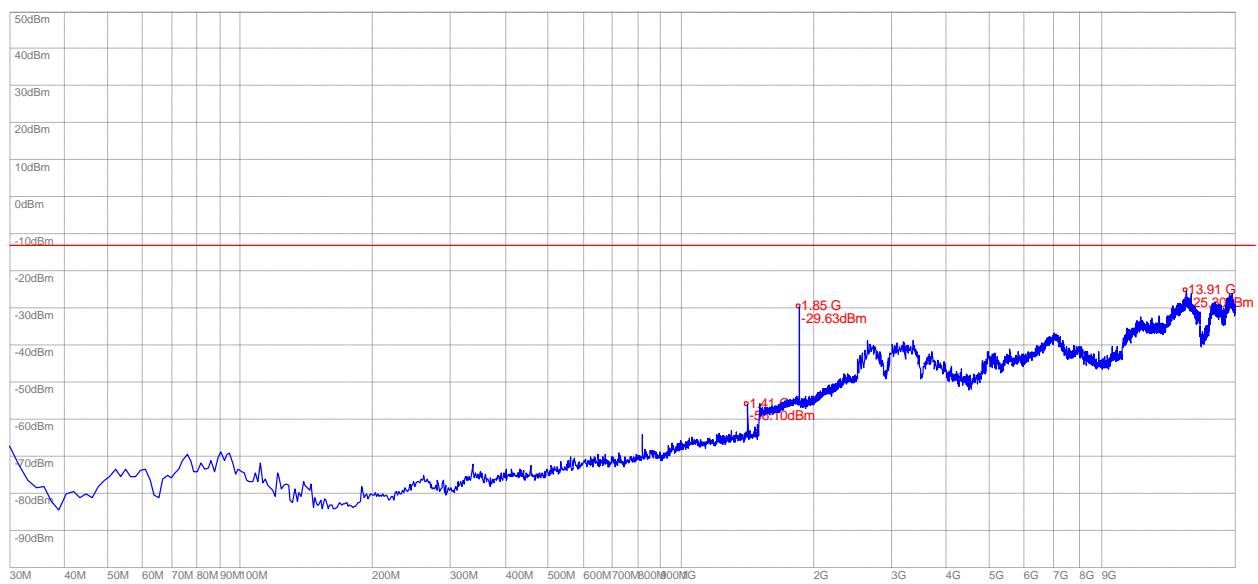


(Plot D.2: CDMA 1900MHz Channel = 25, Test Antenna Vertical)

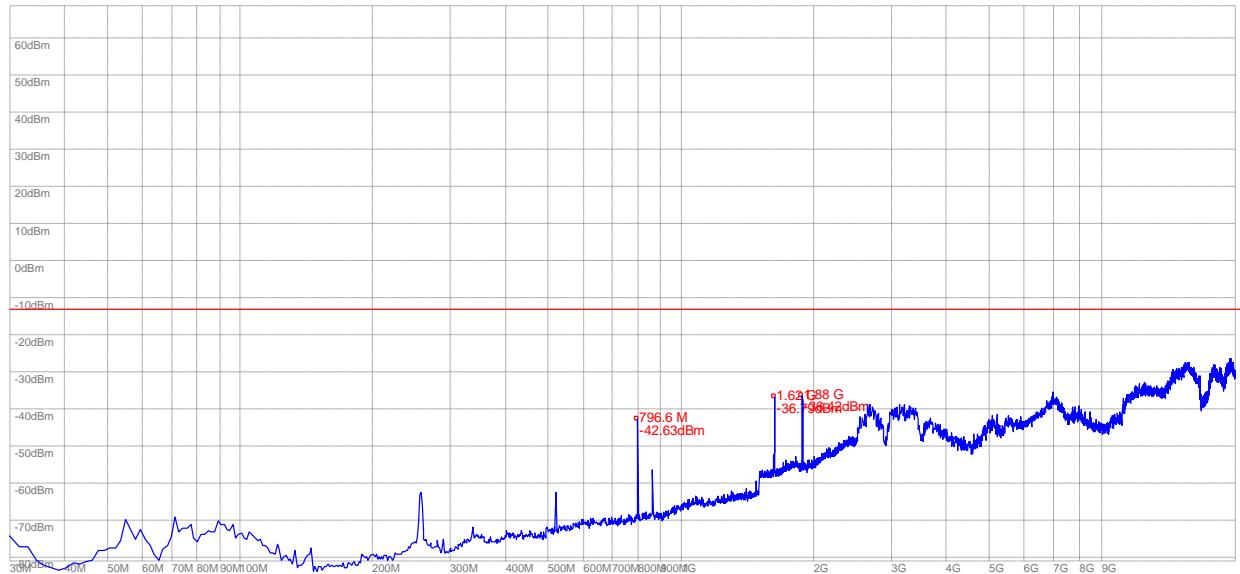


(Plot E.1: CDMA 1900MHz Channel = 600, Test Antenna Horizontal)

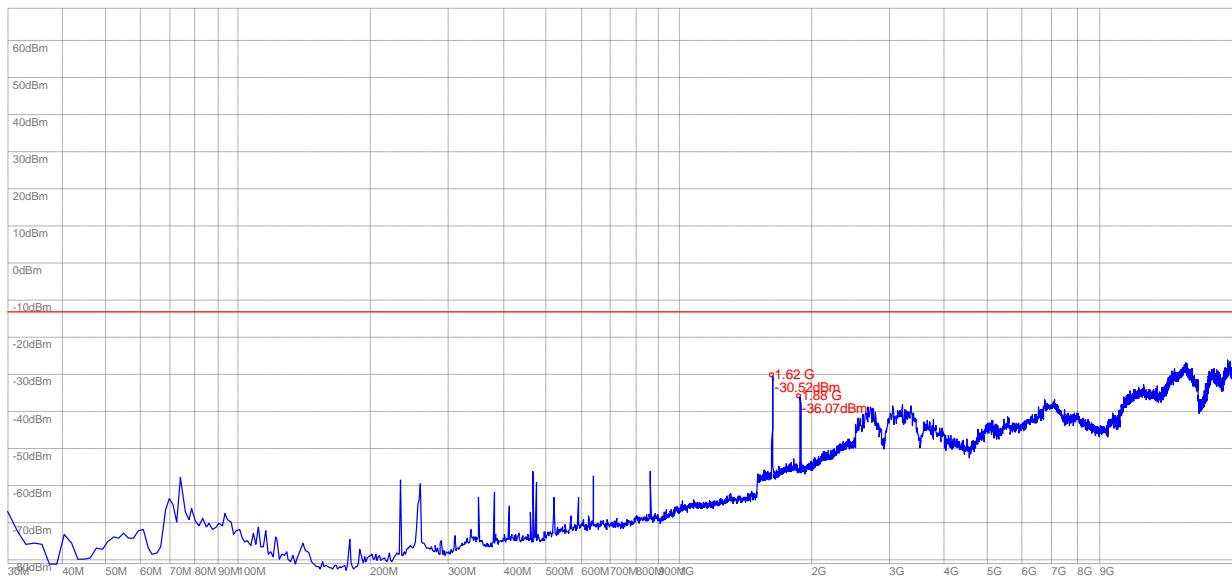

(Plot E.2: CDMA 1900MHz Channel = 600, Test Antenna Vertical)

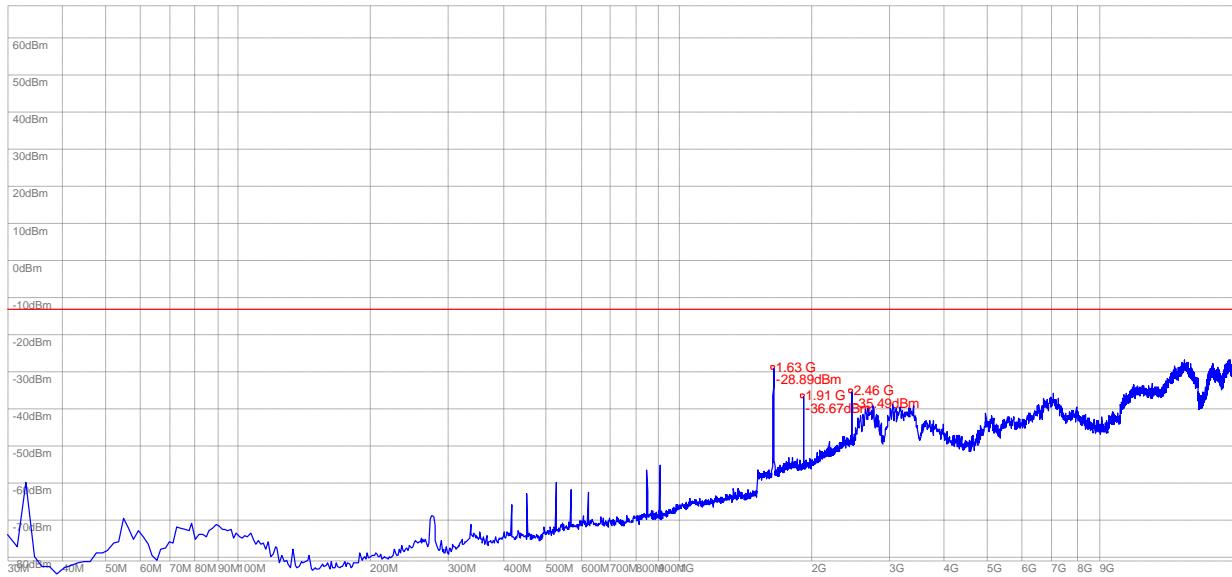

(Plot F.1: CDMA 1900MHz Channel = 1175, Test Antenna Horizontal)

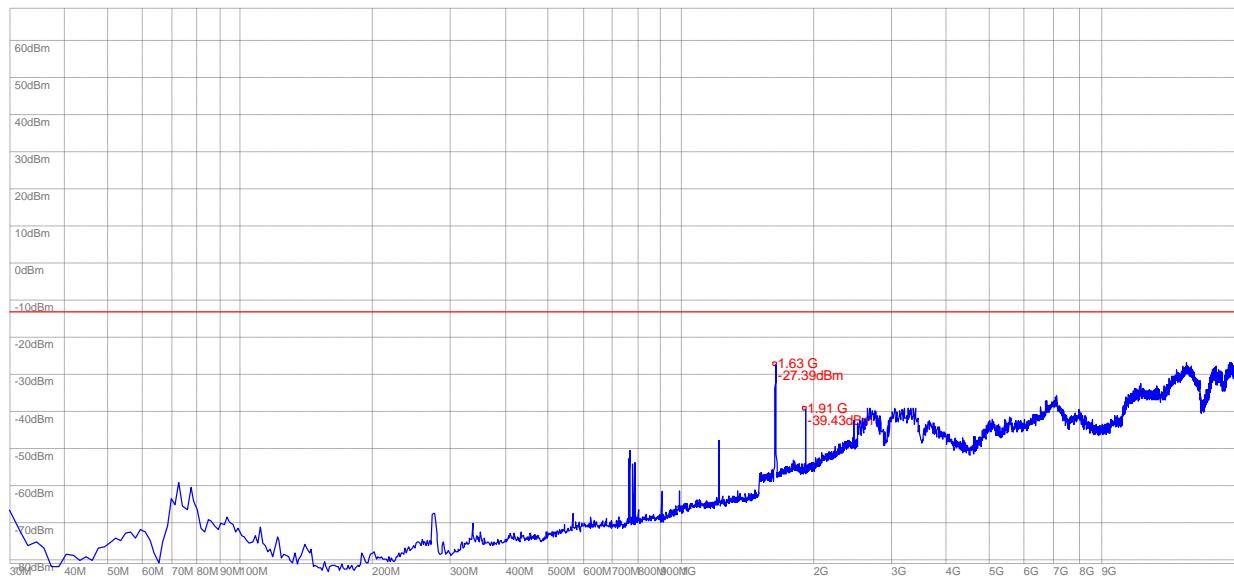

(Plot F2: CDMA 1900MHz Channel = 1175, Test Antenna Vertical)

## 3.9 Frequency Stability


### 3.9.1 Requirement

According to FCC section 22.355 and section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30 °C to +50 °C at intervals of not more than 10 °C.
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

### 3.9.2 Test Description

Test Setup:

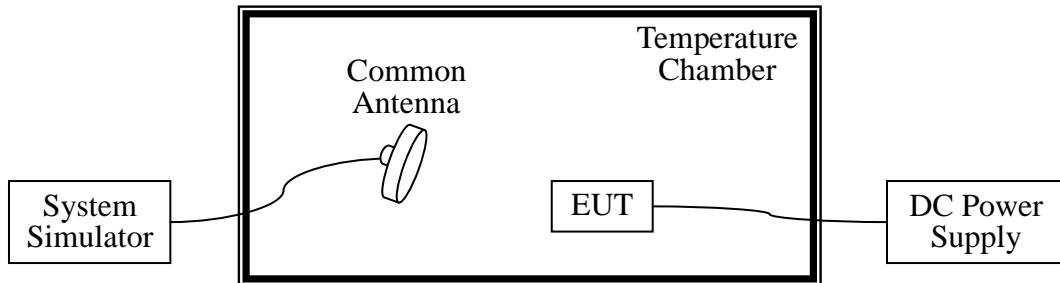

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power. A call is established between the EUT and the SS via a Common Antenna.

Equipments List please refer to section 2.3.2

### 3.9.3 Test Procedure

1. Perform test system setup as section 3.1.3.
2. Set the voltage of the DC Power Supply to normal supply voltage (here used 3.7V) and the temperature of the Temperature Chamber to vary from -30 °C to +50 °C at intervals of 10 °C.
3. At each temperature level, the EUT is powered off and kept in the Temperature Chamber for two hours. After sufficient stabilization, turn on the EUT, command it via the System Simulator (SS) to operate at the maximum output power i.e. A communication link is established between the EUT and the SS.

4. The low, middle and the high channels are selected to perform tests respectively.
5. The frequency deviation is measured (directly read from the SS, which can report the parameter) within three minutes.
6. Set the voltage of the DC Power Supply to high extreme supply voltage (here used 4.2V) and the temperature of the Temperature Chamber to normal (here used +22 °C), then repeat step 3 to 8.
7. Set the voltage of the DC Power Supply to low extreme supply voltage (here used 3.6V) and the temperature of the Temperature Chamber to normal (here used +22 °C), then repeat step 3 to 8.

### 3.9.4 Test Result

Band	Test Conditions		Frequency Deviation						Verdict	
	Power (VDC)	Temperature ( °C)	Channel = 1013 (824.7MHz)		Channel = 384 (836.52MHz)		Channel = 777 (848.31MHz)			
			Hz	Limits	Hz	Limits	Hz	Limits		
CDMA 800MHz	3.7	-30	-0.52	±2.5ppm	8.02	±2.5ppm	-2.05	±2.5ppm	PASS	
		-20	21.39		-2.36		13.06			
		-10	12.78		20.26		10.95			
		0	-22.05		13.37		-0.77			
		+10	20.31		-3.45		16.09			
		+20	6.93		14.78		9.54			
		+30	-5.31		-14.05		-7.09			
		+40	4.08		21.39		14.34			
		+50	15.36		-7.11		-7.62			
	4.2	+25	-1.37		22.07		15.76			
	3.6	+25	21.02		13.73		20.41			
CDMA 1900MHz	3.7	Test Conditions		Frequency Deviation						
		Power (VDC)	Temperature ( °C)	Channel = 25 (1851.2MHz)		Channel = 600 (1880.0MHz)		Channel = 1175 (1908.8MHz)		
				Hz	Limits	Hz	Limits	Hz	Limits	
		-30	12.50	±1ppm	20.18	±1ppm	22.05	±1ppm	PASS	
		-20	-3.59		-6.87		-1.42			
		-10	29.31		25.23		25.29			
		0	22.04		20.45		-3.59			
		+10	-2.77		-9.42		19.95			
		+20	18.53		27.02		24.50			
		+30	-5.32		15.67		-6.08			
		+40	29.07		-0.56		25.98			
		+50	30.15		18.97		31.05			
	4.2	+25	-3.97		-9.05		26.37			



Band	Test Conditions		Frequency Deviation						Verdict	
	Power (VDC)	Temperat ure ( °C)	Channel = 1013 (824.7MHz)		Channel = 384 (836.52MHz)		Channel = 777 (848.31MHz)			
			Hz	Limits	Hz	Limits	Hz	Limits		
	3.6	+25	16.89		23.09		-9.44			

\*\* END OF REPORT \*\*