


# ENGINEERING TEST REPORT



**Nova Remote Control  
Model No.: TNV433V1  
FCC ID: U77-TXN433V1**

*Applicant:*

**Centurion Systems (Pty) Ltd.**  
148 Epsom Avenue  
North Riding, Gauteng  
South Africa, 2169

*In Accordance With*

**FEDERAL COMMUNICATIONS COMMISSION (FCC)**  
**Part 15, Subpart C, Section 15.231**  
**Momentarily Operation at 433.92 MHz**

UltraTech's File No.: GESL-007F15C231

This Test report is Issued under the Authority of  
Tri M. Luu, Professional Engineer,  
Vice President of Engineering  
UltraTech Group of Labs

Date: July 05, 2007



Report Prepared by: JaeWook Choi

Tested by: Hung Trinh, RFI Technician

Issued Date: July 05, 2007

Test Dates: May 28 & 29, 2007

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4

Tel.: (905) 829-1570 Fax: (905) 829-8050

Website: [www.ultratech-labs.com](http://www.ultratech-labs.com), Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri@ultratech-labs.com](mailto:tri@ultratech-labs.com)



0685



31040/SIT



C-1376



46390-2049



200093-0



SL2-IN-E-1119R

## TABLE OF CONTENTS

<b>EXHIBIT 1</b>	<b>SUBMITTAL CHECK LIST.....</b>	<b>1</b>
<b>EXHIBIT 2</b>	<b>INTRODUCTION .....</b>	<b>2</b>
2.1	SCOPE.....	2
2.2	RELATED SUBMITTAL(S)/GRANT(S).....	2
2.3	NORMATIVE REFERENCES .....	2
<b>EXHIBIT 3</b>	<b>PERFORMANCE ASSESSMENT .....</b>	<b>3</b>
3.1	CLIENT INFORMATION .....	3
3.2	EQUIPMENT UNDER TEST (EUT) INFORMATION .....	3
3.3	EUT'S TECHNICAL SPECIFICATIONS.....	4
3.4	LIST OF EUT'S PORTS .....	4
3.5	ANCILLARY EQUIPMENT .....	4
<b>EXHIBIT 4</b>	<b>EUT OPERATION CONDITIONS AND CONFIGURATIONS DURING TESTS .....</b>	<b>5</b>
4.1	CLIMATE TEST CONDITIONS .....	5
4.2	OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS .....	5
<b>EXHIBIT 5</b>	<b>SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
5.1	LOCATION OF TESTS .....	6
5.2	APPLICABILITY & SUMMARY OF EMC EMISSIONS TEST RESULTS.....	6
5.3	MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES .....	6
<b>EXHIBIT 6</b>	<b>MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR EMC EMISSIONS.....</b>	<b>7</b>
6.1	TEST PROCEDURES .....	7
6.2	MEASUREMENT UNCERTAINTIES.....	7
6.3	MEASUREMENT EQUIPMENT USED.....	7
6.4	ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER .....	7
6.5	COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS .....	8
6.6	TRANSMITTER RADIATED EMISSIONS @ 3 METER – FUNDAMENTAL & SPURIOUS EMISSION [\$§15.231(b), 15.209 & 15.205].....	9
6.6.1	<i>Limits</i> .....	9
6.6.2	<i>Method of Measurements</i> .....	10
6.6.3	<i>Test Equipment List</i> .....	10
6.6.4	<i>Test Data</i> .....	11
6.7	EMISSION BANDWIDTH [§15.231(c)].....	14
6.7.1	<i>Limits</i> .....	14
6.7.2	<i>Method of Measurements</i> .....	14
6.7.3	<i>Test Equipment List</i> .....	14
6.7.4	<i>Test Data</i> .....	14
<b>EXHIBIT 7</b>	<b>MEASUREMENT UNCERTAINTY.....</b>	<b>16</b>
7.1	LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY .....	16
7.2	RADIATED EMISSION MEASUREMENT UNCERTAINTY .....	17

## EXHIBIT 1 SUBMITTAL CHECK LIST

Annex No.	Exhibit Type	Description of Contents	Quality Check (OK)
--	Test Report	<ul style="list-style-type: none"><li>Exhibit 1: Submittal check lists</li><li>Exhibit 2: Introduction</li><li>Exhibit 3: Performance Assessment</li><li>Exhibit 4: EUT Operation and Configuration during Tests</li><li>Exhibit 5: Summary of test Results</li><li>Exhibit 6: Measurement Data</li><li>Exhibit 7: Measurement Uncertainty</li></ul>	OK
1	Test Setup Photos	Power Line Conducted Emission and Radiated Emission Test Setup Photos	OK
2	External Photos of EUT	External EUT Photos	OK
3	Internal Photos of EUT	Internal EUT Photos	OK
4	Cover Letters	<ul style="list-style-type: none"><li>Certification Request Cover Letter</li><li>Agent Authorization Letter</li><li>Confidentiality Filing Request Letter</li></ul>	OK
5	ID Label/Location Info	<ul style="list-style-type: none"><li>ID Label</li><li>Location of ID Label</li></ul>	OK
6	Block Diagrams	Block Diagram	OK
7	Schematic Diagrams	Schematics	OK
8	Parts List/Tune Up Info	--	--
9	Operational Description	Operational Description	OK
10	RF Exposure Info	--	--
11	Users Manual	User Manual	OK

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: GESL-007F15C231

July 05, 2007

## EXHIBIT 2 INTRODUCTION

### 2.1 SCOPE

<b>Reference:</b>	FCC Part 15, Subpart C, Section 15.231
<b>Title:</b>	Telecommunication - Code of Federal Regulations, CFR 47, Part 15
<b>Purpose of Test:</b>	To gain FCC Certification Authorization for Section 15.231- Momentarily Operation at 433.92 MHz.
<b>Test Procedures:</b>	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
<b>Environmental Classification:</b>	Commercial, industrial or business environment

### 2.2 RELATED SUBMITTAL(S)/GRANT(S)

None.

### 2.3 NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-15	2006	Code of Federal Regulations – Telecommunication
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz
CISPR 22 CISPR 22+A1 EN 55022	2003-04-10 2004-10-14 2003	Information Technology Equipment - Radio Disturbance Characteristics – Limits and Methods of Measurement
CISPR 16-1-1	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-2-1	2004	Specification for radio disturbance and immunity measuring apparatus and methods. Part 2-1: Conducted disturbance measurement

## EXHIBIT 3 PERFORMANCE ASSESSMENT

### 3.1 CLIENT INFORMATION

APPLICANT	
<b>Name:</b>	Centurion Systems (Pty) Ltd.
<b>Address:</b>	148 Epsom Avenue North Riding, Gauteng South Africa, 2169
<b>Contact Person:</b>	Mr. Ian Rozowsky Phone #: +27.11.699.2434 Fax #: +27.11.704.3412 Email Address: <a href="mailto:ian.rozowsky@centurionsystems.co.za">ian.rozowsky@centurionsystems.co.za</a>

MANUFACTURER	
<b>Name:</b>	Centurion Systems (Pty) Ltd.
<b>Address:</b>	148 Epsom Avenue North Riding, Gauteng South Africa, 2169
<b>Contact Person:</b>	Mr. Ian Rozowsky Phone #: +27.11.699.2434 Fax #: +27.11.704.3412 Email Address: <a href="mailto:ian.rozowsky@centurionsystems.co.za">ian.rozowsky@centurionsystems.co.za</a>

### 3.2 EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information has been supplied by the applicant.

<b>Brand Name</b>	Nova
<b>Product Name:</b>	Nova Remote Control
<b>Model Name or Number:</b>	TNV433V1
<b>Serial Number:</b>	Test Sample
<b>Type of Equipment:</b>	Low Power Transmitter
<b>Input Power Supply Type:</b>	12 VDC
<b>Primary User Functions of EUT:</b>	Remote keyless entry

### 3.3 EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER		
<b>Equipment Type:</b>	Portable	
<b>Intended Operating Environment:</b>	Commercial	
<b>Power Supply Requirement:</b>	Internal 12V GP23A battery	
<b>RF Output Power Rating:</b>	73.80 Peak dB $\mu$ V/m @ 3 m	
<b>Operating Frequency Range:</b>	433.92 MHz	
<b>Duty Cycle:</b>	43.25 %	
<b>20 dB Bandwidth:</b>	9.96 kHz	
<b>Modulation Type:</b>	OOK	
<b>Antenna Connector Type:</b>	Integral antenna (part of the printed circuit board) housed inside the enclosure.	
<b>Antenna Description:</b>	Manufacturer:	Centurion Systems (Pty) Ltd.
	Type:	PCB Trace
	Model:	Integral
	Gain:	0 dBi
	Frequency Range:	433.92 MHz

### 3.4 LIST OF EUT'S PORTS

None.

### 3.5 ANCILLARY EQUIPMENT

None.

## EXHIBIT 4 EUT OPERATION CONDITIONS AND CONFIGURATIONS DURING TESTS

### 4.1 CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power Input Source:	12 VDC

### 4.2 OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

<b>Operating Modes:</b>	For testing purpose only, the EUT was set to transmit continuously by means of special setting.
<b>Special Test Software:</b>	None.
<b>Special Hardware Used:</b>	None.
<b>Transmitter Test Antenna:</b>	The EUT is tested with the antenna fitted in a manner typical of normal intended use as integral antenna equipment.

<b>Transmitter Test Signal</b>	
<b>Frequency:</b>	433.92 MHz

## EXHIBIT 5 SUMMARY OF TEST RESULTS

### 5.1 LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

AC Power Line Conducted Emissions were performed in UltraTech's shielded room, 24'(L) by 16'(W) by 8'(H).

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049A-2). Last Date of Site Calibration: June 20, 2006.

### 5.2 APPLICABILITY & SUMMARY OF EMC EMISSIONS TEST RESULTS

FCC Rules	Test Requirements	Compliance (Yes/No)
15.107(a)	AC Power Line Conducted Emission	N/A
15.203	Antenna requirement (The transmitter shall use a transmitting antenna that is an integral part of the device).	Yes
15.231(a)	Periodic Operation Provisions	Yes
15.231(b)	Transmitter Radiated Emissions - Fundamental, Harmonic and Spurious	Yes
15.231(c)	20 dB Bandwidth	Yes

### 5.3 MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

---

## EXHIBIT 6 MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

### 6.1 TEST PROCEDURES

Details of test methods and procedures can be found in Ultratech Test Procedures, File # ULTR P001-2004 and ANSI C63.4.

### 6.2 MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

### 6.3 MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C64.3 and CISPR 16-1-1.

### 6.4 ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER

The essential function of the EUT is primarily for LED lighting controller with temperature monitoring capability.

## 6.5 COMPLIANCE WITH FCC PART 15 – GENERAL TECHNICAL REQUIREMENTS

FCC Section	FCC Rules	Manufacturer's Clarification
§15.231(a)	The intentional radiator restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal.	The transmitter sends a short control signal to activate a remote receiver, typically used to open or close a garage door or gate.
§15.231(a)(1)	A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.	Transmission cease within 100msec of a button being released.
§15.231(a)(2)	A transmitter activated automatically shall cease transmission within 5 seconds after activation.	The transmitter cannot be activated automatically.
§15.231(a)(3)	Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions do not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed 2 seconds per hour.	N/A
§15.231(a)(4)	Internal Radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.	N/A
§15.231(a)(5)	Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.	N/A

## 6.6 TRANSMITTER RADIATED EMISSIONS @ 3 METER – FUNDAMENTAL & SPURIOUS EMISSION [§§15.231(b), 15.209 & 15.205]

### 6.6.1 Limits

The RF radiated emissions measured at 3 m distance shall not exceed the field strength below:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emission (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500 **	50 to 150 **
174 - 260	1,500	150
260 - 470	1,500 to 5,000 **	150 to 500 **
Above 470	5,000	500

\*\* linear interpolations

Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters =  $22.72727(F) - 2454.545$ ; for the band 260-470 MHz, uV/m at 3 meters =  $16.6667(F) - 2833.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

Emissions within the restricted bands specified in §15.205(a) shall not exceed the general radiated emission limits specified in §15.209(a).

### 47 CFR 15.205(a) - Restricted Frequency Bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: GESL-007F15231

July 05, 2007

#### 47 CFR 15.209(a) - Field Strength Limits within Restricted Frequency Bands

Frequency (MHz)	Field Strength Limits (microvolts/m)	Distance (Meters)
0.009 - 0.490	2,400 / F (KHz)	300
0.490 - 1.705	24,000 / F (KHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

#### 6.6.2 Method of Measurements

Refer to ULTRATECH Test Procedures, File # ULTR P001-2004 and ANSI C63.4.

#### 6.6.3 Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer
Microwave Amplifier	Hewlett Packard	HP 83017A	3008A00769	1 GHz to 26.5 GHz
Biconilog Antenna	EMCO	3143	1029	20 MHz to 2 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz

#### 6.6.4 Test Data

##### Remarks:

- The measuring receiver shall be tuned over the frequency range 30 MHz to 4.5 GHz.
- All spurious emissions that are in excess of 20 dB below the specified limit shall be recorded.
- The peak-average correction factor was obtained from the duty cycle calculation.

$$Tx_{ON} = (57 \times 370.74 \mu s) + (32 \times 691.38 \mu s) = 21.13ms + 22.12ms = 43.25ms$$

$$\frac{Tx_{ON}}{Tx_{ON+OFF}} = \frac{43.25ms}{100ms} = 0.4325 = 43.25\%$$


Duty Cycle Correction Factor for E-Field =  $20 \cdot \log(0.4325) = -7.28dB$

See the following duty cycle plots for details.

Frequency (MHz)	Peak E-Field @3m (dB $\mu$ V/m)	Average E-Field @3m (dB $\mu$ V/m)	Antenna Plane (V/H)	§15.231 Limits @3m (dB $\mu$ V/m)	§15.209(a) Limits @3m (dB $\mu$ V/m)	Margin (dB)
433.92	73.77	66.5	V	80.8	--	-14.3
433.92	73.80	66.5	H	80.8	--	-14.3
867.84	55.92	48.6	V	60.8	46.0	-12.2
867.84	57.60	50.3	H	60.8	46.0	-10.5
1301.76*	59.87	52.6	V	60.8	54.0	-1.4
1301.76*	58.11	50.8	H	60.8	54.0	-3.2
1735.68	51.04	43.8	V	60.8	54.0	-17.1
1735.68	48.14	40.9	H	60.8	54.0	-20.0
2169.60	46.19	38.9	V	60.8	54.0	-21.9
2169.60	46.52	39.2	H	60.8	54.0	-21.6

\* Restricted Frequency Bands.

**Plot 6.6.4.1. Duty Cycle**  
Pulse Train in 100 ms

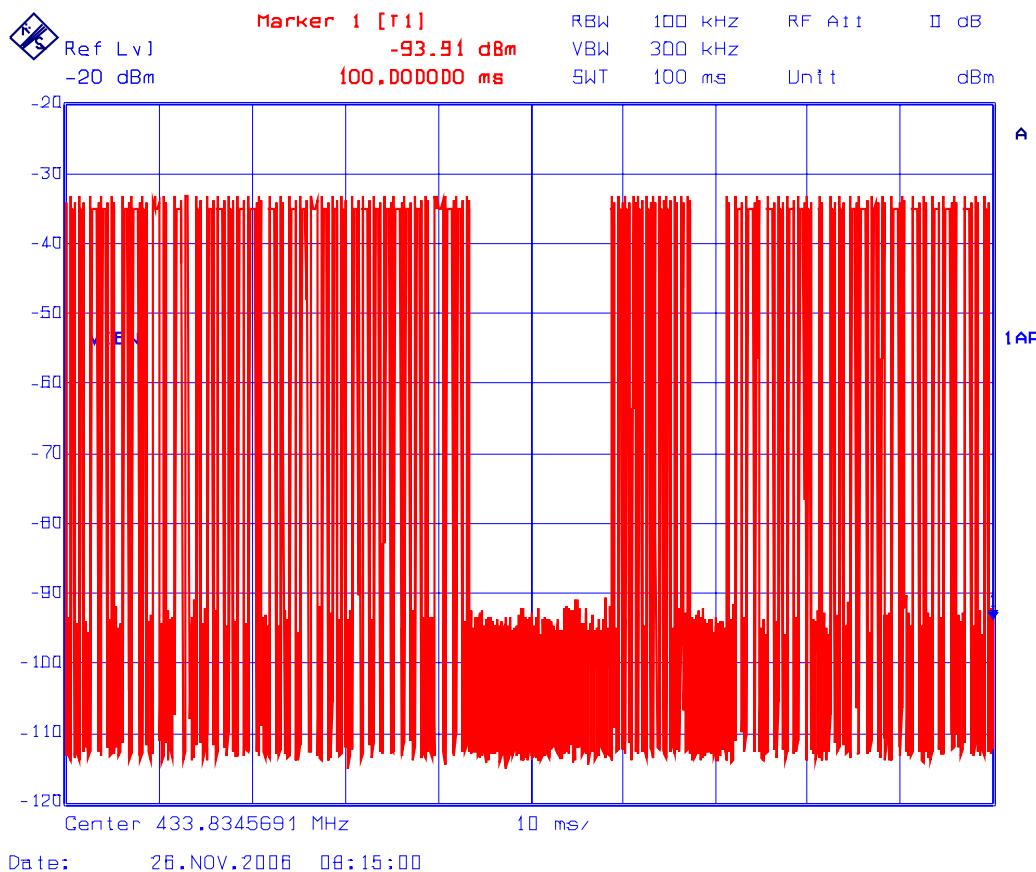


**Duty Cycle in 100 ms:**  
 $Tx_{ON} = (57 \times 370.74 \mu s) + (32 \times 691.38 \mu s) = 21.13ms + 22.12ms = 43.25ms$


$$\frac{Tx_{ON}}{Tx_{ON+OFF}} = \frac{43.25ms}{100ms} = 0.4325 = 43.25\%$$

Duty Cycle Correction Factor for E-Field =  $20 \cdot \log(0.4325) = -7.28dB$

**Plot 6.6.4.2. Duty Cycle**  
Short Pulse: 370.74  $\mu$ s

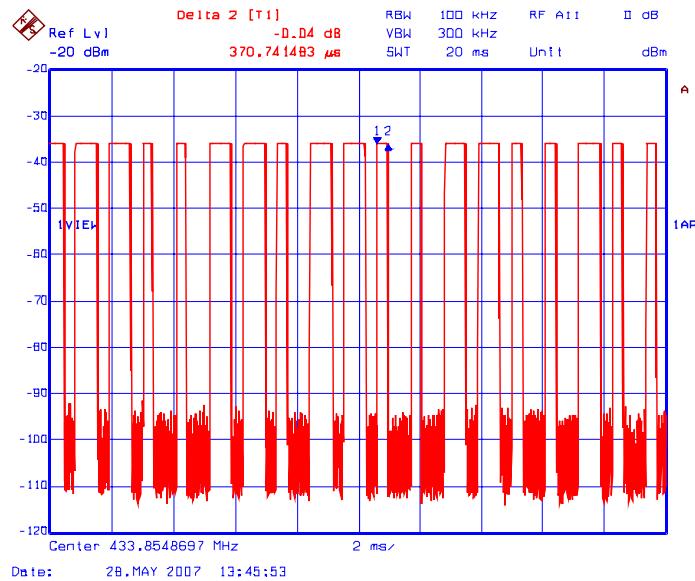

**Plot 6.6.4.3. Duty Cycle**  
Long Pulse: 691.38  $\mu$ s

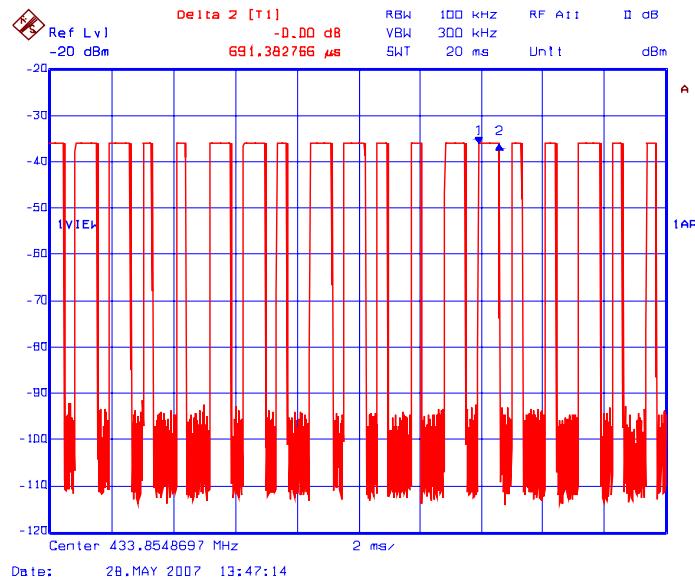

## 6.7 EMISSION BANDWIDTH [§15.231(c)]

### 6.7.1 Limits

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 6.7.2 Method of Measurements

Refer to ULTRATECH Test Procedures, File # ULTR P001-2004, §15.231(c) & ANSI C63.4.

The transmitter output was loosely coupled to the spectrum analyzer through a receiving antenna and the bandwidth of the fundamental frequency was measured with the spectrum analyzer with the resolution bandwidth of the spectrum analyzer set per ANSI C63.4.


### 6.7.3 Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer	Rohde & Schwarz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz

### 6.7.4 Test Data

Frequency (MHz)	Modulation	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/Fail
433.92	ASK	9.96	1084.8	Pass

**Plot 6.7.4.1. 20 dB Bandwidth**  
Test Frequency: 433.92 MHz  
Modulation: OOK

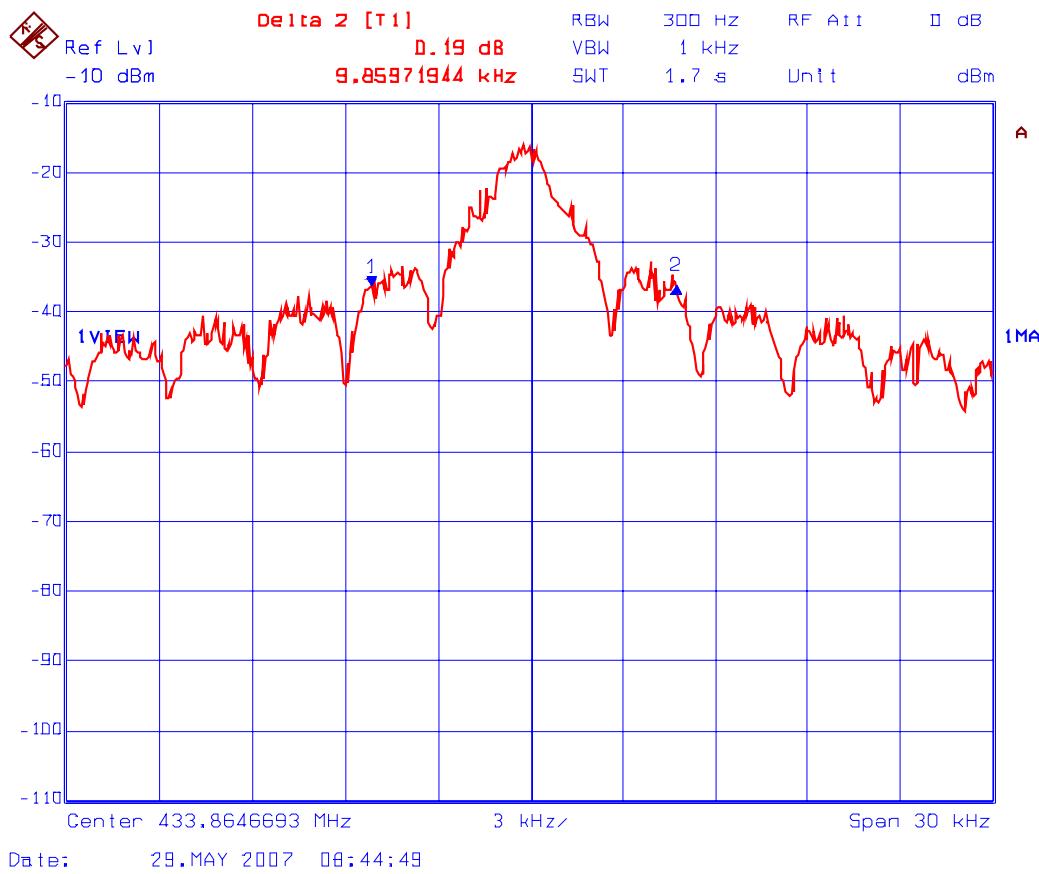

## EXHIBIT 7 MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

### 7.1 LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Line Conducted)	PIANABILITY DISTRIBUTION	UNCERTAINTY (dB)	
		9-150 kHz	0.15-30 MHz
EMI Receiver specification	Rectangular	$\pm 1.5$	$\pm 1.5$
LISN coupling specification	Rectangular	$\pm 1.5$	$\pm 1.5$
Cable and Input Transient Limiter calibration	Normal (k=2)	$\pm 0.3$	$\pm 0.5$
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8(9 \text{ kHz}) 0.2 (30 \text{ MHz})$ Uncertainty limits $20\text{Log}(1+\Gamma_1\Gamma_R)$	U-Shaped	$\pm 0.2$	$\pm 0.3$
System repeatability	Std. deviation	$\pm 0.2$	$\pm 0.05$
Repeatability of EUT	--	--	--
Combined standard uncertainty	Normal	$\pm 1.25$	$\pm 1.30$
Expanded uncertainty U	Normal (k=2)	$\pm 2.50$	$\pm 2.60$

Sample Calculation for Measurement Accuracy in 450 kHz to 30 MHz Band:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{(1.5^2 + 1.5^2)/3 + (0.5/2)^2 + (0.05/2)^2 + 0.35^2} = \pm 1.30 \text{ dB}$$

$$U = 2u_c(y) = \pm 2.6 \text{ dB}$$

## 7.2 RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PIANABILITY DISTRIBUTION	UNCERTAINTY ( $\pm$ dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	$\pm 1.0$	$\pm 1.0$
Cable Loss Calibration	Normal (k=2)	$\pm 0.3$	$\pm 0.5$
EMI Receiver specification	Rectangular	$\pm 1.5$	$\pm 1.5$
Antenna Directivity	Rectangular	+0.5	+0.5
Antenna factor variation with height	Rectangular	$\pm 2.0$	$\pm 0.5$
Antenna phase center variation	Rectangular	0.0	$\pm 0.2$
Antenna factor frequency interpolation	Rectangular	$\pm 0.25$	$\pm 0.25$
Measurement distance variation	Rectangular	$\pm 0.6$	$\pm 0.4$
Site imperfections	Rectangular	$\pm 2.0$	$\pm 2.0$
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(Bi)$ 0.3 (Lp) Uncertainty limits $20\log(1+\Gamma_1\Gamma_R)$	U-Shaped	+1.1 -1.25	$\pm 0.5$
System repeatability	Std. Deviation	$\pm 0.5$	$\pm 0.5$
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$