

Test Report No:
2560629R-RFUSV03S-A

TEST REPORT

FCC Rules & Regulations

(Class II Permissive Change)

Product Name	Peplink Pepwave Wireless Product
Brand Name	
Model No.	AP Pro AX APP-AX-IP67
FCC ID	U8G-P1PROAX
Applicant's Name / Address	PISMO LABS TECHNOLOGY LIMITED A8, 5/F, HK Spinners Industrial Building, Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Hong Kong
Manufacturer's Name	PISMO LABS TECHNOLOGY LIMITED
Test Method Requested, Standard	FCC CFR Title 47 Part 15 Subpart E Section 15.407
Verdict Summary	IN COMPLIANCE
Documented by Genie Chang	
Tested by Ivan Chuang	
Approved by Alan Chen	
Date of Receipt	2025/06/19
Date of Issue	2025/07/18
Report Version	V1.0

INDEX

	page
Competences and Guarantees.....	3
General Conditions	3
Revision History	4
Permissive Change.....	5
Summary of Test Result.....	6
1. General Information	7
1.1. EUT Description.....	7
1.2. EUT Information.....	8
1.3. Testing Location Information.....	8
1.4. Measurement Uncertainty.....	9
1.5. List of Test Equipment	10
2. Test Configuration of EUT.....	11
2.1. Test Condition	11
2.2. Test Frequency Mode	11
2.3. Duty Cycle.....	12
2.4. Measurement Configuration	13
2.5. Tested System Details	14
2.6. Configuration of tested System	14
2.7. EUT Operating Procedures	15
3. AC Power Line Conducted Emission.....	16
3.1. Test Setup	16
3.2. Test Limit.....	16
3.3. Test Procedure.....	16
3.4. Test Result of AC Power Line Conducted Emission.....	16
4. Maximum Conducted Output Power.....	17
4.1. Test Setup	17
4.2. Test Limit.....	18
4.3. Test Procedure.....	18
4.4. Test Result of Maximum Conducted Output Power.....	18
5. Transmitter Radiated Spurious Emission.....	19
5.1. Test Setup	19
5.2. Test Limit.....	21
5.3. Test Procedure.....	22
5.4. Test Result of Transmitter Radiated Spurious Emission	22
Appendix A. Test Result of AC Power Line Conducted Emission	
Appendix B. Test Result of Maximum Conducted Output Power	
Appendix C. Test Result of Transmitter Radiated Spurious Emission	
Appendix D. Test Setup Photograph	

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	2025/07/18

Permissive Change

Report No.	Version	Description	Issued Date
22B1024R-RFUSV03S-A	V1.0	Original application.	2023/01/16
2560629R-RFUSV03S-A	V1.0	<p>This is to request a Class II permissive change. The major change filed under this application is:</p> <p>Change #1: Appearance will be change, material remains the same.</p> <p>Change #2: Original power port is an M12 connector, has been changed to an M25 (3 pin) connector.</p> <p>Change #3: Ethernet port connector is wrapped in the plastic kit.</p>	2025/07/18

Summary of Test Result

Report Clause	Test Items	Result (PASS/FAIL)	Remark
3	AC Power Line Conducted Emission	PASS	-
4	Maximum Conducted Output Power	PASS	-
5	Transmitter Radiated Spurious Emission	PASS	-

Comments and Explanations

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1. General Information

1.1. EUT Description

Frequency Range	5150 ~ 5250 MHz 5725 ~ 5850 MHz	
Operating Frequency / Channel Number	IEEE 802.11a	5180 ~ 5240 MHz / 4 Channels
	IEEE 802.11n/ac/ax (20 MHz)	5745 ~ 5825 MHz / 5 Channels
	IEEE 802.11n/ac/ax (40 MHz)	5190 ~ 5230 MHz / 2 Channels 5755 ~ 5795 MHz / 2 Channels
	IEEE 802.11ac/ax (80 MHz)	5210 MHz / 1 Channel 5775 MHz / 1 Channel
Type of Modulation	IEEE 802.11a/n	OFDM-BPSK, QPSK, 16QAM, 64QAM
	IEEE 802.11ac	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM
	IEEE 802.11ax	OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM

The difference for each model is shown as below:

Model No.	Description
AP Pro AX	
APP-AX-IP67	There is nothing different of two models, just for different marketing use.

From the above models, model: AP Pro AX was selected as representative model for the test and its data was recorded in this report.

Antenna Information					
Item.	Brand Name	Part No.	Type	Gain (dBi)	
1	WHA YU INDUSTRIAL CO., LTD.	SRF20171227	Omni-directional	U-NII 1	4.08
				U-NII 3	4.08

Note: The antenna of EUT conforms to FCC 15.203.

For IEEE 802.11a/n/ac/ax Mode: (2TX, 2RX)

1.2. EUT Information

EUT Power Type	From Adapter / PoE			
EUT Function	<input checked="" type="checkbox"/>	Point-to-multipoint	<input type="checkbox"/>	Point-to-point
TPC Function	<input checked="" type="checkbox"/>	With TPC Function	<input type="checkbox"/>	Without TPC Function
Weather Band (5600 ~ 5650 MHz)	<input checked="" type="checkbox"/>	With 5600 ~ 5650 MHz	<input checked="" type="checkbox"/>	Without 5600 ~ 5650 MHz
Beamforming Function	<input type="checkbox"/>	With beamforming	<input checked="" type="checkbox"/>	Without beamforming
Resource Unit of 802.11ax	<input checked="" type="checkbox"/>	Full RU	<input type="checkbox"/>	Partial RU

1.3. Testing Location Information

USA	FCC Designation Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No. 85, Wenlin St., Linkou Dist., New Taipei City 244017, Taiwan, R.O.C.
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual	Test Date	Tested By
AC Power Line	Temperature (°C)	10~40 °C	23.3~25.2 °C	2025/07/09~ 2025/07/10	Ryan Lin
	Humidity (%RH)	10~90 %	51.5~52.6 %		
RF Conducted Emission	Temperature (°C)	10~40 °C	24.3~25.2 °C	2025/07/16	Ryan Lin
	Humidity (%RH)	10~90 %	57~61.3 %		
Radiated Emission	Temperature (°C)	10~40 °C	23.3~27.2 °C	2025/07/08 ~ 2025/07/18	Bob Chiu Ashton Chiu
	Humidity (%RH)	10~90 %	54.5~56.8 %		

1.4. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty
AC Power Line Conducted Emission	± 3.50 dB
Maximum Conducted Output Power	± 2.15 dB
Transmitter Radiated Spurious Emission	9 kHz~30 MHz: ± 3.88 dB 30 MHz~1 GHz: ± 4.42 dB 1 GHz~18 GHz: ± 4.28 dB 18 GHz~40 GHz: ± 3.90 dB

1.5. List of Test Equipment

For Conduction Measurements / HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2024/04/28	2026/04/27
V	Two-Line V-Network	R&S	ENV216	101306	2024/04/01	2026/03/31
V	Two-Line V-Network	R&S	ENV216	101307	2023/08/17	2025/08/16
V	Coaxial Cable	SUHNER	RG400_BNC	RF001	2025/01/10	2026/01/09

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

For Conducted Measurements / HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV30	103466	2024/12/18	2025/12/17
V	Peak Power Analyzer	KEYSIGHT	8990B	MY51000539	2025/05/05	2026/05/04
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY59240002	2025/05/07	2026/05/06
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY59240003	2025/05/07	2026/05/06

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: DTC_RF_Tool_Release V1.0.19

For Radiated Measurements / HY-CB03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
	Loop Antenna	TESEQ	HLA6121	49611	2025/02/18	2026/02/17
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-0675	2023/08/09	2025/08/08
V	Horn Antenna	Com-Power	AH-840	101101	2023/12/04	2025/12/03
V	Horn Antenna	RF SPIN	DRH18-E	210507A18ES	2024/05/15	2026/05/14
V	Pre-Amplifier	SGH	SGH0301-9	20211007-11	2025/01/10	2026/01/09
V	Pre-Amplifier	SGH	PRAMP118	20200701	2025/01/10	2026/01/09
V	Pre-Amplifier	EMCI	EMC05820SE	980310	2025/01/10	2026/01/09
V	Pre-Amplifier	EMCI	EMC184045SE	980369	2025/01/10	2026/01/09
V	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160311	2025/01/10	2026/01/09
V	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242	2025/01/10	2026/01/09
	Filter	MICRO TRONICS	BRM20887	G003	2025/01/05	2026/01/04
V	Filter	MICRO TRONICS	BRM50716	G196	2025/01/05	2026/01/04
V	EMI Test Receiver	R&S	ESR3	102793	2024/12/06	2025/12/05
V	Spectrum Analyzer	R&S	FSV3044	101114	2025/02/26	2026/02/25
V	Coaxial Cable	SGH	SGH18	2021005-1	2025/01/10	2026/01/09
V	Coaxial Cable	SGH	SGH18	202108-4	2025/01/10	2026/01/09
V	Coaxial Cable	SGH	HA800	GD20110223-1	2025/01/10	2026/01/09
V	Coaxial Cable	SGH	HA800	GD20110222-8	2025/01/10	2026/01/09

Note:

1. Bi-Log Antenna and Horn Antenna(AH-840) is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

2. Test Configuration of EUT

2.1. Test Condition


EUT Operational Condition	
Testing Voltage	AC 120V/60Hz to DC 12V (power by adapter) / 802.3at PoE

2.2. Test Frequency Mode

Test Software Version	QSPR / Version 5.0-00197
-----------------------	--------------------------

2.3. Duty Cycle

Modulation	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (Hz)
802.11a (20 MHz)	1.3739	1.4452	95.07	0.22	1000
802.11ax (20 MHz)	5.4587	5.7500	94.93	0.23	200
802.11ax (40 MHz)	5.4387	5.7400	94.75	0.23	200
802.11ax (80 MHz)	5.4387	5.7200	95.08	0.22	200

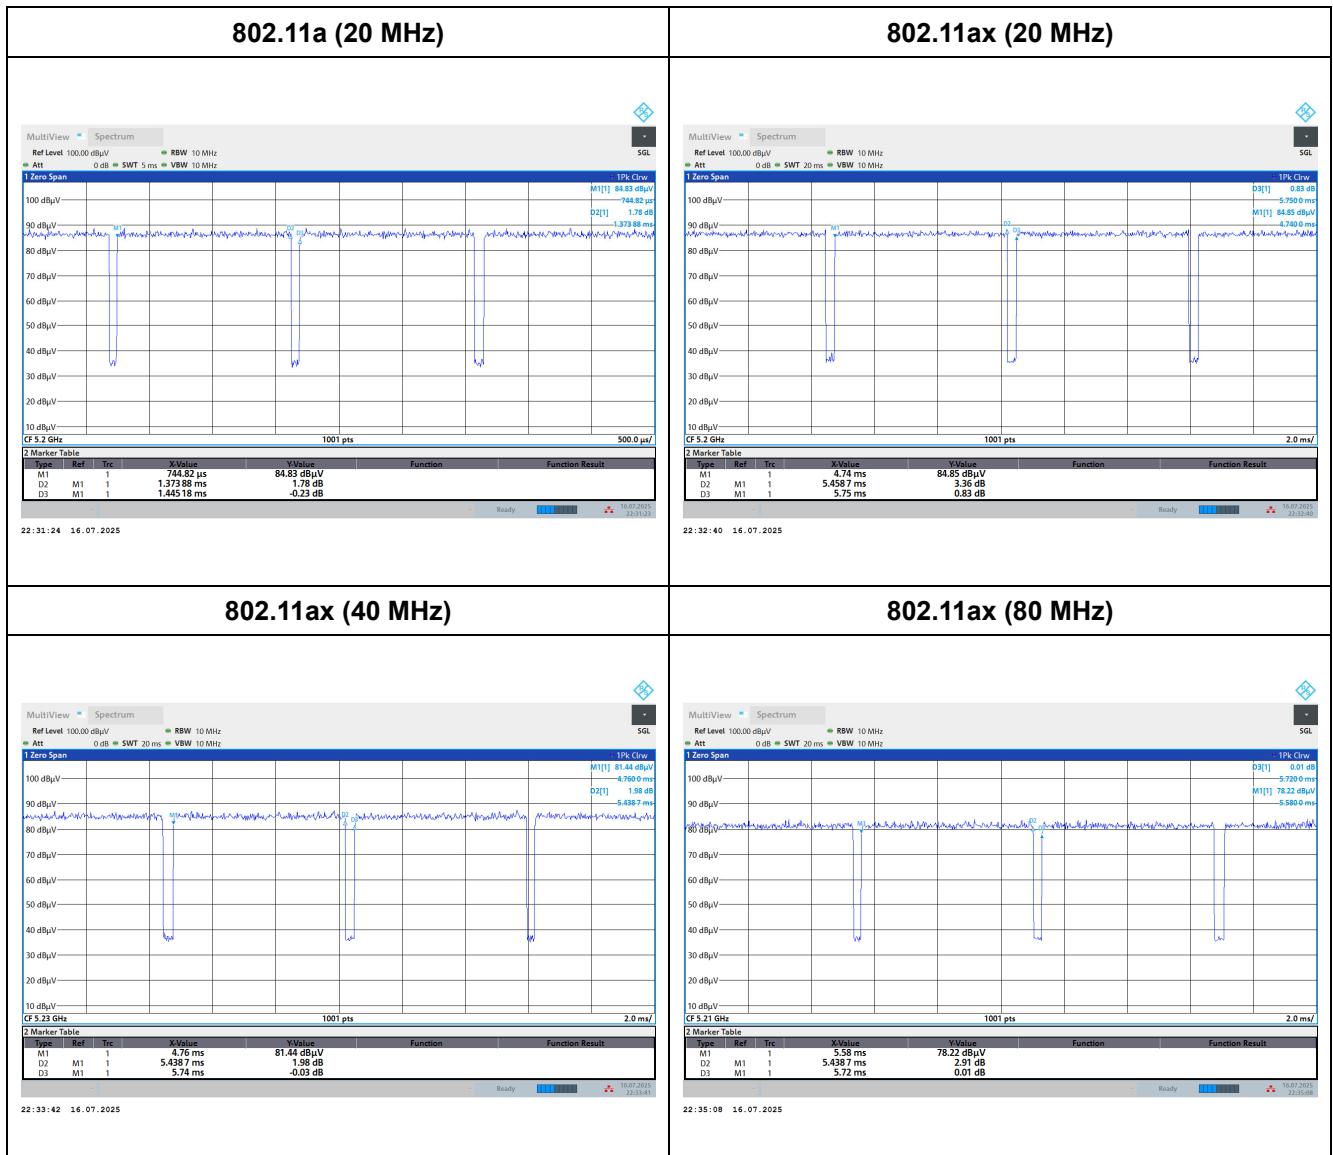

2.4. Measurement Configuration

Test Mode	Mode 1 (Transmit)	802.11a (20 MHz)
		802.11ax (20 MHz)
		802.11ax (40 MHz)
		802.11ax (80 MHz)

Note:

1. Determining compliance shall be based on the results of the compliance measurement, without taking measurement instrumentation uncertainty into account.
2. For transmitter radiated spurious emission below 1 GHz and AC power line conducted emissions, all modes of operation were investigated, and the worst-case emissions are reported.
3. The radiated measurements are performed in the 802.3at PoE positions, the worst case is shown in the report.

2.5. Tested System Details

Adapter mode


No.	Equipment	Brand Name	Model No.	Serial No.	Power Cord
1	Power Adapter	Dongguan Shengfone	ZZU1588-150120-2A	N/A	N/A
2	Notebook PC	ASUS	P5430U	G8NXCV07J11032C	N/A

PoE mode

No.	Equipment	Brand Name	Model No.	Serial No.	Power Cord
1	Notebook PC	ASUS	P5430U	G8NXCV07J11032C	N/A
2	PoE	BILLION	BP035-560054QAX	N/A	N/A


2.6. Configuration of tested System

Adapter mode

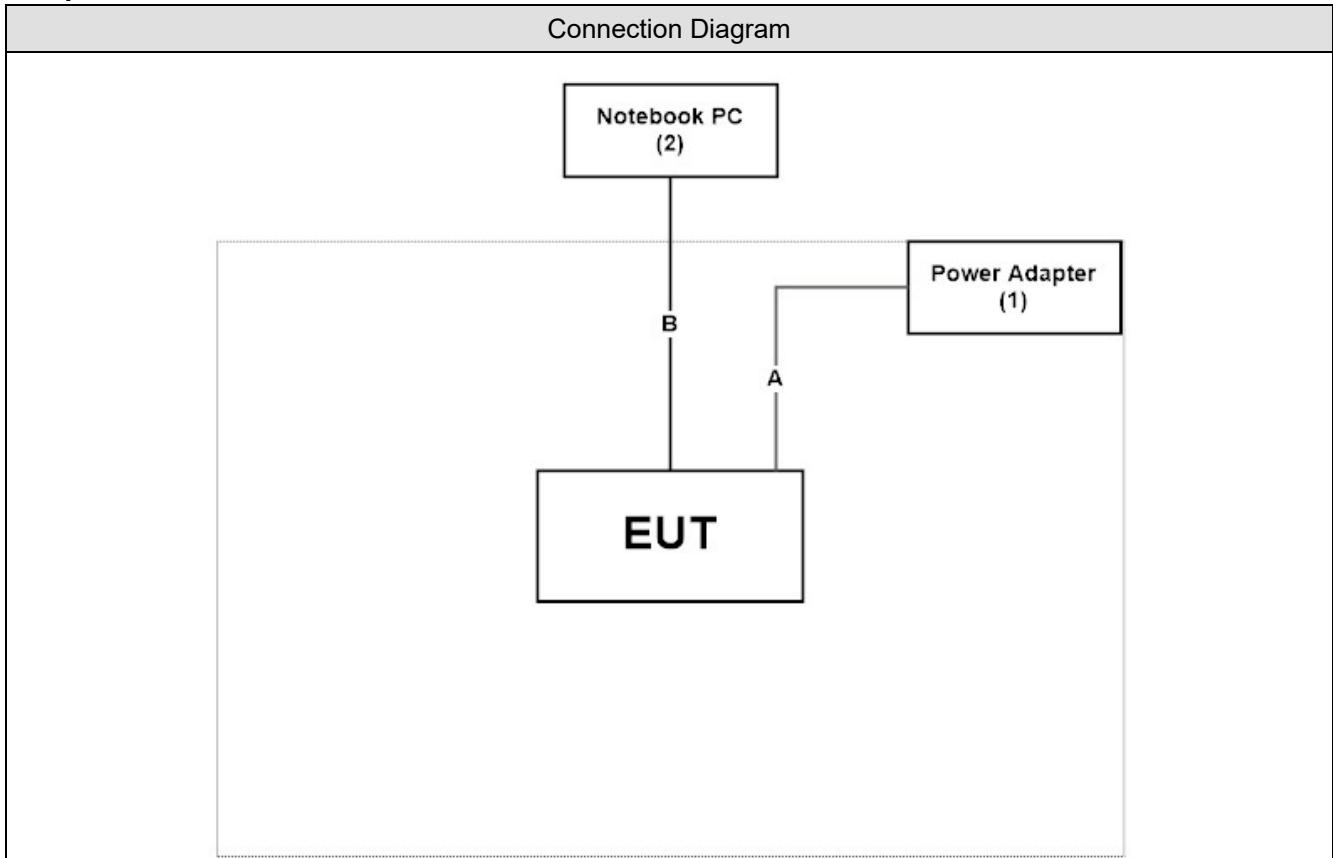

Signal Cable Type		Signal cable Description
A	Power Cable	Non-Shielded, 1.5m
B	LAN Cable	Non-Shielded, 3m

PoE mode

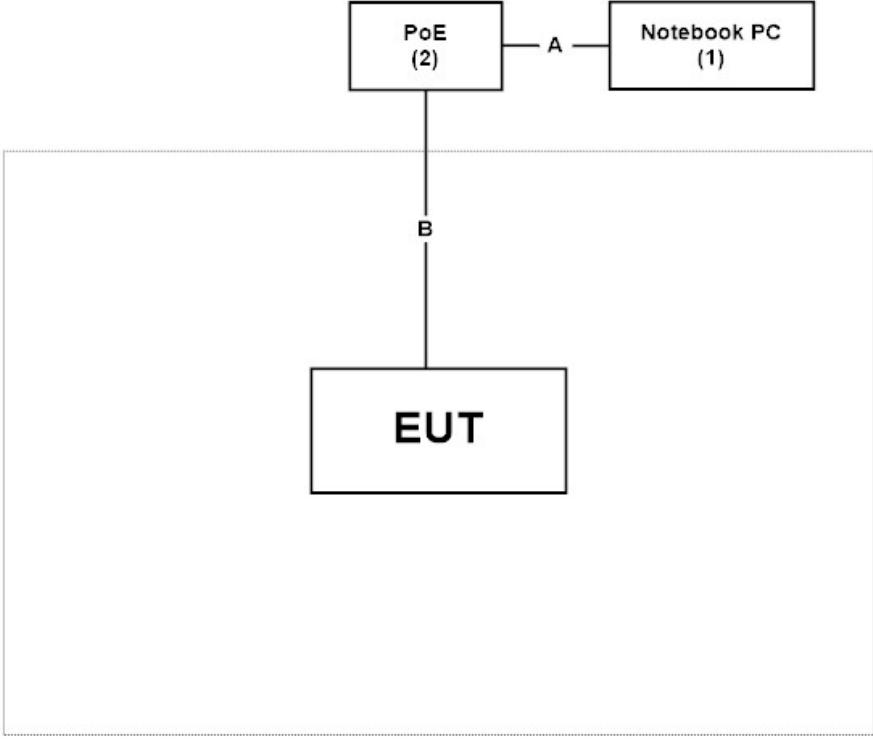
Connection Diagram	
	
Signal Cable Type	Signal cable Description
A	LAN Cable
B	LAN Cable

2.7. EUT Operating Procedures

1	Setup the EUT as shown in Section 2.6.
2	Execute software "QSPR / Version 5.0-00197" on the Notebook PC.
3	Configure the test mode, the test channel, and the data rate.
4	Verify that the EUT works properly.

3. AC Power Line Conducted Emission

3.1. Test Setup

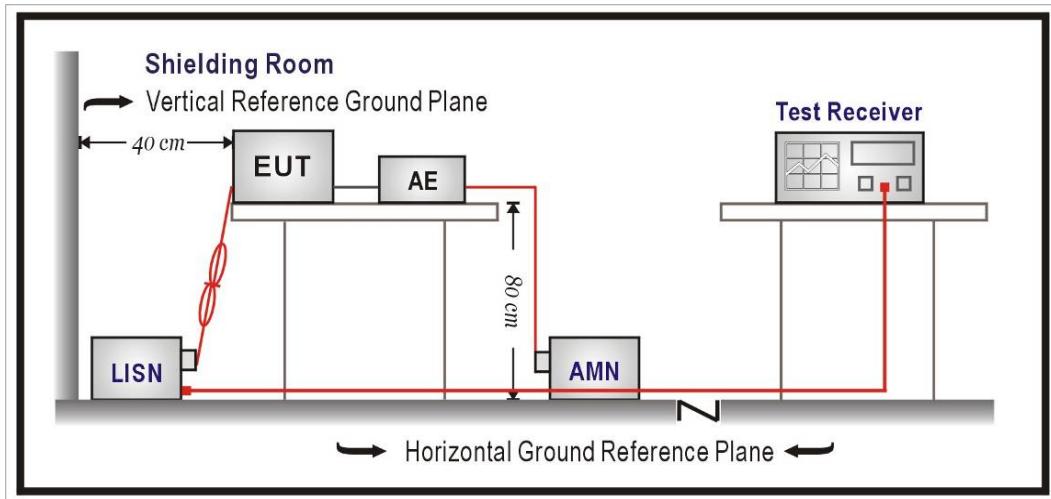

3.2. Test Limit

Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remark: In the above table, the tighter limit applies at the band edges.

3.3. Test Procedure


The EUT was setup according to ANSI C63.10-2020 for AC Power Line Conducted Emissions.

3.4. Test Result of AC Power Line Conducted Emission

Refer as Appendix A

4. Maximum Conducted Output Power

4.1. Test Setup

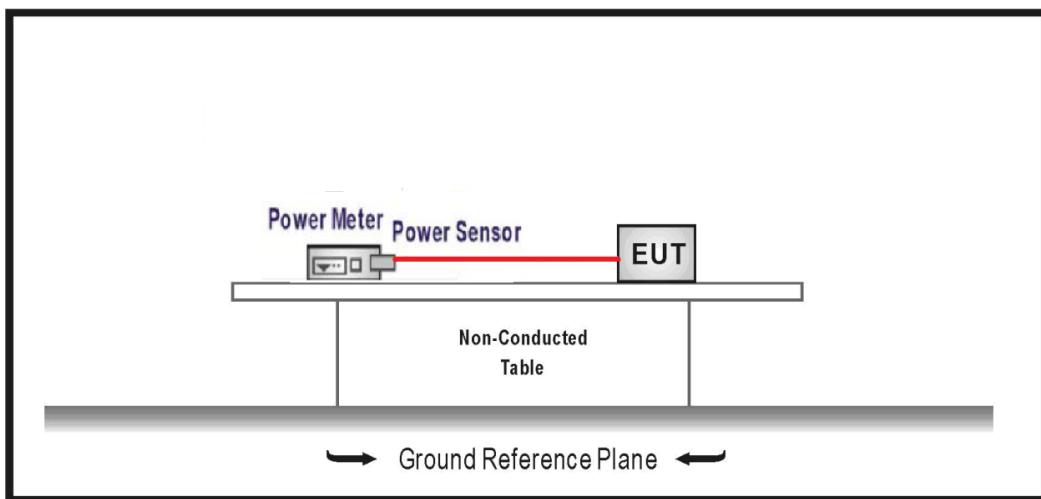

4.2. Test Limit

1. For an outdoor access point and an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3. Test Procedure

The EUT was setup to ANSI C63.10-2020; tested to U-NII test procedure of 789033.


4.4. Test Result of Maximum Conducted Output Power

Refer as Appendix B


5. Transmitter Radiated Spurious Emission

5.1. Test Setup


9 kHz ~ 30 MHz

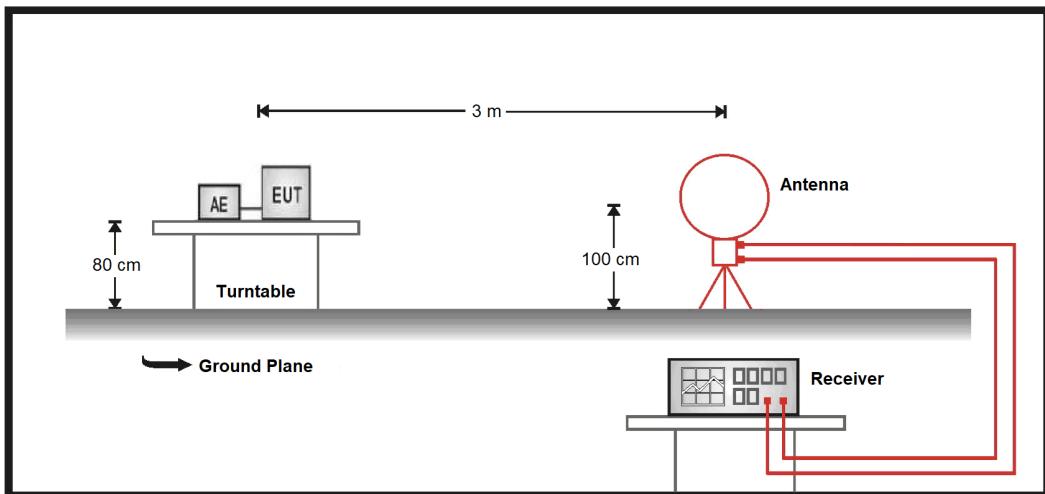

30 MHz ~ 1 GHz

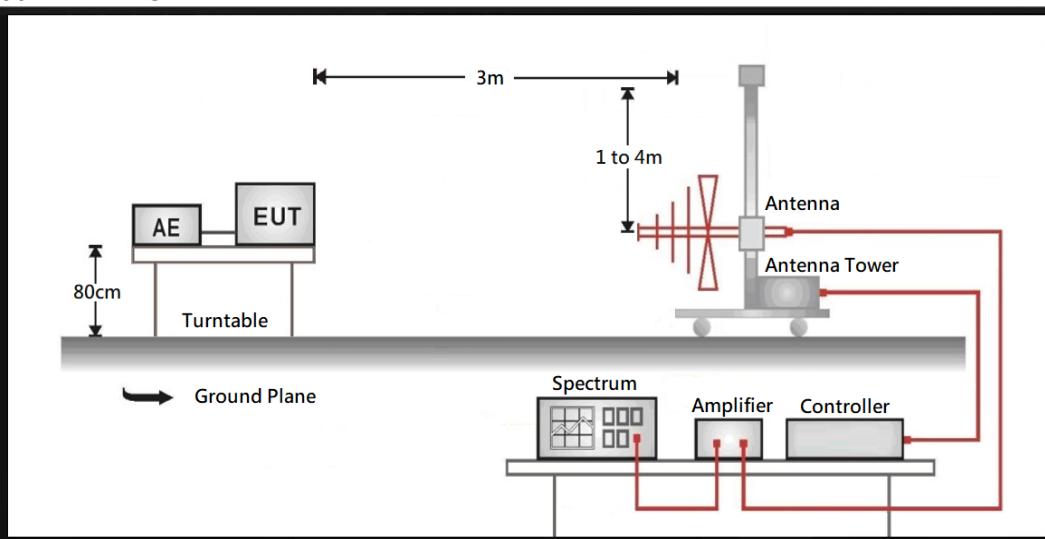

Above 1 GHz

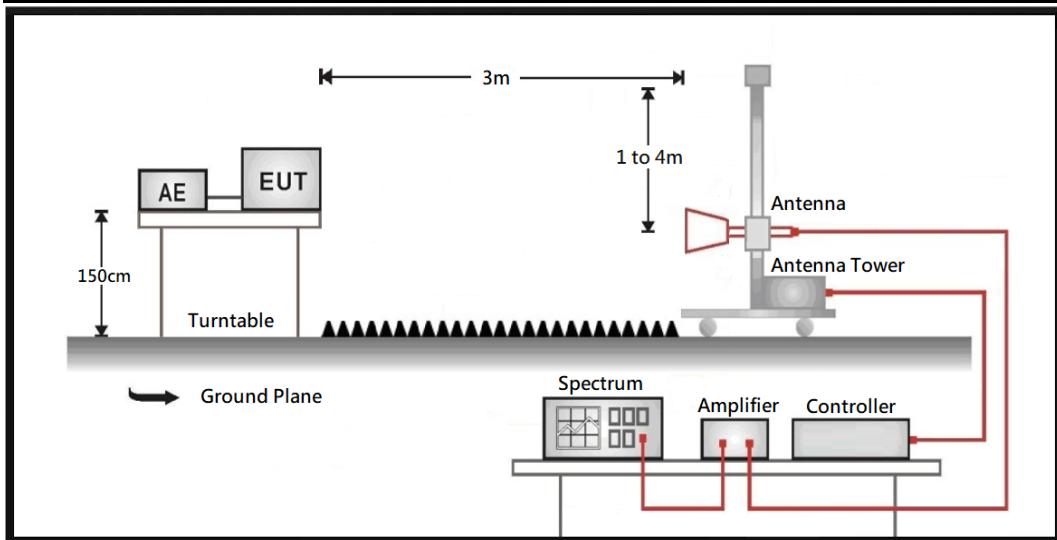

5.2. Test Limit

Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dB μ V/m) = 20 log Field strength (μ V/m)
2. In the Above Table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Unwanted Emission out of the restricted bands Test Limit

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength (dB μ V/m@3m)
5150 – 5250	-27	68.2
5250 – 5350	-27	68.2
5470 – 5725	-27	68.2
5725 – 5850	-27 * ¹	68.2 * ¹
	10 * ²	105.2 * ²
	15.6 * ³	110.8 * ³
	27 * ⁴	122.2 * ⁴

*¹ beyond 75 MHz or more above of the band edge.

*² below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

*³ below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

*⁴ from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where } P \text{ is the eirp (Watts).}$$

5.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10-2020 on radiated measurement.

The additional latch filter below 1 GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz, above 1 GHz are 1 MHz.

The frequency range from 9 kHz to 10th harmonics and included The frequency range from the lowest oscillator frequency generated within the device up to the 10th harmonic was checked is checked.

5.4. Test Result of Transmitter Radiated Spurious Emission

Refer as Appendix C