

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

FM Transmitter

FCC ID: U8ZB1045

MODEL No.: B1045

BRAND NAME: N/A

REPORT NO: WE07040007

ISSUE DATE: May 24, 2007

Prepared for

**ACME TECH. (SHENZHEN) CO., LTD
3/F, KELINLUN BLDG, JINGNAN IND. DISTRICT, LUOGANG, BUJI,
SHENZHEN, CHINA**

Prepared by

**SHENZHEN HUATONGWEI INTERNATIONAL
INSPECTION CO., LTD**

d.b.a.

**SHENZHEN HUATONGWEI INTERNATIONAL INSPECTION CO., LTD
HUATONGWEI BUILDING, KEJI RD. 12 S., HIGH-TECH PARK,
NANSAN DISTRICT, SHENZHEN,
GUANGDONG, P.R.CHINA**

**TEL: 86-755-26748099
FAX: 86-755-26748005**

VERIFICATION OF COMPLIANCE

Applicant:	Acme Tech. (SHENZHEN) CO., LTD. 3/F, Kelinlun Bldg, Jingnan Ind. District, Luogang, Buji, Shenzhen, China
Product Description:	FM Transmitter
Brand Name:	N/A
Model Number:	B1045
Serial Number:	N/A
File Number:	WE07040007
Date of Test:	May 17, 2007 ~ May 20, 2007

We hereby certify that:

The above equipment was tested by SHENZHEN HUA TONG WEI INTERNATIONAL INSPECTION CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.227.

The test results of this report relate only to the tested sample identified in this report.

Approved By

Jimmy Li / Executive Manager
SHENZHEN HUA TONG WEI
INTERNATIONAL INSPECTION CO., LTD.

Reviewed By

Tracy Qi / RF Engineer
SHENZHEN HUA TONG WEI
INTERNATIONAL INSPECTION CO., LTD.

Table of Contents

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY	4
1.5 SPECIAL ACCESSORIES.....	4
1.6 EQUIPMENT MODIFICATIONS	5
1.7 LABORATORY ACCREDITATIONS AND LISTINGS.....	5
2. System Test Configuration.....	7
2.1 EUT CONFIGURATION	7
2.2 EUT EXERCISE	7
2.3 TEST PROCEDURE.....	7
2.4 LIMITATION	8
2.5 CONFIGURATION OF TESTED SYSTEM	9
3. Summary Of Test Results	9
4. Description of test modes	9
5. Conducted Emissions Test (Not applicable in this report)	10
5.1 MEASUREMENT PROCEDURE:	10
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	10
5.3 MEASUREMENT EQUIPMENT USED:	10
5.4 MEASUREMENT RESULT:	10
5.5 CONDUCTED MEASUREMENT PHOTOS:.....	10
6. Radiated Emission Test	11
6.1 MEASUREMENT PROCEDURE.....	11
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	11
6.3 MEASUREMENT EQUIPMENT USED:	12
6.4 FIELD STRENGTH CALCULATION	12
6.5 MEASUREMENT RESULT	13
7. Occupied Bandwidth.....	14
7.1 MEASUREMENT PROCEDURE.....	14
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
7.3 MEASUREMENT EQUIPMENT USED:	14
7.4 MEASUREMENT RESULTS:	14
APPENDIX 1.....	15
APPENDIX 2.....	17

1. GENERAL INFORMATION

1.1 Product Description

The EUT is a short range, lower power, wireless controller of toy car designed as an "Input Device". It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 27.045 MHz
- B). Modulation: FM
- C). Antenna Designation: Detachable
- D). Power Supply: DC 12V by battery

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: U8ZB1045 filing to comply with Section 15.227 of the FCC Part 15, Subpart C Rules. The composite system (receiver) is compliance with Subpart B is authorized under a verification procedure.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

The fully anechoic chamber test site and conducted measurement facility used to collect the radiated data is located on the address of SHENZHEN HUA TONG WEI INTERNATIONAL INSPECTION CO., LTD Huatongwei Building, Keji Rd. 12 S., High-tech Park, Nanshan District, Shenzhen, Guangdong, P.R.China

The fully anechoic chamber Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and CISPR 22/EN 55022 requirements.

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

1.7. Laboratory Accreditations and listings

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 1999 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 1999 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is from Aug 24, 2005 to Sept 30, 2007

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date September 12, 2006.

IC-Registration No.: 5377

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377 on November 28th, 2005.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

NEMKO-Aut. No.: ELA125

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: December 20, 2006. Valid time is until December 19, 2009.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: December 20, 2006. Valid time is until December 19, 2009.

IECEE CB

Shenzhen Huatongwei International Inspection Co Ltd has been assessed and determined to fully comply with the requirements of ISO/IEC 17025: 2005-05, The Basic Rules, IECEE 01: 2006-10 and Rules of Procedure IECEE 02: 2006-10, and the relevant IECEE CB-Scheme Operational Documents.

It is therefore entitled to operate as a CB Testing Laboratory under the responsibility of Nemko A/S. This certificate remains valid until May 25th 2009 at which time it will be reissued by the IECEE Executive Secretary upon successful completion of the normally scheduled 3-year Reassessment Program administered by the IECEE CB Scheme.

DNV

Shenzhen Huatongwei International Inspection Co Ltd has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025(2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until 19 April, 2007.

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions (Not apply in the report)

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 Limitation

(1) Conducted Emission (Not applicable in this report)

According to section 15.207(a) Conducted Emission Limits is as following.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

(2) Radiated Emission

- The field strength of any emission within this band (section 15.227 frequency between 26.96MHz –27.28MHz) shall not exceed 10000 micro volts/meter at 3 meters. (80dB μ V at 3m) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.
- The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209 (Intentional Radiators general limit).as below.


Frequency (MHz)	Field strength μ V/m	Distance(m)	Field strength at 3m dB μ V/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark:

- Emission level in dB μ V/m=20 log (μ V/m)
- Measurement was performed at an antenna to the closed point of EUT distance of meters.
- Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205
- Emission spurious frequency which appearing within the Restricted Bands specified in provision of ξ 15.205, then the general radiated emission limits in ξ 15.209 apply.

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

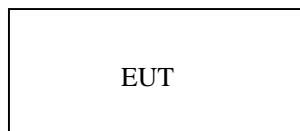

3. Summary Of Test Results

FCC Rules	Description Of Test	Result
§15.207	Conducted Emission	N/A
§15.227	Radiated Emission	Compliant
§15.227	Occupied Bandwidth	Compliant

4. Description of test modes

1. The EUT has been tested under normal operating condition.
2. The EUT stay in continuous transmitting mode. Three axes (X, Y, and Z) are chosen for testing.

5. Conducted Emissions Test (Not applicable in this report)

5.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)

N/A

5.3 Measurement Equipment Used:

Conducted Emission Test Site # 3					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCS30	100038	2006/11	2007/10
ARTIFICIAL MAINS	ROHDE & SCHWARZ	ESH2-Z5	100028	2006/11	2007/10
PULSE LIMITER	ROHDE & SCHWARZ	ESHSZ2	100044	2006/11	2007/10
EMI TEST SOFTWARE	ROHDE & SCHWARZ	ES-K1 V1.71	N/A	2006/11	2007/10

5.4 Measurement Result:

N/A

5.5 Conducted Measurement Photos:

N/A

6. Radiated Emission Test

6.1 Measurement Procedure


- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 Maximum procedure was performed on at least ten highest emissions to ensure EUT compliance.
- 3 And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4 Repeat above procedures until all frequency measurements have been completed.

Note:


Three axes are chosen for pretest, the Z axis is the worst mode for final test.

6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

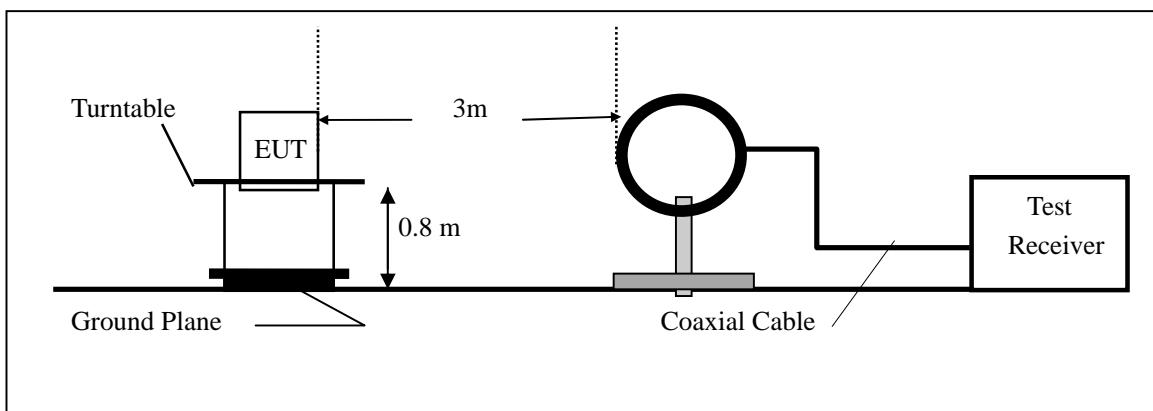

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

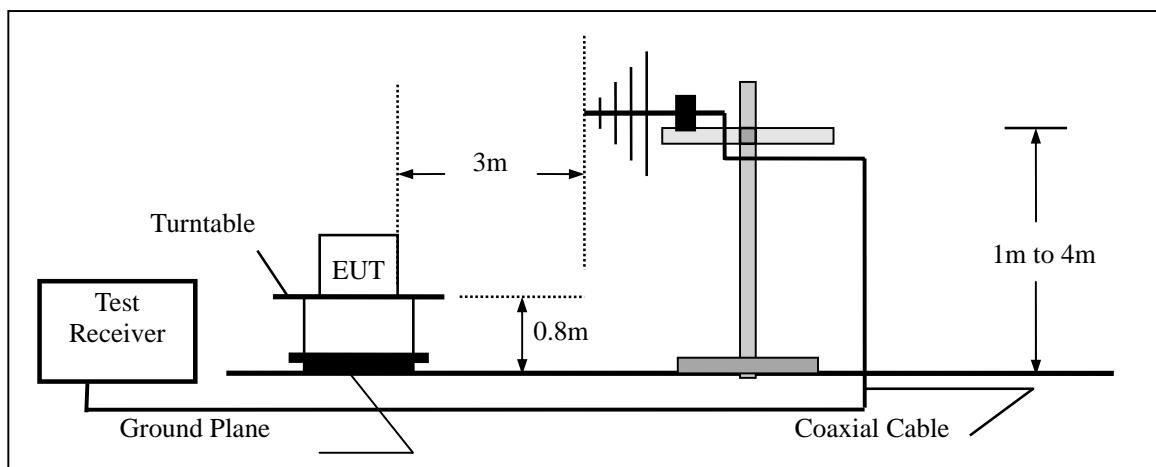

6.3 Measurement Equipment Used:

3/5 Anechoic Chamber Radiation Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2006/11	2007/10
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2006/11	2007/10
RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	N/A	N/A
TURNTABLE	ETS	2088	2149	N/A	N/A
ANTENNA MAST	ETS	2075	2346	N/A	N/A
EMI TEST SOFTWARE	ROHDE & SCHWARZ	ES-K1 V1.71	N/A	2006/11	2007/10

6.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude		AG = Amplifier Gain
AF = Antenna Factor		

6.5 Measurement Result

Operation Mode: Transmitting Mode On Z Axis
 Fundamental 27.045MHz
 Frequency:
 Temperature : 23 °C
 Humidity : 58 %
 Judgement: Passed by -2.50 dB at 108.180 MHz Ant.Pol. Ver.

Freq. (MHz)	Ant.Pol. H/V	DetectorMode (PK/AV)	Reading (dBuV)	Ant./CL/ Amp. CF(dB)	Actual FS (dBuV/m)	Limit3m (dBuV/m)	Safe Margin (dB)	Note
27.045		Peak	41.00	21.20	62.20	80.00	-17.80	F
54.090	V	Peak	26.50	8.30	34.80	40.00	-5.20	H
54.090	H	Peak	23.40	8.30	31.70	40.00	-8.30	H
81.135	V	Peak	25.50	11.40	36.90	40.00	-3.10	H
81.135	H	Peak	22.10	11.40	33.50	40.00	-6.50	H
108.180	V	Peak	29.40	11.60	41.00	43.50	-2.50	H
108.180	H	Peak	28.60	11.60	40.20	43.50	-3.30	H
135.225	V	Peak	26.70	10.10	36.80	43.50	-6.70	H
135.225	H	Peak	22.20	10.10	32.30	43.50	-11.20	H
162.270	V	Peak	25.00	10.70	35.70	43.50	-7.80	H
162.270	H	Peak	21.10	10.70	31.80	43.50	-11.70	H
190.015	V	Peak	25.30	10.80	36.10	43.50	-7.40	H
190.015	H	Peak	24.00	10.80	34.80	43.50	-8.70	H
217.160	V	Peak	23.90	11.10	35.00	46.00	-11.00	H
217.160	H	Peak	22.10	11.10	33.20	46.00	-12.80	H
Others		-						

Remark:

- (1) Measuring frequencies from 25 MHz to the 1GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Datas of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 25MHz to 1GHz was 120KHz.

7. Occupied Bandwidth

7.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation
3. Based on FCC Part15 C Section 15.227: Operation within the band 26.96 – 27.28 MHz, RBW= 100KHz, VBW= 300KHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.

7.2 Test SET-UP (Block Diagram of Configuration)


Same as 4.2 Radiated Emission Measurement.

7.3 Measurement Equipment Used:

Same as 4.2 Radiated Emission Measurement.

7.4 Measurement Results:

The graph represents the emissions take for this device as below,.

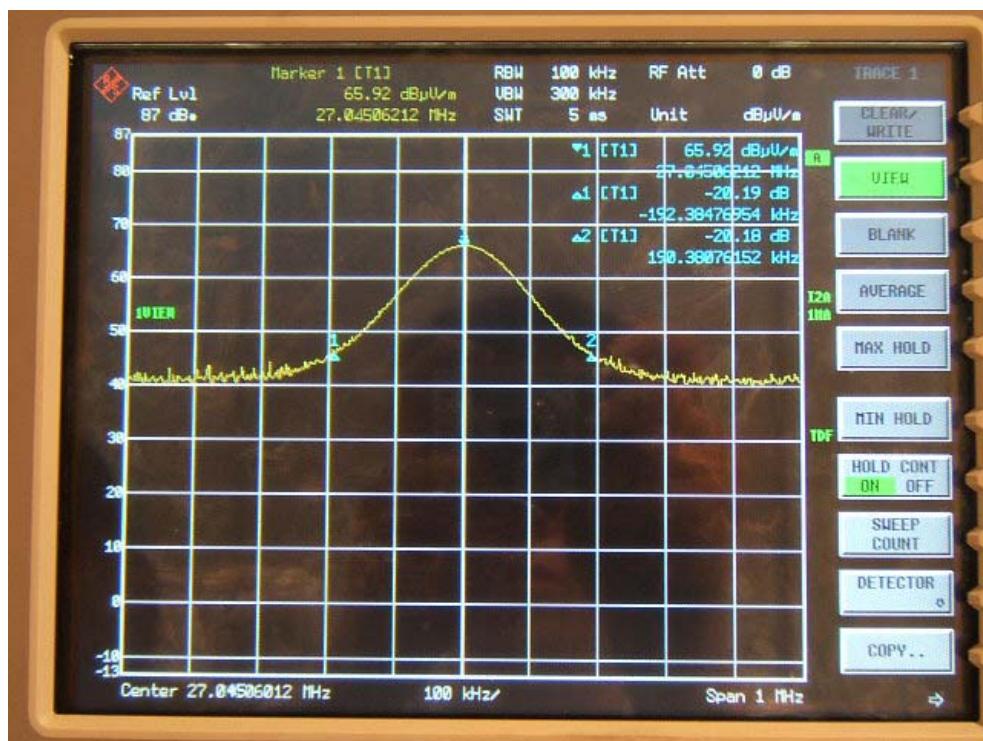

APPENDIX 1

PHOTOGRAPHS OF SET UP

Radiated Emission Setup Photos



APPENDIX 2

PHOTOGRAPHS OF EUT

Top View of TX



Bottom View of TX



Front View of TX



Back View of TX




Left View of TX




Right View of TX




Internal of TX- Open

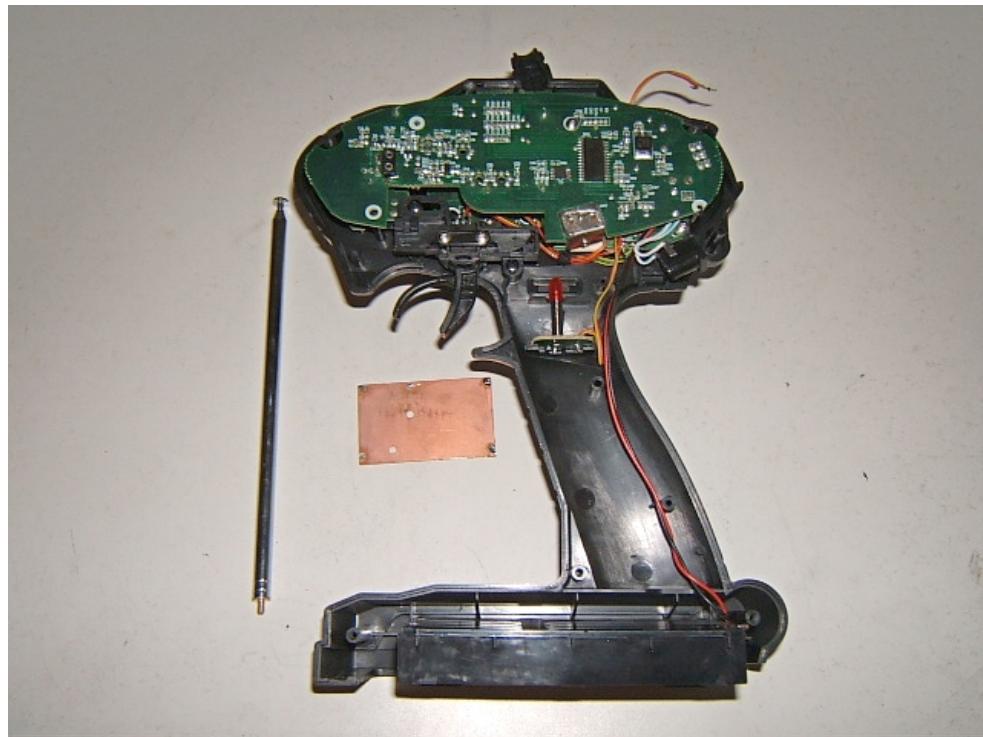


Internal of TX- 1

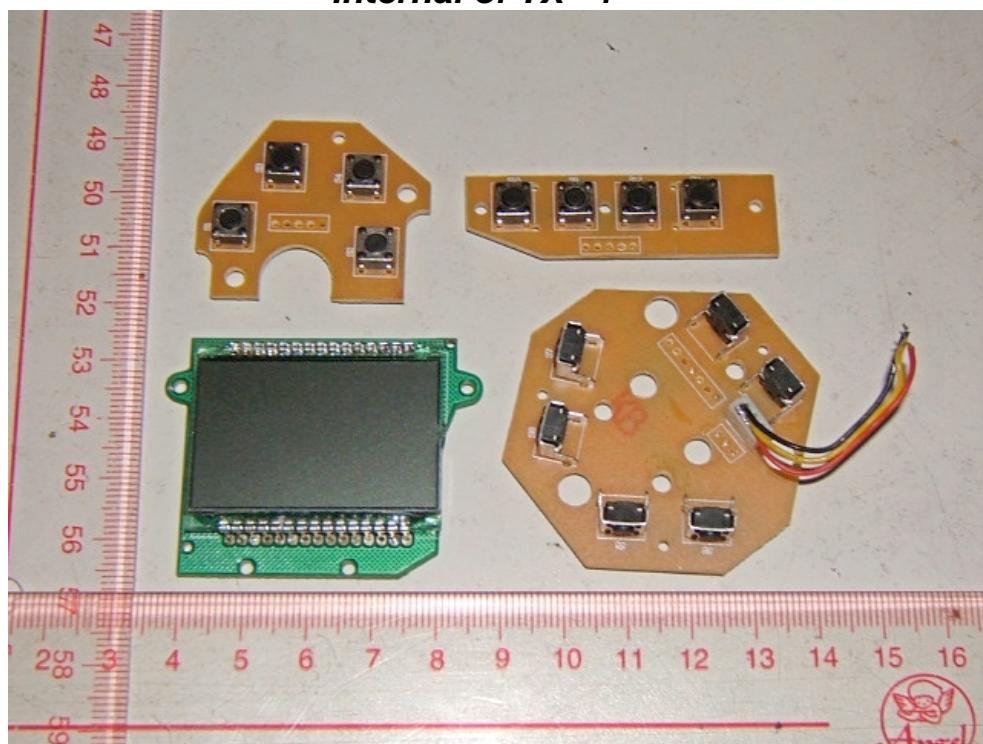

Internal of TX- 2

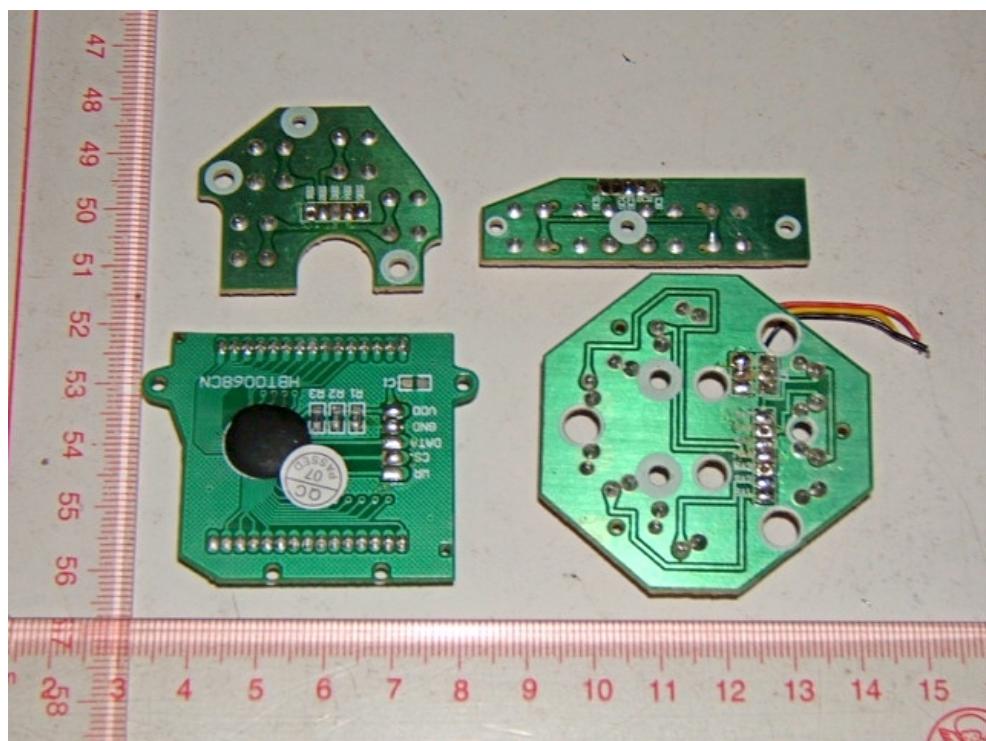

Internal of TX- 3

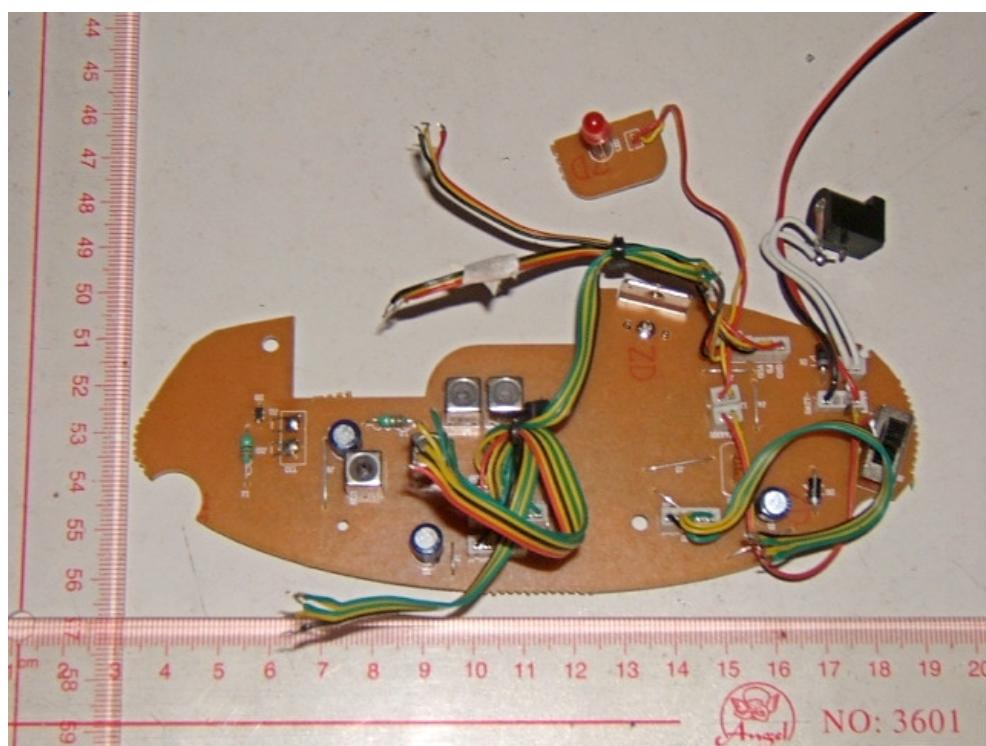

Internal of TX-4

