



SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

198 Kezhu Road, Scientech Park, Guangzhou Economic & Technological
Development District, Guangzhou, China 510663

Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: ee.guangzhou@sgs.com

Report No.: GZEM180300143403
Page: 1 of 46
FCC ID: UCZ-LHWF1006-D

TEST REPORT

Application No.: GZEM1803001434CR
Applicant: Lorex Technology Inc.
Address of Applicant: 250 Royal Crest Court, Markham, ON L3R 3S1 Canada
Manufacturer: Lorex Technology Inc.
Address of Manufacturer: 250 Royal Crest Court, Markham, ON L3R 3S1 Canada
Factory: Lorex Technology Inc.
Address of Factory: 250 Royal Crest Court, Markham, ON L3R 3S1 Canada
Equipment Under Test (EUT):
FCC ID: UCZ-LHWF1006-D
EUT Name: 1080p 6ch WF DVR
Model No.: LHWF1006-D
Trade Mark: LOREX
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2018-03-26
Date of Test: 2018-04-19 to 2018-04-20
Date of Issue: 2018-05-18

Test Result:	Pass*
---------------------	-------

* In the configuration tested, the EUT complied with the standards specified above. This report GZEM180300143403 supersedes the previous report GZEM180300143401, issued on 2018-04-25, which is hereby deemed null and void.



Kobe Jian
Lab Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-04-25		Original
02		2018-05-18		Update test data

Authorized for issue by:			
Tested By	 Jackson Yuan	2018-04-19 to 2018-04-20	
	Jackson_Yuan /Project Engineer	Date	
Checked By	 Ricky Liu	2018-04-25	
	Ricky_Liu /Reviewer	Date	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass①

Remark:

①: The EUT passed Radiated Spurious Emissions tests after modification.

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	7
4.4 Test Location	7
4.5 Test Facility	8
4.6 Deviation from Standards	9
4.7 Abnormalities from Standard Conditions	9
5 Equipment List	10
6 Radio Spectrum Technical Requirement	13
6.1 Antenna Requirement	13
6.1.1 Test Requirement	13
6.1.2 Conclusion	13
7 Radio Spectrum Matter Test Results	14
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	14
7.1.1 E.U.T. Operation	14
7.1.2 Test Setup Diagram	14
7.1.3 Measurement Procedure and Data	15
7.2 Minimum 6dB Bandwidth	18
7.2.1 E.U.T. Operation	18
7.2.2 Test Setup Diagram	18
7.2.3 Measurement Procedure and Data	18
7.3 Conducted Peak Output Power	19
7.3.1 E.U.T. Operation	19
7.3.2 Test Setup Diagram	19
7.3.3 Measurement Procedure and Data	19
7.4 Power Spectrum Density	20
7.4.1 E.U.T. Operation	20
7.4.2 Test Setup Diagram	20
7.4.3 Measurement Procedure and Data	20
7.5 Conducted Band Edges Measurement	21
7.5.1 E.U.T. Operation	21
7.5.2 Test Setup Diagram	21
7.5.3 Measurement Procedure and Data	21
7.6 Conducted Spurious Emissions	22
7.6.1 E.U.T. Operation	22
7.6.2 Test Setup Diagram	22
7.6.3 Measurement Procedure and Data	22
7.7 Radiated Emissions which fall in the restricted bands	23
7.7.1 E.U.T. Operation	23

7.7.2	Test Setup Diagram.....	23
7.7.3	Measurement Procedure and Data	24
7.8	Radiated Spurious Emissions.....	27
7.8.1	E.U.T. Operation.....	27
7.8.2	Test Setup Diagram.....	28
7.8.3	Measurement Procedure and Data	29
8	Appendix	34
8.1	Appendix 15.247	34

4 General Information

4.1 Details of E.U.T.

Power Supply:	DC 12V (powered by AC/DC adapter supplied by Applicant for main unit) DC 3.0V (2 x 1.5V size "AAA" batteries) for remote control
Test Voltage:	AC 120V, 60Hz & DC3V
Cable:	DC input ports (unshielded, 1.2m) HDMI ports (unshielded, <3m) LAN ports (unshielded, >3m) USB ports*3 (unshielded, <3m) Micro SD ports (unshielded, <3m)
Antenna Gain	2 dBi
Number of Antenna	2 (one for transceiver and the other for receiver only)
Antenna Type	Integra Antenna
Modulation Type	FSK
Number of Channels	3
Operation Frequency	2415MHz, 2446MHz and 2470MHz
Power Class	>10mW
Software Version	SecureCRT Portable V7.0.0.326

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	T430u	REF. No. SEA1800
AC/DC adapter	Supplied by client	CS-1205000	None
Monitor	MITSUBISHI ELECTRIC	MDL23ICV	1X201244AC
Mouse	SGS	SGS	None
Keyboard	SGS	SGS	None
Camera	Raysharp	LWB4801	None

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25×10^{-8}
2	Timeout	2s
3	Duty cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted power	0.75dB
6	RF Power Density	2.84dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	4.5dB (below 1GHz)
		4.8dB (above 1GHz)
9	Radiated Spurious Emission Test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
10	Temperature	0.4 °C
11	Humidity	1.3%
12	Supply Voltages	1.5%
13	Time	3%

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

● **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

● **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

● **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to

ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

● **FCC Recognized 2.948 Listed Test Firm(Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

● **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818, Jul 13, 2017.

● **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

● **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

● **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IEC60068-2-27 and Rules of procedure IEC60068-2-27, and the relevant IEC60068-2-27 CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

The EUT passed Radiated Spurious Emissions tests after modification.

5 Equipment List

Minimum 6dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2017-11-15	2018-11-14

Conducted Peak Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2017-11-15	2018-11-14

Power Spectrum Density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2017-11-15	2018-11-14

Conducted Band Edges Measurement					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer	Agilent Technologies	N9020A	SEM004-10	2018-03-10	2019-03-09
ESG vector signal generator	KEYSIGHT	E4438C	SEM006-03	2018-04-14	2019-04-13
EXG Analog Signal Generator	Agilent Technologies	N5171B	SEM006-04	2017-07-26	2020-07-25
Power Meter	Agilent Technologies	U2021XA_C h2	SEM009-02	2017-09-19	2018-09-18
Power Meter	Agilent Technologies	U2021XA_C h3	SEM009-03	2017-09-19	2018-09-18
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2017-11-15	2018-11-14

Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2017-11-15	2018-11-14

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18
RI High frequency Cable	SGS	20 m	EMC0528	2017-04-19	2019-04-18
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKMESS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07
Bilog Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2018-01-08	2019-01-07
Amplifier	HP	8447F	EMC2065	2017-06-19	2018-06-18
PRE AMPLIFIER MH648A	ANRITSU CORP	MH648A	EMC2086	2017-11-20	2018-11-19
Active Loop Antenna	EMCO	6502	EMC0523	2018-02-24	2019-02-23
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18
2.4GHz filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2016-04-30	2018-04-29
966 Anechoic Chamber	C.R.T	9mX6mX6m	EMC2142	2017-11-29	2018-11-28
MXE EMI Receiver	Keysight	N9038A	EMC2139	2017-11-15	2018-11-14
EXA Signal Analyzer	KEYSIGHT	N9010A	EMC2138	2017-11-15	2018-11-14

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	Zhong Yu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Netwok	R&S	ENV216	EMC0118	2018-01-19	2019-01-18
LISN	SCHAFFNER CHASE	MN2050D/1	EMC0102	2017-09-20	2018-09-19
EMI Test Receiver	Rohde & Schwarz	ESCS30	EMC0506	2017-11-27	2018-11-26
Coaxial Cable	HangTianXing	2m	EMC0107	2016-07-24	2018-07-23
Voltage Probe	SGS	N/A	EMC0106	2018-04-04	2020-04-03
Conical Metal Housing	SGS-EMC	N/A	EMC0167	2017-04-19	2019-04-18

Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18
RI High frequency Cable	SGS	20 m	EMC0528	2017-04-19	2019-04-18
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKM SS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07
Bilog Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2018-01-08	2019-01-07
Amplifier	HP	8447F	EMC2065	2017-06-19	2018-06-18
PRE AMPLIFIER MH648A	ANRITSU CORP	MH648A	EMC2086	2017-11-20	2018-11-19
Active Loop Antenna	EMCO	6502	EMC0523	2018-02-24	2019-02-23
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18
2.4GHz filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2016-04-30	2018-04-29
966 Anechoic Chamber	C.R.T	9mX6mX6m	EMC2142	2017-11-29	2018-11-28
MXE EMI Receiver	Keysight	N9038A	EMC2139	2017-11-15	2018-11-14
EXA Signal Analyzer	KEYSIGHT	N9010A	EMC2138	2017-11-15	2018-11-14

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2017-07-26	2018-07-25
DMM	Fluke	73	EMC0007	2017-07-26	2018-07-25

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

6.1.2 Conclusion

Standard Requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2 dBi.

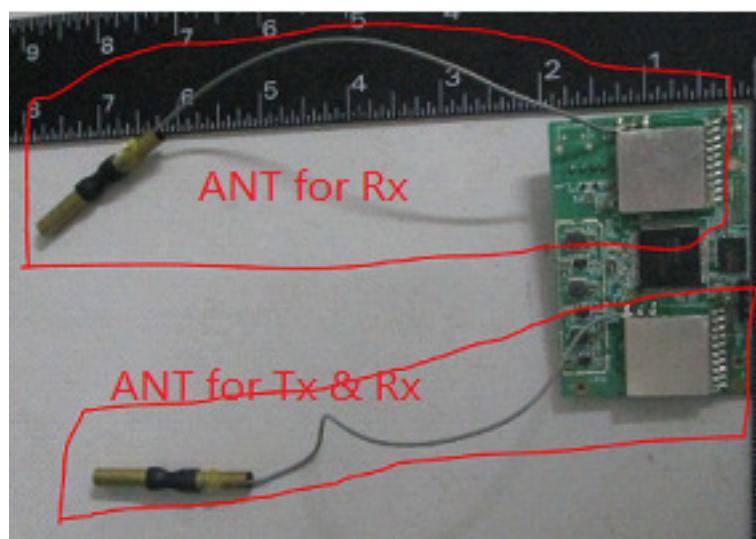

Test result: The unit does meet the FCC requirements.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 20.7 °C Humidity: 40.6 % RH Atmospheric Pressure: 1020 mbar

Test mode a: Normal working mode_Display and Recording.

7.1.2 Test Setup Diagram

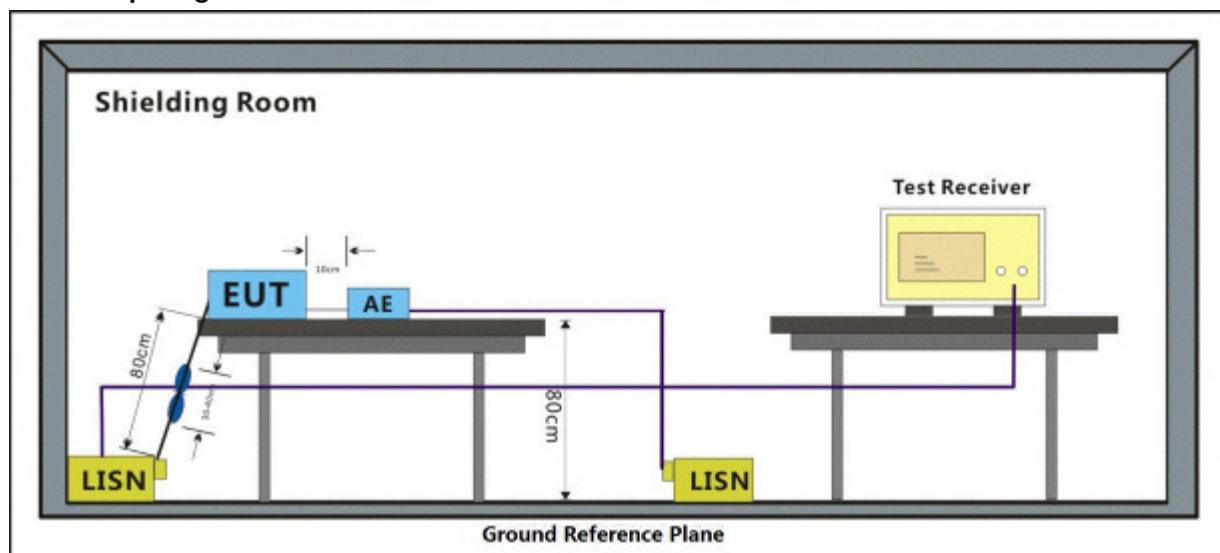


7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50 μ H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor


Mode:a; Line:Live Line

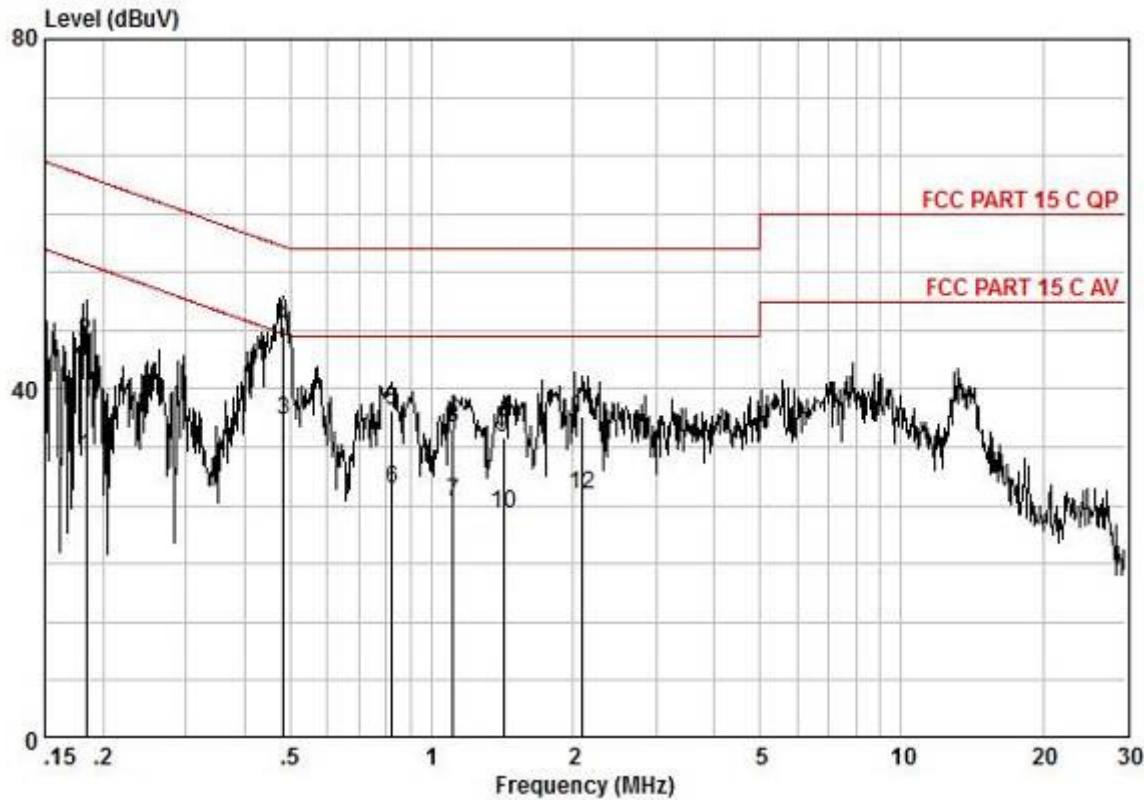

Pol :LIVE
No :
Model :

Frequency MHz	read level dBuV	Cable Loss dB	LISN Factor dB	Measured level dBuV	Limit Line dBuV	Over limit dB	Remark
0.18	22.66	0.10	9.57	32.33	54.33	-21.99	AVERAGE
0.18	35.60	0.10	9.57	45.27	64.33	-19.05	QP
0.48	26.57	0.20	9.65	36.42	46.27	-9.86	AVERAGE
0.48	37.21	0.20	9.65	47.06	56.27	-9.22	QP
0.82	27.56	0.27	9.62	37.45	56.00	-18.55	QP
0.82	18.60	0.27	9.62	28.49	46.00	-17.51	AVERAGE
1.11	17.14	0.30	9.63	27.07	46.00	-18.93	AVERAGE
1.11	25.59	0.30	9.63	35.52	56.00	-20.48	QP
1.43	24.60	0.30	9.62	34.52	56.00	-21.48	QP
1.43	15.84	0.30	9.62	25.76	46.00	-20.24	AVERAGE
2.10	26.89	0.42	9.61	36.92	56.00	-19.08	QP
2.10	17.90	0.42	9.61	27.93	46.00	-18.07	AVERAGE

Mode:a; Line:Neutral Line

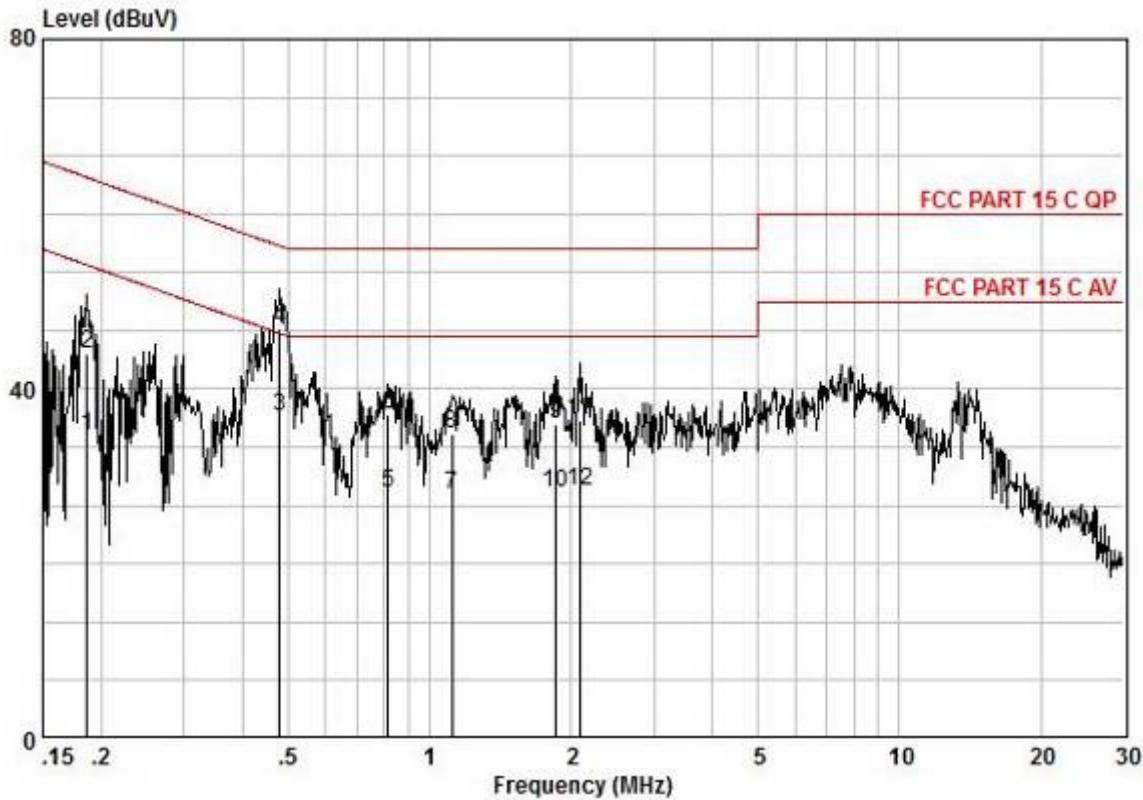

Pol No Model	NEUTRAL							
Frequency MHz	read level dBuV	Cable Loss dB	LISN Factor dB	Measured level dBuV	Limit Line dBuV	Over limit dB	Remark	
0.19	25.08	0.10	9.54	34.72	54.20	-19.47	AVERAGE	
0.19	34.39	0.10	9.54	44.03	64.20	-20.16	QP	
0.48	27.05	0.20	9.55	36.80	46.36	-9.57	AVERAGE	
0.48	37.13	0.20	9.55	46.88	56.36	-9.49	QP	
0.82	18.22	0.27	9.59	28.08	46.00	-17.92	AVERAGE	
0.82	27.29	0.27	9.59	37.15	56.00	-18.85	QP	
1.12	18.00	0.30	9.58	27.88	46.00	-18.12	AVERAGE	
1.12	24.93	0.30	9.58	34.81	56.00	-21.19	QP	
1.86	26.16	0.37	9.53	36.06	56.00	-19.94	QP	
1.86	18.15	0.37	9.53	28.05	46.00	-17.95	AVERAGE	
2.09	26.44	0.41	9.52	36.38	56.00	-19.62	QP	
2.09	18.35	0.41	9.52	28.29	46.00	-17.71	AVERAGE	

7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1
Limit: ≥ 500 kHz


7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 55 % RH Atmospheric Pressure: 1020 mbar

Test Mode: b: TX mode_Keep the EUT in continuously transmitting mode with FSK modulation

7.2.2 Test Setup Diagram

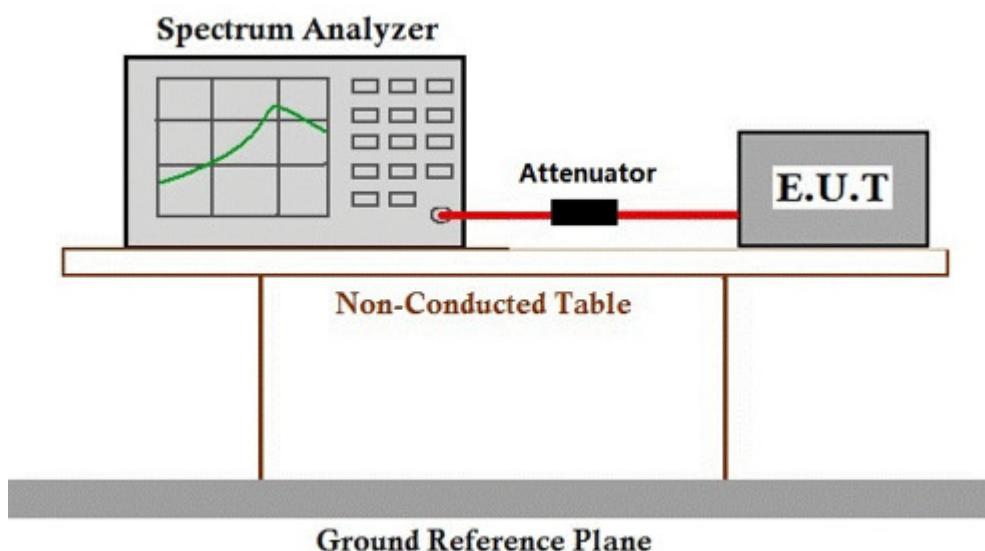

7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 55 % RH Atmospheric Pressure: 1020 mbar

Test Mode: b: TX mode_Keep the EUT in continuously transmitting mode with FSK modulation

7.3.2 Test Setup Diagram

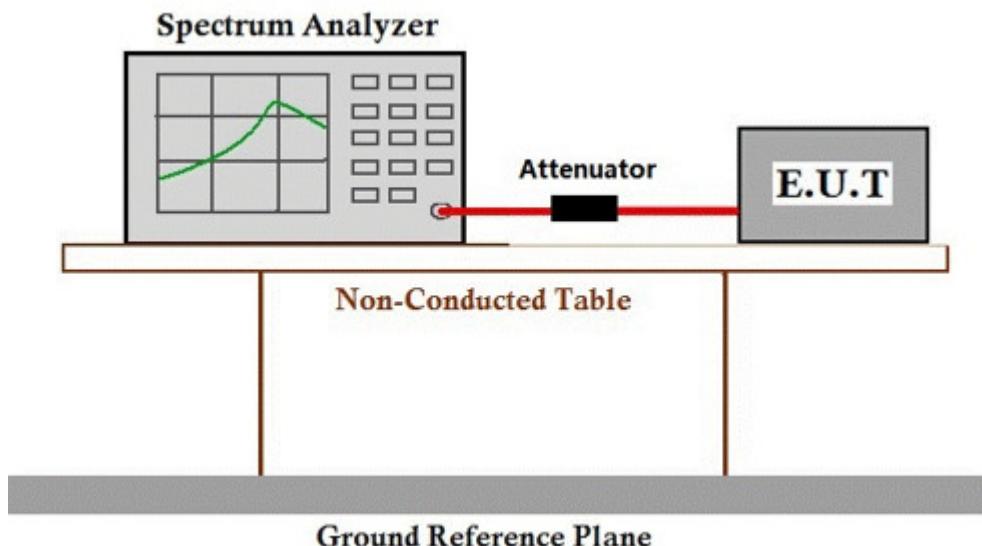

7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.4 Power Spectrum Density


Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
Test Method: ANSI C63.10 (2013) Section 11.10.2
Limit: ≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 55 % RH Atmospheric Pressure: 1020 mbar
Test Mode: b: TX mode_Keep the EUT in continuously transmitting mode with FSK modulation

7.4.2 Test Setup Diagram

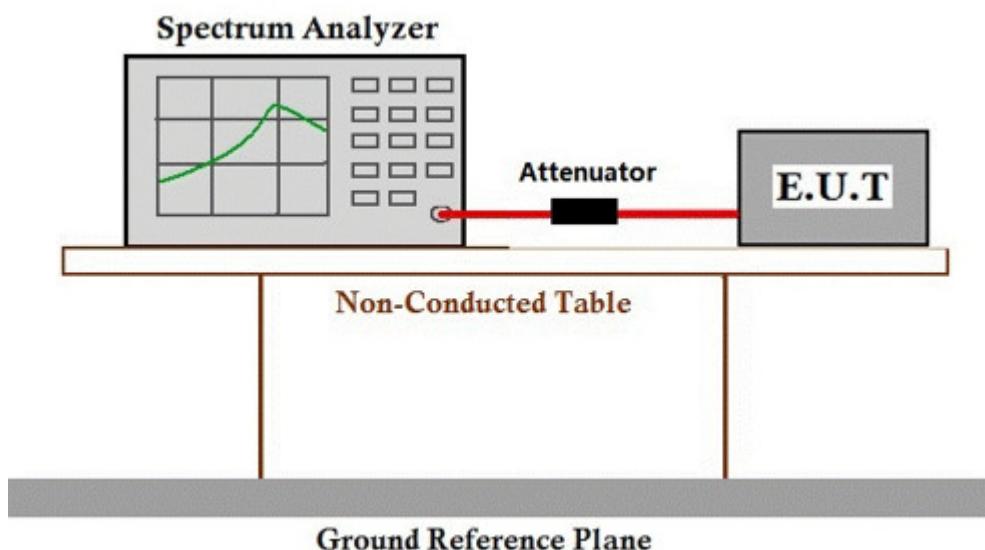

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.5 Conducted Band Edges Measurement

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 11.13
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))


7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 55 % RH Atmospheric Pressure: 1020 mbar

Test Mode: b: TX mode_Keep the EUT in continuously transmitting mode with FSK modulation

7.5.2 Test Setup Diagram

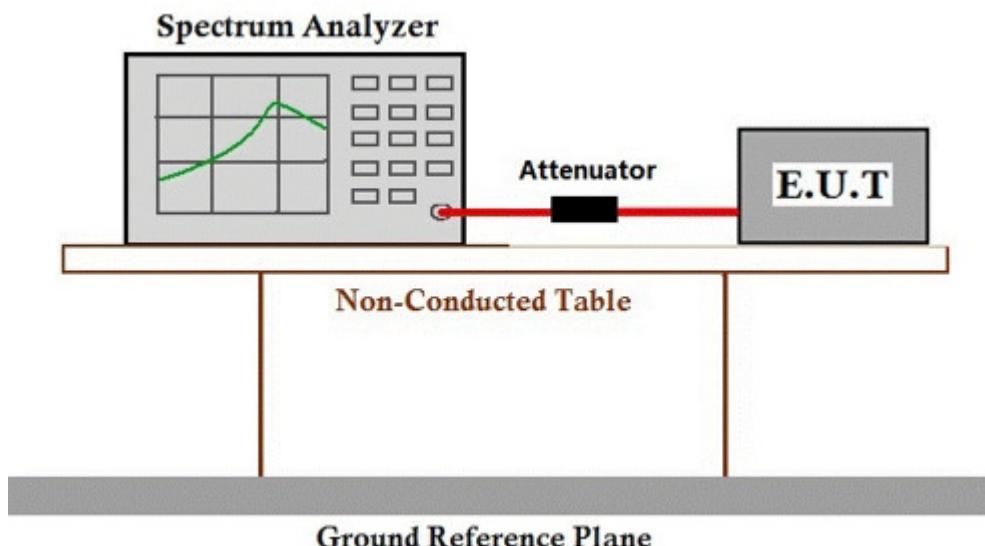

7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.6 Conducted Spurious Emissions

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 11.11
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))


7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 55 % RH Atmospheric Pressure: 1020 mbar

Test Mode: b: TX mode_Keep the EUT in continuously transmitting mode with FSK modulation

7.6.2 Test Setup Diagram

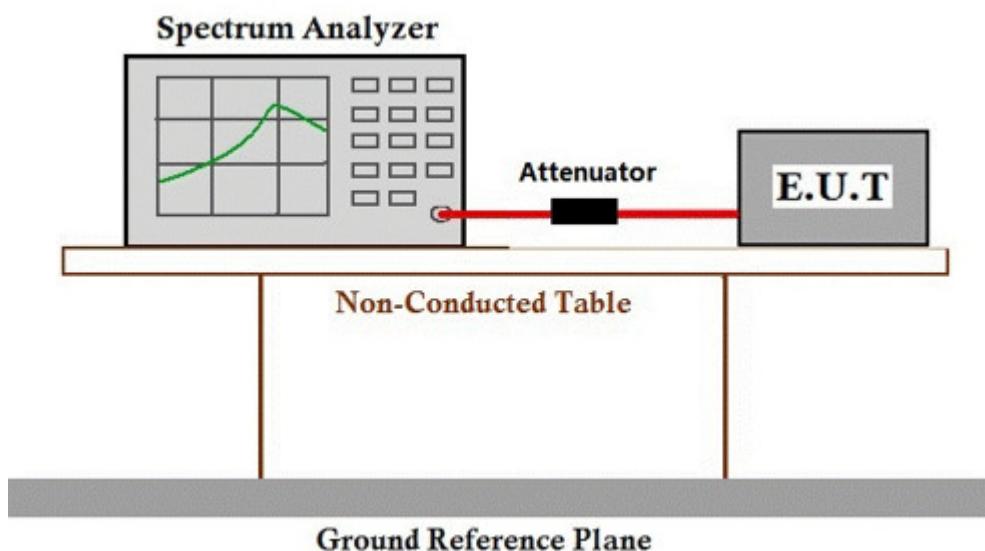

7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 11.12

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C Humidity: 56.6 % RH Atmospheric Pressure: 1020 mbar

Test Mode: b: TX mode_Keep the EUT in continuously transmitting mode with FSK modulation

7.7.2 Test Setup Diagram

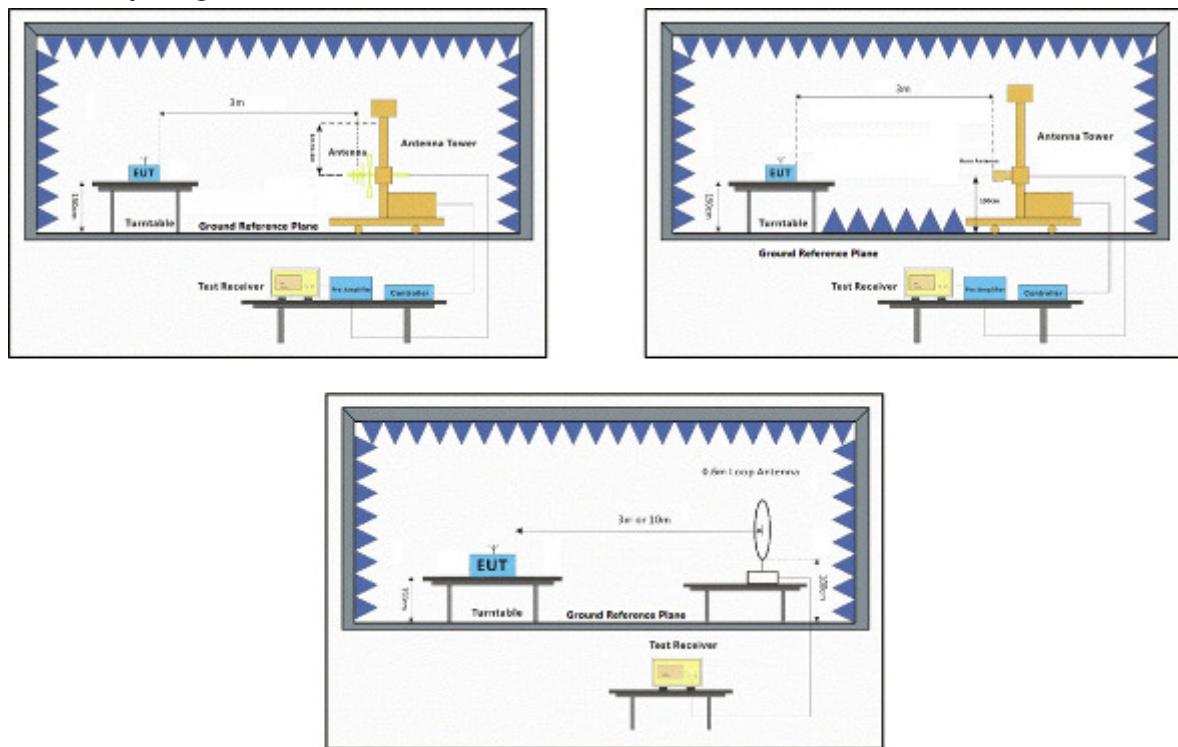

7.7.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Mode:a; Polarization:Horizontal; Modulation:FSK; Channel:Low

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Pol/Phase	Remark
	Level	Factor	Loss	Factor	Level	Line				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	43.32	26.25	5.03	37.44	37.16	54.00	-16.84	HORIZONTAL	Average
2	2310.000	47.37	26.25	5.03	37.44	41.21	74.00	-32.79	HORIZONTAL	Peak
3	2390.000	48.00	26.43	4.88	37.42	41.89	54.00	-12.11	HORIZONTAL	Average
4	2390.000	52.00	26.43	4.88	37.42	45.89	74.00	-28.11	HORIZONTAL	Peak
5	2483.500	43.48	26.58	5.23	37.40	37.89	54.00	-16.11	HORIZONTAL	Average
6	2483.500	48.36	26.58	5.23	37.40	42.77	74.00	-31.23	HORIZONTAL	Peak
7	2500.000	43.56	26.60	4.95	37.39	37.72	54.00	-16.28	HORIZONTAL	Average
8	2500.000	48.50	26.60	4.95	37.39	42.66	74.00	-31.34	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:FSK; Channel:Low

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Pol/Phase	Remark
	Level	Factor	Loss	Factor	Level	Line				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	41.95	26.25	5.03	37.44	35.79	54.00	-18.21	VERTICAL	Average
2	2310.000	46.10	26.25	5.03	37.44	39.94	74.00	-34.06	VERTICAL	Peak
3	2390.000	42.44	26.43	4.88	37.42	36.33	54.00	-17.67	VERTICAL	Average
4	2390.000	47.05	26.43	4.88	37.42	40.94	74.00	-33.06	VERTICAL	Peak
5	2483.500	39.49	26.58	5.23	37.40	33.90	54.00	-20.10	VERTICAL	Average
6	2483.500	46.47	26.58	5.23	37.40	40.88	74.00	-33.12	VERTICAL	Peak
7	2500.000	41.00	26.60	4.95	37.39	35.16	54.00	-18.84	VERTICAL	Average
8	2500.000	46.90	26.60	4.95	37.39	41.06	74.00	-32.94	VERTICAL	Peak

Mode:a; Polarization:Horizontal; Modulation:FSK; Channel:High

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Pol/Phase	Remark
	Level	Factor	Loss	Factor	Level	Line				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	41.37	26.25	5.03	37.44	35.21	54.00	-18.79	HORIZONTAL	Average
2	2310.000	47.19	26.25	5.03	37.44	41.03	74.00	-32.97	HORIZONTAL	Peak
3	2390.000	43.27	26.43	4.88	37.42	37.16	54.00	-16.84	HORIZONTAL	Average
4	2390.000	49.28	26.43	4.88	37.42	43.17	74.00	-30.83	HORIZONTAL	Peak
5	2483.500	48.72	26.58	5.23	37.40	43.13	54.00	-10.87	HORIZONTAL	Average
6	2483.500	55.57	26.58	5.23	37.40	49.98	74.00	-24.02	HORIZONTAL	Peak
7	2500.000	44.90	26.60	4.95	37.39	39.06	54.00	-14.94	HORIZONTAL	Average
8	2500.000	49.84	26.60	4.95	37.39	44.00	74.00	-30.00	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:FSK; Channel:High

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Pol/Phase	Remark
	Level	Factor	Loss	Factor	Level	Line				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	41.52	26.25	5.03	37.44	35.36	54.00	-18.64	VERTICAL	Average
2	2310.000	47.53	26.25	5.03	37.44	41.37	74.00	-32.63	VERTICAL	Peak
3	2390.000	43.05	26.43	4.88	37.42	36.94	54.00	-17.06	VERTICAL	Average
4	2390.000	47.01	26.43	4.88	37.42	40.90	74.00	-33.10	VERTICAL	Peak
5	2483.500	42.09	26.58	5.23	37.40	36.50	54.00	-17.50	VERTICAL	Average
6	2483.500	47.02	26.58	5.23	37.40	41.43	74.00	-32.57	VERTICAL	Peak
7	2500.000	41.44	26.60	4.95	37.39	35.60	54.00	-18.40	VERTICAL	Average
8	2500.000	47.44	26.60	4.95	37.39	41.60	74.00	-32.40	VERTICAL	Peak

7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 11.11

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 E.U.T. Operation

Operating Environment:


Temperature: 24 °C Humidity: 56.6 % RH Atmospheric Pressure: 1020 mbar

Test Mode: b: TX mode_Keep the EUT in continuously transmitting mode with FSK modulation

Final Test Mode: TX mode_Keep the EUT in continuously transmitting mode with FSK modulation

For below 1GHz part, through pre-scan, the worst case is the lowest channel Transmitting mode.

Only the worst case is recorded in the report.

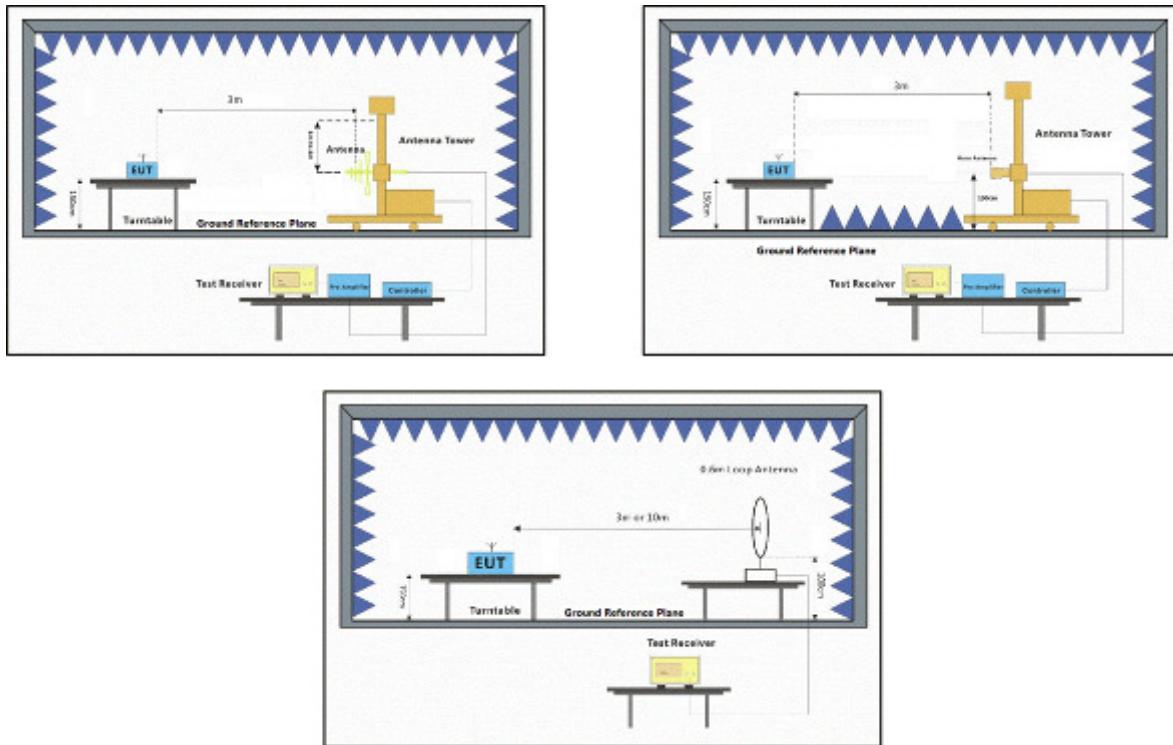7.8.2 Test Setup Diagram

7.8.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown

For 9KHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with Loop antenna and the amplitude of spurious emissions from the radiator are attenuated more than 20dB below the limit, so the test data were not recorded in the test report.

For above 30MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Mode:a; Polarization:Horizontal; Modulation:FSK; Channel:Low

Freq	ReadAntenna		Cable		Preamp	Limit	Over	Pol/Phase	Remark
	Level	Factor	Loss	Factor					
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	100.934	41.11	9.66	0.85	27.17	24.45	43.50	-19.05	HORIZONTAL QP
2	158.112	31.03	13.38	1.25	28.10	17.56	43.50	-25.94	HORIZONTAL QP
3	287.990	35.01	13.75	1.76	28.97	21.55	46.00	-24.45	HORIZONTAL QP
4	383.932	37.54	16.20	2.17	29.75	26.16	46.00	-19.84	HORIZONTAL QP
5	549.020	37.31	19.49	2.12	29.61	29.31	46.00	-16.69	HORIZONTAL QP
6	793.396	35.40	22.66	2.78	28.72	32.12	46.00	-13.88	HORIZONTAL QP

Mode:a; Polarization:Horizontal; Modulation:FSK; ; Channel:Low

Freq	ReadAntenna		Cable		Preamp	Limit	Over	Pol/Phase	Remark
	Level	Factor	Loss	Factor					
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	4218.186	35.04	29.75	6.58	36.91	34.46	54.00	-19.54	HORIZONTAL Average
2	4218.186	45.54	29.75	6.58	36.91	44.96	74.00	-29.04	HORIZONTAL Peak
3	4940.977	34.74	31.03	7.67	36.95	36.49	54.00	-17.51	HORIZONTAL Average
4	4940.977	44.87	31.03	7.67	36.95	46.62	74.00	-27.38	HORIZONTAL Peak
5	7410.727	32.55	35.89	7.42	36.92	38.94	54.00	-15.06	HORIZONTAL Average
6	7410.727	42.96	35.89	7.42	36.92	49.35	74.00	-24.65	HORIZONTAL Peak
7	8059.475	28.23	36.46	8.33	36.90	36.12	54.00	-17.88	HORIZONTAL Average
8	8059.475	39.27	36.46	8.33	36.90	47.16	74.00	-26.84	HORIZONTAL Peak
9	9880.164	29.84	37.86	8.52	37.09	39.13	54.00	-14.87	HORIZONTAL Average
10	9880.164	39.95	37.86	8.52	37.09	49.24	74.00	-24.76	HORIZONTAL Peak
11	12350.070	27.28	38.98	11.13	36.93	40.46	54.00	-13.54	HORIZONTAL Average
12	12350.070	38.86	38.98	11.13	36.93	52.04	74.00	-21.96	HORIZONTAL Peak

Mode:a; Polarization:Vertical; Modulation:FSK; Channel:Low

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Pol/Phase	Remark
	Level	Factor	Loss	Factor	Level	Line				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	107.510	32.93	10.25	0.87	27.49	16.56	43.50	-26.94	VERTICAL	QP
2	148.441	32.22	13.22	1.16	28.13	18.47	43.50	-25.03	VERTICAL	QP
3	208.580	35.86	11.33	1.07	28.59	19.67	43.50	-23.83	VERTICAL	QP
4	299.316	36.76	13.99	1.78	29.19	23.34	46.00	-22.66	VERTICAL	QP
5	449.556	39.00	17.41	1.92	29.46	28.87	46.00	-17.13	VERTICAL	QP
6	851.035	35.08	23.41	2.93	28.46	32.96	46.00	-13.04	VERTICAL	QP

Mode:a; Polarization:Vertical; Modulation:FSK; Channel:Low

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Pol/Phase	Remark
	Level	Factor	Loss	Factor	Level	Line				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3671.746	34.74	28.39	6.93	36.93	33.13	54.00	-20.87	VERTICAL	Average
2	3671.746	45.95	28.39	6.93	36.93	44.34	74.00	-29.66	VERTICAL	Peak
3	4830.043	36.82	30.85	6.15	36.94	36.88	54.00	-17.12	VERTICAL	Average
4	4830.043	46.31	30.85	6.15	36.94	46.37	74.00	-27.63	VERTICAL	Peak
5	6340.436	33.81	33.76	6.97	36.99	37.55	54.00	-16.45	VERTICAL	Average
6	6340.436	44.77	33.76	6.97	36.99	48.51	74.00	-25.49	VERTICAL	Peak
7	7245.838	34.35	35.55	7.35	36.92	40.33	54.00	-13.67	VERTICAL	Average
8	7245.838	44.69	35.55	7.35	36.92	50.67	74.00	-23.33	VERTICAL	Peak
9	9660.230	31.98	37.58	8.21	37.08	40.69	54.00	-13.31	VERTICAL	Average
10	9660.230	41.17	37.58	8.21	37.08	49.88	74.00	-24.12	VERTICAL	Peak
11	12075.270	27.75	39.42	10.76	37.15	40.78	54.00	-13.22	VERTICAL	Average
12	12075.270	37.47	39.42	10.76	37.15	50.50	74.00	-23.50	VERTICAL	Peak

Mode:a; Polarization:Horizontal; Modulation:FSK; Channel:middle

Freq	ReadAntenna		Cable		Preamp Level	Limit Line	Over Limit	Over Pol/Phase	Remark
	MHz	dBuV	dB/m	dB					
1	4291.977	34.30	29.89	6.38	36.91	33.66	54.00	-20.34	HORIZONTAL Average
2	4291.977	45.58	29.89	6.38	36.91	44.94	74.00	-29.06	HORIZONTAL Peak
3	4830.668	34.22	30.85	6.15	36.94	34.28	54.00	-19.72	HORIZONTAL Average
4	4830.668	44.50	30.85	6.15	36.94	44.56	74.00	-29.44	HORIZONTAL Peak
5	5864.443	33.02	32.22	7.44	37.00	35.68	54.00	-18.32	HORIZONTAL Average
6	5864.443	44.04	32.22	7.44	37.00	46.70	74.00	-27.30	HORIZONTAL Peak
7	7245.518	33.47	35.55	7.35	36.92	39.45	54.00	-14.55	HORIZONTAL Average
8	7245.518	43.23	35.55	7.35	36.92	49.21	74.00	-24.79	HORIZONTAL Peak
9	9660.530	32.30	37.58	8.21	37.08	41.01	54.00	-12.99	HORIZONTAL Average
10	9660.530	42.79	37.58	8.21	37.08	51.50	74.00	-22.50	HORIZONTAL Peak
11	12075.390	29.70	39.42	10.76	37.15	42.73	54.00	-11.27	HORIZONTAL Average
12	12075.390	39.32	39.42	10.76	37.15	52.35	74.00	-21.65	HORIZONTAL Peak

Mode:a; Polarization:Vertical; Modulation:FSK; Channel:middle

Freq	ReadAntenna		Cable		Preamp Level	Limit Line	Over Limit	Over Pol/Phase	Remark
	MHz	dBuV	dB/m	dB					
1	4242.641	32.13	29.80	6.53	36.91	31.55	54.00	-22.45	VERTICAL Average
2	4242.641	44.96	29.80	6.53	36.91	44.38	74.00	-29.62	VERTICAL Peak
3	4940.977	33.23	31.03	7.67	36.95	34.98	54.00	-19.02	VERTICAL Average
4	4940.977	44.67	31.03	7.67	36.95	46.42	74.00	-27.58	VERTICAL Peak
5	5746.982	35.93	32.10	7.05	36.99	38.09	54.00	-15.91	VERTICAL Average
6	5746.982	45.18	32.10	7.05	36.99	47.34	74.00	-26.66	VERTICAL Peak
7	7410.034	33.72	35.89	7.42	36.92	40.11	54.00	-13.89	VERTICAL Average
8	7410.034	45.29	35.89	7.42	36.92	51.68	74.00	-22.32	VERTICAL Peak
9	9880.272	33.13	37.86	8.52	37.09	42.42	54.00	-11.58	VERTICAL Average
10	9880.272	43.17	37.86	8.52	37.09	52.46	74.00	-21.54	VERTICAL Peak
11	12350.710	29.20	38.98	11.13	36.93	42.38	54.00	-11.62	VERTICAL Average
12	12350.710	39.17	38.98	11.13	36.93	52.35	74.00	-21.65	VERTICAL Peak

Mode:a; Polarization:Horizontal; Modulation:FSK; Channel:High

Freq	ReadAntenna		Cable		Preamp	Level	Limit	Over	Pol/Phase	Remark
	Level	Factor	Loss	Factor						
	MHz	dBuV	dB/m		dB	dB	dBuV/m	dBuV/m		dB
1	3823.371	34.35	29.08	7.83	36.91	34.35	54.00	-19.65	HORIZONTAL	Average
2	3823.371	44.03	29.08	7.83	36.91	44.03	74.00	-29.97	HORIZONTAL	Peak
3	4890.058	33.55	30.95	6.86	36.95	34.41	54.00	-19.59	HORIZONTAL	Average
4	4890.058	44.02	30.95	6.86	36.95	44.88	74.00	-29.12	HORIZONTAL	Peak
5	6659.763	34.84	34.53	7.15	36.97	39.55	54.00	-14.45	HORIZONTAL	Average
6	6659.763	44.34	34.53	7.15	36.97	49.05	74.00	-24.95	HORIZONTAL	Peak
7	7335.795	32.65	35.74	7.39	36.92	38.86	54.00	-15.14	HORIZONTAL	Average
8	7335.795	43.22	35.74	7.39	36.92	49.43	74.00	-24.57	HORIZONTAL	Peak
9	9780.371	32.92	37.74	8.37	37.09	41.94	54.00	-12.06	HORIZONTAL	Average
10	9780.371	41.29	37.74	8.37	37.09	50.31	74.00	-23.69	HORIZONTAL	Peak
11	12225.920	26.68	39.21	10.98	37.06	39.81	54.00	-14.19	HORIZONTAL	Average
12	12225.920	37.31	39.21	10.98	37.06	50.44	74.00	-23.56	HORIZONTAL	Peak

Mode:a; Polarization:Vertical; Modulation:FSK; Channel:High


Freq	ReadAntenna		Cable		Preamp	Level	Limit	Over	Pol/Phase	Remark
	Level	Factor	Loss	Factor						
	MHz	dBuV	dB/m		dB	dB	dBuV/m	dBuV/m		dB
1	4890.490	34.59	30.95	6.86	36.95	35.45	54.00	-18.55	VERTICAL	Average
2	4890.490	43.29	30.95	6.86	36.95	44.15	74.00	-29.85	VERTICAL	Peak
3	5408.529	34.45	31.79	7.52	36.99	36.77	54.00	-17.23	VERTICAL	Average
4	5408.529	43.92	31.79	7.52	36.99	46.24	74.00	-27.76	VERTICAL	Peak
5	7335.052	31.61	35.74	7.39	36.92	37.82	54.00	-16.18	VERTICAL	Average
6	7335.052	43.12	35.74	7.39	36.92	49.33	74.00	-24.67	VERTICAL	Peak
7	7943.838	32.34	36.47	8.38	36.90	40.29	54.00	-13.71	VERTICAL	Average
8	7943.838	43.06	36.47	8.38	36.90	51.01	74.00	-22.99	VERTICAL	Peak
9	9780.151	33.20	37.74	8.37	37.09	42.22	54.00	-11.78	VERTICAL	Average
10	9780.151	42.70	37.74	8.37	37.09	51.72	74.00	-22.28	VERTICAL	Peak
11	12225.560	30.15	39.21	10.98	37.06	43.28	54.00	-10.72	VERTICAL	Average
12	12225.560	38.34	39.21	10.98	37.06	51.47	74.00	-22.53	VERTICAL	Peak

8 Appendix

8.1 Appendix 15.247

1.6dB Bandwidth


Test Channel	Ant	6 dB BW[MHz]	Limit[MHz]	Verdict
2415	Ant1	1.144	0.5	PASS
2446	Ant1	1.109	0.5	PASS
2470	Ant1	0.993	0.5	PASS

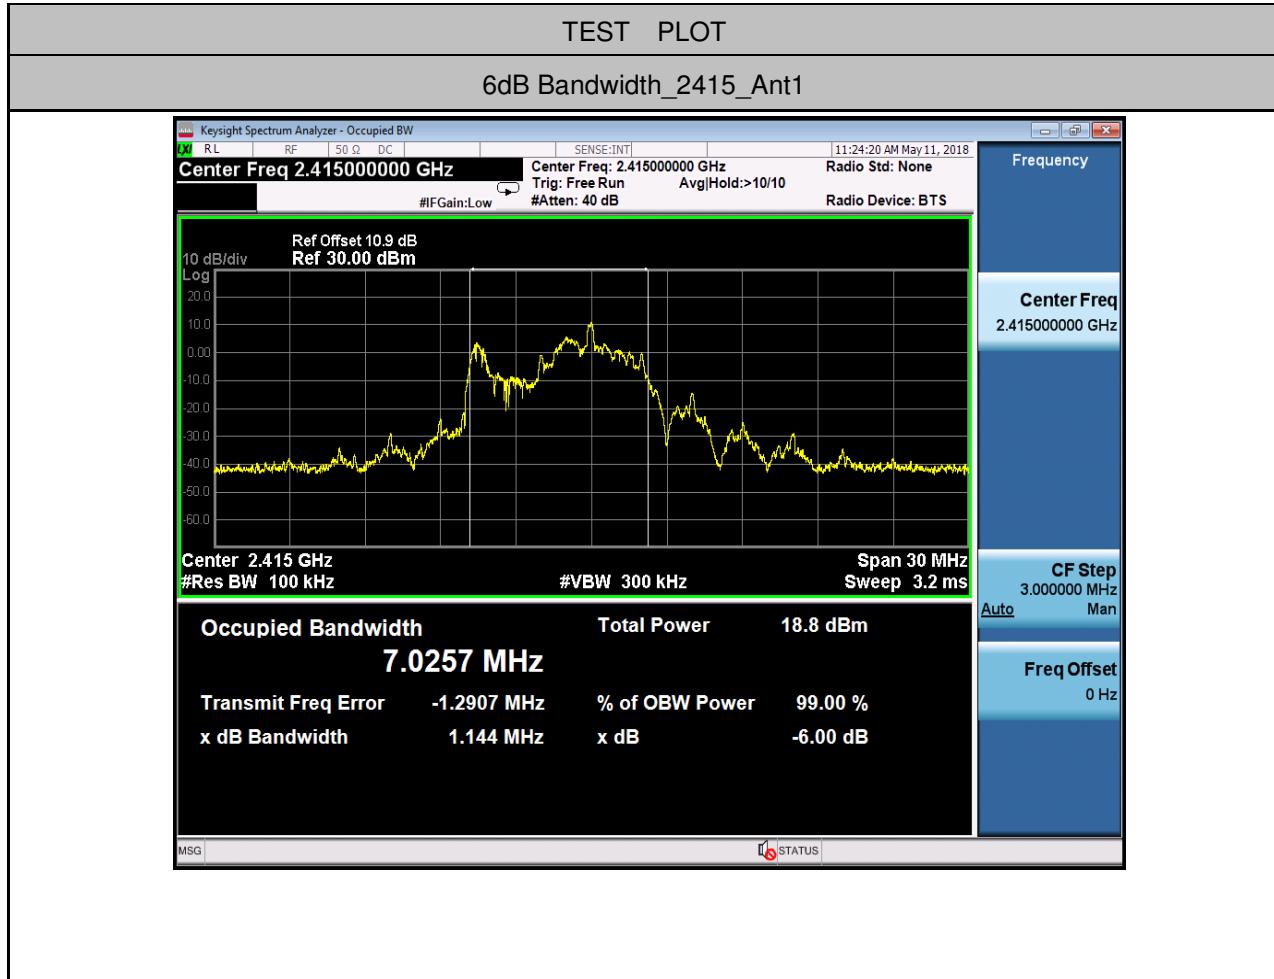




2. Maximum peak conducted output power


Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
2415	Ant1	12.439	30	PASS
2446	Ant1	12.144	30	PASS
2470	Ant1	11.940	30	PASS

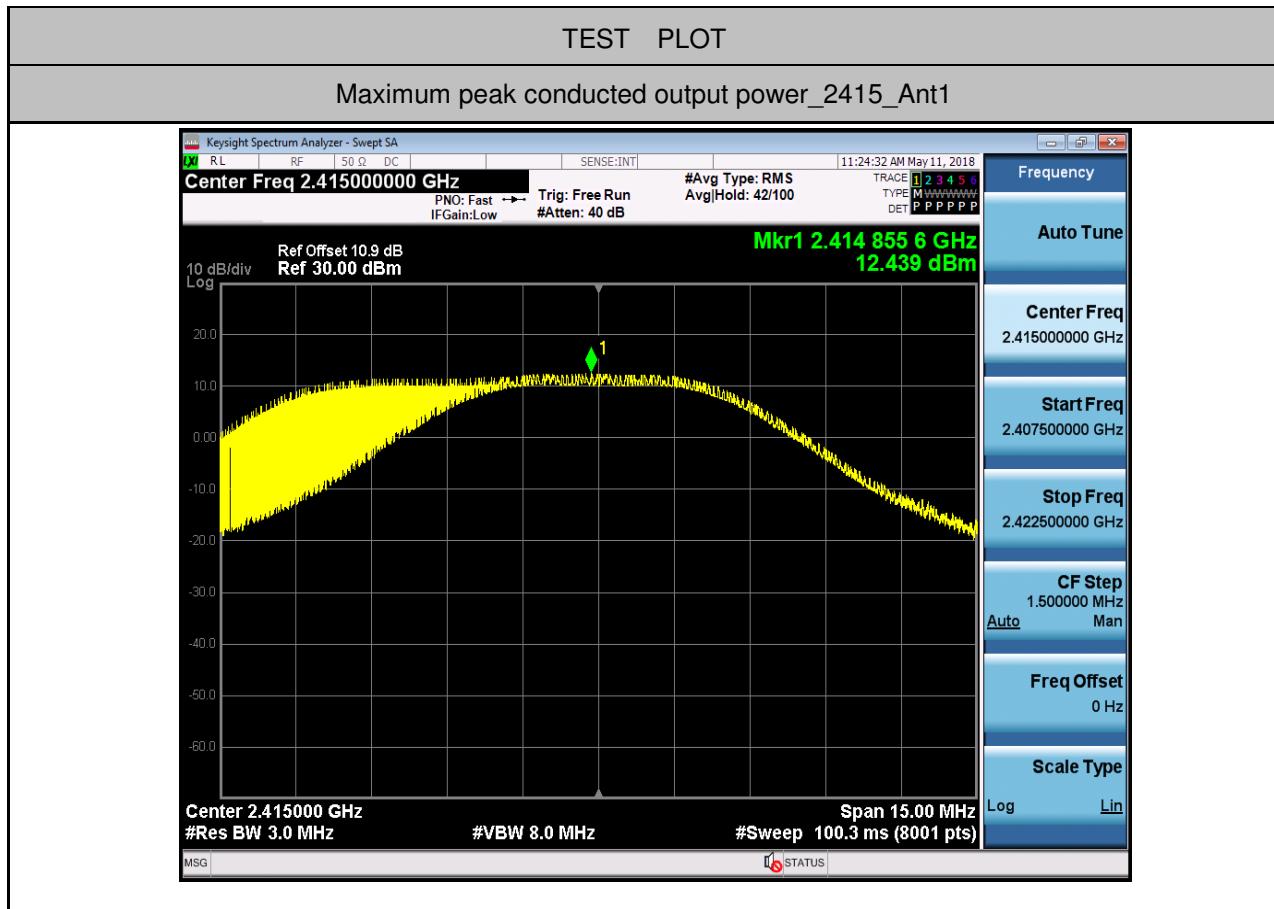


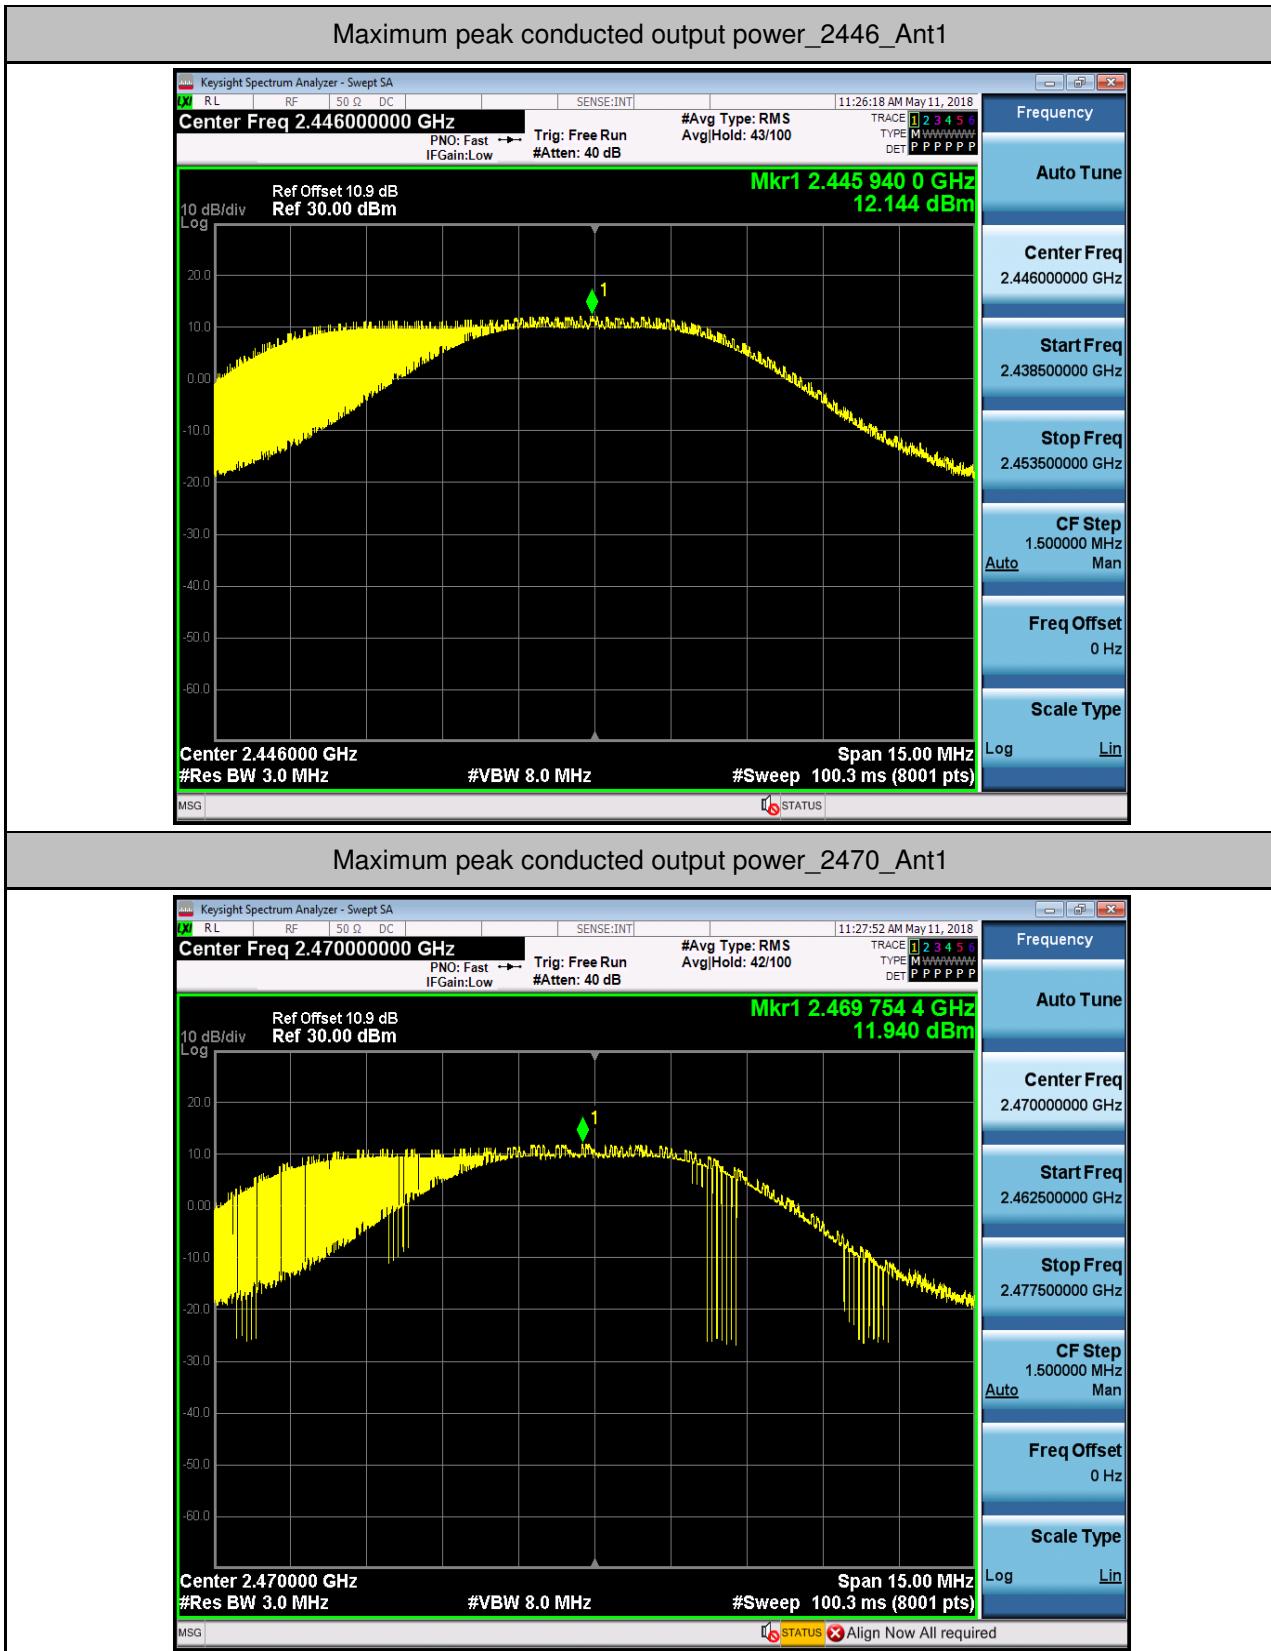

3. Maximum Peak power spectral density


Test Channel	Ant	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
2415	Ant1	-2.253	8.00	PASS
2446	Ant1	-3.176	8.00	PASS
2470	Ant1	-2.265	8.00	PASS

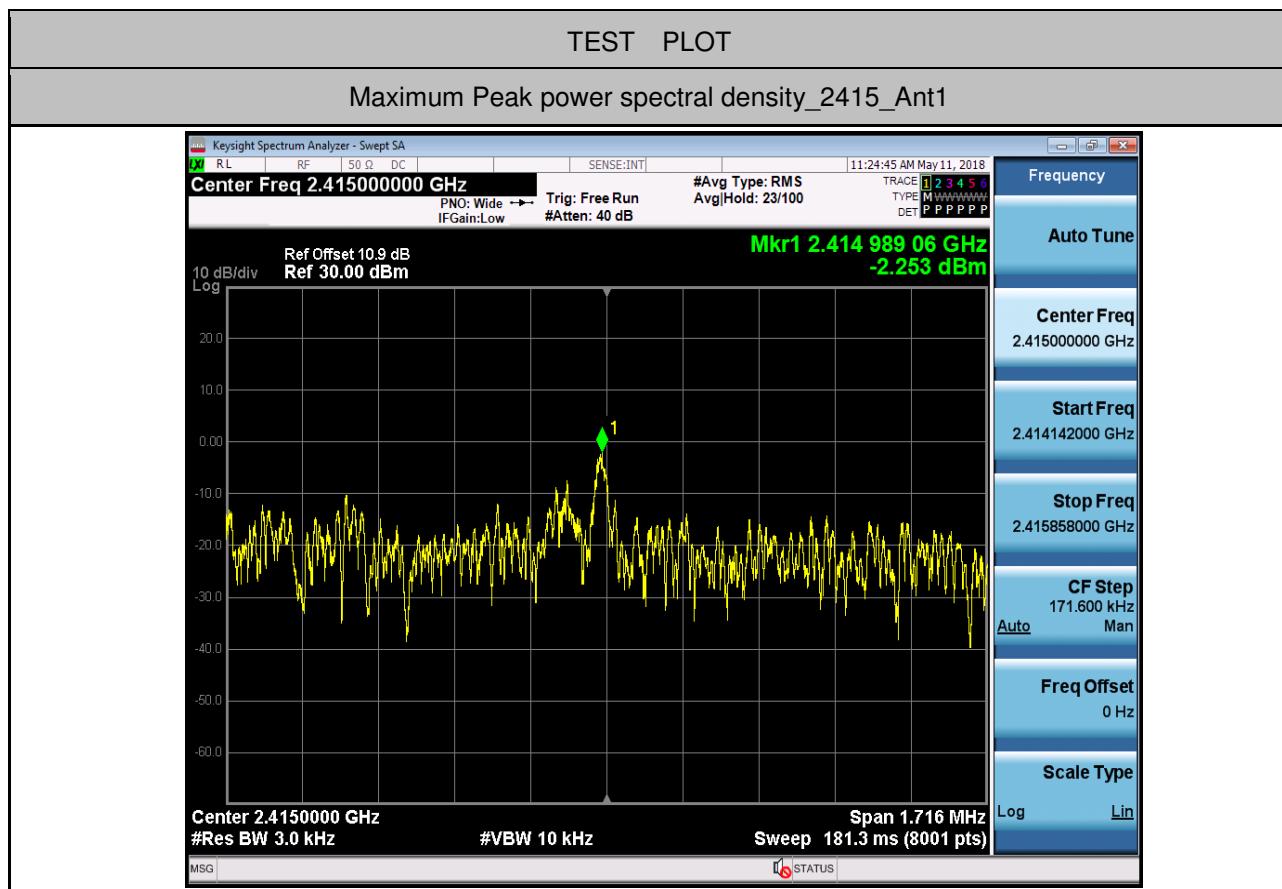


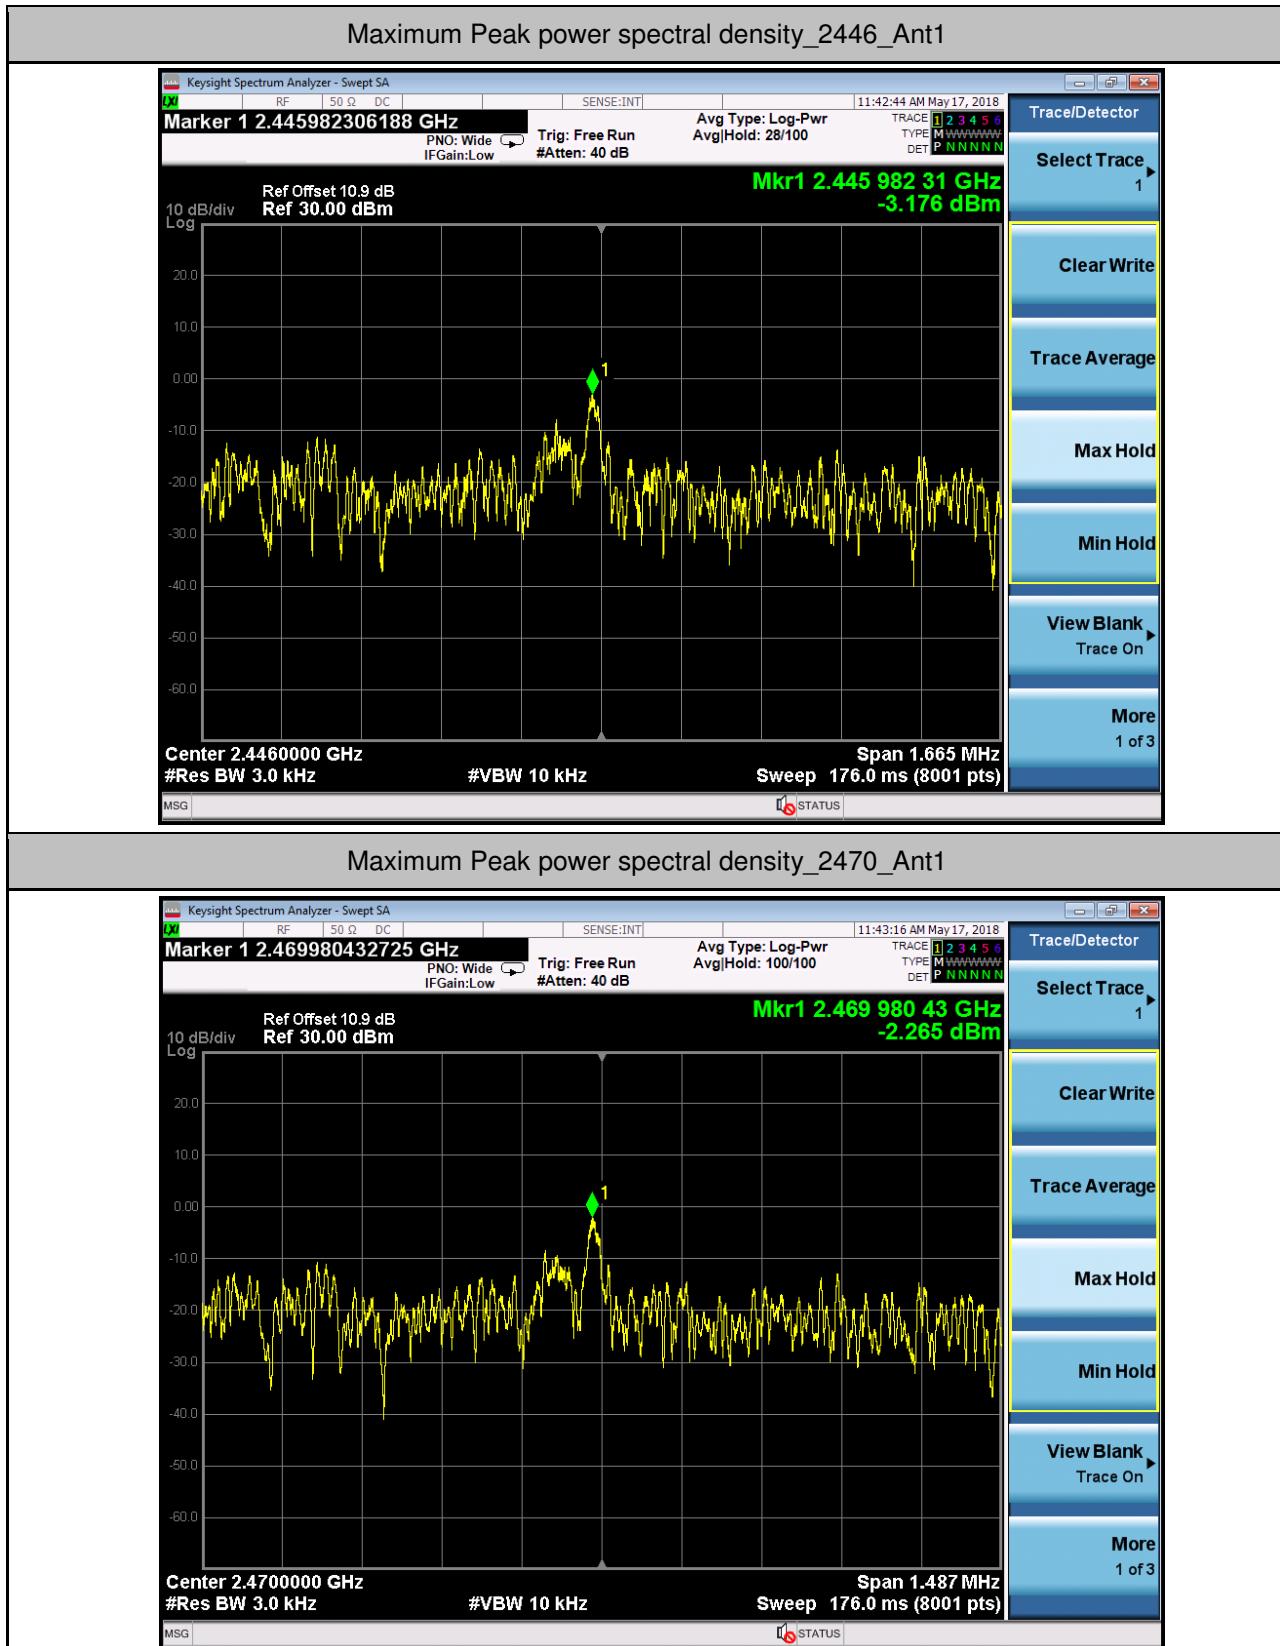

4.Band-edge for RF Conducted Emissions

Test Channel	Ant	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
2415	Ant1	11.003	-38.325	-9.000	PASS
2470	Ant1	11.818	-38.495	-8.180	PASS

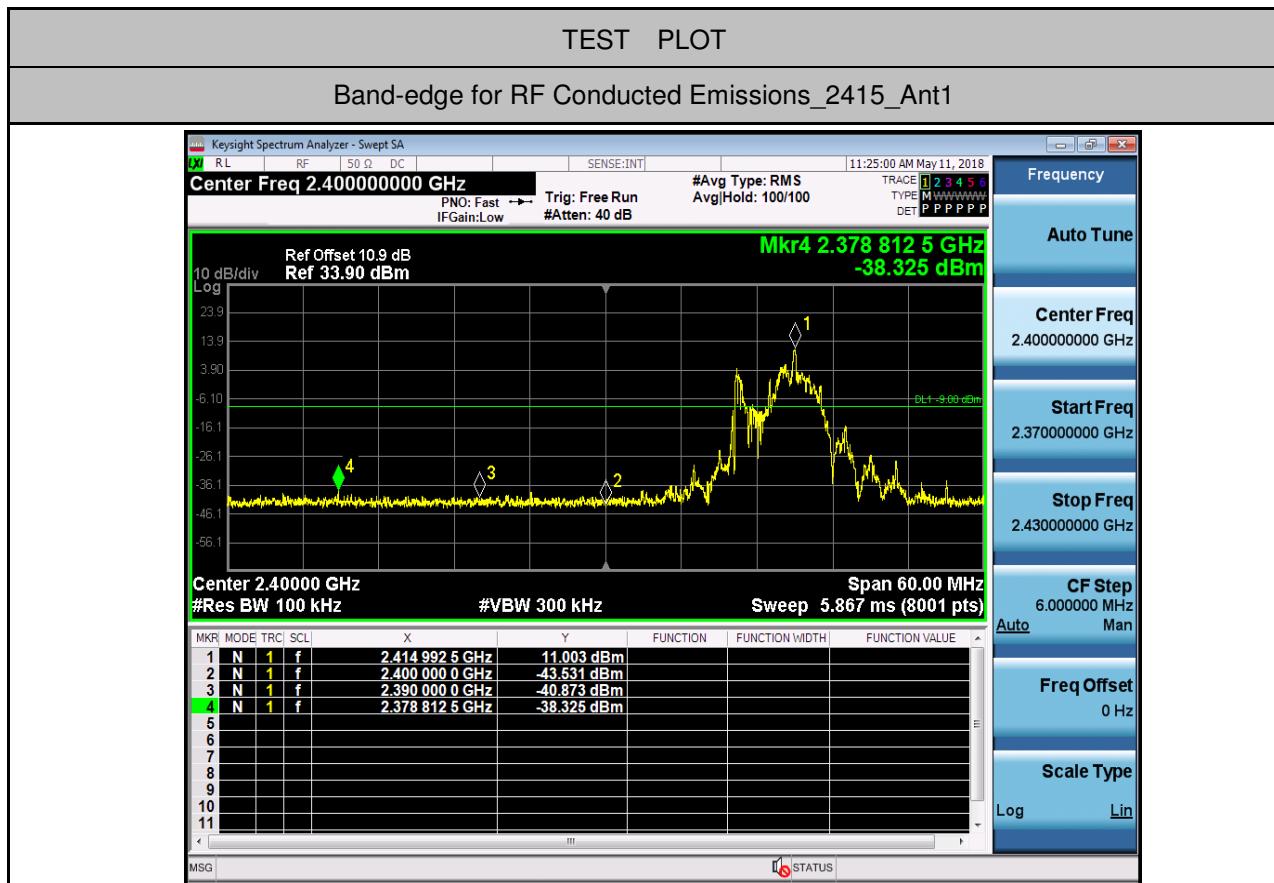


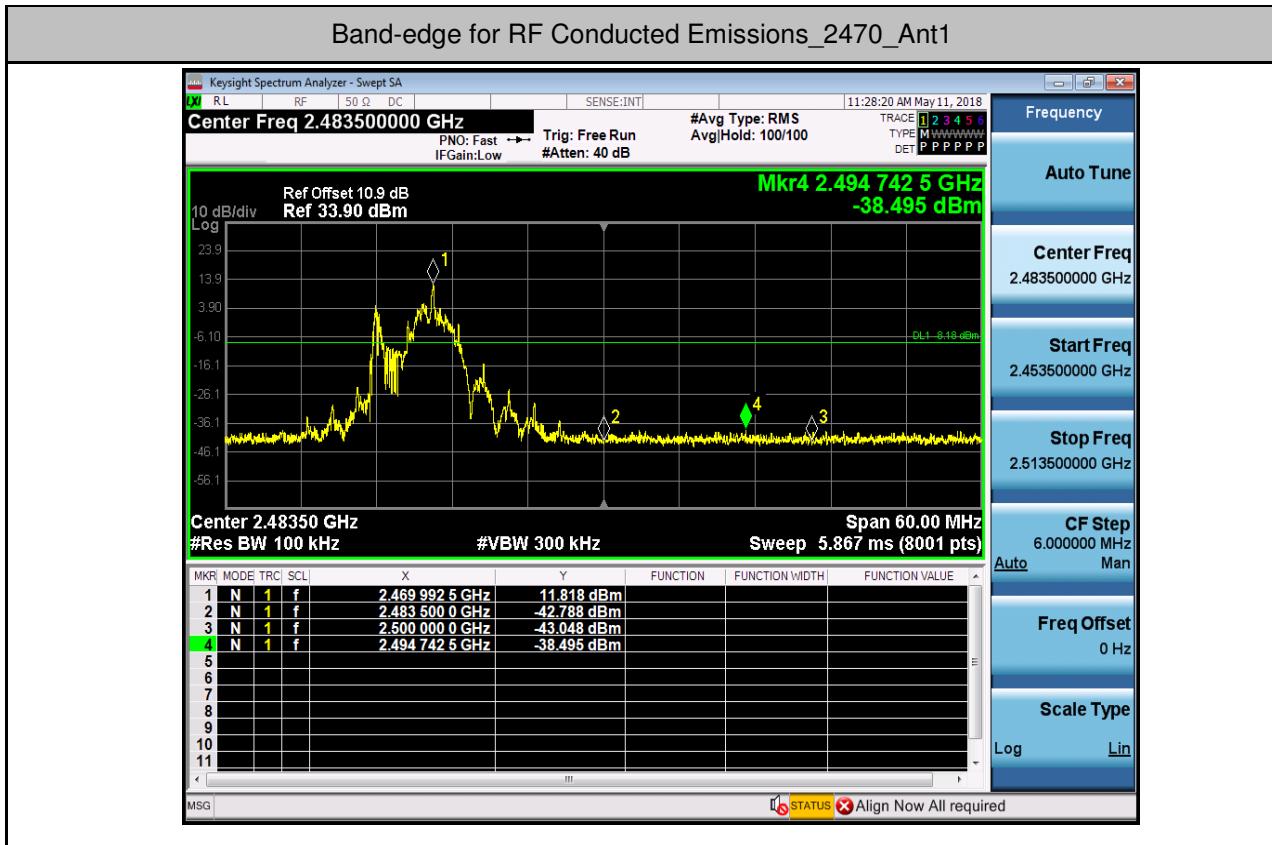



5.RF Conducted Spurious Emissions


Test Channel	Ant	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
2415	Ant1	30	10000	100	300	10.623	-44.654	<-9.377	PASS
2415	Ant1	10000	26000	100	300	10.623	-41.819	<-9.377	PASS
2446	Ant1	30	10000	100	300	11.990	-44.411	<-8.010	PASS
2446	Ant1	10000	26000	100	300	11.990	-41.402	<-8.010	PASS
2470	Ant1	30	10000	100	300	11.757	-44.022	<-8.243	PASS
2470	Ant1	10000	26000	100	300	11.757	-40.042	<-8.243	PASS



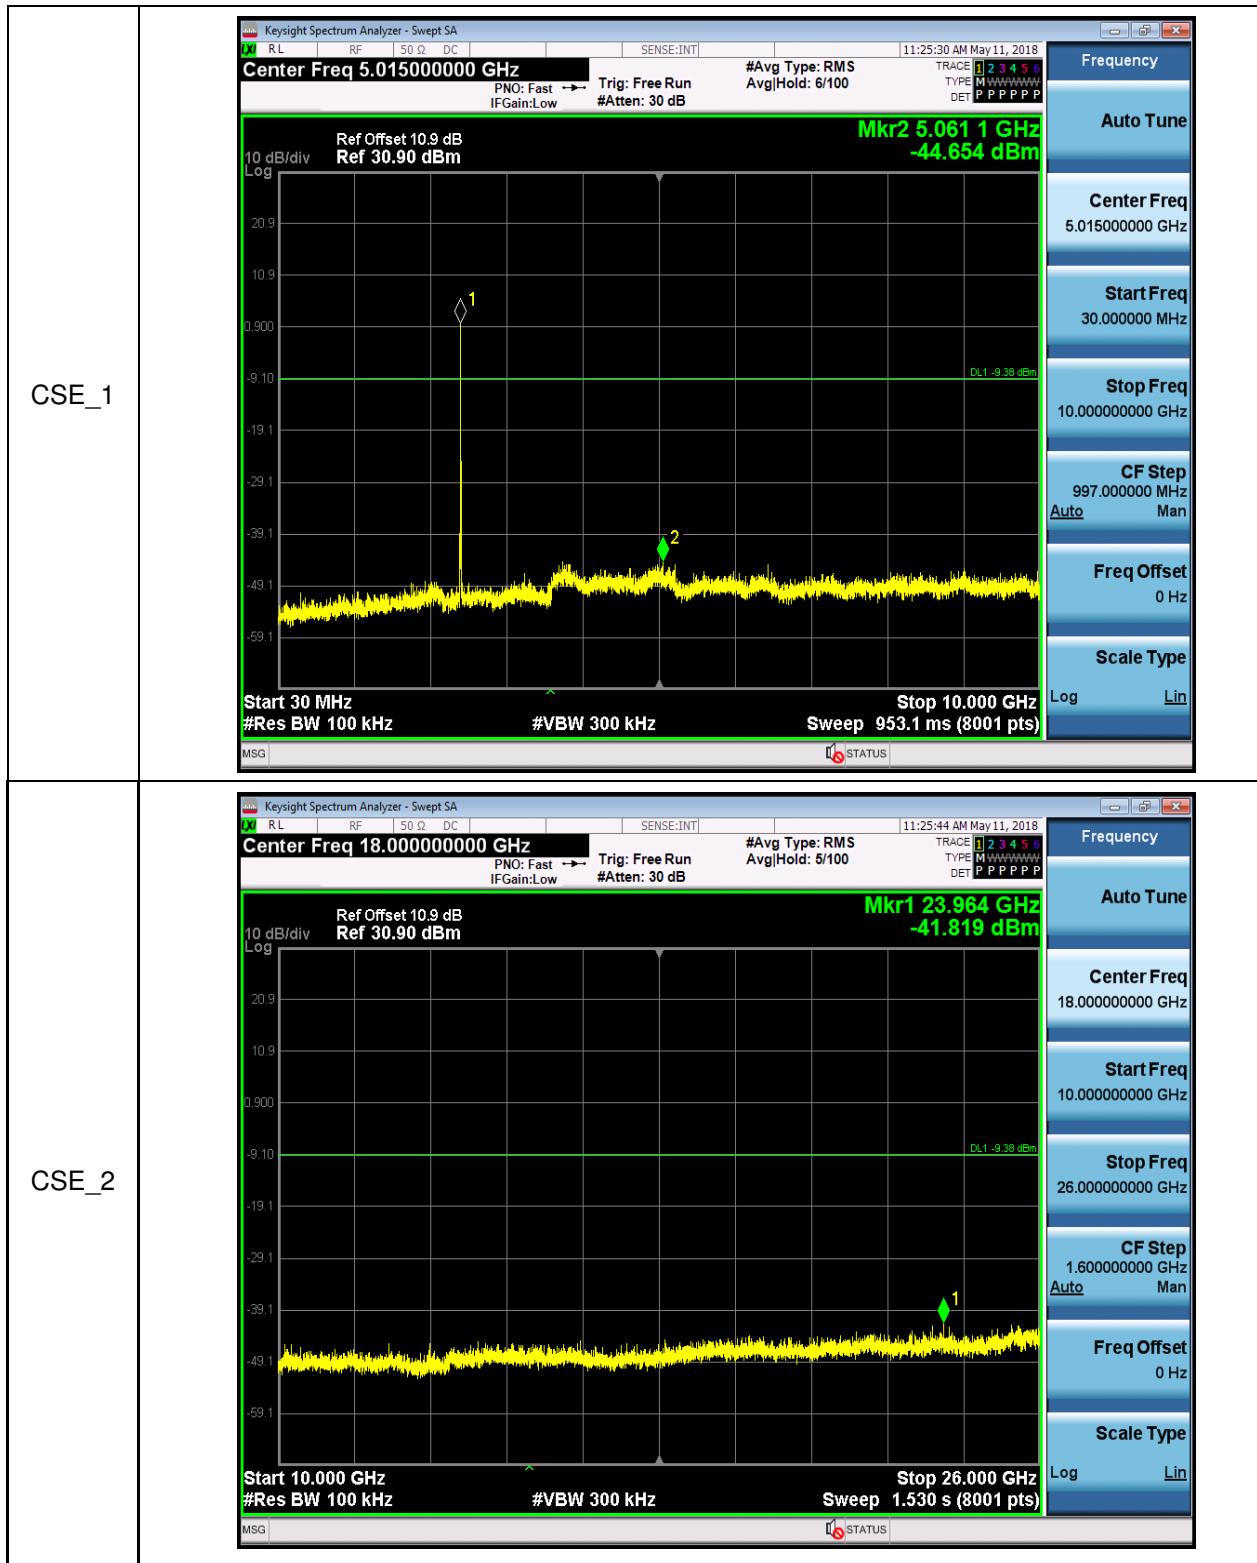

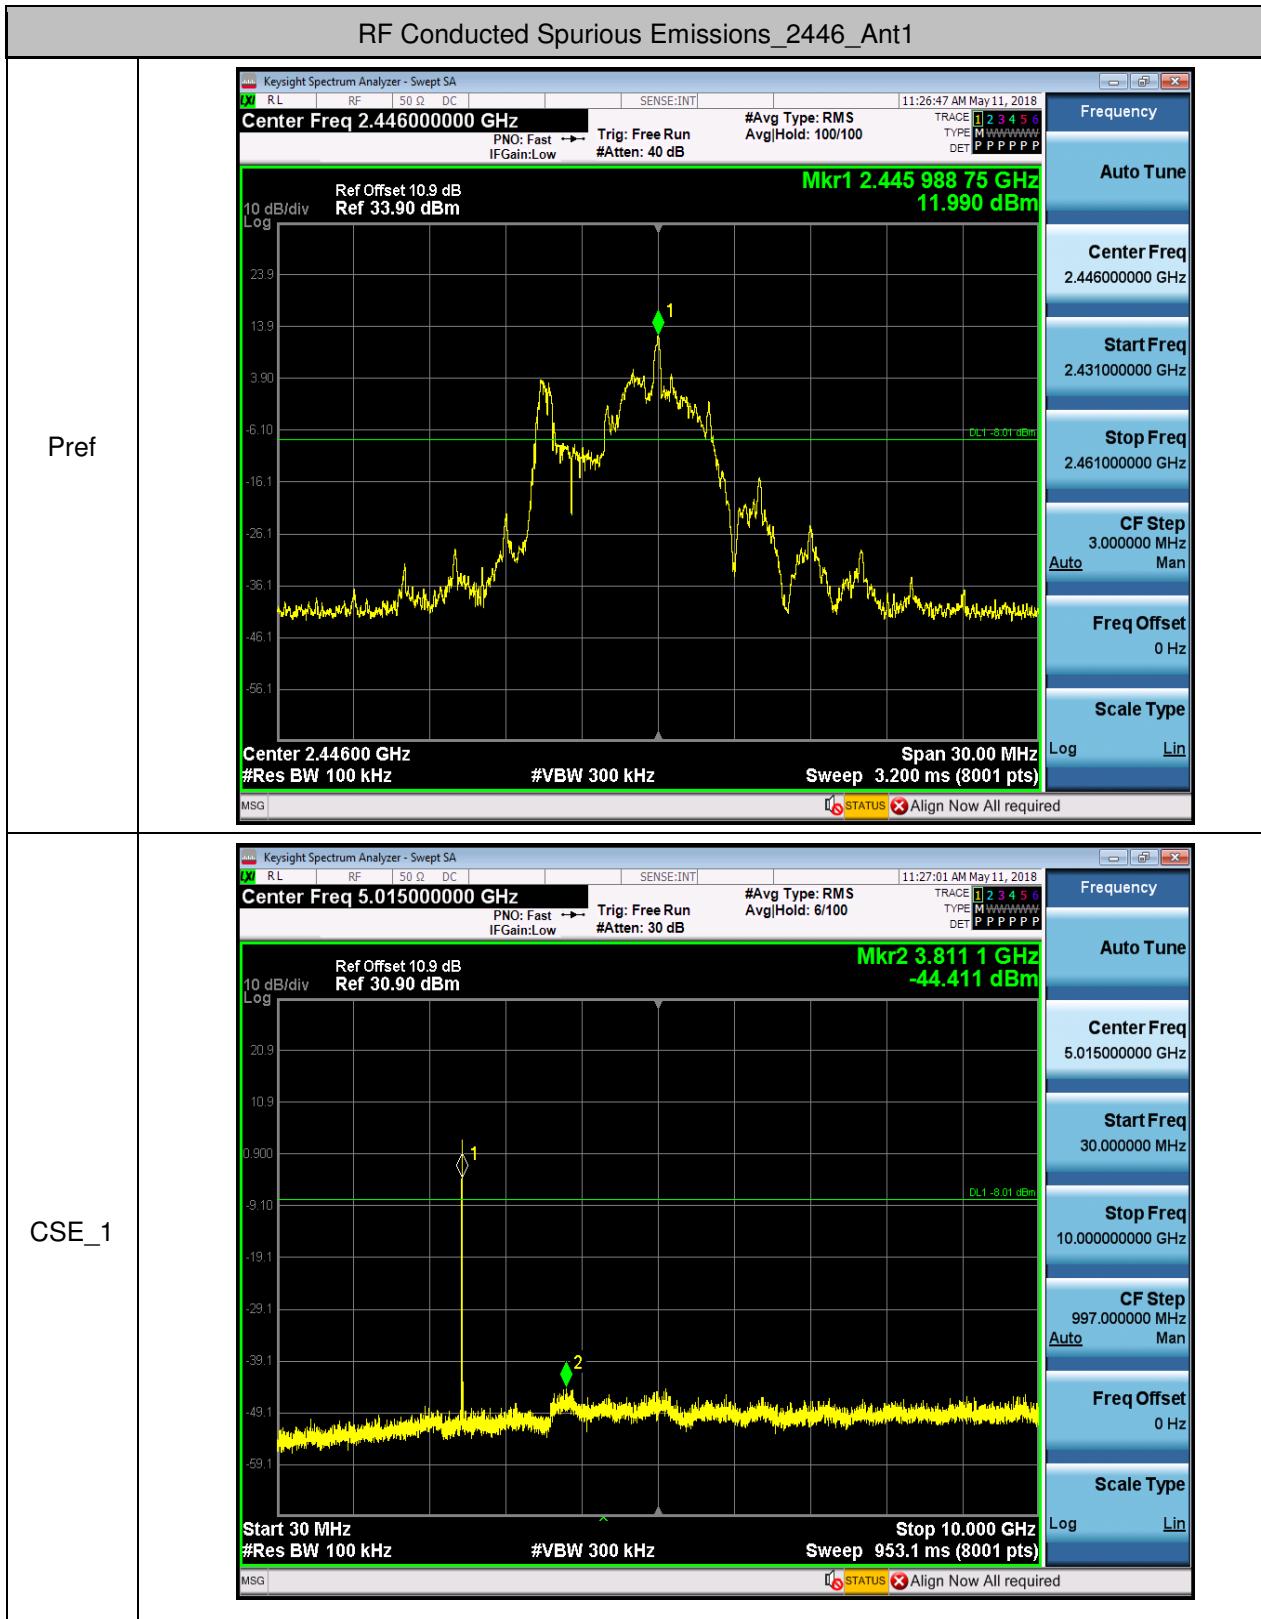

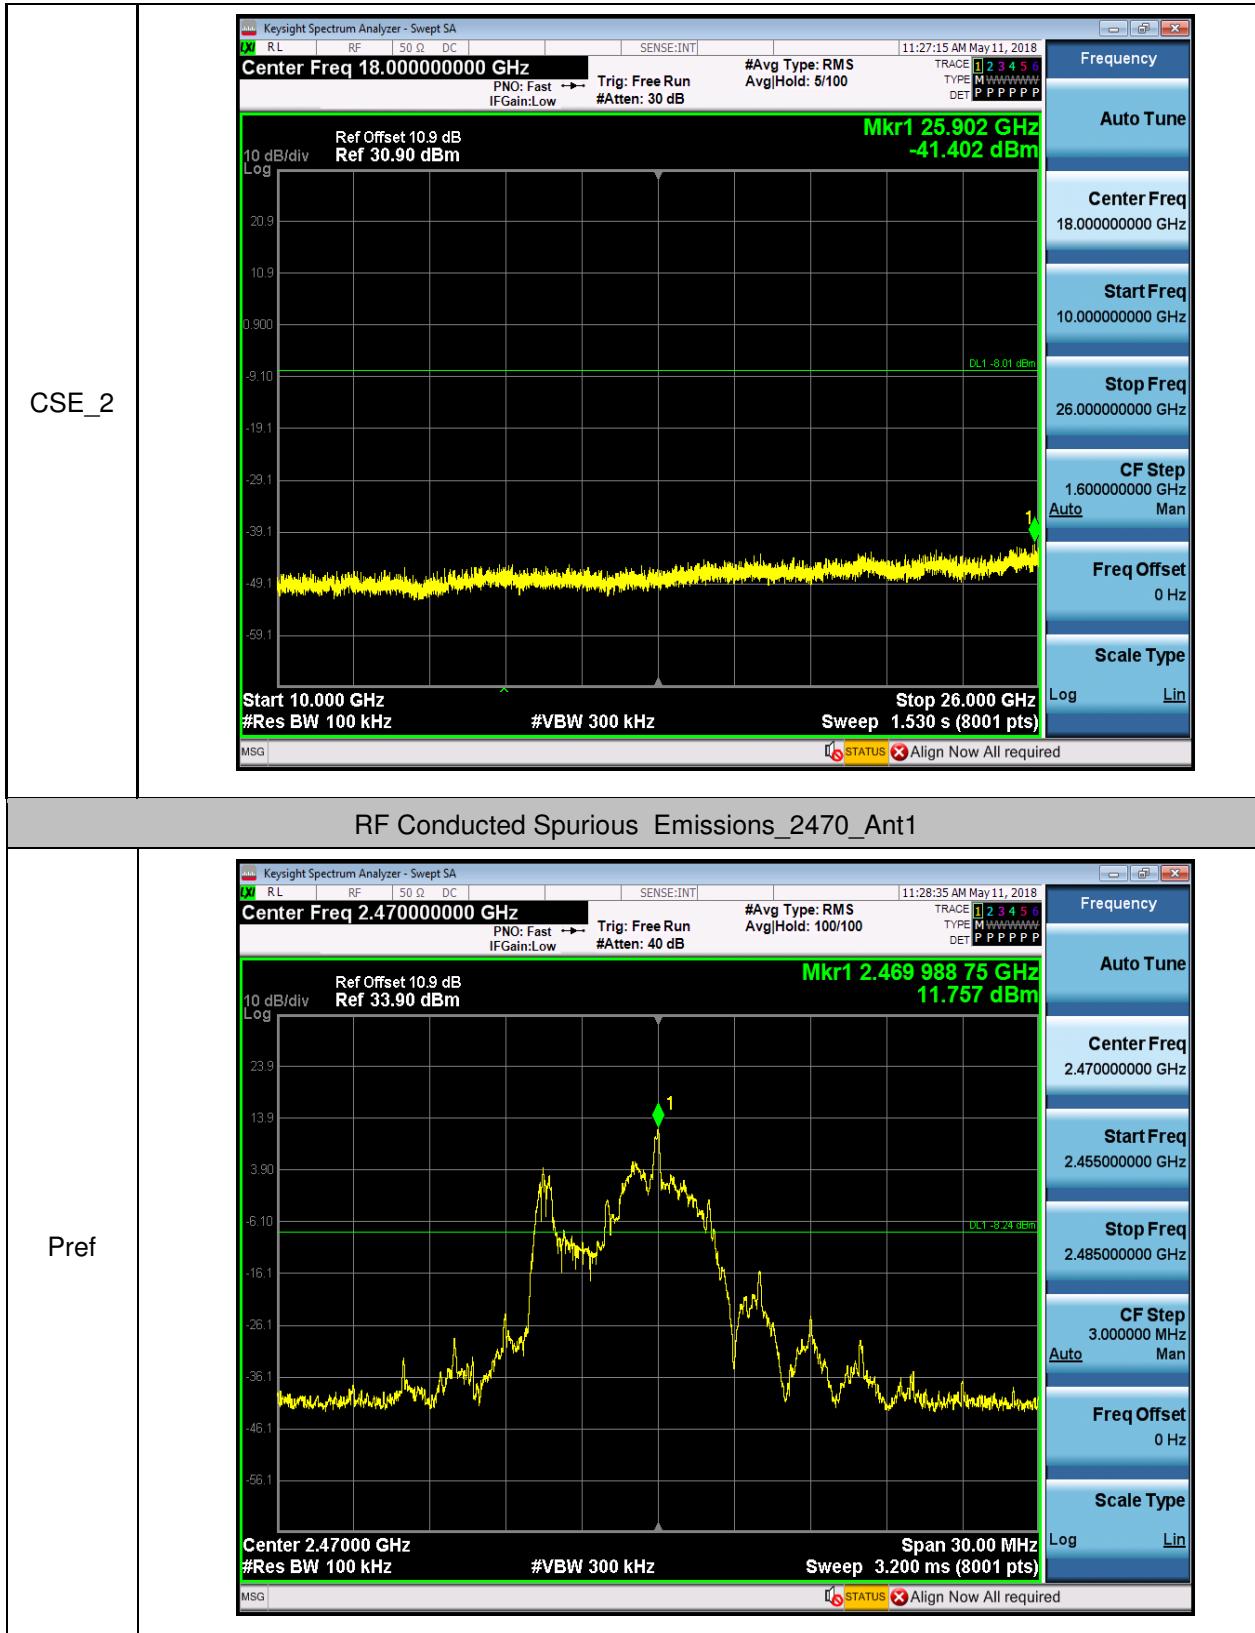

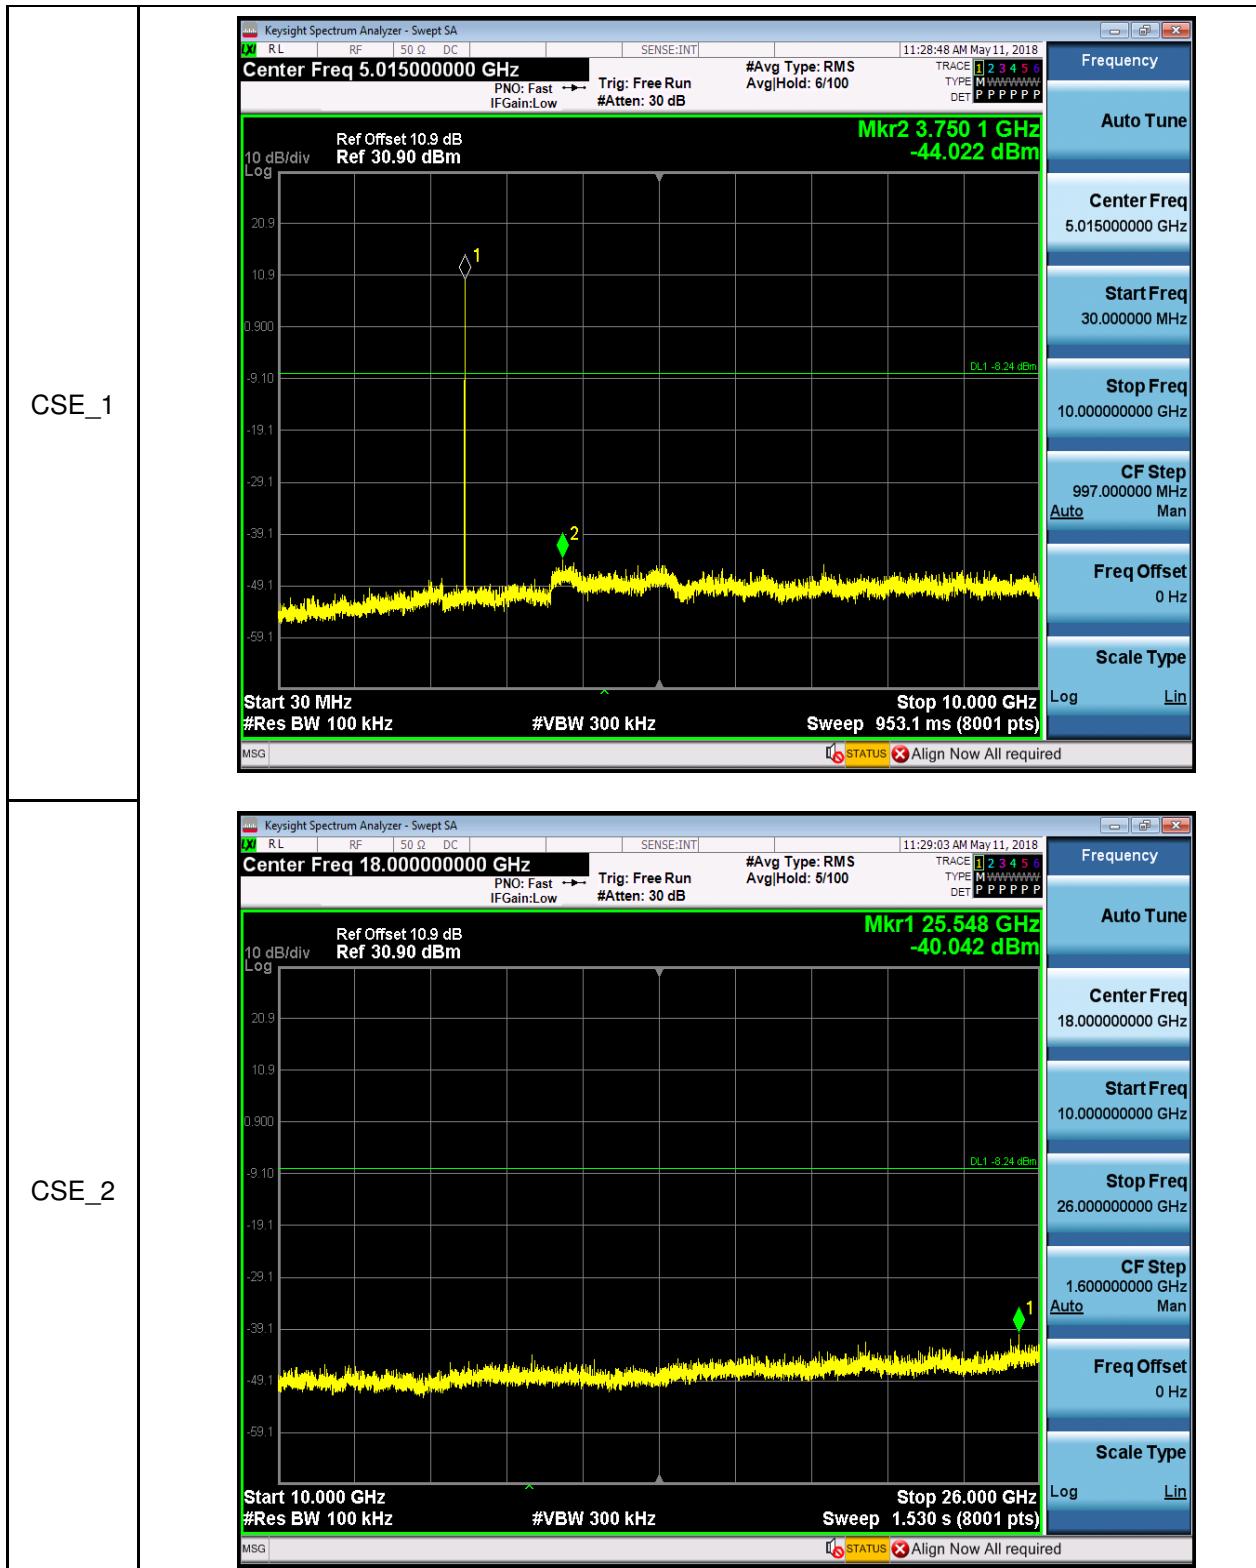

--End of Report--