

FCC EVALUATION REPORT FOR CERTIFICATION

KOREA Standard Technology

Test report No.: KST-FCC0622

Applicant's Name : POWERLAB. CO., LTD

Applicant's Address : Rm. 411 B B/D, SK Twin Tech Tower, 345-9 Gasa-Dong,
Geumcheon-Gu, Seoul, Korea

Manufacturer's Name : POWERLAB. CO., LTD

Manufacturer's Address : Rm. 411 B B/D, SK Twin Tech Tower, 345-9 Gasa-Dong,
Geumcheon-Gu, Seoul, Korea

EUT's:

FCC ID : UFLPXT-40A3

Product Name : TFT LCD TV&MONITOR

Model Number(s) : PXT-40A3

Product Options : None

Category : FCC Part 15 subpart B

Class B Computing Digital Device

Supplementary Information


The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-2003.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Test Date : July 13, 2006


Issued Date : July 20, 2006

Tested by:



Choi, Jae-Rak

Approved by:



Lee, Weon-Woo

EMI TEST REPORT

Report reference No: KST-FCC0622



Contents

1. Description of Device
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Schematics

KOSTEC Co.,Ltd.
180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea
Tel : +82-31-222-4251 Fax: +82-31-222-4252
<http://www.kosteclab.com>

Page : 2 of 22
July 20, 2006



EMI TEST REPORT

Report reference No: KST-FCC0622



1. Description of Device

1) Kind of equipment: TFT LCD TV&MONITOR
2) FCC ID: UFLPXT-40A3
3) Model Name: PXT-40A3
4) Serial No.: None
5) Type of Sample Tested: Pre-production
6) High Frequency Used: 10.000 MHz, 14.31818 MHz, 18.432 MHz, 24.576 MHz, 27.000 MHz
7) Adapter None
8) Power : 1phase AC100-240V, 50/60Hz, 280W
Output: -
9) Tested Power supply: 1phase AC120 V, 60 Hz
10) Date of Manufacture: June, 2006
11) Manufacture: POWERLAB. CO., LTD.

12) Description of Operating: Scroll All "H" Character
Resolution 1024*768
Vertical Frequency: 75Hz

13) Dates of Test: July 20, 2006
14) Place of Tests: KOSTEC Co., Ltd. EMC site
15) Test Report No.: KST-FCC0622



EMI TEST REPORT

Report reference No: KST-FCC0622



2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

Korea Standard Technology (KOSTEC Co., Ltd)

Head office & Test Lab :

:180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Telephone Number : 82-31-222-4251

Facsimile Number: 82-31-222-4252

MIC(Ministry of Information and Communication) Number: **KR0041**

FCC Filing Number. : **525762**

VCCI Membership Number : **2005**

VCCI Registration Number : **R-1657 / C-1763**

KOSTEC Co.,Ltd.
180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea
Tel : +82-31-222-4251 Fax: +82-31-222-4252
<http://www.kosteclab.com>

Page : 4 of 22
July 20, 2006




EMI TEST REPORT

Report reference No: KST-FCC0622




3. Route Map of Measurement Facility

Korea

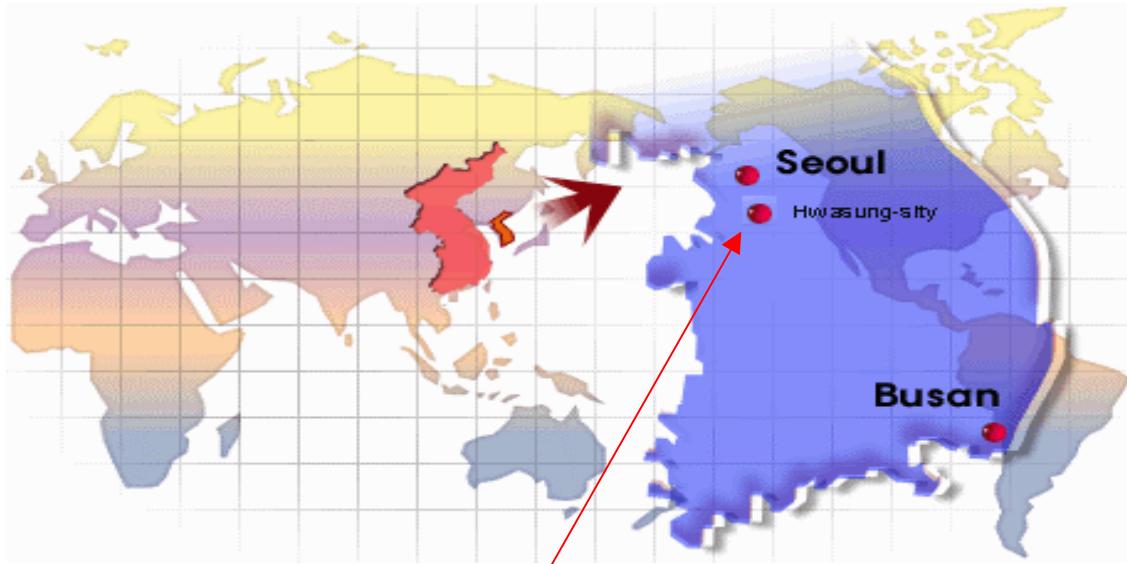

Hwasung-shi (open area test site)

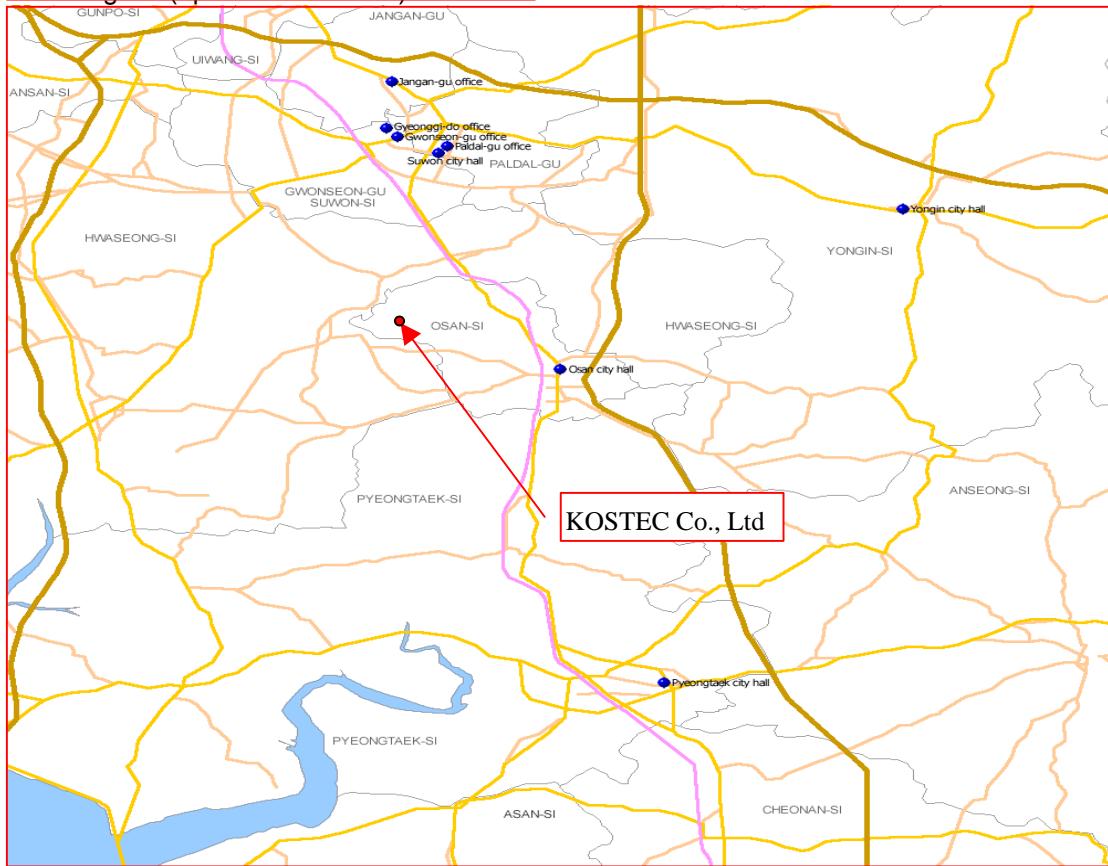

KOSTEC Co.,Ltd.
180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea
Tel : +82-31-222-4251 Fax: +82-31-222-4252
<http://www.kosteclab.com>

Page : 5 of 22
July 20, 2006



EMI TEST REPORT

Report reference No: KST-FCC0622



4. Test System Configuration

Operation Environment

	<u>Temperature</u> (°C)	<u>Humidity</u> (%)	<u>Pressure</u> (hPa)
10 m Open Area site	25	41	1000
Shielded room:	24	50	1000

Test site

These testing were performed following locations :

Shielded room : Conducted Emission,

10 m Open Area Site: Radiated Emission

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability.

Based on NIS 80, 81, The measurement uncertainty level with a 95% confidence level were applied.

sample calculation

Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30 dB, LISN Factor 1 dB, CL 1 dB

The result (MR) is

$$30 + 1 + 1 = 32 \text{ dBuV}$$

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 6 of 22
July 20, 2006



EMI TEST REPORT

Report reference No: KST-FCC0622



5. Description of E.U.T.

Product Description

Manufactured By:	POWERLAB. CO., LTD
Address:	Rm. 411 B B/D, SK Twin Tech Tower, 345-9 Gasa-Dong, Geumcheon-Gu, Seoul, Korea
Model:	PXT-40A3
Serial Number:	None

Configuration of EUT

Description	Manufacturer	Model/Part #	Serial Number
LCD Panel	SAMSUNG	LTA400W2-L01	7Q6B09008B
A/D Board	POWERLAB. CO., LTD	None	None
OSD Board	POWERLAB. CO., LTD	None	None
TV TUNER Board	POWERLAB. CO., LTD	None	None
I/O Board	POWERLAB. CO., LTD	None	None
SMPS	None	AP-2005A	None

EUT Used cables

Cable Type	Shield	Length (m)	Ferrite	Connector	Connection Point 1	Connection Point 2
POWER	Yes	1.2	-	AC INLET	EUT	Main power source
VGA	Yes	1.5	Y	D-sub	EUT	PC
Audio(IN)	Yes	1.2	-	Jack	EUT	PC
Audio(OUT)	Yes	2.5	-	Jack	EUT	5.1 CH HeadPhone
HDMI	Yes	2.0	-	D-Sub	EUT	-
RCA	Yes	1.2	-	Jack	EUT	-
S-VIDEO	Yes	1.8	-	Din	EUT	-
Antenna	-	-	-	NTSC	EUT	75Ω terminated
OPT	-	1.0	-	OPT	EUT	-

Operating conditions

The operating mode/system was as follows in details:

Operating: After Connected from personal computer to E.U.T by RGB cable (D-sub 15 pin), and then use to "H" pattern program for data transmission and continuously 'H' pattern displayed on the TFT LCD TV&MONITOR(EUT).



EMI TEST REPORT

Report reference No: KST-FCC0622



7. TEST RESULTS

7.1 Conducted emission

Measurement procedure

Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4 m above the reference ground plane. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	Used
Test receiver	ESPI3	100109	R&S	2007.3.3	●
L.I.S.N.	ESH2-Z5	100044	R&S	2007.5.1	●
	ESH3-Z5	100147	R&S	2006.8.12	●

Measurement uncertainty

Conducted Emission measurement: \pm 2.4 dB(K=2)

Test data

< Class B >

FREQ. (MHz)	LEVEL(dB μ V)		LINE Pol	Loss (dB)	LIMIT(dB μ V)		MARGIN(dB μ V)	
	QP	AV			QP	AV	QP	AV
0.150	62.44	48.80	N	0.08	66.00	56.00	3.48	7.12
0.282	48.16	39.64	L	0.29	60.76	50.76	12.31	10.83
0.458	49.00	39.62	N	0.29	56.73	46.73	7.44	6.82
0.602	48.77	35.80	N	0.90	56.00	46.00	6.33	9.30
0.622	49.04	39.43	N	0.90	56.00	46.00	6.06	5.67
0.790	49.09	40.13	N	0.43	56.00	46.00	6.48	5.44
17.250	45.64	36.15	N	1.77	60.00	50.00	12.59	12.08
20.098	51.61	39.44	L	1.77	60.00	50.00	6.62	8.79
21.154	49.16	38.25	N	1.83	60.00	50.00	9.01	9.92

* Level = test receiver reading value

* Loss = LISN insertion Loss + Cable Loss

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 9 of 22
July 20, 2006




EMI TEST REPORT

Report reference No: KST-FCC0622




Conducted emission test graph

Line. Live

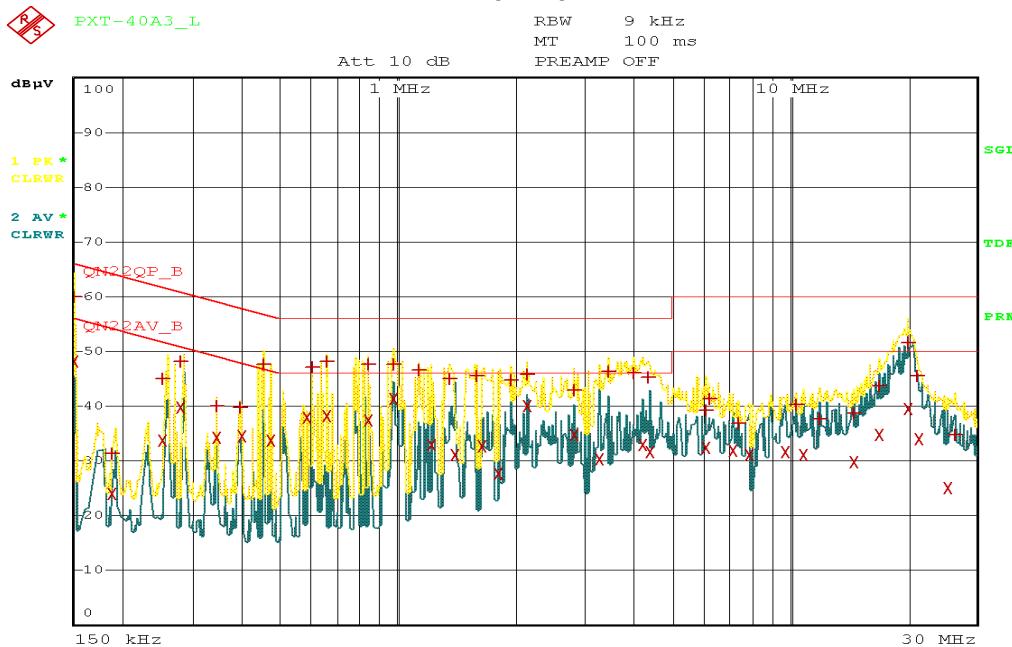

Date: 13.JUL.2006 17:06:56

Line. Neutral

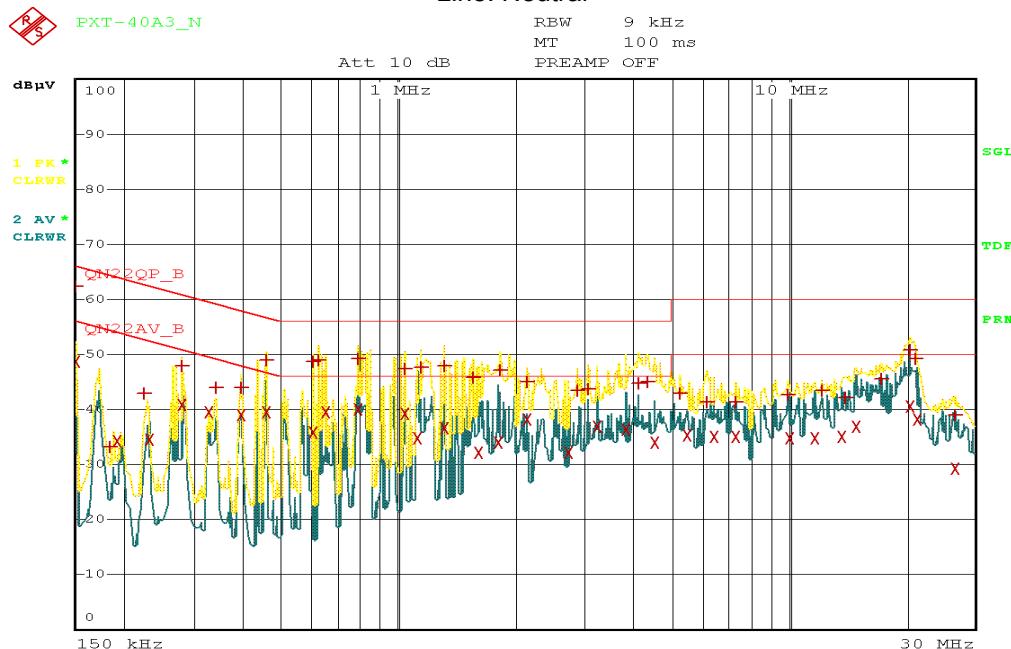

Date: 13.JUL.2006 17:09:43



EMI TEST REPORT

Report reference No: KST-FCC0622



7.2 Radiated Emission

Measurement procedure

A pretest was performed at 3 m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10 m open area test site with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date
Test receiver	ESCS30	100111	R&S	2007.3.06
Ultra broadband antenna	HL562	100075	R&S	2007.3.23
Antenna Mast	AT14	none	Daeil EMC	-
Turn Table	TT15	none	Daeil EMC	-
10 m Open area site	none	none	KOSTEC Lab	-
chamber(3 m)	none	none	FRANCONIA	-
Test receiver	ESCS30	100111	R&S	2007.3.06

Measurement uncertainty

Radiated Emission measurement :

30-300 MHz +3.96 dB / -4.04 dB

300-1000 MHz +3.04 dB / -3.00 dB

Test data

< Class B >

Freq (MHz)	Reading (dBuV/m)	P (H/V)	H (m)	A (.)	Antenna (dB)	Cable Loss (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
60.00	24.90	V	1.50	180	3.60	3.30	31.80	40.0	8.20
125.00	21.40	V	1.50	180	9.20	3.90	34.50	43.5	9.00
150.00	22.70	H	2.40	90	7.50	4.20	34.40	43.5	9.10
200.00	21.80	H	2.10	110	7.30	5.10	34.20	43.5	9.30
331.84	22.16	H	2.00	110	11.93	6.81	40.90	46.0	5.10
582.07	13.73	H	1.80	110	16.82	9.25	39.80	46.0	6.20
663.64	12.03	H	1.60	130	18.24	9.63	39.90	46.0	6.10
711.21	11.66	H	1.40	90	18.53	10.11	40.30	46.0	5.70

Reading = Test receiver reading / P= antenna Polarization / H=antenna Height

A=turn table Angle / Antenna = antenna factor / Cable loss = used cable loss

Result = reading + antenna + loss / Margin = Limit - result

* Receiving Antenna Mode: Horizontal, Vertical / * Test site: 3 m Open area site

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 11 of 22
July 20, 2006

