# FCC TEST REPORT

FCC ID : UIRVRFM9

Applicant : HongKong HuiKe Technology Limited

Address : Flat A,18/F, kingwell Commercial Tower,173 Lockhart Road, Wenchai,

HongKong

**Equipment Under Test (EUT):** 

Product : FM Modulator

Model No. : VRFM9

**Standards** : FCC 15 Subpart C Paragraph 15.239

**Date of Test** : October 31, 2006

Test Engineer : Tiger Su

Reviewed By : Thelo 24 on

PERPARED BY:

Waltek Services (Shenzhen) Co., Ltd.

8C, West Tower, Aidi Building, No.5003 Binhe Rd, Futian District, Shenzhen518045, Guangdong, China.

Tel: 86-755-83551033

Fax: 86-755-83552400

# 2 Contents

_	~		Page
1		OVER PAGE	
2		ONTENTS	
3	Tl	EST SUMMARY	5
4	G.	ENERAL INFORMATION	6
	4.1	CLIENT INFORMATION	
	4.2	GENERAL DESCRIPTION OF E.U.T.	
	4.3 4.4	DETAILS OF E.U.T.  DESCRIPTION OF SUPPORT UNITS	
	4.5	STANDARDS APPLICABLE FOR TESTING	
	4.6	TEST FACILITY	
	4.7	TEST LOCATION	7
5	E	QUIPMENT USED DURING TEST	8
6	C	ONDUCTED EMISSION TEST	
Ů		TEST EQUIPMENT	
	6.1 6.2	TEST EQUIPMENT	
	6.3	CONDUCTED TEST SETUP	
	6.4	EUT OPERATING CONDITION	
	6.5	CONDUCTED EMISSION LIMITS	
	6.6	CONDUCTED EMISSION TEST RESULT	11
7	$\mathbf{R}$	ADIATION EMISSION TEST	12
	7.1	TEST EQUIPMENT	
	7.2	MEASUREMENT UNCERTAINTY	
	7.3 7.4	TEST PROCEDURE	
	7. <del>4</del> 7.5	SPECTRUM ANALYZER SETUP	
	7.6	CORRECTED AMPLITUDE & MARGIN CALCULATION	
	7.7	SUMMARY OF TEST RESULTS	14
	7.8	EUT OPERATING CONDITION	
	7.9	RADIATED EMISSIONS LIMIT	
8	7.10		
ð		AND EDGE	
	8.1 8.2	TEST PROCEEDING	
		TEST PROCEDURE	
		3.1 The EUT Modulated With Insert USB Dongle	
		3.2 The EUT Modulated With Audio Signal	
9	PI	HOTOGRAPHS OF TESTING	23
	9.1	RADIATION EMISSION TEST VIEW	23
16	) Di	HOTOCDADHC CONCEDHOTIONAL DETAILS	24

10.1	EUT - Front View	24
10.2	EUT - BACK VIEW	24
10.3	PCB1-FRONT VIEW	25
10.4	PCB1-BACK VIEW	25
10.5	PCB2-FRONT VIEW	26
10.6	PCB2-BACK VIEW	26
10.7	PCB3-FRONT VIEW	27
10.8	PCB3-BACK VIEW	27
10.9	PCB4-Front View	
10.10	PCB4-BACK VIEW	28
11 FC	C ID LABEL	29

# 3 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 1GHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	N/A

FCC ID: UIRVRFM9

#### 4 General Information

#### 4.1 Client Information

Applicant: HongKong HuiKe Technology Limited

Address: Flat A,18/F, kingwell Commercial Tower,173 Lockhart

FCC ID: UIRVRFM9

Road, Wenchai, HongKong

Manufacturer: ShenZhen HuiKe Technology Co., Ltd.

Address: Building 702, Bagua -3th Road, Futian, ShenZhen, China

#### 4.2 General Description of E.U.T.

Product description: FM Modulator

Model No.: VRFM9

#### 4.3 Details of E.U.T.

Power Supply: DC 12 V

#### 4.4 Description of Support Units

The EUT has been tested as an independent unit.

#### 4.5 Standards Applicable for Testing

The customer requested FCC tests for a FM Modulator. The standards used were FCC 15 Paragraph 15.209 and Paragraph 15.239.

#### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd ShenZhen Branch EMC Lab, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, August 04, 2005.

FCC ID: UIRVRFM9

#### 4.7 Test Location

All Emissions testswere performed at:-

No.1 Workshop,M-10,Middle Section, Science & Technology Park,ShenZhen,China 518057.

# **5** Equipment Used during Test

Equipment	Brand Name	Model	Cal. Int Months	Last Cal. Date
3m Anechoic chamber				
EMC Analyzer	Agilent	E7402A	12	2006-08-30
EMI Test Receiver	R&S	ESS	12	2006-08-30
Pre Amplifier	Anritsu	MH648A	12	2006-08-30
Bilog Antenna	SCHAFFNER	CBL6111C	12	2009-08-30
Loop Antenna	R&S	6108	12	2006-08-30
Horn Antenna	ETS.LINDGERN	GH14-H052	12	2006-08-30
AM/FM Stereo Signal Generator	Panasonic	VP-8122A	12	2006-08-30
Signal Generator	R&S	SMG	12	2006-08-30
RF Selector	TOYO	NS4901A	N/A	N/A
Turn Disc	HD	DS4150S	N/A	N/A
Antenna Mast	HD	MA2400	N/A	N/A
EMI Shielded Room				
Spectrum analyzer	ADVANTEST	R3261C	12	2006-08-30
EMI Test Receiver	R&S	ESS	12	2006-08-30
Pre Amplifier	Anritsu	MH648A	12	2006-08-30
LISN	R&S	ENV216	12	2006-08-30
Absorbing Clamp	R&S	MDS-21	12	2006-08-30
Distortion Meter	MEGURO	MAK-6578A	12	2006-08-30
AM/FM Stereo Signal Generator	Panasonic	VP-8122A	12	2006-08-30
Oscilloscope	LEADER	LS1020	12	2006-08-30
Function Generator	National	VP-7422A	12	2006-08-30
Signal Generator	R&S	SMG	12	2006-08-30
RF Selector	TOYO	NS4000	N/A	N/A
Remote Controller	TOYO	MAC	N/A	N/A

FCC ID: UIRVRFM9

### 6 Conducted Emission Test

Product Name: FM Modulator

Test Requirement: FCC Part15 Paragraph 15.207

Test Method: Based on FCC Part15 Paragraph 15.207

Test Date: .....

Frequency Range: 150kHz to 30MHz

Class B

Detector: Peak for pre-scan (9kHz Resolution Bandwidth)

Quasi-Peak & Average if maximised peak within 6dB of

FCC ID: UIRVRFM9

Average Limit

#### **6.1** Test Equipment


Please refer to Section 5 this report.

#### **6.2** Test Procedure

- 1. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
- 2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

#### 6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

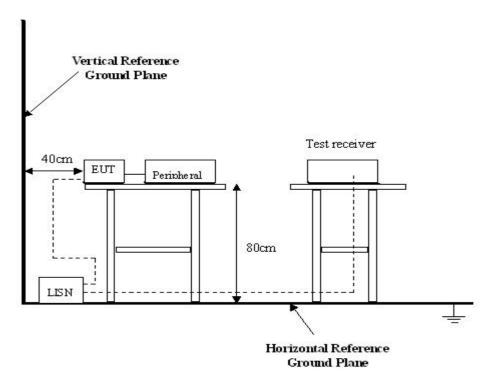

#### **6.4 EUT Operating Condition**

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

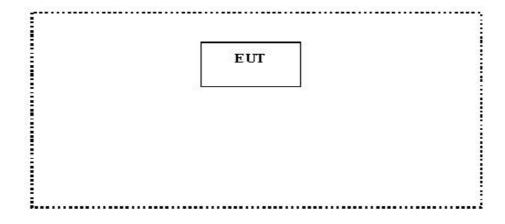

#### **6.5** Conducted Emission Limits

 $66\text{-}56~dB\mu V/m$  between 0.15MHz~&~0.5MHz  $56~dB\mu V/m$  between 0.5MHz~&~5MHz  $60~dB\mu V/m$  between 5MHz~&~30MHz

FCC ID: UIRVRFM9

**Note**: In the above limits, the tighter limit applies at the band edges.

#### 6.6 Conducted Emission Test Result

Owing to the DC operation of EUT, this test is not performed.

#### 7 Radiation Emission Test

Product Name: FM Modulator

Test Requirement: FCC Part15 Paragraph 15.239
Test Method: Based on ANSI C63.4:2003

Test Date: October 31, 2006 Frequency Range: 30MHz to 1GHz

Measurement Distance: 3m

Detector: Peak for pre-scan (120kHz resolution bandwidth)

Quasi-Peak if maximised peak within 6dB of limit

FCC ID: UIRVRFM9

#### 7.1 Test Equipment

Please refer to Section 5 this report.

### 7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at SGS EMC Laboratory is +4.0 dB.

#### 7.3 Test Procedure

- 1. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
- 2. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits), and are distinguished with a "Qp" in the data table.
- 3. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.
- 4. The market sample is tested for low frequency testing at 88.1 MHz and high frequency testing at 107.9 MHz. The tested sample at 98.00 MHz is only used for middle frequency testing and will not be selling in the market.

#### 7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209 and Paragraph 15.239 limits.

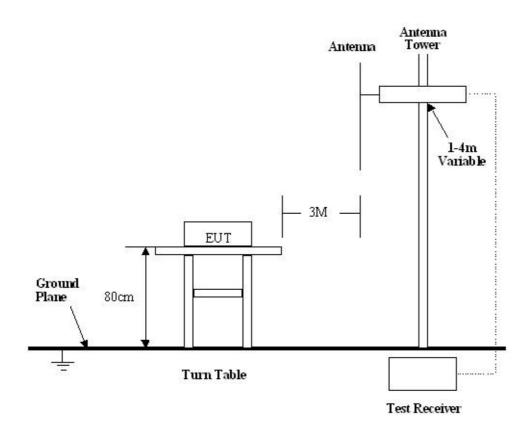

#### 7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.239 Rules, the system was tested to 1000 MHz.

Start Frequency	30 MHz
Stop Frequency	1000 MHz
Sweep Speed Auto	
IF Bandwidth	100 kHz
Video Bandwidth	1 MHz
Quasi-Peak Adapter Bandwidth	120 kHz
Quasi-Peak Adapter Mode	Normal
Resolution Bandwidth	1MHz

#### 7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

FCC ID: UIRVRFM9

Corr. Ampl. = Indicated Reading + Antenna Factor + Cable Factor - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-7dB\mu V$  means the emission is  $7dB\mu V$  below the maximum limit for Class B. The equation for margin calculation is as follows:

Margin = Corr. Ampl. – Class B Limit

#### 7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.239 standards.

#### 7.8 EUT Operating Condition

Same as section 6.4 of this report. Compliance test was performed test in the transmitter operation Mode.

FCC ID: UIRVRFM9

#### 7.9 Radiated Emissions Limit

#### A. FCC Part 15 subpart C Paragraph 15.239 Limit

Fundamental	Field Strength of Fundamental			
Frequency(MHZ)	uV/m	dBuV/m		
88-108	250	48		

**Note**: (1) RF Voltage(dBuV)=20 log RF Voltage(uV)

- (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (3) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

#### B. Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

**Note**: (1) RF Voltage(dBuV)=20 log RF Voltage(uV)

- (2) In the Above Table, the tighter limit applies at the band edges.
- (3) Distance refers to the distance in meters between the measuring instrument antenna.

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 7.10 Radiated Emissions Test Result

Formula of conversion factors:the field strength at 3m was egtablished by adding The meter reading of the spectrum analyer (which is set to read in units of dBuV) To the antenna correction factor supplied by the antenna manufacturer. The antenna Correction factors are stared in terms of dB. The gain of the pressletor was accounted For in the spectrum analyser meter reading.

FCC ID: UIRVRFM9

#### Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

#### **Radiated Emission Test Data**

Test Item: Radiated Emission Test Data

Test Voltage: DC 12V
Test Mode: ON TX
Temperature: 24 °C
Humidity: 52%RH
Test Result: PASS

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°C)		
(111111)	Low Frequency							
88.10	Horizontal	44.3	48.0	3.7	1.8	270		
176.2	Horizontal	38.1	46.0	7.9	1.5	90		
264.3	Horizontal	30.2	46.0	15.8	1.0	45		
352.4	Horizontal	37.5	46.0	8.5	1.8	180		
88.10	Vertical	43.7	48.0	4.3	1.5	90		
176.2	Vertical	37.2	46.0	8.8	2.0	270		
264.3	Vertical	31.3	46.0	14.7	1.5	45		
352.4	Vertical	35.0	46.0	11.0	1.0	180		
		Middle	Frequency	V				
98.0	Horizontal	42.9	48.0	5.1	1.5	90		
196.0	Horizontal	39.0	46.0	7.0	1.0	45		
294.0	Horizontal	36.1	46.0	9.9	1.8	180		
98.0	Vertical	43.4	48.0	4.6	2.0	270		
196.0	Vertical	34.6	46.0	11.4	1.5	45		

294.0	Vertical	33.1	46.0	12.9	1.0	180	
	High Frequency						
107.9	Horizontal	42.9	48.0	5.1	1.5	90	
215.8	Horizontal	33.0	46.0	13.0	1.0	45	
232.7	Horizontal	30.9	46.0	15.1	1.8	180	
107.9	Vertical	42.7	48.0	5.3	2.0	270	
215.8	Vertical	33.3	46.0	12.7	1.5	45	
232.7	Vertical	31.5	46.0	14.5	1.0	180	

**Note:** (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.

(2) Emission Level = Reading Level + Probe Factor + Cable Loss.

# 8 Band Edge

#### 8.1 Test Equipment

Please refer to Section 5 this report.

#### 8.2 Test Procedure

1.The EUT, peripherals were put on the turntable which table size is 1mX1.5m, table high 0.8m. All set up is according to ANSI C63.4:2003.

FCC ID: UIRVRFM9

- 2. The antenna high were varied from 1m to 4m high to find the maximum emission for each frequency.
- 3. The bandwidth of the fundamental frequency was measure by spectrum analyser with 1MHz RBW and 1MHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power 20dB.
- 4.The market sample is tested for low frequency testing at 88.1 MHz and high frequency testing at 107.9 MHz. The tested sample at 98.00 MHz is only used for middle frequency testing and will not be selling in the market.


## 8.3 Band Edge Test Result

Product Name: FM Modulator
Test Item: Band Edge Test

Test Voltage: DC 12V
Test Mode: TX ON
Temperature: 24 °C
Humidity: 52%RH


## 8.3.1 The EUT Modulated With Insert USB Dongle

#### 88.1 MHz

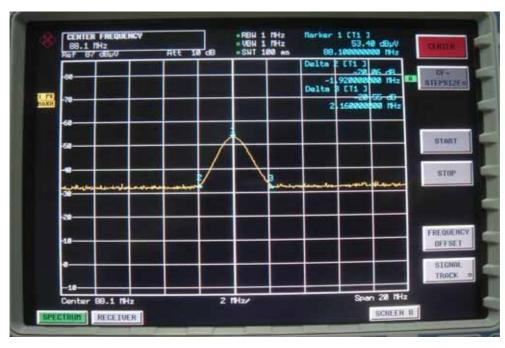

FCC ID: UIRVRFM9

#### **98 MHz**

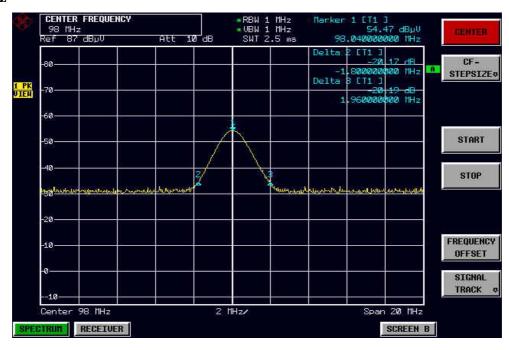


#### 107.9 MHz




## 8.3.2 The EUT Modulated With Audio Signal


#### 88.1 MHz

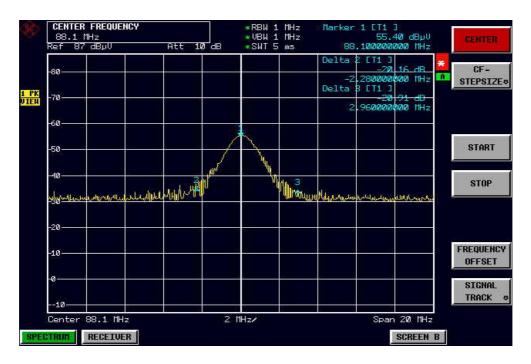

#### **98 MHz**

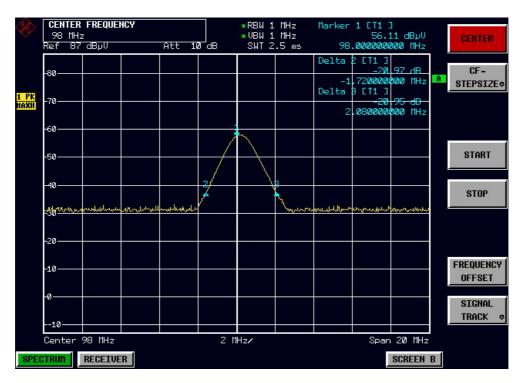

#### 107.9 MHz

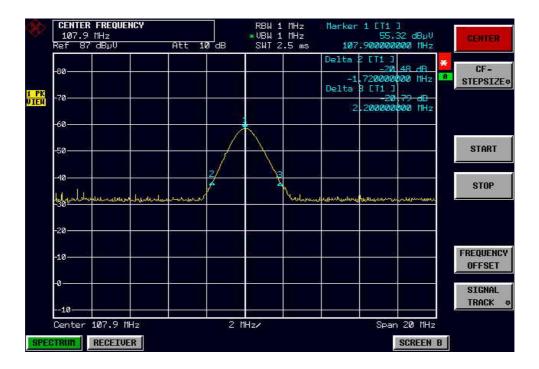


**Note:** (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

(2) The average measurement was not performed when the peak measured data under the limit of average detection.

# 9 Photographs of Testing

# 9.1 Radiation Emission Test View

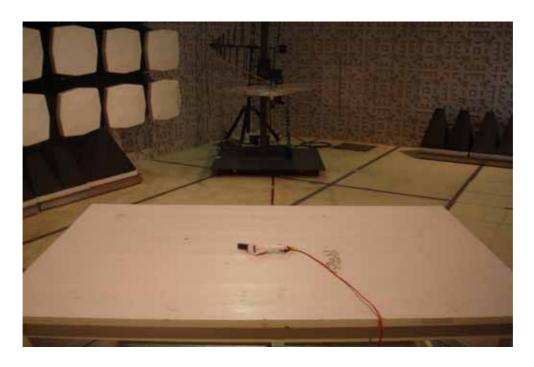

# 10 Photographs - Constructional Details


## 10.1 EUT - Front View




#### 10.2 EUT - Back View




# 10.3 PCB1-Front View

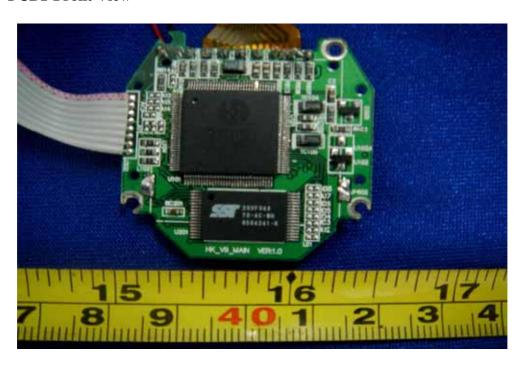


# 10.4 PCB1-Back View

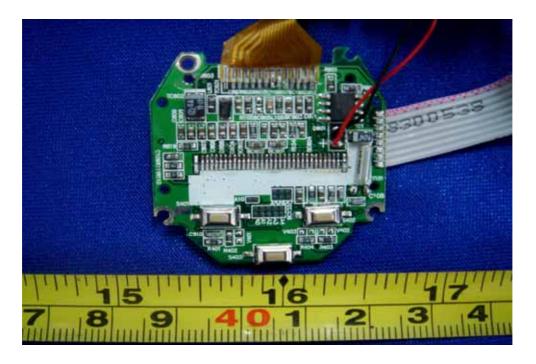


# 10.5 PCB2-Front View

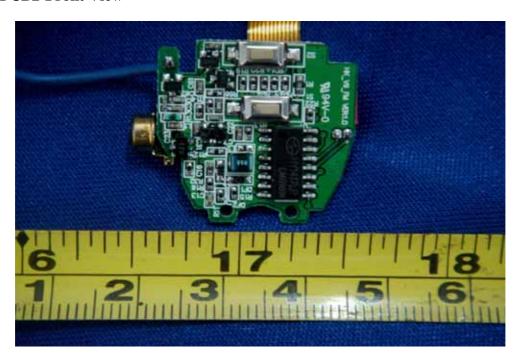


# 10.6 PCB2-Back View

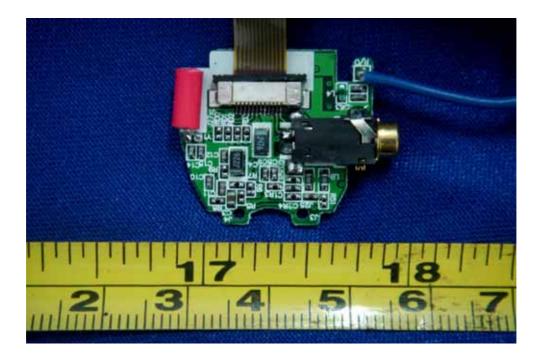


# 10.7 PCB3-Front View

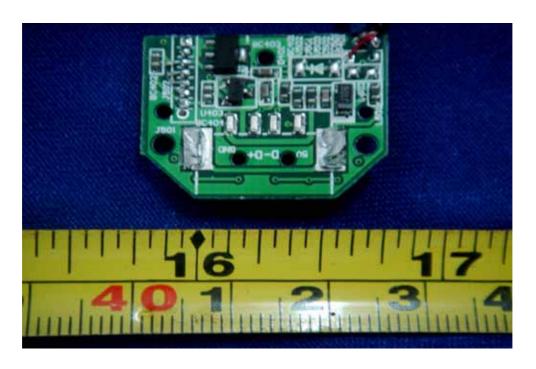


# 10.8 PCB3-Back View

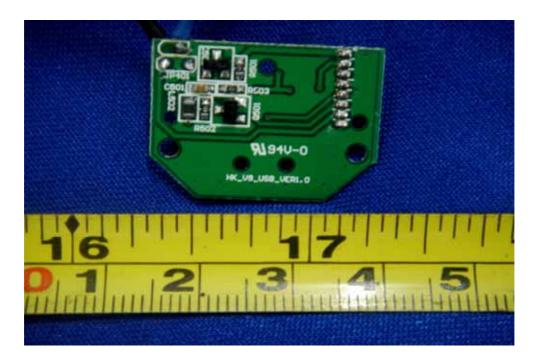

# 10.9 PCB4-Front View

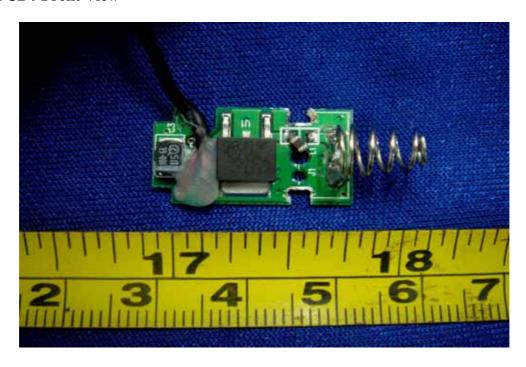

# 10.10 PCB4-Back View

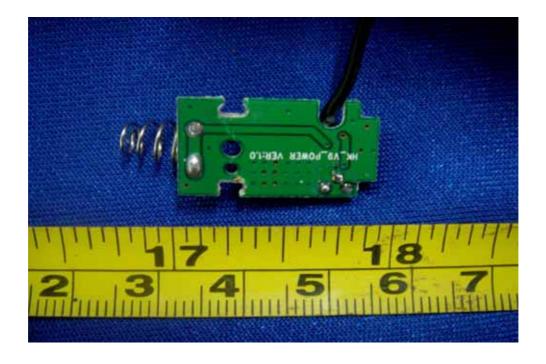

## 11 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID: UIRVRFM9

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

