



(2004)量认(国)字(H2402)号 No.L1659

FCC TEST REPORT

of

Fixed Wireless Phone

FCC ID: UNWFWT-200

Model No.: INDIGO FWT-200

Serial No.: 00005463

Report No.: FCC06-8079

Date: October 26, 2006

Prepared for

GREENFIELD INVEST & TRADE INC.

Calle 53E, Urb. Obarrio, Swiss Tower Piso 16 Republica de Panama

Prepared by

ShenZhen Electronic Product Quality Testing Center

Electronic Testing Building, Shahe Road, Xili, Nanshan District, ShenZhen, 518055, P.R.China

Tel: 86 755 26627338 Fax: 86 755 26627238

This test report consists of **56** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

Table of Contents

1	Test Report Certification	5
2	General Information	6
2.1	Description of EUT	6
2.2	Objective	7
2.3	Test Standards and Results	7
2.4	List of Equipments Used	8
2.5	Test Facility	8
2.6	Environmental conditions	8
3	Conducted Emission Test	9
3.1	Limits of Conducted Emission	9
3.2	Test Procedure	9
3.3	Test Setup	10
3.4	EUT Setup and Operating Conditions	10
4	Radiated Emission Test	15
4.1	Limits of Radiated Emission	15
4.2	Test Procedure	15
4.3	Test Setup	16
4.4	EUT Setup and Operating Conditions	16
4.5	Test Results	16
5	Frequencies	20
5.1	Frequency Blocks Available for Broadband PCS	20
5.2	Test Procedure	20
5.3	Test Setup	21
5.4	EUT Setup and Operating Conditions	21
5.6	Test Results	21
6	Conducted RF Output Power Test	23
6.1	RF Power Output Test Requirement	23
6.2	Test Procedure	23

6.3 Test Setup	23
6.4 EUT Setup and Operating Conditions.....	23
6.5 Test Results	24
7 Occupied Bandwidth Test	26
7.1 Definition	26
7.2 Test Procedure.....	26
7.3 Test Setup	26
7.4 EUT Setup and Operating Conditions.....	26
7.5 Test Results	27
8 Conducted Spurious Emission Test.....	29
8.1 Limits of Conducted Spurious Emission.....	29
8.2 Test Procedure	29
8.3 Test Setup	29
8.4 EUT Setup and Operating Conditions.....	29
8.5 Test Results	30
9 Transmitter Radiated Power (EIRP/ERP) Test.....	34
9.1 Limits of EIRP/ERP	34
9.2 Test Procedure	34
9.3 Test Setup	35
9.4 EUT Setup and Operating Conditions.....	35
9.5 Test Results	36
10 Radiated Spurious Emission Test.....	38
10.1 Limits of Radiated Spurious Emission.....	38
10.2 Test Procedure	38
10.3 Test Setup	38
10.4 EUT Setup and Operating Conditions.....	38
10.5 Test Results	39
11 Frequency Stability Test.....	45
11.1 Requirement of Frequency Stability.....	45
11.2 Test Procedure	45

11.3 Test Setup	45
11.4 EUT Setup and Operating Conditions.....	46
11.5 Test Results.....	46
Appendix I : Photographs of the EUT.....	47
Appendix II : Photographs of the Test Configuration	53

1 Test Report Certification

Product: Fixed Wireless Phone

FCC ID: UNWFWT-200

Model No.: INDIGO FWT-200

Applicant: GREENFIELD INVEST & TRADE INC.

Applicant Address: Calle 53E, Urb. Obarrio, Swiss Tower Piso 16 Republica de Panama

Manufacturer: GREENFIELD INVEST & TRADE INC.

Manufacturer Address: Calle 53E, Urb. Obarrio, Swiss Tower Piso 16 Republica de Panama

Test Standards: 47 CFR Part 2

47 CFR Part 15, Subpart B

47 CFR Part 24, Subpart E

Test Result: PASS

We, Shenzhen Electronic Product Quality Testing Center, hereby certify that the submitted samples of the above item, as detailed in chapter 2.1 of this report, has been tested in our facility. The test record, data evaluation and test configuration represented herein are true and accurate accounts of measurements of the sample's EMC characteristics under the conditions herein specified.

Tested by: Lin Xingsun, Date: Oct. 26, 2006
Lin Xingsun



Checked by: Smart Li, Date: Oct. 26, 2006
Smart Li

Approved by: Wang Keqin, Date: Oct. 26, 2006
Wang Keqin

2 General Information

2.1 Description of EUT

EUT1	
Description:	Fixed Wireless Phone
Model No.:	INDIGO FWT-200
Emission Designator:	1M25F9W
Modulation:	CDMA 1X
Frequency:	Tx: 1851.25-1908.75MHz; Rx: 1931.25-1988.75MHz
Rated Power:	28dBm
Serial No.:	00005463
Hardware Version:	P1
Software Version:	0.7.2.1.5
EUT2	
Description:	Ni-MH Battery
Model No.:	N.A.
Serial No.:	JPNH060527000010
Manufacturer:	GREENFIELD INVEST & TRADE INC.
Capacitance:	3600mAh
Rated Voltage:	3.7V
Extreme Voltage:	High, 4.2V; Low, 3.6V
EUT3	
Description:	AC/DC Adaptor (Charger)
Model No.:	XP60-120080
Serial No.:	N.A.
Manufacturer:	GREENFIELD INVEST & TRADE INC.
Rated Input:	a.c. 100-240V, 50/60Hz, 100mA
Rated Output:	d.c. 12.0V, 800mA
Length of DC cable:	180cm

NOTE:

1. The EUT is a model of CDMA 1X (PCS band) Mobile Station (MS). It consists of fixed wireless phone, Ni-MH battery and charger, as listed above.
2. Please refer to Appendix I for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual.

2.2 Objective

Perform EMC test according to FCC rules Part 2, Part 15 and Part 24 for FCC ID Certification.

2.3 Test Standards and Results

The EUT has been tested according to 47 CFR

- Part 2 Frequency Allocations and Radio Treaty Matters: General Rules and Regulations (10-1-05 Edition)
- Part 15 Radio Frequency Devices (10-1-05 Edition)
- Part 24 Personal Communications Services (10-1-05 Edition)

Test items and the results are as bellow:

Nº	FCC Rules	Test Type	Result	Test Date
1	§15.107	Conducted Emission (Charger AC mains port)	PASS	2006.10.19
2	§15.109	Radiated Emission (Charger enclosure port)	PASS	2006.10.19
3	§2.106 §24. 229	Frequencies	PASS	2006.10.23
4	§2.1046	Conducted RF Output Power at Antenna Terminal	PASS	2006.10.23
5	§2.1049	Occupied Bandwidth	PASS	2006.10.23
6	§2.1051 §2.1057 §24.238	Conducted Spurious Emission at Antenna Terminal	PASS	2006.10.23
7	§24.232	Transmitter Radiated Power (EIRP/ERP)	PASS	2006.10.24
8	§2.1053 §2.1057 §24.238	Radiated Spurious Emission	PASS	2006.10.24
9	§2.1055 §24.235	Frequency Stability	PASS	2006.10.25

2.4 List of Equipments Used

Description	Manufacturer	Model No.	Cal. Due Date	Serial No.
Test Receiver	Schwarzbeck	FCKL1528	2007.06.05	A0304230
Test Receiver	Rohde & Schwarz	ESIB26	2007.06.05	A0304218
LISN	Schwarzbeck	NSLK8127	2007.06.05	A0304233
Loop Antenna	Rohde & Schwarz	HFH2-Z2	2007.06.05	A0304220
Ultra Broadband Ant.	Rohde & Schwarz	HL562	2007.06.05	A0304224
Horn Ant.	Rohde & Schwarz	HF906	2007.06.05	100150
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	2007.06.05	A0304212
Mobile Phone Tester	Willtek	4403	2007.02.10	0811211
3G Communication Antenna	European Antennas	PSA 75301R/170	2007.05.10	A0304213
Temperature Chamber	JAPAN TABAI	PSL-4G	2007.02.05	A8708056
Regulated DC Power Supply	Jiangbo	JB-305	--	A0412374
Shield Room	Nanbo Tech	Site 3	2007.03.18	A9901141
Shield Room	Nanbo Tech	Site 1	2007.01.17	A0304188
Anechoic Chamber	Albatross	EMC12.8×6.8×6.4m ³	2007.04.10	A0304210

2.5 Test Facility

Shenzhen Electronic Product Quality Testing Center (SET) is a third party testing organization accredited by China National Accreditation Committee for Laboratories (CNACL) according to ISO/IEC 17025. The accreditation certificate number is **L1659**.

The EMC chamber site No.1 (EMC12.8×6.8×6.4(m)), and the radiated and conducted Emission test equipments of SET are constructed and calibrated to meet the FCC requirements ANSI C63.4:2001 and CISPR 22/EN 55022. The FCC Registration Number is **261302**.

The EMC chamber site No.1 (EMC12.8×6.8×6.4(m)) also complies with Canada standard RSS 212, and acceptable to Industry Canada for the performance of radiated measurements. The Industry Canada Registration Number is **IC 5915**.

2.6 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

3 Conducted Emission Test

3.1 Limits of Conducted Emission

According to FCC §15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V), Class B digital device	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50


NOTE:

1. The lower limit shall apply at the band edges.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.2 Test Procedure

- a. The EUT was placed on a 0.8m high insulating table and kept 0.4 meters from the conducting wall of shielded room.
- b. The EUT was connected to the power mains through a line impedance stabilization network (LISN). The LISN provide $50\Omega/50\mu$ H of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150 kHz to 30 MHz was searched using CISPR Quasi-Peak and Average detector.

3.3 Test Setup

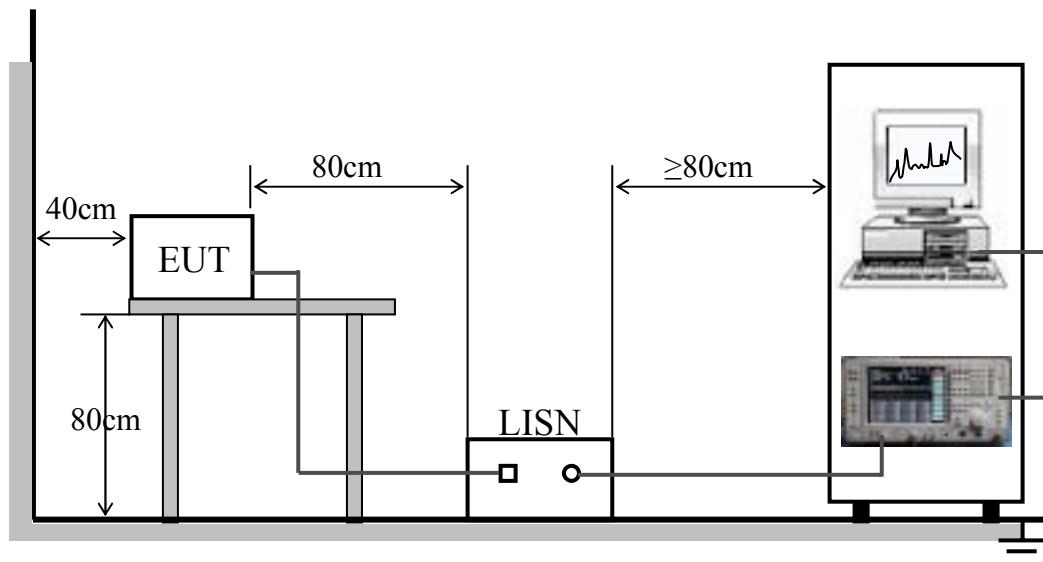

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

3.4 EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery + Charger.

The charger was powered by 120V 60Hz AC mains supply, and charging empty battery during the measurement

The MS was operating at two representative modes:

Voice mode: A voice call was established and maintained between the MS and a System Simulator (SS). The MS operated at PCS 1900MHz mid ARFCN (661) and maximum output power (level 0).

Data/Fax mode: The MS was connected to a USB port of a personal computer (Manufacturer: Lenovo; Model: M6400). By running “Microsoft Hyper Terminal” and “Symantec Winfax Pro” programs, the EUT was transmitting and receiving files continuously with another fixed wireless phone.



3.5 Test Results

I. Voice mode

No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.2085	63.3	53.3	52.2	46.4
2	0.2805	60.8	50.8	46.1	39.8
3	0.3435	59.1	49.1	48.3	44.9
4	0.4155	57.5	47.5	47.1	40.7
5	0.4785	56.4	46.4	47.5	41.8
6	0.6180	56.0	46.0	42.3	36.0

NOTE:

1. QP and AV are abbreviations of the quasi-peak and average individually.
2. If the emission levels measured with QP detector are lower than AV limits, there is unnecessary to measure with AV detector.
3. The emission levels recorded above is the larger ones of both L phase and N phase.

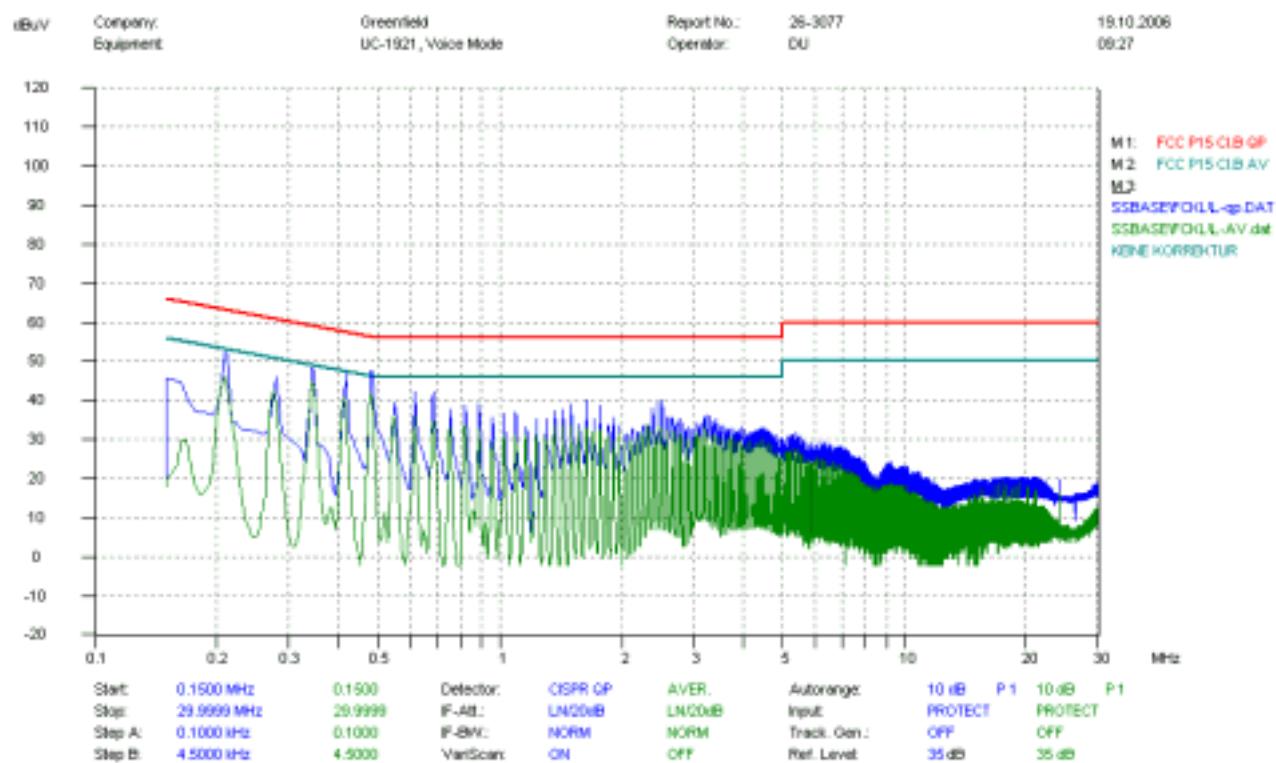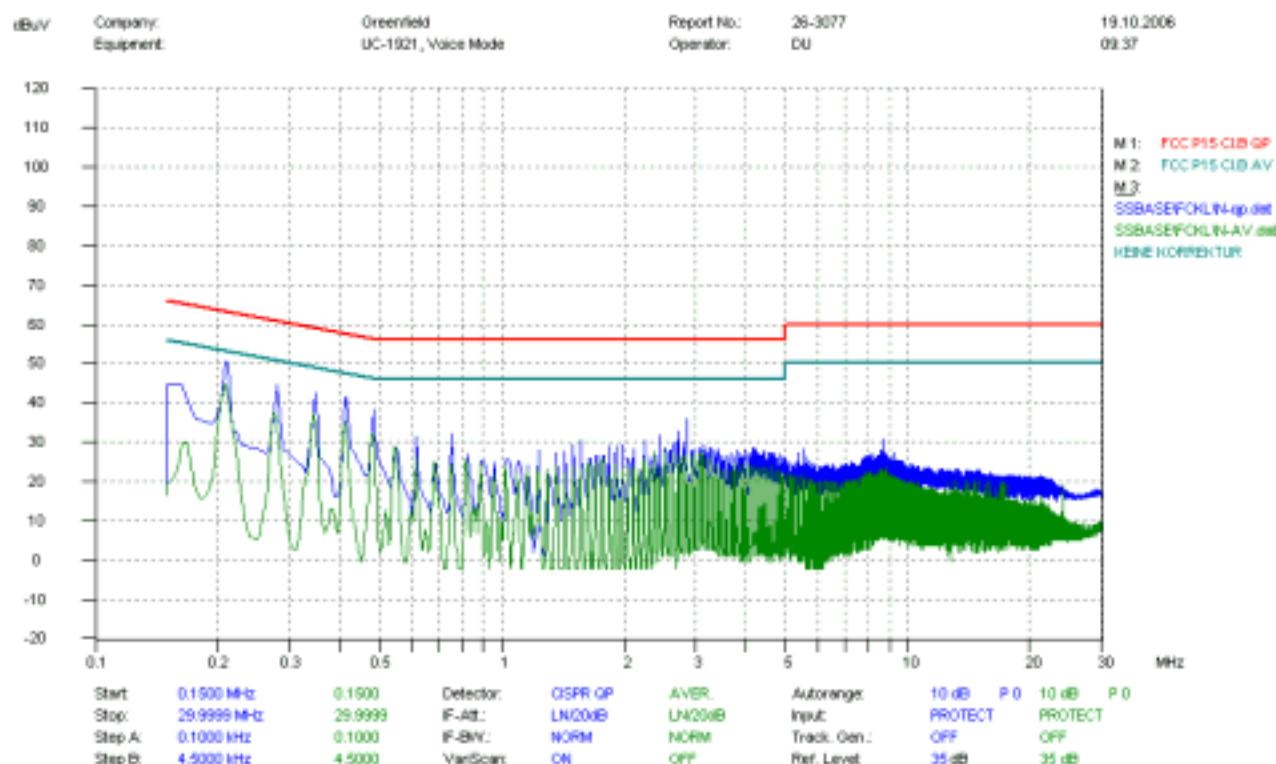Test Plots**1. Mains terminal disturbance voltage, L phase****2. Mains terminal disturbance voltage, N phase**

II. Data mode


No.	Freq. (MHz)	Limit Value (dB μ V)		Emission Level (dB μ V)	
		QP	AV	QP	AV
1	0.2130	63.1	53.1	51.5	46.7
2	0.2760	60.9	50.9	46.6	42.5
3	0.3435	59.1	49.1	48.7	46.1
4	0.4110	57.6	47.6	47.3	39.1
5	0.4785	56.4	46.4	47.7	42.2
6	0.6180	56.0	46.0	42.7	35.7

NOTE:


1. QP and AV are abbreviations of the quasi-peak and average individually.
2. If the emission levels measured with QP detector are lower than AV limits, there is unnecessary to measure with AV detector.
3. The emission levels recorded above is the larger ones of both L phase and N phase.

Test Plots

1. Mains terminal disturbance voltage, L phase

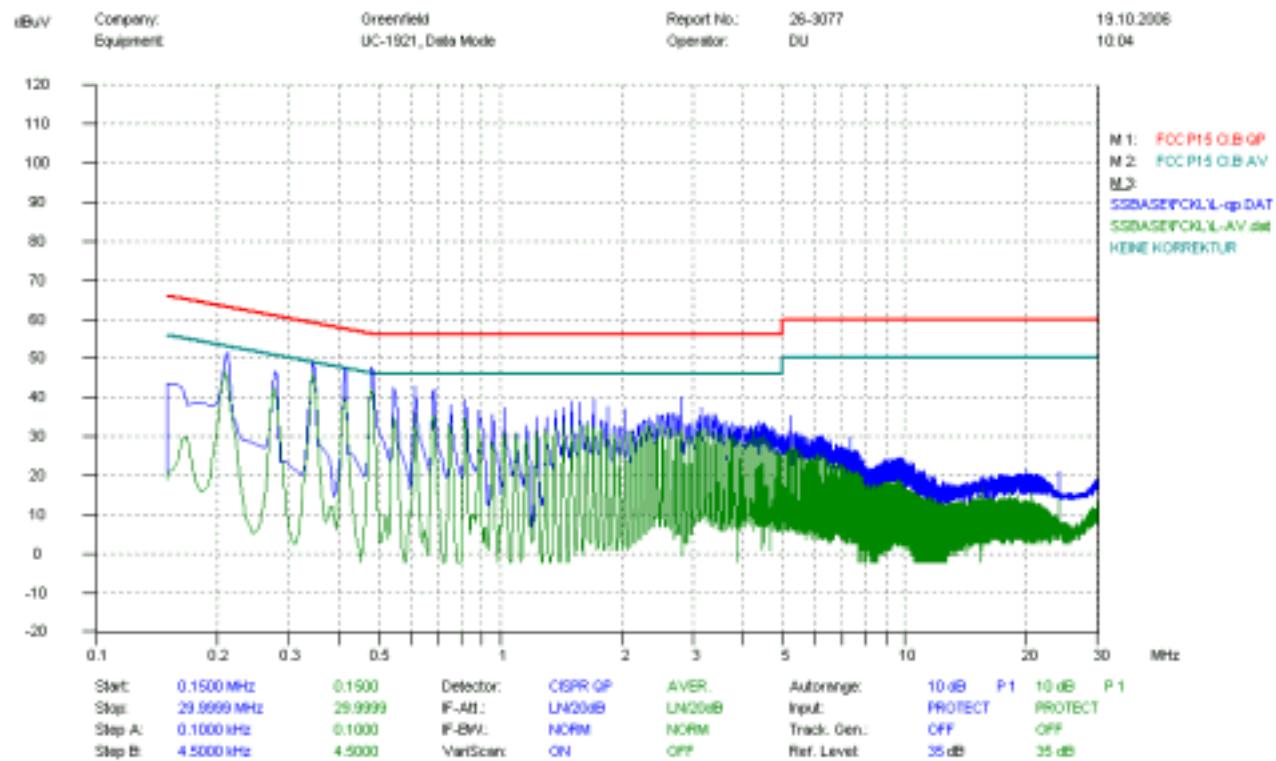

2. Mains terminal disturbance voltage, N phase

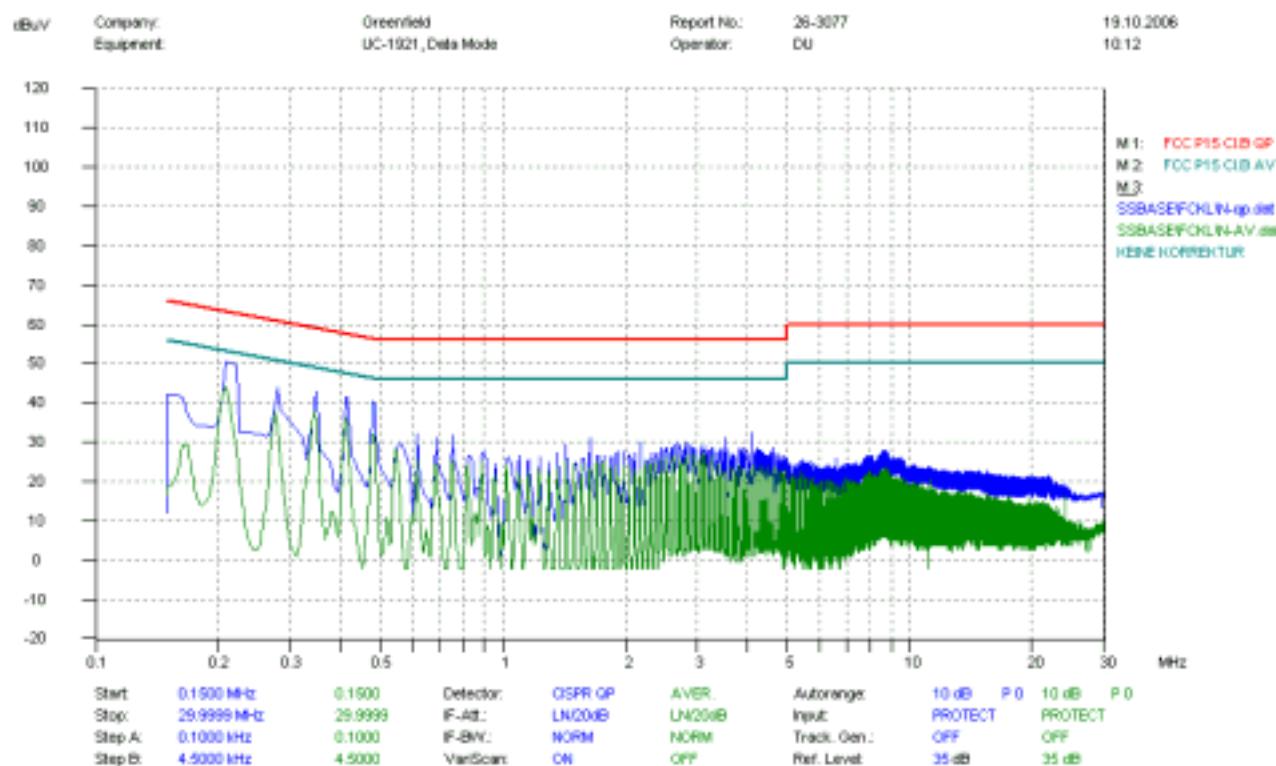

4 Radiated Emission Test

4.1 Limits of Radiated Emission

According to FCC §15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54


NOTE:

1. Field Strength (dB μ V/m) = $20 \log_{10}$ Field Strength (μ V/m).
2. In the emission tables above, the tighter limit applies at the band edges.

4.2 Test Procedure

- a. The EUT was placed on the top of a ratable 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to the heights from 1 to 4 meters and the ratable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detector Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emission that did not have 10 dB margins would be retested one by one using the quasi-peak method.

4.3 Test Setup

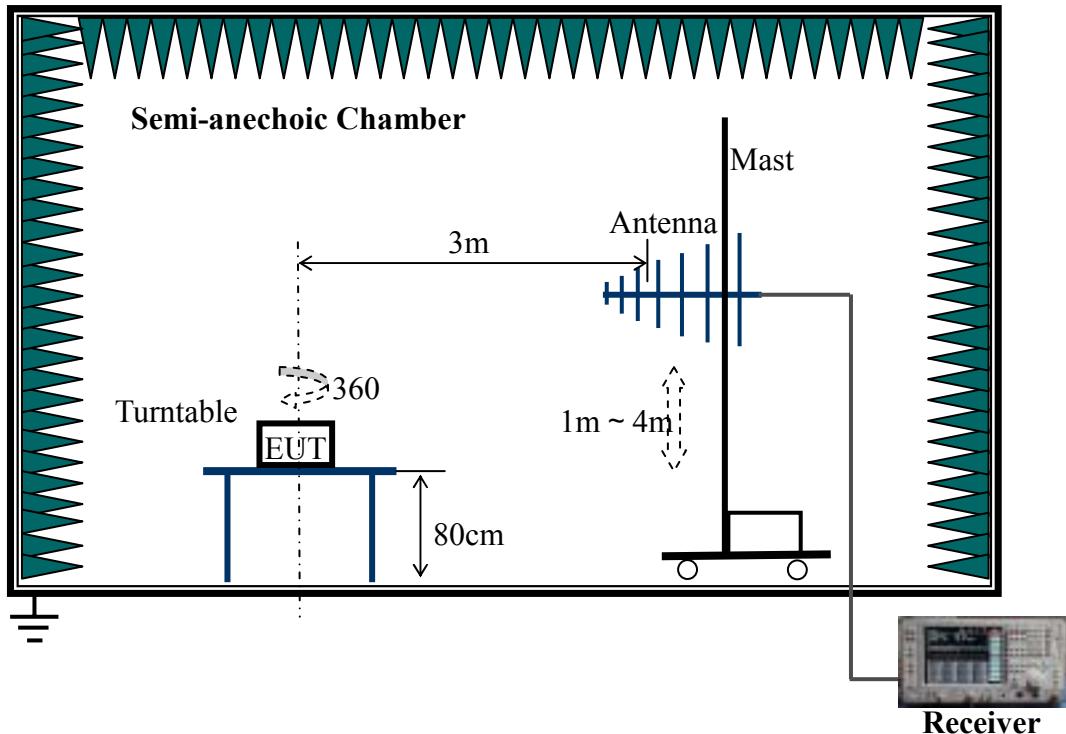

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

4.4 EUT Setup and Operating Conditions

Same as 3.4


4.5 Test Results

I. Voice mode


No.	Frequency (MHz)	Antenna Polarization	QP Limits (dB μ V/m)	Emission Level (dB μ V/m)
1	33.52	Vertical	40	32.72
2	36.96	Vertical	40	30.85
3	45.28	Vertical	40	34.60
4	125.08	Horizontal	43.5	24.37
5	165.80	Horizontal	43.5	32.02
6	253.92	Horizontal	46	27.14

Test Plots

1. Radiation disturbances, maxpeak detector, antenna polarization: Vertical

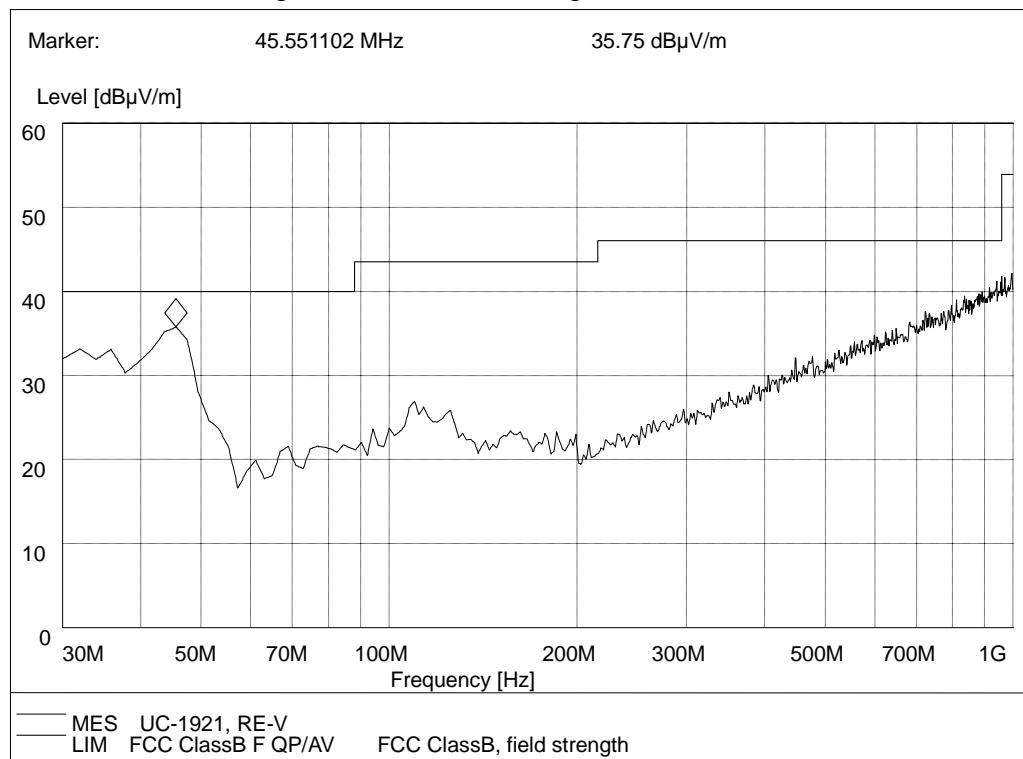

2. Radiation disturbances, maxpeak detector, antenna polarization: Horizontal

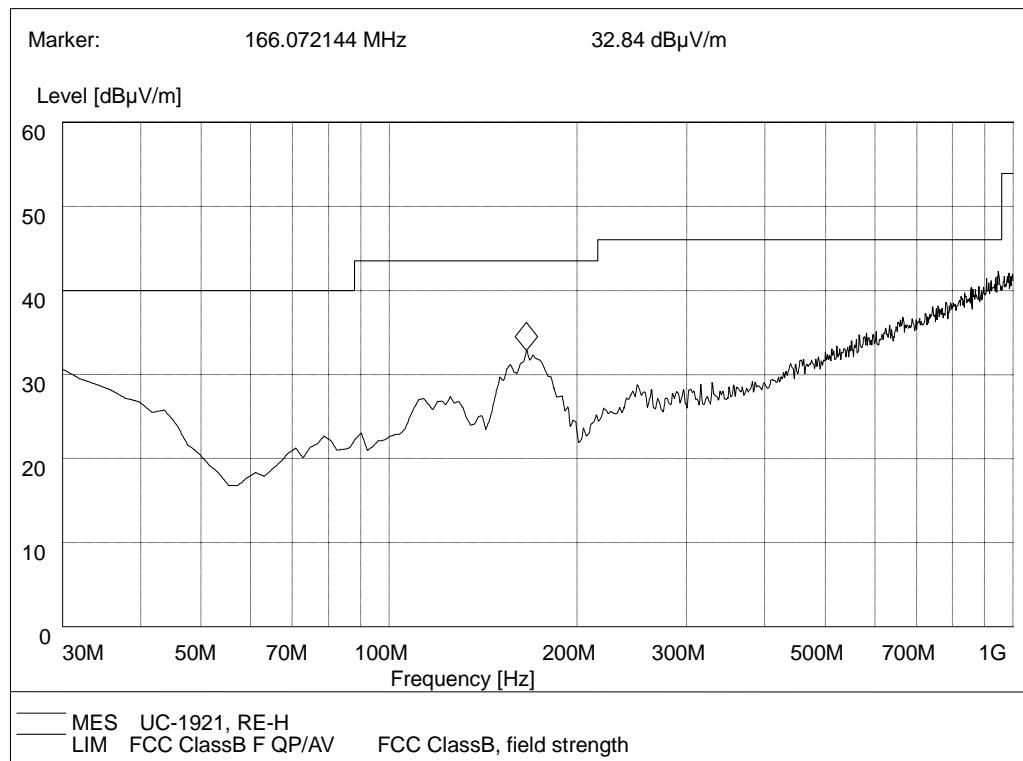


II. Data mode


No.	Frequency (MHz)	Antenna Polarization	QP Limits (dB μ V/m)	Emission Level (dB μ V/m)
1	31.20	Vertical	40	34.41
2	50.44	Vertical	40	33.54
3	108.00	Vertical	43.5	31.64
4	108.24	Horizontal	43.5	27.73
5	122.72	Horizontal	43.5	30.25
6	145.24	Horizontal	43.5	25.93

Test Plots

1. Radiation disturbances, maxpeak detector, antenna polarization: Vertical

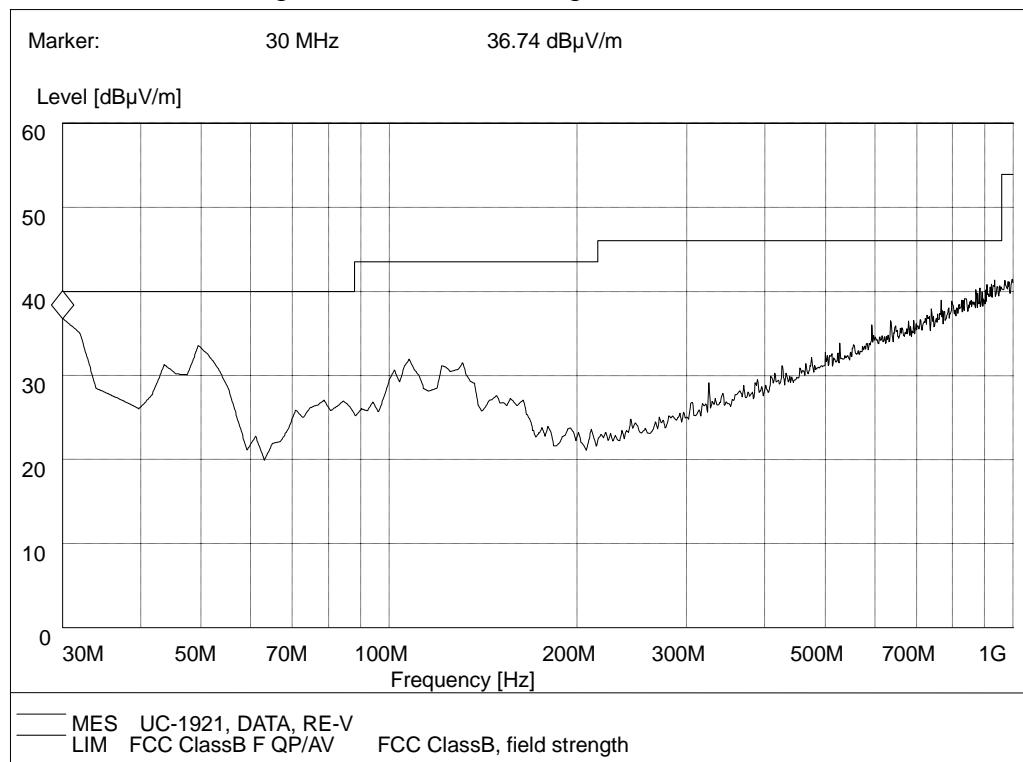

2. Radiation disturbances, maxpeak detector, antenna polarization: Horizontal

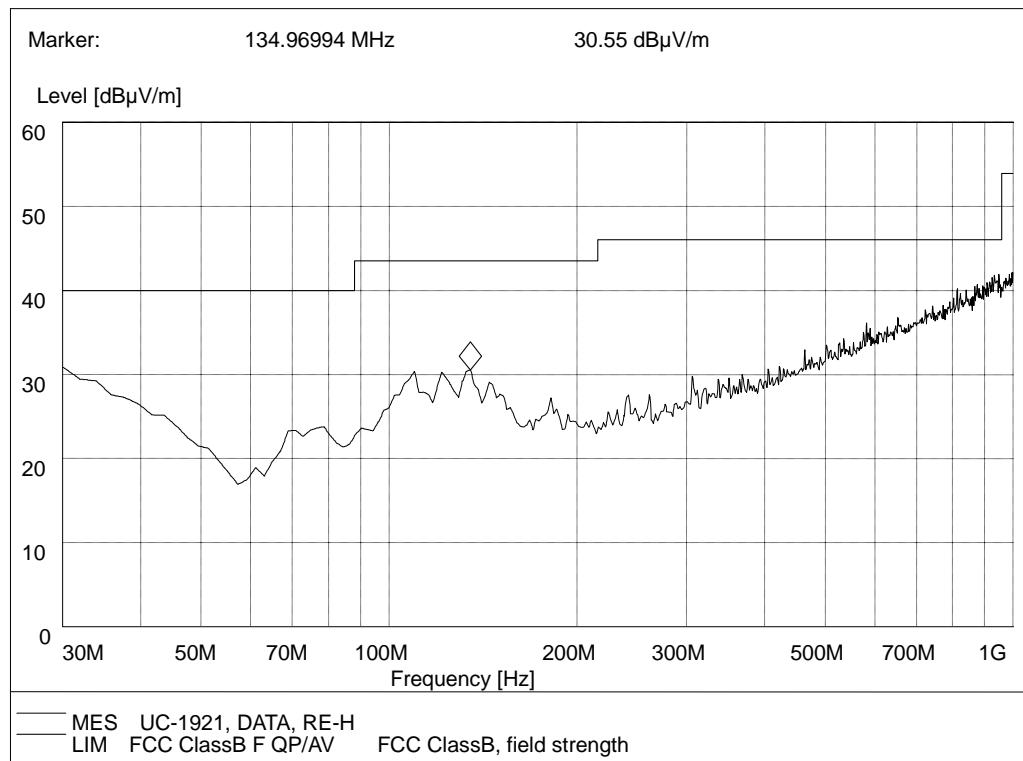

5 Frequencies

5.1 Frequency Blocks Available for Broadband PCS

According to FCC §24.229, the frequencies available in the Broadband PCS service are listed as below, in accordance with the frequency allocations table of FCC §2.106.

(a) The following frequency blocks are available for assignment on an MTA basis:

Block A: 1850–1865 MHz paired with 1930–1945 MHz; and

Block B: 1870–1885 MHz paired with 1950–1965 MHz.

(b) The following frequency blocks are available for assignment on a BTA basis:

Block C: 1895–1910 MHz paired with 1975–1990 MHz;

Block D: 1865–1870 MHz paired with 1945–1950 MHz;


Block E: 1885–1890 MHz paired with 1965–1970 MHz; and

Block F: 1890–1895 MHz paired with 1970–1975 MHz.

5.2 Test Procedure

- a. The EUT was coupled to the spectrum analyzer and the base station simulator through a power divider. The loss of the cables in the test system is calibrated to correct the reading.
- b. The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode.
- c. The resolution bandwidth of the spectrum analyzer was set to at least 1% of the emission bandwidth of the fundamental emission of the transmitter. For GSM signal, $VBW=RBW=3$ kHz; for CDMA signal, $VBW=RBW=30$ kHz.

5.3 Test Setup

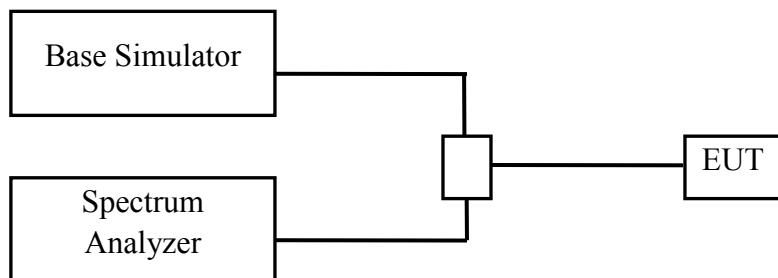

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

5.4 EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery.

A communication link was established between the MS and a System Simulator (SS).

The MS operated at the maximum output power.

The CDMA 1X (PCS band) channel No.25 (low) and 1175 (high) were measured respectively.

5.6 Test Results


The transmitter frequency arrangement of the CDMA 1X (PCS band) is

$$F(n) = 1850.000 + 0.050*n, \quad n \leq 1199$$


The transmitting frequency range of the EUT is from 1851.25MHz (Channel 25) to 1908.75MHz (Channel 1175).

The measured frequencies are as the following plots.

1. Lowest channel No.25

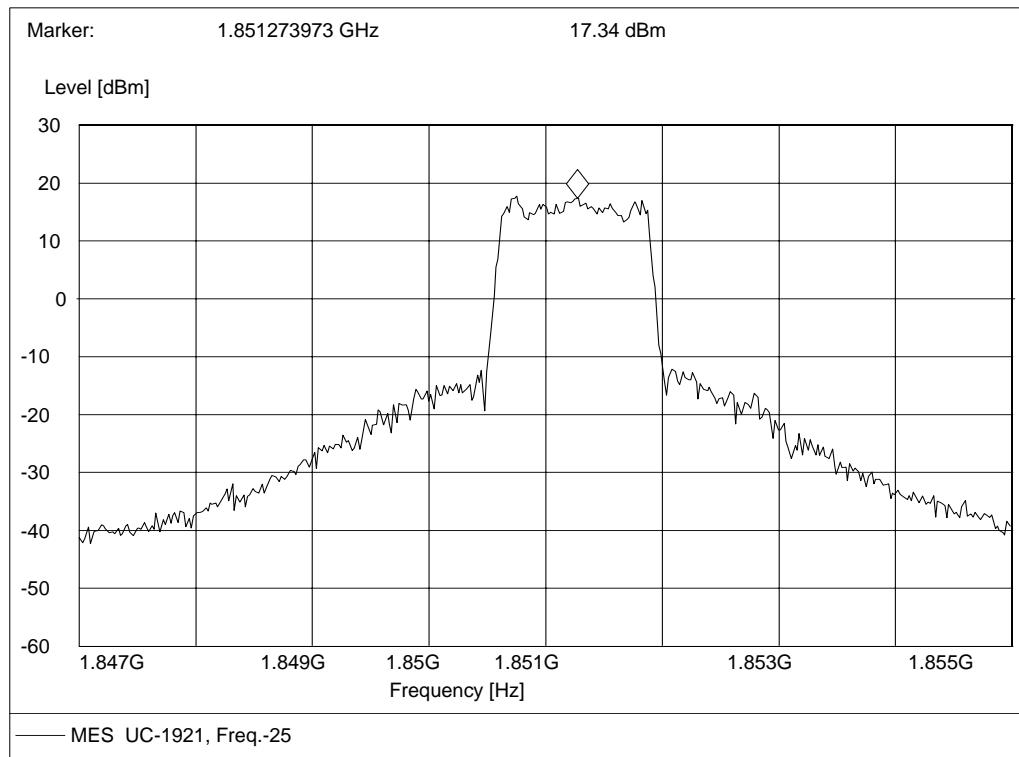

2. Highest channel No.1175

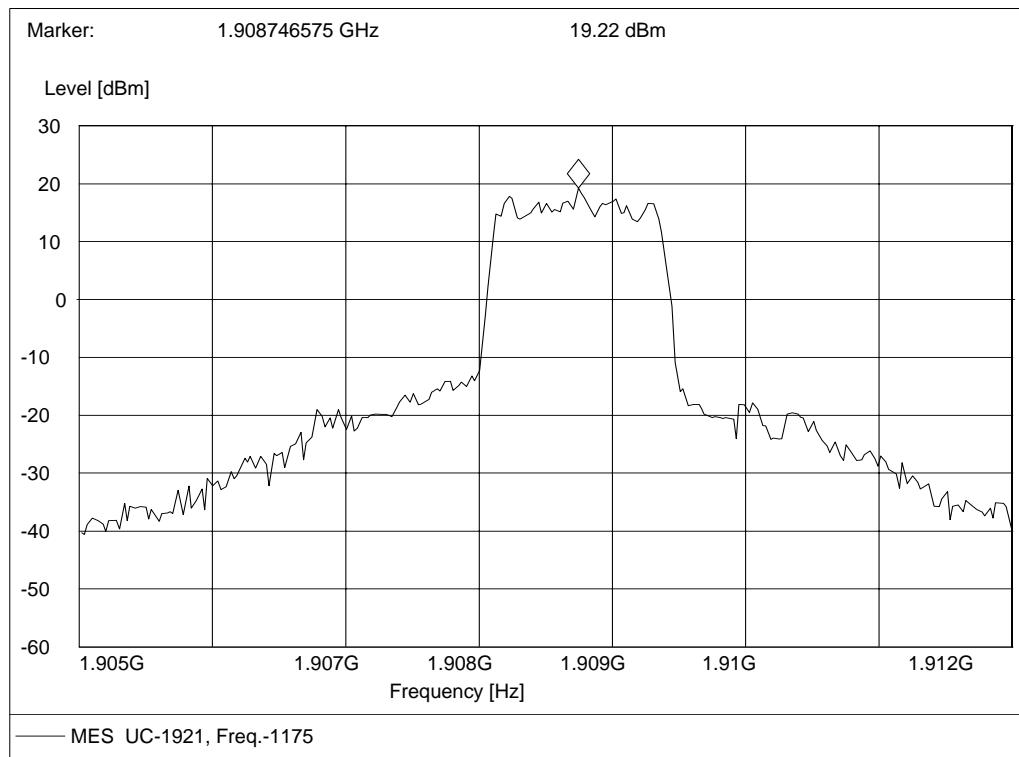

6 Conducted RF Output Power Test


6.1 RF Power Output Test Requirement

According to FCC §2.1046 (a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

6.2 Test Procedure

- a. The EUT was coupled to the spectrum analyzer and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables the test system is calibrated to correct the reading.
- b. The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode.
- c. The resolution bandwidth of the spectrum analyzer was comparable to the emission bandwidth. For GSM signal, $VBW=RBW=1$ MHz; for CDMA signal, $VBW=RBW=3$ MHz.

6.3 Test Setup

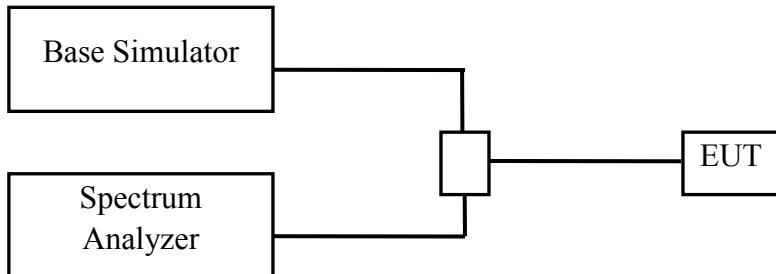

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

6.4 EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery.

A communication link was established between the MS and a System Simulator (SS).

The MS operated at the maximum output power.


The CDMA 1X (PCS band) channel No.25 (low), 600 (middle) and 1175 (high) were measured respectively.

6.5 Test Results


No.	CDMA 1X Channel No.	Frequency (MHz)	Measured Power		Rated Power (dBm)
			(dBm)	(W)	
1	25	1851.25	27.77	0.598	28
2	600	1880.00	28.20	0.661	28
3	1175	1908.75	27.93	0.621	28

Test Plots


1. Lowest channel No.25

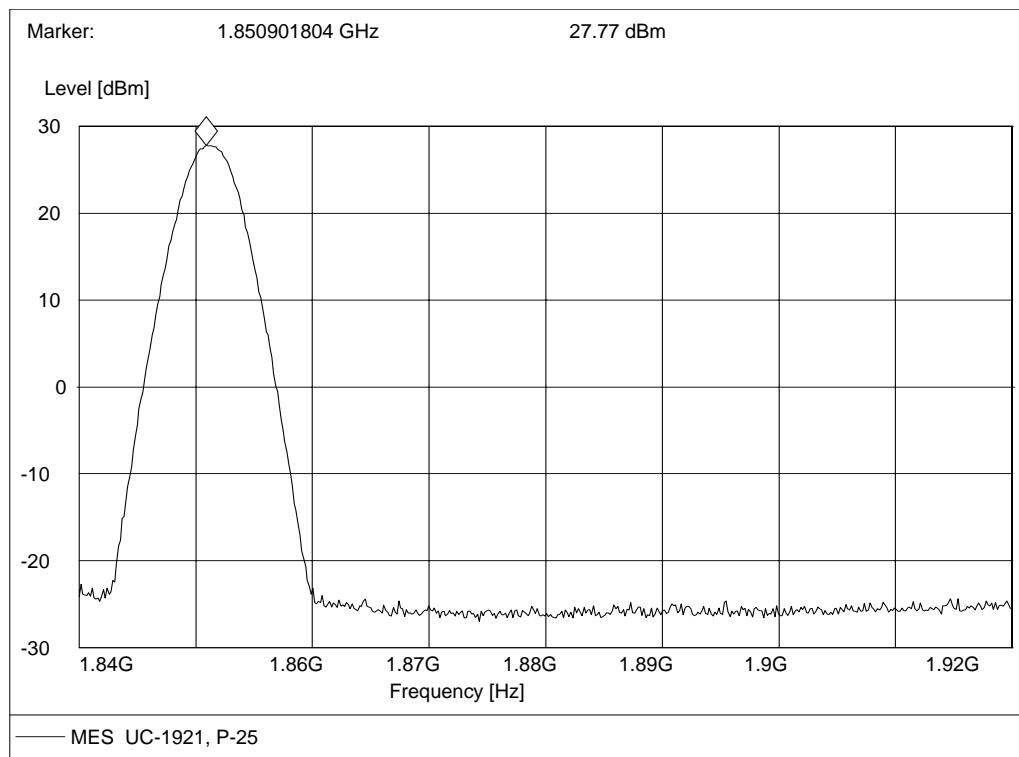

2. Middle channel No.600

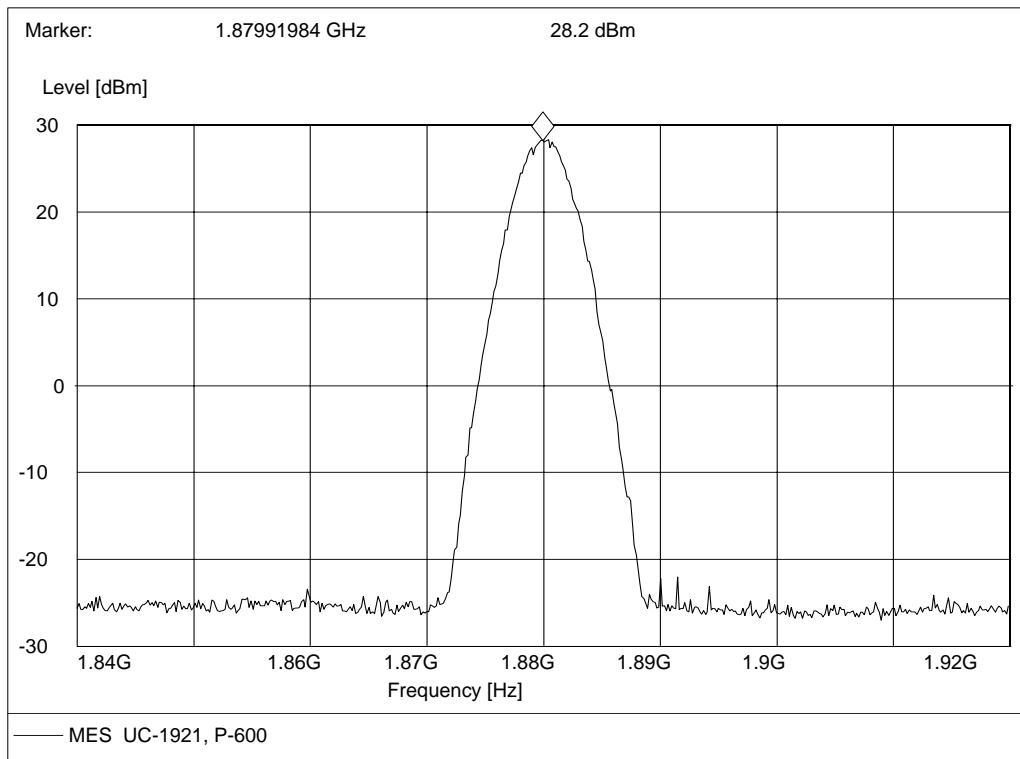

3. Highest channel No.1175

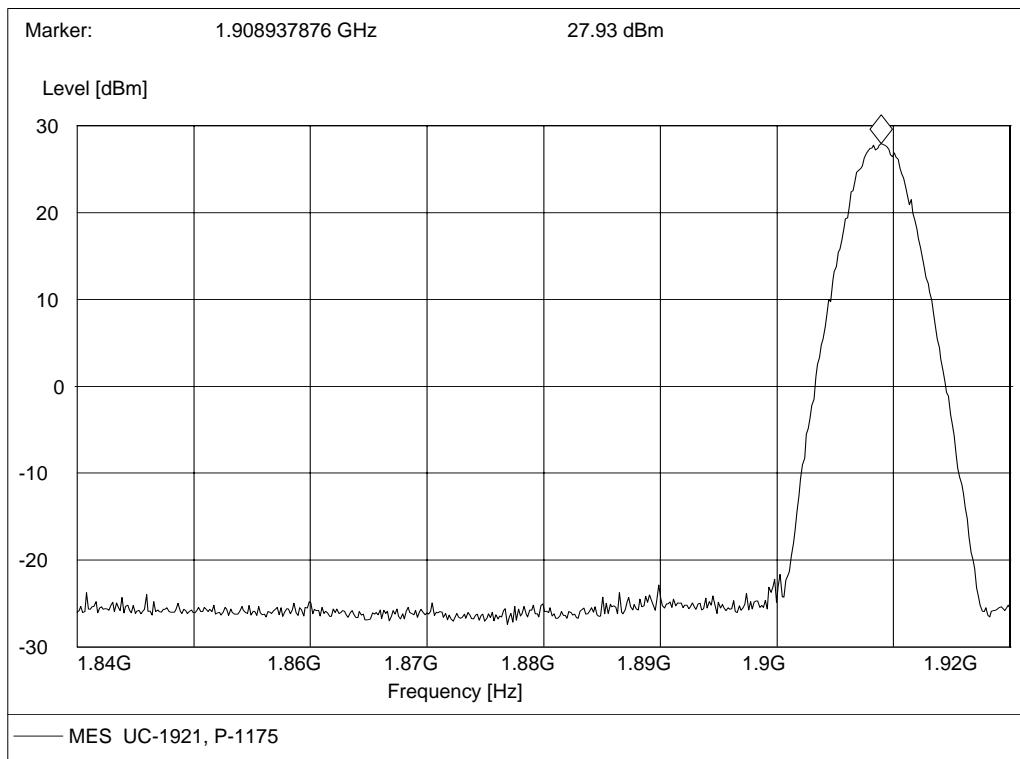

7 Occupied Bandwidth Test

7.1 Definition


According to FCC §2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth, or 20dB bandwidth ($10\log 1\% = 20\text{dB}$) taking the total RF output power as reference.

7.2 Test Procedure

- The EUT was coupled to the spectrum analyzer and the base station simulator through a power divider. The loss of the cables the test system is calibrated to correct the reading.
- The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode.
- The resolution bandwidth of the spectrum analyzer was set to at least 1% of the emission bandwidth. For GSM signal, $\text{VBW}=\text{RBW}=3\text{ kHz}$; for CDMA signal, $\text{VBW}=\text{RBW}=30\text{ kHz}$.

7.3 Test Setup

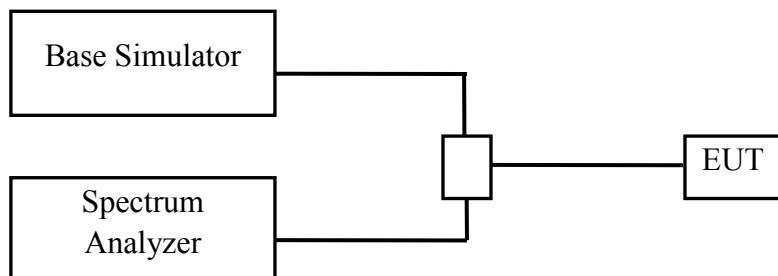

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

7.4 EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery.

A communication link was established between the MS and a System Simulator (SS).


The MS operated at the maximum output power.

The CDMA 1X (PCS band) channel No.25 (low), 600 (middle) and 1175 (high) were measured respectively.


7.5 Test Results

The occupied bandwidth was measured to be about 1.4MHz. Refer to the following plots.


1. Lowest channel No.25

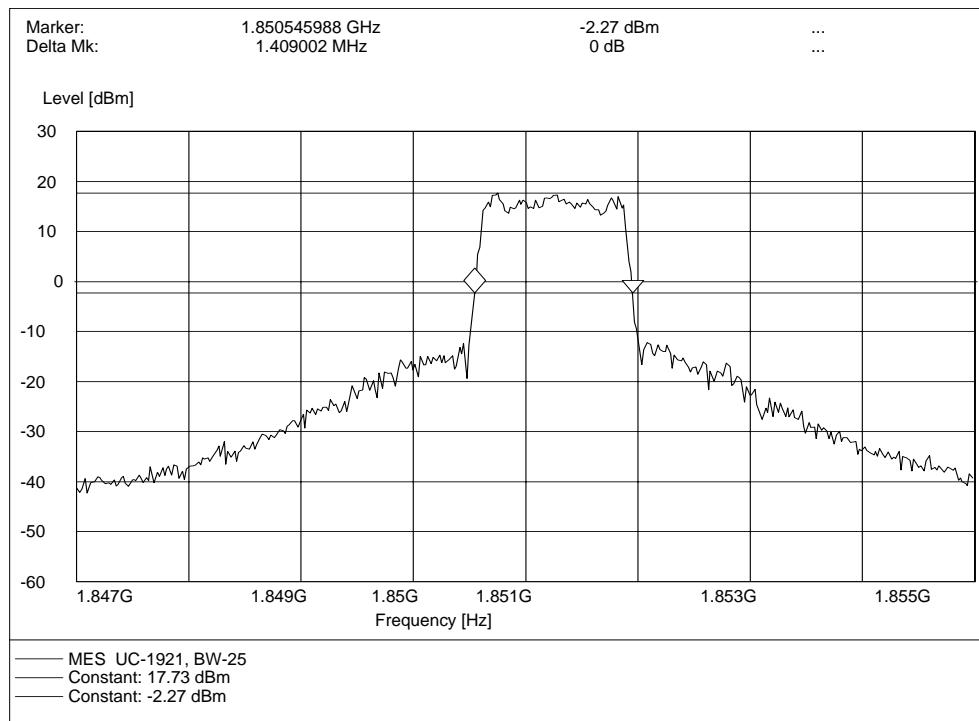

2. Middle channel No.600

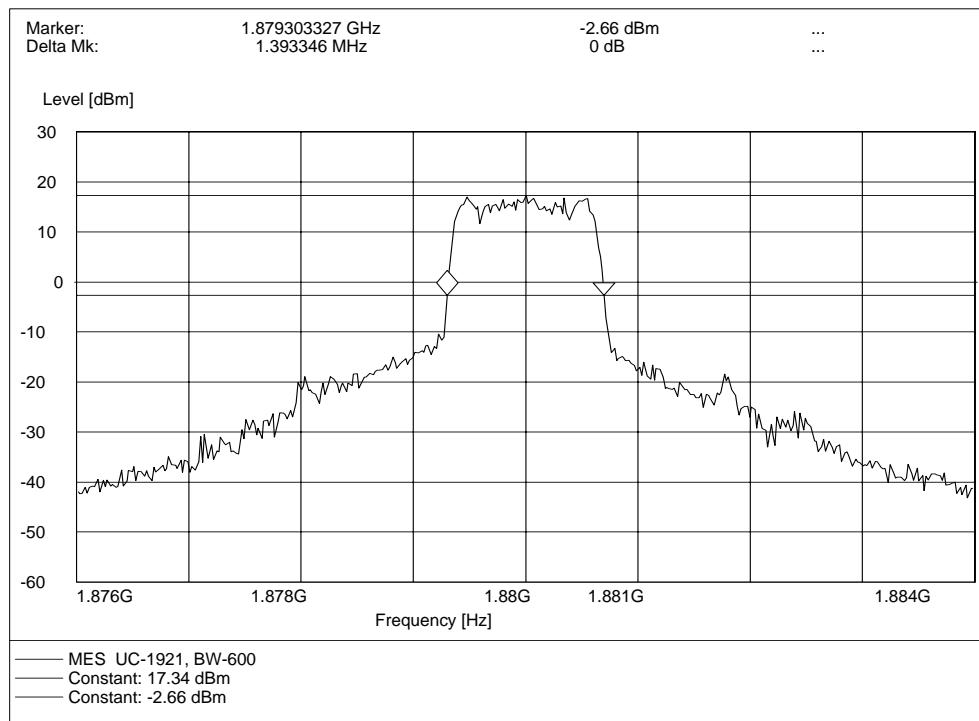

3. Highest channel No.1175

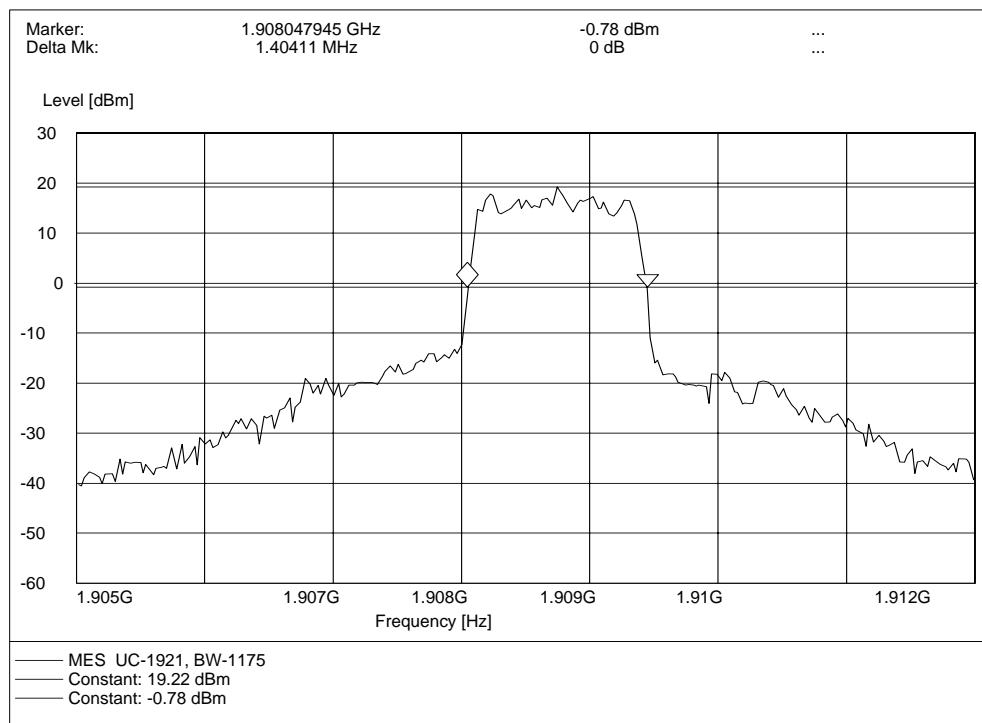

8 Conducted Spurious Emission Test

8.1 Limits of Conducted Spurious Emission


According to FCC §24.238 (a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB. This calculated to be -13dBm.

According to FCC §24.238 (b), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Thus the 26dB emission bandwidth is measurement for showing compliance at the band-edges

8.2 Test Procedure

- The EUT was coupled to the spectrum analyzer and the base station simulator through a power divider. The loss of the cables the test system is calibrated to correct the reading.
- The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode. The resolution bandwidth was set to 1MHz. The measuring frequencies are from 9 kHz to 10th harmonic of the fundamental frequency.
- In the 1 MHz bands immediately outside and adjacent to the frequency block, the resolution bandwidth of the spectrum analyzer was set to at least 1% of the emission bandwidth of the fundamental emission of the transmitter. For GSM signal, the resolution bandwidth was 3 kHz; for CDMA signal, the resolution bandwidth was 30 kHz.

8.3 Test Setup

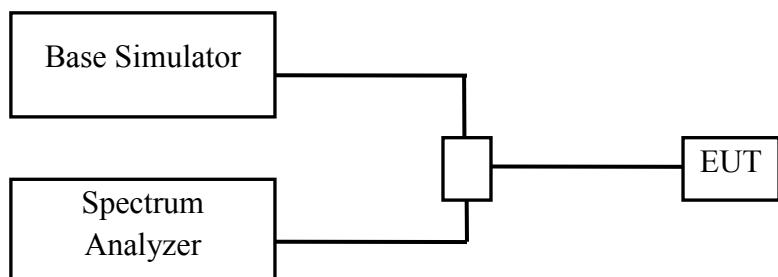

8.4 EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery.

A communication link was established between the MS and a System Simulator (SS).

The MS operated at the maximum output power.

The CDMA 1X (PCS band) channel No.25 (low), 600 (middle) and 1175 (high) were measured respectively.

8.5 Test Results


No.	Frequency (MHz)	Emission Power (dBm)	Limit (dBm)
CDMA 1X(PCS Band) Channel No. 25 (1851.25 MHz)			
1	3702.50	-37.82	-13
2	5553.75	-18.35	-13
3	7405.00	-35.89	-13
4	9256.25	--	-13
5	11107.50	--	-13
6	12958.75	--	-13
7	14810.00	--	-13
8	16661.25	--	-13
9	18512.50	--	-13
CDMA 1X(PCS Band) Channel No. 600 (1880.00 MHz)			
10	3760.00	-29.27	-13
11	5640.00	-25.81	-13
12	7520.00	-35.99	-13
13	9400.00	--	-13
14	11280.00	--	-13
15	13160.00	--	-13
16	15040.00	--	-13
17	16920.00	--	-13
18	18800.00	--	-13
CDMA 1X(PCS Band) Channel No. 1175 (1908.75 MHz)			
19	3817.50	-20.44	-13
20	5726.25	-20.17	-13
21	7635.00	-34.54	-13
22	9543.75	--	-13
23	11452.50	--	-13
24	13361.25	--	-13
25	15270.00	--	-13
26	17178.75	--	-13
27	19087.50	--	-13

NOTE:


1. The spurious radiations from 9 kHz to 10th harmonic of the fundamental frequency are researched. Only the harmonics are record in the table above.
2. “--” in the table above means that the emissions are too small to be measured and are at least 12 dB below the limit.

Plot of Band-Edge Emission

1. Lowest channel No.25

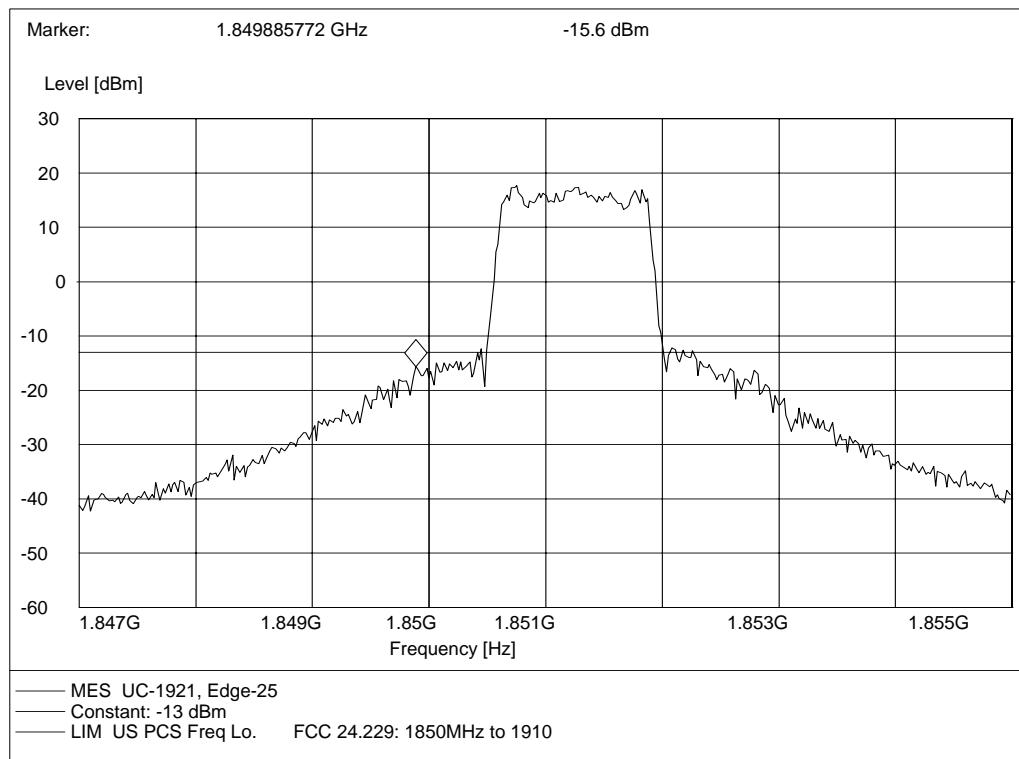


2. Highest channel No.1175

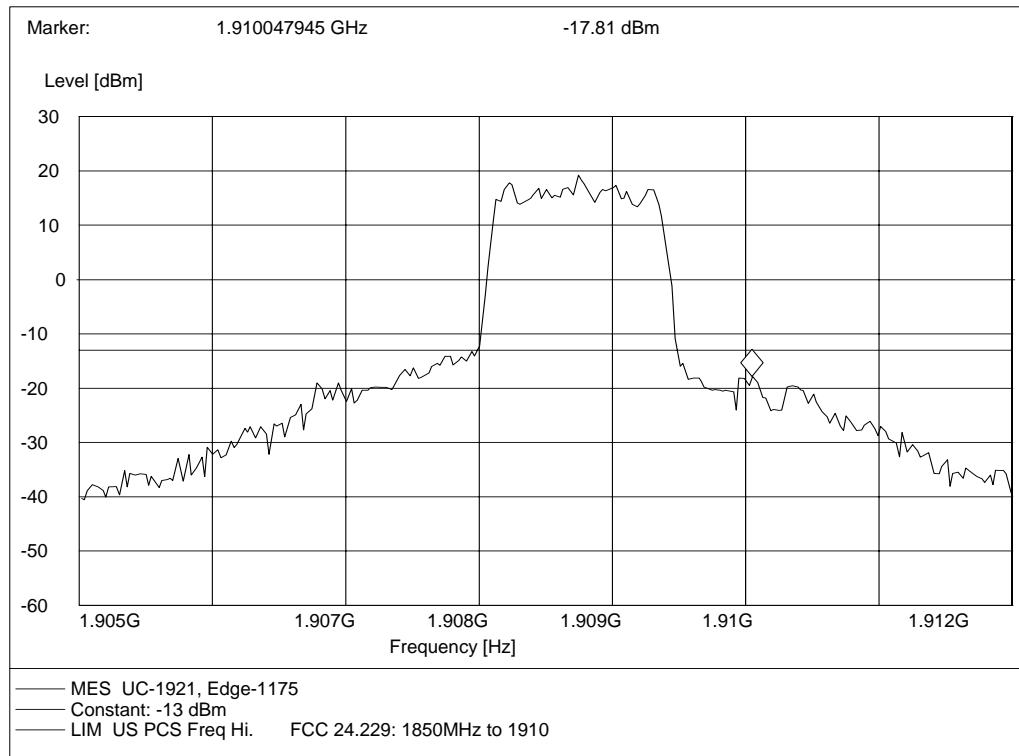


Plot of Spurious Emission

(Note: The marker point is the MS transmitting frequency which should be ignored.)


1. Lowest channel No.25

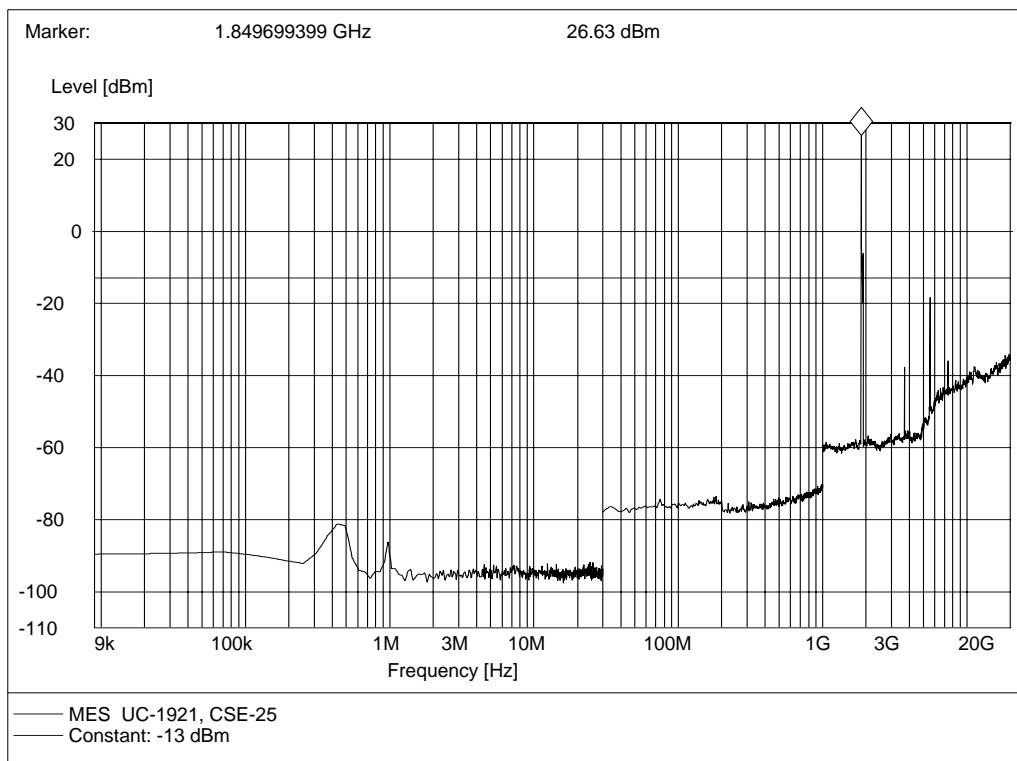

2. Middle channel No.600

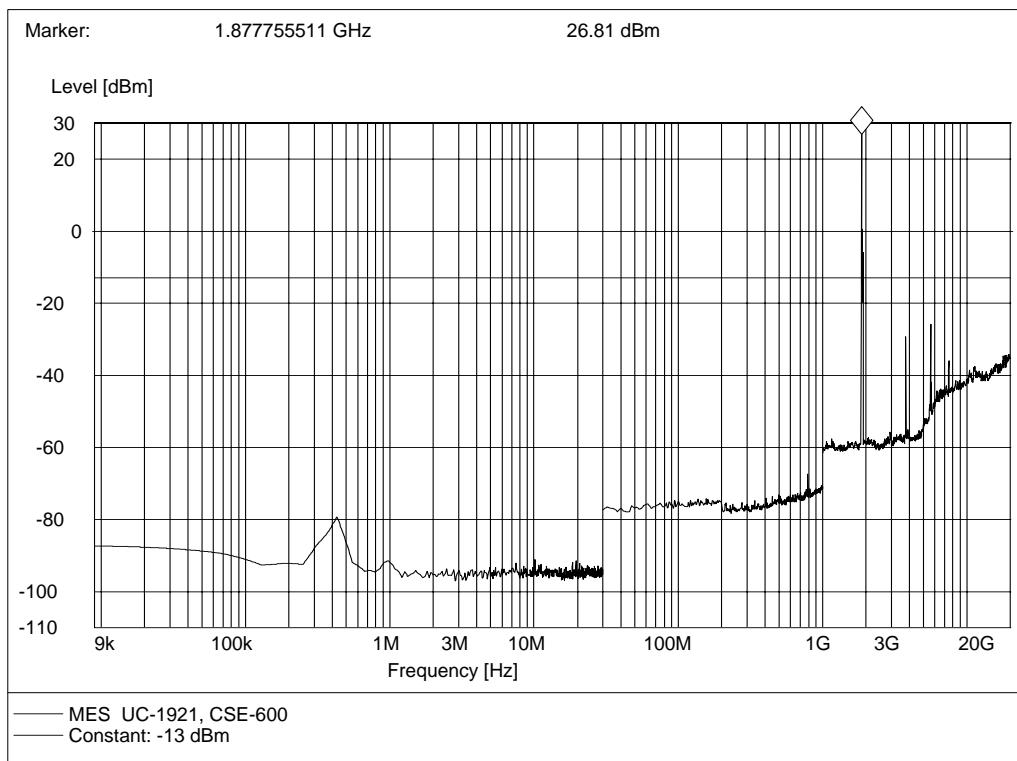

3. Highest channel No.1175

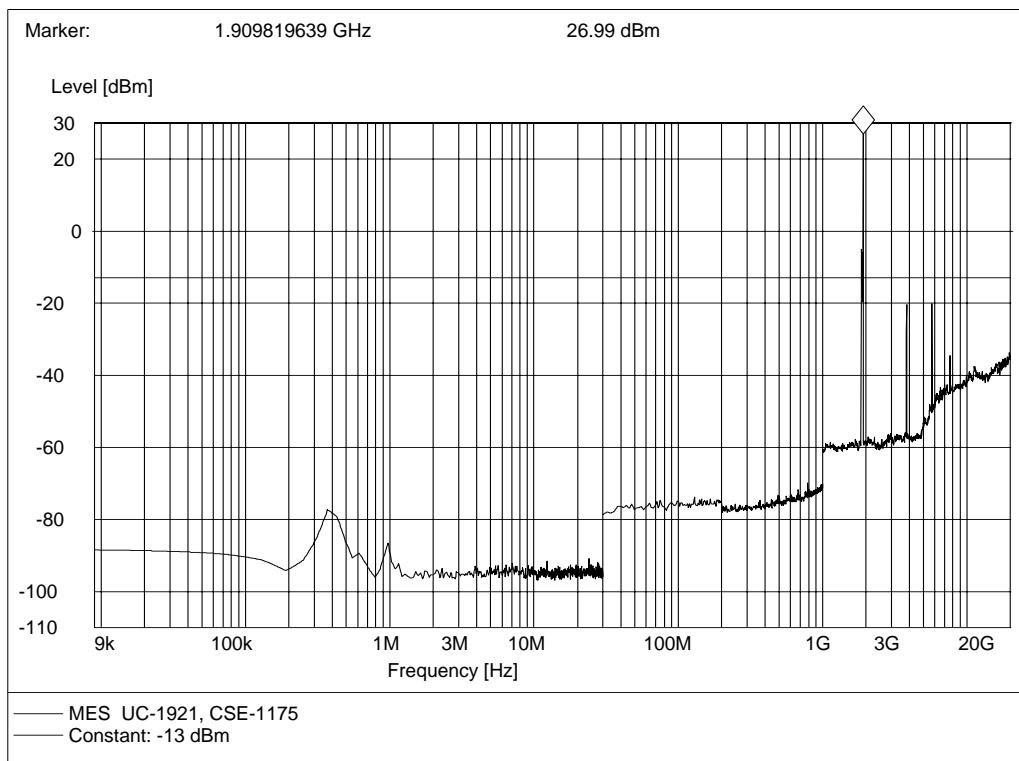

9 Transmitter Radiated Power (EIRP/ERP) Test


9.1 Limits of EIRP/ERP

According to FCC §24.232, the broadband PCS mobile stations are limited to 2 watts (33dBm) **EIRP** peak power.

9.2 Test Procedure

- a. The radiated power measurement was performed in a full anechoic chamber. The air lost of the site and the factors of the test system is pre-calibrated using substitution method.
- b. The EUT was placed on the vertical axis of a turntable 1.8 meters above the ground. The table was turned from 0 degrees to 360 degrees to find the maximum reading.
- d. In the frequency range 30 MHz to 3 GHz, ultra-broadband bi-log antenna was used. In the frequency range above 3 GHz, horn antenna was used. The antenna was at the same height as the EUT. Since the there was no reflection from the chamber floor and the site was pre-calibrated, the antenna height need not to be changed as the open site method. The polarization of the receiving antenna was the same as that of the EUT transmitting antenna.
- c. The spectrum analyzer was set to Maxpeak Detector and Maximum Hold mode. The resolution bandwidth was comparable to the emission bandwidth. For GSM signal, $VBW=RBW=1MHz$; for CDMA signal, $VBW=RBW=3MHz$.

9.3 Test Setup

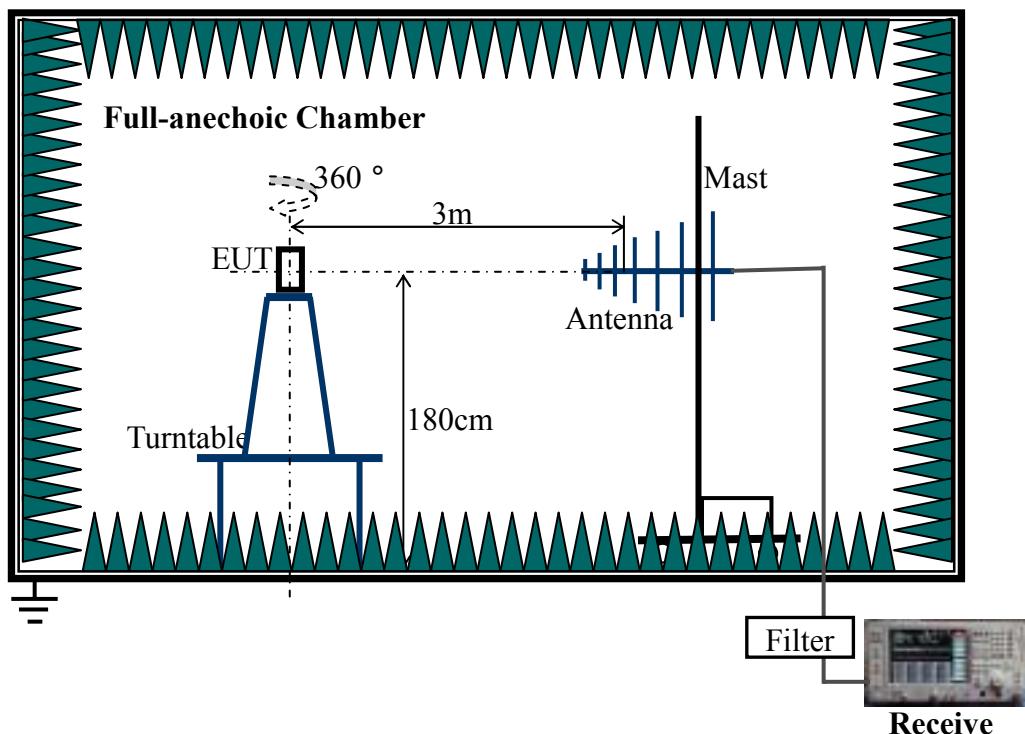

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

9.4 EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery.

A communication link was established between the MS and a System Simulator (SS).

The MS operated at the maximum output power.


The CDMA 1X (PCS band) channel No.25 (low), 600 (middle) and 1175 (high) were measured respectively.

9.5 Test Results


No.	CDMA 1X Channel No.	Frequency (MHz)	EIRP (dBm)	EIRP (W)	Limit EIRP (W)
1	25	1851.25	27.86	0.611	2
2	600	1880.00	27.90	0.617	2
3	1175	1908.75	27.86	0.611	2

Test Plots


1. Lowest channel No.25

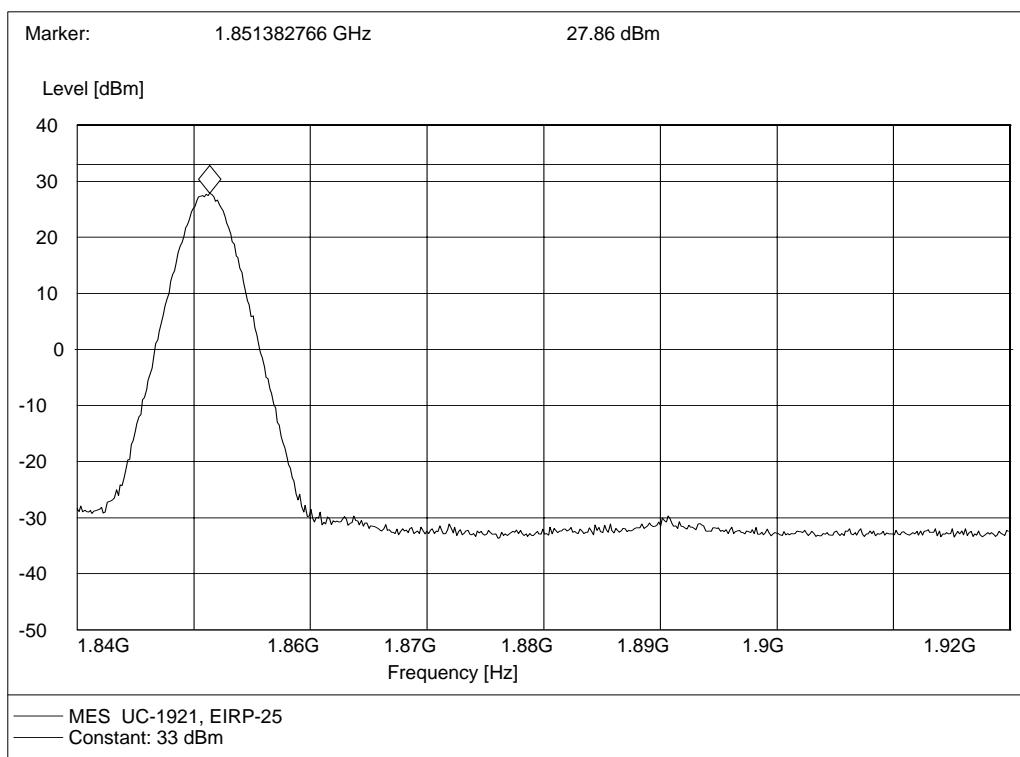

2. Middle channel No.600

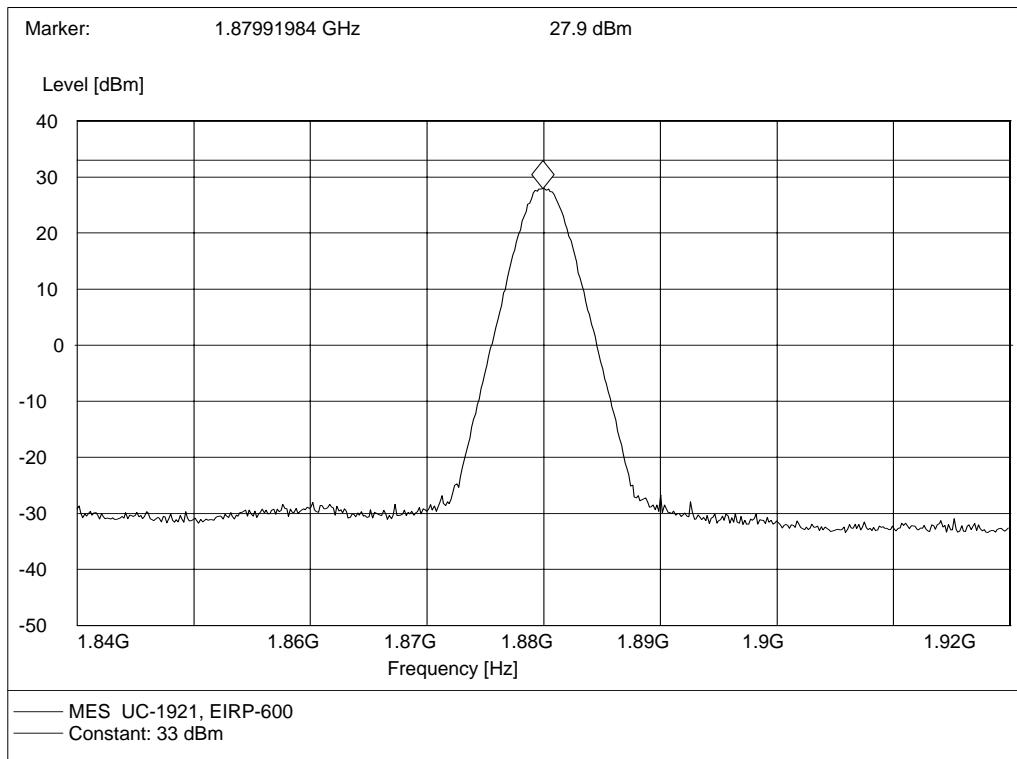

3. Highest channel No.1175

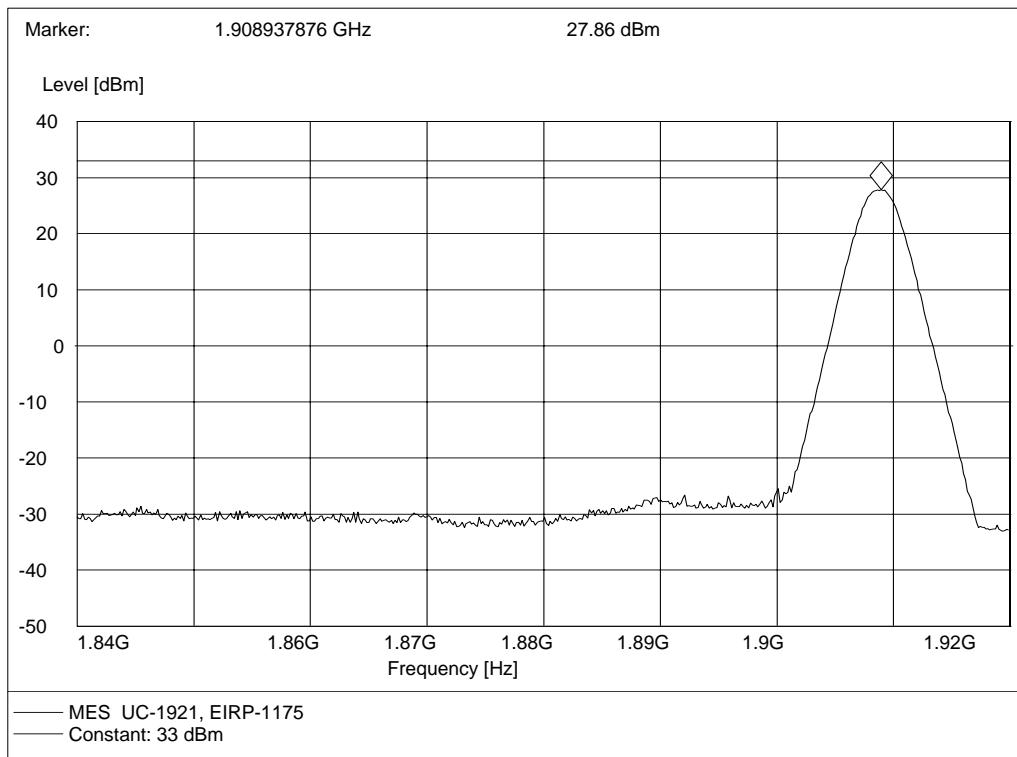

10 Radiated Spurious Emission Test

10.1 Limits of Radiated Spurious Emission

According to FCC §24.238 (a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This calculated to be -13dBm.

10.2 Test Procedure

- a. The radiated power measurement was performed in a full anechoic chamber. The air lost of the site and the factors of the test system is pre-calibrated using substitution method.
- b. The EUT was placed on the vertical axis of a turntable 1.8 meters above the ground. The table was turned from 0 degrees to 360 degrees to find the maximum reading.
- c. In the frequency range 30 MHz to 3 GHz, ultra-broadband bi-log antenna was used. In the frequency range above 3 GHz, horn antenna was used. The antenna was at the same height as the EUT. Since the there was no reflection from the chamber floor and the site was pre-calibrated, the antenna height need not to be changed as the open site method. The measurement was performed with the antenna at horizontal and vertical polarization respectively.
- d. The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode. The resolution bandwidth was set to 1MHz. The measuring frequencies are from 30 MHz to 10th harmonic of the fundamental frequency.
- e. In the 1 MHz bands immediately outside and adjacent to the frequency block, the resolution bandwidth of the spectrum analyzer was set to at least 1% of the emission bandwidth of the fundamental emission of the transmitter. For GSM signal, the resolution bandwidth was 3kHz; for CDMA signal, the resolution bandwidth was 30kHz.

10.3 Test Setup

Same as 9.3

10.4 EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery.

A communication link was established between the MS and a System Simulator (SS).

The MS operated at the maximum output power.



The CDMA 1X (PCS band) channel No.25 (low), 600 (middle) and 1175 (high) were measured respectively.

10.5 Test Results


No.	Frequency (MHz)	ERP (dBm)	ERP (dBm)	Limit (dBm)
		Antenna: <u>Vertical</u>	Antenna: <u>Horizontal</u>	
CDMA 1X(PCS Band) Channel No. 25 (1851.25 MHz)				
1	3702.50	-28.20	-35.80	-13
2	5553.75	-21.29	-33.76	-13
3	7405.00	-33.00	-40.05	-13
4	9256.25	--	--	-13
5	11107.50	--	--	-13
6	12958.75	--	--	-13
7	14810.00	--	--	-13
8	16661.25	--	--	-13
9	18512.50	--	--	-13
CDMA 1X(PCS Band) Channel No. 600 (1880.00 MHz)				
10	3760.00	-30.38	-39.34	-13
11	5640.00	-20.06	-29.82	-13
12	7520.00	-38.40	--	-13
13	9400.00	--	--	-13
14	11280.00	--	--	-13
15	13160.00	--	--	-13
16	15040.00	--	--	-13
17	16920.00	--	--	-13
18	18800.00	--	--	-13
CDMA 1X(PCS Band) Channel No. 1175 (1908.75 MHz)				
19	3817.50	-19.56	-30.54	-13
20	5726.25	-21.64	-28.20	-13
21	7635.00	-39.70	-42.93	-13
22	9543.75	--	--	-13
23	11452.50	--	--	-13
24	13361.25	--	--	-13
25	15270.00	--	--	-13
26	17178.75	--	--	-13
27	19087.50	--	--	-13

NOTE:

1. V and H are the antenna polarizations: Vertical and Horizontal.
2. The spurious radiations from 9 kHz to 10th harmonic of the fundamental frequency are researched. Only the harmonics are record in the table above.
3. “--” in the table above means that the emissions are too small to be measured and are at least 12 dB below the limit.

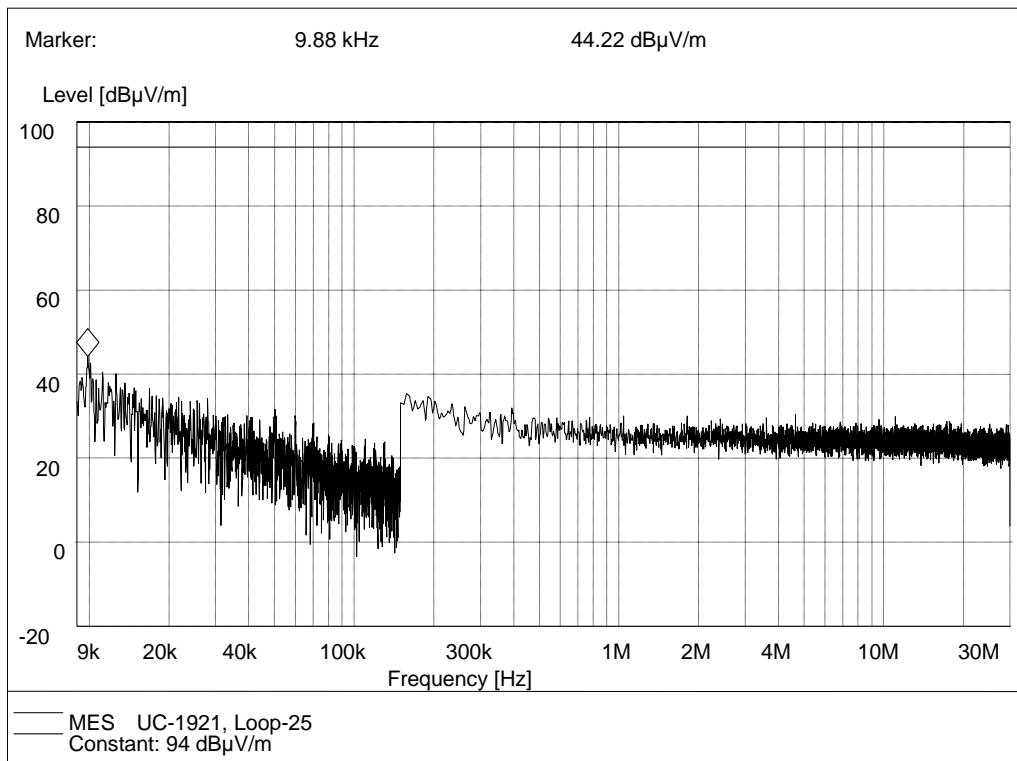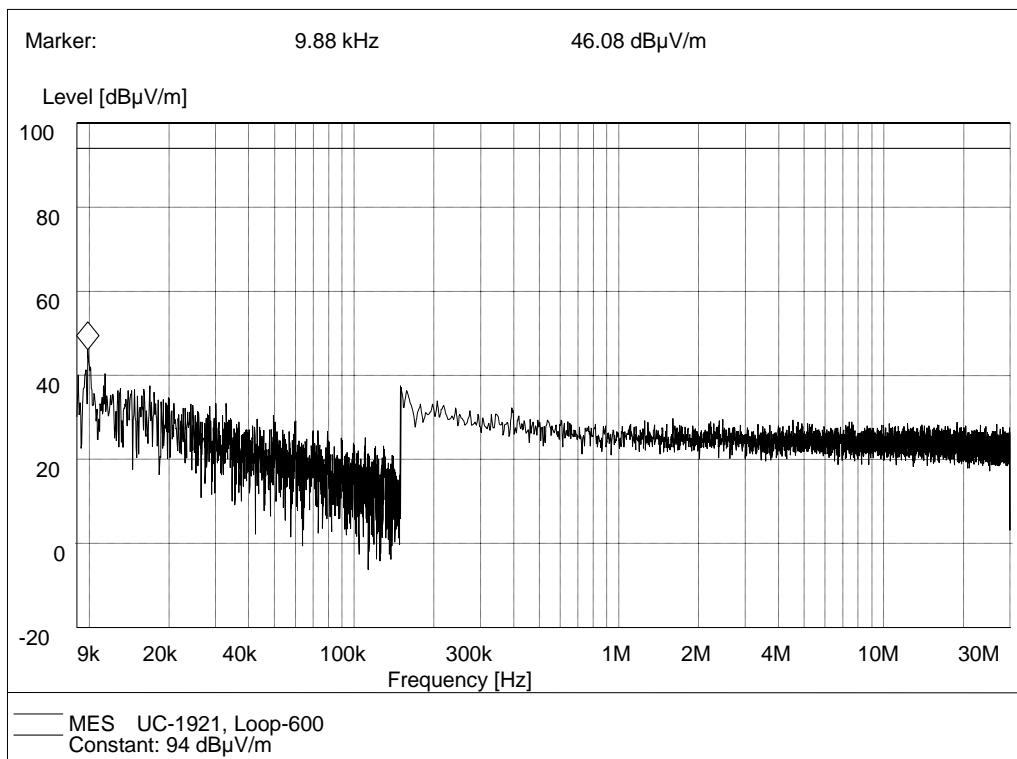Plot of Spurious Emission**I. 9kHz to 30MHz****1. Lowest channel No.25****2. Middle channel No.600**


3. Highest channel No.1175

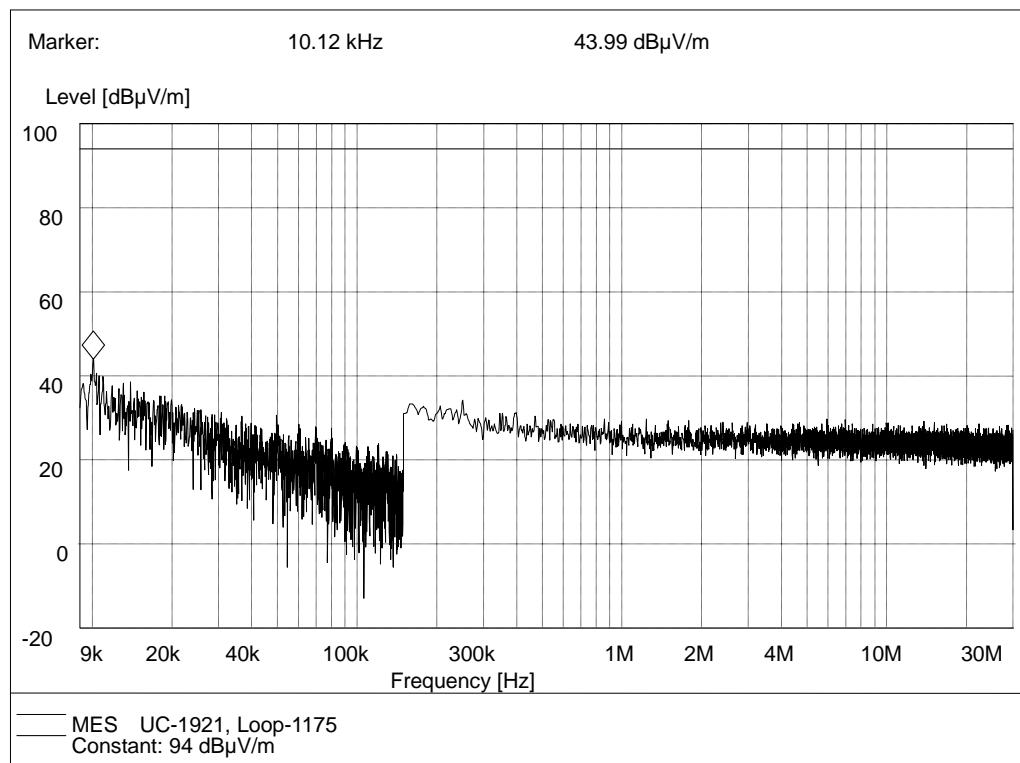


II. Above 30MHz

(Note: The marker point is the MS transmitting frequency which should be ignored.)


1. Lowest channel No.25, antenna vertical

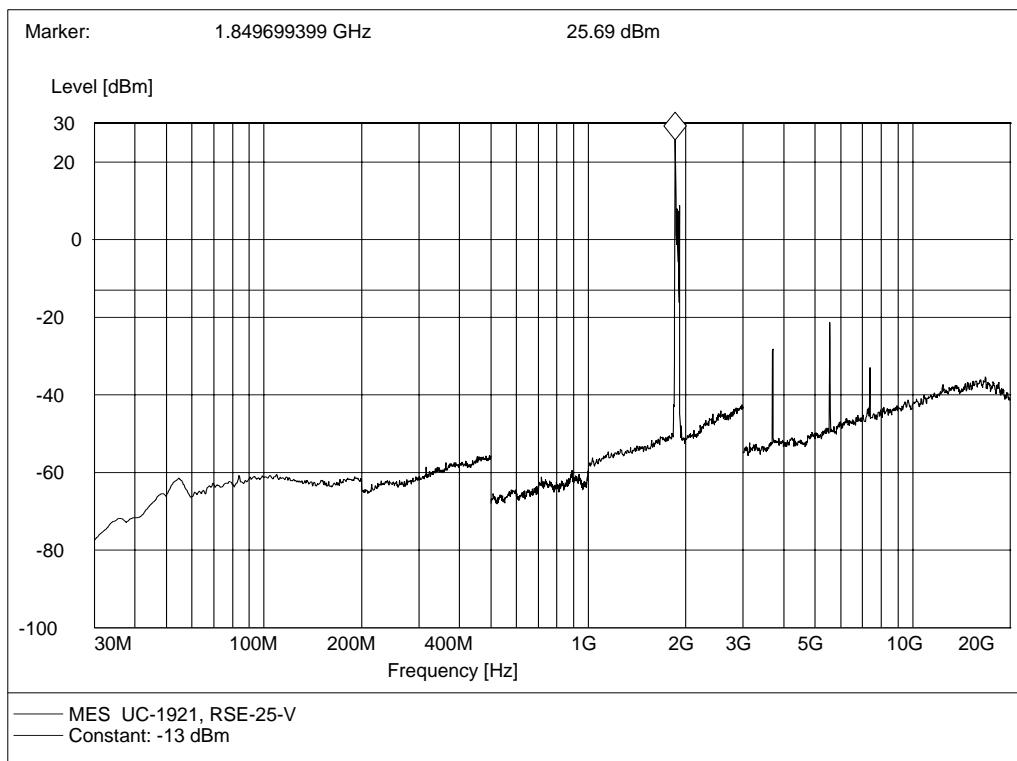


2. Lowest channel No.25, antenna horizontal

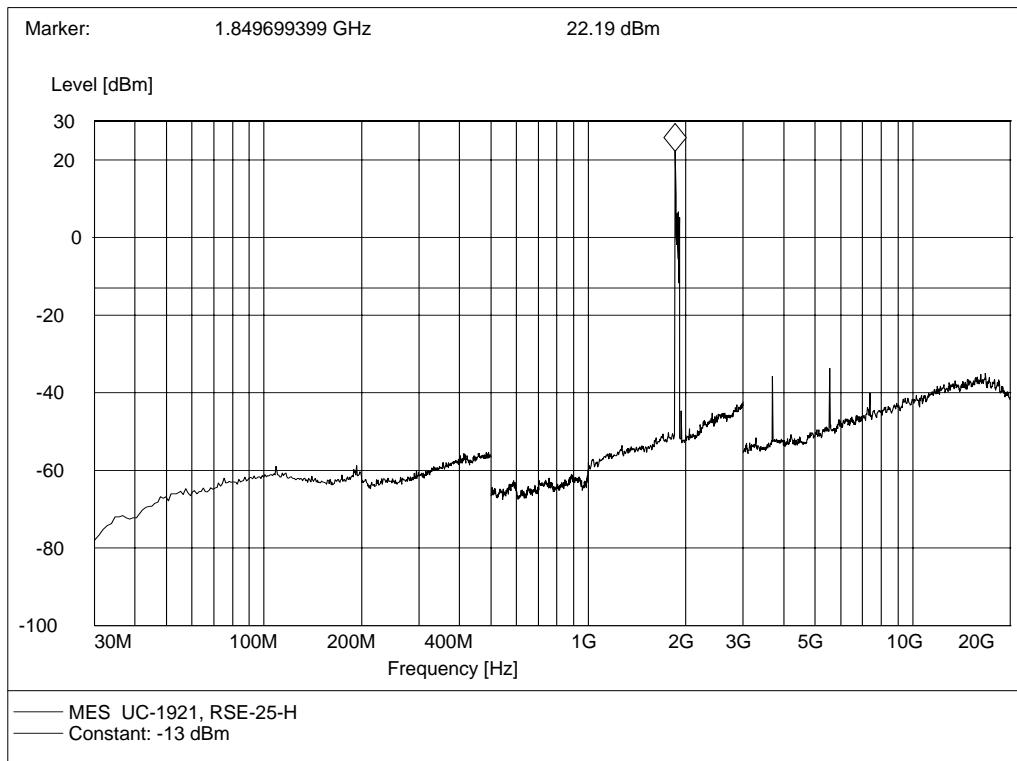


3. Middle channel No.600, antenna vertical

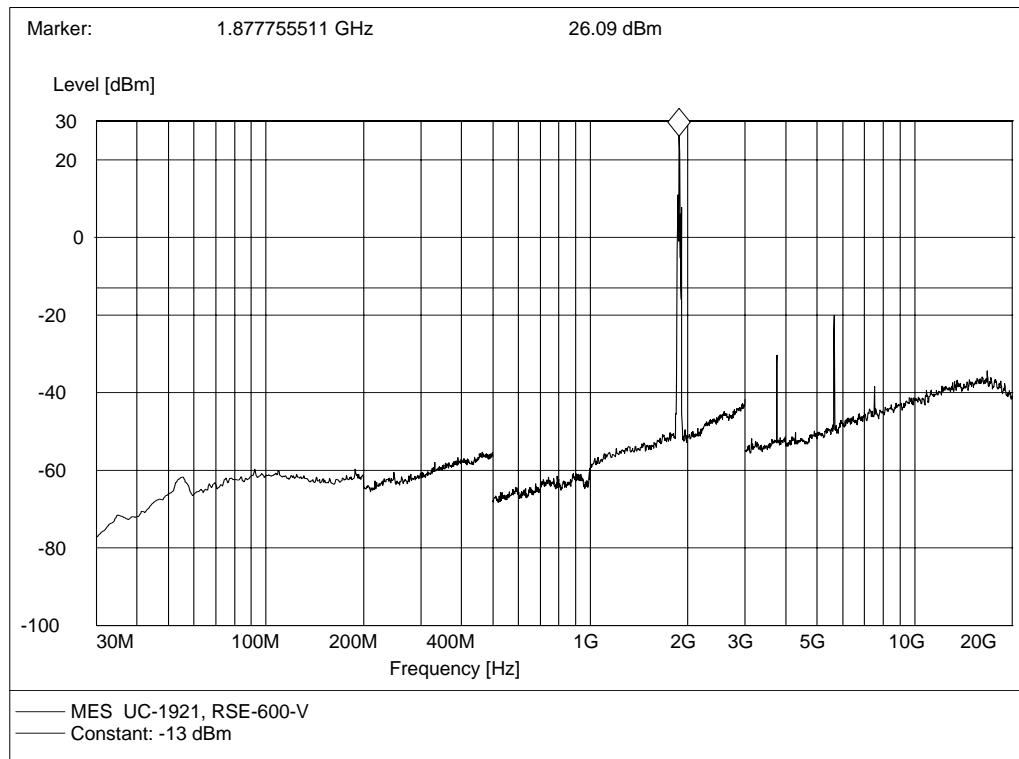


4. Middle channel No.600, antenna horizontal

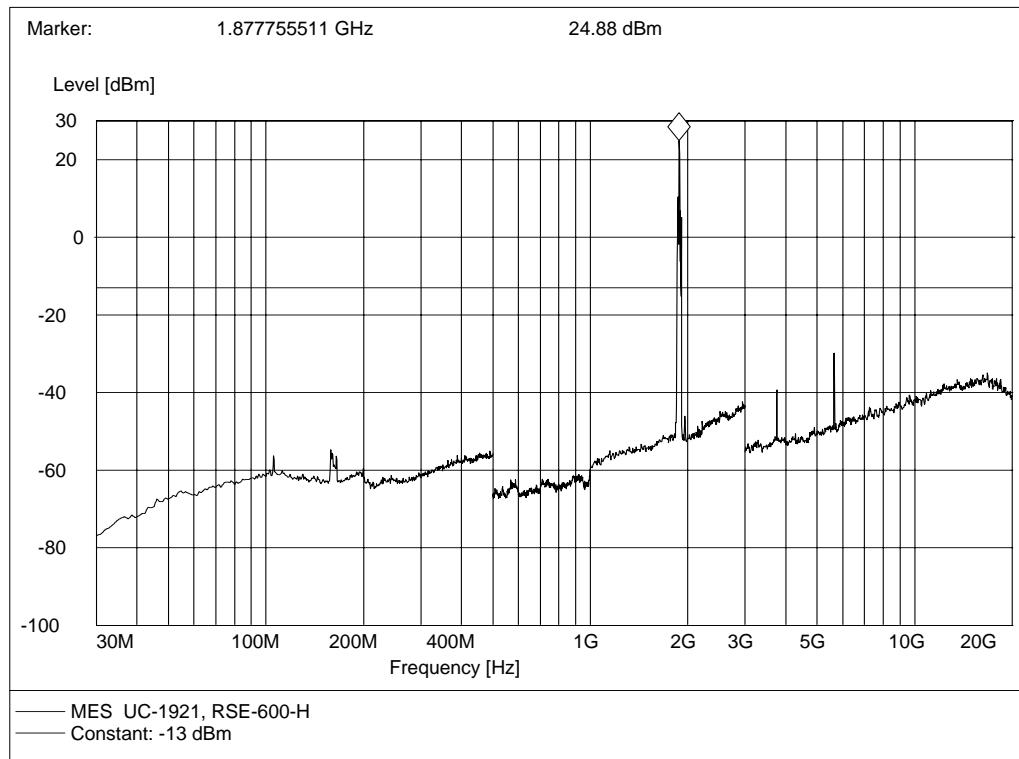

5. Highest channel No.1175, antenna vertical

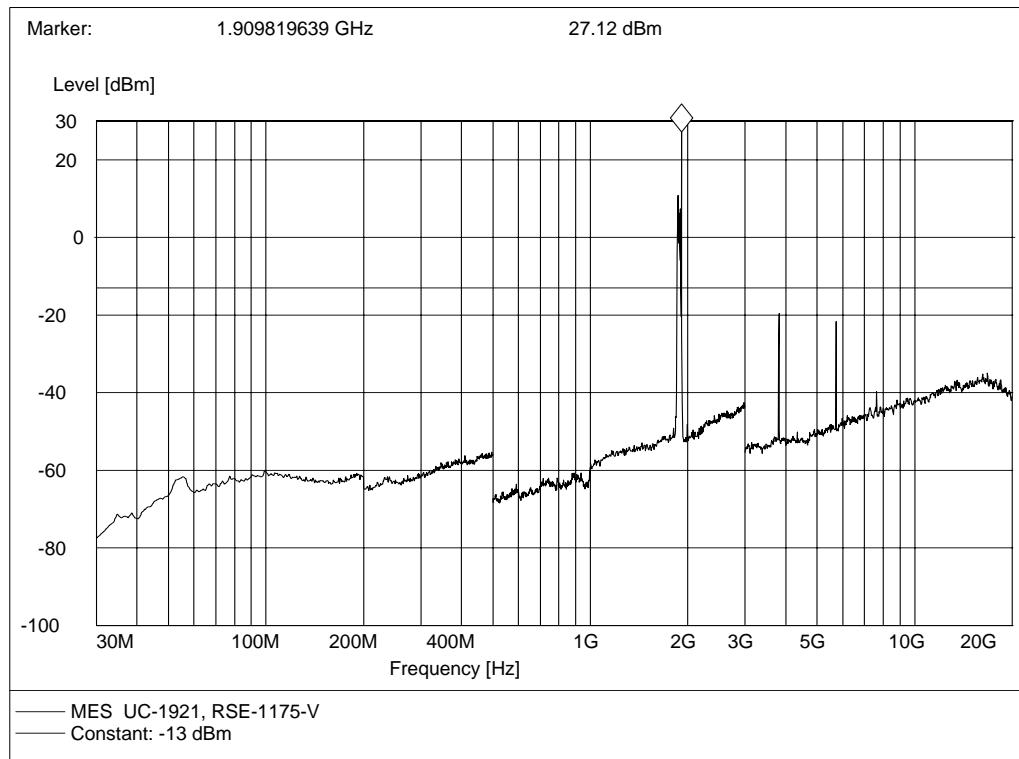

6. Highest channel No.1175, antenna horizontal

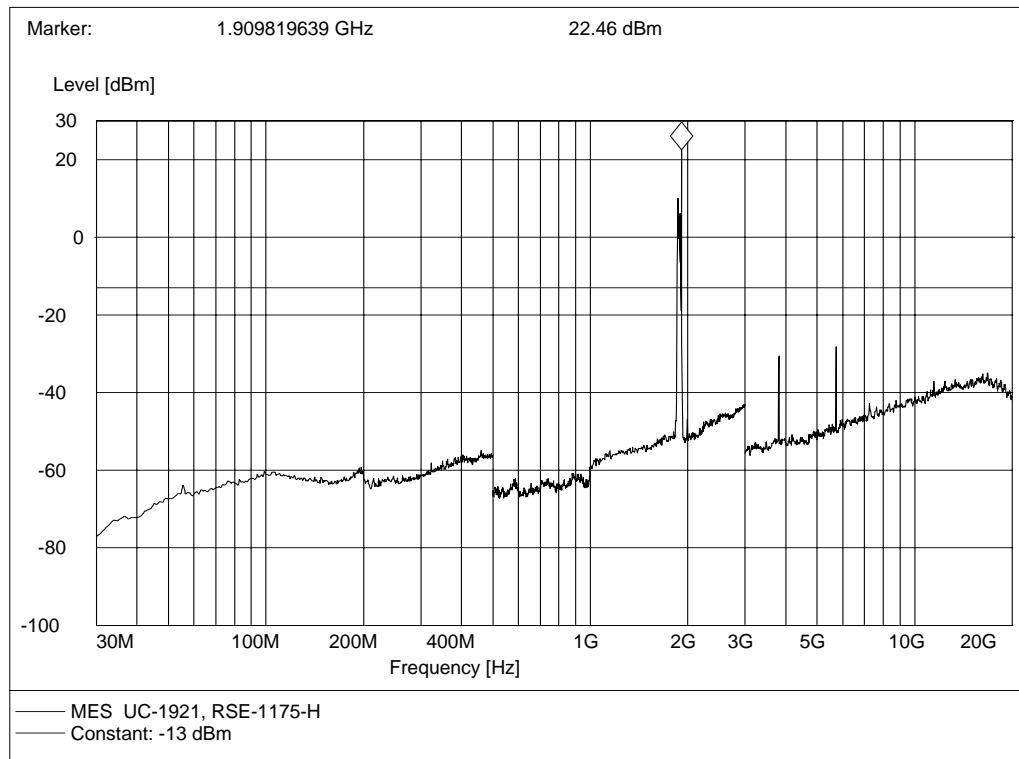

11 Frequency Stability Test

11.1 Requirement of Frequency Stability

According to FCC §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.


According to FCC §2.1055, the test conditions are:

- **Temperature:** The temperature is varied from -30°C to +50°C at intervals of not more than 10°C.
- **Primary Supply Voltage:** For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

11.2 Test Procedure

- a. The temperature was varied from -30°C to +50°C at intervals of 10°C. At each temperature level, the EUT was powered off and put in the temperature chamber for 2 hour.
- b. After sufficient stabilization, the EUT was turned on and a communication link was established. The frequency was measured within three minutes.
- c. For extreme supply voltage measurement, the EUT was tested at room temperature.

11.3 Test Setup

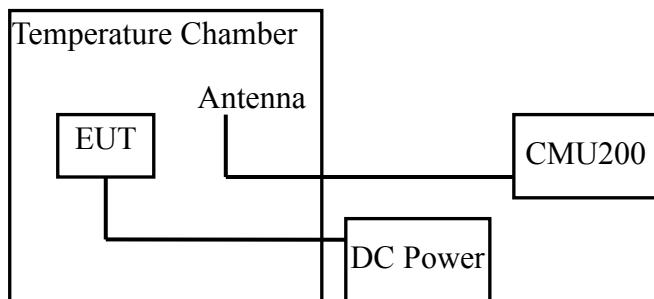

11.4 EUT Setup and Operating Conditions

The EUT configuration of the emission tests was MS + Battery.

A communication link was established between the MS and a System Simulator (SS).

The MS operated at the maximum output power.

The CDMA 1X (PCS band) channel No.25 (low), 600 (middle) and 1175 (high) were measured respectively.

11.5 Test Results


No.	Test Conditions		Frequency Deviation (Hz)			Limit ($\pm 1\text{ppm}$)
	Voltage	Temperature ($^{\circ}\text{C}$)	25CH	600CH	1175CH	
1	3.7V (V_{nom})	-30	-11	-20	-14	25CH, $\pm 1850\text{Hz}$ 600CH, $\pm 1880\text{Hz}$ 1175CH, $\pm 1910\text{Hz}$
2		-20	-6	-25	-2	
3		-10	-38	-16	-36	
4		0	-7	-13	-2	
5		+10	+4	-40	-13	
6		+20	-10	+2	-32	
7		+30	+7	+3	-10	
8		+40	-10	+1	-11	
9		+50	-3	+4	-30	
10	4.2V (V_{max})	+22	-6	+7	-34	
11	3.6V (V_{min})	+22	-2	+3	+5	



Appendix I : Photographs of the EUT



1. Appearance of the MS



2. Inside of the MS


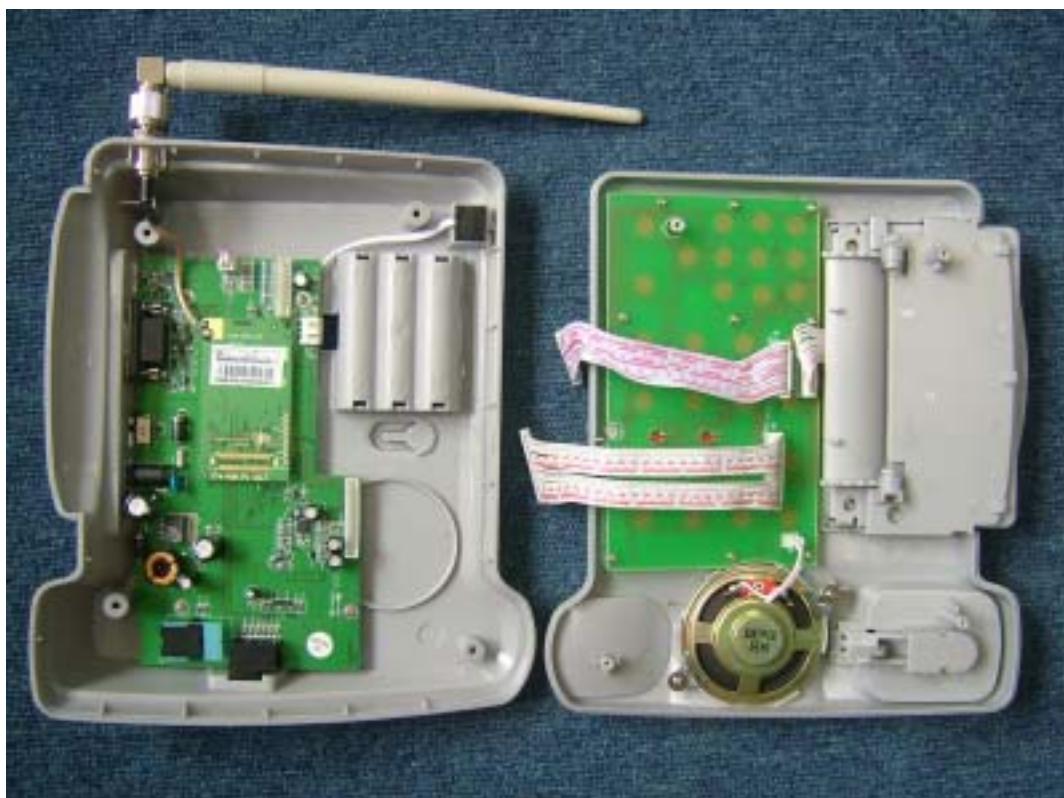


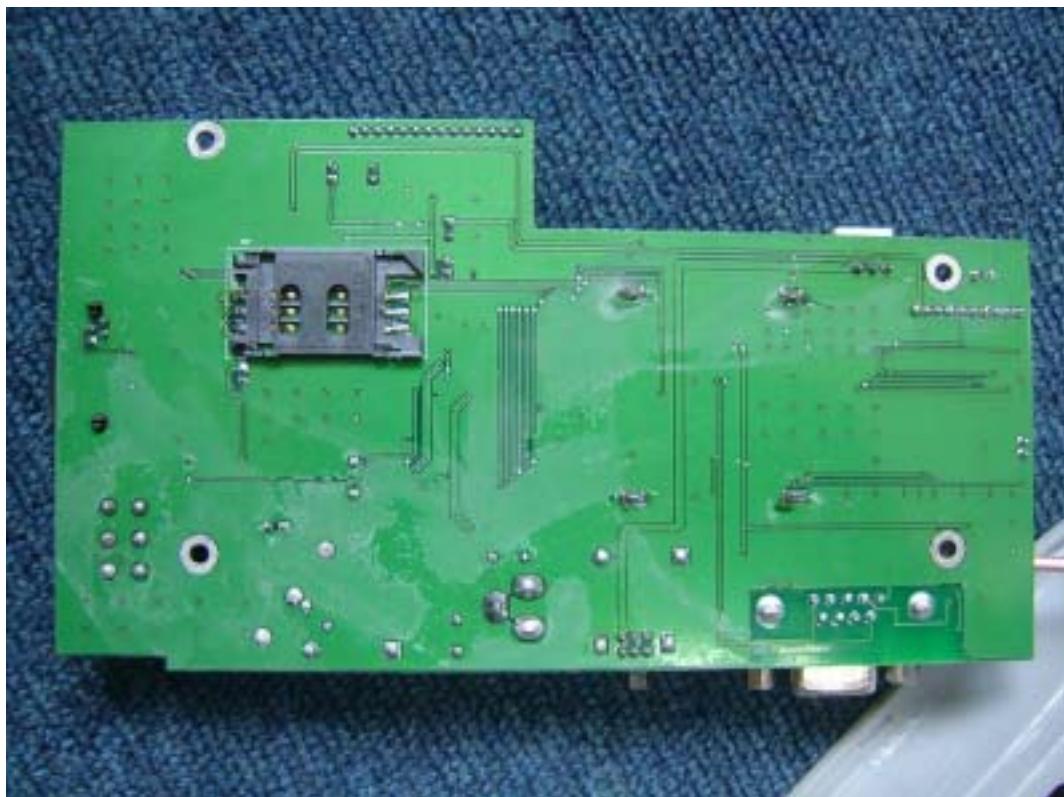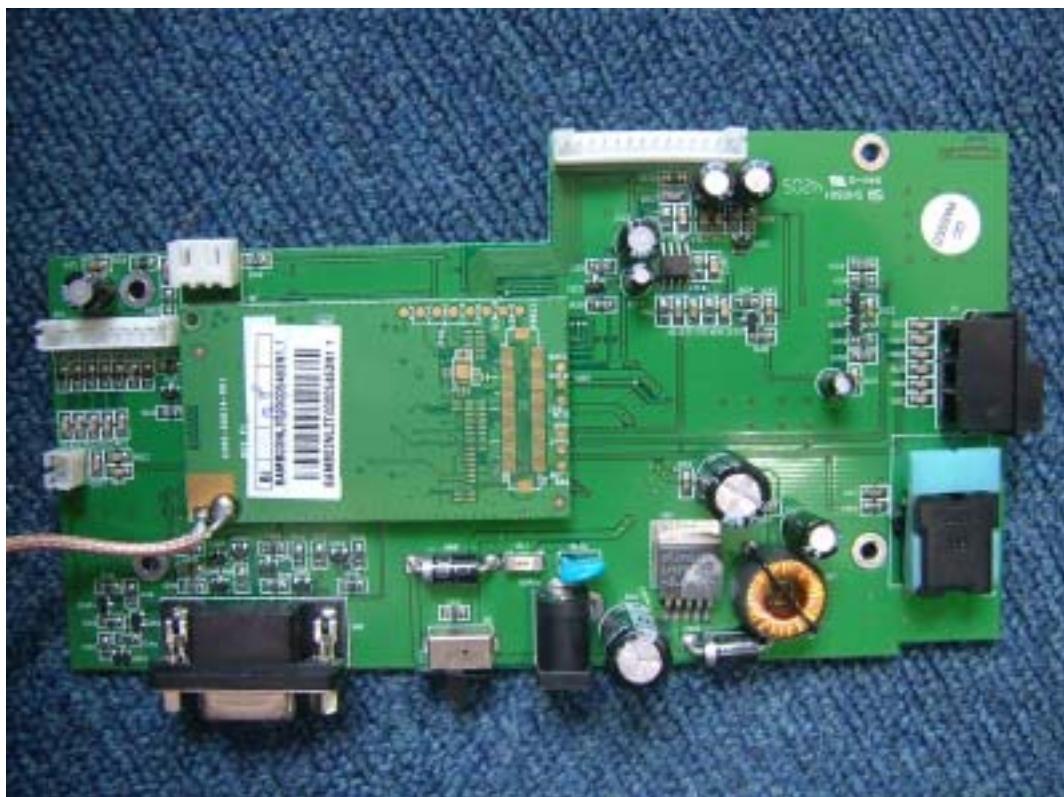

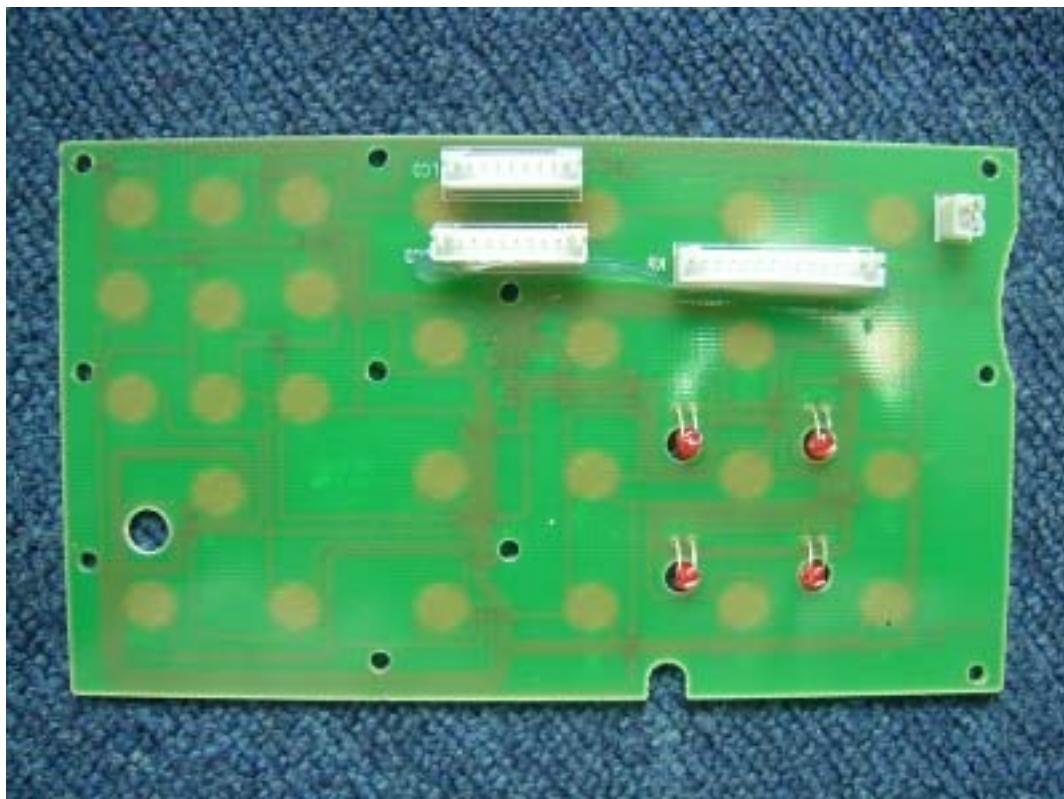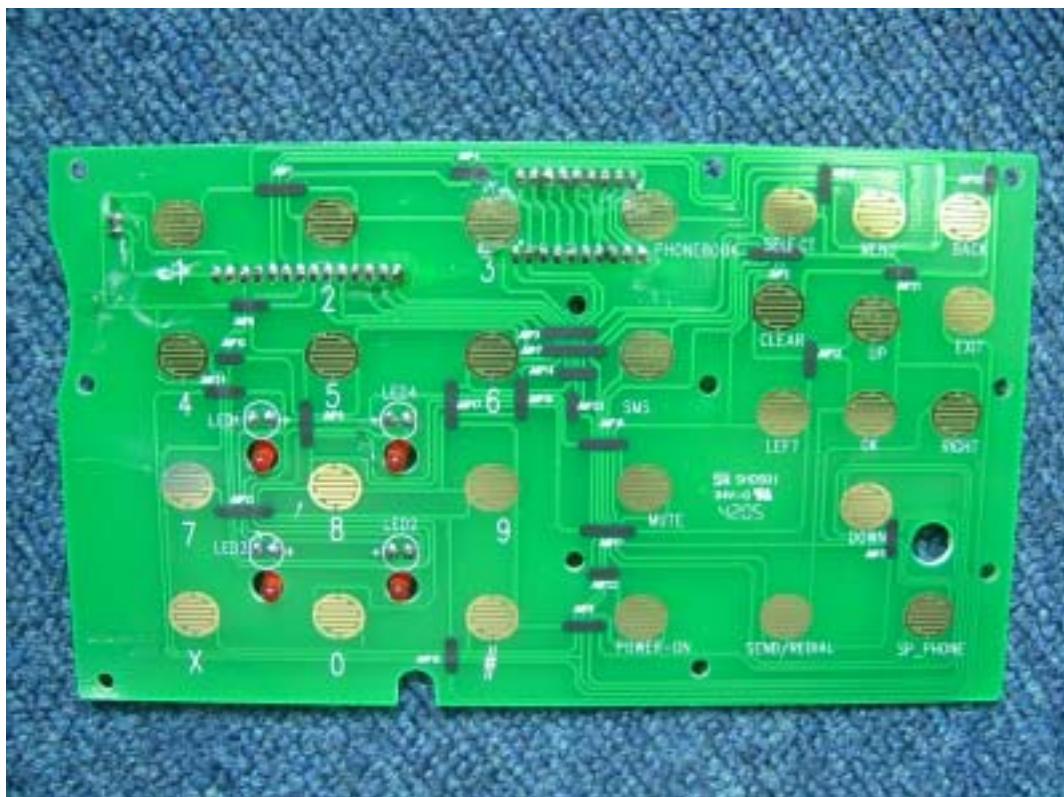



3. Inside of the Charger

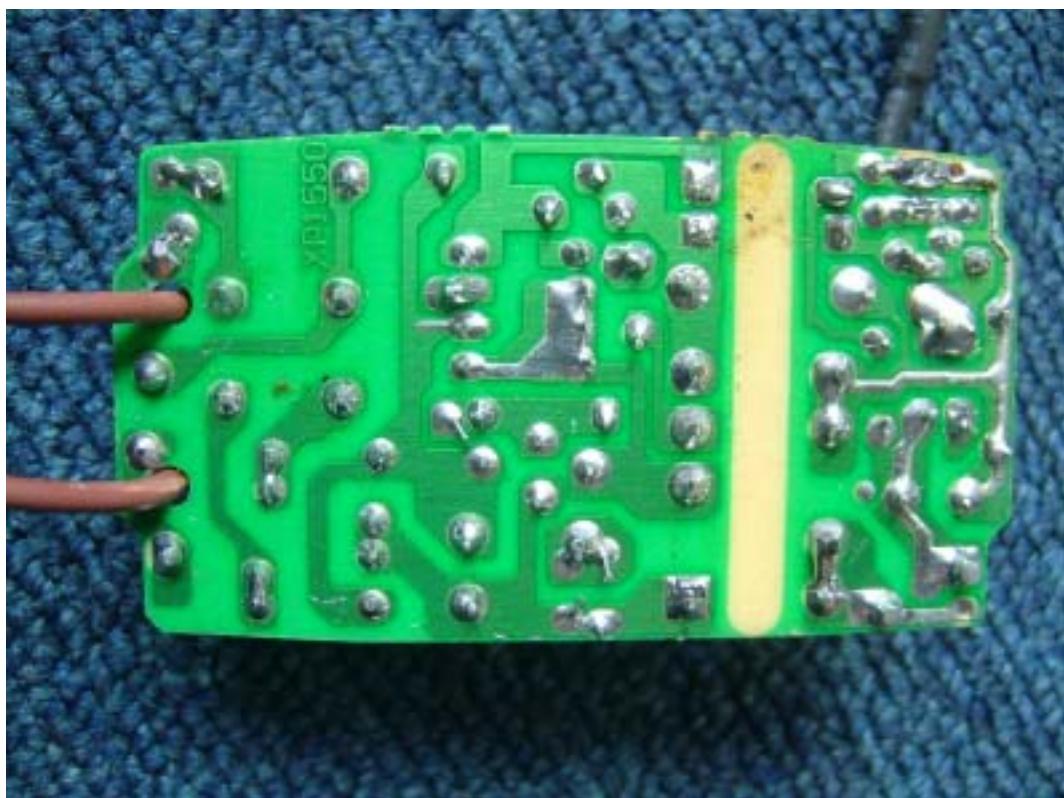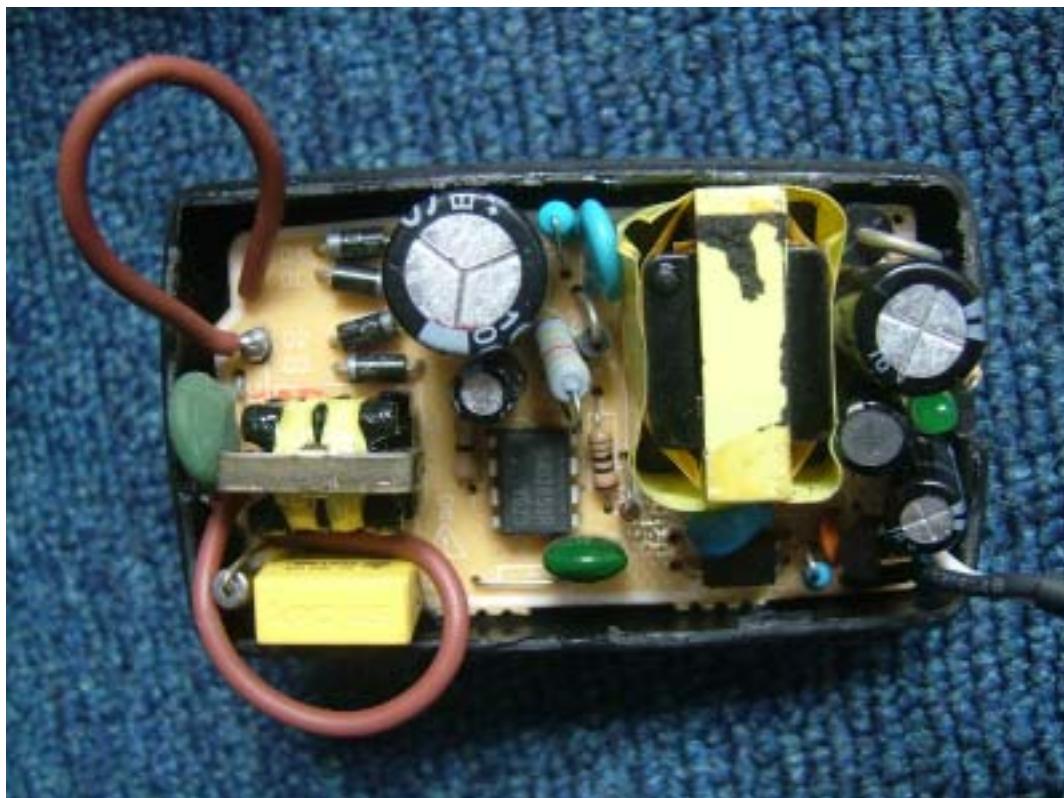

Appendix II : Photographs of the Test Configuration

1. Conducted Emission Test (Voice Mode)



2. Conducted Emission Test (Data Mode)



3. Radiated Emission Test (Voice Mode)



4. Radiated Emission Test (Data Mode)



5. Conducted RF Test



6. Radiated RF Test



7. Radiated RF Test (9kHz~30MHz)

