# **EMC TEST REPORT**

For

## RF Doorbell Transmitter

Model Number: QH-969,QH-938AC, QH-939AC, QH-936AC, QH-8901AC, QH-925AC, QH-927AC, QH-920AC, QH-229AC, QH-230AC, QH-127AC, QH-068AC, QH-269AC, QH-0981AC, QH-051AC, QH-061AC, QH-951, QH-952, QH-953, QH-955, QH-956, QH-957,968,969,QH-939A,QH-939B,QH-939C,QH-939D

FCC ID: UQGQH-969

Report Number: WT088001381

Test Laboratory : Shenzhen Academy of Metrology and

Quality Inspection EMC Laboratory

Guangdong EMC Compliance Test Center

Site Location : Bldg. of Metrology &Quality Inspection,

Longzhu Road, Shenzhen, Guangdong,

China

Tel : 0086-755-26941599

Fax : 0086-755-26941545 Email : emc@smq.com.cn

## TABLE OF CONTENTS

TEST	REPORT DECLARATION	.3					
1.	TEST RESULTS SUMMARY	.4					
2.	GENERAL INFORMATION	.5					
	2.1. Report information	.5					
	2.2. Laboratory Accreditation and Relationship to Customer						
	2.3. Measurement Uncertainty						
3.	PRODUCT DESCRIPTION	.6					
	3.1. EUT Description	.6					
	3.2. Related Submittal(s) / Grant (s)						
	3.3. Block Diagram of EUT Configuration						
	3.4. Operating Condition of EUT						
	3.5. Test voltage	.6					
	3.6. Special Accessories	.6					
	3.7. Equipment Modifications	.7					
	3.8. Support Equipment List						
	3.9. Test Conditions	.7					
4.	TEST EQUIPMENT USED	.7					
5.	5. CONDUCTED DISTURBANCE TEST						
	5.1. Test Standard and Limit	.8					
	5.2. Test Procedure	.8					
	5.3. Test Arrangement	.8					
	5.4. Test Data	.8					
<b>6.</b>	RADIATED DISTURBANCE TEST	.9					
	6.1. Test Standard and Limit	.9					
	6.2. Test Procedure	10					
	6.3. Test Arrangement	10					
	6.4. Test Data	10					
7.	OCCUPIED BANDWIDTH	14					
	7.1. Test Standard and Limit	14					
	7.2. Test Procedure	14					
	7.3. Test Arrangement	14					
	7.4. Test Data	14					
8.	DEACTIVATION TIME	16					
	8.1. Test Standard and Limit.	16					
	8.2. Test Procedure	16					
	8.3. Test Arrangement	16					
	8.4. Test Data	16					
9.	ANTENNA REQUIREMENT	18					
	9.1. STANDARD APPLICABLE						
	9.2. ANTENNA CONNECTED CONSTRUCTION						
APPE	NDIX I TEST SETUP PHOTOS	19					
APPE	NDIX II EUT PHOTOS	21					

## TEST REPORT DECLARATION

Applicant : Qiaohua (Puning) Electric Co., Ltd

Address : Qiaohua Industrial Building, Shi Qiao Tou, Puning, China

Manufacture

: Qiaohua (Puning) Electric Co., Ltd

Address : Qiaohua Industrial Building, Shi Qiao Tou, Puning, China

EUT

Description : RF Doorbell Transmitter

QH-969,QH-938AC, QH-939AC, QH-936AC, QH-8901AC, QH-925AC,

QH-927AC, QH-920AC, QH-229AC, QH-230AC, QH-127AC,

Model
Number

Output

QH-952,QH-953,QH-955,QH-956,QH-957,968,969,QH-939A,QH-939B,

QH-939C,QH-939D

FCC ID : UQGQH-969

Test Standards:

## FCC Part 15 15.209, 15.231

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 15.207, 15.209, 15.249.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Tested by:	for ch	Date:	Oct.09,2008
	(Ryan Chen)		
Checked by:	Derold	Date:	Oct.09,2008
,	(Dewelly Yang)		
Approved by:	pelot	Date:	Oct.09,2008
	(Peter Lin)		

Report No.: WT088001381 Page 3/24

# 1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
Conducted Disturbance	15.207	N/A
Radiated Disturbance	15.209, 15.231	Pass
Occupied Bandwidth	15.231	Pass
Deactivation time	15.231	Pass
Antenna Requirement	15.203	Pass
Frequency stability	15.231	N/A
Transmit and silent Time	15.231	N/A

N/A is not applicable

Report No.: WT088001381 Page 4/24

## 2. GENERAL INFORMATION

## 2.1. Report information

- 2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.
- 2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 2.1.3.Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

#### 2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at Bldg. of Metrology & Quality Inspection, Longzhu Road, Nanshan District, Shenzhen, Guangdong, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Committee for Laboratories (**CNAL**) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is L0579.

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number are 97379(open area test site) and 274801(semi anechoic chamber).

The Laboratory is listed in Voluntary Control Council for Interference by Information Technology Equipment (VCCI), and the registration number are R-1974(open area test site), R-1966(semi anechoic chamber), C-2117(mains ports conducted interference measurement) and T-180(telecommunication ports conducted interference measurement).

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is IC4174.

**TUV Rhineland** accredits the Laboratory for conformance to IEC and EN standards, the registration number is **E2024086Z02**.

Measurement Uncertainty

#### 2.3. Measurement Uncertainty

Radiated Disturbance: 30MHz~1000MHz 4.5dB

1GHz~18GHz 4.6dB

Report No.: WT088001381 Page 5/24

## 3. PRODUCT DESCRIPTION

## 3.1. EUT Description

Description : RF Doorbell Transmitter

Manufacturer : Qiaohua (Puning) Electric Co., Ltd

QH-969,QH-938AC, QH-939AC, QH-936AC, QH-8901AC, QH-925AC, QH-927AC, QH-920AC, QH-229AC, QH-230AC, QH-127AC, QH-068AC, QH-269AC,

Model Number : QH-250AC, QH-127AC, QH-068AC, QH-269AC, QH-0981AC, QH-051AC, QH-061AC, QH-951, QH-952,

QH-953,QH-955,QH-956,QH-957,968,969,QH-939A,QH-9

39B,QH-939C,QH-939D

Operate Frequency : 315MHz

Modulation Type : ASK

Power : 12.0V (battery)

Bandwidth : 100kHz

Antenna Designation : Integrated

All models are identical in all aspects except for model

name, exterior, colour.

The test was performed with QH-969 only.

#### 3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: UQGQH-969 filing to comply with Section 15.209, 15.231 of the FCC Part 15, Subpart C Rules.

## 3.3. Block Diagram of EUT Configuration

EUT

Figure 1 EUT setup 1

## 3.4. Operating Condition of EUT

Mode 1: Transmitting at 315MHz

## 3.5. Test voltage

Battery: DC12.0V (new battery)

## 3.6. Special Accessories

Not available for this EUT intended for grant.

Report No.: WT088001381 Page 6/24

# 3.7. Equipment Modifications

Not available for this EUT intended for grant.

## 3.8. Support Equipment List

Table 2 Support Equipment

Name	Model Number	S/N	Manufacture
		-	

## 3.9. Test Conditions

Date of test: Jul.07-10,2008

Date of EUT Receive: Jun.26,2008

Temperature: 22-23 °C Relative Humidity: 65-67%

# 4. TEST EQUIPMENT USED

Table 3 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB3436	EMI Test Receiver	Rohde & Schwarz	ESI26	Jan.24, 2008	1 Year
SB3440	Bilog Antenna	Chase	CBL6112B	Jan.24, 2008	1 Year
SB3435	Horn Antenna	Rohde & Schwarz	HF906	Jan.24, 2008	1 Year
SB3435/01	Amplifier(1-18GHz)	Rohde & Schwarz		Jan.24, 2008	1 Year
SB3450/01	3m Semi-anechoic	Albatross Projects	9X6X6	Jan.24, 2008	1 Year
	chamber				1 1 cai

Report No.: WT088001381 Page 7/24

## 5. CONDUCTED DISTURBANCE TEST

#### 5.1. Test Standard and Limit

#### 5.1.1.Test Standard

FCC Part 15 15.207

#### 5.1.2.Test Limit

Table 4 Conducted Disturbance Test Limit (Class B)

Fraguanay	Maximum R	F Line Voltage (dBμV)
Frequency	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 <b>*</b>	56 ~ 46 <b>*</b>
500kHz~5MHz	56	46
5MHz~30MHz	60	50

- Decreasing linearly with logarithm of the frequency
- The lower limit shall apply at the transition frequency.

#### **5.2. Test Procedure**

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions form both sides of AC line. According to the requirements in Section 7 and 13 of ANSI C63.4-2003.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

## 5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

#### 5.4. Test Data

The device is powered by battery, the test don't need.

Report No.: WT088001381 Page 8/24

# 6. RADIATED DISTURBANCE TEST

## 6.1. Test Standard and Limit

## 6.1.1.Test Standard

FCC Part 15 15.231, 15.209

6.1.2.Test Limit

Table 5 Radiated Disturbance Test Limit (15.209)

Tuble 5 Rudiated Distarburies Test Emilit (15:205)						
FREQUEN	CY	FIELD STRENGTHS	FIELD			
MHz		LIMITS	STRENGTHS			
		$(\mu V/m)$	LIMITS			
			$dB (\mu V/m)$			
Fundamen	tal	50000	94.0			
Harmonics		500	54.0			
30 ~	88	100	40.0			
88 ~	216	150	43.5			
216 ~	960	200	46.0			
960 ~		500	54.0			

<sup>\*</sup> The lower limit shall apply at the transition frequency.

Table 6 Radiated Disturbance Test Limit (15.231)

Fundamenta	al Fr	equency	Field Strength of	Field Strength
(M	(Hz)	1 ,	Fundamental	of Spurious
			$(\mu V/m)$	Emissions
				$(\mu V/m)$
40.66	~	40.70	2250	225
70	~	130	1250	125
130	~	174	1250 to 3750**	125 to 375**
174	~	260	3750	375
260		470	3750 to 12500**	375 to 1250**
Above 470			12500	1250

<sup>\*\*</sup> linear interpolations

Report No.: WT088001381 Page 9/24

<sup>\*</sup> The test distance is 3m.

#### 6.2. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2003.

Radiated test was performed on the frequency range from 30MHz to 25GHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz, VBW ≥RBW. All readings above 1 GHz are AV and PK values. RBW=1MHz and VBW=10Hz for AV value, RBW=1MHz and VBW≥RBW for peak value.

Measurements were made at 3 meters

## **6.3.** Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

#### 6.4. Test Data

Table 7 Radiated Disturbance Test Data

Model number: QH-969								
Mode:1								
Frequenc	Polarizati	Reading	Correctio	Antenna	Emission	Limits	Test	Note
y (MHz)	on	Value (dBµV)	n Factor (dB)	Factor (dB/m)	Level ( dBµV/m)	dB (μV/m)	voltage	
315.032	Н	55.0	2.9	14.0	71.9	75.6	DC12V	QP
476.112	Н	10.6	3.6	17.6	31.8	46.0	DC12V	QP
610.340	Н	11.4	4.3	19.1	34.8	46.0	DC12V	QP
945.911	Н	9.6	5.2	21.2	36.0	55.6	DC12V	QP
315.032	V	42.6	2.9	14.0	59.5	75.6	DC12V	QP
630.080	V	14.4	4.3	19.1	37.8	55.6	DC12V	QP

 $Note: 1.\ Emission\ level (dBuV/m) = Reading\ Value (dBuV) + Correction\ Factor (dB) + Antenna\ Factor\ (dB/m)$ 

- 2. Correction Factor(dB) = Cable Factor (dB)+Amplifier Factor(dB)
- 3. The other emission levels were less than the limit 20dB

Report No.: WT088001381 Page 10/24

## Radiated Disturbance


EUT: M/N:QH-969

Manufacturer

Operating Condition: ON

Test Site: SMQ EMC Lab
Test Specification: Horizontal & Vertical

Comment:

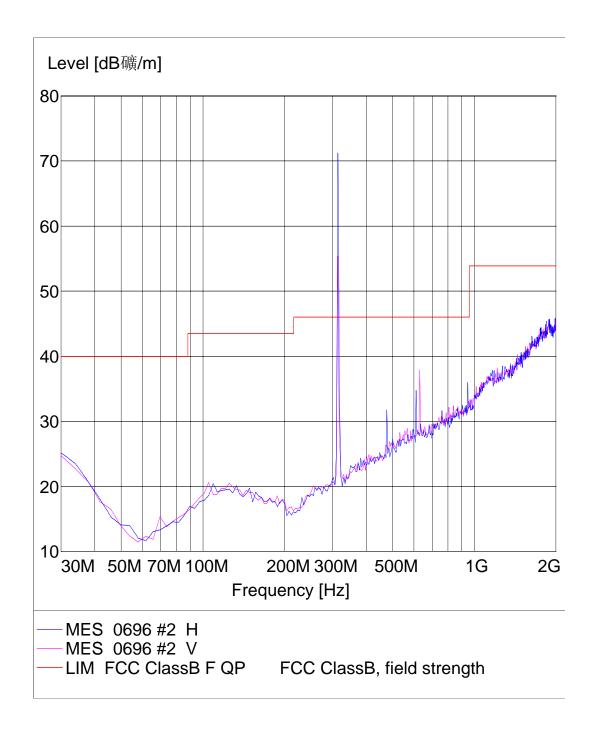

Report No.: WT088001381 Page 11/24


## Radiated Disturbance

EUT: M/N:QH-969

Operate Condition: ON

Test Site: SMQ EMC Lab Test Specification: Vertical & Vertical

Comment:

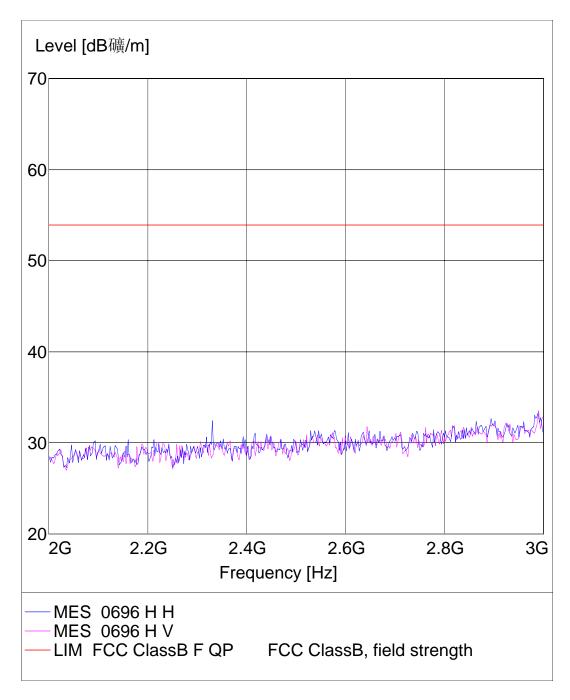

Report No.: WT088001381 Page 12/24

Table 8 Restricted Band Radiated Emission Data

MHz	MHz	MHz	GHz
0.090 - 0.110 0.495 - 0.505 2.1735 - 2.1905 4.125 - 4.128 4.17725 - 4.17775 4.20725 - 4.20775 6.215 - 6.218 6.26775 - 6.26825 6.31175 - 6.31225 8.291 - 8.294 8.362 - 8.366 8.37625 - 8.38675 8.41425 - 8.41475 12.29 - 12.293 12.51975 - 12.52025 12.57675 - 12.57725 13.36 - 13.41	16.42 - 16.423 16.69475 - 16.69525 16.80425 - 16.80475 25.5 - 25.67 37.5 - 38.25 73 - 74.6 74.8 - 75.2 108 - 121.94 123 - 138 149.9 - 150.05 156.52475 - 156.52525 156.7 - 156.9 162.0125 - 167.17 167.72 - 173.2 240 - 285 322 - 335.4	399.9 - 410 608 - 614 960 - 1240 1300 - 1427 1435 - 1626.5 1645.5 - 1646.5 1660 - 1710 1718.8 - 1722.2 2200 - 2300 2310 - 2390 2483.5 - 2500 2655 - 2900 3260 - 3267 3332 - 3339 3345.8 - 3358 3600 - 4400	4.5 - 5.15 5.35 - 5.46 7.25 - 7.75 8.025 - 8.5 9.0 - 9.2 9.3 - 9.5

All the emissions of the above band are 20dB less than the limit.

Report No.: WT088001381 Page 13/24

## 7. OCCUPIED BANDWIDTH

#### 7.1. Test Standard and Limit

#### 7.1.1.Test Standard

FCC Part 15 15.231

#### 7.1.2.Test Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz

#### 7.2. Test Procedure

- 1. Set EUT as normal operation
- 2. Set EMI test receiver (ESIB26) Center Frequency = fundamental frequency,
- 3. RBW≥1% bandwidth, VBW≥RBW.
- 4. Set EMI test receiver (ESIB26) to maxhold mode, mark the points 20dB down from the modulated carrier

## 7.3. Test Arrangement


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

#### 7.4. Test Data

20dB bandwidth is 48.0kHz

Limt=315\*0.25%=787kHz

Report No.: WT088001381 Page 14/24

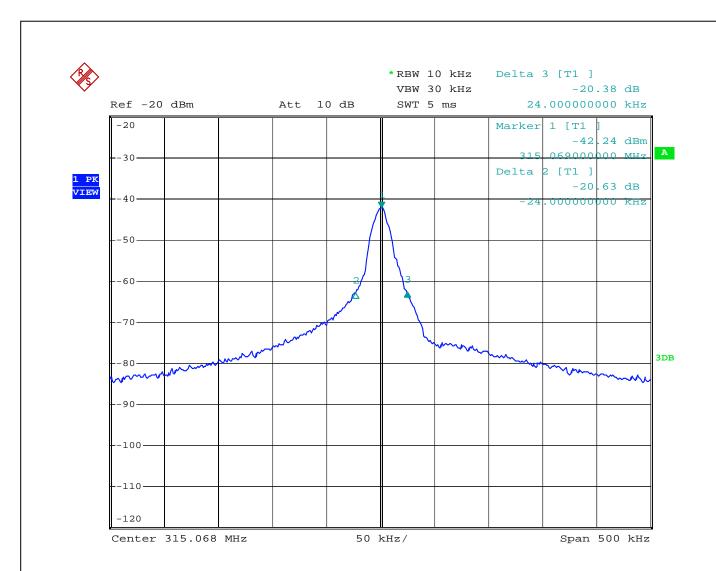

Date: 27.SEP.2008 03:51:26

Report No.: WT088001381 Page 15/24

## 8. DEACTIVATION TIME

#### 8.1. Test Standard and Limit

## 8.1.1.Test Standard

FCC Part 15 15.231

#### 8.1.2.Test Limit

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

#### 8.2. Test Procedure

- 1. Set EUT as normal operation
- 2. Set EMI test receiver (ESIB26) Center Frequency to fundamental frequency, span to zero
- 3. Set EMI test receiver (ESIB26) sweep time =5second or less.
- 4. Set EMI test receiver (ESIB26) Max hold.
- 5. Record the time EUT start transmitting and stop transmitting.


## 8.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

#### 8.4. Test Data

EUT is a manually operated transmitter, the deactivation time is 14ms.

Report No.: WT088001381 Page 16/24

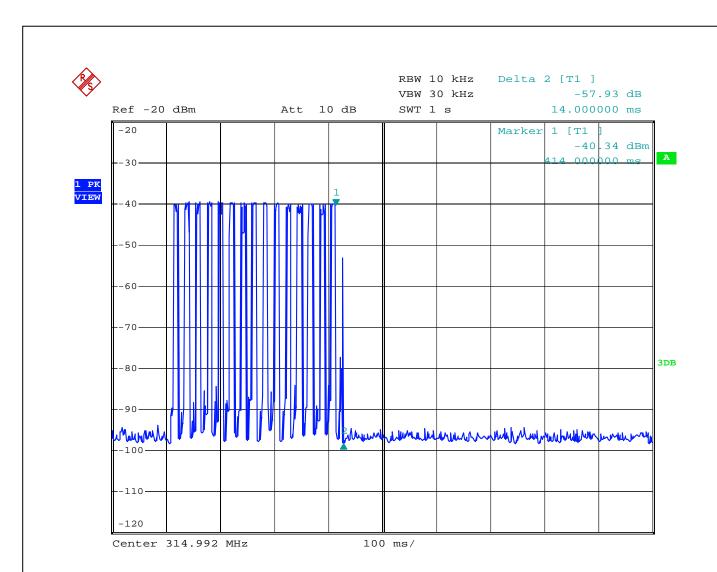

Date: 27.SEP.2008 03:34:46

Report No.: WT088001381 Page 17/24

# 9. ANTENNA REQUIREMENT

#### 9.1. STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

## 9.2. ANTENNA CONNECTED CONSTRUCTION


The EUT has a built in antenna which is integrated on the PCB, this is permanently attached antenna and meets the requirements of this section.

Report No.: WT088001381 Page 18/24


APPENDIX I TEST SETUP PHOTOS	

Report No.: WT088001381 Page 19/24

# **Photo 1 Radiated Emission Test**

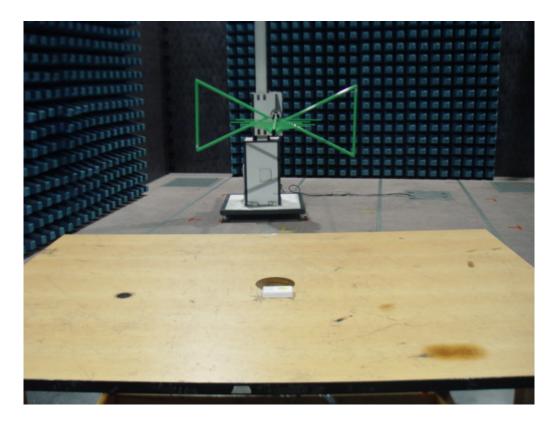

Report No.: WT088001381 Page 20/24

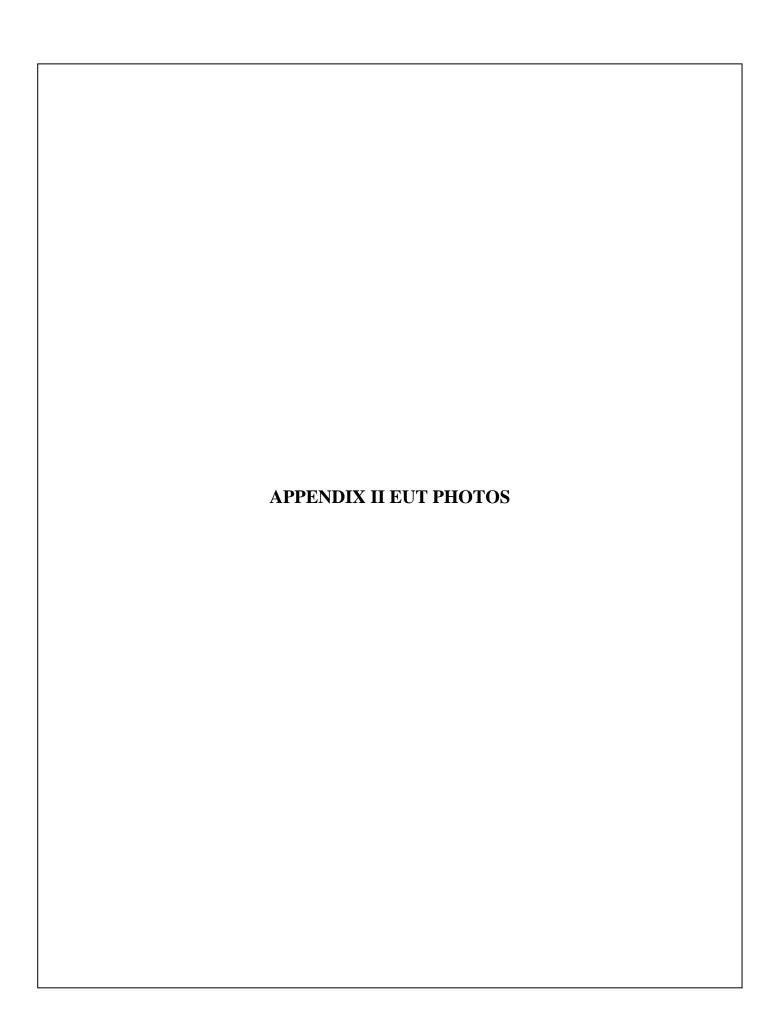

**Photo 1 Appearance of EUT** 




**Photo 2 Appearance of EUT** 




Report No.: WT088001381 Page 22/24

**Photo 3 Inside of EUT** 

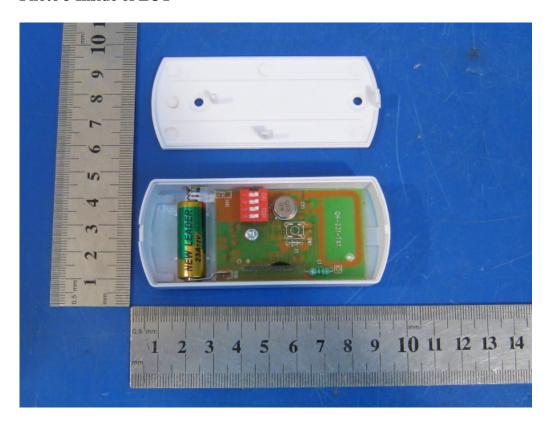


**Photo 4 Inside of EUT** 

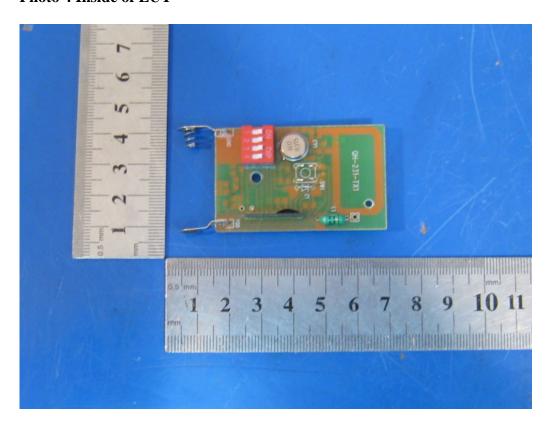

Report No.: WT088001381 Page 23/24

# **Photo 5 Inside of EUT**

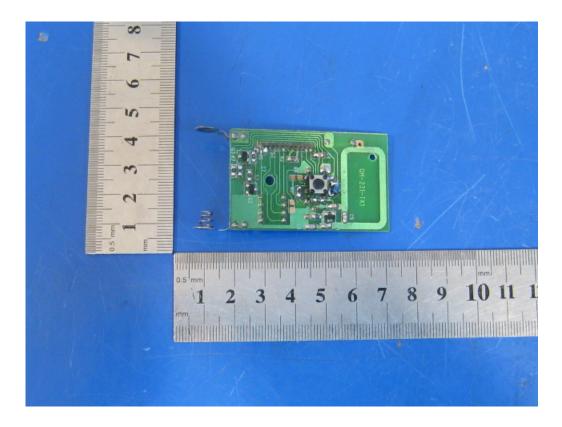

Report No.: WT088001381 Page 24/24