



TEST REPORT

APPLICANT : Winners'Sun Plastic & Electronic (Shenzhen) Co., Ltd.

PRODUCT NAME : Magnetic SE (Button Version)

MODEL NAME : WS-22001-11

BRAND NAME : N/A

FCC ID : UR9WS-22001-11

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2025-08-04

TEST DATE : 2025-08-06 to 2025-08-19

ISSUE DATE : 2025-08-21

Edited by:

Peng Mi

Peng Mi (Rapporteur)

Approved by:

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	4
1.2. Test Equipment List	5
1.3. Measurement Uncertainty	7
1.4. Testing Laboratory	7
2. General Description	8
2.1. Information of Applicant and Manufacturer	8
2.2. Information of EUT	8
2.3. Channel List of EUT	9
2.4. Test Configuration of EUT	10
2.5. Test Conditions	10
2.6. Test Setup Layout Diagram	10
3. Test Results	13
3.1. Antenna Requirement	13
3.2. Duty Cycle of Test Signal	14
3.3. Maximum Peak Conducted Output Power	15
3.4. Maximum Average Conducted Output Power	16
3.5. 6 dB Bandwidth	17
3.6. Conducted Spurious Emissions and Band Edge	18
3.7. Power Spectral Density	19
3.8. Conducted Emission	20
3.9. Restricted Frequency Bands	21
3.10. Radiated Emission	22
Annex A Test Data and Result	24



Change History		
Version	Date	Reason for change
1.0	2025-08-21	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	/
2	N/A	Duty Cycle of Test Signal	Aug. 06, 2025	Lin Haoyang	PASS	/
3	15.247(b)	Maximum Peak Conducted Output Power	Aug. 06, 2025	Lin Haoyang	PASS	/
4	15.247(b)	Maximum Average Conducted Output Power	Aug. 06, 2025	Lin Haoyang	PASS	/
5	15.247(a)	Bandwidth	Aug. 06, 2025	Lin Haoyang	PASS	/
6	15.247(d)	Conducted Spurious Emission and Band Edge	Aug. 06, 2025	Lin Haoyang	PASS	/
7	15.247(e)	Power Spectral Density	Aug. 06, 2025	Lin Haoyang	PASS	/
8	15.207	Conducted Emission	N/A	N/A	N/A _{Note1}	N/A
9	15.247(d)	Restricted Frequency Bands	Aug. 18, 2025	Gao Jianrou	PASS	/
10	15.209, 15.247(d)	Radiated Emission	Aug. 18, 2025	Gao Jianrou	PASS	/

Note 1: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2020 and KDB 558074 D01 v05r02.

Note 3: Any additions, deviation, or exclusions from the method shall be noted in the "Remark".

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2025.01.15	2026.01.14
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
JS32-RE	Tonscend	5.0.0

1.2.3 Radiated Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2025.05.13	2026.05.12
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2025.06.22	2026.06.21
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2025.05.16	2026.05.15
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2025.06.20	2026.06.19
Test Antenna - Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2025.06.20	2026.06.19
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2025.05.13	2026.05.12



REPORT No.: SZ25080029W01

RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2024.09.11	2025.09.10
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2024.09.11	2025.09.10
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2024.09.11	2025.09.10
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.06.21	2028.06.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.11.30	2025.11.29

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
FCC Designation Number:	CN1192
FCC Test Firm Registration Number:	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant:	Winners'Sun Plastic & Electronic (Shenzhen) Co., Ltd.
Applicant Address:	Detai Industrial Park, 496 Huarong Road, Langkou Community, Dalang Sub-district, Longhua District, Shenzhen, Guangdong, China
Manufacturer:	Winners'Sun Plastic & Electronic (Shenzhen) Co., Ltd.
Manufacturer Address:	Detai Industrial Park, 496 Huarong Road, Langkou Community, Dalang Sub-district, Longhua District, Shenzhen, Guangdong, China

2.2. Information of EUT

Product Name:	Magnetic SE (Button Version)	
Sample No.:	2#, 3#	
Hardware Version:	V1	
Software Version:	V1.0	
Equipment Type:	Bluetooth LE	
Bluetooth Version:	5.0	
Modulation Type:	GFSK	
Data Rate:	1Mbps	
Operating Frequency Range:	2402MHz-2480MHz	
Antenna Type:	PCB Antenna	
Antenna Gain:	2.3dBi	
Accessory Information:	Battery	
	Brand Name:	Doyen
	Model No.:	CR1632
	Serial No.:	N/A
	Capacity:	120mAh
	Rated Voltage:	3V
	Charge Limit:	N/A
	Manufacturer:	SHENZHEN LIDEA BATTERY CO., LTD.

Note 1: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or



manufacturer.

2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions


Temperature (°C):	15–35
Relative Humidity (%):	30–60
Atmospheric Pressure (kPa):	86–106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

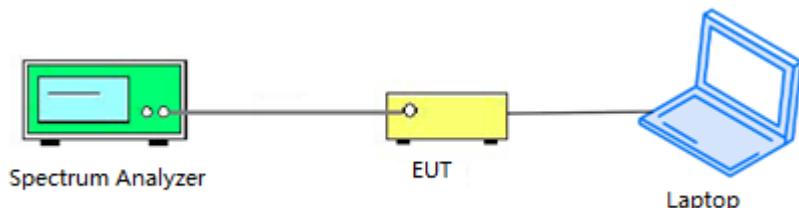


2.6.2. Conducted Emission Measurement

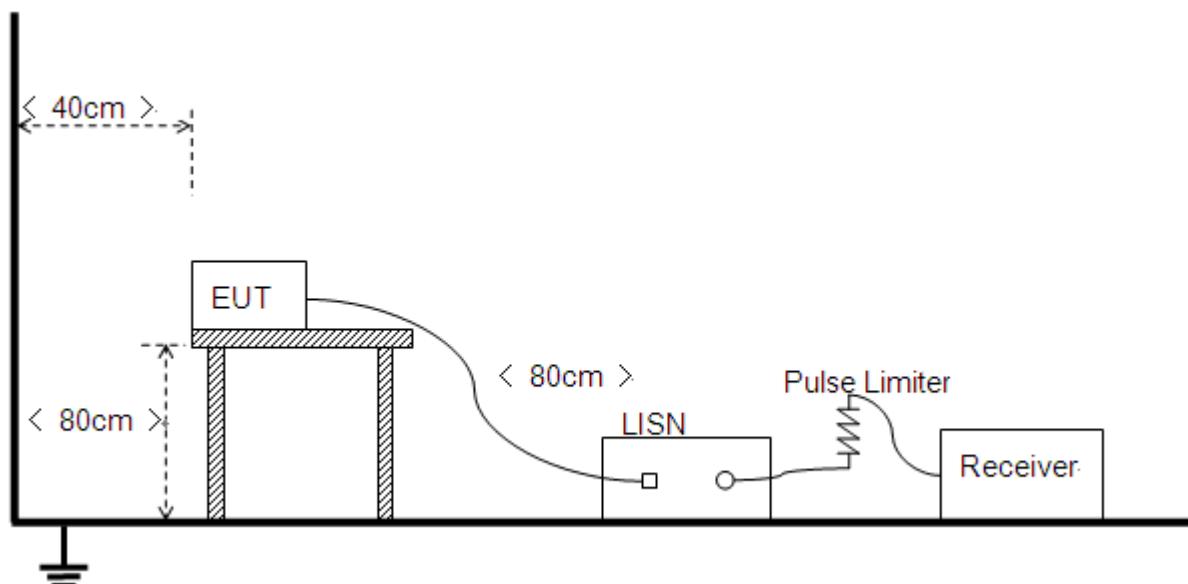


2.6.3.Radiation Measurement


- 1) For radiated emissions from 9kHz to 30MHz

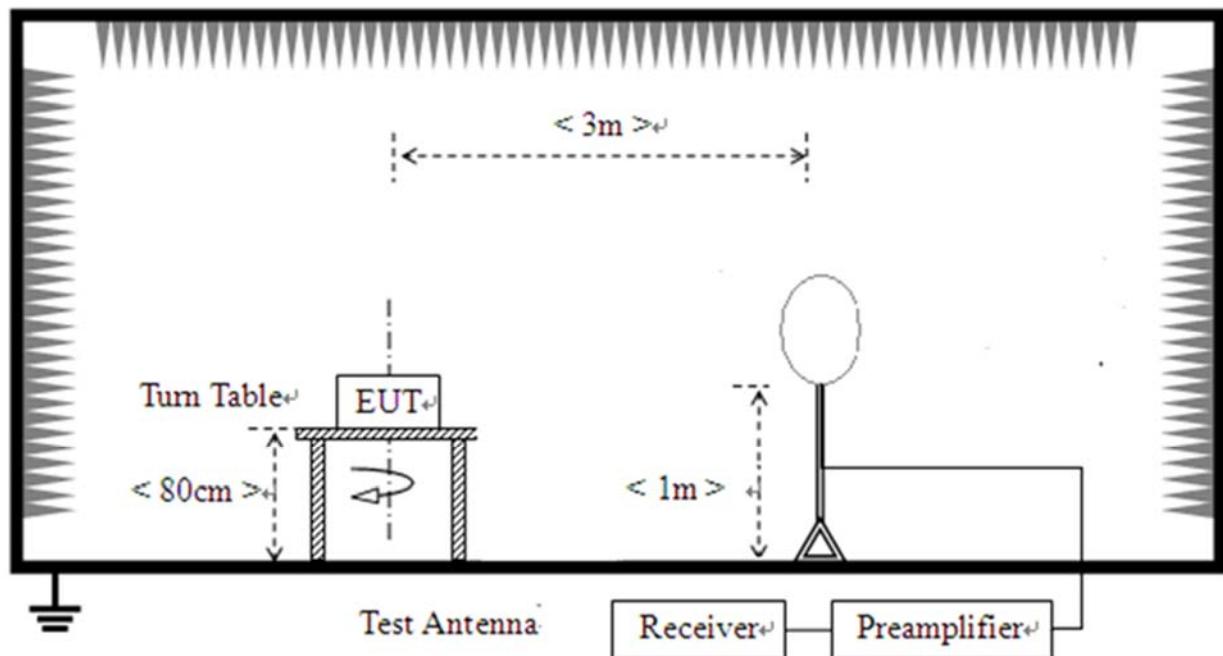

- 2) For radiated emissions from 30MHz to1GHz

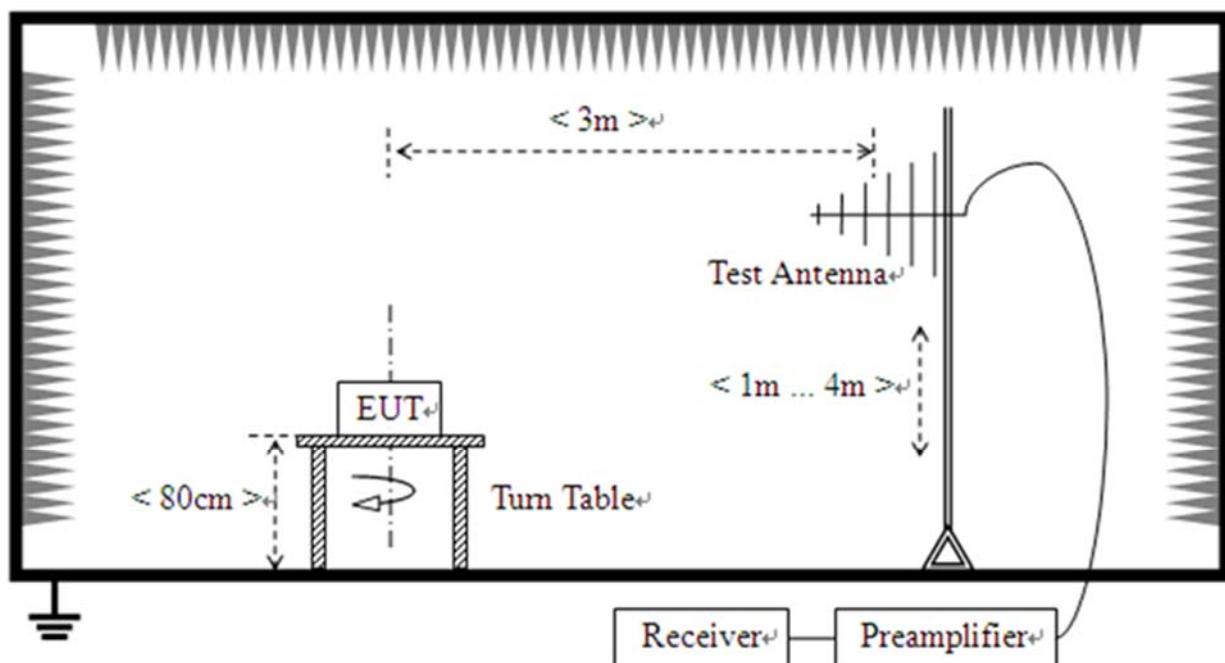

3) For radiated emissions above 1GHz

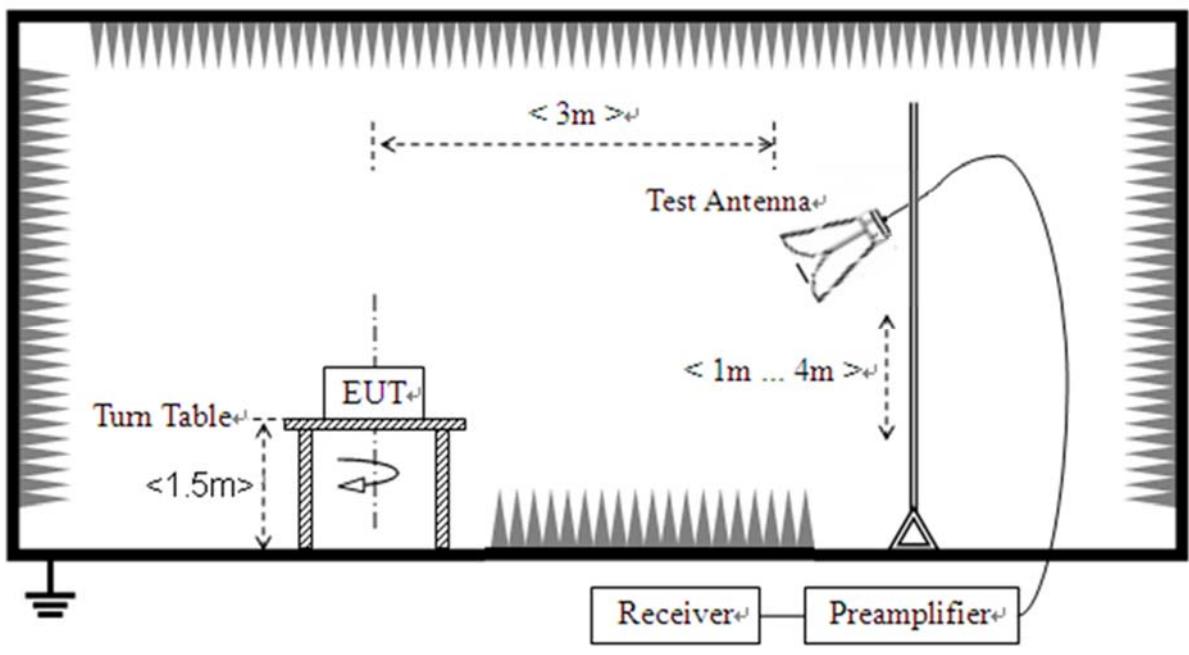



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
<input checked="" type="checkbox"/> Internal	<input type="checkbox"/> FPC Antenna	<input type="checkbox"/> I-PEX Connector
<input type="checkbox"/> External	<input type="checkbox"/> Spring Antenna <input type="checkbox"/> Ceramic Antenna <input type="checkbox"/> Integrated Antenna <input type="checkbox"/> Dipole Antenna <input checked="" type="checkbox"/> PCB Antenna <input type="checkbox"/> PIFA Antenna <input type="checkbox"/> On-board Antenna	<input type="checkbox"/> SMA Connector <input type="checkbox"/> RP-SMA Connector <input type="checkbox"/> Metal Shrapnel <input checked="" type="checkbox"/> Layout



3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4. Maximum Average Conducted Output Power

3.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4. Test Result

Refer to Annex A.3 in this report.



3.5.6 dB Bandwidth

3.5.1. Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1. Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to 100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW \geq 3 \times RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.

3.5.2. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3. Test Result

Refer to Annex A.4 in this report.



3.6. Conducted Spurious Emissions and Band Edge

3.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.7. Power Spectral Density

3.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4. Test Result

Refer to Annex A.7 in this report.



3.8. Conducted Emission

3.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2020.

3.8.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4. Test Result

This test case does not apply this kind of EUT.



3.9. Restricted Frequency Bands

3.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.8 in this report.



3.10. Radiated Emission

3.10.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.10.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission.

Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4. Test Result


Refer to Annex A.9 in this report.



Annex A Test Data and Result


A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	61.04	2.14	2.62
NVNT	BLE 1M	2440	Ant1	61.04	2.14	2.62
NVNT	BLE 1M	2480	Ant1	61.12	2.14	2.62

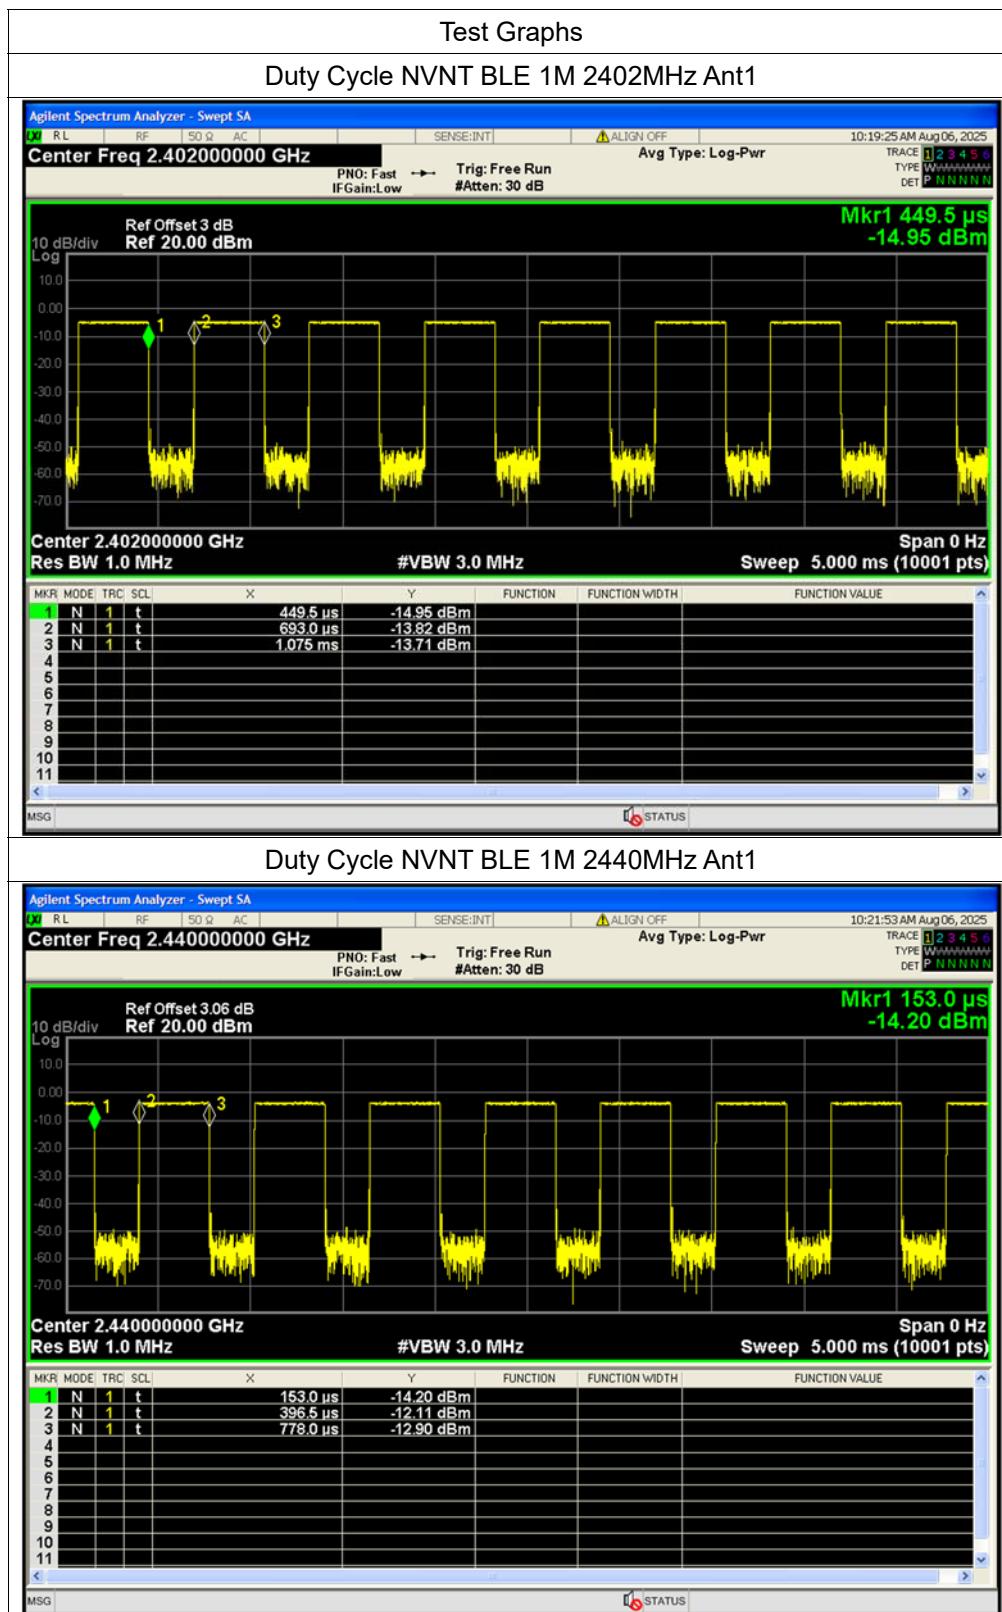



REPORT No.: SZ25080029W01

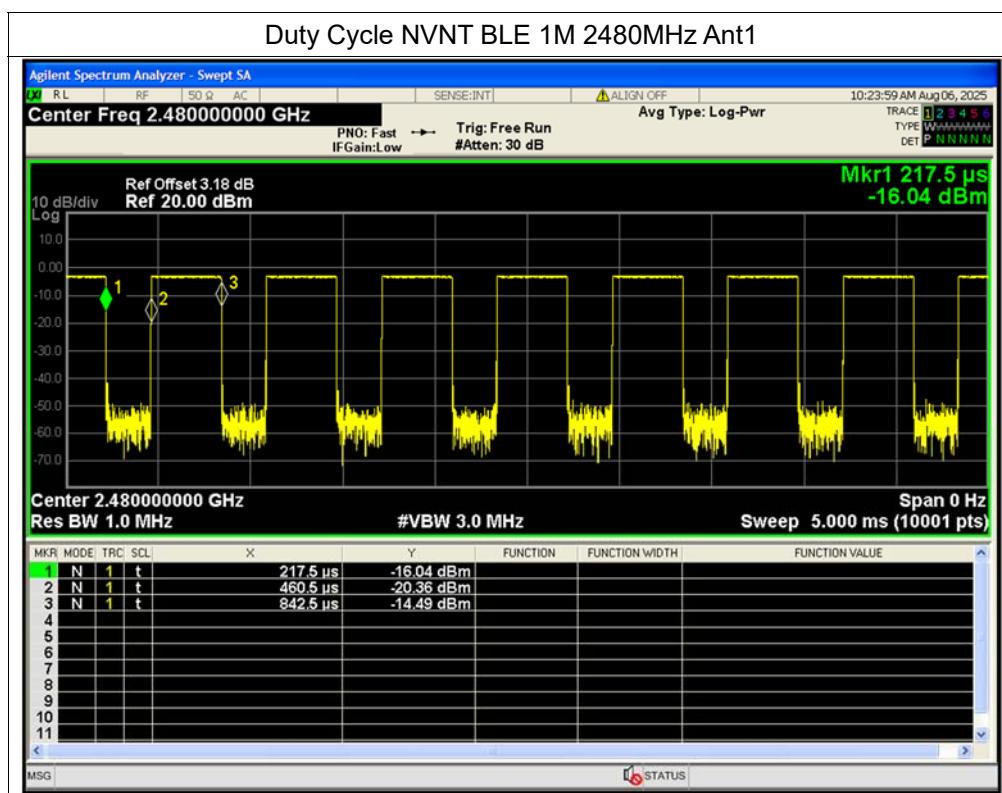


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555
Fax: 86-755-36698525
Http://www.morlab.cn
E-mail: service@morlab.cn


**A.2. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-3.92	0	-3.92	0.00041	30	Pass
NVNT	BLE 1M	2440	Ant1	-2.84	0	-2.84	0.00052	30	Pass
NVNT	BLE 1M	2480	Ant1	-2.24	0	-2.24	0.0006	30	Pass

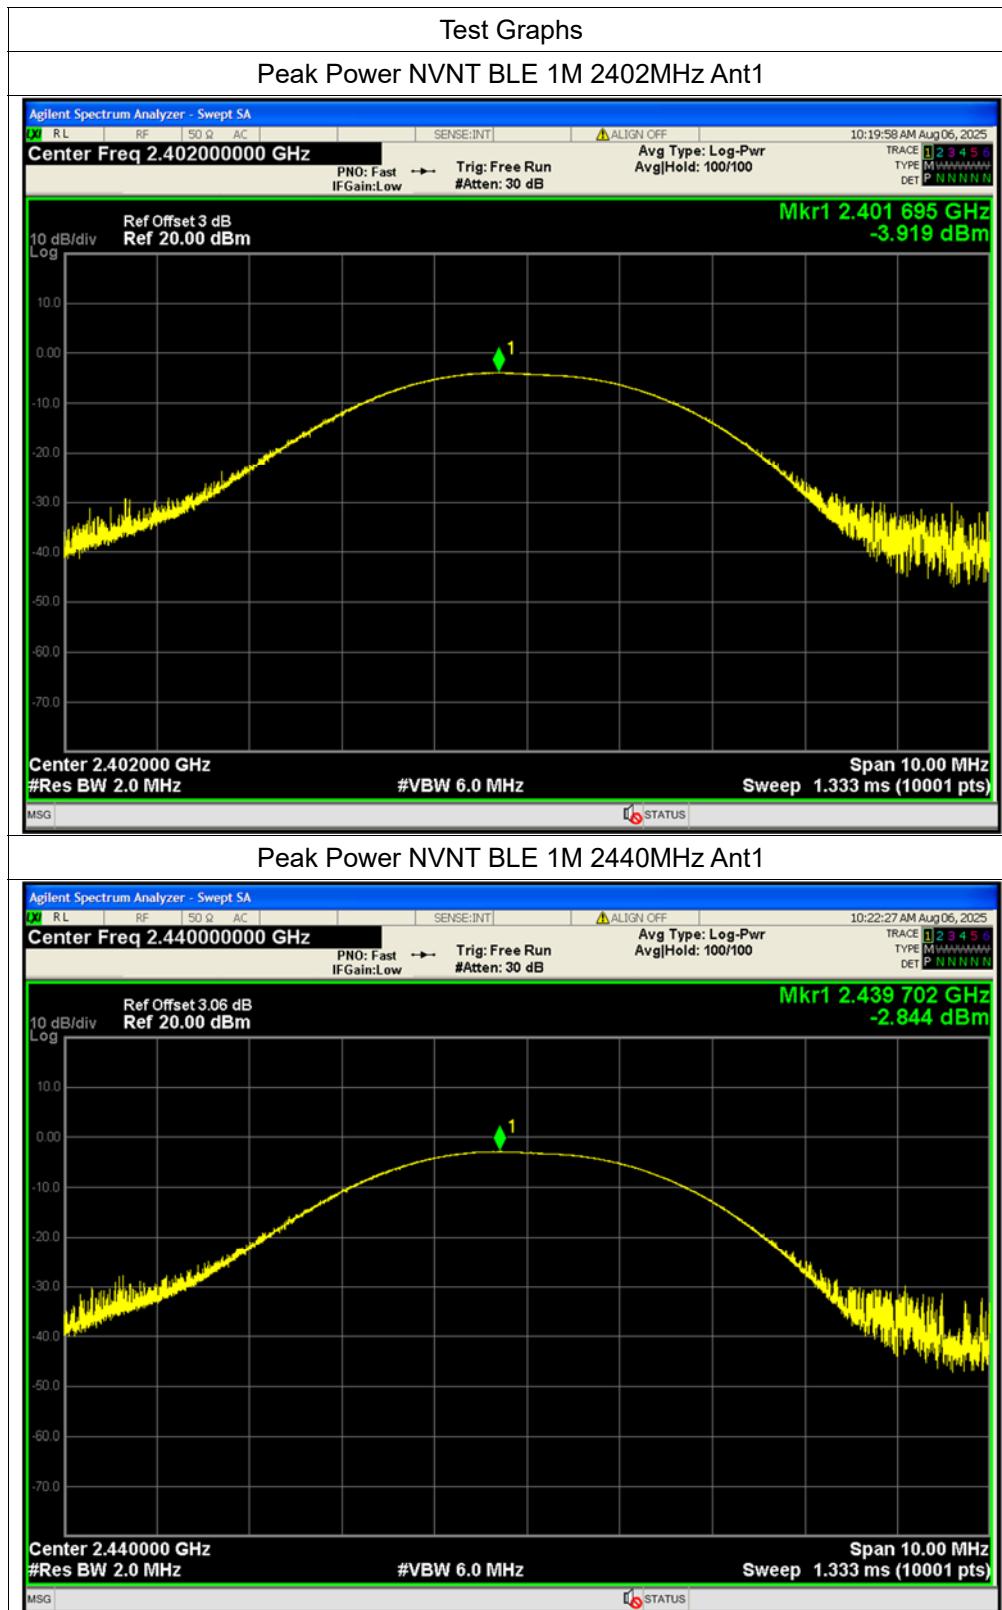



REPORT No.: SZ25080029W01

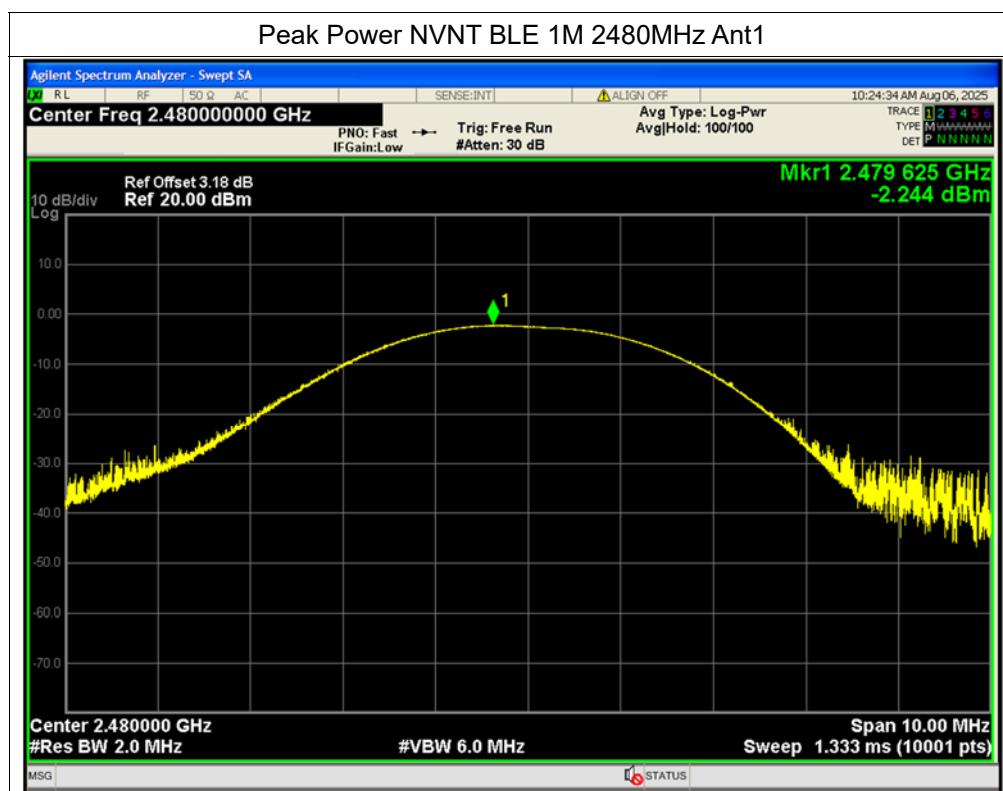


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn


**A.3. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-6.82	2.14	-4.68	0.00034	30	Pass
NVNT	BLE 1M	2440	Ant1	-5.58	2.14	-3.44	0.00045	30	Pass
NVNT	BLE 1M	2480	Ant1	-5.05	2.14	-2.91	0.00051	30	Pass

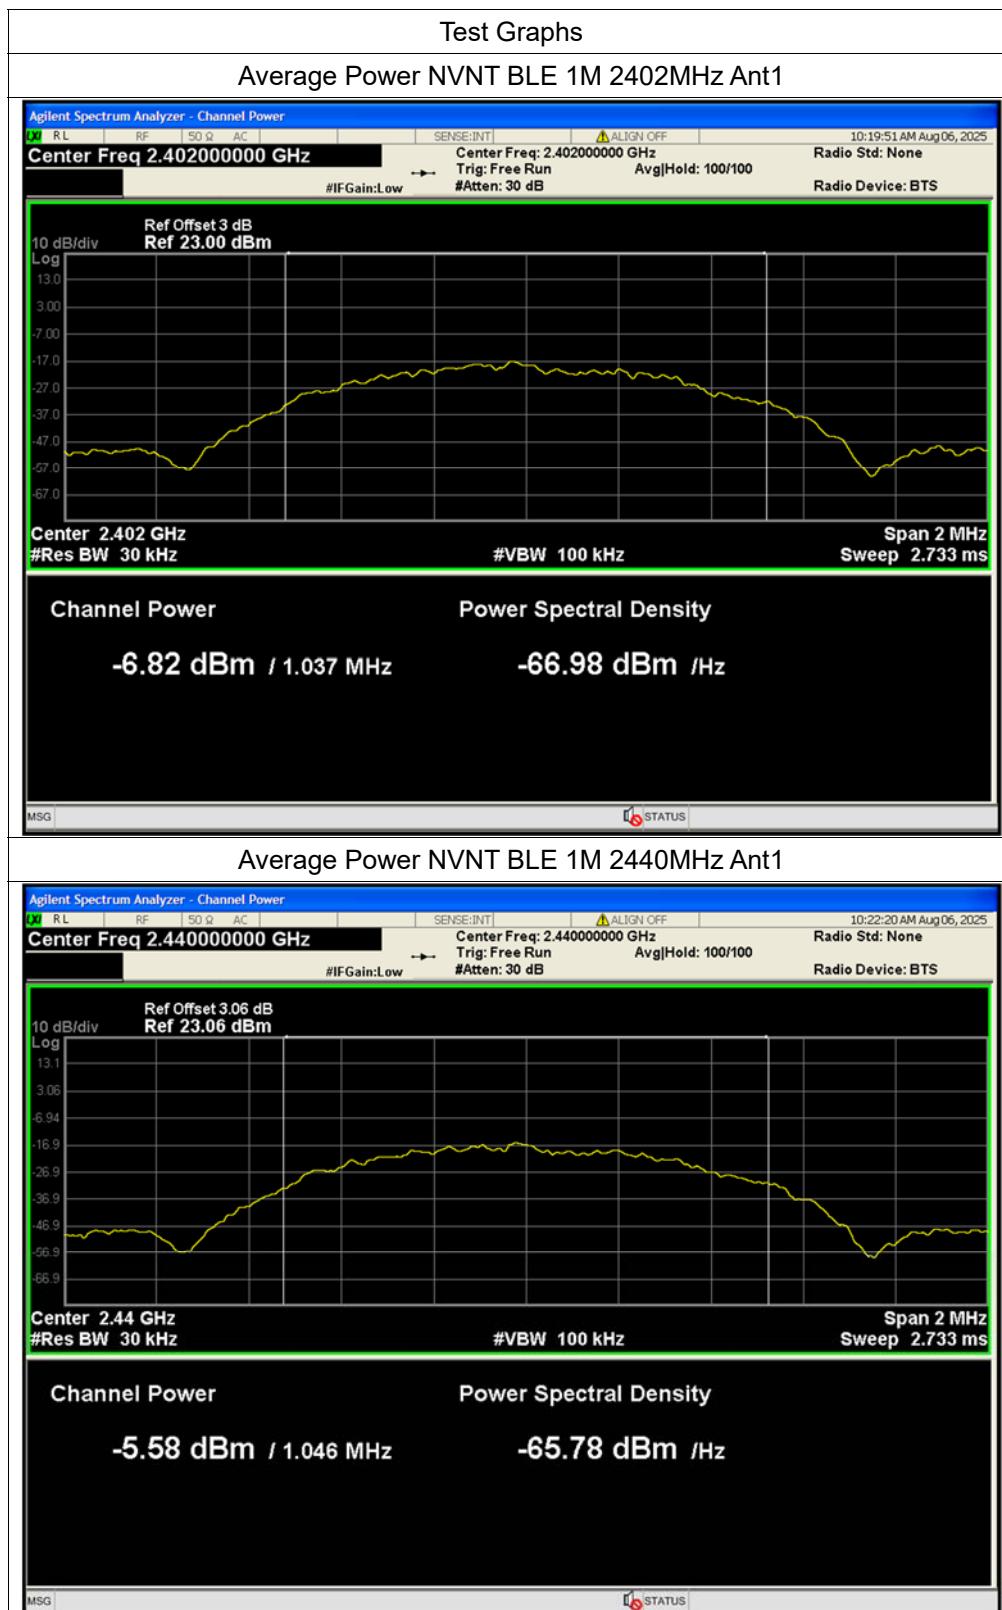



REPORT No.: SZ25080029W01

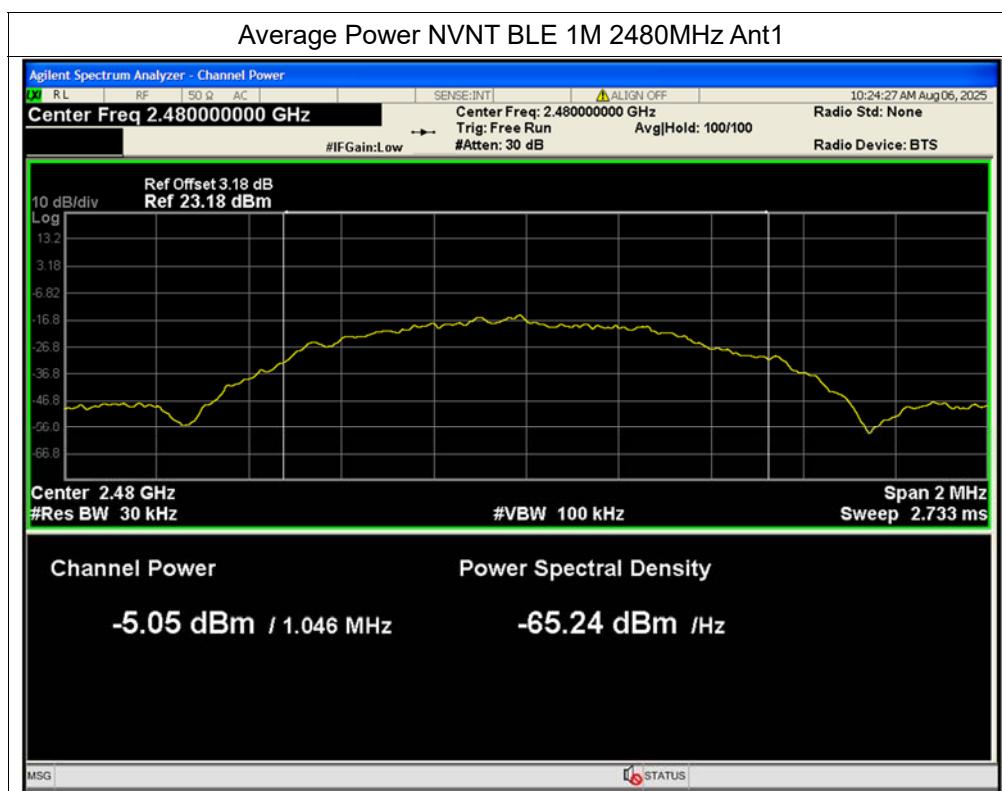

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555
Fax: 86-755-36698525
Http://www.morlab.cn
E-mail: service@morlab.cn


**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.6918	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.6855	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.6934	0.5	Pass





REPORT No.: SZ25080029W01

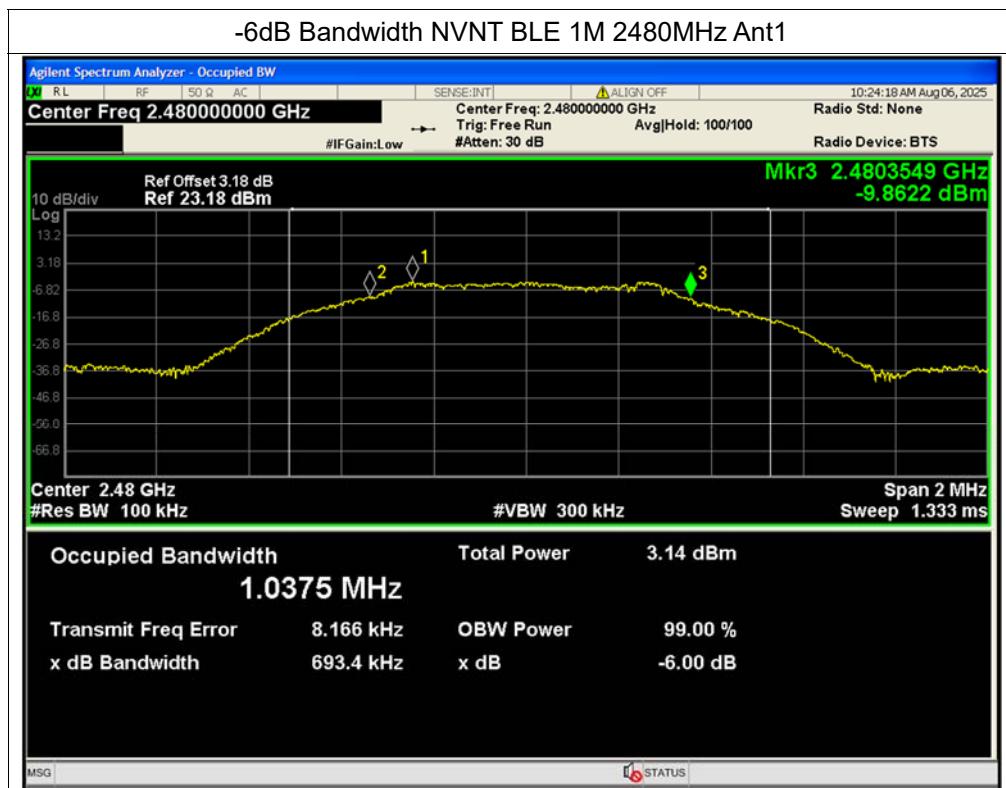

MORLAB


Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn




A.5. Conducted Spurious Emissions

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-34.27	-20	Pass
NVNT	BLE 1M	2440	Ant1	-35.16	-20	Pass
NVNT	BLE 1M	2480	Ant1	-33.55	-20	Pass

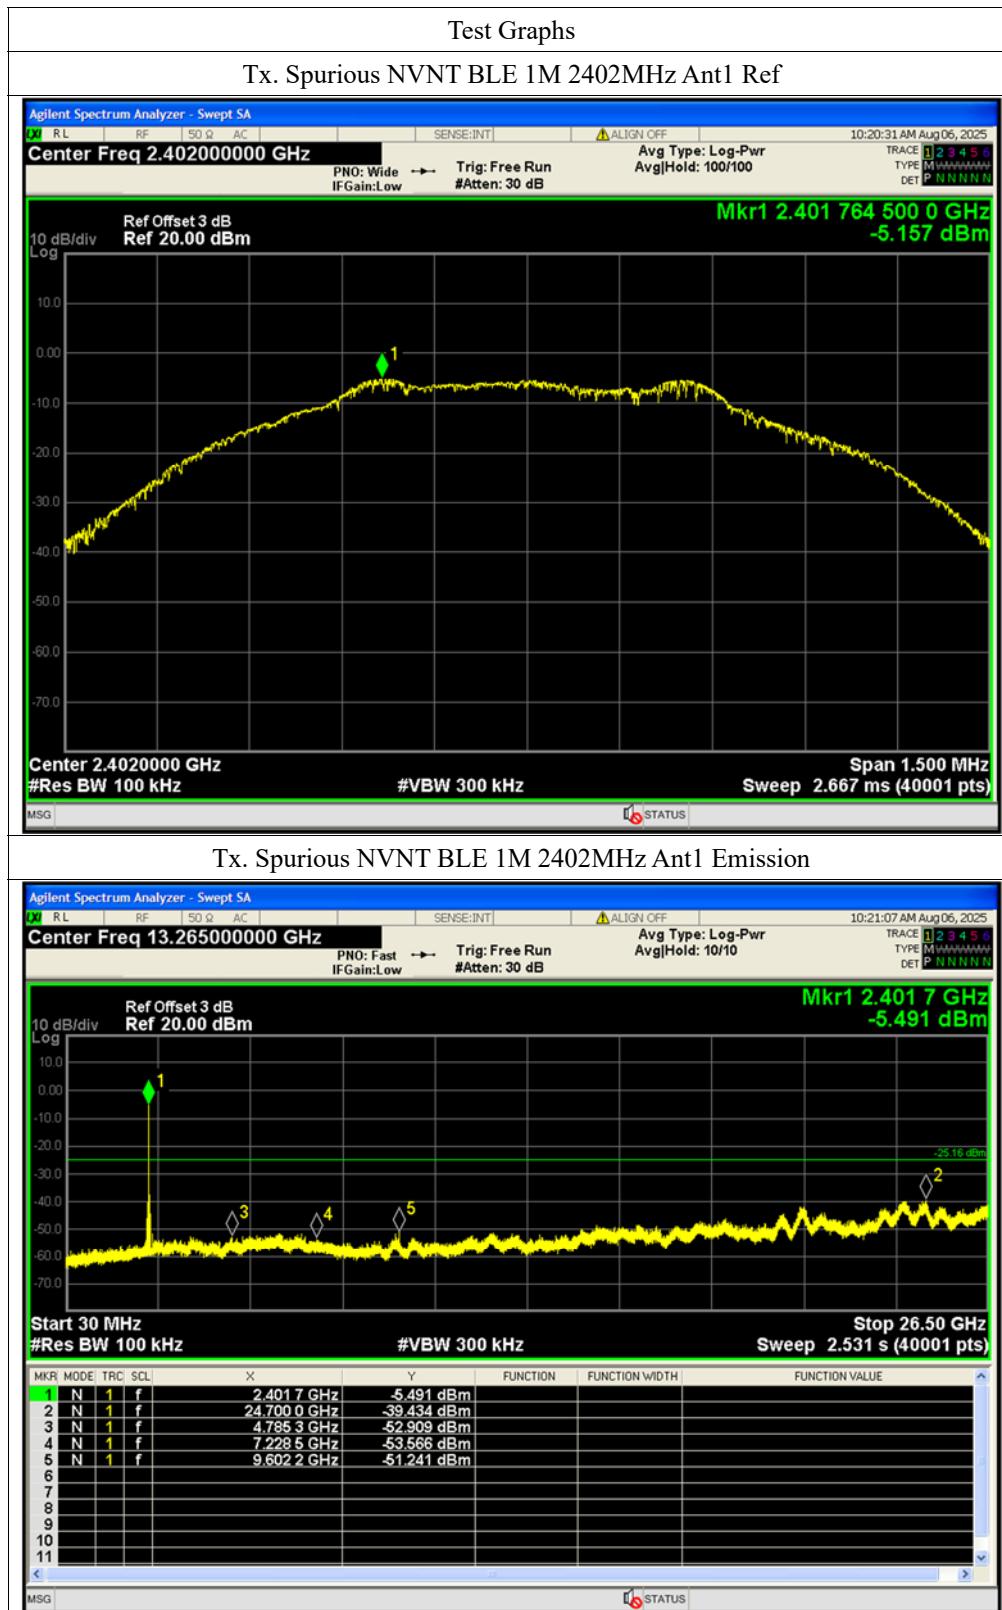




REPORT No.: SZ25080029W01

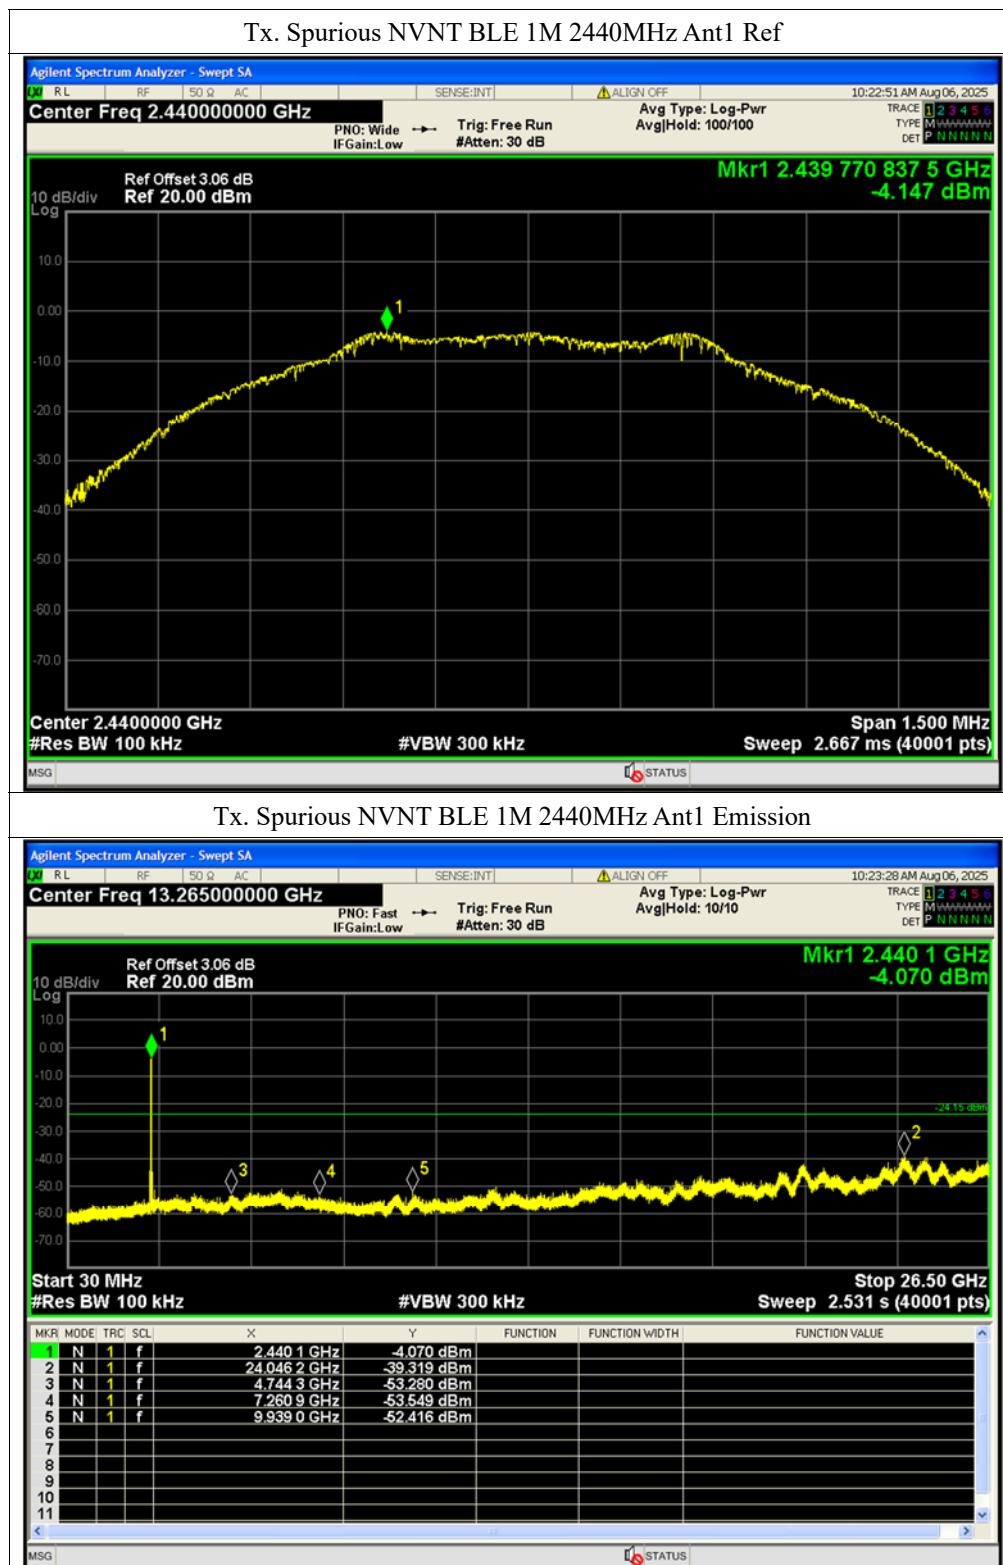

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL-1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn

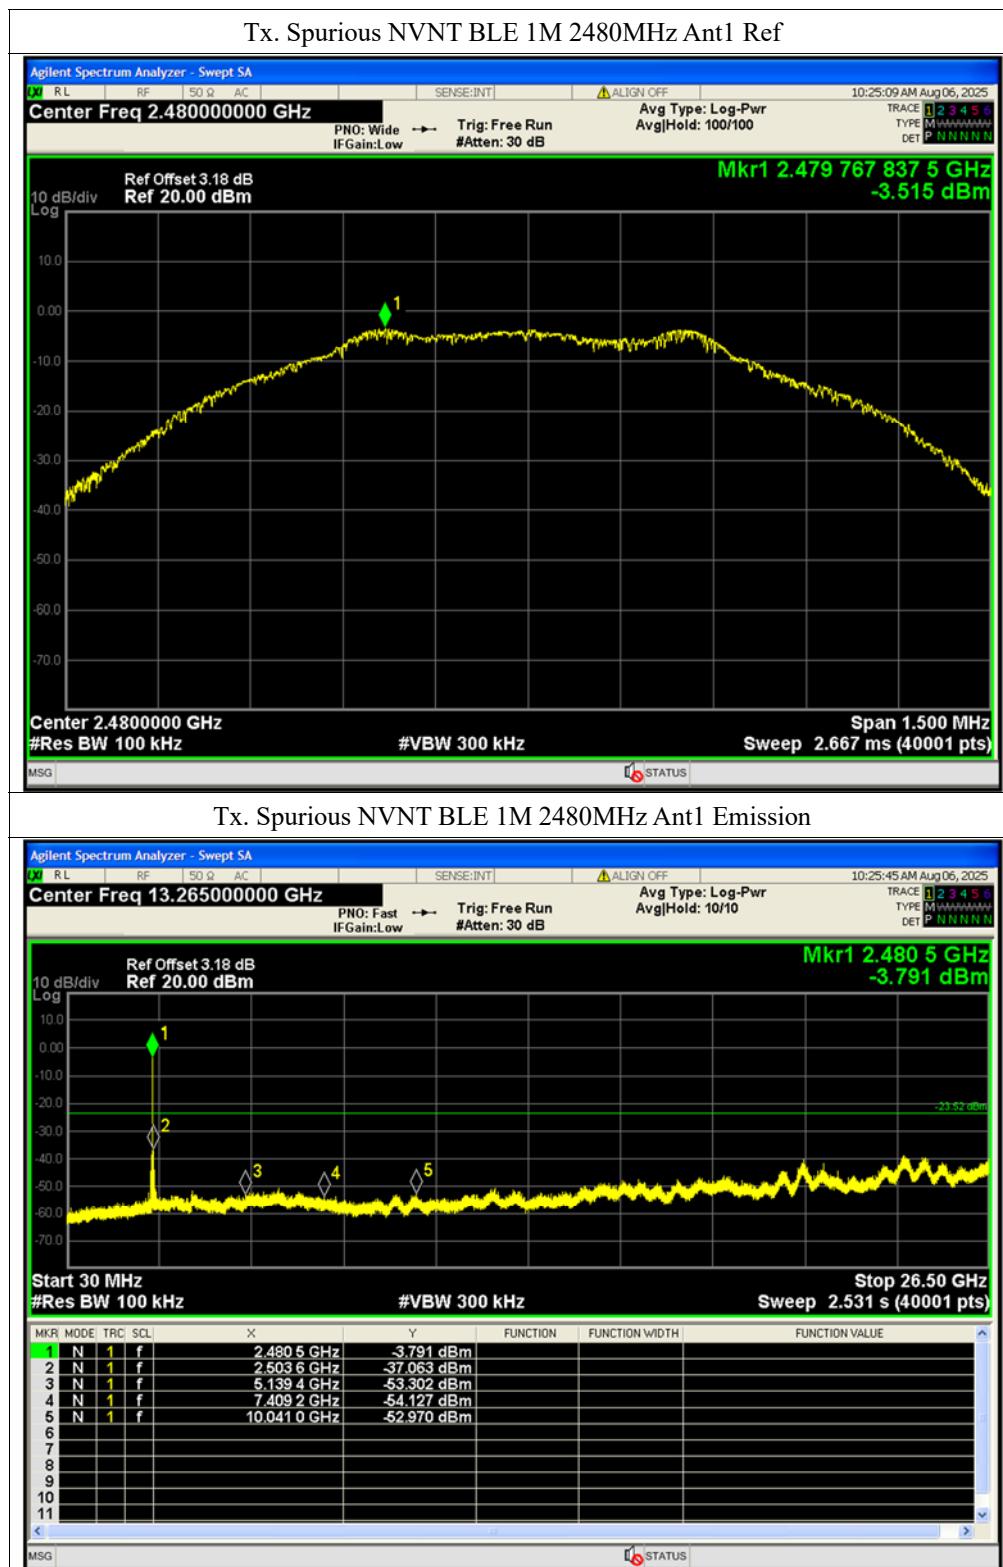



REPORT No.: SZ25080029W01


A.6. Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-30.78	-20	Pass
NVNT	BLE 1M	2480	Ant1	-40.91	-20	Pass

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn

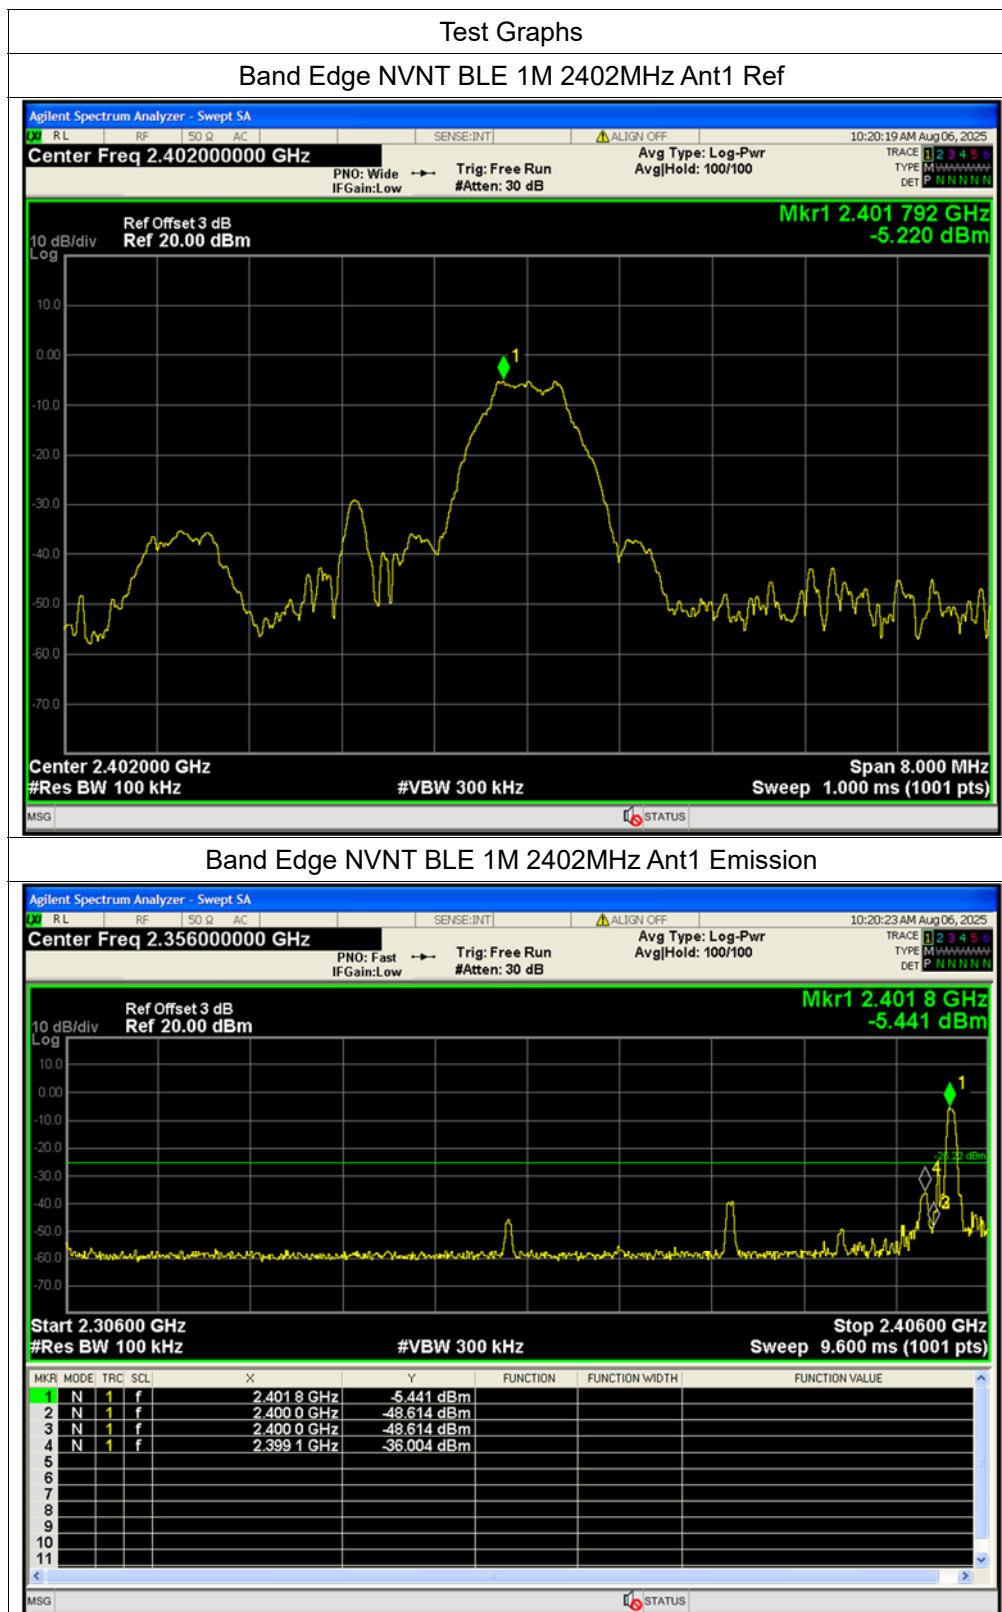


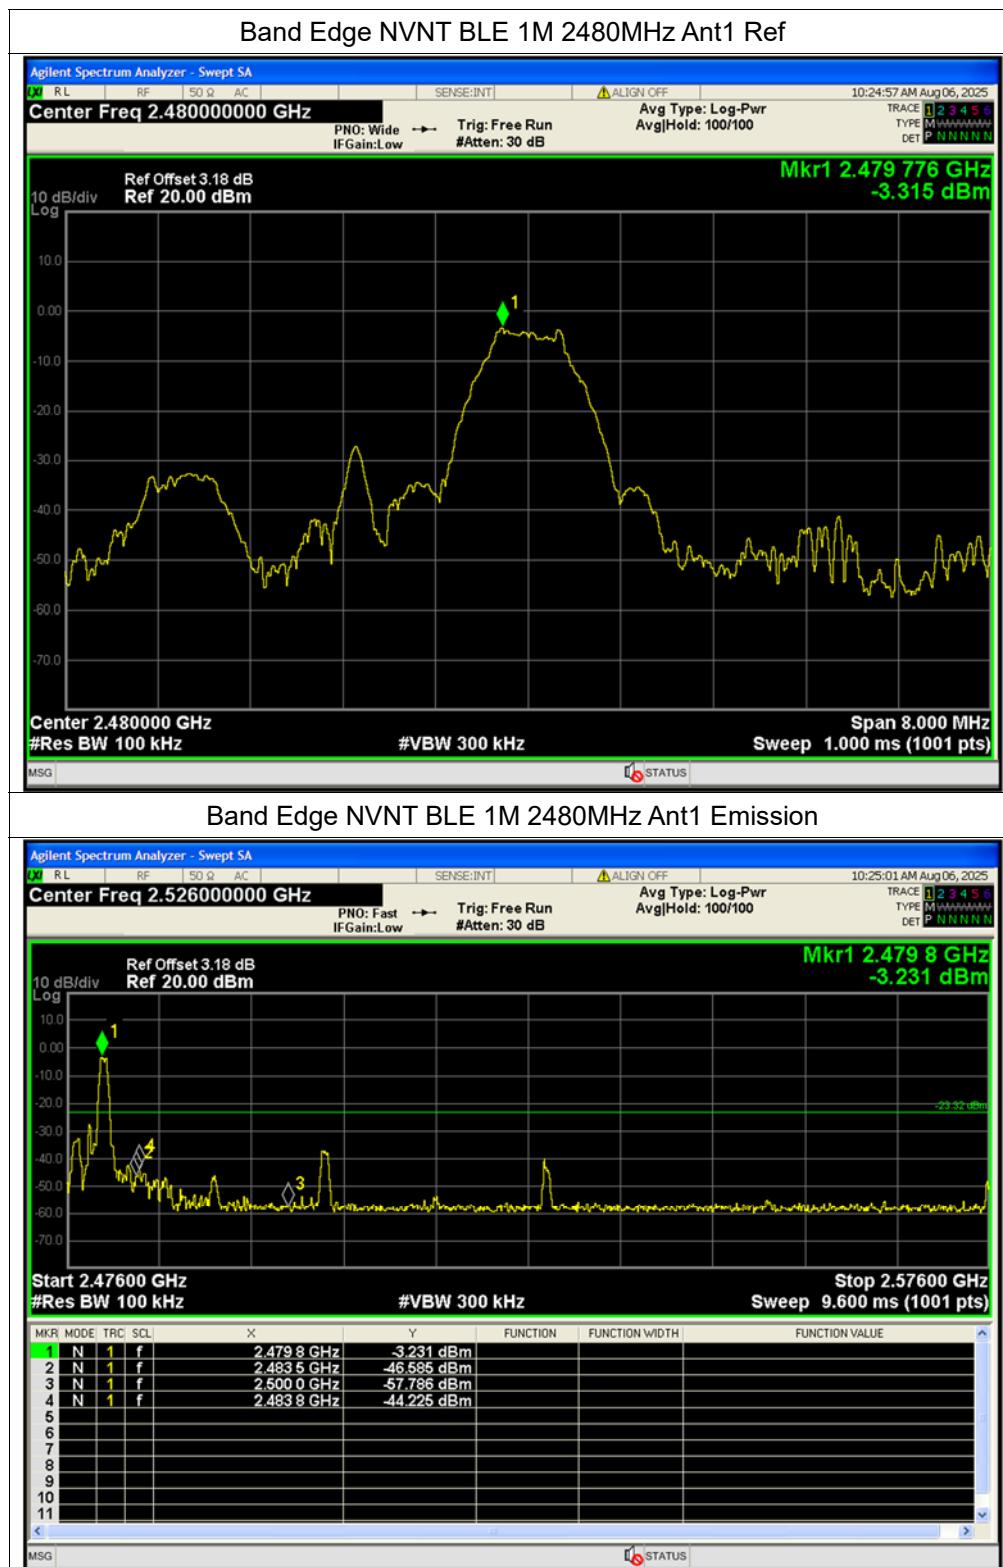




A.7. Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-19.54	0	-19.54	8	Pass
NVNT	BLE 1M	2440	Ant1	-18.49	0	-18.49	8	Pass
NVNT	BLE 1M	2480	Ant1	-17.8	0	-17.8	8	Pass

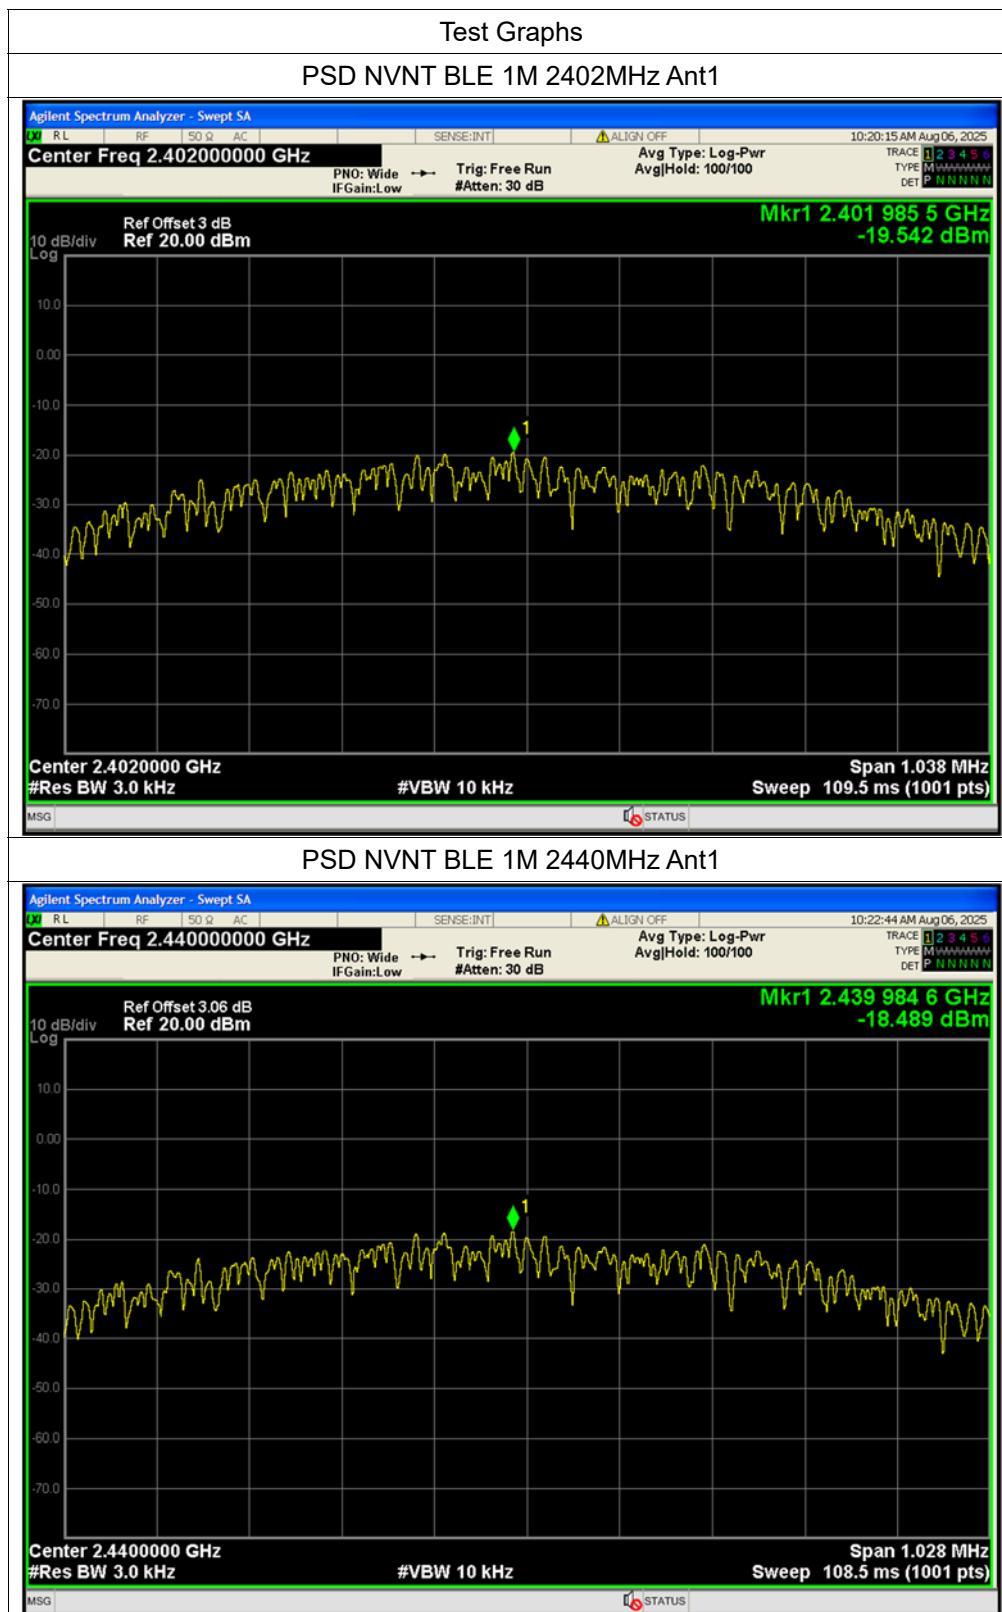



REPORT No.: SZ25080029W01

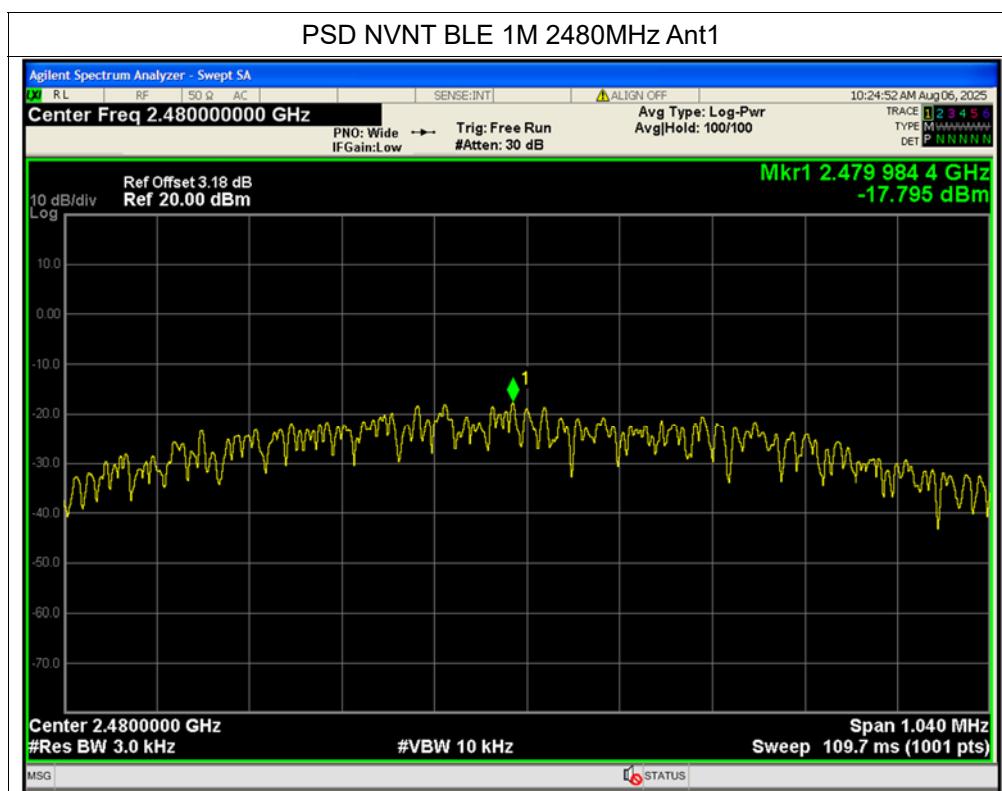

MORLAB


Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555
Fax: 86-755-36698525
Http://www.morlab.cn
E-mail: service@morlab.cn

A.8. Restricted Frequency Bands


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (Horizontal) was recorded in this test report.

Plot for Channel 0

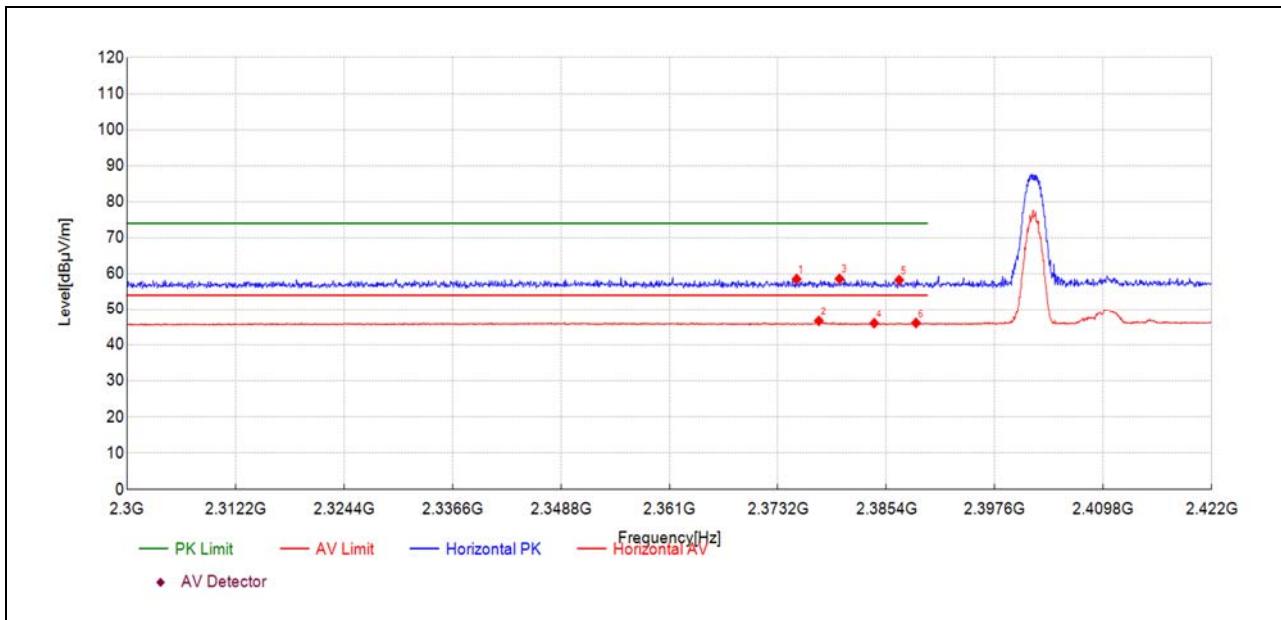

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict
2375.31	21.1	58.55	37.480	74.00	15.45	232	PK	PASS
2377.81	9.2	46.65	37.480	54.00	7.35	57	AV	PASS
2380.13	21.1	58.59	37.480	74.00	15.41	114	PK	PASS
2384.04	8.5	46.01	37.490	54.00	7.99	0	AV	PASS
2386.85	20.8	58.25	37.490	74.00	15.75	5	PK	PASS
2388.74	8.6	46.08	37.490	54.00	7.92	14	AV	PASS

Plot for Channel 39

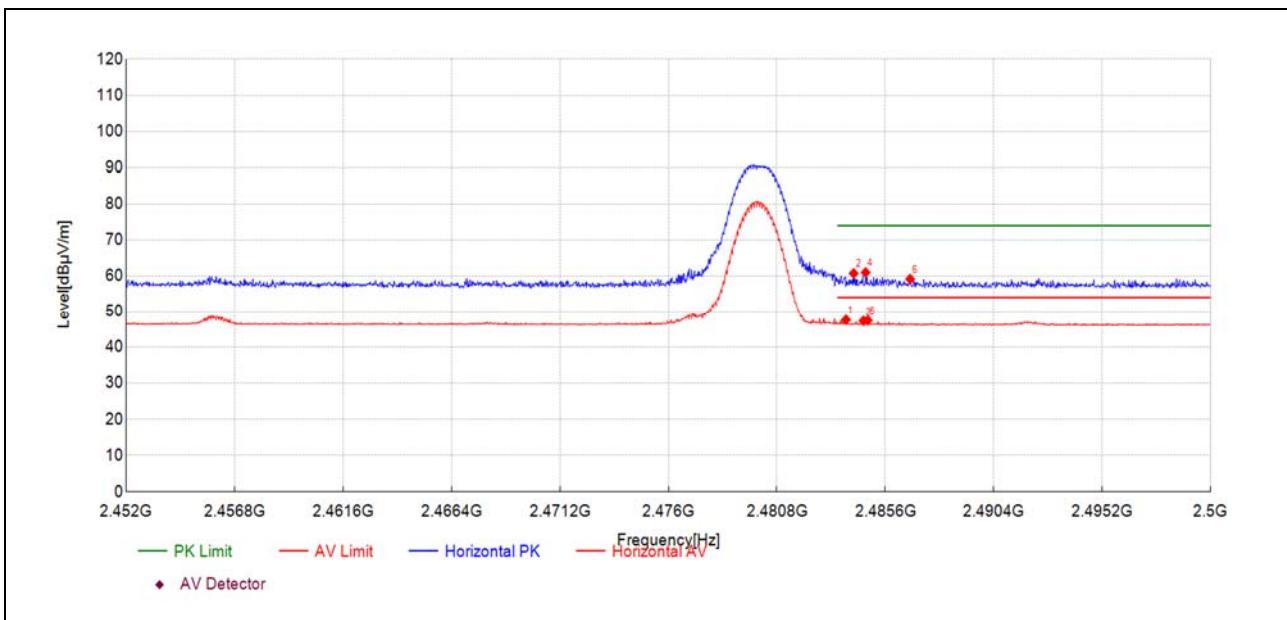

Frequency [MHz]	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Detector	Verdict
2483.86	9.4	47.64	38.270	54.00	6.36	346	AV	PASS
2484.20	22.5	60.75	38.270	74.00	13.25	62	PK	PASS
2484.63	9.1	47.35	38.270	54.00	6.65	355	AV	PASS
2484.73	22.7	61.00	38.270	74.00	13.00	57	PK	PASS
2484.82	9.2	47.48	38.270	54.00	6.52	355	AV	PASS
2486.70	20.9	59.17	38.270	74.00	14.83	183	PK	PASS



A.9. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable\ loss} [dB] - G_{preamp} [dB]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Field strength of fundamental:

Frequency [MHz]	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Antenna Polarity
2401.74	50.1	87.59	37.520	Horizontal


The field strength (the lowest) of fundamenta is more than 20dB higher than the unwanted emissions, in accordance with FCC part 15.215(b).

Plot for Channel 0

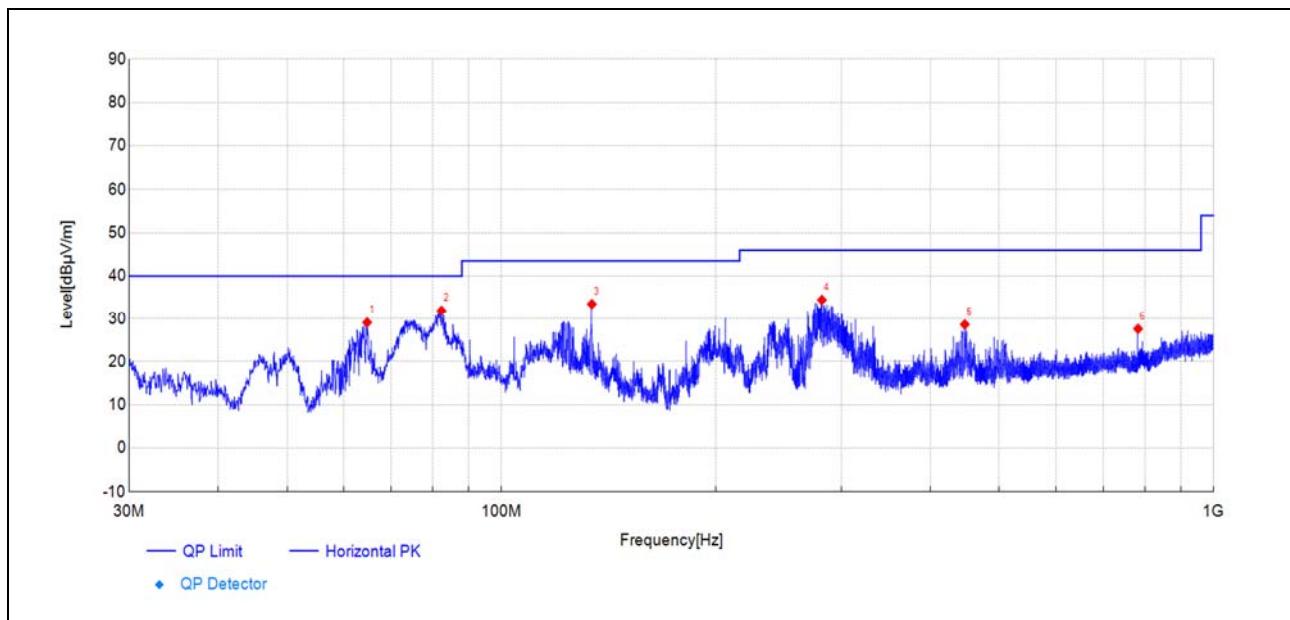


(Antenna Horizontal, 30MHz to 1GHz)

Frequency [MHz]	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Detector	Verdict
64.78	58.3	29.10	-29.210	40.00	10.90	58	PK	PASS
82.38	63.7	31.90	-31.760	40.00	8.10	92	PK	PASS
133.94	65.5	33.48	-32.020	43.50	10.02	71	PK	PASS
281.78	60.8	34.44	-26.320	46.00	11.56	24	PK	PASS
447.22	50.2	28.61	-21.620	46.00	17.39	44	PK	PASS
783.00	43.0	27.60	-15.370	46.00	18.40	264	PK	PASS

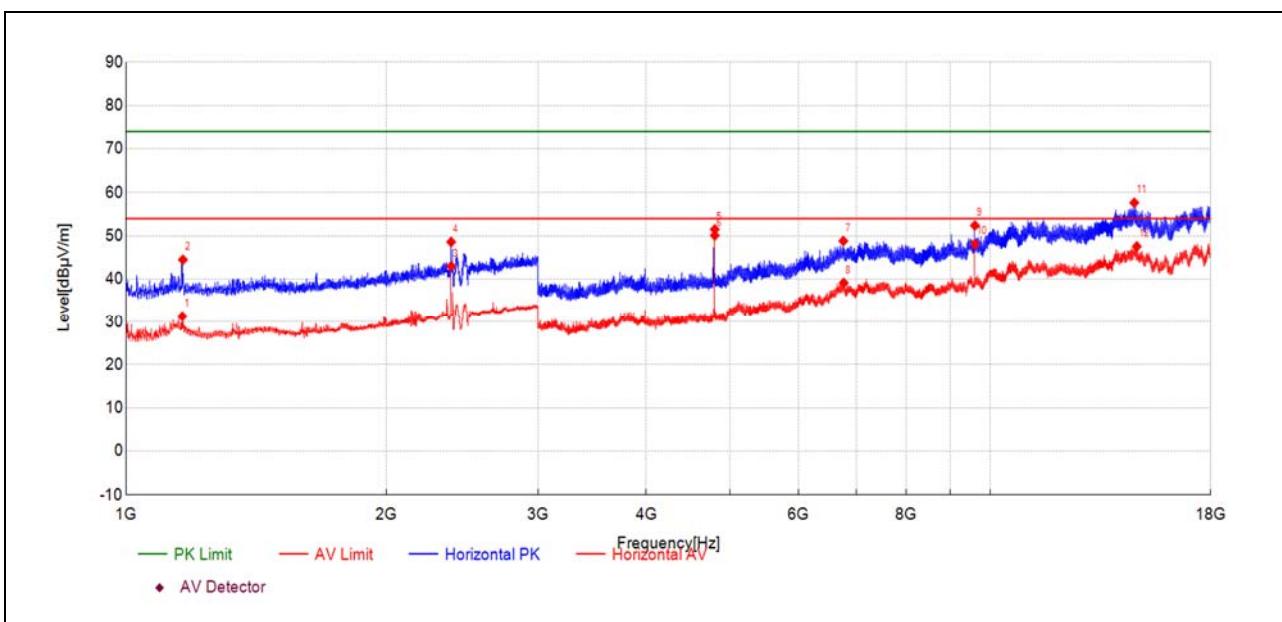


(Antenna Horizontal, 1GHz to 18GHz)

Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict
1162.03	33.0	31.28	-1.760	54.00	22.72	174	AV	PASS
1163.63	46.2	44.48	-1.730	74.00	29.52	218	PK	PASS
2378.28	37.8	42.99	5.190	54.00	11.01	42	AV	PASS
2378.28	43.4	48.60	5.190	74.00	25.40	53	PK	PASS
4800.91	56.7	51.51	-5.170	74.00	22.49	144	PK	PASS
4801.34	55.3	50.10	-5.170	54.00	3.90	144	AV	PASS
6762.11	44.8	48.82	4.030	74.00	25.18	117	PK	PASS
6769.82	35.2	39.13	3.960	54.00	14.87	357	AV	PASS
9602.33	43.9	52.41	8.560	74.00	21.59	104	PK	PASS
9602.76	39.6	48.12	8.570	54.00	5.88	104	AV	PASS
14682.76	37.1	57.68	20.550	74.00	16.32	63	PK	PASS
14781.77	27.7	47.56	19.890	54.00	6.44	277	AV	PASS

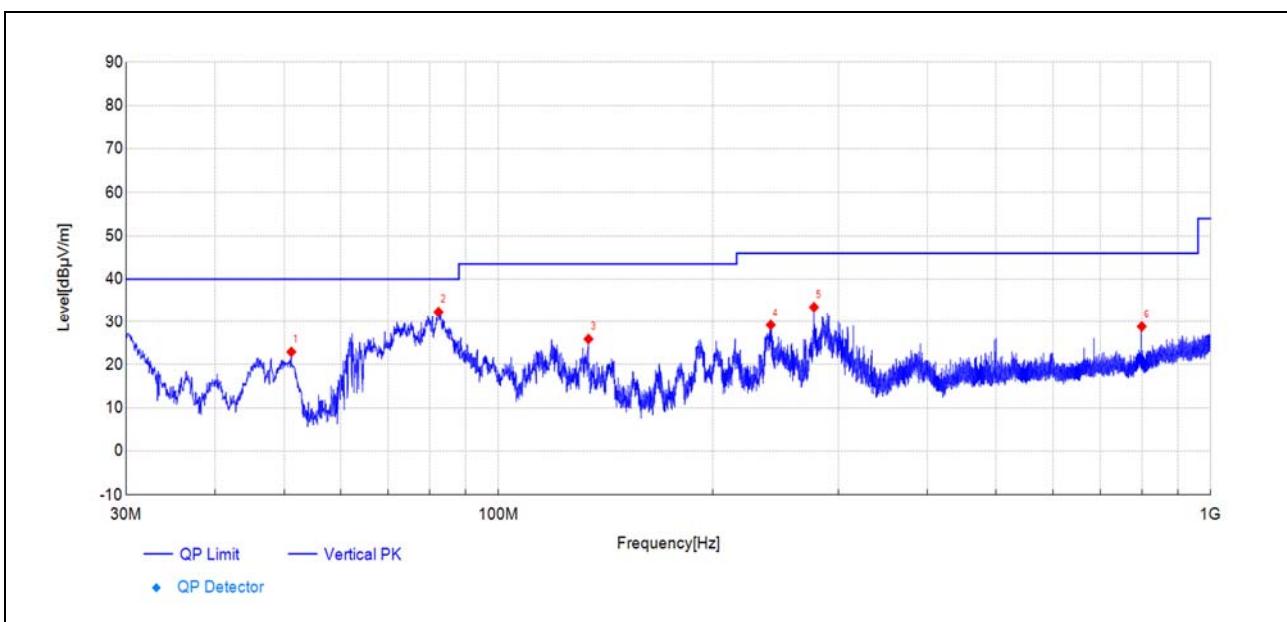

(Antenna Vertical, 30MHz to 1GHz)


Frequency [MHz]	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Detector	Verdict
51.20	51.0	22.94	-28.050	40.00	17.06	96	PK	PASS
82.38	64.1	32.37	-31.760	40.00	7.63	28	PK	PASS
133.80	57.9	25.92	-31.990	43.50	17.58	351	PK	PASS
241.13	57.0	29.20	-27.770	46.00	16.80	210	PK	PASS
277.31	59.7	33.48	-26.200	46.00	12.52	137	PK	PASS
800.02	43.7	28.83	-14.820	46.00	17.17	130	PK	PASS

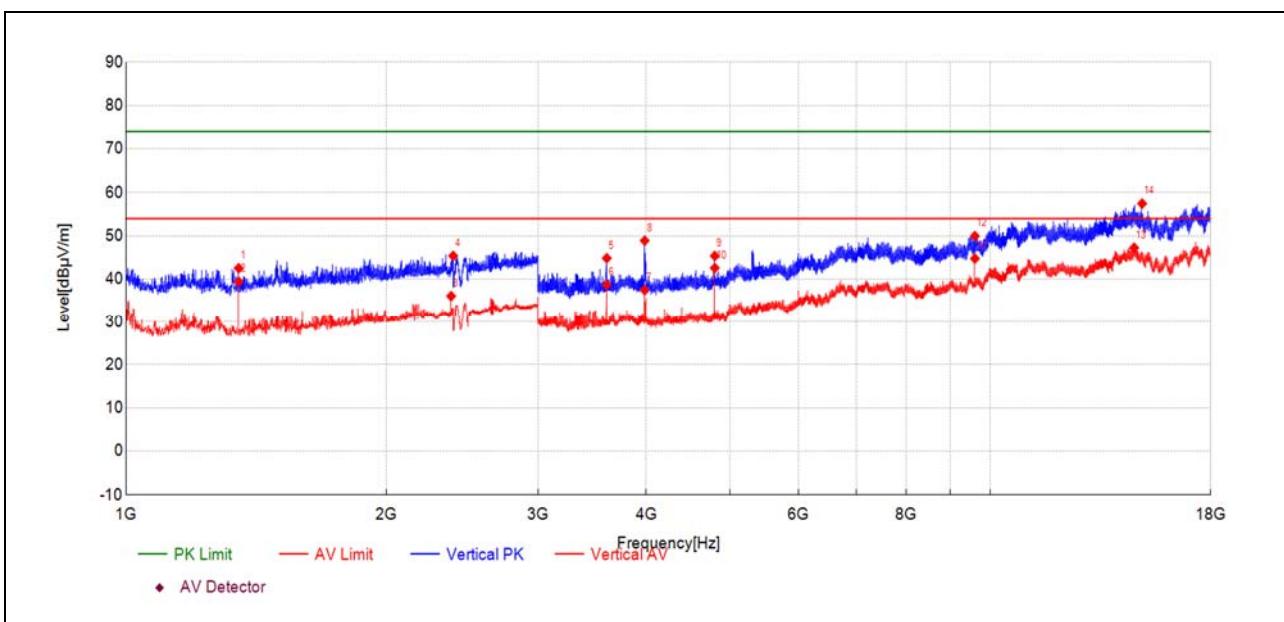

(Antenna Vertical, 1GHz to 18GHz)


Frequency [MHz]	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Detector	Verdict
1350.07	43.3	42.53	-0.800	74.00	31.47	244	PK	PASS
1350.47	40.2	39.42	-0.800	54.00	14.58	244	AV	PASS
2378.28	30.9	36.06	5.190	54.00	17.94	294	AV	PASS
2391.48	40.2	45.38	5.200	74.00	28.62	133	PK	PASS
3600.45	53.9	44.84	-9.100	74.00	29.16	36	PK	PASS
3600.87	47.8	38.68	-9.090	54.00	15.32	23	AV	PASS
3982.31	45.5	37.45	-8.010	54.00	16.55	170	AV	PASS
3983.17	56.9	48.90	-8.020	74.00	25.10	184	PK	PASS
4800.91	50.5	45.36	-5.170	74.00	28.64	356	PK	PASS
4801.34	47.8	42.58	-5.170	54.00	11.42	356	AV	PASS
9602.33	36.2	44.75	8.560	54.00	9.25	104	AV	PASS
9602.33	41.4	49.97	8.560	74.00	24.03	104	PK	PASS
14676.76	26.7	47.26	20.540	54.00	6.74	144	AV	PASS
14994.77	37.8	57.47	19.630	74.00	16.53	305	PK	PASS

Plot for Channel 19

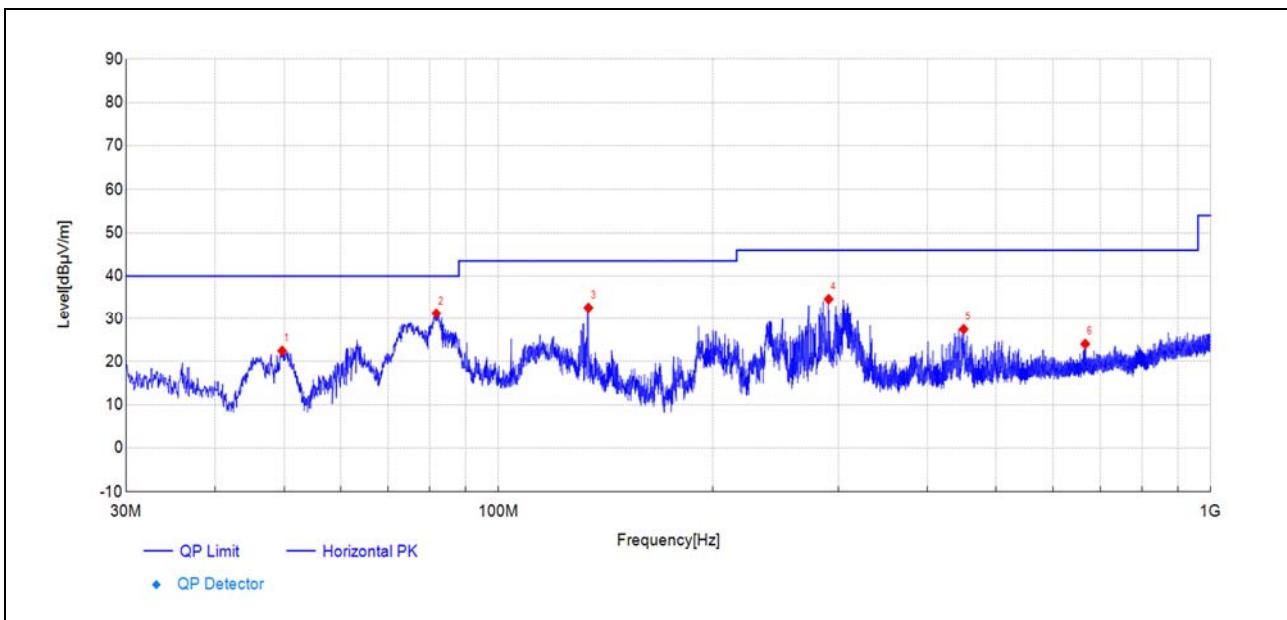


(Antenna Horizontal, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict
49.69	50.5	22.46	-28.010	40.00	17.54	197	PK	PASS
81.80	63.1	31.26	-31.870	40.00	8.74	106	PK	PASS
133.75	64.6	32.64	-31.980	43.50	10.86	72	PK	PASS
290.85	61.0	34.65	-26.370	46.00	11.35	9	PK	PASS
449.79	49.0	27.48	-21.540	46.00	18.52	37	PK	PASS
666.50	40.3	24.07	-16.180	46.00	21.93	9	PK	PASS

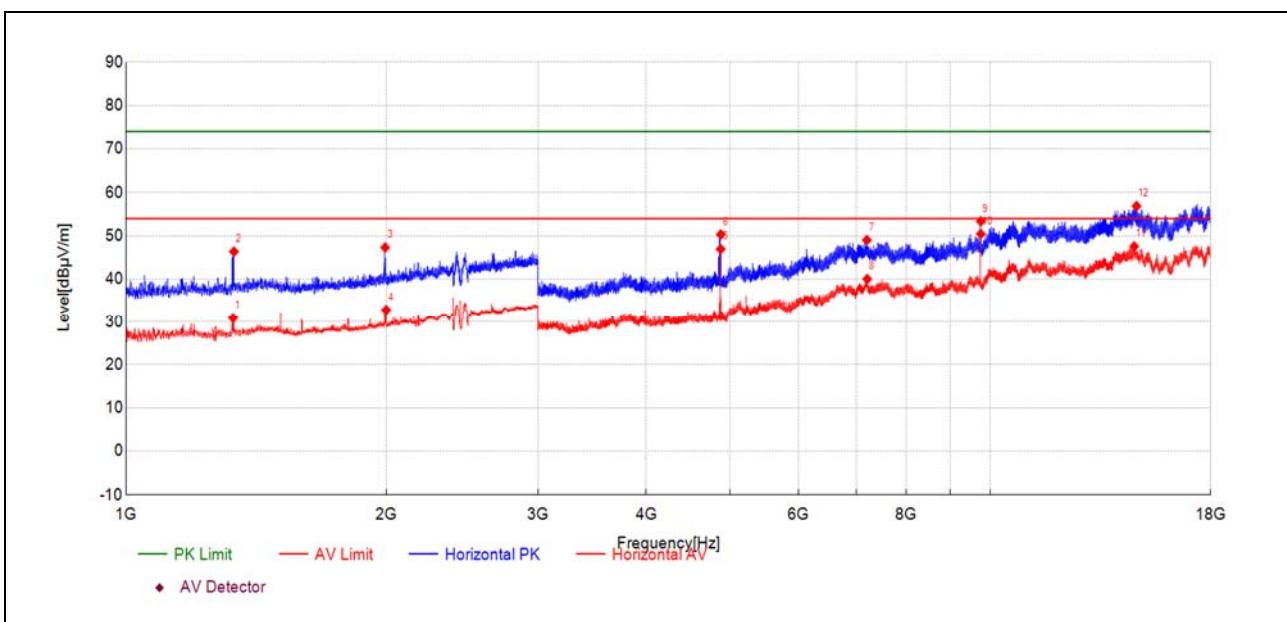


(Antenna Horizontal, 1GHz to 18GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict
1330.07	31.8	30.88	-0.880	54.00	23.12	87	AV	PASS
1333.27	47.2	46.37	-0.860	74.00	27.63	75	PK	PASS
1995.00	44.7	47.32	2.600	74.00	26.68	164	PK	PASS
2000.20	30.2	32.81	2.640	54.00	21.19	164	AV	PASS
4877.63	51.9	46.94	-4.980	54.00	7.06	307	AV	PASS
4878.91	55.3	50.34	-4.990	74.00	23.66	130	PK	PASS
7200.12	43.9	49.02	5.120	74.00	24.98	348	PK	PASS
7206.98	35.0	40.01	5.020	54.00	13.99	332	AV	PASS
9754.05	44.3	53.38	9.060	74.00	20.62	158	PK	PASS
9754.48	41.4	50.45	9.060	54.00	3.55	90	AV	PASS
14678.91	27.0	47.56	20.540	54.00	6.44	105	AV	PASS
14771.05	36.9	56.89	19.980	74.00	17.11	293	PK	PASS

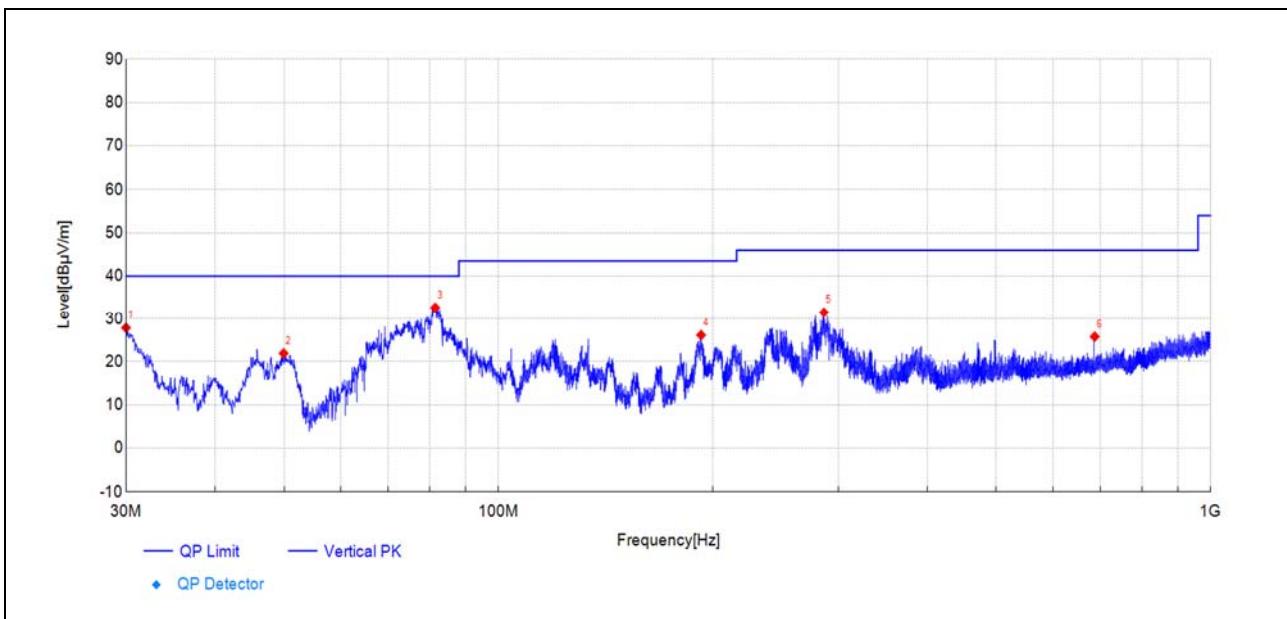

(Antenna Vertical, 30MHz to 1GHz)


Frequency [MHz]	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Detector	Verdict
30.00	58.7	27.84	-30.830	40.00	12.16	80	PK	PASS
49.93	49.8	21.91	-27.910	40.00	18.09	218	PK	PASS
81.51	64.6	32.63	-31.970	40.00	7.37	46	PK	PASS
192.53	56.3	26.16	-30.130	43.50	17.34	94	PK	PASS
286.43	57.8	31.47	-26.320	46.00	14.53	142	PK	PASS
687.26	42.1	25.78	-16.270	46.00	20.22	53	PK	PASS

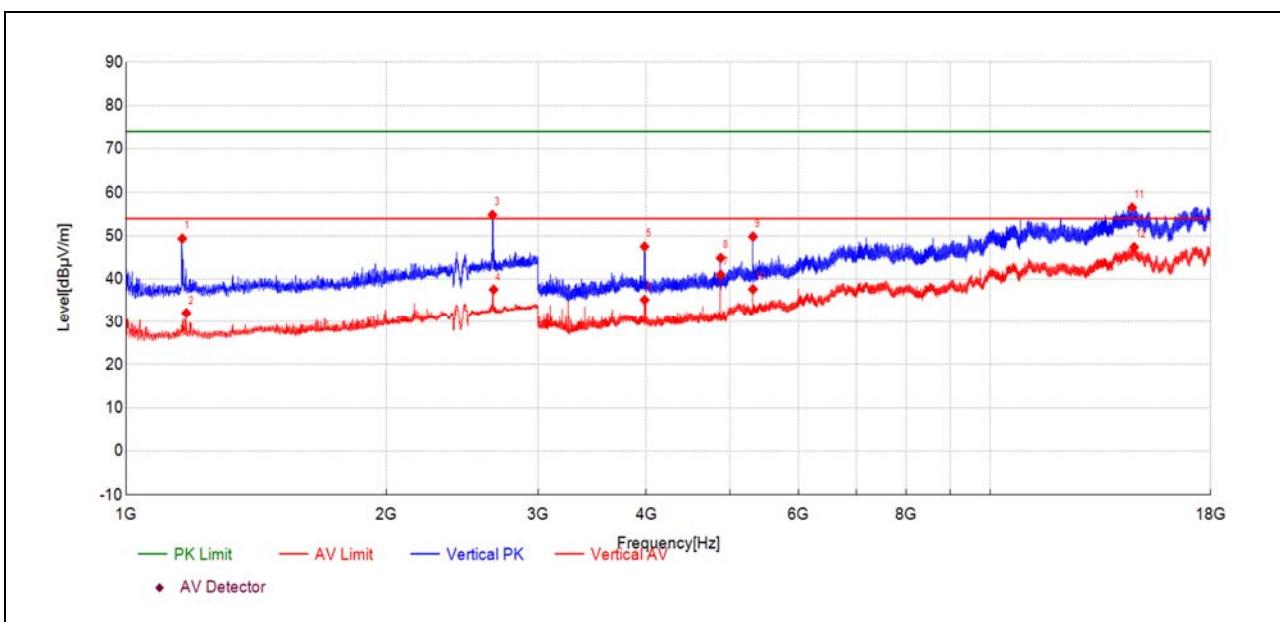

(Antenna Vertical, 1GHz to 18GHz)


Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict
1161.63	51.1	49.36	-1.760	74.00	24.64	92	PK	PASS
1174.43	33.6	32.05	-1.540	54.00	21.95	114	AV	PASS
2654.73	48.6	54.85	6.270	74.00	19.15	102	PK	PASS
2663.13	31.3	37.55	6.240	54.00	16.45	69	AV	PASS
3981.89	55.5	47.53	-8.010	74.00	26.47	184	PK	PASS
3982.31	43.2	35.14	-8.010	54.00	18.86	170	AV	PASS
4877.20	46.0	41.03	-4.980	54.00	12.97	23	AV	PASS
4877.20	49.9	44.89	-4.980	74.00	29.11	250	PK	PASS
5315.64	52.4	49.82	-2.580	74.00	24.18	50	PK	PASS
5316.07	40.2	37.64	-2.580	54.00	16.36	50	AV	PASS
14600.05	36.2	56.54	20.340	74.00	17.46	318	PK	PASS
14677.19	26.9	47.39	20.540	54.00	6.61	170	AV	PASS

Plot for Channel 39

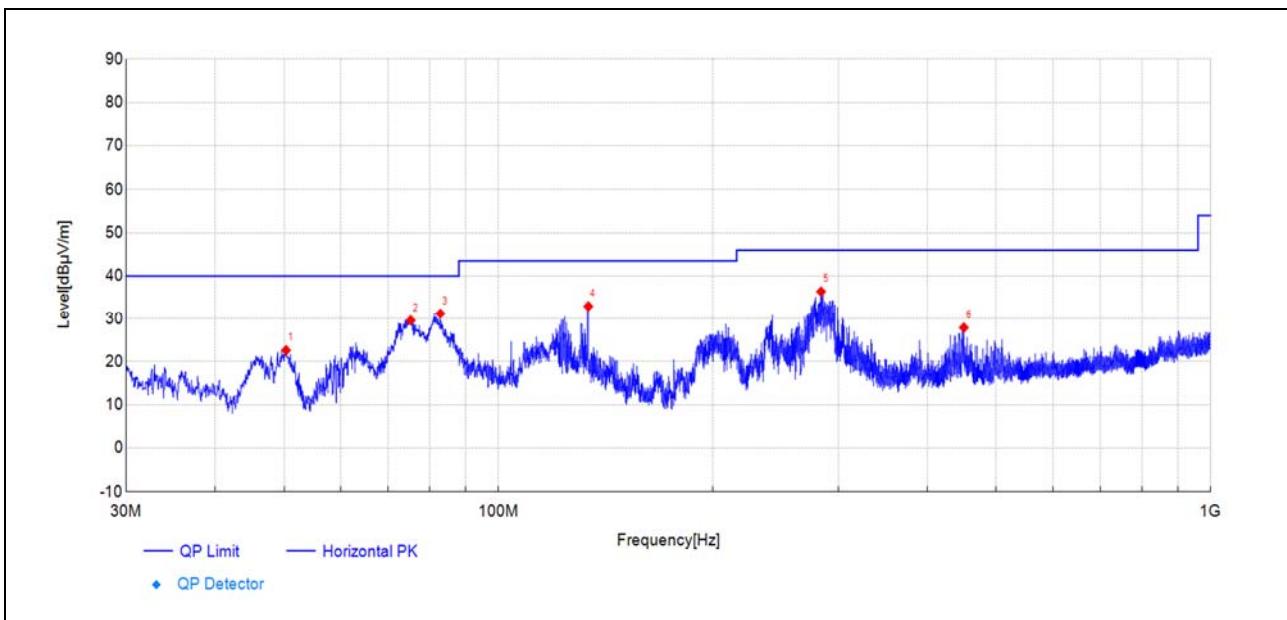


(Antenna Horizontal, 30MHz to 1GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict
50.32	50.6	22.62	-27.940	40.00	17.38	169	PK	PASS
75.30	62.5	29.58	-32.900	40.00	10.42	296	PK	PASS
82.87	62.9	31.20	-31.700	40.00	8.80	86	PK	PASS
133.70	64.9	32.94	-31.970	43.50	10.56	86	PK	PASS
283.76	62.7	36.37	-26.280	46.00	9.63	9	PK	PASS
450.18	49.4	27.88	-21.550	46.00	18.12	36	PK	PASS

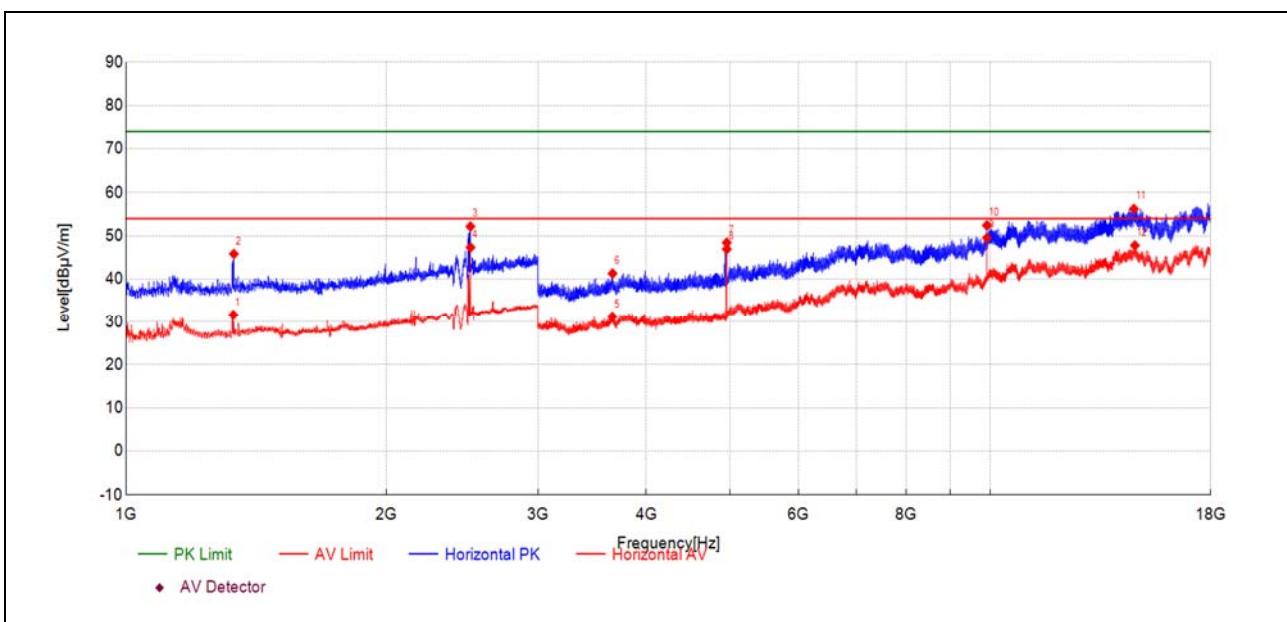


(Antenna Horizontal, 1GHz to 18GHz)

Frequency [MHz]	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Detector	Verdict
1331.27	32.5	31.62	-0.870	54.00	22.38	132	AV	PASS
1332.87	46.7	45.82	-0.870	74.00	28.18	77	PK	PASS
2503.50	46.4	52.17	5.810	74.00	21.83	153	PK	PASS
2504.30	41.5	47.34	5.810	54.00	6.66	159	AV	PASS
3654.88	40.1	31.22	-8.840	54.00	22.78	222	AV	PASS
3656.16	50.2	41.30	-8.850	74.00	32.70	316	PK	PASS
4956.91	53.1	48.42	-4.680	74.00	25.58	75	PK	PASS
4957.34	51.6	46.94	-4.660	54.00	7.06	75	AV	PASS
9914.34	40.2	49.54	9.320	54.00	4.46	36	AV	PASS
9914.34	43.1	52.44	9.320	74.00	21.56	36	PK	PASS
14670.33	35.7	56.24	20.520	74.00	17.76	9	PK	PASS
14705.91	27.2	47.78	20.550	54.00	6.22	115	AV	PASS

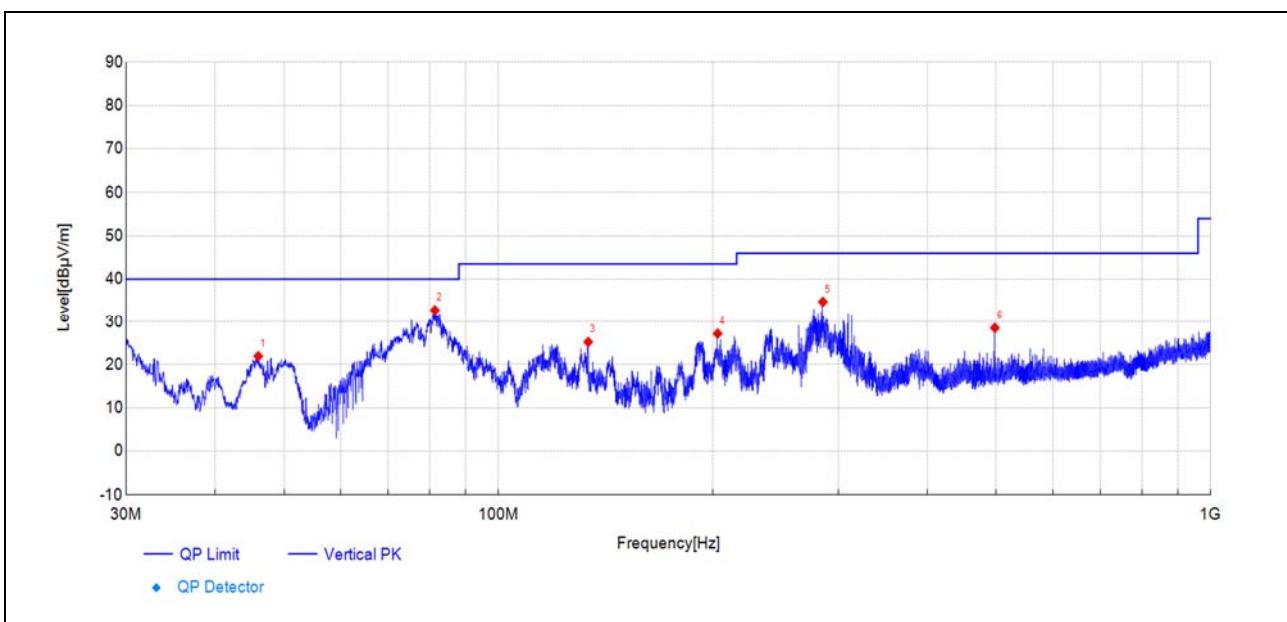

(Antenna Vertical, 30MHz to 1GHz)

Frequency [MHz]	Reading [dB μ V]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Angle [°]	Detector	Verdict
46.01	50.4	21.93	-28.470	40.00	18.07	96	PK	PASS
81.41	64.8	32.77	-32.000	40.00	7.23	27	PK	PASS
133.65	57.2	25.25	-31.960	43.50	18.25	1	PK	PASS
203.11	56.3	27.18	-29.140	43.50	16.32	117	PK	PASS
285.41	61.0	34.71	-26.280	46.00	11.29	144	PK	PASS
497.71	49.0	28.53	-20.460	46.00	17.47	171	PK	PASS

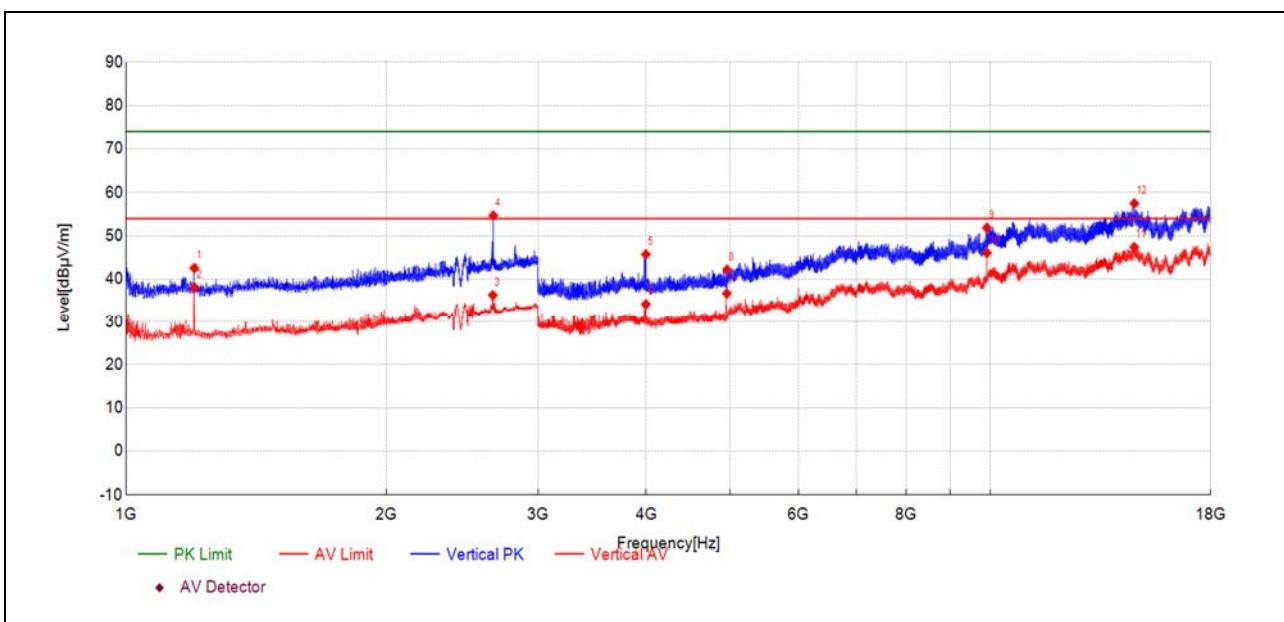

(Antenna Vertical, 1GHz to 18GHz)

Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Angle [°]	Detector	Verdict
1199.64	43.6	42.55	-1.090	74.00	31.45	99	PK	PASS
1200.44	39.1	38.03	-1.100	54.00	15.97	104	AV	PASS
2657.53	30.0	36.28	6.260	54.00	17.72	132	AV	PASS
2660.73	48.5	54.70	6.250	74.00	19.30	110	PK	PASS
3995.60	53.8	45.72	-8.120	74.00	28.28	222	PK	PASS
3996.03	42.3	34.14	-8.120	54.00	19.86	208	AV	PASS
4957.34	41.4	36.69	-4.660	54.00	17.31	303	AV	PASS
4960.77	46.8	42.17	-4.600	74.00	31.83	23	PK	PASS
9913.91	42.6	51.87	9.320	74.00	22.13	248	PK	PASS
9914.77	36.8	46.07	9.320	54.00	7.93	183	AV	PASS
14680.19	26.9	47.40	20.550	54.00	6.60	183	AV	PASS
14685.33	36.9	57.50	20.570	74.00	16.50	343	PK	PASS

END OF REPORT