



Spot Check Evaluation

FCC ID : UZ7EM45A1
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45A1
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : 47 CFR Part 22(H), 24(E), 27(L), 27(D), 27(H), 27(F),
27(M), 27(N), 27(O), 27(Q), 90(S), 90(R), 96
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart E §15.407

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION	4
1.1 Product Feature of Equipment Under Test	4
1.2 Modification of EUT	5
1.3 Testing Site.....	5
1.4 Test Software	5
1.5 Applicable Standards	6
2 RE-USE OF MEASURED DATA	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section	9
3 LIST OF MEASURING EQUIPMENT	20
4 MEASUREMENT UNCERTAINTY	23
APPENDIX A. TEST SETUP PHOTOGRAPHS	
APPENDIX B. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG460505-02F	Rev. 01	Initial issue of report	Feb. 12, 2025



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45A1
FCC ID	UZ7EM45A1
IMEI Code	Conducted: 354708620060822/354708620063123 Conduction: 354708620060426/354708620064352 Radiation: 354708620060269/ 354708620064113 DFS/CBP: 354708620060657/354708620063206
HW Version	DV
SW Version	14-24-09.00-UG-U00-PRD-ATH-04
MFD	09DEC24
EUT Stage	Identical Prototype

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO2-01



1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS DFS01-KS 03CH02-KS 03CH04-KS 03CH06-KS	CN1257	314309

1.4 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH02-KS	AUDIX	E3	6.2009-8-24a1
3.	03CH04-KS	AUDIX	E3	210616
4.	03CH06-KS	AUDIX	E3	210616
5.	DFS01-KS	Sporton	Test Tools	1.0
6.	CO01-KS	AUDIX	E3	6.2009-8-24

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 22(H), 24(E), 27(L), 27(D), 27(H), 27(F), 27(M), 27(N), 27(O), 27(Q), 90(S), 90(R), 96
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: EM45A1, FCC ID: UZ7EM45A1) is electrically identical to the reference device (Model: EM45A2, FCC ID: UZ7EM45A2) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA460505-02.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions.

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: UZ7EM45A1.

2.2 Model Difference Information

The **main** difference between FCC ID: UZ7EM45A2 and FCC ID: UZ7EM45A1 is as below:

- Removed RFID function.
- Antenna 1 removed WWAN TX function, keep supported Low bands and Middle bands RX function.

Other differences and all the details of similarity and difference can be found in the confidential documents (UZ7EM45A1 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	UZ7EM45A2	Full test	FR460505A	UZ7EM45A1	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	UZ7EM45A2	Full test	FR460505B	UZ7EM45A1	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	UZ7EM45A2	Full test	FR460505C	UZ7EM45A1	Spot check	Y, All test items
	DXX (NFC)	13.56	UZ7EM45A2	Full test	FR460505D	UZ7EM45A1	Spot check	Y, All test items
15E	U-NII	5180~5240	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5260~5320	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5500~5720	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5745~5825	UZ7EM45A2	Full test	FR460505E	UZ7EM45A1	Spot check	Y, All test items
		5260~5320 5500~5720	UZ7EM45A2	Full test	FZ460505	UZ7EM45A1	Spot check	Y, All test items
	6CD	5925~7125	UZ7EM45A2	Full test	FR460505G FR460505H	UZ7EM45A1	Spot check	Y, All test items
22, 24, 27, 90, 96,	PCE (WCDMA)	Band II, IV, V	UZ7EM45A2	Full test	FG460505A	UZ7EM45A1	Spot check	Y, All test items
	PCE (LTE)	B2/4/5/7/12/13/17/25/ 26/30/38/41/66/71 ULCA 5B/7C/38C 41C/66B/66C	UZ7EM45A2	Full test	FG460505B FG460505C FG460505D FG460505G FG460505J	UZ7EM45A1	Spot check	Y, All test items
	PCE (LTE)	B14 (90R)	UZ7EM45A2	Full test	FG460505E	UZ7EM45A1	Spot check	Y, All test items
	PCE (LTE)	B26 (90S)	UZ7EM45A2	Full test	FG460505F	UZ7EM45A1	Spot check	Y, All test items
	CBE (LTE)	B48/48C (Part96)	UZ7EM45A2	Full test	FG460505H FG460505I	UZ7EM45A1	Spot check	Y, All test items
	PCE (NR)	n2/n5/n7/n12/n13/n25/ n26/n30/n38/n41/n66/ n71/n77/n78	UZ7EM45A2	Full test	FG460505K FG460505L FG460505O FG460505R FG460505S	UZ7EM45A1	Spot check	Y, All test items
	PCE (NR)	n14 (90R)	UZ7EM45A2	Full test	FG460505M	UZ7EM45A1	Spot check	Y, All test items
	PCE (NR)	n26 (90S)	UZ7EM45A2	Full test	FG460505N	UZ7EM45A1	Spot check	Y, All test items
	CBE (NR)	n48/n77/n78 (Part96)	UZ7EM45A2	Full test	FG460505P FG460505Q	UZ7EM45A1	Spot check	Y, All test items

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB}, \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB}, \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (CH78)	Number of Channels	79	79	0	3
	Hopping Channel Separation	0.996	1.004	0.008	3
	Dwell Time of Each Channel	0.31	0.31	0	3
	20dB Bandwidth	0.94	0.94	0	3
	99% Bandwidth	0.836	0.845	0.009	3
	Conducted Band Edges	-41.83	-44.27	2.44	3
	Conducted Spurious Emission	-45.65	-48	2.35	3
BT 1Mbps (CH39)	Radiated Band Edges and Radiated Spurious Emission	55.68	56.85	1.17	3
BT	AC Conducted Emission	11.93	10.83	1.1	3
BLE 1Mbps (CH39)	6dB Bandwidth	1.15	1.15	0	3
	99% Bandwidth	2.01	2.014	0.004	3
	Power Spectral Density	-9.33	-9.34	0.01	3
	Conducted Band Edges	-33.74	-33.98	0.24	3
	Conducted Spurious Emission	-51.53	-52.95	1.42	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission	47.73	46.09	1.46	3
BLE	AC Conducted Emission	11.93	10.83	1.1	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth	8.08	8.08	0	3
	99% Bandwidth	13.467	13.387	0.08	3
	Power Spectral Density	-1.15	-1.27	0.12	3
	Conducted Band Edges	-47.96	-48.2	0.24	3
	Conducted Spurious Emission	-43.67	-45.68	2.01	3
WIFI 2.4G (802.11ax HE20 CH11)	Radiated Band Edges and Spurious Emission	52.29	49.61	2.68	3
WIFI 2.4G	AC Conducted Emission	11.93	10.83	1.1	3
WIFI 5G (802.11a CH149)	26dB Bandwidth	19.29	19.2	0.09	3
WIFI 5G (802.11a CH149)	99% Bandwidth	16.705	16.705	0	3
WIFI 5G (802.11a CH149)	Power Spectral Density	8.3	7.99	0.31	3
WIFI 5G (802.11a CH149)	Unwanted Emissions	16.31	16.31	0	3
WIFI 5G (11ax HE80 Ch42)	Radiated Band Edges and Spurious Emission	50.86	50.93	0.07	3
WIFI 5G	AC Conducted Emission	12.50	11.33	1.17	3
WIFI 5G (802.11a CH116)	DFS	0.851628	0.87852	0.026	3
FCC-WIFI 6G UNII-5 (802.11ax HE80 CH47 6185MHz)-6XD	26dB Emission Bandwidth	165.79	165.41	0.38	3
	99% Occupied Bandwidth	157.105	157.257	0.152	3
	Fundamental Maximum EIRP	17.30	17.00	0.30	3
	Fundamental Power Spectral Density	-3.33	-5.16	1.83	3
	In-Band Emissions	-12.47	-11.09	1.38	3



FCC-WIFI 6G UNII-5 (802.11ax HE80 CH47 6185MHz)-6CD	26dB Emission Bandwidth	165.79	165.41	0.38	3
	99% Occupied Bandwidth	157.105	157.257	0.152	3
	Fundamental Maximum EIRP	17.30	17.04	0.26	3
	Fundamental Power Spectral Density	-3.33	-5.16	1.83	3
	In-Band Emissions	-12.47	-11.09	1.38	3
WIFI 6G UNII-5 (802.11ax HE160 CH47 6185MHz)	Contention Based Protocol	-65.36	-65.88	0.52	3
6E (802.11ax HE20_Ch233)	Radiated Band Edges and Spurious Emission	66.93	67.17	0.24	3
WIFI 6G	AC Conducted Emission	11.52	12.62	1.1	3
Part 15C NFC	20dB Spectrum Bandwidth	2.48	2.48	0	3
	99% OBW Spectrum Bandwidth	2.10	2.11	0.01	3
	Frequency Stability	-22.9351	-20.8333	2.1018	3
	Field Strength of Fundamental Emissions	58.04	58.19	0.15	3
	Radiated Spurious Emissions	33.28	35.09	1.81	3
	AC Conducted Emissions	11.94	11.86	0.06	3

Mode	Test Item	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Part 96 SA_n77	Radiated Spurious Emission	-43.4	-43.69	0.29	3
Part 96 SA_n48	End User Device additional requirement	Pass	Pass	-	-
Part96 Band48CA	Equivalent Isotropic Radiated Power	20.99	20.96	0.203	3
	Peak-to-Average Ratio	6.43	6.22	0.21	3
	Occupied Bandwidth	32.80	32.80	0.00	3
	Conducted Band Edge	-40.19	-40.98	0.79	3
	Conducted Spurious Emission	-48.81	-47.65	1.16	3
	Frequency Stability	0.0005	0.0011	0.0006	3



Conducted power for Unlicensed bands

Test Item	Mode	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR	9.32	8.85	0.47	3
	BLE 1Mbps	9.12	8.87	0.25	3
	BLE 2Mbps	9.33	9.00	0.33	3
	11b, 2.4GHz	22.51	22.46	0.05	3
	11g, 2.4GHz	21.97	21.92	0.05	3
	11n HT20, 2.4GHz	21.27	21.20	0.07	3
	11ac VHT20, 2.4GHz	21.31	21.25	0.06	3
	11ax HE20, 2.4GHz	21.33	21.31	0.02	3
	11a, 5.2GHz	22.28	22.15	0.13	3
	11a, 5.3GHz	22.27	22.08	0.19	3
	11a, 5.5GHz	22.41	22.22	0.19	3
	11a, 5.8GHz	22.45	22.39	0.06	3
	11n HT20, 5.2GHz	21.20	21.11	0.09	3
	11n HT20, 5.3GHz	20.56	20.27	0.29	3
	11n HT20, 5.5GHz	21.42	21.01	0.41	3
	11n HT20, 5.8GHz	21.51	21.14	0.37	3
	11ac VHT20, 5.2GHz	21.25	21.16	0.09	3
	11ac VHT20, 5.3GHz	20.62	20.31	0.31	3
	11ac VHT20, 5.5GHz	21.46	21.04	0.42	3
	11ac VHT20, 5.8GHz	21.56	21.17	0.39	3
	11ax HE20, 5.2GHz	21.29	21.20	0.09	3
	11ax HE20, 5.3GHz	20.68	20.38	0.30	3
	11ax HE20, 5.5GHz	21.41	21.09	0.32	3
	11ax HE20, 5.8GHz	21.41	21.06	0.35	3
	11n HT40, 5.2GHz	20.45	20.03	0.42	3
	11n HT40, 5.3GHz	20.22	19.85	0.37	3
	11n HT40, 5.5GHz	20.52	20.33	0.19	3
	11n HT40, 5.8GHz	20.30	20.24	0.06	3
	11ac VHT40, 5.2GHz	20.51	20.08	0.43	3
	11ac VHT40, 5.3GHz	20.27	19.89	0.38	3
	11ac VHT40, 5.5GHz	20.55	20.39	0.16	3
	11ac VHT40, 5.8GHz	20.36	20.32	0.04	3
	11ax HE40, 5.2GHz	20.56	20.14	0.42	3
	11ax HE40, 5.3GHz	20.30	19.94	0.36	3
	11ax HE40, 5.5GHz	20.60	20.44	0.16	3
	11ax HE40, 5.8GHz	20.42	20.35	0.07	3
	11ac VHT80, 5.2GHz	20.25	20.02	0.23	3
	11ac VHT80, 5.3GHz	20.03	19.77	0.26	3
	11ac VHT80, 5.5GHz	20.18	20.01	0.17	3
	11ac VHT80, 5.8GHz	19.83	19.79	0.04	3
	11ax HE80, 5.2GHz	20.31	20.05	0.26	3
	11ax HE80, 5.3GHz	20.07	19.79	0.28	3
	11ax HE80, 5.5GHz	20.21	20.03	0.18	3
	11ax HE80, 5.8GHz	19.85	19.82	0.03	3
	11ac VHT160, 5.3GHz	19.21	19.11	0.10	3
	11ac VHT160, 5.5GHz	19.48	19.24	0.24	3
	11ax HE160, 5.3GHz	19.23	19.14	0.09	3
	11ax HE160, 5.5GHz	19.52	19.28	0.24	3
	6CD Indoor 11a, U-NII-5	7.13	7.06	0.07	3
	6CD Indoor 11a, U-NII-6	7.63	7.61	0.02	3
	6CD Indoor 11a, U-NII-7	6.43	6.38	0.05	3
	6CD Indoor 11a, U-NII-8	5.80	5.71	0.09	3
	6CD Indoor 11ax HE20, U-NII-5	10.68	10.47	0.21	3
	6CD Indoor 11ax HE20, U-NII-6	11.19	11.12	0.07	3



6CD Indoor 11ax HE20, U-NII-7	9.90	9.86	0.04	3
6CD Indoor 11ax HE20, U-NII-8	9.18	8.91	0.27	3
6CD Indoor 11ax HE40, U-NII-5	13.56	13.40	0.16	3
6CD Indoor 11ax HE40, U-NII-6	14.02	13.89	0.13	3
6CD Indoor 11ax HE40, U-NII-7	12.74	12.65	0.09	3
6CD Indoor 11ax HE40, U-NII-8	12.41	12.34	0.07	3
6CD Indoor 11ax HE80, U-NII-5	16.49	16.28	0.21	3
6CD Indoor 11ax HE80, U-NII-6	16.36	16.34	0.02	3
6CD Indoor 11ax HE80, U-NII-7	16.05	15.96	0.09	3
6CD Indoor 11ax HE80, U-NII-8	15.84	15.78	0.06	3
6CD Indoor 11ax HE160, U-NII-5	16.95	16.65	0.30	3
6CD Indoor 11ax HE160, U-NII-6	16.48	16.09	0.39	3
6CD Indoor 11ax HE160, U-NII-7	16.71	16.43	0.28	3
6CD Indoor 11ax HE160, U-NII-8	16.80	16.50	0.30	3
6CD Outdoor 11a, U-NII-5	17.02	16.53	0.49	3
6CD Outdoor 11a, U-NII-7	16.69	16.62	0.07	3
6CD Outdoor 11ax HE20, U-NII-5	16.95	16.55	0.40	3
6CD Outdoor 11ax HE20, U-NII-7	16.61	16.26	0.35	3
6CD Outdoor 11ax HE40, U-NII-5	16.90	16.60	0.30	3
6CD Outdoor 11ax HE40, U-NII-7	16.52	16.22	0.30	3
6CD Outdoor 11ax HE80, U-NII-5	16.85	16.52	0.33	3
6CD Outdoor 11ax HE80, U-NII-7	16.43	16.13	0.30	3
6CD Outdoor 11ax HE160, U-NII-5	16.95	16.65	0.30	3
6CD Outdoor 11ax HE160, U-NII-7	16.42	16.20	0.22	3

Conducted power for Licensed bands

Test Item	Mode	UZ7EM45A2 Parent Worst mode Test Result	UZ7EM45A1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	WCDMA II	23.97	23.79	0.18	3
	WCDMA IV	23.92	23.88	0.04	3
	WCDMA V	23.98	23.66	0.32	3
	LTE B2	23.66	23.24	0.42	3
	LTE B4	23.56	23.32	0.24	3
	LTE B5	23.69	23.35	0.34	3
	LTE B5B	23.65	23.52	0.13	3
	LTE B7	22.8	22.61	0.19	3
	LTE B7C	22.79	22.75	0.04	3
	LTE B12	23.89	23.65	0.24	3
	LTE B13	23.71	23.31	0.4	3
	LTE B14	23.83	23.38	0.45	3
	LTE B17	23.82	23.43	0.39	3
	LTE B25	23.68	23.19	0.49	3
	LTE B26L	23.47	23.26	0.21	3
	LTE B26H	23.71	23.26	0.45	3
	LTE B30	23.69	23.57	0.12	3
	LTE B66	23.60	23.28	0.32	3
	LTE B71	22.76	22.72	0.04	3
	LTE B38	22.77	22.70	0.07	3
	LTE B41	26.01	26.00	0.01	3
	LTE B38C	22.63	22.59	0.04	3
	LTE B41C	25.73	25.62	0.11	3
	LTE B48 part96	21.85	21.82	0.03	3
	LTE B48C part96	21.55	21.52	0.03	3
	LTE B66B	23.49	23.27	0.22	3
	LTE B66C	23.32	23.21	0.11	3



N13	24.27	23.96	0.31	3
N14	24.26	23.98	0.28	3
N26 L	24.45	24.06	0.39	3
N26 H	24.49	24.02	0.47	3
ENDC_48A_n66A	24.22	24.18	0.04	3
N77 270 MIMO	24.70	24.36	0.34	3
N78 270 MIMO	24.61	24.32	0.29	3
N77 part96 MIMO	22.31	22.25	0.06	3
N78 part96 MIMO	22.26	22.19	0.07	3
N77 27Q MIMO	24.45	24.12	0.33	3
N78 27Q MIMO	24.11	23.86	0.25	3
ENDC_5A_n2A	24.72	24.27	0.45	3
ENDC_12A_n25A	24.74	24.29	0.45	3
ENDC_2A_n5A	24.39	24.31	0.08	3
ENDC_2A_n7A	23.85	23.51	0.34	3
ENDC_2A_n12A	24.52	24.25	0.27	3
ENDC_2A_n30A	23.65	23.58	0.07	3
ENDC_2A_n38A	23.59	23.45	0.14	3
ENDC_2A_n41A	26.56	26.45	0.11	3
ENDC_2A_n71A	23.39	23.31	0.08	3
ENDC_2A_N77A 270	26.23	26.17	0.06	3
ENDC_2A_N78A 270	26.01	25.94	0.07	3
ENDC_2A_N77A 27Q	25.99	25.75	0.24	3
ENDC_2A_N78A 27Q	25.81	25.47	0.34	3
ENDC_2A_N77A part96	22.85	22.62	0.23	3
ENDC_2A_N78A part96	22.76	22.58	0.18	3
ENDC_2A_N48A part96	22.04	22.01	0.03	3

6CD- < indoor client>

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	001	5955	0.03	0.03	4.55	3.39	0.35	-0.85	4.90	2.54	24.00	Pass	4.5	

U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	049	6195	Full	0.00	0.00	7.91	6.82	0.35	-0.85	8.26	5.97	24.00	Pass	8	8
HE40	MCS0	1	003	5965	Full	0.00	0.00	10.63	10.08	0.35	-0.85	10.98	9.23	24.00	Pass	11	11
HE80	MCS0	1	007	5985	Full	0.00	0.00	13.43	13.02	0.35	-0.85	13.78	12.17	24.00	Pass	14	14
HE160	MCS0	1	047	6185	Full	0.00	0.00	14.01	13.13	0.35	-0.85	14.36	12.28	24.00	Pass	14	14

U-NII-6 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	6515	0.03	0.04	4.81	4.31	0.75	-2.44	5.56	1.87	24.00	Pass	5.5	5.5



U-NII-6 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	105	6475	Full	0.00	0.00	8.41	7.67	0.75	-2.44	9.16	5.23	24.00	Pass	9	9
HE40	MCS0	1	107	6485	Full	0.00	0.00	11.21	10.45	0.75	-2.44	11.96	8.01	24.00	Pass	12	12
HE80	MCS0	1	103	6465	Full	0.00	0.00	13.63	12.91	0.75	-2.44	14.38	10.47	24.00	Pass	14	14
HE160	MCS0	1	111	6505	Full	0.00	0.00	13.37	12.72	0.75	-2.44	14.12	10.28	24.00	Pass	14	14

U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	117	6535	0.03	0.04	3.54	3.14	1.02	0.16	4.56	3.30	24.00	Pass	4	4

U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	117	6535	Full	0.00	0.00	7.19	6.43	1.02	0.16	8.21	6.59	24.00	Pass	7.5	7.5
HE40	MCS0	1	123	6565	Full	0.00	0.00	9.97	9.19	1.02	0.16	10.99	9.35	24.00	Pass	10.5	10.5
HE80	MCS0	1	135	6625	Full	0.00	0.00	13.33	12.45	1.02	0.16	14.35	12.61	24.00	Pass	14	14
HE160	MCS0	1	175	6825	Full	0.00	0.00	13.25	13.51	1.02	0.16	14.27	13.67	24.00	Pass	14	14

U-NII-8 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	7095	0.03	0.04	2.72	2.58	0.70	1.66	3.42	4.24	24.00	Pass	3.5	3.5

U-NII-8 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	229	7095	Full	0.00	0.00	5.85	5.76	0.70	1.66	6.55	7.42	24.00	Pass	6.5	6.5
HE40	MCS0	1	227	7085	Full	0.00	0.00	9.27	9.26	0.70	1.66	9.97	10.92	24.00	Pass	10	10
HE80	MCS0	1	199	6945	Full	0.00	0.00	12.98	12.45	0.70	1.66	13.68	14.11	24.00	Pass	13.5	13.5
HE160	MCS0	1	207	6985	Full	0.00	0.00	13.22	13.58	0.70	1.66	13.92	15.24	24.00	Pass	14	14



<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	001	5955	0.03	0.04	4.60	3.43	7.06	0.35		7.41	24.00	Pass	4.5	

U-NII-6 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	6515	0.03	0.04	4.84	4.35	7.61	0.75		8.36	24.00	Pass	5.5	

U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	117	6535	0.03	0.04	3.57	3.17	6.38	1.02		7.40	24.00	Pass	4	

U-NII-8 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	7095	0.03	0.04	2.74	2.65	5.71	1.66		7.37	24.00	Pass	3.5	

<SDM mode>

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	049	6195	Full	0.00	0.00	7.96	6.89	10.47	0.35		10.82	24.00	Pass	8	
HE40	MCS0	2	003	5965	Full	0.00	0.00	10.67	10.10	13.40	0.35		13.75	24.00	Pass	11	
HE80	MCS0	2	007	5985	Full	0.00	0.00	13.49	13.04	16.28	0.35		16.63	24.00	Pass	14	
HE160	MCS0	2	047	6185	Full	0.00	0.00	14.06	13.17	16.65	0.35		17.00	24.00	Pass	14	



U-NII-6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	105	6475	Full	0.00	0.00	8.44	7.76	11.12	0.75		11.87	24.00	Pass	9	
HE40	MCS0	2	107	6485	Full	0.00	0.00	11.24	10.48	13.89	0.75		14.64	24.00	Pass	12	
HE80	MCS0	2	103	6465	Full	0.00	0.00	13.68	12.95	16.34	0.75		17.09	24.00	Pass	14	
HE160	MCS0	2	111	6505	Full	0.00	0.00	13.40	12.74	16.09	0.75		16.84	24.00	Pass	14	

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	117	6535	Full	0.00	0.00	7.22	6.44	9.86	1.02		10.88	24.00	Pass	7.5	
HE40	MCS0	2	123	6565	Full	0.00	0.00	10.02	9.22	12.65	1.02		13.67	24.00	Pass	10.5	
HE80	MCS0	2	135	6625	Full	0.00	0.00	13.35	12.51	15.96	1.02		16.98	24.00	Pass	14	
HE160	MCS0	2	175	6825	Full	0.00	0.00	13.29	13.55	16.43	1.02		17.45	24.00	Pass	14	

U-NII-8 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	229	7095	Full	0.00	0.00	5.88	5.91	8.91	1.66		10.57	24.00	Pass	6.5	
HE40	MCS0	2	227	7085	Full	0.00	0.00	9.33	9.32	12.34	1.66		14.00	24.00	Pass	10	
HE80	MCS0	2	199	6945	Full	0.00	0.00	13.02	12.50	15.78	1.66		17.44	24.00	Pass	13.5	
HE160	MCS0	2	207	6985	Full	0.00	0.00	13.36	13.62	16.50	1.66		18.16	24.00	Pass	14	

<standard client >

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	049	6195	0.03	0.04	14.00	12.85	0.35	-0.85	14.35	12.00	30.00	Pass	14	



U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	049	6195	Full	0.00	0.00	13.99	12.97	0.35	-0.85	14.34	12.12	30.00	Pass	14	14
HE40	MCS0	1	051	6205	Full	0.00	0.00	14.02	13.03	0.35	-0.85	14.37	12.18	30.00	Pass	14	14
HE80	MCS0	1	055	6225	Full	0.00	0.00	13.88	13.01	0.35	-0.85	14.23	12.16	30.00	Pass	14	14
HE160	MCS0	1	047	6185	Full	0.00	0.00	14.01	13.13	0.35	-0.85	14.36	12.28	30.00	Pass	14	14

U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	181	6855	0.03	0.04	13.58	13.45	1.02	0.16	14.60	13.61	30.00	Pass	14	14

U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	117	6535	Full	0.00	0.00	13.63	12.76	1.02	0.16	14.65	12.92	30.00	Pass	14	14
HE40	MCS0	1	123	6565	Full	0.00	0.00	13.57	12.76	1.02	0.16	14.59	12.92	30.00	Pass	14	14
HE80	MCS0	1	167	6785	Full	0.00	0.00	13.37	12.76	1.02	0.16	14.39	12.92	30.00	Pass	14	14
HE160	MCS0	1	143	6665	Full	0.00	0.00	13.37	12.91	1.02	0.16	14.39	13.07	30.00	Pass	14	14

<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
11a	6Mbps	2	049	6195	0.03	0.04	14.05	12.92	16.53	0.35		16.88	30.00	Pass	14	

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	049	6195	Full	0.00	0.00	14.02	13.00	16.55	0.35		16.90	30.00	Pass	14	
HE40	MCS0	2	051	6205	Full	0.00	0.00	14.06	13.07	16.60	0.35		16.95	30.00	Pass	14	
HE80	MCS0	2	055	6225	Full	0.00	0.00	13.92	13.05	16.52	0.35		16.87	30.00	Pass	14	
HE160	MCS0	2	047	6185	Full	0.00	0.00	14.06	13.17	16.65	0.35		17.00	30.00	Pass	14	



U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	181	6855	0.03	0.04	13.63	13.60	16.62	1.02		17.64	30.00	Pass	14	

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	117	6535	Full	0.00	0.00	13.68	12.78	16.26	1.02		17.28	30.00	Pass	14	
HE40	MCS0	2	123	6565	Full	0.00	0.00	13.59	12.79	16.22	1.02		17.24	30.00	Pass	14	
HE80	MCS0	2	167	6785	Full	0.00	0.00	13.40	12.83	16.13	1.02		17.15	30.00	Pass	14	
HE160	MCS0	2	143	6665	Full	0.00	0.00	13.42	12.95	16.20	1.02		17.22	30.00	Pass	14	

Conclusion:

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2024	Nov. 05, 2024	Jul. 03, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Nov. 05, 2024	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Nov. 05, 2024	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Nov. 05, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Nov. 05, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Nov. 05, 2024	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 05, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 05, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 05, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 26, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 26, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024~Feb. 11, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 05, 2024	Oct. 09, 2025	CBP (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417 /MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Nov. 05, 2024	Apr. 16, 2025	CBP (DFS01-KS)
Vector Signal Generator	R&S	SMBV100A	258305	9kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	CBP (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 05, 2024	NCR	CBP (DFS01-KS)
Signal Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Conducted (DFS01-KS)
Vector Signal Generator	R&S	SMJ100A	101908	100kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	Conducted (DFS01-KS)



MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY562004 17 /MY59360 210	9kHz~7.2GHz	Apr 17, 2024	Nov. 05, 2024	Apr 16, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7114-M	N/A	0.5GHz~18GHz	NCR	Nov. 05, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required

For NFC:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 11, 2024	Oct. 24, 2024	Oct. 10, 2025	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Oct. 24, 2024	Sep. 07, 2025	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz~1GHz	Aug. 18, 2024	Oct. 24, 2024	Aug. 17, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Oct. 24, 2024	Jan. 02, 2025	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 26, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 26, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)

NCR: No Calibration Required



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 02, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Nov. 02, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Nov. 02, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G, MAX 30dB	Oct. 11, 2024	Oct. 20, 2024	Oct. 10, 2025	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 10, 2024	Oct. 20, 2024	Sep. 09, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 06, 2023	Oct. 20, 2024	Dec. 05, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00227860	1GHz~18GHz	Aug. 16, 2024	Oct. 20, 2024	Aug. 15, 2025	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Oct. 20, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Oct. 20, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Oct. 20, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 05, 2024	Nov. 12, 2024	Jan. 04, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 12, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 ppm

Uncertainty of Conducted Measurement(WIFI 6G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	0.04ppm
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.54%

Uncertainty of Conducted Measurement(NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1%
Frequency	0.04ppm

Uncertainty of Conducted Measurement (DFS)

Test Item	Uncertainty
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.04 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

03CH06-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.08dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22dB
---	--------

03CH02-KS(NFC):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04dB
---	--------



03CH04-KS(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

----- THE END -----



Appendix B. Reference Report



FCC RF Test Report

FCC ID : UZ7EM45A2
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45A2
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : 47 CFR Part 2, and 90(S)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jun. 15, 2024 ~ Aug. 21, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test	6
1.3 Modification of EUT	6
1.4 Maximum Conducted Power and Emission Designator	6
1.5 Testing Site.....	7
1.6 Test Software	7
1.7 Applied Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration and system	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels	10
3 TEST RESULT	11
3.1 Conducted Output Power Measurement.....	11
3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	12
3.3 Emissions Mask Measurement	13
3.4 Emissions Mask – Out Of Band Emissions Measurement.....	15
3.5 Field Strength of Spurious Radiation Measurement	16
3.6 Frequency Stability Measurement.....	19
4 LIST OF MEASURING EQUIPMENT	21
5 MEASUREMENT UNCERTAINTY	22
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG460505F	Rev. 01	Initial issue of report	Sep. 05, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	—	Report only	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	—	Report only	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	$< 50+10\log_{10}(P[\text{Watts}])$	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 39.43 dB at 2448.00 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	$< 2.5 \text{ ppm}$	PASS	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45A2
FCC ID	UZ7EM45A2
IMEI Code	Conducted: 352991990029039/352991990029328 Radiation: 352991990029096/352991990029708
HW Version	EV2.5
SW Version	13-32-08.00-TG-U06-STD-ATH-04
MFD	08AUG24
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO1-01

1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	814 ~ 824 MHz
Rx Frequency	859 ~ 869 MHz
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz
Maximum Output Power to Antenna	23.47 dBm
Antenna Gain	-3.00 dBi for Ant0, -2.11 dBi for Ant1
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM

Note: The maximum power of Ant.0 is shown in the report.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Maximum Conducted Power and Emission Designator

LTE Band 26		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
1.4	814.7 ~ 823.3	0.2213	1M09G7D	0.1742	1M09W7D
3	815.5 ~ 822.5	0.2223	2M71G7D	0.1687	2M73W7D
5	816.5 ~ 821.5	0.2223	4M47G7D	0.1742	4M49W7D
10	819.0	0.2099	9M03G7D	0.1648	8M95W7D
15	824	0.2203	13M4G7D	0.1832	13M5W7D

Note: All modulations have been tested, and only the worst test results are shown in the report.



1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS 03CH04-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	SPORTON	FCC LTE_Ver2.0 Auto_china_210503	2.0
2.	03CH04-KS	AUDIX	E3	210616

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR 90(S)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 971168 D02 Misc Rev Approv License Devices v02r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission. (X-Plane)

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16 QAM	64 QAM	256 QAM	1	Half	Full	L	M	H
Max. Output Power	26	v	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	26	v	v	v	v		-	v	v					v		v	
	26					v	-	v	v					v			v
Emission masks In-band emissions	26	v	v	v	v	v	-	v	v	v	v	v		v	v		v
Emission masks – Out of band emissions	26	v	v	v	v	v	-	v					v			v	v
Frequency Stability	26				v		-	v						v		v	
Radiated Spurious Emission	26	Worse Case														v	
																	v
Note	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. ERP over 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.																

2.2 Connection Diagram of Test System

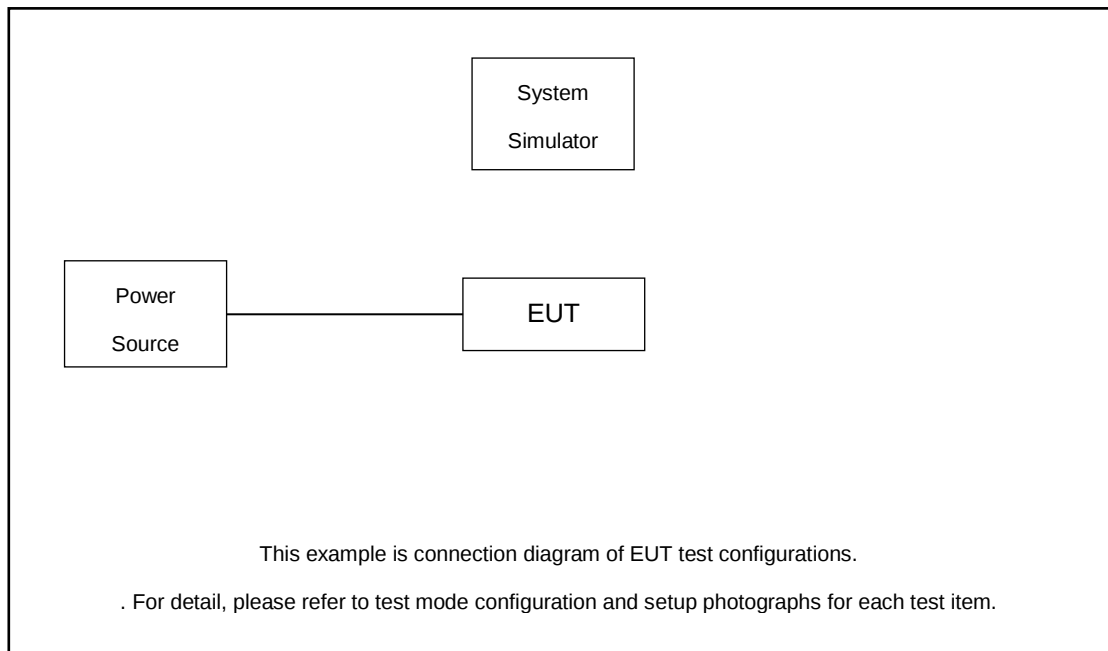

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

The following shows an offset computation example with RF cable loss 4.8 dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 4.80 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	26740	-
	Frequency	-	819	-
5	Channel	26715	26740	26765
	Frequency	816.5	819	821.5
3	Channel	26705	26740	26775
	Frequency	815.5	819	822.5
1.4	Channel	26697	26740	26783
	Frequency	814.7	819	823.3

LTE Band 26 Cross-rule Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	-	Highest	-
15	Channel	-	26790	-
	Frequency	-	824	-
10	Channel	-	26790	-
	Frequency	-	824	-
5	Channel	-	26790	-
	Frequency	-	824	-
3	Channel	-	26790	-
	Frequency	-	824	-
1.4	Channel	-	26790	-
	Frequency	-	824	-

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.1.4 Test Setup

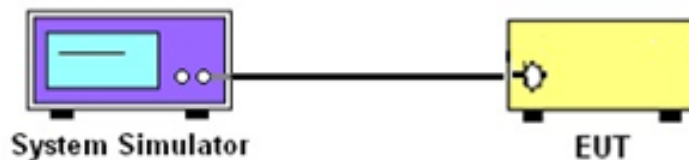

3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

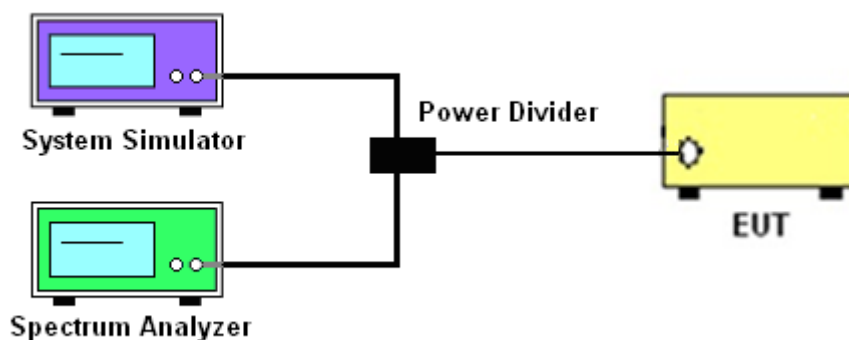

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a):

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The emissions mask of low and high channels for the highest RF powers were measured.
3. The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor $10 \log (1\% \text{ of OBW/measured RBW})(\text{dB})$ was compensated, if required.
4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

3.3.4 Test Setup

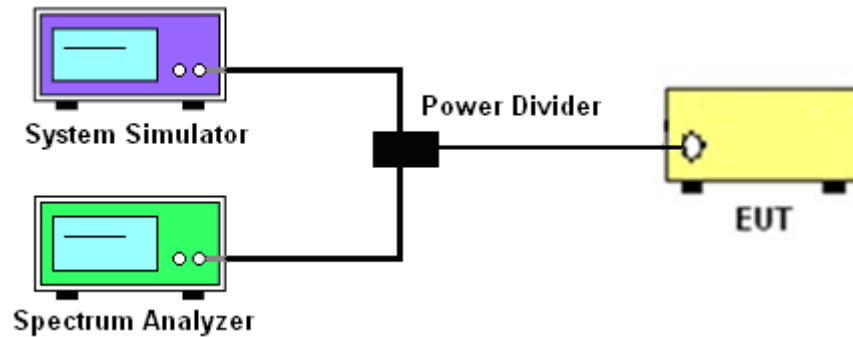

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

3.4 Emissions Mask – Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least $43 + 10 \log (P)$ dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.4.4 Test Setup

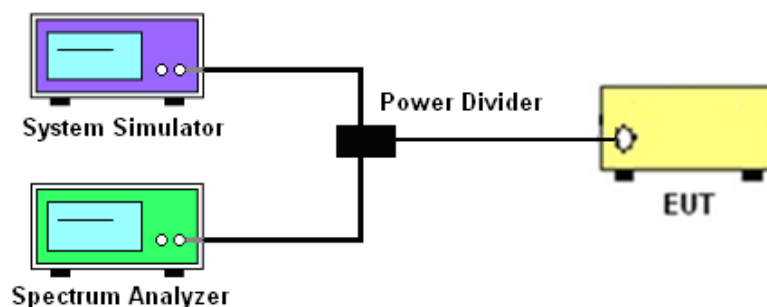

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log_{10}(P[\text{Watts}])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11. $\text{ERP (dBm)} = \text{EIRP} - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)

3.5.4 Test Setup


For radiated test from 30MHz

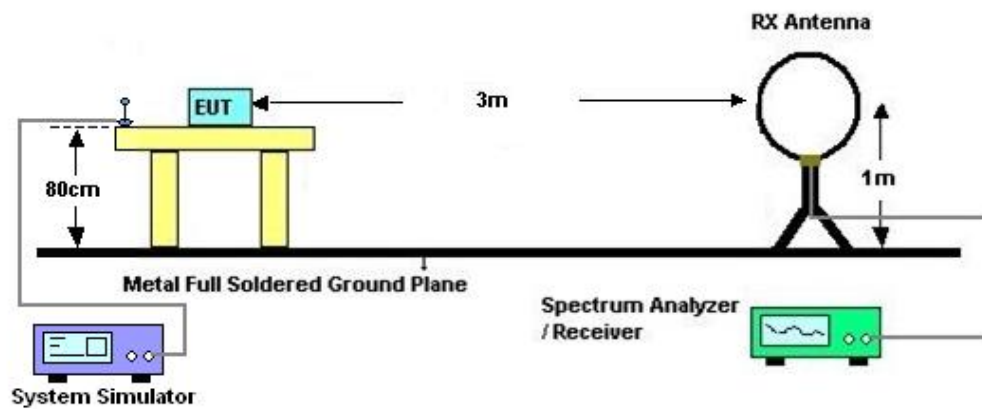

For radiated test from 30MHz to 1GHz

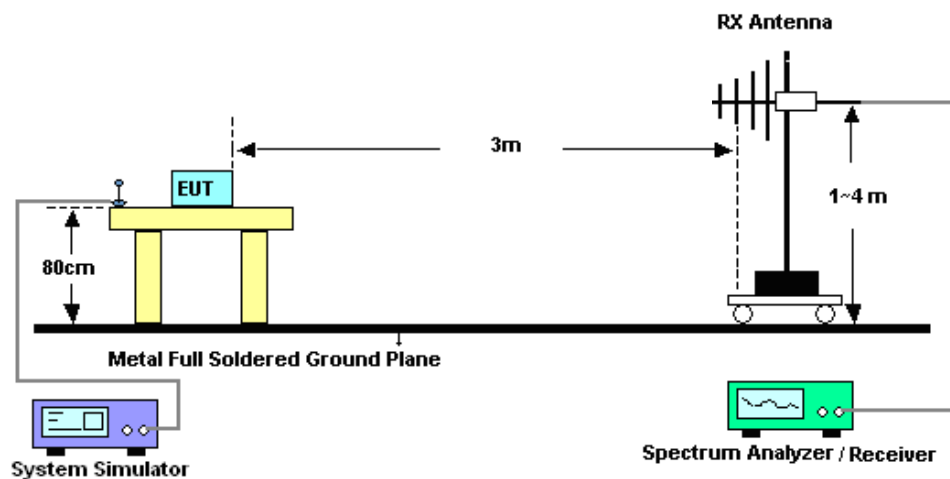

For radiated test above 1GHz

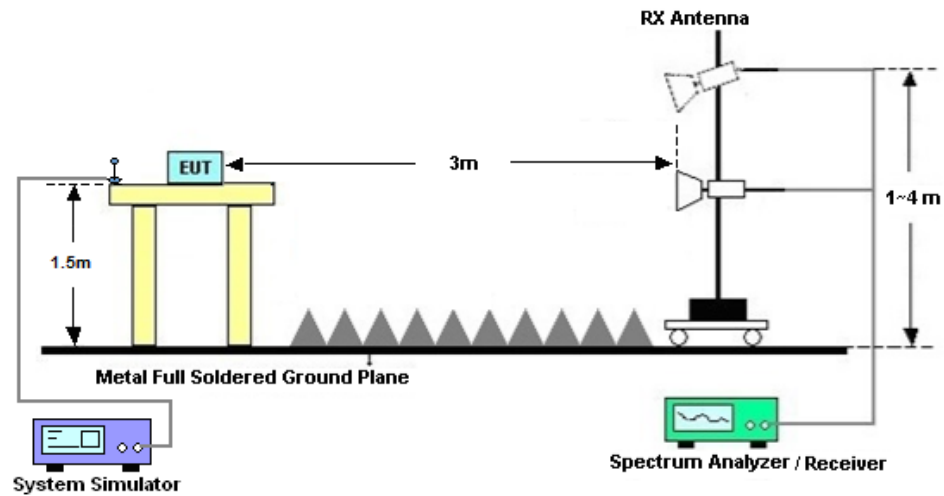

3.5.5 Test Result of Field Strength of Spurious Radiated

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.6.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
3. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the
4. battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

3.6.5 Test Setup

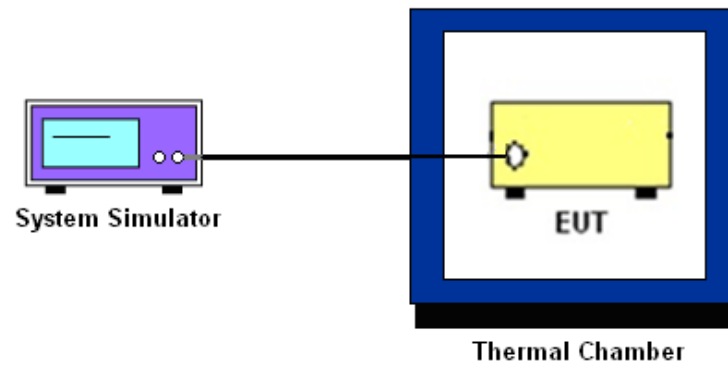

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jun. 15, 2024~ Jun. 17, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Jun. 15, 2024~ Jun. 17, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H201401144 0	-40~+150°C 20%~95%RH	Jul. 05, 2023	Jun. 15, 2024~ Jun. 17, 2024	Jul. 04, 2024	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY5747107 9	10Hz~44G, MAX 30dB	Oct. 11, 2023	Jun. 27, 2024~ Aug. 21, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Jun. 27, 2024~ Aug. 21, 2024	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 19, 2023	Jun. 27, 2024~ Aug. 21, 2024	Aug. 18, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 18, 2024		Aug. 17, 2025	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Jun. 27, 2024~ Aug. 21, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Jun. 27, 2024~ Aug. 21, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Jun. 27, 2024~ Aug. 21, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Jun. 27, 2024~ Aug. 21, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz~18Ghz	Oct. 11, 2023	Jun. 27, 2024~ Aug. 21, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz~18Ghz	Oct. 11, 2023	Jun. 27, 2024~ Aug. 21, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 27, 2024~ Aug. 21, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 27, 2024~ Aug. 21, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 27, 2024~ Aug. 21, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	± 2.26 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.46 dB
Peak to Average Ratio	± 0.46 dB
Frequency Stability	± 0.4 Hz

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82
---	------

----- THE END -----



Appendix A. Test Results of Conducted Test


Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%


Conducted Output Power (Average power)

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				-	-	26790
Frequency (MHz)				-	-	824
15	QPSK	1	0	-	-	23.41
15	QPSK	1	74	-	-	23.43
15	QPSK	75	0	-	-	22.57
15	16QAM	1	0	-	-	22.63
15	64QAM	1	0	-	-	21.51
15	256QAM	1	0	-	-	18.65
Channel				-	26740	-
Frequency (MHz)				-	819	-
10	QPSK	1	0	-	23.16	-
10	QPSK	1	49	-	23.22	-
10	QPSK	50	0	-	22.51	-
10	16QAM	1	0	-	22.17	-
10	64QAM	1	0	-	21.43	-
10	256QAM	1	0	-	18.57	-
Channel				26715	26740	26765
Frequency (MHz)				816.5	819	821.5
5	QPSK	1	0	23.43	23.47	23.44
5	16QAM	1	0	22.41	22.31	22.35
Channel				26705	26740	26775
Frequency (MHz)				815.5	819	822.5
3	QPSK	1	0	23.47	23.43	23.39
3	16QAM	1	0	22.16	22.27	22.19
Channel				26697	26740	26783
Frequency (MHz)				814.7	819	823.3
1.4	QPSK	1	0	23.41	23.37	23.45
1.4	16QAM	1	0	22.38	22.31	22.41

Peak-to-Average Ratio

Mode	LTE Band 26 / 15MHz				
Mod.	QPSK	16QAM	64QAM	256QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
High CH	5.10	6.00	6.67	6.72	PASS

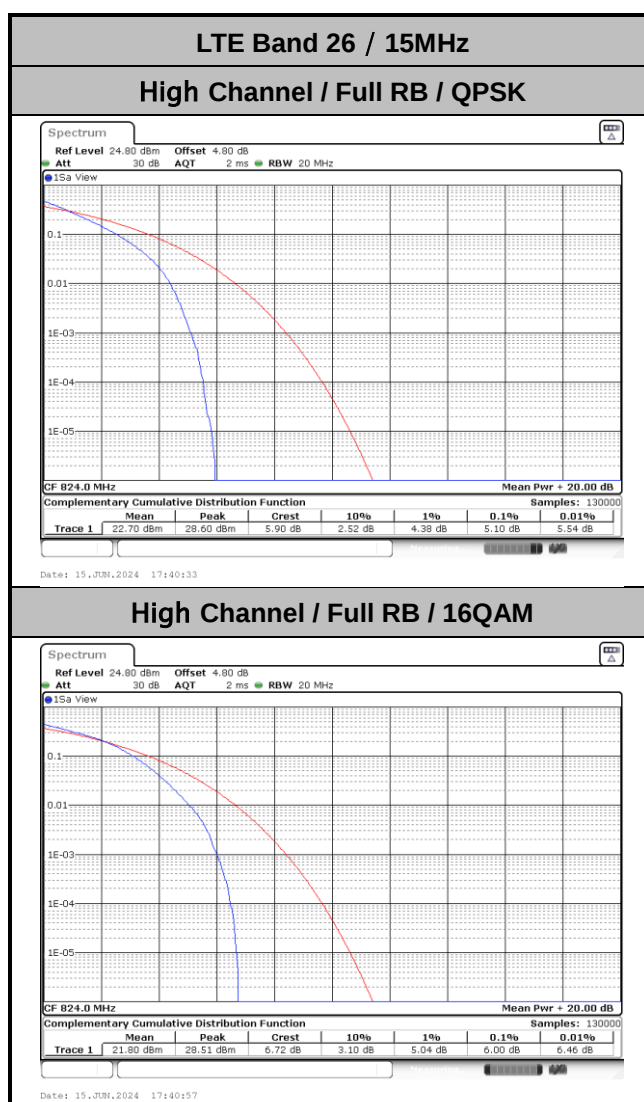

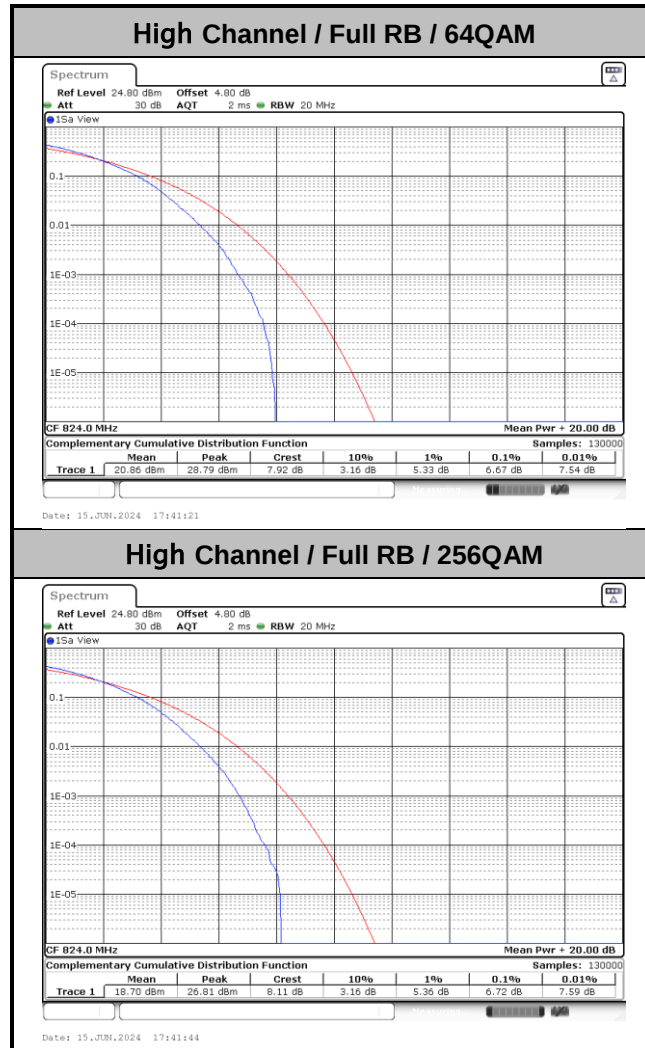




26dB Bandwidth

Mode	LTE Band 26 : 26dB BW(MHz)	
BW	15MHz	
Mod.	QPSK	16QAM
Hig CH	14.45	14.18
BW	10MHz	
Mod.	QPSK	16QAM
Mid CH	9.83	9.69
BW	5MHz	
Mod.	QPSK	16QAM
Mid CH	4.92	4.90
BW	3MHz	
Mod.	QPSK	16QAM
Mid CH	3.03	3.03
BW	1.4MHz	
Mod.	QPSK	16QAM
Mid CH	1.24	1.23




LTE Band 26


Highest Channel / 15MHz / QPSK

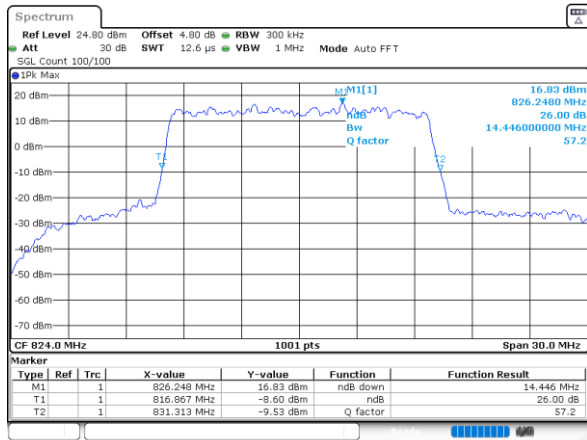


Highest Channel / 15MHz / 16QAM

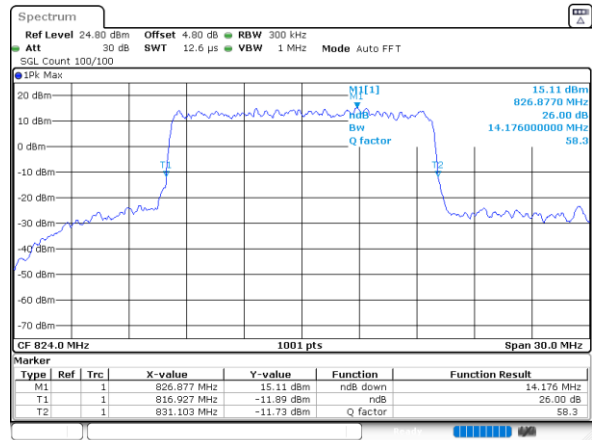

Middle Channel / 10MHz / QPSK

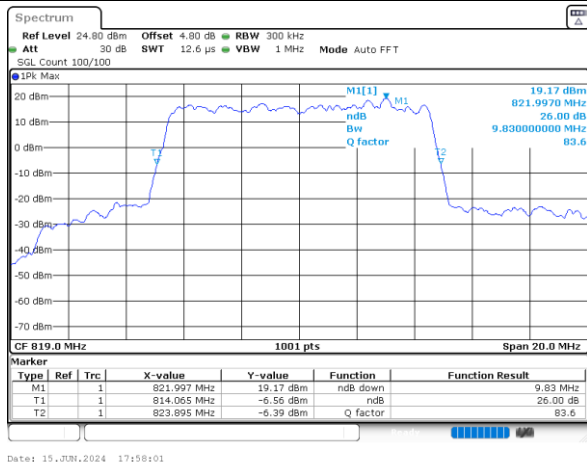


Middle Channel / 10MHz / 16QAM

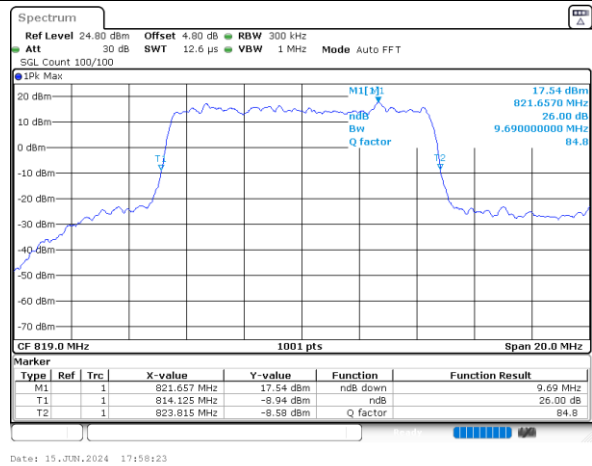


LTE Band 26

Middle Channel/ 5MHz / QPSK

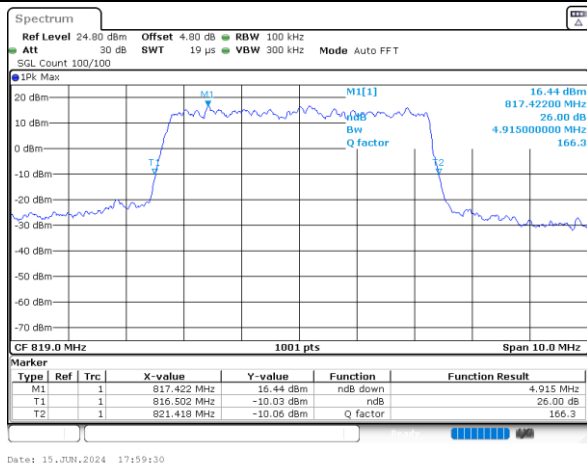


Middle Channel/ 5MHz / 16QAM

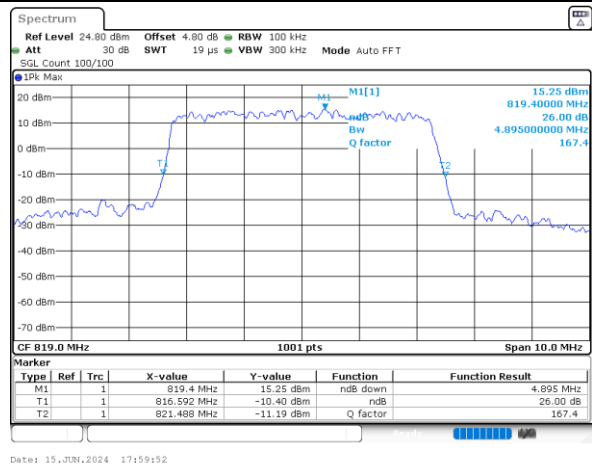




LTE Band 26

Middle Channel / 3MHz / QPSK

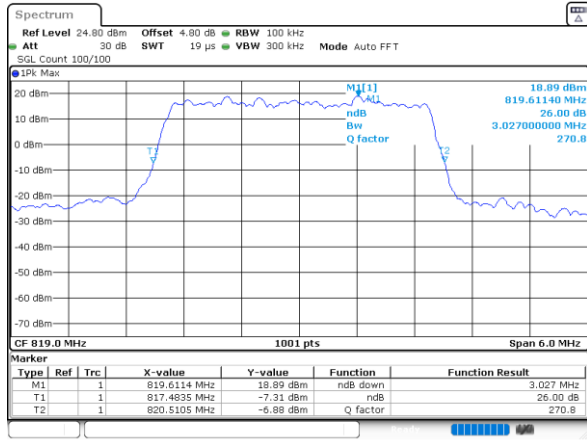

Date: 15 JUN 2024 18:00:59


Middle Channel / 3MHz / 16QAM

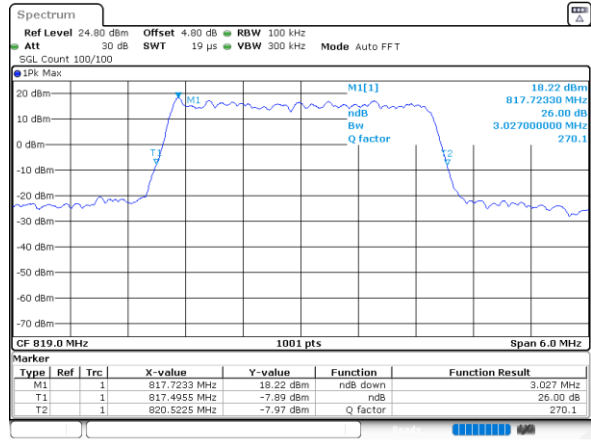

Date: 15 JUN 2024 18:01:21


LTE Band 26

Middle Channel/ 1.4MHz / QPSK

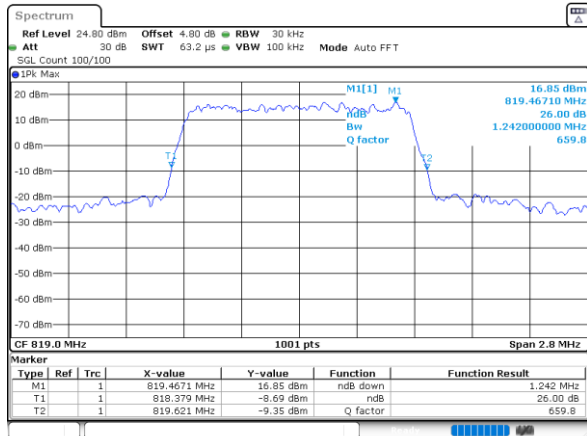

Date: 15 JUN 2024 18:06:46

Middle Channel / 1.4MHz / 16QAM

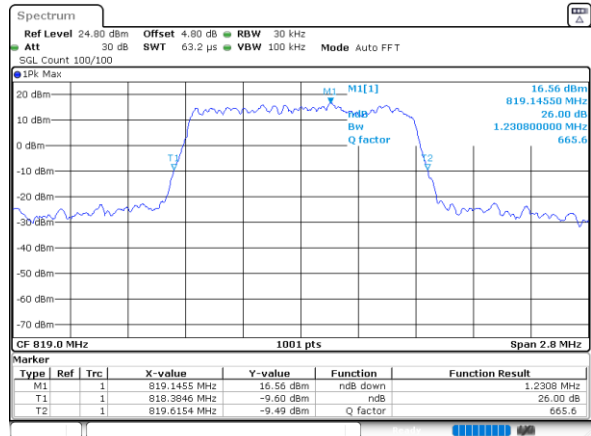

Date: 15 JUN 2024 18:07:09


**Occupied Bandwidth**

Mode	LTE Band 26 : 99%OBW(MHz)	
BW	15MHz	
Mod.	QPSK	16QAM
HigCH	13.43	13.52
BW	10MHz	
Mod.	QPSK	16QAM
Mid CH	9.03	8.95
BW	5MHz	
Mod.	QPSK	16QAM
Mid CH	4.47	4.49
BW	3MHz	
Mod.	QPSK	16QAM
Mid CH	2.71	2.73
BW	1.4MHz	
Mod.	QPSK	16QAM
Mid CH	1.09	1.09




LTE Band 26

Highest Channel / 15MHz / QPSK

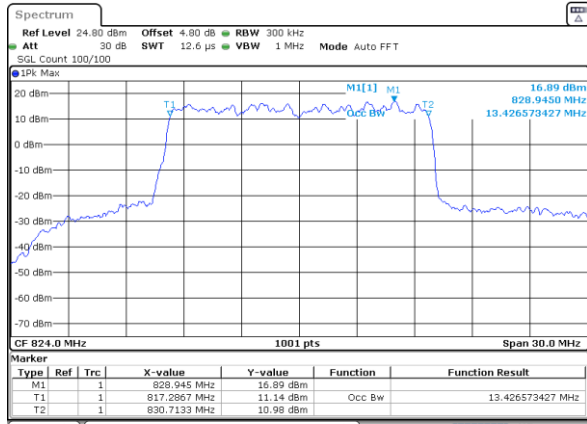


Date: 15 JUN 2024 17:39:25

Highest Channel / 15MHz / 16QAM

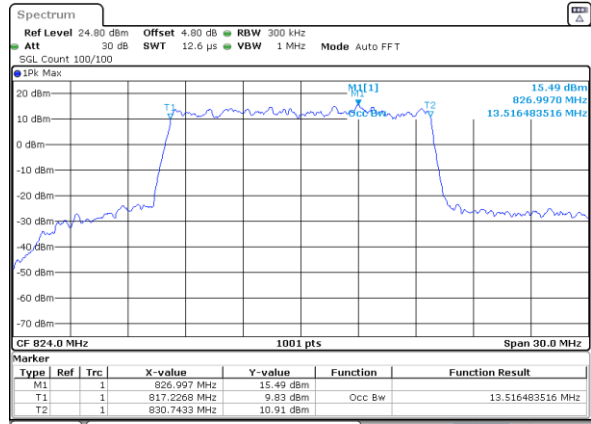


Date: 15 JUN 2024 17:39:47

Middle Channel/ 10MHz / QPSK

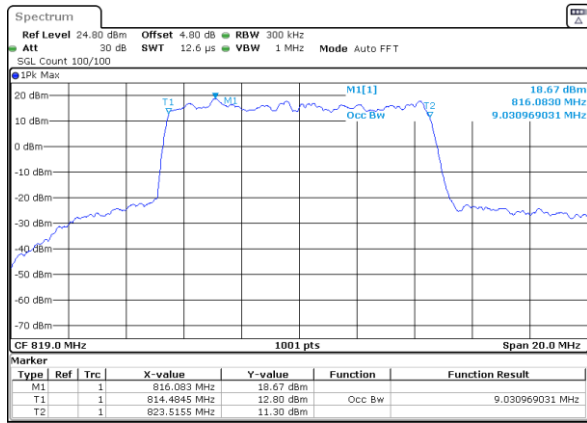

Date: 15 JUN 2024 17:57:39


Middle Channel/ 10MHz / 16QAM

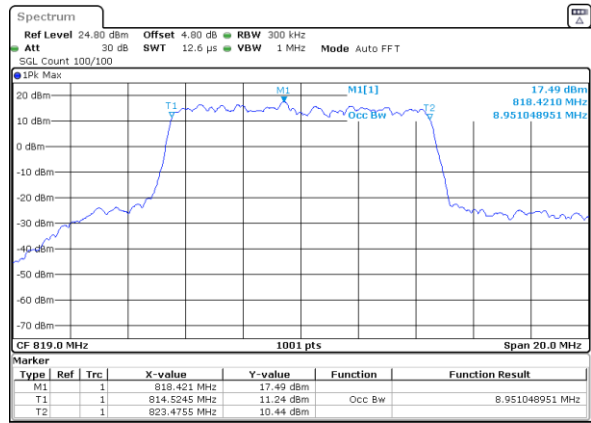

Date: 15 JUN 2024 17:58:45


LTE Band 26

Middle Channel/ 5MHz / QPSK

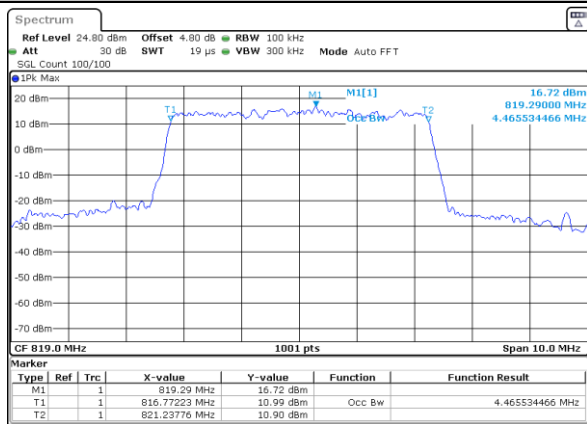

Date: 15 JUN 2024 17:59:08

Middle Channel/ 5MHz / 16QAM

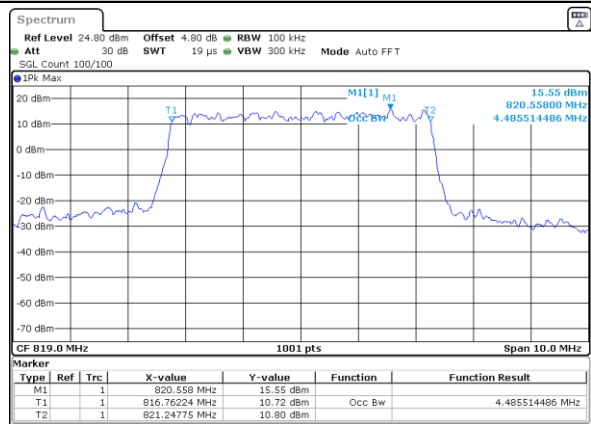


Date: 15 JUN 2024 18:00:14




LTE Band 26

Middle Channel / 3MHz / QPSK

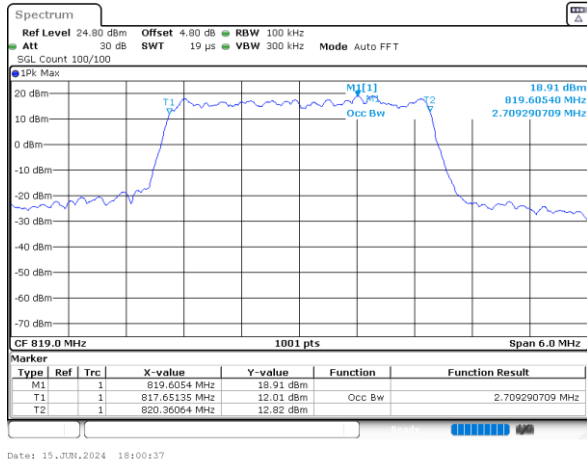


Middle Channel/ 3MHz / 16QAM

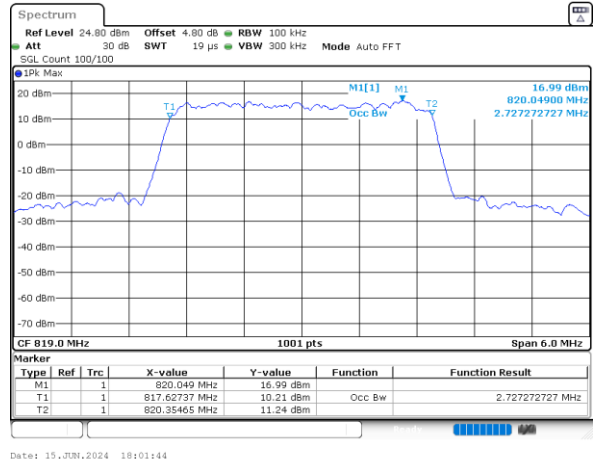






LTE Band 26

Middle Channel / 1.4MHz / QPSK

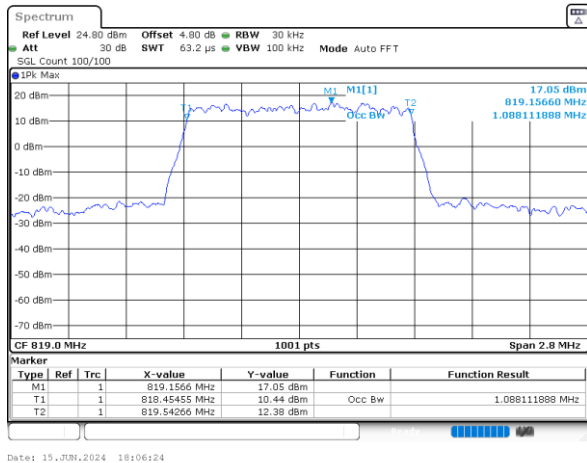

Middle Channel / 1.4MHz / 16QAM

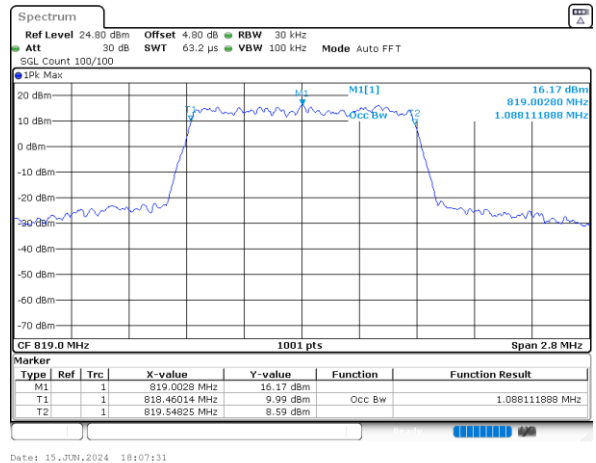


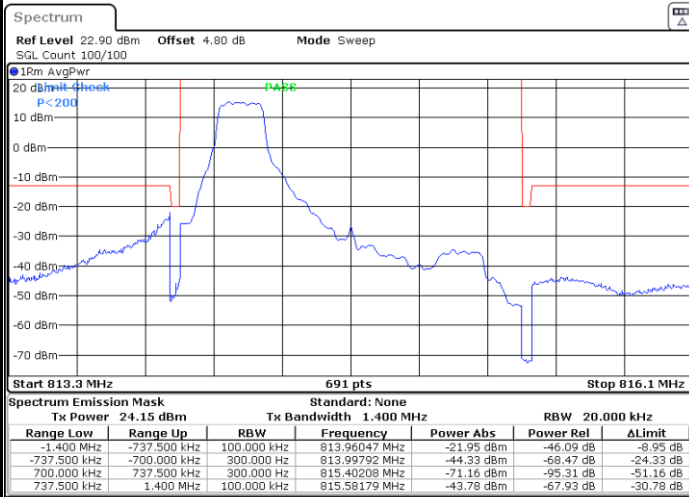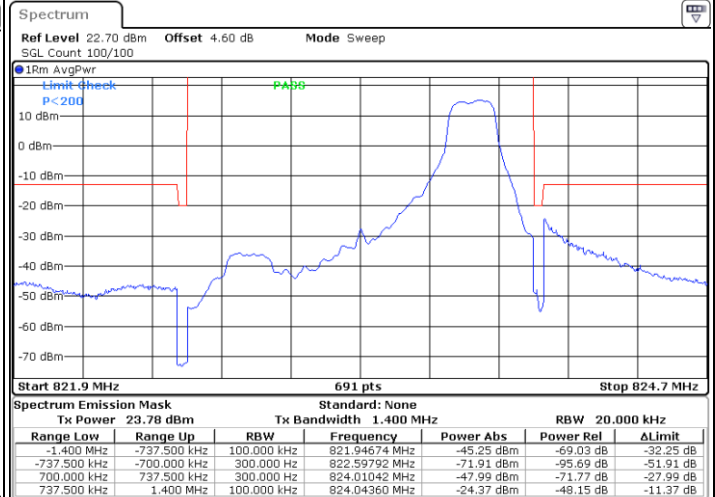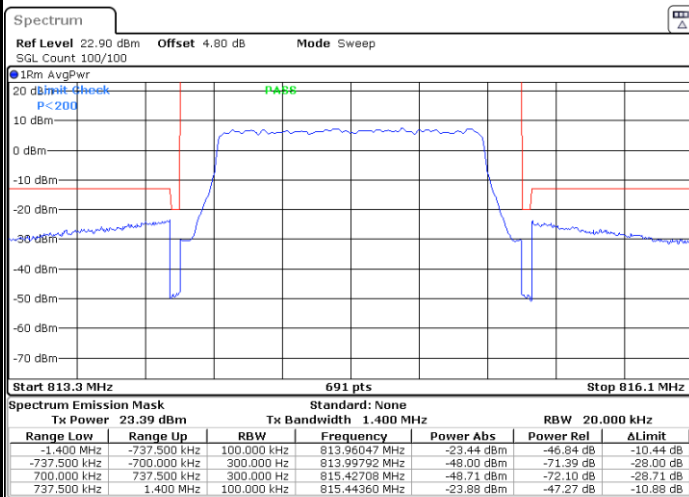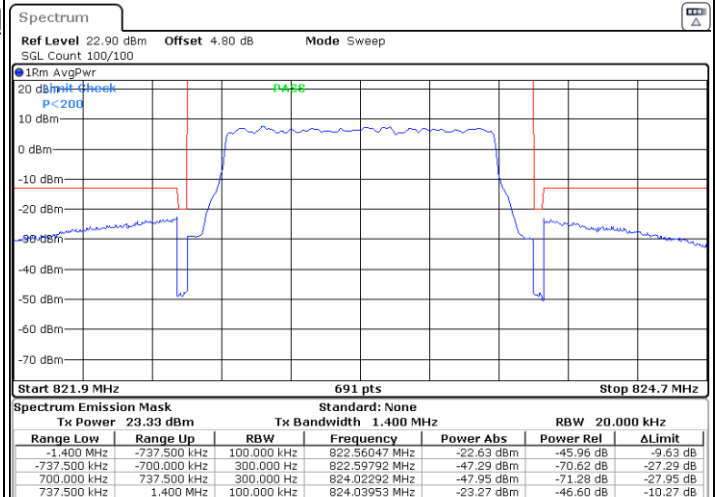**Conducted Band Edge****LTE Band 26 / 1.4MHz / QPSK****Lowest Band Edge / 1RB****Highest Band Edge / 1RB****Lowest Band Edge / Full RB****Highest Band Edge / Full RB**




LTE Band 26 / 1.4MHz / 16QAM


Lowest Band Edge / 1 RB

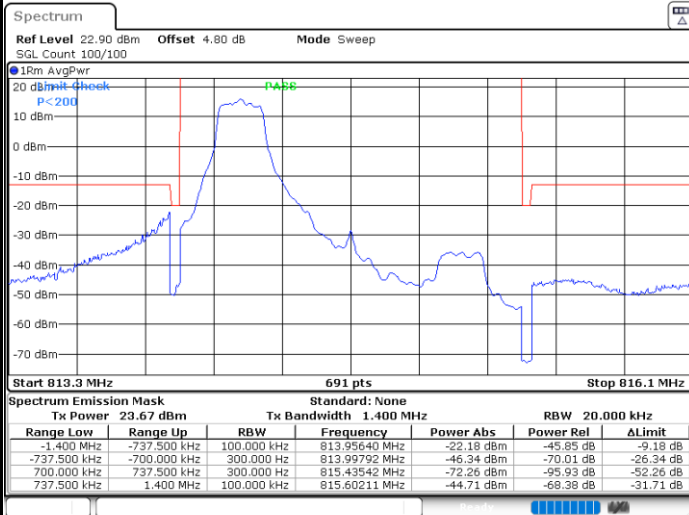


Highest Band Edge / 1 RB

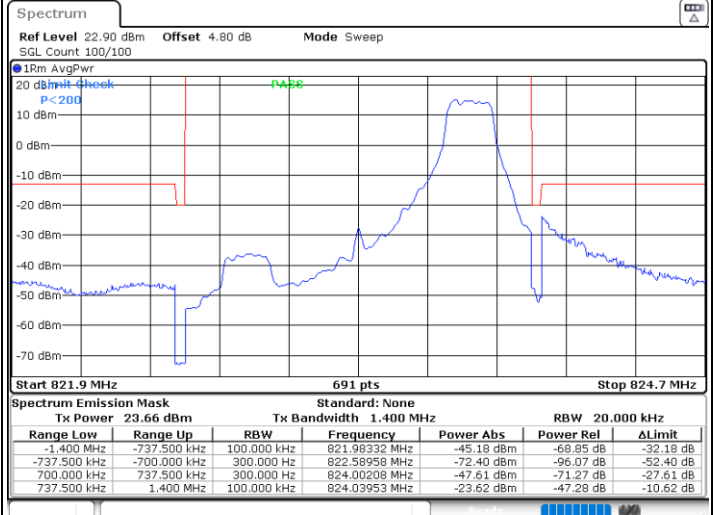

Lowest Band Edge / Full RB

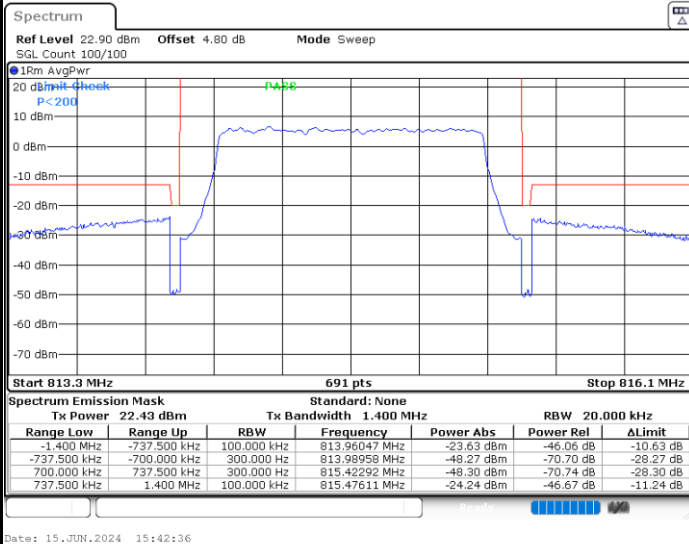


Highest Band Edge / Full RB

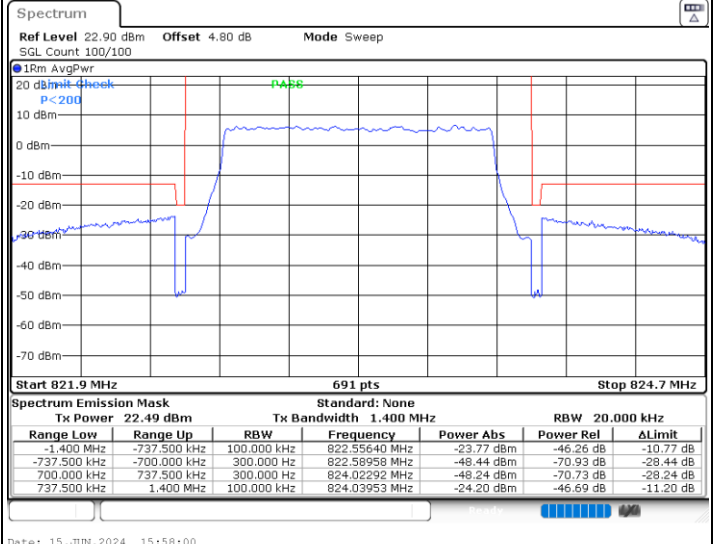




LTE Band 26 / 1.4MHz / 64QAM


Lowest Band Edge / 1 RB

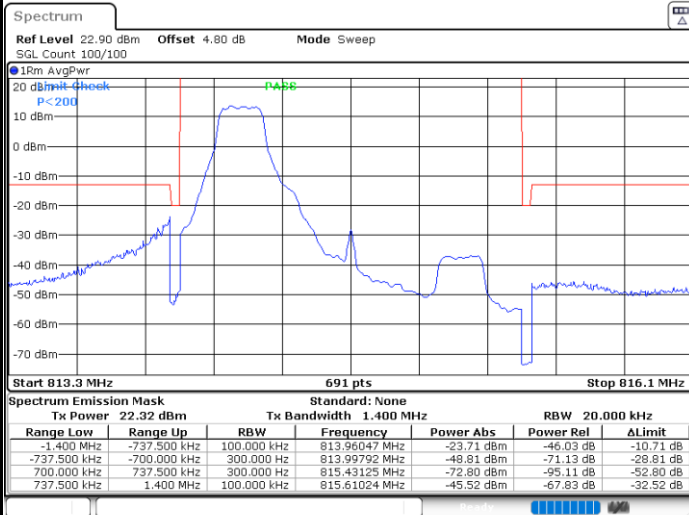


Highest Band Edge / 1 RB

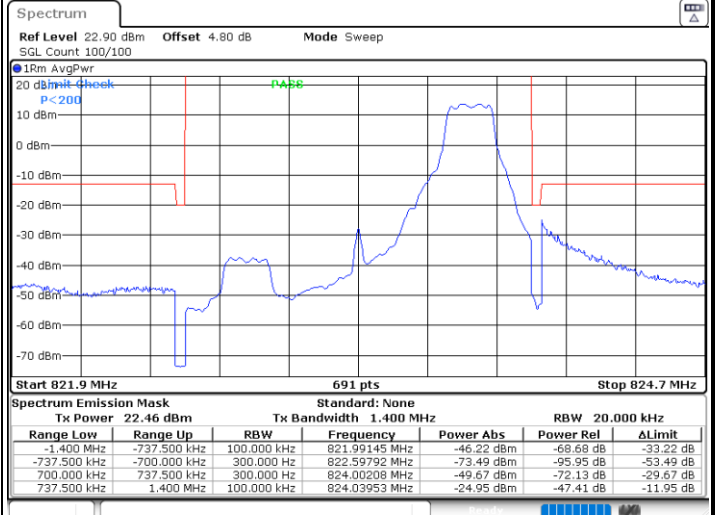

Lowest Band Edge / Full RB

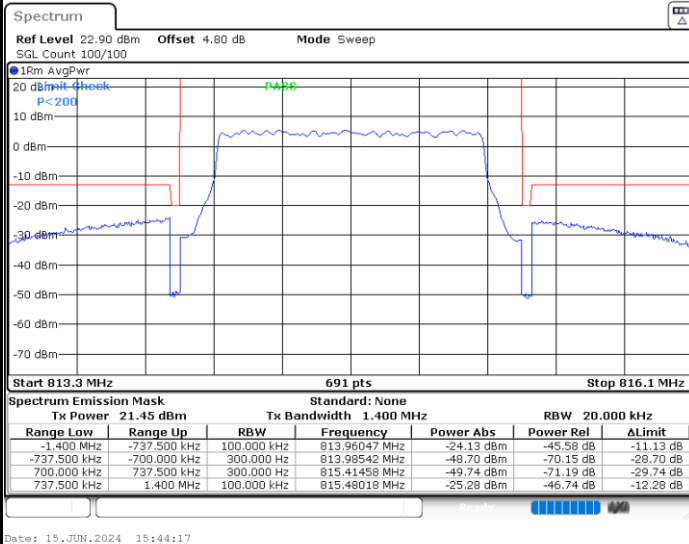


Highest Band Edge / Full RB

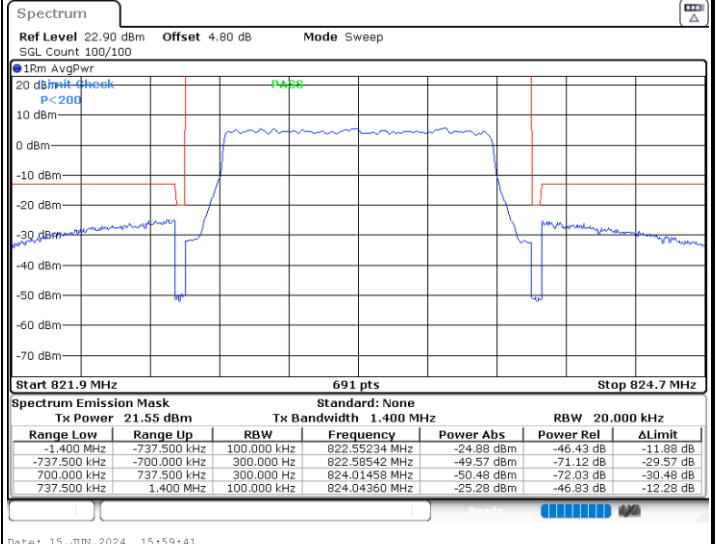




LTE Band 26 / 1.4MHz / 256QAM


Lowest Band Edge / 1 RB

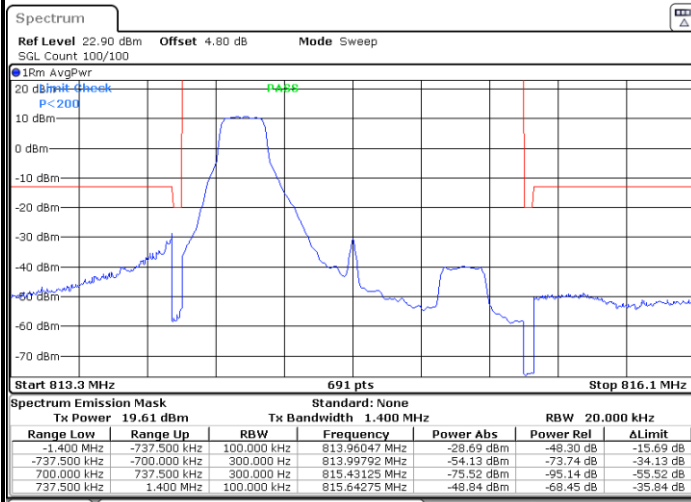


Highest Band Edge / 1 RB

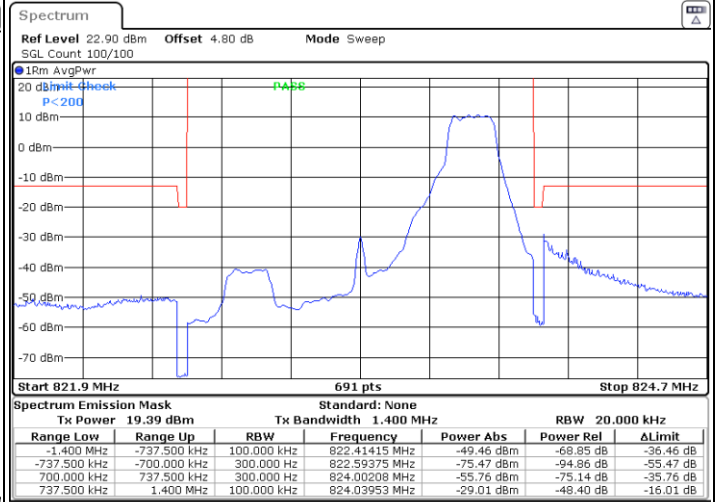

Lowest Band Edge / Full RB

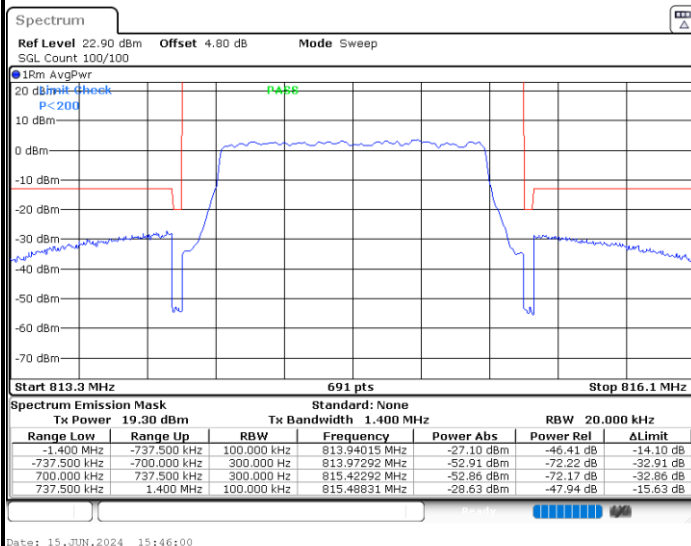


Highest Band Edge / Full RB

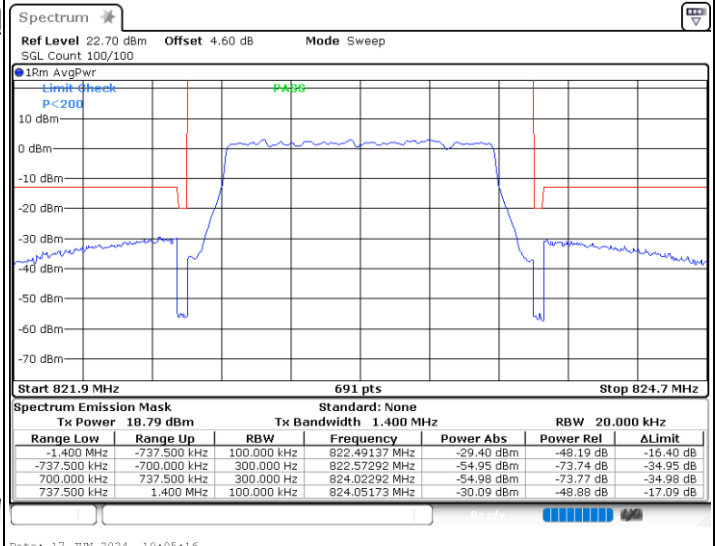




LTE Band 26 / 3MHz / QPSK


Lowest Band Edge / 1RB

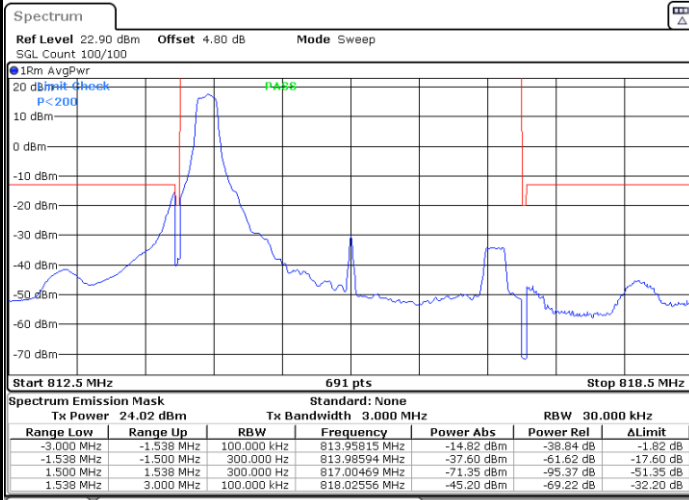


Highest Band Edge / 1 RB

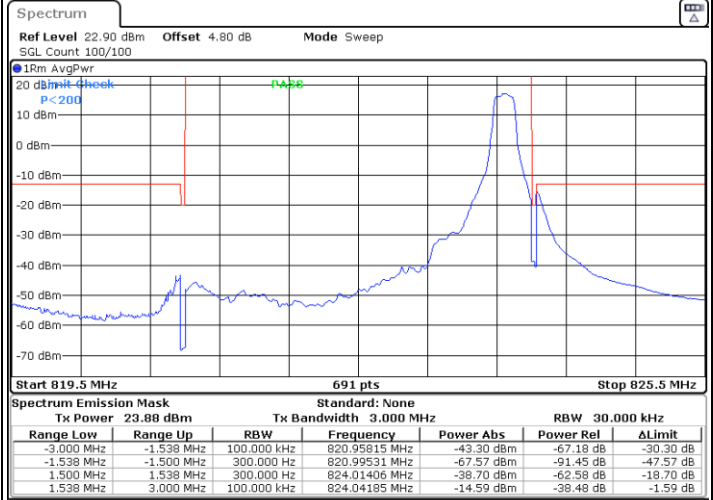

Lowest Band Edge / Full RB

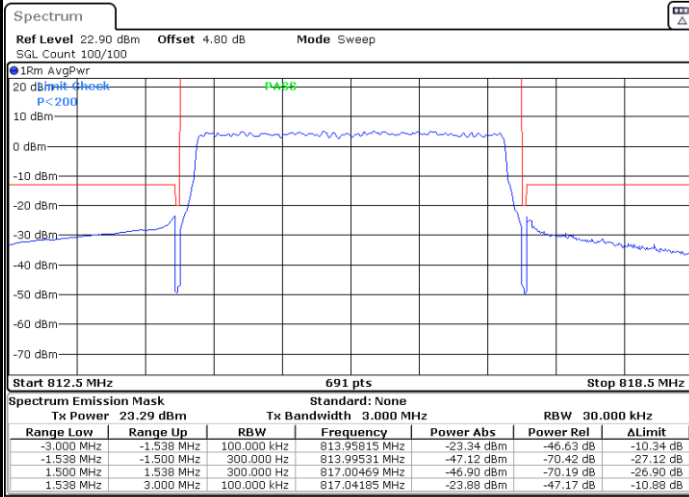


Highest Band Edge / Full RB

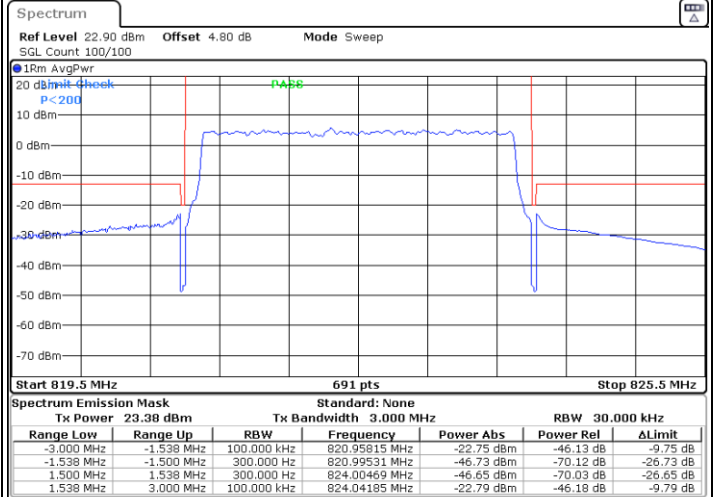




LTE Band 26 / 3MHz / 16QAM


Lowest Band Edge / 1 RB

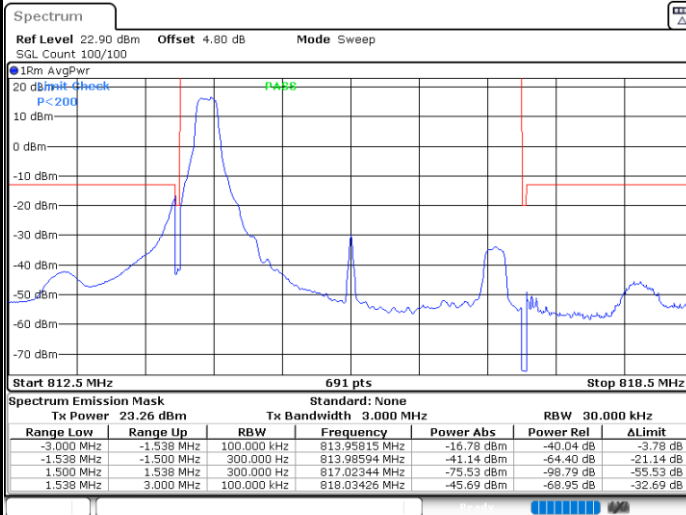


Highest Band Edge / 1 RB

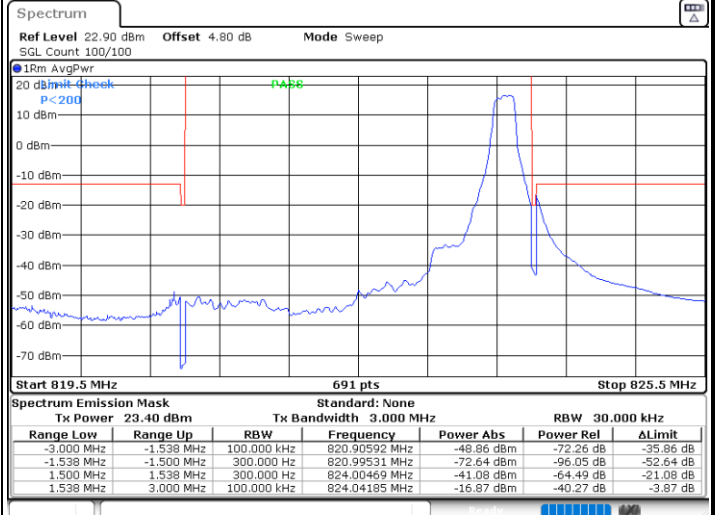

Lowest Band Edge / Full RB

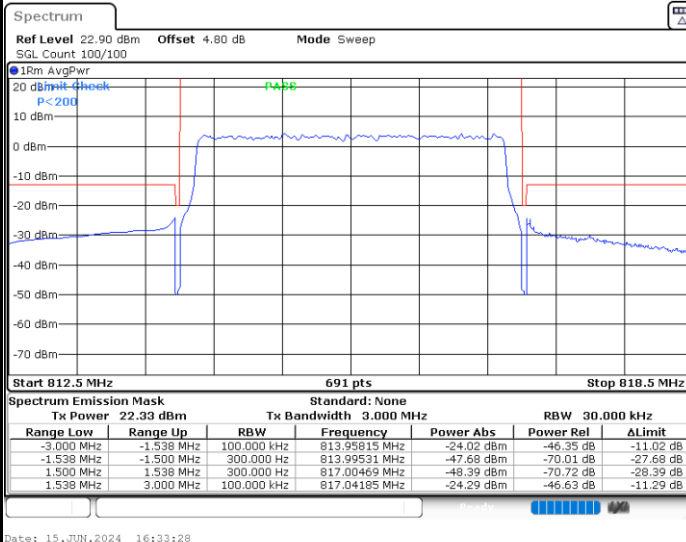


Highest Band Edge / Full RB

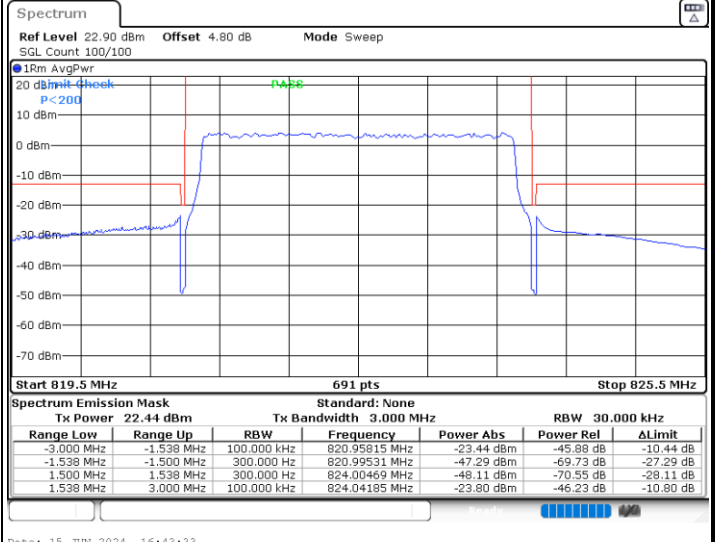




LTE Band 26 / 3MHz / 64QAM


Lowest Band Edge / 1 RB

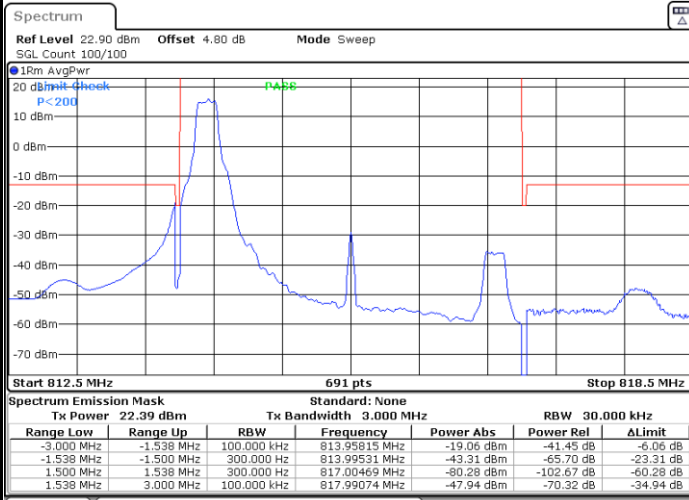


Highest Band Edge / 1 RB

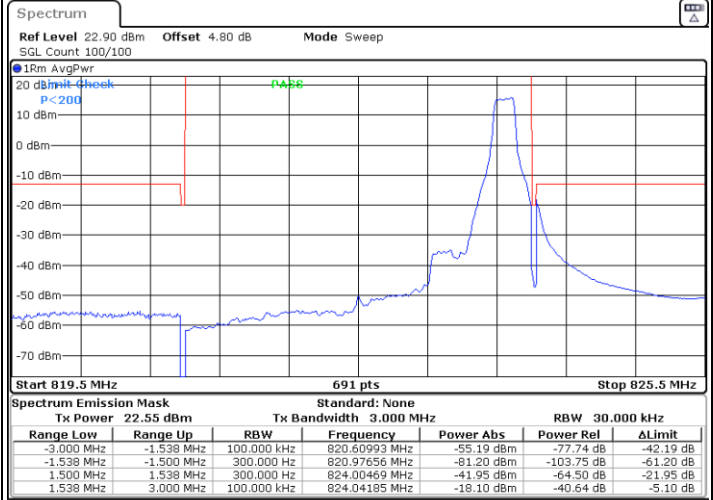

Lowest Band Edge / Full RB

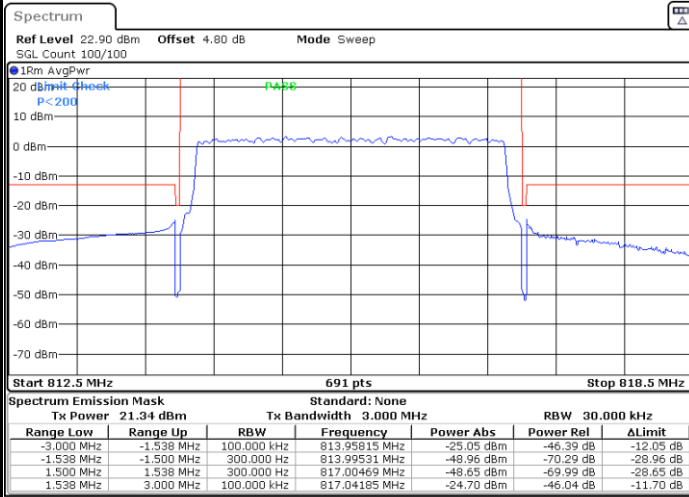


Highest Band Edge / Full RB

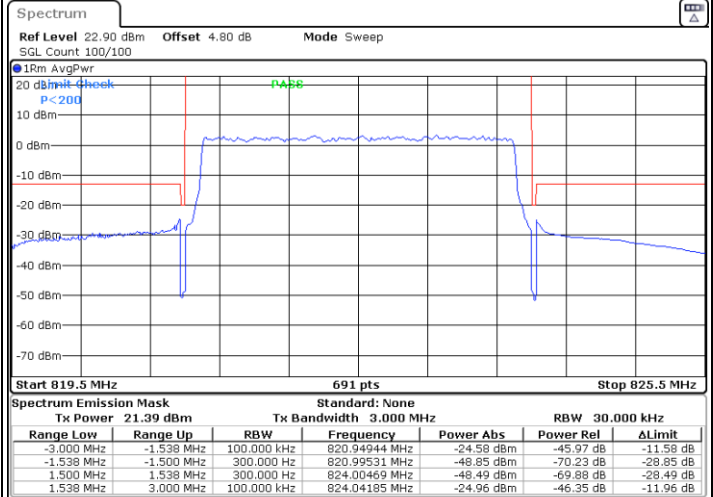




LTE Band 26 / 3MHz / 256QAM


Lowest Band Edge / 1 RB

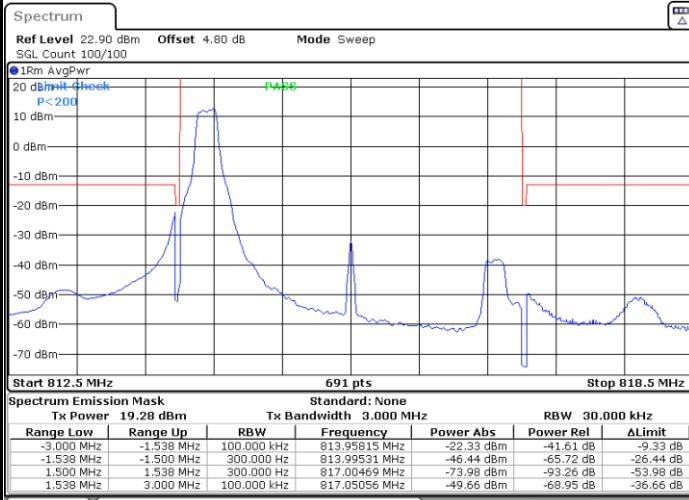


Highest Band Edge / 1 RB

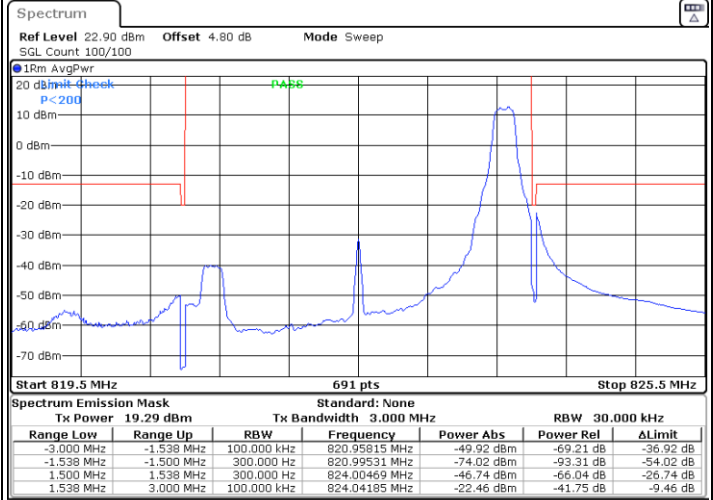

Lowest Band Edge / Full RB

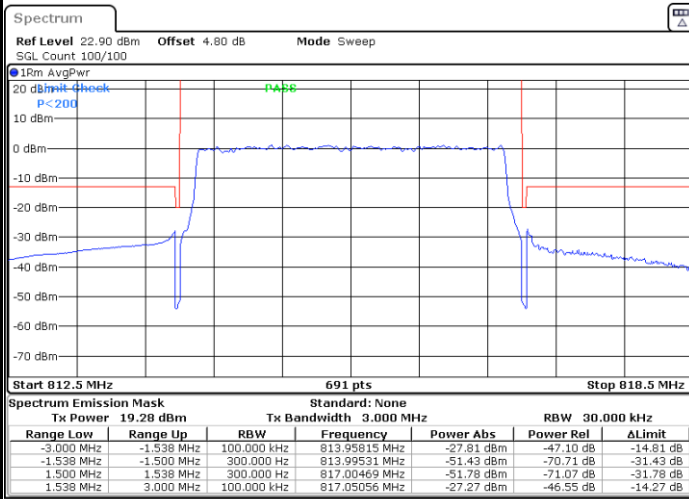


Highest Band Edge / Full RB

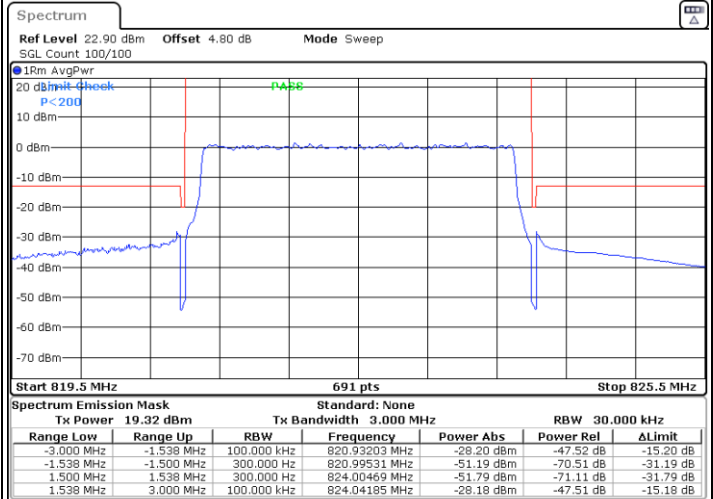




LTE Band 26 / 5MHz / QPSK


Lowest Band Edge / 1 RB

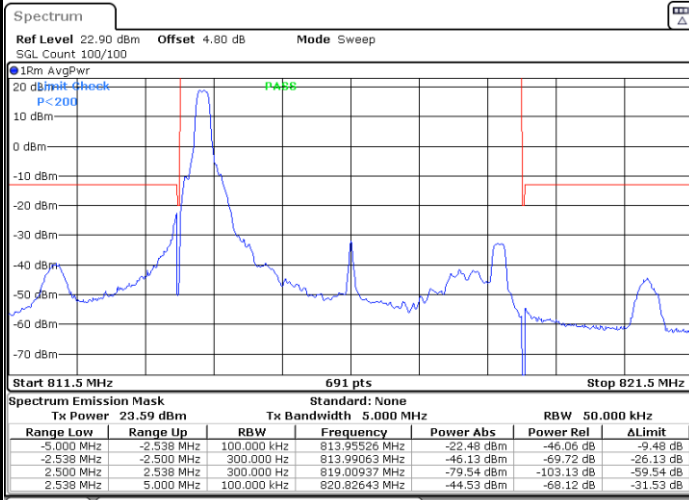


Highest Band Edge / 1 RB

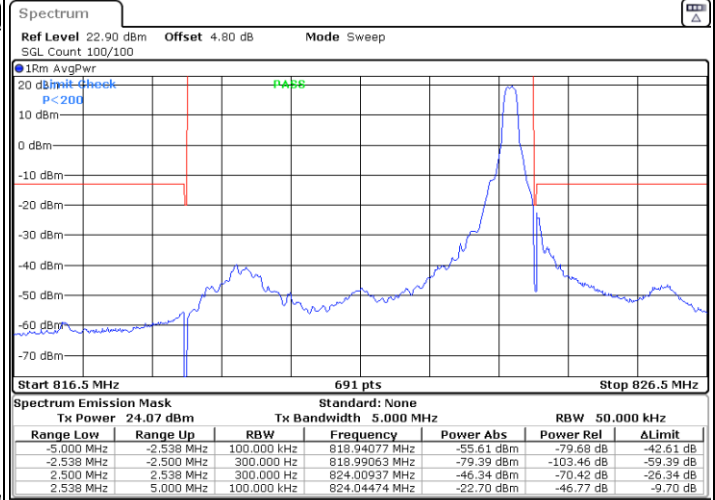

Lowest Band Edge / Full RB

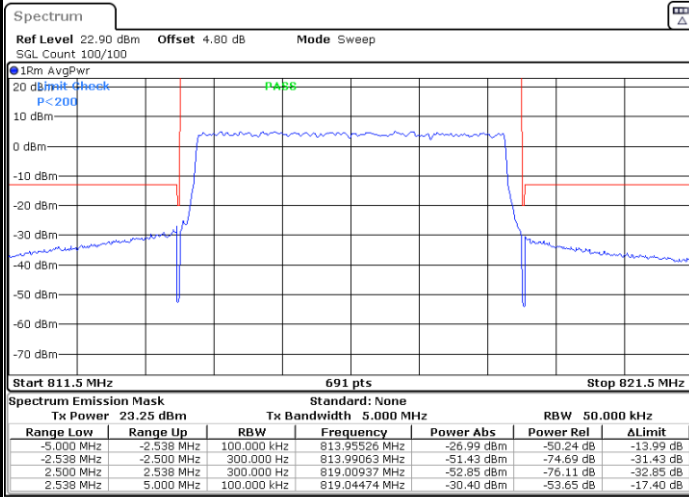


Highest Band Edge / Full RB

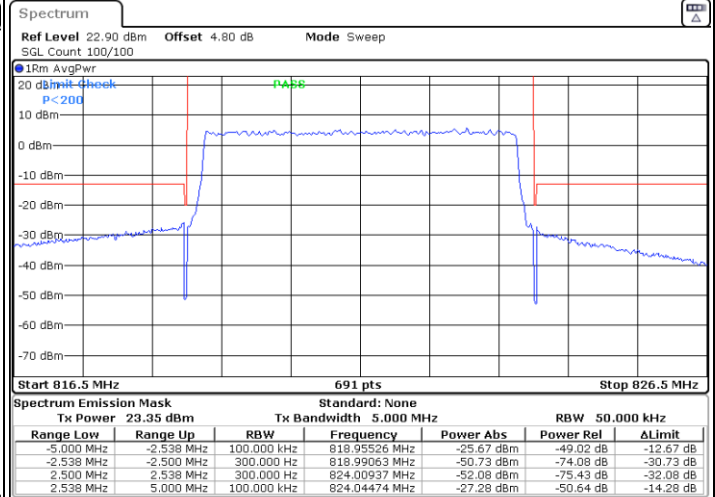




LTE Band 26 / 5MHz / 16QAM


Lowest Band Edge / 1RB

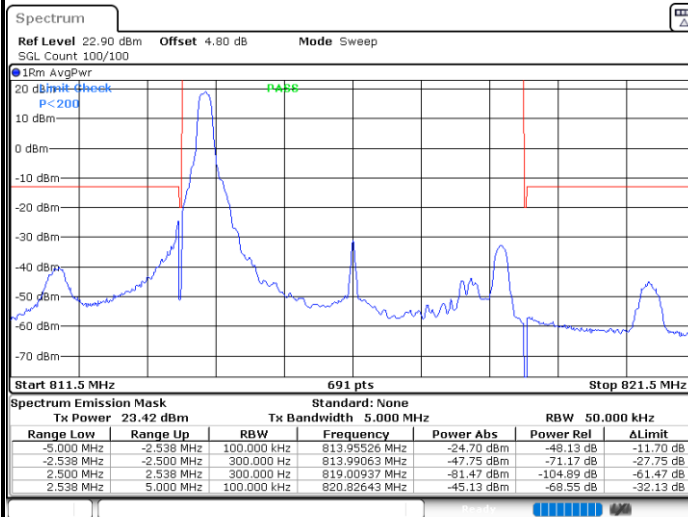


Highest Band Edge / 1 RB

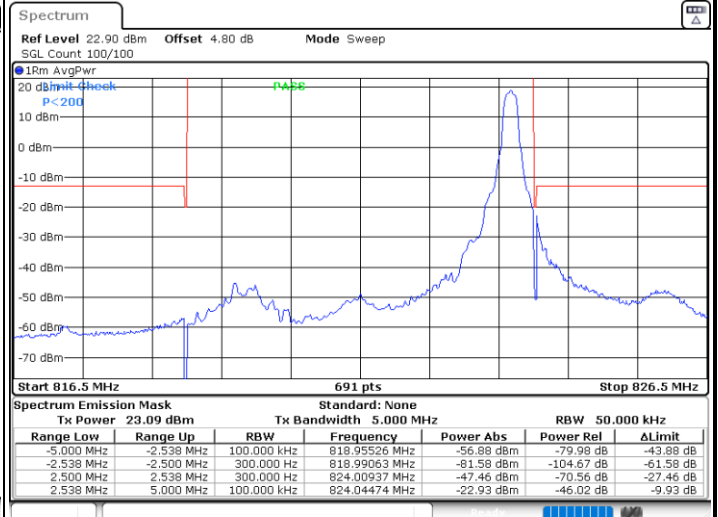

Lowest Band Edge / Full RB

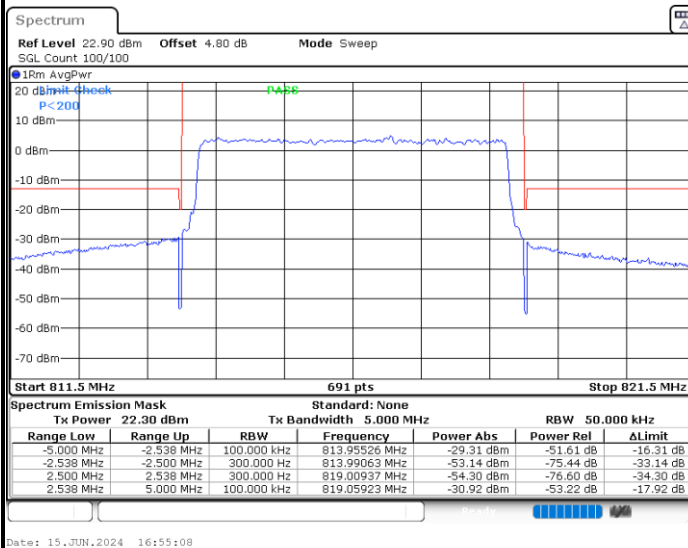


Highest Band Edge / Full RB

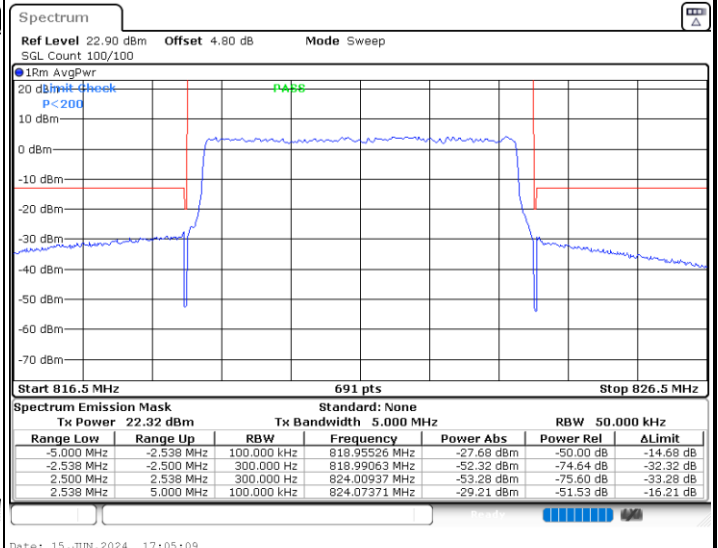




LTE Band 26 / 5MHz / 64QAM


Lowest Band Edge / 1RB

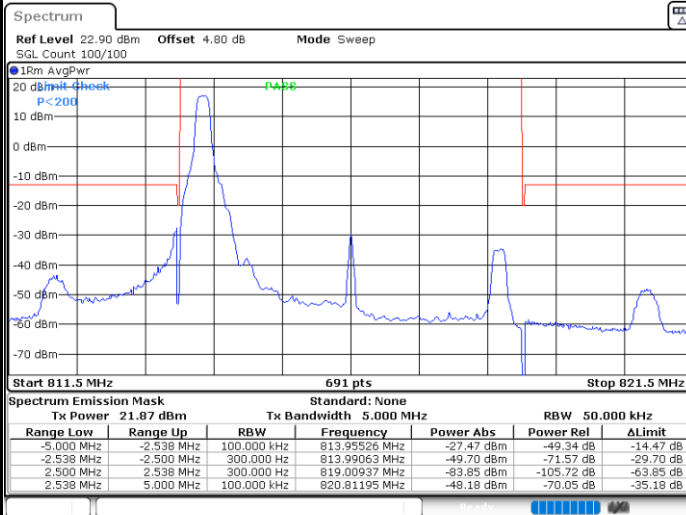


Highest Band Edge / 1 RB

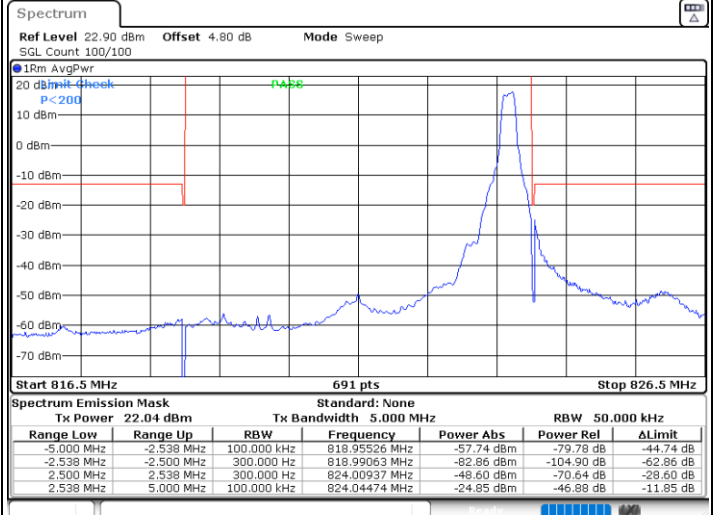

Lowest Band Edge / Full RB

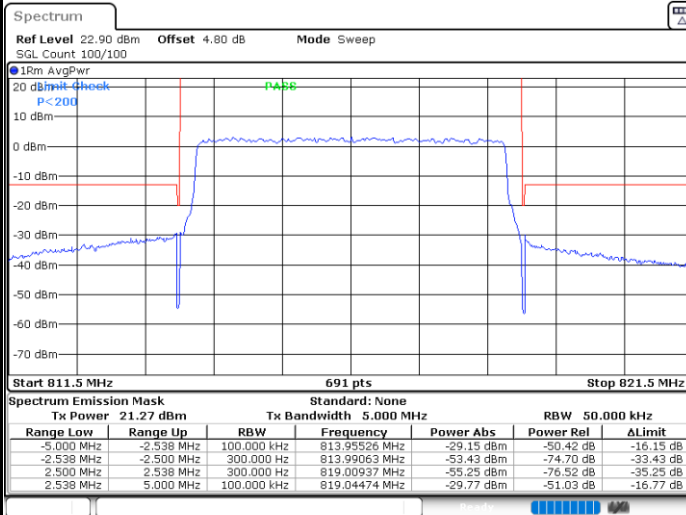


Highest Band Edge / Full RB

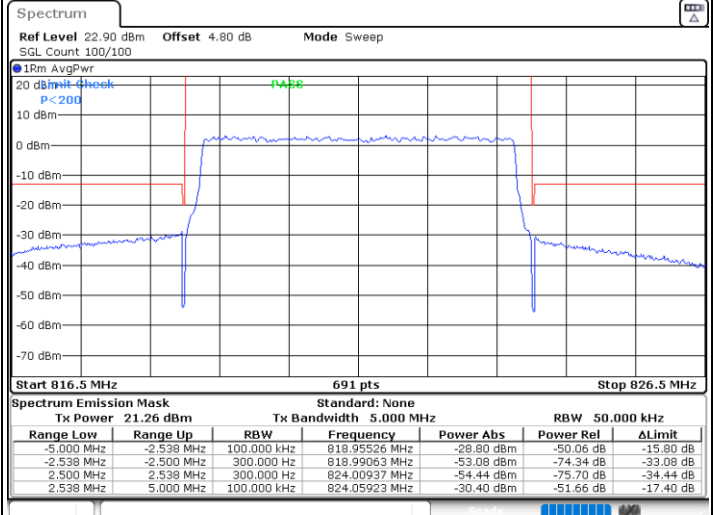




LTE Band 26 / 5MHz / 256QAM


Lowest Band Edge / 1RB

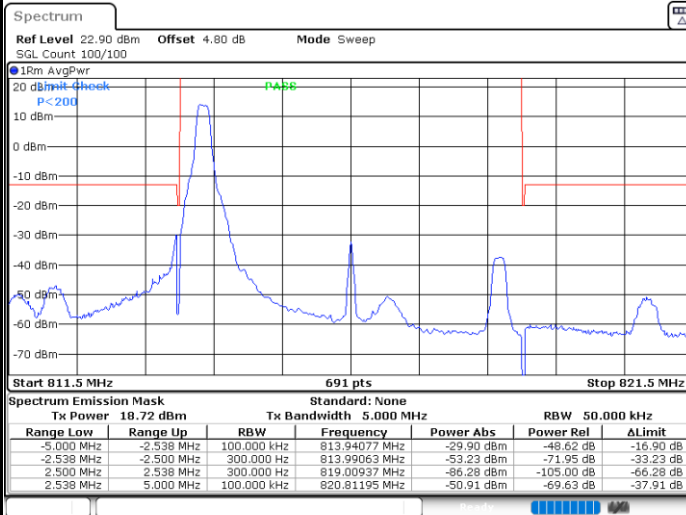


Highest Band Edge / 1 RB

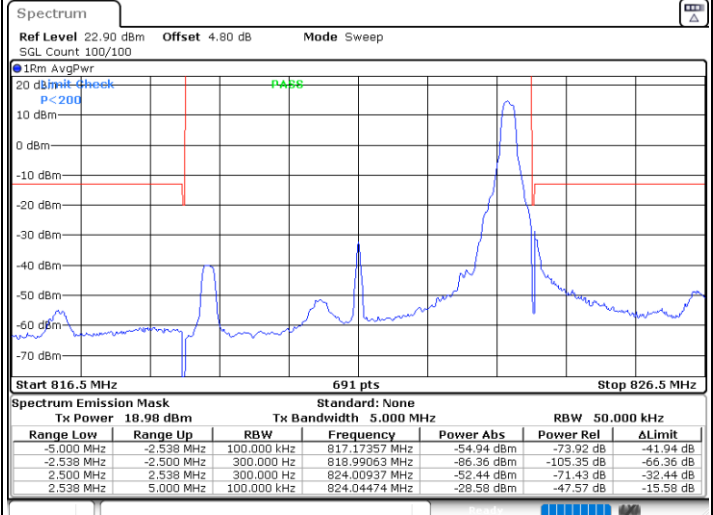

Lowest Band Edge / Full RB

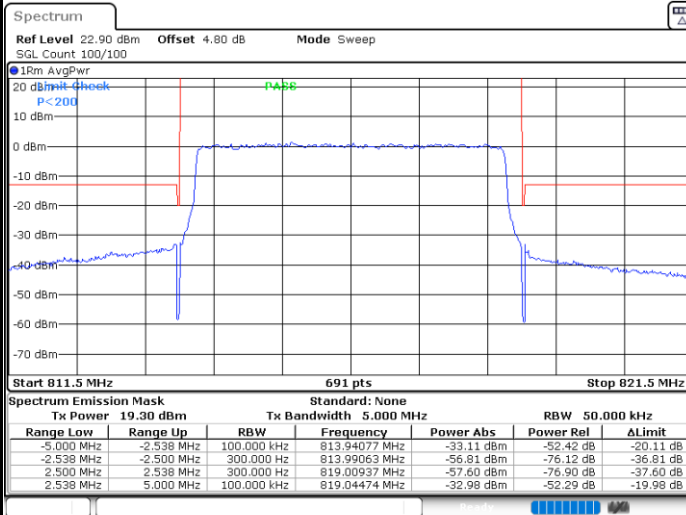

Highest Band Edge / Full RB

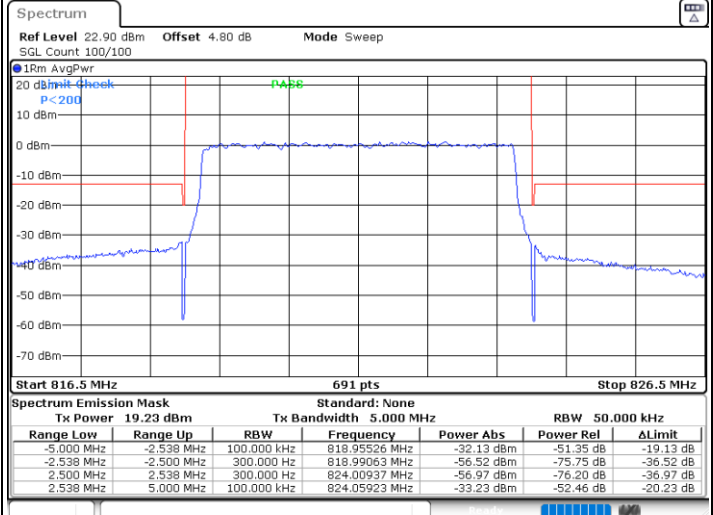





LTE Band 26 / 10MHz / QPSK

Middle Band Edge / 1 RB

Middle Band Edge / 1 RB max

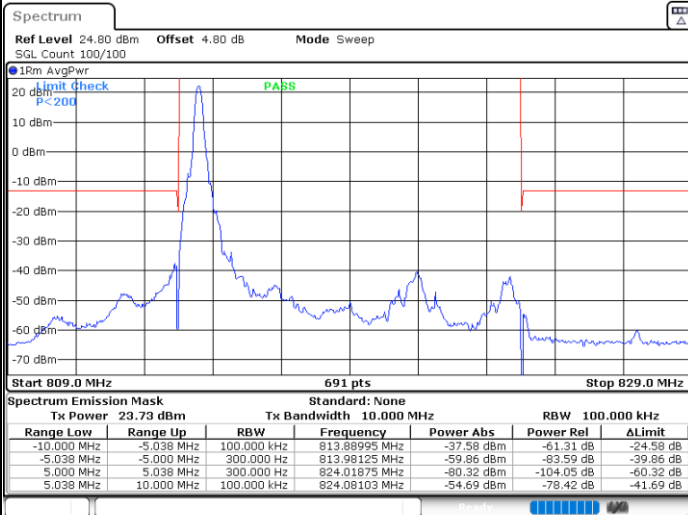


Date: 15.JUN.2024 17:09:37

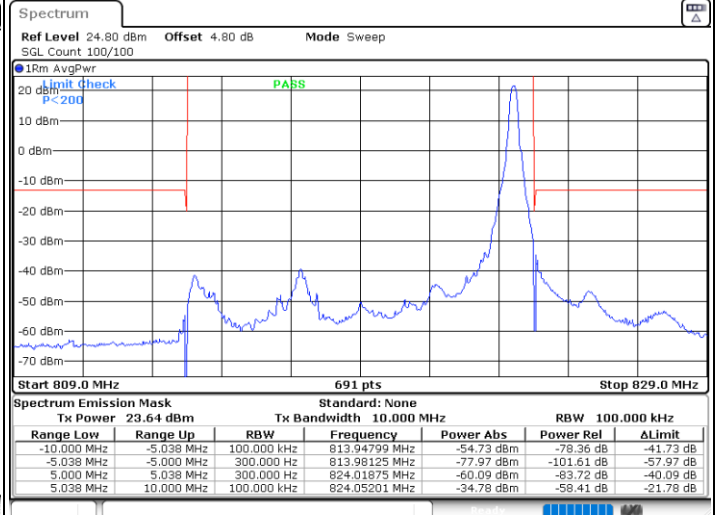

Date: 15.JUN.2024 17:17:44

Band Edge / Full RB

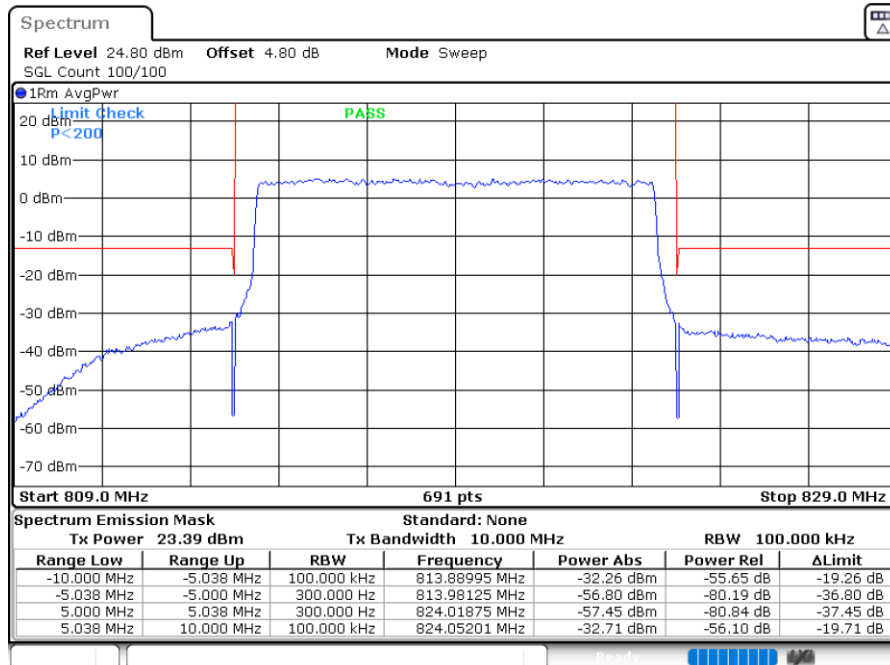

Date: 15.JUN.2024 17:13:41