



FCC RF Test Report

APPLICANT : Zebra Technologies Corporation
EQUIPMENT : Mobile Computer
BRAND NAME : Zebra
MODEL NAME : MC330K
FCC ID : UZ7MC330K
STANDARD : FCC Part 15 Subpart C §15.225
CLASSIFICATION : (DXX) Low Power Communication Device Transmitter

The testing was completed on Sep. 26, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

SUMMARY OF THE TEST RESULT	4
1. GENERAL INFORMATION.....	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	7
1.5 Modification of EUT	7
1.6 Testing Location	8
1.7 Applicable Standards.....	8
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Descriptions of Test Mode.....	9
2.2 Connection Diagram of Test System.....	10
2.3 Table for Supporting Units.....	10
2.4 EUT Operation Test Setup	10
3. TEST RESULTS.....	11
3.1 AC Power Line Conducted Emissions Measurement	11
3.2 20dB and 99% OBW Spectrum Bandwidth Measurement.....	13
3.3 Frequency Stability Measurement	14
3.4 Field Strength of Fundamental Emissions and Mask Measurement.....	15
3.5 Radiated Emissions Measurement.....	17
3.6 Antenna Requirements.....	20
4. LIST OF MEASURING EQUIPMENT	21

APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST

APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS

- B1. Test Result of 20dB Spectrum Bandwidth
- B2. Test Result of Frequency Stability

APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS

- C1. Test Result of Field Strength of Fundamental Emissions
- C2. Results of Radiated Emissions (9 kHz~30MHz)
- C3. Results of Radiated Emissions (30MHz~1GHz)

APPENDIX D. SETUP PHOTOGRAPHS



REVISION HISTORY



SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	FCC Rule	Description of Test	Result	Remark
3.1	15.207	AC Power Line Conducted Emissions	Complies	Under limit 9.00 dB at 0.430MHz
3.2	15.215(c)	20dB Spectrum Bandwidth	Complies	-
	-	99% OBW Spectrum Bandwidth	Complies	-
3.3	15.225(e)	Frequency Stability	Complies	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Complies	Max level 64.18 dB μ V/m at 13.560 MHz
3.5	15.225(d) 15.209	Radiated Spurious Emissions	Complies	Under limit 3.54 dB at 40.680MHz for Quasi-Peak
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	\pm 2.26dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	\pm 5.20dB	Confidence levels of 95%



1. GENERAL INFORMATION

1.1 Applicant

Zebra Technologies Corporation

1 Zebra Plaza, Holtsville, NY 11742

1.2 Manufacturer

Zebra Technologies Corporation

1 Zebra Plaza, Holtsville, NY 11742

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Computer
Brand Name	Zebra
Model Name	MC330K
FCC ID	UZ7MC330K
EUT supports Radios application	NFC WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	EV1b
SW Version	Android Version 7.1.2
FW Version	W10: Aug 4 2017 12:57:11 version 7.35.205.8 (r) FWID 01-895bc792
Fusion Version	Fusion_BA_2.10.0.0.007_N-0809201717-N
MFD	30AUG17
EUT Stage	Engineering Sample

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



<SKU list>

Premium+					
SKU	Type-scanner	Camera	Audio Jack	NFC	Speaker
1	GUN-SE4850	X	X	V	V
2	GUN-SE4750	X	X	V	V
3	GUN-SE965	X	X	V	V
4	Brick-SE4850	V	V	V	V
5	Brick-SE4750	V	V	V	V
6	Brick-SE965	V	V	V	V
7	Rotate	V	V	V	V

Premium					
SKU	Type-scanner	Camera	Audio Jack	NFC	Speaker
8	Brick-SE4850	X	V	V	V
9	Brick-SE4750	X	V	V	V
10	Brick-SE965	X	V	V	V
11	Rotate	X	V	V	V

Specification of Accessories

Sentry 1X Battery	Brand Name	Zebra	Part Number	BT-000338-01
Sentry 2X Battery	Brand Name	Zebra	Part Number	BT-000337-01
MC32 1X Battery	Brand Name	Symbol	Part Number	82-000011-01
MC32 2X Battery	Brand Name	Symbol	Part Number	82-000012-02
Wall wart power supply(18W)	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Charge Cable for Wall wart power supply	Brand Name	Zebra	Part Number	PWRS-14000-249R
HS2100 Earphone	Brand Name	Symbol	Part Number	HS2100-OTH
Quick Disconnect cable for HS2100 Headset	Brand Name	Symbol	Part Number	CBL-HS2100-QDC1-01
RCH51 Earphone	Brand Name	Symbol	Part Number	RCH51
Cable for RCH51 earphone	Brand Name	Symbol	Part Number	25-124411-02R
U cable	Brand Name	Symbol	Part Number	CBL-MC33-USBCHG-01
Gun Holster MC3000	Brand Name	Symbol	Model Name	SG-MC3021212-01R
Holster MC30XX	Brand Name	Symbol	Model Name	11-69293-01R



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	13.553 ~ 13.567MHz
Channel Number	1
20dBW	2.640 KHz
99%OBW	2.240 KHz
Antenna Type	Loop Antenna
Type of Modulation	ASK

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978	
Test Site No.	Sporton Site No.	
	TH03-HY	CO05-HY
Test Engineer	JH Liao	Arthur Hsieh
Temperature	22~24°C	21~24°C
Relative Humidity	53~55%	51~55%

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 / FAX: +886-3-327-0868	
Test Site No.	Sporton Site No.	
	03CH11-HY	
Test Engineer	J.C. Liang / Jacky Hung / Ken Wu	
Temperature	25~27°C	
Relative Humidity	53~54%	

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.225
- ANSI C63.10-2013



2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST

2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations for searching the worst cases.


The following table is a list of the test modes shown in this test report.

Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz

The EUT pre-scanned in four NFC type, A, B, F, V. The worst type (type F) was recorded in this report. Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Z plane as worst plane) from all possible combinations. After pre-scanned tests, SKU 1 is pick up to carry out full tests.

Test Cases	
AC Conducted Emission	Mode 1 : MP3 Play + WLAN (2.4GHz) Link + Bluetooth Link + NFC Link + Sentry 2X + PWR-WUA5V12W0US + RCH51 + USB Link with Adapter + Keypad(38) + SKU 5

2.2 Connection Diagram of Test System

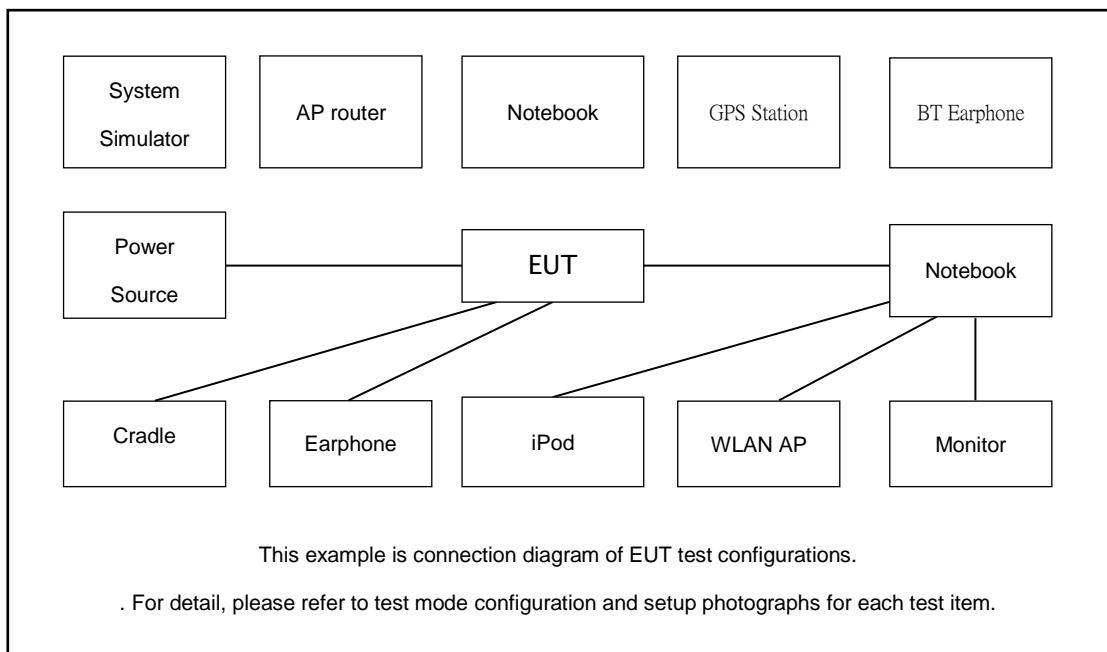

2.3 Table for Supporting Units

Support Unit	Manufacturer	Model	FCC ID
Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029
WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U
Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054
NFC Card	Metro Taipei	Easy Card	N/A

2.4 EUT Operation Test Setup

For type A, the EUT was programmed to be in continuously transmitting mode.

For type B/F/V, it use card-inducing to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.



3. TEST RESULTS

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

For terminal test result, the testing follows FCC KDB 174176.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test setup

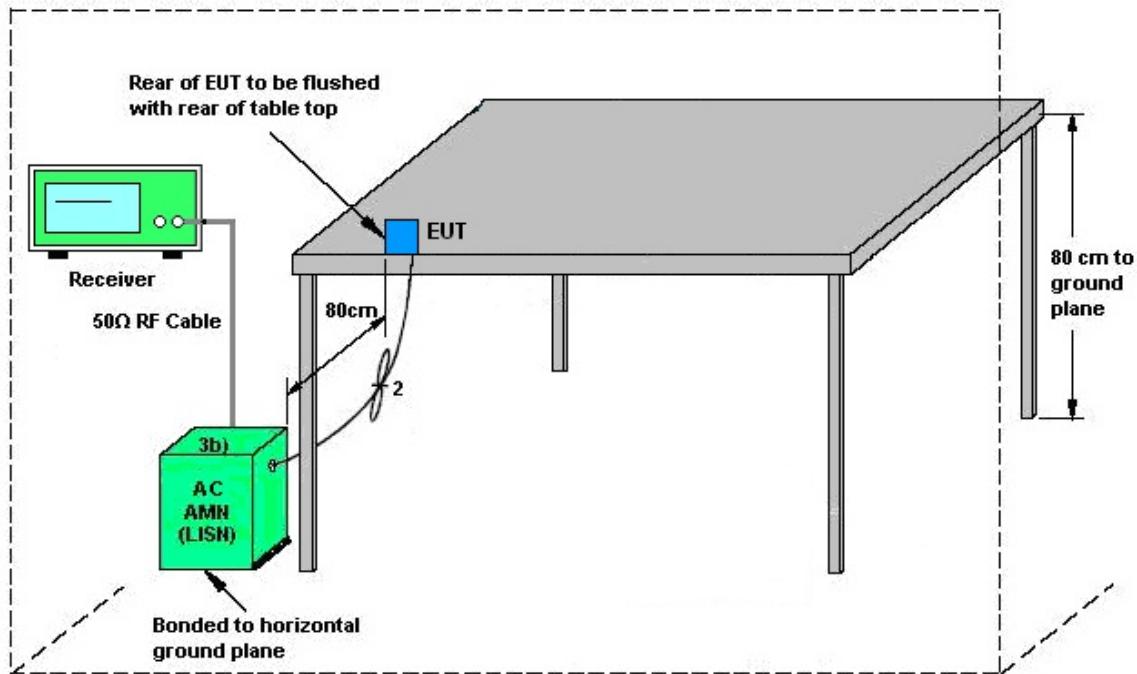

AMN = Artificial mains network (LISH)

AE = Associated equipment

EUT = Equipment under test

ISH = Impedance stabilization network

3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

3.2.4 Test Setup

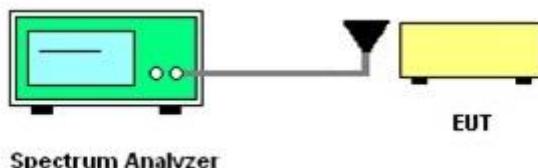

3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

3.3 Frequency Stability Measurement

3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The fc is declaring of channel frequency. Then the frequency error formula is $(fc-f)/fc \times 10^6$ ppm and the limit is less than ± 100 ppm.
6. Extreme temperature rule is -20°C~50°C.

3.3.4 Test Setup

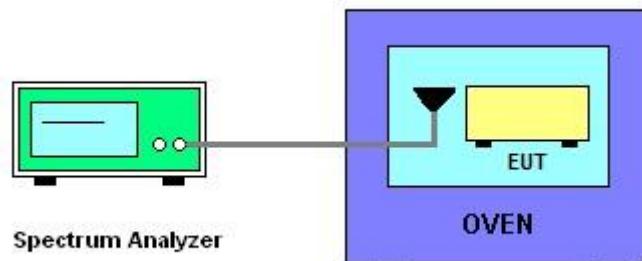

3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.



3.4 Field Strength of Fundamental Emissions and Mask Measurement

3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength (μ V/m) at 30m	Field Strength (dB μ V/m) at 30m	Field Strength (dB μ V/m) at 10m	Field Strength (dB μ V/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.

5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz.

Note: Emission level (dB μ V/m) = 20 log Emission level (μ V/m).

3.4.4 Test Setup

For radiated emissions below 30MHz

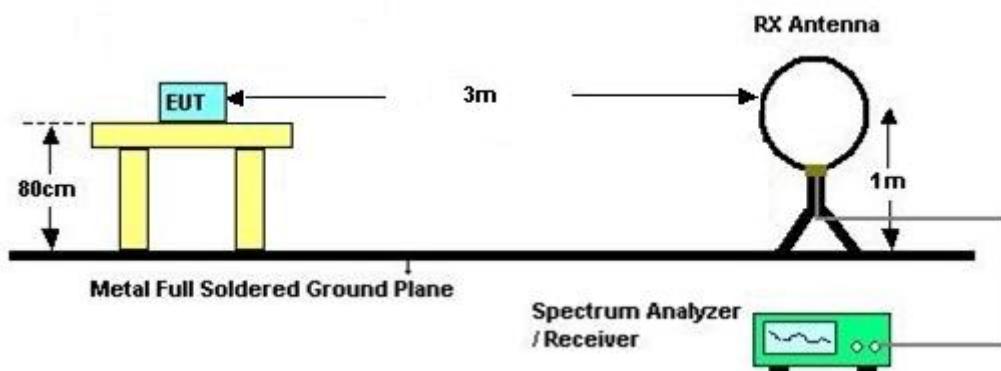

3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.



3.5 Radiated Emissions Measurement

3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength (μ V/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.




3.5.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
1. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
2. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
3. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
4. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements

3.5.5 Test Setup

For radiated emissions below 30MHz

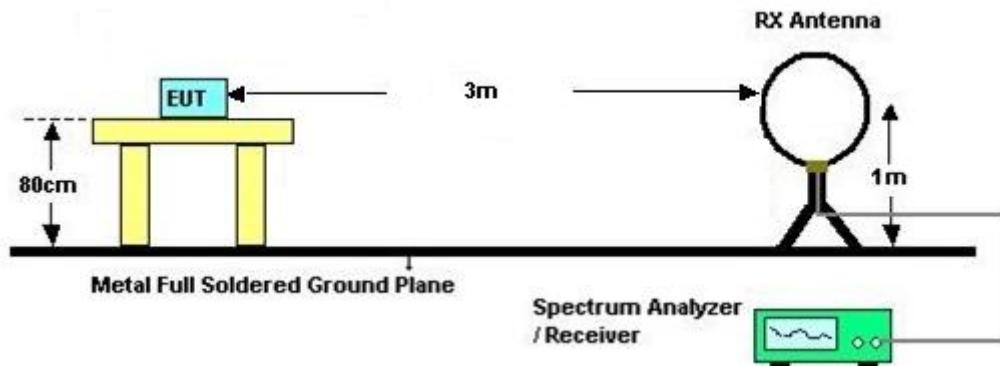

For radiated emissions above 30MHz

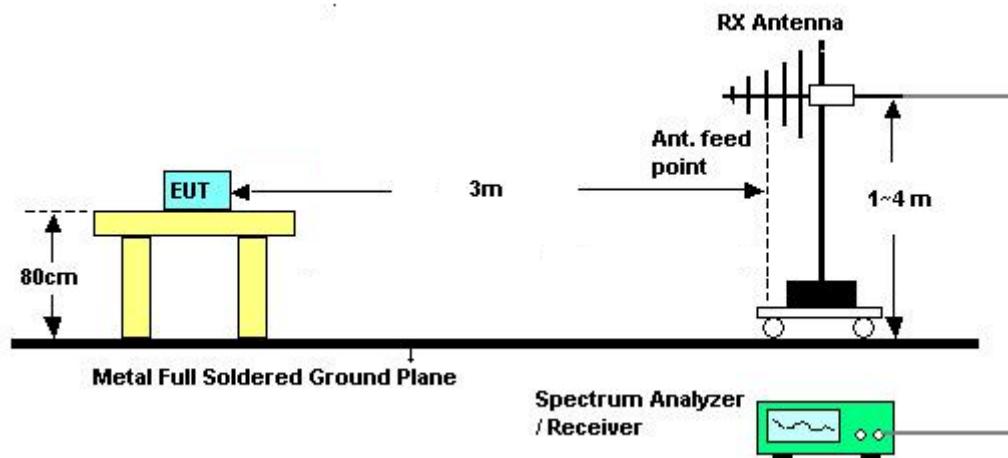

3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.



3.6 Antenna Requirements

3.6.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.




4. LIST OF MEASURING EQUIPMENT

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	AC POWER	AFC-500W	F104070011	50Hz~60Hz	Dec. 01, 2016	Sep. 13, 2017	Nov. 30, 2017	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 29, 2017	Sep. 13, 2017	Jun. 28, 2018	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Nov. 16, 2016	Sep. 13, 2017	Nov. 15, 2017	Conducted (TH03-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Sep. 24, 2017 ~ Sep. 26, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 20, 2017	Sep. 24, 2017 ~ Sep. 26, 2017	Sep. 19, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Sep. 24, 2017 ~ Sep. 26, 2017	Nov. 28, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Dec. 06, 2016	Sep. 24, 2017 ~ Sep. 26, 2017	Dec. 05, 2017	Conduction (CO05-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Sep. 06, 2017 ~ Sep. 21, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N 0602	30MHz~1GHz	Oct. 15, 2016	Sep. 06, 2017 ~ Sep. 21, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Oct. 20, 2016	Sep. 06, 2017 ~ Sep. 21, 2017	Oct. 19, 2018	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHz	Oct. 12, 2016	Sep. 06, 2017 ~ Sep. 21, 2017	Oct. 11, 2017	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Sep. 06, 2017 ~ Sep. 21, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Sep. 06, 2017 ~ Sep. 21, 2017	N/A	Radiation (03CH11-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz to 26.5GHz	Jan. 12, 2017	Sep. 06, 2017 ~ Sep. 21, 2017	Jan. 11, 2018	Radiation (03CH11-HY)

Appendix A. Test Results of Conducted Emission Test

<Original test result with NFC antenna>

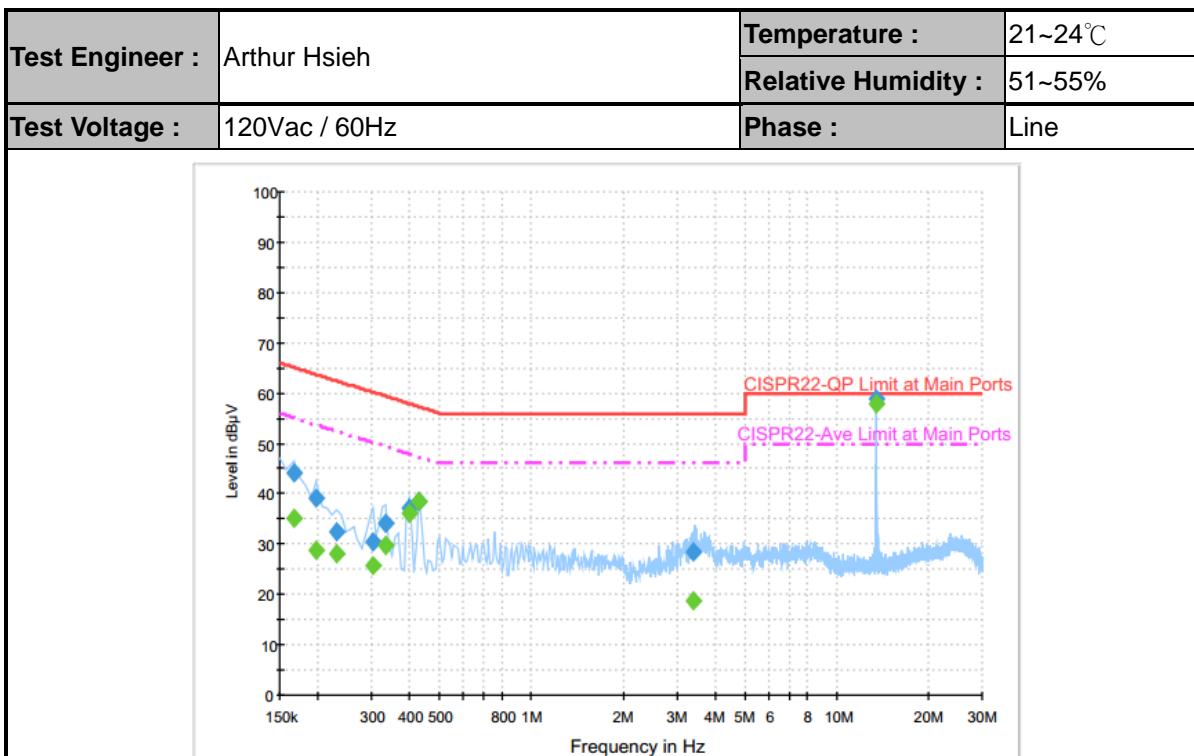

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	44.1	Off	L1	19.6	21.1	65.2
0.198000	39.1	Off	L1	19.6	24.6	63.7
0.230000	32.5	Off	L1	19.6	29.9	62.4
0.302000	30.3	Off	L1	19.6	29.9	60.2
0.334000	34.2	Off	L1	19.6	25.2	59.4
0.398000	37.3	Off	L1	19.6	20.6	57.9
0.430000	38.6	Off	L1	19.6	18.7	57.3
3.406000	28.3	Off	L1	19.6	27.7	56.0
13.558000	58.9	Off	L1	20.2	1.1	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	35.3	Off	L1	19.6	19.9	55.2
0.198000	28.9	Off	L1	19.6	24.8	53.7
0.230000	28.0	Off	L1	19.6	24.4	52.4
0.302000	25.8	Off	L1	19.6	24.4	50.2
0.334000	29.6	Off	L1	19.6	19.8	49.4
0.398000	36.0	Off	L1	19.6	11.9	47.9
0.430000	38.3	Off	L1	19.6	9.0	47.3
3.406000	18.8	Off	L1	19.6	27.2	46.0
13.558000	58.0	Off	L1	20.2	-8.0	50.0



Test Engineer :	Arthur Hsieh	Temperature :	21~24°C
		Relative Humidity :	51~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

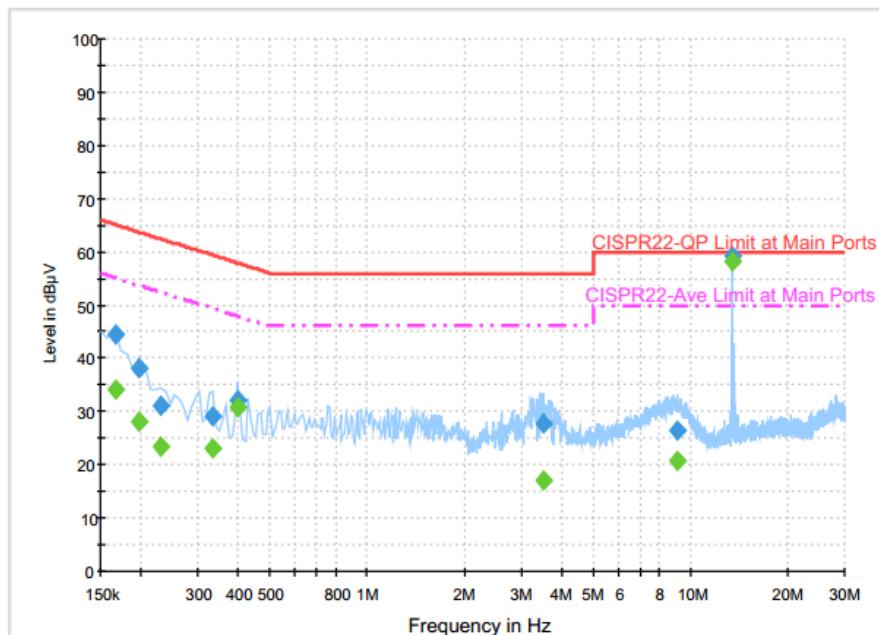**Final Result : Quasi-Peak**


Frequency (MHz)	Quasi-Peak (dB μ V)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.166000	44.5	Off	N	19.5	20.7	65.2
0.198000	38.0	Off	N	19.5	25.7	63.7
0.230000	31.2	Off	N	19.5	31.2	62.4
0.334000	29.2	Off	N	19.5	30.2	59.4
0.398000	32.2	Off	N	19.5	25.7	57.9
3.502000	27.7	Off	N	19.6	28.3	56.0
9.166000	26.4	Off	N	20.0	33.6	60.0
13.558000	59.1	Off	N	20.3	0.9	60.0

Final Result : Average

Frequency (MHz)	Average (dB μ V)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.166000	34.1	Off	N	19.5	21.1	55.2
0.198000	28.1	Off	N	19.5	25.6	53.7
0.230000	23.4	Off	N	19.5	29.0	52.4
0.334000	23.0	Off	N	19.5	26.4	49.4
0.398000	30.6	Off	N	19.5	17.3	47.9
3.502000	17.2	Off	N	19.6	28.8	46.0
9.166000	20.6	Off	N	20.0	29.4	50.0
13.558000	58.2	Off	N	20.3	-8.2	50.0

<Terminal test result with dummy load>

Test Engineer :	Arthur Hsieh	Temperature :	21~24°C
		Relative Humidity :	51~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line

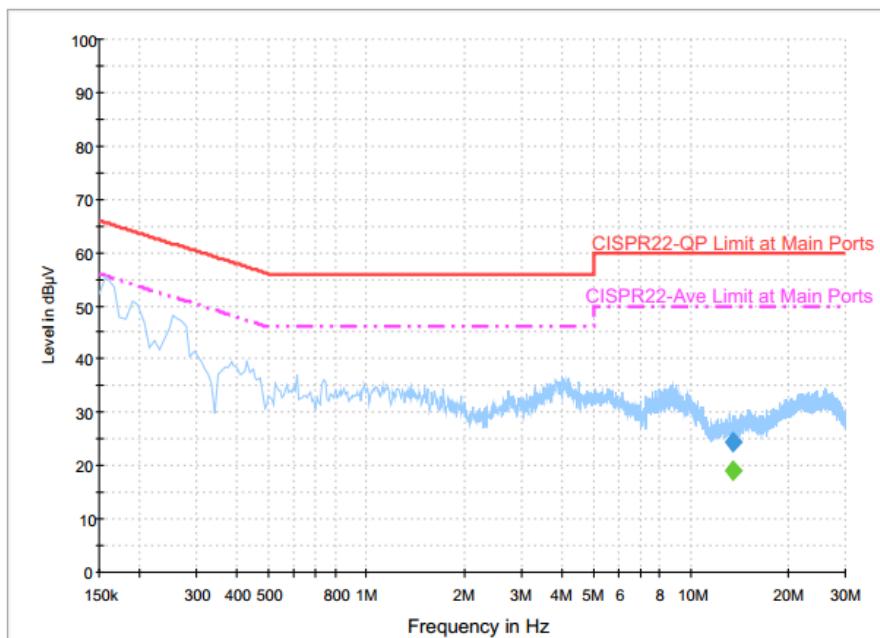

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
13.558000	24.3	Off	L1	20.0	35.7	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
13.558000	19.2	Off	L1	20.0	30.8	50.0



Test Engineer :	Arthur Hsieh	Temperature :	21~24°C
Test Voltage :	120Vac / 60Hz	Relative Humidity :	51~55%
Phase :		Phase :	Neutral

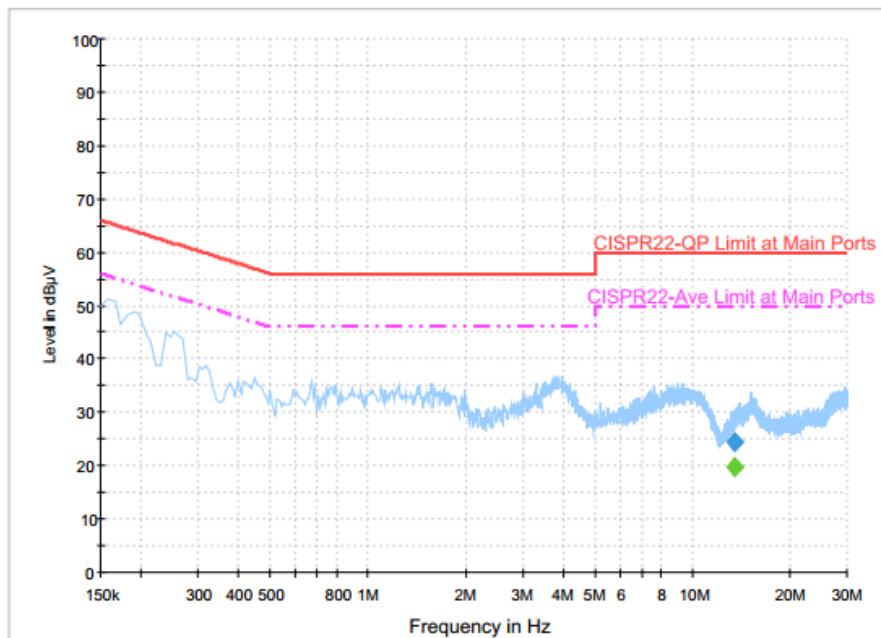**Final Result : Quasi-Peak**


Frequency (MHz)	Quasi-Peak (dB μ V)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
13.558000	24.4	Off	N	20.3	35.6	60.0

Final Result : Average

Frequency (MHz)	Average (dB μ V)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
13.558000	19.7	Off	N	20.3	30.3	50.0

Appendix B. Test Results of Conducted Test Items

B1. Test Result of 20dB Spectrum Bandwidth

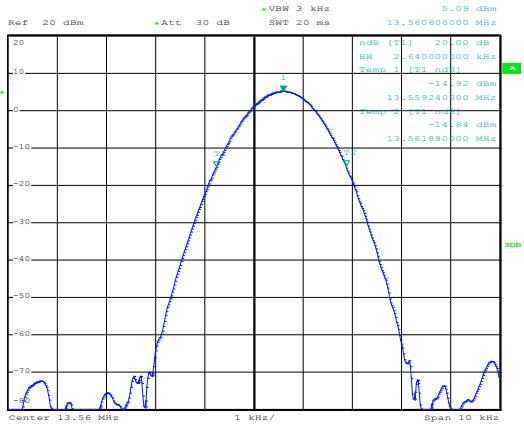Test mode	NFC Tx	Test Frequency (MHz)	13.56
			
Date: 12.SEP.2017 09:57:00		Date: 12.SEP.2017 10:09:40	
20dB Bandwidth (kHz)	2.640	99% OccupiedBW(kHz)	2.240
Frequency range (MHz)	$f_L > 13.553$	13.55924	Test Result
	$f_H < 13.567$	13.56188	Complies



B2. Test Result of Frequency Stability

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
120	13.560560	-20	0	13.560580
102	13.560560		2	13.560620
138	13.560560		5	13.560620
			10	13.560620
		-10	0	13.560610
			2	13.560610
			5	13.560620
			10	13.560610
		0	0	13.560620
			2	13.560620
			5	13.560620
			10	13.560620
		10	0	13.560620
			2	13.560610
			5	13.560610
			10	13.560610
		20	0	13.560550
			2	13.560550
			5	13.560550
			10	13.560550
		30	0	13.560600
			2	13.560600
			5	13.560590
			10	13.560580
		40	0	13.560560
			2	13.560560
			5	13.560560
			10	13.560540





Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
		50	0	13.560540
			2	13.560530
			5	13.560520
			10	13.560520
Max.Deviation (MHz)	0.000560	Max.Deviation (MHz)		0.000620
Max.Deviation (ppm)	41.2979	Max.Deviation (ppm)		45.7227
Limit	FS < ±100 ppm	Limit		FS < ±100 ppm
Test Result	PASS	Test Result		PASS



Appendix C. Test Results of Radiated Test Items

C1. Test Result of Field Strength of Fundamental Emissions

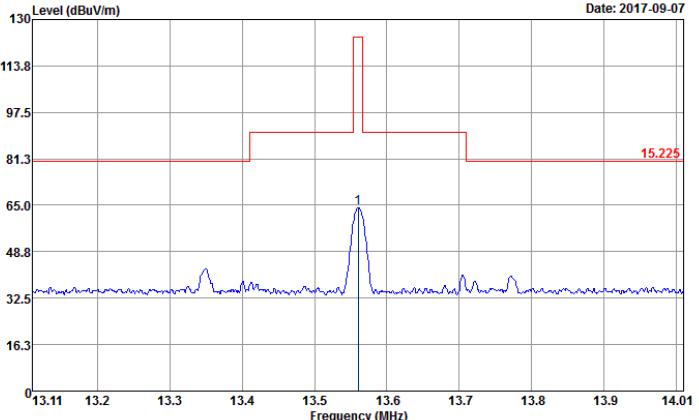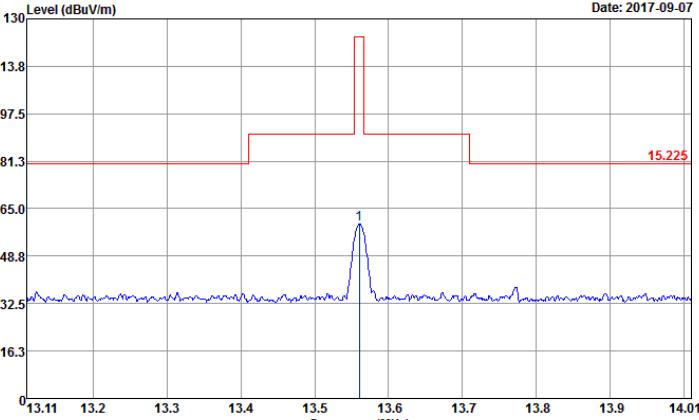Test Mode :	NFC Tx	Test Frequency (MHz)	13.56																										
			Date: 2017-09-07																										
<p>Site : 03CH11-HY Condition : 15.225 3m LOOP_ANT(H) HORIZONTAL : RBW:9.000KHz VBW:9.000KHz SWT:Auto Project : 790120 : SKU 1</p> <table><thead><tr><th>Freq</th><th>Over Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13.56</td><td>64.18</td><td>-59.82</td><td>124.00</td><td>43.78</td><td>20.14</td><td>0.26</td><td>100 351 QP</td></tr></tbody></table>			Freq	Over Limit	Line	ReadAntenna	Cable	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	13.56	64.18	-59.82	124.00	43.78	20.14	0.26	100 351 QP	
Freq	Over Limit	Line	ReadAntenna	Cable	A/Pos	T/Pos	Remark																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																					
1	13.56	64.18	-59.82	124.00	43.78	20.14	0.26	100 351 QP																					
			Date: 2017-09-07																										
<p>Site : 03CH11-HY Condition : 15.225 3m LOOP_ANT(V) VERTICAL : RBW:9.000KHz VBW:9.000KHz SWT:Auto Project : 790120 : SKU 1</p> <table><thead><tr><th>Freq</th><th>Over Limit</th><th>Line</th><th>ReadAntenna</th><th>Cable</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>13.56</td><td>59.68</td><td>-64.32</td><td>124.00</td><td>39.28</td><td>20.14</td><td>0.26</td><td>100 267 QP</td></tr></tbody></table>			Freq	Over Limit	Line	ReadAntenna	Cable	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	13.56	59.68	-64.32	124.00	39.28	20.14	0.26	100 267 QP	
Freq	Over Limit	Line	ReadAntenna	Cable	A/Pos	T/Pos	Remark																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																					
1	13.56	59.68	-64.32	124.00	39.28	20.14	0.26	100 267 QP																					



C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

Test Mode :		NFC Tx		Polarization :		Horizontal			
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
0.01925	57.39	-64.53	121.92	37.33	20.05	0.01	-	-	Average
0.06114	53.58	-58.3	111.88	33.51	20.06	0.01	-	-	Average
0.0938	45.91	-62.25	108.16	25.89	20.01	0.01	-	-	QP
0.11008	44.3	-62.47	106.77	24.29	20	0.01	-	-	Average
0.17074	47.79	-55.17	102.96	27.79	19.99	0.01	-	-	Average
1.504	43.57	-20.49	64.06	23.44	20.01	0.12	100	0	QP
12.432	36.98	-32.52	69.5	16.62	20.13	0.23	-	-	QP
13.56	63.71	-5.79	69.5	43.31	20.14	0.26	-	-	QP
16.621	36.99	-32.51	69.5	16.51	20.2	0.28	-	-	QP
25.555	36.77	-32.73	69.5	16.01	20.5	0.26	-	-	QP

Test Mode :		NFC Tx		Polarization :		Vertical			
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
0.0192	48.26	-73.68	121.94	28.2	20.05	0.01	-	-	Average
0.07584	39.4	-70.61	110.01	19.38	20.01	0.01	-	-	Average
0.10398	35.71	-71.56	107.27	15.69	20.01	0.01	-	-	QP
0.11512	33.85	-72.53	106.38	13.84	20	0.01	-	-	Average
0.15986	44.7	-58.83	103.53	24.7	19.99	0.01	-	-	Average
1.541	42.13	-21.72	63.85	21.99	20.02	0.12	100	0	QP
13.008	35.9	-33.6	69.5	15.53	20.13	0.24	-	-	QP
13.56	59.32	-10.18	69.5	38.92	20.14	0.26	-	-	QP
22.858	36.06	-33.44	69.5	15.27	20.52	0.27	-	-	QP
25.295	36.37	-33.13	69.5	15.59	20.51	0.27	-	-	QP

Note:

- 13.56 MHz is fundamental signal which can be ignored.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
- Limit line = specific limits (dB μ V) + distance extrapolation factor.



C3. Results of Radiated Spurious Emissions (30MHz~1GHz)

Test Mode :		NFC Tx			Polarization :			Horizontal		
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	23.58	-16.42	40	30.87	24.36	0.82	32.5	-		Peak
40.8	23.81	-16.19	40	36.64	18.83	0.82	32.49	-	-	Peak
46.2	22.9	-17.1	40	38.57	15.8	1.02	32.49	-	-	Peak
391.7	26.67	-19.33	46	34.86	21.52	2.56	32.33	-	-	Peak
736.8	29.9	-16.1	46	30.82	27.91	3.4	32.36	-	-	Peak
954.5	33.32	-12.68	46	29.43	30.98	3.9	31.16	100	0	Peak

Test Mode :		NFC Tx			Polarization :			Vertical		
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.35	29.83	-10.17	40	37.64	23.84	0.82	32.49	-	-	Peak
40.68	36.46	-3.54	40	49.29	18.83	0.82	32.49	100	250	QP
40.68	38.79	-1.21	40	51.62	18.83	0.82	32.49	100	250	Peak
44.31	35.52	-4.48	40	50.34	16.65	1.02	32.49	-	-	Peak
501.6	24.52	-21.48	46	30.01	24	2.84	32.38	-	-	Peak
757.8	29.93	-16.07	46	30.46	28.2	3.44	32.3	-	-	Peak
955.2	33.89	-12.11	46	29.95	31.02	3.9	31.15	-	-	Peak

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.