

FCC Test Report

Report No.: RF170421C58-3

FCC ID: UZ7TC200J

Test Model: TC200J

Received Date: Apr. 21, 2017

Test Date: Apr. 27 ~ Jun. 29, 2017

Issued Date: Jul. 04, 2017

Applicant: Zebra Technologies Corporation

Address: 1 Zebra Plaza Holtsville New York United States 11742

Manufacturer: Zebra Technologies Corporation

Address: 1 Zebra Plaza Holtsville New York United States 11742

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Description of Support Units	11
3.3.1 Configuration of System under Test	11
3.4 Duty Cycle of Test Signal	12
3.5 General Description of Applied Standards	12
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement.....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement	13
4.1.2 Test Instruments	14
4.1.3 Test Procedures.....	15
4.1.4 Deviation from Test Standard	15
4.1.5 Test Set Up	16
4.1.6 EUT Operating Conditions.....	17
4.1.7 Test Results	18
4.2 Conducted Emission Measurement.....	25
4.2.1 Limits of Conducted Emission Measurement.....	25
4.2.2 Test Instruments	25
4.2.3 Test Procedures.....	25
4.2.4 Deviation from Test Standard	26
4.2.5 Test Setup.....	26
4.2.6 EUT Operating Conditions.....	26
4.2.7 Test Results	27
4.3 6dB Bandwidth Measurement.....	35
4.3.1 Limits of 6dB Bandwidth Measurement.....	35
4.3.2 Test Setup.....	35
4.3.3 Test Instruments	35
4.3.4 Test Procedure	35
4.3.5 Deviation from Test Standard	35
4.3.6 EUT Operating Conditions.....	35
4.3.7 Test Result	36
4.4 Conducted Output Power Measurement.....	37
4.4.1 Limits of Conducted Output Power Measurement	37
4.4.2 Test Setup.....	37
4.4.3 Test Instruments	37
4.4.4 Test Procedures.....	37
4.4.5 Deviation from Test Standard	37
4.4.6 EUT Operating Conditions.....	37
4.4.7 Test Results	37
4.5 Power Spectral Density Measurement.....	38
4.5.1 Limits of Power Spectral Density Measurement	38
4.5.2 Test Setup.....	38
4.5.3 Test Instruments	38
4.5.4 Test Procedure	38
4.5.5 Deviation from Test Standard	38
4.5.6 EUT Operating Condition	38

4.5.7 Test Results	39
4.6 Conducted Out of Band Emission Measurement.....	40
4.6.1 Limits of Conducted Out of Band Emission Measurement	40
4.6.2 Test Setup.....	40
4.6.3 Test Instruments	40
4.6.4 Test Procedure	40
4.6.5 Deviation from Test Standard	40
4.6.6 EUT Operating Condition	40
4.6.7 Test Results	41
5 Pictures of Test Arrangements.....	42
Appendix – Information on the Testing Laboratories	43

Release Control Record

Issue No.	Description	Date Issued
RF170421C58-3	Original release.	Jul. 04, 2017

1 Certificate of Conformity

Product: Touch Computer

Brand: ZEBRA

Test Model: TC200J

Sample Status: Engineering sample

Applicant: Zebra Technologies Corporation

Test Date: Apr. 27 ~ Jun. 29, 2017

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  _____, **Date:** Jul. 04, 2017

Pettie Chen / Senior Specialist

Approved by :  _____, **Date:** Jul. 04, 2017

Ken Liu / Senior Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -16.10dB at 0.40392MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -3.7dB at 30.00MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.64 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Touch Computer
Brand	ZEBRA
Test Model	TC200J
Status of EUT	Engineering sample
MFD	28MAR17
HW Version	EV
SW Version	90-04-03-N-00-E1
Power Supply Rating	5Vdc from adapter or host equipment 3.85Vdc from battery
Modulation Type	GFSK
Transfer Rate	1Mbps
Operating Frequency	2402 ~ 2480MHz
Number of Channel	40
Channel Spacing	2MHz
Output Power	2.553mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter, Gun Handle, Headset (1.25m non-shielded cable without core), Arm Mount, Holster (Refer to note 4 for more details)
Data Cable Supplied	1.5m shielded USB Type C to Type A cable without core (Refer to note 4 for more details)

Note:

1. The EUT has three types for sale.

Brand	Model	Difference
ZEBRA	TC200J	Scanner SE4710 with camera, with 2pin
		Scanner SE4710 with camera, with 8pin (option)
		Scanner SE2100 without camera, blank

2. The EUT consumes power from the following adapter and battery.

Adapter	
Brand	ZEBRA
Model	SAWA-65-20005A
Input Power	100-240Vac, 0.5A, 50-60Hz
Output Power	5Vdc, 2.5A

Battery	
Brand	ZEBRA
Model	BT-000334
Rate capacity(mAh)	3000mAh
Min capacity(mAh)	2800mAh
Rate Voltage	3.85Vdc

3. The following antennas were provided to the EUT.

Type	Connector	Gain (dBi)	
		2.4GHz	5GHz
PIFA	NA	2.25	4.22

4. Accessory devices of EUT are list as below:

Specification of Accessory		
AC Adapter	Brand Name	ZEBRA
	Model Name	SAWA-65-20005A
USB Type C cable	Brand Name	ZEBRA
	P/N Number	CBL-MPM-USB1-01
Ear Headset	Brand Name	ZEBRA
	Model Name	HDST-25MM-PTVP-01
Headset Adapter Cable	Brand Name	ZEBRA
	Model Name	CBL-TC51-HDST35-01
Gun Handle	Brand Name	ZEBRA
	P/N Number	TRG-TC2X-SNP1-01
Arm Mount	Brand Name	ZEBRA
	P/N Number	SG-TC2X-ARMNT-01
Holster	Brand Name	ZEBRA
	P/N Number	SG-TC2X-HLSTR1-01

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

40 channels are provided to this EUT:

Channel	Freq. (MHz)						
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
A	✓	✓	✓	✓	Scanner SE4710 (2pin), EUT with Headset
B	-	✓	✓	-	Scanner SE4710 (2pin), EUT with Gun Handle
C	-	✓	✓	-	Scanner SE4710 (8pin), EUT with Headset
D	-	✓	✓	-	Scanner SE2100 (2pin), EUT with Headset

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.
2. "-": Means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	37, 17, 39	GFSK	1

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
A, B, C, D	0 to 39	17	GFSK	1

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
A, B, C, D	0 to 39	17	GFSK	1

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
A	0 to 39	37, 17, 39	GFSK	1

Test Condition:


APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE \geq 1G	20deg. C, 69%RH	120Vac, 60Hz	Chris Lin
RE<1G	20deg. C, 69%RH	120Vac, 60Hz	Bayu Chen
PLC	25deg. C, 75%RH	120Vac, 60Hz	Chris Lin
APCM	25deg. C, 60%RH	120Vac, 60Hz	Ted Chang

3.3 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3.1 Configuration of System under Test

Test Mode A, C, D

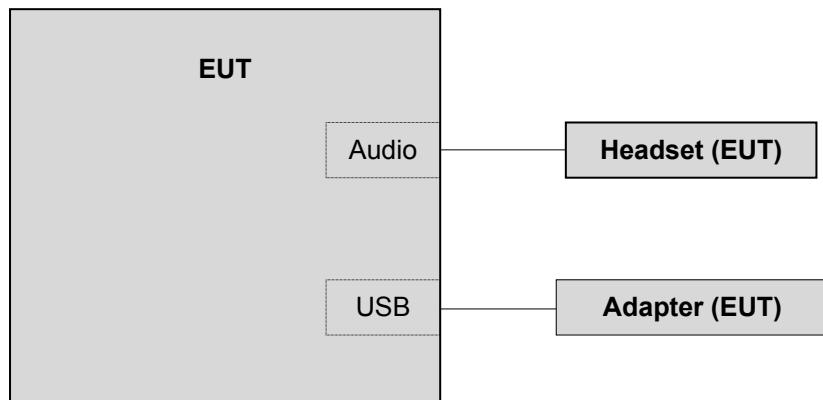


Test Mode B

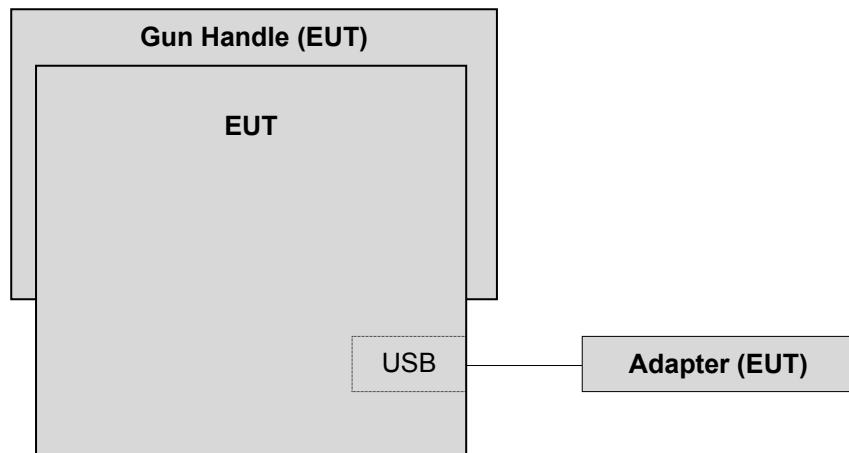

3.4 Duty Cycle of Test Signal

Duty cycle = $0.385/0.637=0.604$, Duty factor = $10 * \log(1/0.604) = 2.19$

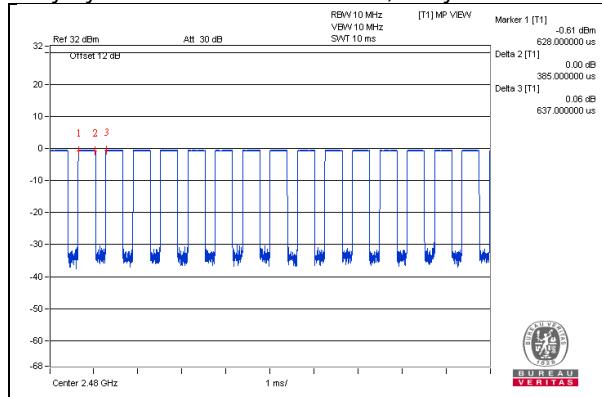

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v04

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 24, 2016	Oct. 23, 2017
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Aug. 16, 2016	Aug. 15, 2017
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Dec. 28, 2016	Dec. 27, 2017
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Dec. 15, 2016	Dec. 14, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 14, 2016	Dec. 13, 2017
Loop Antenna	EM-6879	269	Aug. 11, 2016	Aug. 10, 2017
Preamplifier Agilent	8449B	3008A01960	Aug. 09, 2016	Aug. 08, 2017
Preamplifier Agilent	8447D	2944A10631	Aug. 09, 2016	Aug. 08, 2017
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MY 13380+295012/04	Aug. 09, 2016	Aug. 08, 2017
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03 (250724)	Aug. 09, 2016	Aug. 08, 2017
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
High Speed Peak Power Meter	ML2495A	0824012	Aug. 11, 2016	Aug. 10, 2017
Power Sensor	MA2411B	0738171	Aug. 11, 2016	Aug. 10, 2017

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 4.
3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 460141.
5. The IC Site Registration No. is IC7450F-4.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or $3 \times RBW$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


For Radiated emission below 30MHz

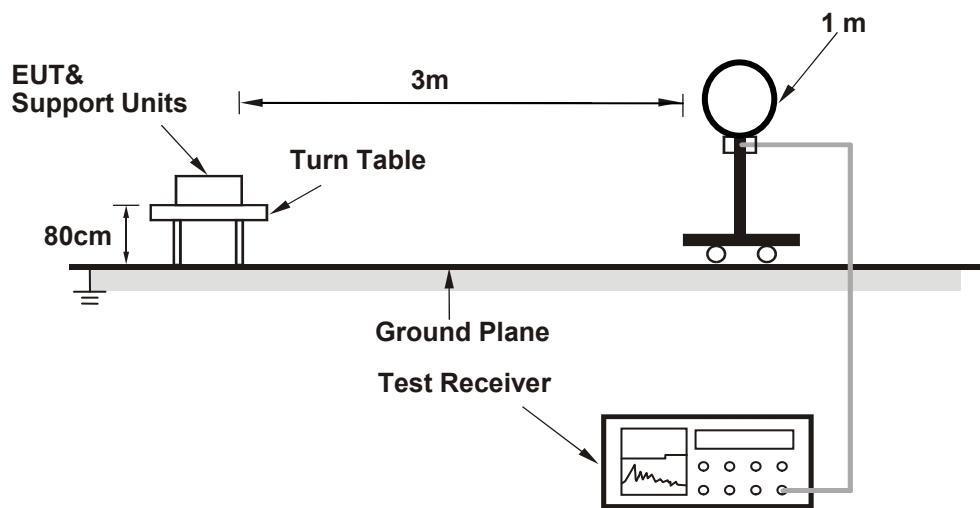

For Radiated emission 30MHz to 1GHz

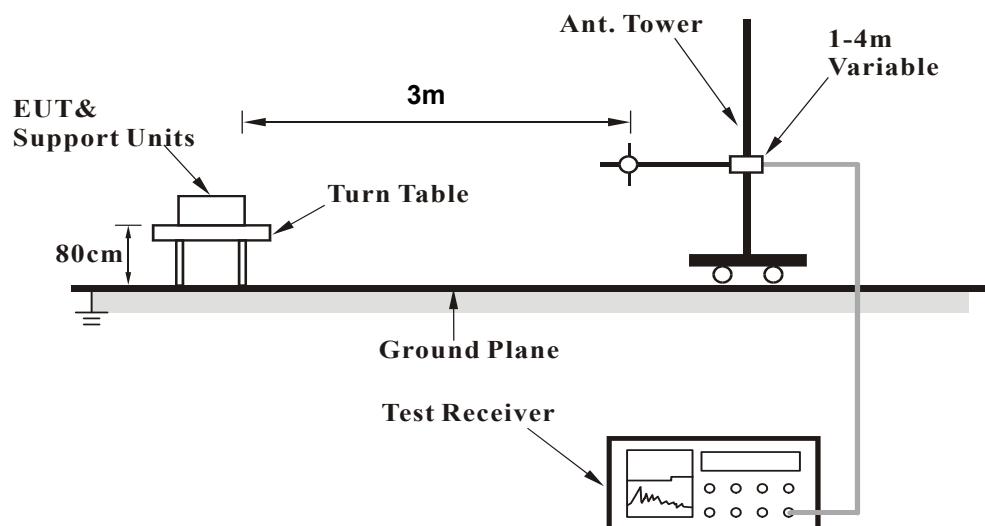

For Radiated emission above 1GHz

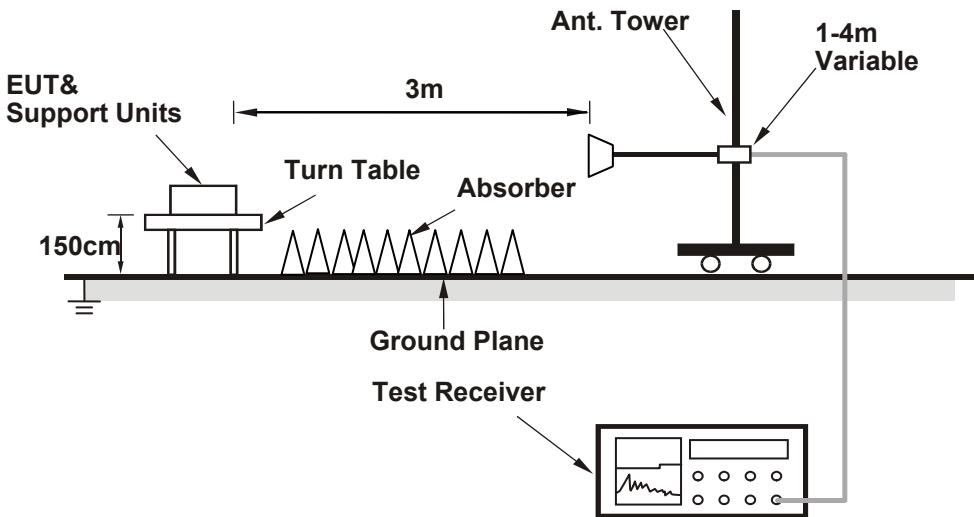

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

The EUT has been tested as an independent unit together with other necessary accessories or support units.

4.1.7 Test Results

Above 1GHz Worst-Case Data

CHANNEL	TX Channel 37	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.5 PK	74.0	-17.5	3.04 H	181	23.6	32.9
2	2390.00	45.3 AV	54.0	-8.7	3.04 H	181	12.4	32.9
3	*2402.00	98.8 PK			3.04 H	181	65.9	32.9
4	*2402.00	94.0 AV			3.04 H	181	61.1	32.9
5	4804.00	48.3 PK	74.0	-25.7	1.33 H	64	41.6	6.7
6	4804.00	36.3 AV	54.0	-17.7	1.33 H	64	29.6	6.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.5 PK	74.0	-17.5	2.85 V	195	23.6	32.9
2	2390.00	44.4 AV	54.0	-9.6	2.85 V	195	11.5	32.9
3	*2402.00	94.1 PK			2.85 V	195	61.2	32.9
4	*2402.00	90.1 AV			2.85 V	195	57.2	32.9
5	4804.00	47.3 PK	74.0	-26.7	1.00 V	8	40.6	6.7
6	4804.00	35.3 AV	54.0	-18.7	1.00 V	8	28.6	6.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 17	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	99.2 PK			2.52 H	186	66.1	33.1
2	*2440.00	94.2 AV			2.52 H	186	61.1	33.1
3	4880.00	48.4 PK	74.0	-25.6	1.28 H	54	41.6	6.8
4	4880.00	36.4 AV	54.0	-17.6	1.28 H	54	29.6	6.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2440.00	96.6 PK			2.80 V	200	63.5	33.1
2	*2440.00	91.5 AV			2.80 V	200	58.4	33.1
3	4880.00	47.0 PK	74.0	-27.0	1.05 V	63	40.2	6.8
4	4880.00	35.4 AV	54.0	-18.6	1.05 V	63	28.6	6.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	98.5 PK			2.86 H	182	65.2	33.3
2	*2480.00	93.8 AV			2.86 H	182	60.5	33.3
3	2483.50	56.9 PK	74.0	-17.1	2.86 H	182	23.6	33.3
4	2483.50	45.9 AV	54.0	-8.1	2.86 H	182	12.6	33.3
5	4960.00	48.5 PK	74.0	-25.5	1.23 H	51	41.5	7.0
6	4960.00	36.6 AV	54.0	-17.4	1.23 H	51	29.6	7.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	95.2 PK			2.07 V	95	61.9	33.3
2	*2480.00	90.6 AV			2.07 V	95	57.3	33.3
3	2483.50	55.9 PK	74.0	-18.1	2.07 V	95	22.6	33.3
4	2483.50	44.6 AV	54.0	-9.4	2.07 V	95	11.3	33.3
5	4960.00	47.5 PK	74.0	-26.5	1.06 V	55	40.5	7.0
6	4960.00	35.6 AV	54.0	-18.4	1.06 V	55	28.6	7.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz worst-case data

CHANNEL	TX Channel 17	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	28.7 QP	40.0	-11.3	1.25 H	10	44.7	-16.0
2	57.16	27.5 QP	40.0	-12.5	1.50 H	121	41.5	-14.0
3	109.54	27.6 QP	43.5	-15.9	2.00 H	309	44.5	-16.9
4	441.28	24.5 QP	46.0	-21.5	1.00 H	225	32.2	-7.7
5	582.90	28.8 QP	46.0	-17.2	1.50 H	195	33.2	-4.4
6	848.68	40.7 QP	46.0	-5.3	1.00 H	326	39.1	1.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	36.3 QP	40.0	-3.7	1.50 V	220	52.3	-16.0
2	47.46	29.7 QP	40.0	-10.3	1.25 V	26	43.8	-14.1
3	109.54	26.1 QP	43.5	-17.4	1.00 V	288	43.0	-16.9
4	365.62	22.1 QP	46.0	-23.9	2.00 V	284	31.7	-9.6
5	513.06	26.7 QP	46.0	-19.3	1.00 V	166	32.8	-6.1
6	844.80	41.6 QP	46.0	-4.4	1.00 V	112	40.1	1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz.

CHANNEL	TX Channel 17	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	29.5 QP	40.0	-10.5	1.25 H	358	45.5	-16.0
2	59.10	27.7 QP	40.0	-12.3	1.00 H	35	41.9	-14.2
3	84.32	24.4 QP	40.0	-15.6	1.25 H	72	43.2	-18.8
4	163.86	19.7 QP	43.5	-23.8	1.50 H	113	32.9	-13.2
5	449.04	25.3 QP	46.0	-20.7	1.00 H	15	32.9	-7.6
6	996.12	36.8 QP	54.0	-17.2	1.00 H	79	32.0	4.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	32.0 QP	40.0	-8.0	1.24 V	204	48.0	-16.0
2	64.92	31.2 QP	40.0	-8.8	1.24 V	207	46.2	-15.0
3	86.26	16.9 QP	40.0	-23.1	1.24 V	15	36.0	-19.1
4	130.88	29.7 QP	43.5	-13.8	1.00 V	79	44.7	-15.0
5	191.02	21.7 QP	43.5	-21.8	1.49 V	303	37.2	-15.5
6	967.02	37.9 QP	54.0	-16.1	1.24 V	15	33.4	4.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz.

CHANNEL	TX Channel 17	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz	TEST MODE	C

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	30.6 QP	40.0	-9.4	1.00 H	40	46.6	-16.0
2	51.34	32.2 QP	40.0	-7.8	1.00 H	283	46.1	-13.9
3	128.94	21.4 QP	43.5	-22.1	1.49 H	313	36.6	-15.2
4	158.04	20.8 QP	43.5	-22.7	1.00 H	97	33.8	-13.0
5	385.02	22.2 QP	46.0	-23.8	1.99 H	15	31.3	-9.1
6	503.36	25.7 QP	46.0	-20.3	1.24 H	239	32.1	-6.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	32.6 QP	40.0	-7.4	1.01 V	205	48.6	-16.0
2	53.28	31.1 QP	40.0	-8.9	1.24 V	23	45.0	-13.9
3	88.20	26.0 QP	43.5	-17.5	1.24 V	243	45.4	-19.4
4	125.06	21.2 QP	43.5	-22.3	1.99 V	15	36.6	-15.4
5	276.38	19.3 QP	46.0	-26.7	1.49 V	187	31.2	-11.9
6	635.28	29.5 QP	46.0	-16.5	1.01 V	15	32.4	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz.

CHANNEL	TX Channel 17	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz	TEST MODE	D

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	29.2 QP	40.0	-10.8	1.50 H	233	45.2	-16.0
2	53.28	28.2 QP	40.0	-11.8	1.00 H	15	42.1	-13.9
3	123.12	22.6 QP	43.5	-20.9	1.50 H	297	38.1	-15.5
4	322.94	21.5 QP	46.0	-24.5	1.00 H	15	31.9	-10.4
5	536.34	28.1 QP	46.0	-17.9	1.50 H	2	33.8	-5.7
6	937.92	36.4 QP	46.0	-9.6	1.00 H	15	32.7	3.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	30.5 QP	40.0	-9.5	1.49 V	0	46.5	-16.0
2	51.34	32.5 QP	40.0	-7.5	1.24 V	349	46.4	-13.9
3	154.16	20.8 QP	43.5	-22.7	1.00 V	138	33.9	-13.1
4	249.22	22.9 QP	46.0	-23.1	1.00 V	293	36.1	-13.2
5	615.88	29.4 QP	46.0	-16.6	1.00 V	296	32.7	-3.3
6	986.42	37.0 QP	54.0	-17.0	1.24 V	293	32.3	4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz.

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration	Due Date Of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 21, 2016	Nov. 20, 2017
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Dec. 22, 2016	Dec. 21, 2017
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Mar. 10, 2017	Mar. 09, 2018
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 28, 2016	Jul. 27, 2017
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

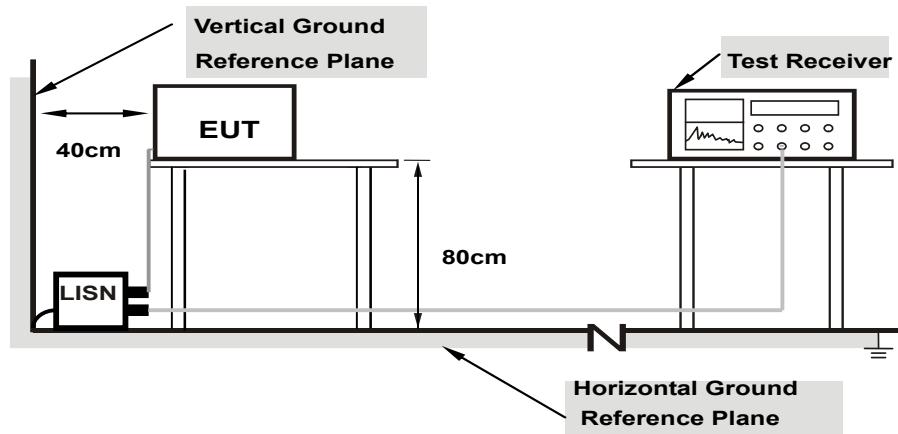

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	Channel 17	Test Mode	A

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	10.35	28.61	18.90	38.96	29.25	65.57	55.57	-26.61	-26.32
2	0.41361	10.40	22.54	11.79	32.94	22.19	57.58	47.58	-24.64	-25.39
3	0.98600	10.40	0.98	-3.75	11.38	6.65	56.00	46.00	-44.62	-39.35
4	3.55800	10.55	13.09	0.77	23.64	11.32	56.00	46.00	-32.36	-34.68
5	9.22200	10.80	5.21	-1.10	16.01	9.70	60.00	50.00	-43.99	-40.30
6	24.78200	11.50	2.70	-2.86	14.20	8.64	60.00	50.00	-45.80	-41.36

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

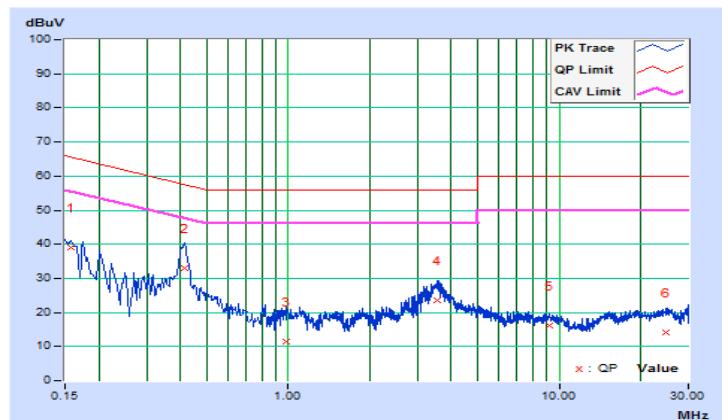


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	Channel 17	Test Mode	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	10.11	26.54	14.08	36.65	24.19	65.57	55.57	-28.92	-31.38
2	0.21805	10.14	17.36	6.96	27.50	17.10	62.89	52.89	-35.39	-35.79
3	0.42020	10.16	23.00	14.03	33.16	24.19	57.44	47.44	-24.28	-23.25
4	3.41000	10.31	13.86	0.79	24.17	11.10	56.00	46.00	-31.83	-34.90
5	8.70200	10.50	6.05	-1.91	16.55	8.59	60.00	50.00	-43.45	-41.41
6	18.65800	10.91	4.77	-2.24	15.68	8.67	60.00	50.00	-44.32	-41.33

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

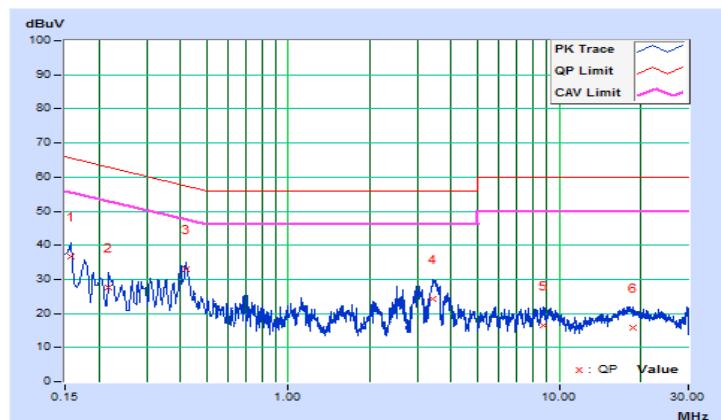


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	Channel 17	Test Mode	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]
1	0.16623	10.35	28.72	19.36	39.07	29.71	65.15	55.15	-26.08	-25.44
2	0.21406	10.37	23.01	13.37	33.38	23.74	63.05	53.05	-29.67	-29.31
3	0.40179	10.40	28.12	21.15	38.52	31.55	57.82	47.82	-19.30	-16.27
4	1.14956	10.41	8.39	1.42	18.80	11.83	56.00	46.00	-37.20	-34.17
5	3.44200	10.54	12.73	3.83	23.27	14.37	56.00	46.00	-32.73	-31.63
6	6.89000	10.70	3.85	-1.30	14.55	9.40	60.00	50.00	-45.45	-40.60

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

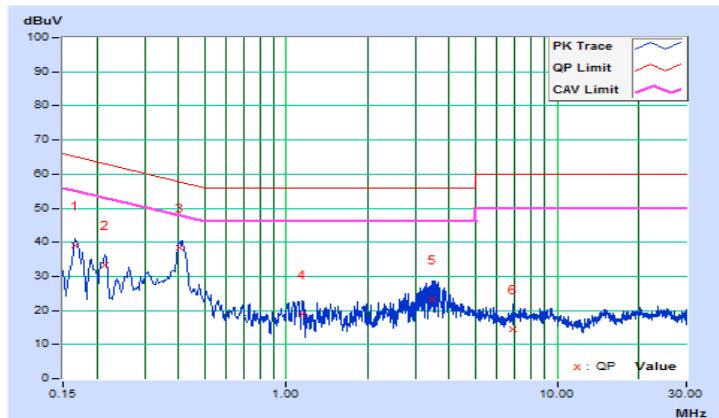


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	Channel 17	Test Mode	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17801	10.12	25.65	15.85	35.77	25.97	64.58	54.58	-28.81	-28.61
2	0.22211	10.14	18.94	9.14	29.08	19.28	62.74	52.74	-33.66	-33.46
3	0.40605	10.16	22.88	13.13	33.04	23.29	57.73	47.73	-24.69	-24.44
4	1.00600	10.17	8.19	1.15	18.36	11.32	56.00	46.00	-37.64	-34.68
5	3.53400	10.31	14.48	5.02	24.79	15.33	56.00	46.00	-31.21	-30.67
6	6.09000	10.41	4.22	-1.39	14.63	9.02	60.00	50.00	-45.37	-40.98

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

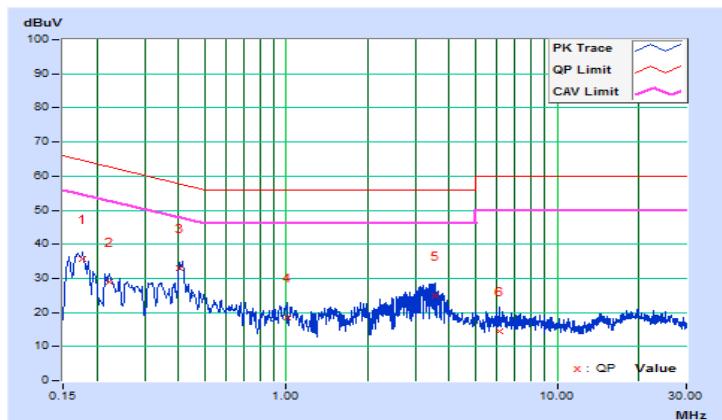


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	Channel 17	Test Mode	C

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	10.35	29.14	16.38	39.49	26.73	65.57	55.57	-26.08	-28.84
2	0.42020	10.40	28.30	18.74	38.70	29.14	57.44	47.44	-18.74	-18.30
3	0.70609	10.40	14.90	4.73	25.30	15.13	56.00	46.00	-30.70	-30.87
4	3.43000	10.54	17.05	3.11	27.59	13.65	56.00	46.00	-28.41	-32.35
5	8.64600	10.77	8.68	-0.74	19.45	10.03	60.00	50.00	-40.55	-39.97
6	17.93000	11.25	8.78	0.21	20.03	11.46	60.00	50.00	-39.97	-38.54

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

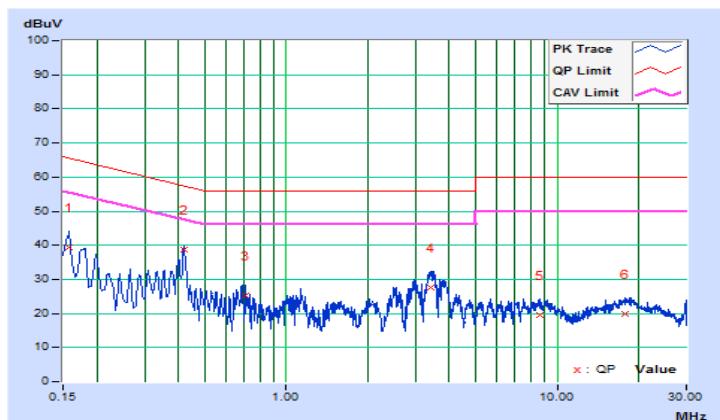


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	Channel 17	Test Mode	C

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17430	10.12	28.68	16.78	38.80	26.90	64.75	54.75	-25.95	-27.85
2	0.41799	10.16	30.22	20.87	40.38	31.03	57.49	47.49	-17.11	-16.46
3	1.13000	10.18	8.34	-0.35	18.52	9.83	56.00	46.00	-37.48	-36.17
4	3.48200	10.31	14.18	1.91	24.49	12.22	56.00	46.00	-31.51	-33.78
5	7.21000	10.45	7.26	-0.30	17.71	10.15	60.00	50.00	-42.29	-39.85
6	22.61000	11.02	4.77	-2.17	15.79	8.85	60.00	50.00	-44.21	-41.15

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

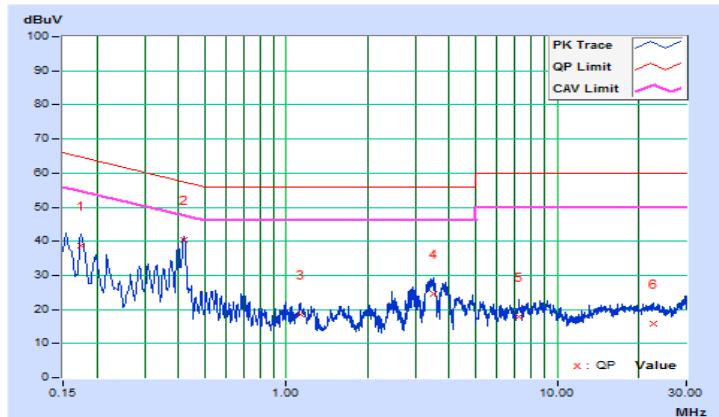


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	Channel 17	Test Mode	D

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	10.35	31.99	18.63	42.34	28.98	65.78	55.78	-23.44	-26.80
2	0.41400	10.40	18.80	11.57	29.20	21.97	57.57	47.57	-28.37	-25.60
3	0.88564	10.40	11.11	3.59	21.51	13.99	56.00	46.00	-34.49	-32.01
4	3.44200	10.54	13.74	3.78	24.28	14.32	56.00	46.00	-31.72	-31.68
5	8.25000	10.75	7.10	1.85	17.85	12.60	60.00	50.00	-42.15	-37.40
6	28.63340	11.63	4.58	-0.23	16.21	11.40	60.00	50.00	-43.79	-38.60

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

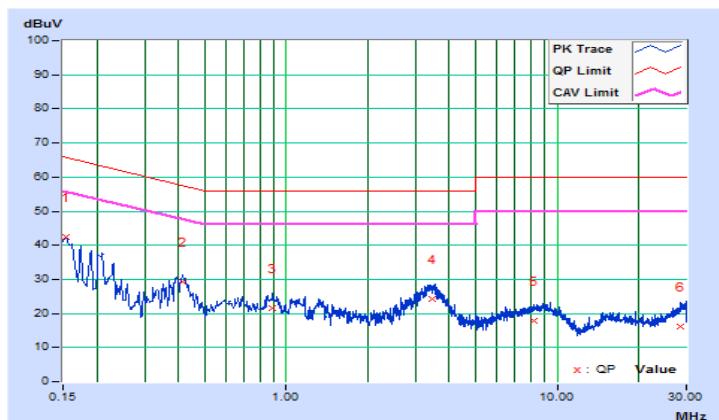


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	Channel 17	Test Mode	D

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16535	10.12	31.49	18.72	41.61	28.84	65.19	55.19	-23.58	-26.35
2	0.40392	10.16	28.97	21.51	39.13	31.67	57.77	47.77	-18.64	-16.10
3	0.81000	10.17	10.63	2.31	20.80	12.48	56.00	46.00	-35.20	-33.52
4	3.49000	10.31	13.92	4.93	24.23	15.24	56.00	46.00	-31.77	-30.76
5	7.41400	10.46	6.79	0.21	17.25	10.67	60.00	50.00	-42.75	-39.33
6	25.03000	11.07	5.84	1.58	16.91	12.65	60.00	50.00	-43.09	-37.35

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

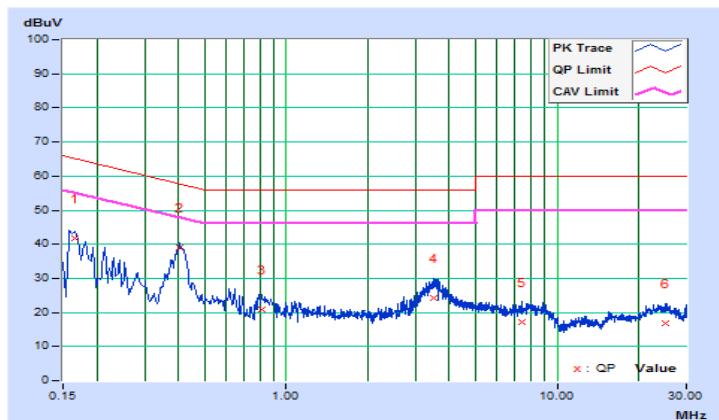


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup

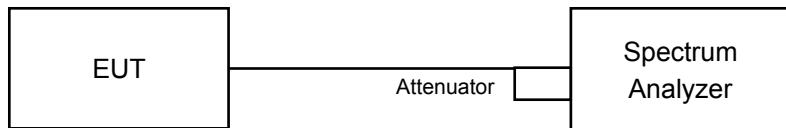

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard


No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
37	2402	0.67	0.5	Pass
17	2440	0.68	0.5	Pass
39	2480	0.67	0.5	Pass

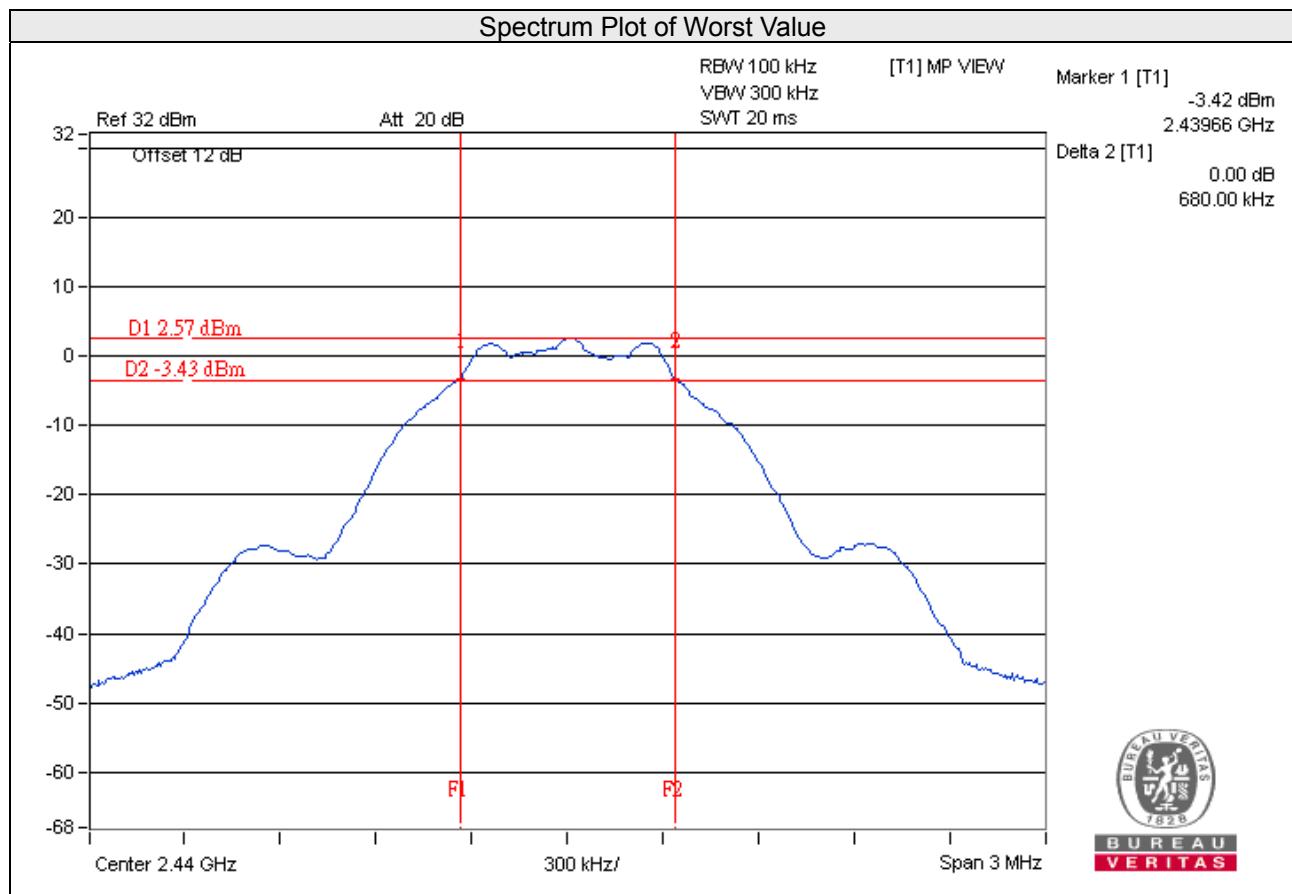


4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 Test Setup

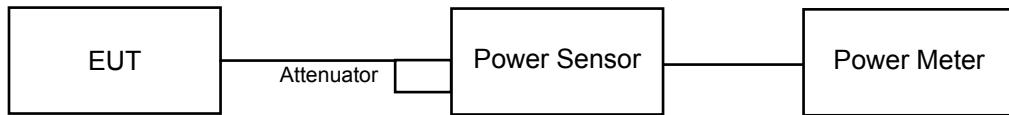

4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
37	2402	1.845	2.66	30	Pass
17	2440	2.553	4.07	30	Pass
39	2480	1.750	2.43	30	Pass


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
37	2402	1.413	1.50
17	2440	2.061	3.14
39	2480	1.225	0.88

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup

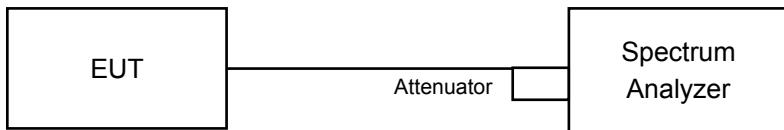

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard


No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

Channel	Freq. (MHz)	PSD (dBm)	Limit (dBm)	Pass /Fail
37	2402	-14.25	8	Pass
17	2440	-12.32	8	Pass
39	2480	-15.74	8	Pass

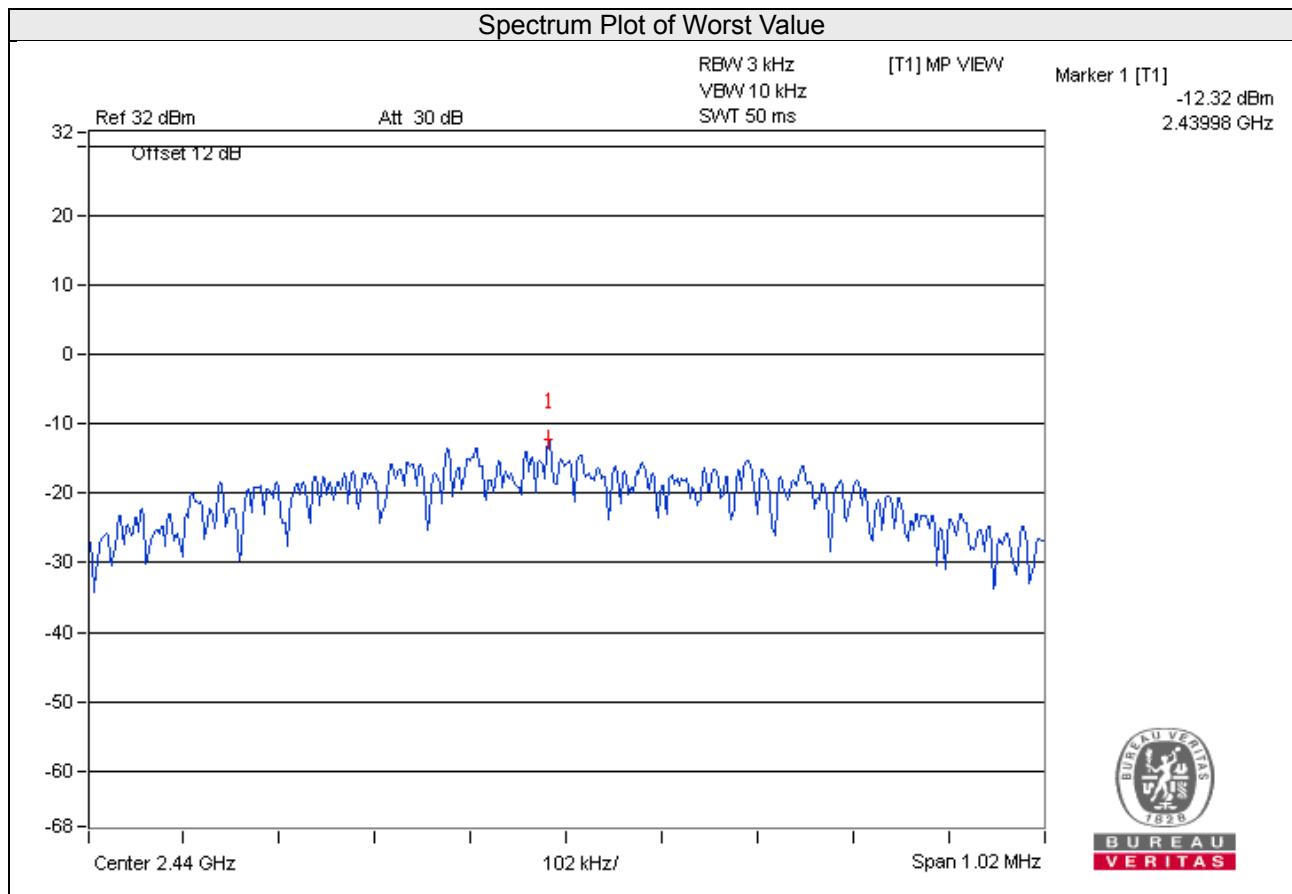


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup

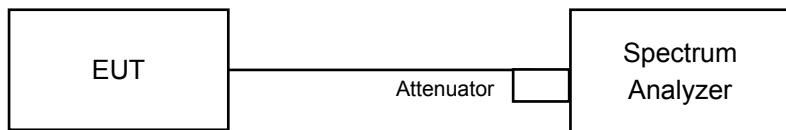

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set the RBW = 100 kHz.
- Set the VBW \geq 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW \geq 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard


No deviation.

4.6.6 EUT Operating Condition


Same as Item 4.3.6

4.6.7 Test Results


CH 37

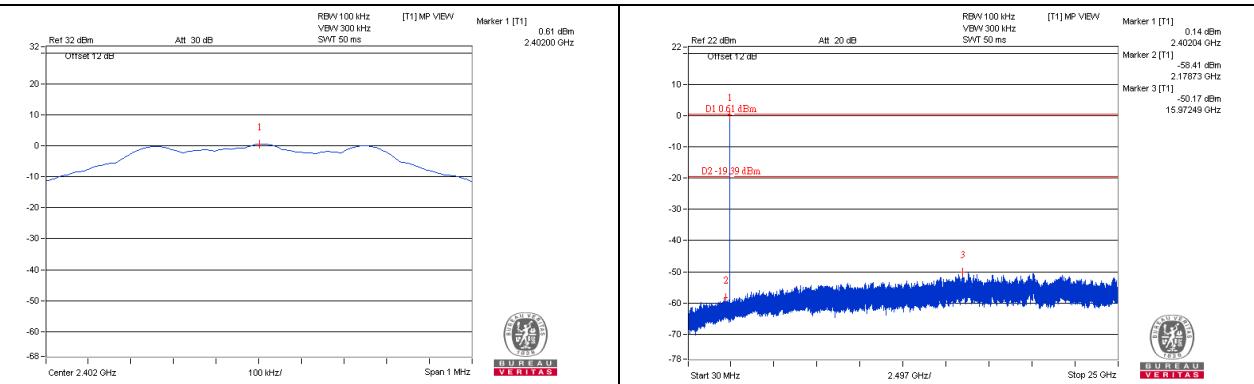

CH 17

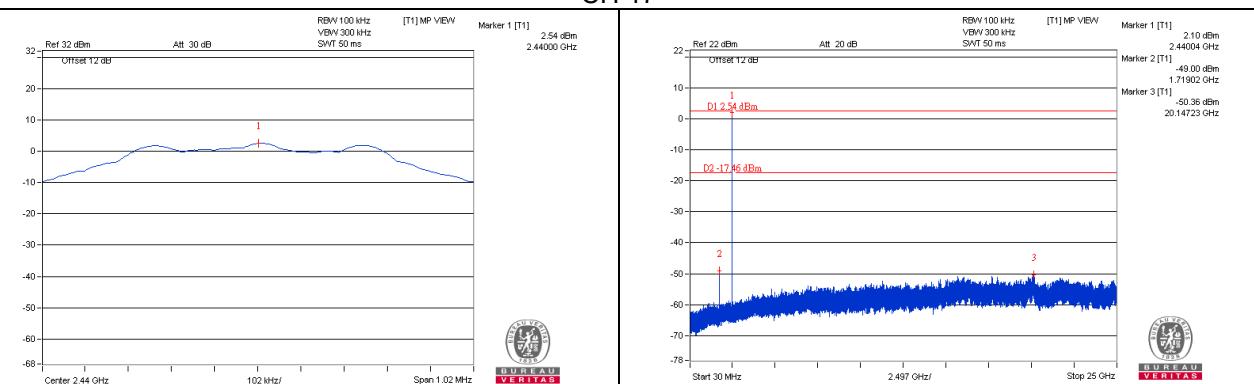


CH 39

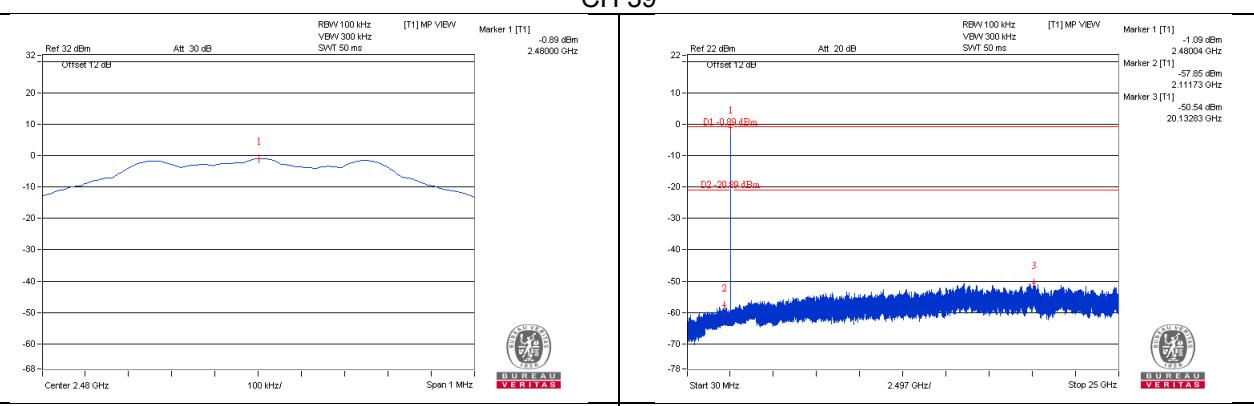

CH 37 Band edge

CH 39 Band edge

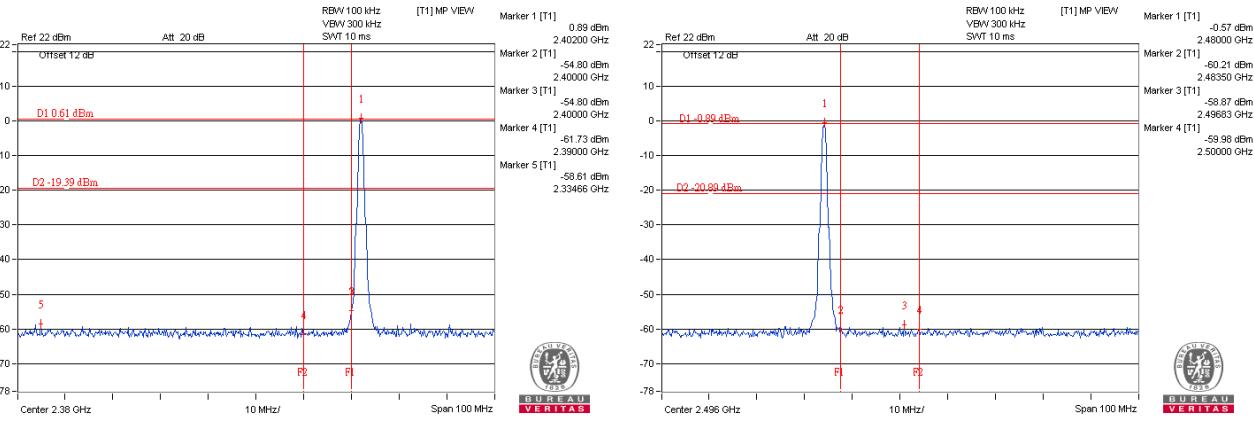

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---