



FCC RF Test Report

FCC ID : UZ7WS5012
EQUIPMENT : WS501 Wearable Computer
BRAND NAME : Zebra
MODEL NAME : WS5012
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069, USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069, USA
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Feb. 13, 2025 ~ Mar. 13, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	8
1.4 Testing Location	8
1.5 Test Software.....	9
1.6 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system	14
2.5 EUT Operation Test Setup	14
2.6 Measurement Results Explanation Example.....	14
3 TEST RESULT	15
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	19
3.4 Unwanted Emissions Measurement	22
3.5 AC Conducted Emission Measurement.....	27
3.6 Antenna Requirements.....	29
4 LIST OF MEASURING EQUIPMENT	31
5 MEASUREMENT UNCERTAINTY	32
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR512204E	Rev. 01	Initial issue of report	Apr. 15, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 1.00 dB at 5350.00 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 13.57 dB at 0.38 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	WS501 Wearable Computer
Brand Name	Zebra
Model Name	WS5012
FCC ID	UZ7WS5012
SN Code	Conducted: 250145247E0026 Conduction: 250175247E0088 Radiation: 250175247E0085
HW Version	EV1
SW Version	14-02-11.00-UN-U00-PRD-APL-04
MFD	05FEB25
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000446B

Supported Unit used in test configuration and system				
USB Cable	Brand Name	Zebra	Part Number	CBL-WS5X-USBA-01
AC Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
WS50 Two Finger Trigger Mount	Brand Name	Zebra	Part Number	SG-WS5X-TRGA-01
Replacement protective shell for WS50 Scan	Brand Name	Zebra	Part Number	SG-WS5X-SHLCS-01
Replacement protective deflector for WS50 Scan	Brand Name	Zebra	Part Number	SG-WS5X-DFLT-01
WS50 Scan Back of Hand Mount	Brand Name	Zebra	Part Number	SG-WS5X-BHMT-01
Spare Hand Wrap for WS50 Back of Hand Mount (right hand medium size)	Brand Name	Zebra	Part Number	SG-WEAR-HNWPRM-01
Spare Hand Wrap for WS50 Back of Hand Mount (left hand large size)	Brand Name	Zebra	Part Number	SG-WEAR-HNWPLL-01



1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	MIMO <Ant. 0 + 1> <5180 MHz ~ 5240 MHz> 802.11a : 21.42 dBm / 0.1384 W 802.11n HT20 : 21.33 dBm / 0.1358 W 802.11n HT40 : 21.77 dBm / 0.1503 W 802.11ac VHT20: 21.39 dBm / 0.1377 W 802.11ac VHT40: 21.82 dBm / 0.1521 W 802.11ac VHT80: 18.10 dBm / 0.0646 W 802.11ax HE20: 21.54 dBm / 0.1426 W 802.11ax HE40: 21.88 dBm / 0.1542 W 802.11ax HE80: 18.21 dBm / 0.0662 W <5260 MHz ~ 5320 MHz> 802.11a : 21.59 dBm / 0.1442 W 802.11n HT20 : 21.35 dBm / 0.1365 W 802.11n HT40 : 22.03 dBm / 0.1596 W 802.11ac VHT20: 21.09 dBm / 0.1285 W 802.11ac VHT40: 22.06 dBm / 0.1607 W 802.11ac VHT80: 17.61 dBm / 0.0577 W 802.11ax HE20: 21.50 dBm / 0.1413 W 802.11ax HE40: 22.11 dBm / 0.1626 W 802.11ax HE80: 17.76 dBm / 0.0597 W <5500 MHz ~ 5720 MHz > 802.11a : 20.89 dBm / 0.1227 W 802.11n HT20 : 20.84 dBm / 0.1213 W 802.11n HT40 : 20.73 dBm / 0.1183 W 802.11ac VHT20: 20.90 dBm / 0.1230 W 802.11ac VHT40: 20.79 dBm / 0.1199 W 802.11ac VHT80: 21.11 dBm / 0.1291 W 802.11ax HE20: 20.96 dBm / 0.1247 W 802.11ax HE40: 20.85 dBm / 0.1216 W 802.11ax HE80: 21.24 dBm / 0.1330 W <5745 MHz ~ 5825 MHz> 802.11a : 23.64 dBm / 0.2312 W 802.11n HT20 : 23.38 dBm / 0.2178 W 802.11n HT40 : 22.25 dBm / 0.1679 W 802.11ac VHT20: 23.47 dBm / 0.2223 W 802.11ac VHT40: 22.28 dBm / 0.1690 W 802.11ac VHT80: 22.27 dBm / 0.1687 W 802.11ax HE20: 23.61 dBm / 0.2296 W 802.11ax HE40: 22.51 dBm / 0.1782 W 802.11ax HE80: 22.54 dBm / 0.1795 W

99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 17.619 MHz 802.11ac VHT20 : 18.610 MHz 802.11ac VHT40 : 36.533 MHz 802.11ac VHT80 : 76.190 MHz 802.11ax HE20: 19.124 MHz 802.11ax HE40: 38.057 MHz 802.11ax HE80: 77.867 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.695 MHz 802.11ac VHT20 : 18.610 MHz 802.11ac VHT40 : 36.610 MHz 802.11ac VHT80 : 75.962 MHz 802.11ax HE20: 19.124 MHz 802.11ax HE40: 38.019 MHz 802.11ax HE80: 77.714 MHz <5500 MHz ~ 5720 MHz> 802.11a : 17.771 MHz 802.11ac VHT20 : 18.686 MHz 802.11ac VHT40 : 36.648 MHz 802.11ac VHT80 : 76.343 MHz 802.11ax HE20: 19.162 MHz 802.11ax HE40: 38.019 MHz 802.11ax HE80: 77.943 MHz <5745 MHz ~ 5825 MHz> 802.11a : 18.610 MHz 802.11ac VHT20 : 19.276 MHz 802.11ac VHT40 : 36.762 MHz 802.11ac VHT80 : 76.276 MHz 802.11ax HE20: 19.333 MHz 802.11ax HE40: 38.019 MHz 802.11ax HE80: 77.867 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> <Ant. 0> : IFA Antenna with gain 0.30 dBi <Ant. 1> : IFA Antenna with gain 1.50 dBi <5260 MHz ~ 5320 MHz> <Ant. 0> : IFA Antenna with gain 0.60 dBi <Ant. 1> : IFA Antenna with gain 2.30 dBi <5500 MHz ~ 5720 MHz> <Ant. 0> : IFA Antenna with gain 0.60 dBi <Ant. 1> : IFA Antenna with gain 0.70 dBi <5745 MHz ~ 5825 MHz> <Ant. 0> : IFA Antenna with gain -1.00 dBi <Ant. 1> : IFA Antenna with gain -1.80 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. The device supports WLAN MIMO CDD mode for 11a/n/ac/ax and Tx Beamforming mode for 11ax.

2. For WLAN SISO/MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.
3. For CDD and Beamforming modes, the CDD mode is the worst case, Beamforming power is set 3dB lower than CDD power. Thus only CDD mode was evaluated in this report by referring to their maximum conducted power.
4. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing has assessed only 802.11ac VHT20/ VHT40 by referring to their higher conducted power.
5. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power/PSD > partial RU, therefore the full RU perform full test, and partial RU verify bandedge/spurious.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH08-KS TH01-KS	CN1257	314309



Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ	CN1256	421272

Test data subcontracted: Conducted Emission test case in section 3.5 of this report.

1.5 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH08-KS	AUDIX	E3	210616
3.	CO02-SZ	AUDIX	E3	6.120613b

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "[#]" are 80MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

AC Conducted Emission	Mode 1 : WLAN 5G Link + BT Link + USB Cable(Charging from Adapter) + Battery
Remark: For Radiated Test Cases, The tests were performance with Adapter and USB Cable.	

RSE co-location mode
Bluetooth-LE 2Mbps CH39 Tx + 802.11ax HE20 CH64 MIMO Tx + NFC on




Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-
Straddle		-	-	138	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

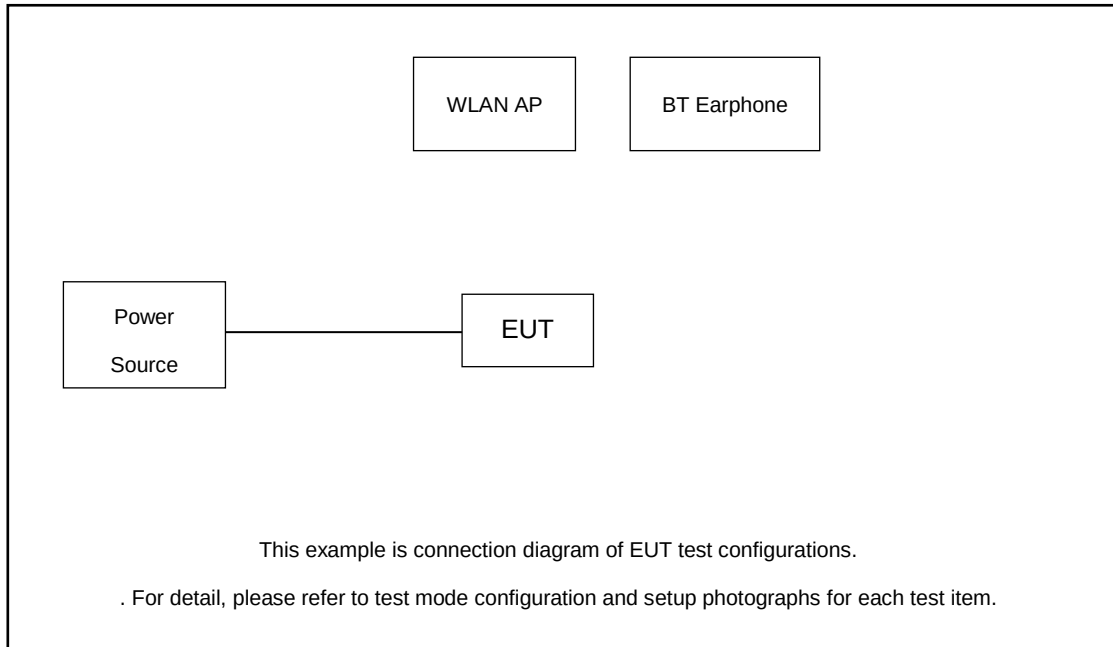

Radiated Emission:

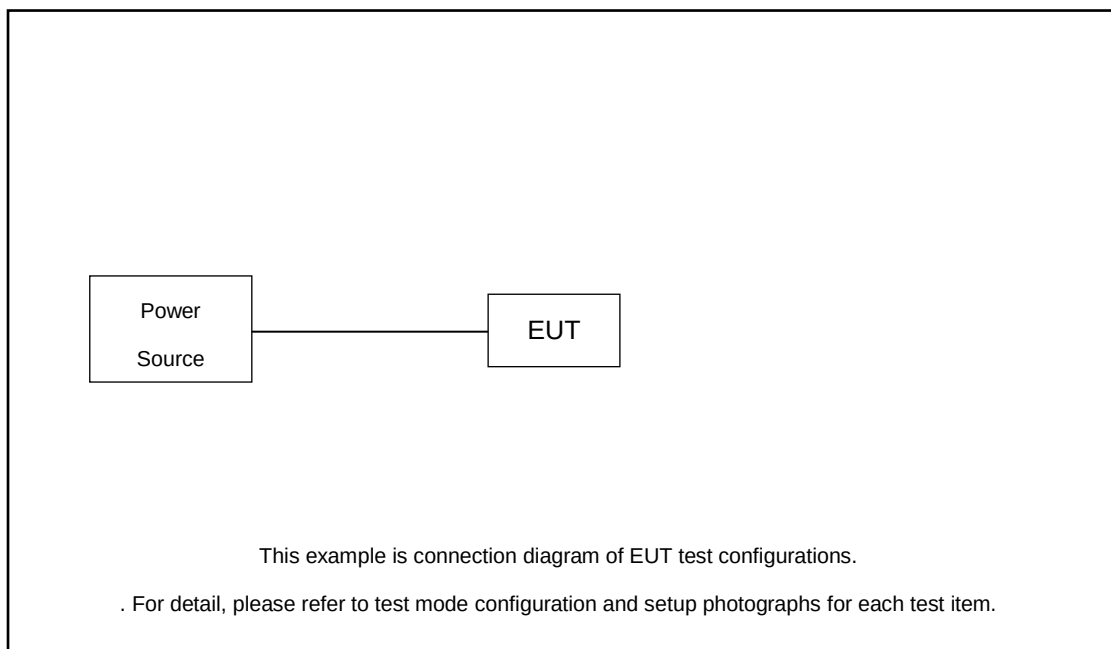

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8 m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.58 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.58 + 20 = 24.58 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

☒	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	- Set RBW = approximately 1% of the emission bandwidth. - Set the VBW > RBW. - Detector = Peak. - Trace mode = max hold - Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. - For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) $\geq 3 \times$ RBW. - Measure and record the results in the test report.
☒	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	- Set RBW = 100kHz. - Set the VBW $\geq 3 \times$ RBW. - Detector = Peak. - Trace mode = max hold - Measure the maximum width of the emission that is 6 dB down from the peak of the emission. - Measure and record the results in the test report.

3.1.4 Test Setup

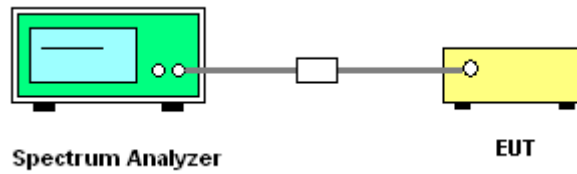

3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log₁₀ B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

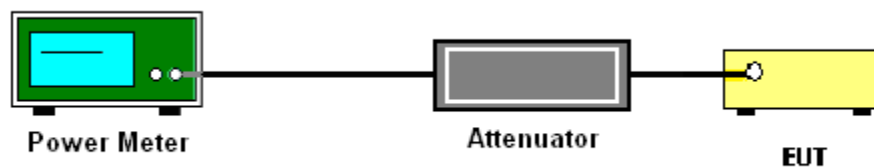

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

3.3.4 Test Setup

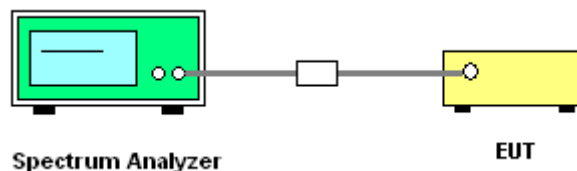

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

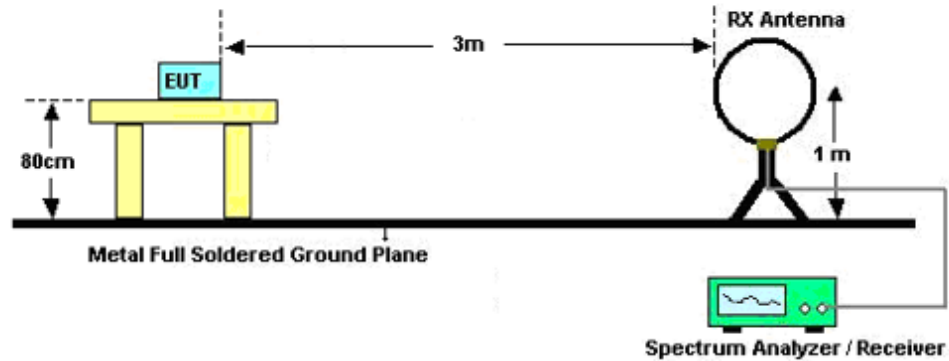

For radiated emissions from 30MHz to 1GHz

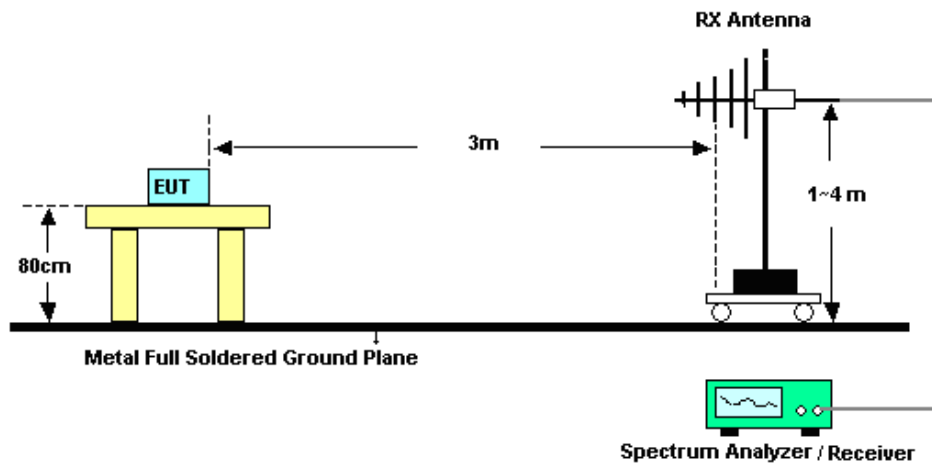

For radiated emissions above 1GHz

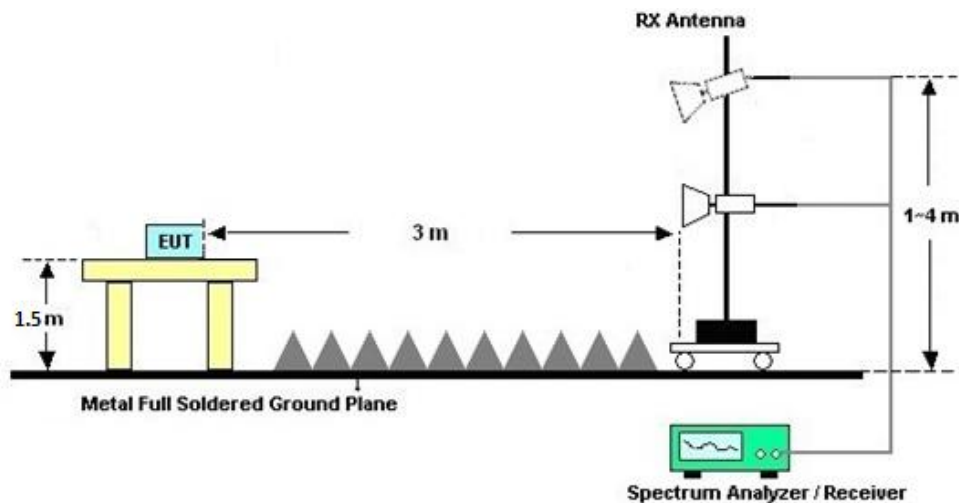

**3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

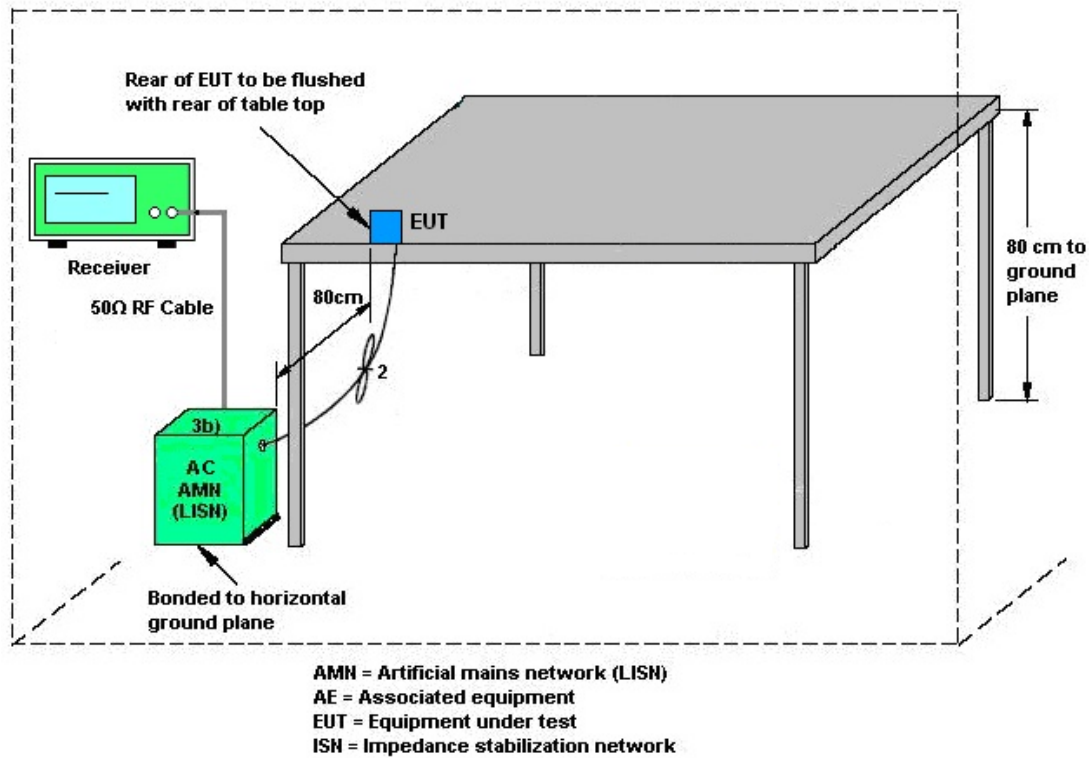

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(\text{NANT}/\text{NSS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $\text{NANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant. 0	Ant. 1	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
UNII-1	0.30	1.50	1.50	3.93	0.00	0.00
UNII-2A	0.60	2.30	2.30	4.50	0.00	0.00
UNII-2C	0.60	0.70	0.70	3.66	0.00	0.00
UNII-3	-1.00	-1.80	-1.00	1.62	0.00	0.00

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)

TXBF modes

The EUT supports TXBF mode for 11ax.

FCC KDB 662911 D01 Multiple Transmitter Output v02r01, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

	Ant 0	Ant 1	for	for	Limit	Limit
	(dBi)	(dBi)	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
UNII-1	0.30	1.50	3.93	3.93	0.00	0.00
UNII-2A	0.60	2.30	4.50	4.50	0.00	0.00
UNII-2C	0.60	0.70	3.66	3.66	0.00	0.00
UNII-3	-1.00	-1.80	1.62	1.62	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Feb. 13, 2025~ Mar. 13, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Feb. 13, 2025~ Mar. 13, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Feb. 13, 2025~ Mar. 13, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Ma x 30dBm	Jul. 04, 2024	Mar. 12, 2025	Jul. 03, 2025	Radiation (03CH08-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57441079	10Hz~44GHz	Oct. 09, 2024	Mar. 12, 2025	Oct. 08, 2025	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Mar. 12, 2025	Sep. 07, 2025	Radiation (03CH08-KS)
Bilog Antenna	TESEQ	CBL 6111D	59915	30MHz~1GHz	Aug. 18, 2024	Mar. 12, 2025	Aug.17, 2025	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 06, 2024	Mar. 12, 2025	Jul. 05, 2025	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060890	1Ghz~18Ghz	Jul. 23, 2024	Mar. 12, 2025	Jul. 22, 2025	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Mar. 12, 2025	Oct. 21, 2025	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 03, 2024	Mar. 12, 2025	Jul. 02, 2025	Radiation (03CH08-KS)
Amplifier	Keysight	83017A	MY53270417	500MHz~26.5G Hz	Oct. 09, 2024	Mar. 12, 2025	Oct. 08, 2025	Radiation (03CH08-KS)
Amplifier	EM	EM18G40GGA	060737	18~40GHz	Jan. 03, 2025	Mar. 12, 2025	Jan. 02, 2026	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	6160100024 73	N/A	NCR	Mar. 12, 2025	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Mar. 12, 2025	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Mar. 12, 2025	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Mar. 12, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Mar. 12, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	6160100024 70	100Vac~250Vac	Dec.25, 2024	Mar. 12, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5dB
---	-------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.40dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2025.2.13~2025.3.13	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	36	5180	0.29	0.28	18.13	17.95	21.05	24.00		1.50		Pass
11a	6Mbps	2	44	5220	0.29	0.28	18.00	17.93	20.97	24.00		1.50		Pass
11a	6Mbps	2	48	5240	0.29	0.28	18.41	18.42	21.42	24.00		1.50		Pass
HT20	MCS0	2	36	5180	0.29	0.30	18.01	17.76	20.89	24.00		1.50		Pass
HT20	MCS0	2	44	5220	0.29	0.30	17.92	17.87	20.90	24.00		1.50		Pass
HT20	MCS0	2	48	5240	0.29	0.30	18.29	18.35	21.33	24.00		1.50		Pass
HT40	MCS0	2	38	5190	0.60	0.60	14.92	15.19	18.07	24.00		1.50		Pass
HT40	MCS0	2	46	5230	0.60	0.60	18.78	18.73	21.77	24.00		1.50		Pass
VHT20	MCS0	2	36	5180	0.31	0.28	18.11	17.80	20.97	24.00		1.50		Pass
VHT20	MCS0	2	44	5220	0.31	0.28	17.96	17.87	20.92	24.00		1.50		Pass
VHT20	MCS0	2	48	5240	0.31	0.28	18.37	18.39	21.39	24.00		1.50		Pass
VHT40	MCS0	2	38	5190	0.60	0.60	14.95	15.21	18.09	24.00		1.50		Pass
VHT40	MCS0	2	46	5230	0.60	0.60	18.84	18.78	21.82	24.00		1.50		Pass
VHT80	MCS0	2	42	5210	0.36	0.35	14.99	15.19	18.10	24.00		1.50		Pass

Power Setting	
Ant 0	Ant 1
	17.5
	17.5
	18
	17.5
	17.5
	18
	15
	18.5
	17.5
	17.5
	18
	15
	18.5
	15

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail	Power Setting	
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1			Ant 0	Ant 1
11a	6Mbps	2	52	5260	0.29	0.28	18.14	18.27	21.21	23.98	2.30		30.00	Pass	18		
11a	6Mbps	2	60	5300	0.29	0.28	17.91	18.20	21.07	23.98	2.30		30.00	Pass	18		
11a	6Mbps	2	64	5320	0.29	0.28	18.51	18.65	21.59	23.98	2.30		30.00	Pass	18.5		
HT20	MCS0	2	52	5260	0.29	0.30	17.91	18.09	21.01	23.98	2.30		30.00	Pass	18		
HT20	MCS0	2	60	5300	0.29	0.30	17.74	18.21	20.99	23.98	2.30		30.00	Pass	18		
HT20	MCS0	2	64	5320	0.29	0.30	18.24	18.44	21.35	23.98	2.30		30.00	Pass	18.5		
HT40	MCS0	2	54	5270	0.60	0.60	18.96	19.07	22.03	23.98	2.30		30.00	Pass	19		
HT40	MCS0	2	62	5310	0.60	0.60	14.81	15.64	18.26	23.98	2.30		30.00	Pass	15.5		
VHT20	MCS0	2	52	5260	0.31	0.28	18.04	18.13	21.09	23.98	2.30		30.00	Pass	18		
VHT20	MCS0	2	60	5300	0.31	0.28	17.87	18.24	21.07	23.98	2.30		30.00	Pass	18		
VHT20	MCS0	2	64	5320	0.31	0.28	18.34	18.50	21.43	23.98	2.30		30.00	Pass	18.5		
VHT40	MCS0	2	54	5270	0.60	0.60	19.01	19.09	22.06	23.98	2.30		30.00	Pass	19		
VHT40	MCS0	2	62	5310	0.60	0.60	14.87	15.66	18.29	23.98	2.30		30.00	Pass	15.5		
VHT80	MCS0	2	58	5290	0.36	0.35	14.20	14.97	17.61	23.98	2.30		30.00	Pass	15		

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	2	100	5500	0.29	0.28	17.75	18.01	20.89	23.98		0.70		30.00	Pass
11a	6Mbps	2	116	5580	0.29	0.28	17.51	17.60	20.56	23.98		0.70		30.00	Pass
11a	6Mbps	2	140	5700	0.29	0.28	16.71	16.43	19.58	23.98		0.70		30.00	Pass
HT20	MCS0	2	100	5500	0.29	0.30	17.57	18.08	20.84	23.98		0.70		30.00	Pass
HT20	MCS0	2	116	5580	0.29	0.30	17.55	17.40	20.48	23.98		0.70		30.00	Pass
HT20	MCS0	2	140	5700	0.29	0.30	16.54	16.12	19.34	23.98		0.70		30.00	Pass
HT40	MCS0	2	102	5510	0.60	0.60	16.14	16.41	19.29	23.98		0.70		30.00	Pass
HT40	MCS0	2	110	5550	0.60	0.60	17.49	17.48	20.50	23.98		0.70		30.00	Pass
HT40	MCS0	2	134	5670	0.60	0.60	18.15	17.25	20.73	23.98		0.70		30.00	Pass
VHT20	MCS0	2	100	5500	0.31	0.28	17.66	18.11	20.90	23.98		0.70		30.00	Pass
VHT20	MCS0	2	116	5580	0.31	0.28	17.62	17.44	20.54	23.98		0.70		30.00	Pass
VHT20	MCS0	2	140	5700	0.31	0.28	16.61	16.13	19.38	23.98		0.70		30.00	Pass
VHT40	MCS0	2	102	5510	0.60	0.60	16.16	16.47	19.32	23.98		0.70		30.00	Pass
VHT40	MCS0	2	110	5550	0.60	0.60	17.51	17.50	20.51	23.98		0.70		30.00	Pass
VHT40	MCS0	2	134	5670	0.60	0.60	18.21	17.31	20.79	23.98		0.70		30.00	Pass
VHT80	MCS0	2	106	5530	0.36	0.35	15.33	16.00	18.69	23.98		0.70		30.00	Pass
VHT80	MCS0	2	122	5610	0.36	0.35	18.15	17.86	21.02	23.98		0.70		30.00	Pass

Power Setting	
Ant 0	Ant 1
17.5	
17	
16	
17.5	
17	
16	
17.5	
17	
16	
17	
16	
17	
16	
17	
15.5	
17.5	

FCC U-NII-2C straddle channel MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	2	144	5720	0.29	0.28	17.97	17.37	20.69	23.98		0.70		30.00	Pass
HT20	MCS0	2	144	5720	0.29	0.30	17.84	17.26	20.57	23.98		0.70		30.00	Pass
HT40	MCS0	2	142	5710	0.60	0.60	18.14	16.97	20.60	23.98		0.70		30.00	Pass
VHT20	MCS0	2	144	5720	0.31	0.28	17.91	17.28	20.61	23.98		0.70		30.00	Pass
VHT40	MCS0	2	142	5710	0.60	0.60	18.17	17.04	20.65	23.98		0.70		30.00	Pass
VHT80	MCS0	2	138	5690	0.36	0.35	18.50	17.67	21.11	23.98		0.70		30.00	Pass

Power Setting	
Ant 0	Ant 1
17	
17	
17	
17	
17	
17	
17.5	

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	2	36	5180	Full	0.12	0.10	18.06	17.87	20.98	24.00		1.50	Pass	17.5	
HE20	MCS0	2	36	5180	26/0	0.05	0.05	9.89	10.21	13.06	24.00		1.50	Pass	9.5	
HE20	MCS0	2	36	5180	52/37	0.03	0.03	12.40	12.30	15.36	24.00		1.50	Pass	12	
HE20	MCS0	2	36	5180	106/53	0.00	0.00	15.61	15.15	18.40	24.00		1.50	Pass	15	
HE20	MCS0	2	44	5220	Full	0.12	0.10	18.03	17.92	20.99	24.00		1.50	Pass	17.5	
HE20	MCS0	2	44	5220	26/0	0.05	0.05	9.63	10.06	12.86	24.00		1.50	Pass	9.5	
HE20	MCS0	2	44	5220	52/37	0.03	0.03	12.65	13.00	15.84	24.00		1.50	Pass	12.5	
HE20	MCS0	2	44	5220	106/53	0.00	0.00	15.82	15.88	18.86	24.00		1.50	Pass	15.5	
HE20	MCS0	2	48	5240	Full	0.12	0.10	18.45	18.61	21.54	24.00		1.50	Pass	18	
HE20	MCS0	2	48	5240	26/8	0.05	0.05	9.34	9.98	12.68	24.00		1.50	Pass	9.5	
HE20	MCS0	2	48	5240	52/40	0.03	0.03	12.51	13.06	15.80	24.00		1.50	Pass	12.5	
HE20	MCS0	2	48	5240	106/54	0.00	0.00	15.55	15.97	18.78	24.00		1.50	Pass	15.5	
HE40	MCS0	2	38	5190	Full	0.23	0.23	15.05	15.31	18.19	24.00		1.50	Pass	15	
HE40	MCS0	2	38	5190	242/61	0.23	0.23	12.19	12.07	15.14	24.00		1.50	Pass	12	
HE40	MCS0	2	46	5230	Full	0.23	0.23	18.90	18.84	21.88	24.00		1.50	Pass	18.5	
HE40	MCS0	2	46	5230	242/62	0.23	0.23	16.35	16.06	19.22	24.00		1.50	Pass	16	
HE80	MCS0	2	42	5210	Full	0.43	0.43	15.08	15.32	18.21	24.00		1.50	Pass	15	
HE80	MCS0	2	42	5210	484/65	0.06	0.06	12.08	12.21	15.16	24.00		1.50	Pass	12.5	

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO																		
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail	Power Setting	
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1				
HE20	MCS0	2	52	5260	Full	0.12	0.10	18.07	18.21	21.15	23.98	2.30			30.00	Pass	18	
HE20	MCS0	2	52	5260	26/0	0.05	0.05	9.47	10.29	12.91	23.98	2.30			30.00	Pass	10	
HE20	MCS0	2	52	5260	52/37	0.03	0.03	12.48	13.45	16.00	23.98	2.30			30.00	Pass	13	
HE20	MCS0	2	52	5260	106/53	0.00	0.00	15.79	16.45	19.14	23.98	2.30			30.00	Pass	16	
HE20	MCS0	2	60	5300	Full	0.12	0.10	17.93	18.22	21.09	23.98	2.30			30.00	Pass	18	
HE20	MCS0	2	60	5300	26/0	0.05	0.05	9.16	10.50	12.89	23.98	2.30			30.00	Pass	10	
HE20	MCS0	2	60	5300	52/37	0.03	0.03	12.07	13.58	15.90	23.98	2.30			30.00	Pass	13	
HE20	MCS0	2	60	5300	106/53	0.00	0.00	15.52	16.57	19.09	23.98	2.30			30.00	Pass	16	
HE20	MCS0	2	64	5320	Full	0.12	0.10	18.35	18.62	21.50	23.98	2.30			30.00	Pass	18.5	
HE20	MCS0	2	64	5320	26/8	0.05	0.05	9.48	10.68	13.13	23.98	2.30			30.00	Pass	10.5	
HE20	MCS0	2	64	5320	52/40	0.03	0.03	12.45	13.81	16.19	23.98	2.30			30.00	Pass	13.5	
HE20	MCS0	2	64	5320	106/54	0.00	0.00	16.07	16.92	19.53	23.98	2.30			30.00	Pass	16.5	
HE40	MCS0	2	54	5270	Full	0.23	0.23	19.06	19.15	22.11	23.98	2.30			30.00	Pass	19	
HE40	MCS0	2	54	5270	242/61	0.23	0.23	15.28	15.39	18.35	23.98	2.30			30.00	Pass	15.5	
HE40	MCS0	2	62	5310	Full	0.23	0.23	14.96	15.76	18.39	23.98	2.30			30.00	Pass	15.5	
HE40	MCS0	2	62	5310	242/62	0.23	0.23	12.47	13.16	15.84	23.98	2.30			30.00	Pass	13	
HE80	MCS0	2	58	5290	Full	0.43	0.43	14.34	15.12	17.76	23.98	2.30			30.00	Pass	15	
HE80	MCS0	2	58	5290	484/66	0.06	0.06	11.58	12.07	14.84	23.98	2.30			30.00	Pass	12.5	

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	2	100	5500	Full	0.12	0.10	17.74	18.15	20.96	23.98		0.70		30.00	Pass
HE20	MCS0	2	100	5500	26/0	0.05	0.05	9.79	10.13	12.97	23.98		0.70		30.00	Pass
HE20	MCS0	2	100	5500	52/37	0.03	0.03	12.38	12.58	15.49	23.98		0.70		30.00	Pass
HE20	MCS0	2	100	5500	106/53	0.00	0.00	15.68	15.47	18.59	23.98		0.70		30.00	Pass
HE20	MCS0	2	116	5580	Full	0.12	0.10	17.58	17.52	20.56	23.98		0.70		30.00	Pass
HE20	MCS0	2	116	5580	26/0	0.05	0.05	9.22	9.28	12.26	23.98		0.70		30.00	Pass
HE20	MCS0	2	116	5580	52/37	0.03	0.03	12.25	12.20	15.24	23.98		0.70		30.00	Pass
HE20	MCS0	2	116	5580	106/53	0.00	0.00	15.63	15.22	18.44	23.98		0.70		30.00	Pass
HE20	MCS0	2	140	5700	Full	0.12	0.10	16.65	16.19	19.44	23.98		0.70		30.00	Pass
HE20	MCS0	2	140	5700	26/8	0.05	0.05	8.23	8.02	11.13	23.98		0.70		30.00	Pass
HE20	MCS0	2	140	5700	52/40	0.03	0.03	11.22	10.85	14.05	23.98		0.70		30.00	Pass
HE20	MCS0	2	140	5700	106/54	0.00	0.00	14.58	13.81	17.22	23.98		0.70		30.00	Pass
HE40	MCS0	2	102	5510	Full	0.23	0.23	16.21	16.55	19.39	23.98		0.70		30.00	Pass
HE40	MCS0	2	102	5510	242/61	0.23	0.23	12.82	13.15	16.00	23.98		0.70		30.00	Pass
HE40	MCS0	2	110	5550	Full	0.23	0.23	17.59	17.57	20.59	23.98		0.70		30.00	Pass
HE40	MCS0	2	110	5550	242/61	0.23	0.23	14.37	14.10	17.25	23.98		0.70		30.00	Pass
HE40	MCS0	2	134	5670	Full	0.23	0.23	18.28	17.36	20.85	23.98		0.70		30.00	Pass
HE40	MCS0	2	134	5670	242/62	0.23	0.23	14.70	13.99	17.37	23.98		0.70		30.00	Pass
HE80	MCS0	2	106	5530	Full	0.43	0.43	15.44	16.15	18.82	23.98		0.70		30.00	Pass
HE80	MCS0	2	106	5530	484/65	0.06	0.06	11.93	12.09	15.02	23.98		0.70		30.00	Pass
HE80	MCS0	2	122	5610	Full	0.43	0.43	18.24	18.00	21.13	23.98		0.70		30.00	Pass
HE80	MCS0	2	122	5610	484/66	0.06	0.06	15.19	14.24	17.75	23.98		0.70		30.00	Pass

FCC U-NII-2C straddle channel MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	2	144	5720	Full	0.12	0.10	17.97	17.33	20.67	23.98		0.70		30.00	Pass
HE20	MCS0	2	144	5720	26/8	0.05	0.05	9.87	9.31	12.61	23.98		0.70		30.00	Pass
HE20	MCS0	2	144	5720	52/40	0.03	0.03	12.41	11.70	15.08	23.98		0.70		30.00	Pass
HE20	MCS0	2	144	5720	106/54	0.00	0.00	15.81	14.73	18.31	23.98		0.70		30.00	Pass
HE40	MCS0	2	142	5710	Full	0.23	0.23	18.24	17.11	20.72	23.98		0.70		30.00	Pass
HE40	MCS0	2	142	5710	242/62	0.23	0.23	14.81	13.71	17.31	23.98		0.70		30.00	Pass
HE80	MCS0	2	138	5690	Full	0.43	0.43	18.61	17.82	21.24	23.98		0.70		30.00	Pass
HE80	MCS0	2	138	5690	484/66	0.06	0.06	15.23	13.93	17.64	23.98		0.70		30.00	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	149	5745	0.29	0.28	20.88	20.36	23.64	30.00	-1.00		Pass	
11a	6Mbps	2	157	5785	0.29	0.28	20.97	20.25	23.63	30.00	-1.00		Pass	
11a	6Mbps	2	165	5825	0.29	0.28	20.92	20.00	23.49	30.00	-1.00		Pass	
HT20	MCS0	2	149	5745	0.29	0.30	20.56	19.56	23.10	30.00	-1.00		Pass	
HT20	MCS0	2	157	5785	0.29	0.30	20.73	19.98	23.38	30.00	-1.00		Pass	
HT20	MCS0	2	165	5825	0.29	0.30	20.64	19.70	23.20	30.00	-1.00		Pass	
HT40	MCS0	2	151	5755	0.60	0.60	19.53	18.93	22.25	30.00	-1.00		Pass	
HT40	MCS0	2	159	5795	0.60	0.60	19.59	18.85	22.25	30.00	-1.00		Pass	
VHT20	MCS0	2	149	5745	0.31	0.28	20.68	19.60	23.18	30.00	-1.00		Pass	
VHT20	MCS0	2	157	5785	0.31	0.28	20.85	20.04	23.47	30.00	-1.00		Pass	
VHT20	MCS0	2	165	5825	0.31	0.28	20.75	19.77	23.30	30.00	-1.00		Pass	
VHT40	MCS0	2	151	5755	0.60	0.60	19.57	18.95	22.28	30.00	-1.00		Pass	
VHT40	MCS0	2	159	5795	0.60	0.60	19.61	18.88	22.27	30.00	-1.00		Pass	
VHT80	MCS0	2	155	5775	0.36	0.35	19.67	18.80	22.27	30.00	-1.00		Pass	

Power Setting	
Ant 0	Ant 1
20	
20	
20	
19.5	
20	
20	
19	
19	
19.5	
20	
20	
19	
19	
19	

TEST RESULTS DATA
Average Power Table

U-NII-3 MIMO															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
HE20	MCS0	2	149	5745	Full	0.12	0.10	20.89	19.68	23.34	30.00		-1.00		Pass
HE20	MCS0	2	149	5745	26/0	0.05	0.05	11.97	12.39	15.19	30.00		-1.00		Pass
HE20	MCS0	2	149	5745	52/37	0.03	0.03	14.75	14.87	17.82	30.00		-1.00		Pass
HE20	MCS0	2	149	5745	106/53	0.00	0.00	18.22	18.14	21.19	30.00		-1.00		Pass
HE20	MCS0	2	157	5785	Full	0.12	0.10	20.98	20.17	23.61	30.00		-1.00		Pass
HE20	MCS0	2	157	5785	26/0	0.05	0.05	12.48	12.77	15.64	30.00		-1.00		Pass
HE20	MCS0	2	157	5785	52/37	0.03	0.03	15.47	15.39	18.44	30.00		-1.00		Pass
HE20	MCS0	2	157	5785	106/53	0.00	0.00	18.71	18.75	21.74	30.00		-1.00		Pass
HE20	MCS0	2	165	5825	Full	0.12	0.10	20.86	19.94	23.44	30.00		-1.00		Pass
HE20	MCS0	2	165	5825	26/8	0.05	0.05	12.48	12.01	15.26	30.00		-1.00		Pass
HE20	MCS0	2	165	5825	52/40	0.03	0.03	15.29	14.94	18.13	30.00		-1.00		Pass
HE20	MCS0	2	165	5825	106/54	0.00	0.00	18.61	18.22	21.43	30.00		-1.00		Pass
HE40	MCS0	2	151	5755	Full	0.23	0.23	19.86	19.11	22.51	30.00		-1.00		Pass
HE40	MCS0	2	151	5755	242/61	0.03	0.03	16.49	16.35	19.43	30.00		-1.00		Pass
HE40	MCS0	2	159	5795	Full	0.23	0.23	19.90	19.05	22.50	30.00		-1.00		Pass
HE40	MCS0	2	159	5795	242/62	0.03	0.03	16.62	16.37	19.51	30.00		-1.00		Pass
HE80	MCS0	2	155	5775	Full	0.43	0.43	19.88	19.15	22.54	30.00		-1.00		Pass
HE80	MCS0	2	155	5775	484/65	0.06	0.06	15.99	15.93	18.97	30.00		-1.00		Pass
HE80	MCS0	2	155	5775	484/66	0.06	0.06	16.08	16.00	19.05	30.00		-1.00		Pass

Power Setting	
Ant 0	Ant 1
19.5	
12	
14.5	
17.5	
20	
12.5	
15	
18	
20	
12.5	
15	
18	
19	
16	
19	
16	
19	
16	



Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A-CDD	Ant0	5180	21.25	5169.26	5190.51	---	---
	Ant1	5180	21.01	5169.49	5190.51	---	---
	Ant0	5220	20.96	5209.35	5230.31	---	---
	Ant1	5220	21.15	5209.54	5230.70	---	---
	Ant0	5240	21.34	5229.35	5250.70	---	---
	Ant1	5240	21.06	5229.49	5250.55	---	---
	Ant0	5260	21.01	5249.49	5270.51	---	---
	Ant1	5260	21.11	5249.40	5270.51	---	---
	Ant0	5300	21.25	5289.45	5310.70	---	---
	Ant1	5300	21.01	5289.49	5310.51	---	---
	Ant0	5320	21.44	5309.26	5330.70	---	---
	Ant1	5320	21.44	5309.40	5330.84	---	---
	Ant0	5500	21.44	5489.35	5510.79	---	---
	Ant1	5500	21.30	5489.35	5510.65	---	---
	Ant0	5580	21.82	5569.26	5591.08	---	---
	Ant1	5580	21.34	5569.21	5590.55	---	---
	Ant0	5700	22.20	5688.54	5710.74	---	---
	Ant1	5700	21.39	5689.16	5710.55	---	---
	Ant0	5720	21.53	5709.21	5730.74	---	---
	Ant1	5720	21.15	5709.40	5730.55	---	---
	Ant0	5745	28.82	5729.92	5758.74	---	---
	Ant1	5745	24.54	5733.16	5757.70	---	---
	Ant0	5785	28.59	5770.87	5799.46	---	---
	Ant1	5785	27.06	5769.97	5797.03	---	---
	Ant0	5825	31.30	5808.83	5840.13	---	---
	Ant1	5825	25.01	5812.30	5837.32	---	---
11AC20MIMO	Ant0	5180	21.34	5169.40	5190.74	---	---
	Ant1	5180	21.53	5169.16	5190.70	---	---
	Ant0	5220	21.25	5209.35	5230.60	---	---
	Ant1	5220	21.06	5209.45	5230.51	---	---
	Ant0	5240	21.44	5229.21	5250.65	---	---
	Ant1	5240	21.44	5229.26	5250.70	---	---
	Ant0	5260	21.15	5249.35	5270.51	---	---
	Ant1	5260	21.25	5249.40	5270.65	---	---
	Ant0	5300	21.53	5289.21	5310.74	---	---
	Ant1	5300	21.30	5289.30	5310.60	---	---
	Ant0	5320	21.34	5309.35	5330.70	---	---
	Ant1	5320	21.34	5309.30	5330.65	---	---
	Ant0	5500	22.25	5488.64	5510.89	---	---
	Ant1	5500	21.39	5489.35	5510.74	---	---



	Ant0	5580	21.53	5569.26	5590.79	---	---
	Ant1	5580	21.39	5569.30	5590.70	---	---
	Ant0	5700	22.11	5689.26	5711.36	---	---
	Ant1	5700	21.77	5688.92	5710.70	---	---
	Ant0	5720	21.68	5709.21	5730.89	---	---
	Ant1	5720	21.39	5709.26	5730.65	---	---
	Ant0	5745	29.30	5731.16	5760.46	---	---
	Ant1	5745	26.97	5732.26	5759.22	---	---
	Ant0	5785	31.49	5768.21	5799.70	---	---
	Ant1	5785	25.63	5773.07	5798.70	---	---
	Ant0	5825	30.54	5809.73	5840.27	---	---
	Ant1	5825	24.87	5811.30	5836.17	---	---
11AC40MIMO	Ant0	5190	41.54	5169.85	5211.39	---	---
	Ant1	5190	40.78	5170.23	5211.01	---	---
	Ant0	5230	46.02	5209.85	5255.87	---	---
	Ant1	5230	39.26	5210.42	5249.68	---	---
	Ant0	5270	41.83	5249.94	5291.77	---	---
	Ant1	5270	39.92	5249.85	5289.77	---	---
	Ant0	5310	40.59	5290.04	5330.63	---	---
	Ant1	5310	39.45	5290.23	5329.68	---	---
	Ant0	5510	42.50	5490.13	5532.63	---	---
	Ant1	5510	39.83	5490.32	5530.15	---	---
	Ant0	5550	46.78	5528.13	5574.92	---	---
	Ant1	5550	39.26	5530.42	5569.68	---	---
	Ant0	5670	42.31	5649.94	5692.25	---	---
	Ant1	5670	39.45	5650.32	5689.77	---	---
	Ant0	5710	47.26	5690.13	5737.39	---	---
	Ant1	5710	39.73	5690.13	5729.87	---	---
	Ant0	5755	51.64	5731.61	5783.25	---	---
	Ant1	5755	41.26	5735.13	5776.39	---	---
	Ant0	5795	46.78	5772.85	5819.63	---	---
	Ant1	5795	39.54	5775.42	5814.96	---	---
11AC80MIMO	Ant0	5210	89.38	5169.31	5258.69	---	---
	Ant1	5210	81.56	5169.50	5251.07	---	---
	Ant0	5290	81.18	5249.31	5330.50	---	---
	Ant1	5290	81.18	5249.70	5330.88	---	---
	Ant0	5530	85.37	5489.50	5574.88	---	---
	Ant1	5530	81.18	5489.31	5570.50	---	---
	Ant0	5610	91.85	5567.22	5659.07	---	---
	Ant1	5610	81.37	5569.31	5650.69	---	---
	Ant0	5690	87.66	5648.36	5736.02	---	---
	Ant1	5690	81.37	5649.50	5730.88	---	---
11AX20MIMO	Ant0	5775	104.81	5718.50	5823.31	---	---
	Ant1	5775	81.18	5734.50	5815.69	---	---
11AX20MIMO	Ant0	5180	21.30	5169.45	5190.74	---	---




	Ant1	5180	21.06	5169.49	5190.55	---	---
	Ant0	5220	21.01	5209.45	5230.46	---	---
	Ant1	5220	20.91	5209.49	5230.41	---	---
	Ant0	5240	21.34	5229.40	5250.74	---	---
	Ant1	5240	21.06	5229.54	5250.60	---	---
	Ant0	5260	21.11	5249.40	5270.51	---	---
	Ant1	5260	21.01	5249.49	5270.51	---	---
	Ant0	5300	21.06	5289.45	5310.51	---	---
	Ant1	5300	21.15	5289.35	5310.51	---	---
	Ant0	5320	21.20	5309.35	5330.55	---	---
	Ant1	5320	21.11	5309.40	5330.51	---	---
	Ant0	5500	21.20	5489.30	5510.51	---	---
	Ant1	5500	21.30	5489.40	5510.70	---	---
	Ant0	5580	21.15	5569.49	5590.65	---	---
	Ant1	5580	21.01	5569.49	5590.51	---	---
	Ant0	5700	21.92	5689.30	5711.22	---	---
	Ant1	5700	21.11	5689.49	5710.60	---	---
	Ant0	5720	21.34	5709.26	5730.60	---	---
	Ant1	5720	21.11	5709.45	5730.55	---	---
	Ant0	5745	22.34	5733.83	5756.17	---	---
	Ant1	5745	21.63	5734.26	5755.89	---	---
	Ant0	5785	22.30	5773.97	5796.27	---	---
	Ant1	5785	22.68	5773.26	5795.93	---	---
	Ant0	5825	22.01	5813.88	5835.89	---	---
	Ant1	5825	23.68	5813.64	5837.32	---	---
11AX40MIMO	Ant0	5190	52.69	5164.32	5217.01	---	---
	Ant1	5190	47.74	5170.13	5217.87	---	---
	Ant0	5230	46.50	5207.08	5253.58	---	---
	Ant1	5230	39.73	5210.23	5249.96	---	---
	Ant0	5270	44.02	5249.75	5293.77	---	---
	Ant1	5270	44.59	5245.85	5290.44	---	---
	Ant0	5310	43.54	5289.75	5333.30	---	---
	Ant1	5310	43.83	5289.85	5333.68	---	---
	Ant0	5510	48.59	5485.94	5534.54	---	---
	Ant1	5510	44.02	5487.66	5531.68	---	---
	Ant0	5550	45.07	5528.61	5573.68	---	---
	Ant1	5550	43.26	5530.04	5573.30	---	---
	Ant0	5670	43.74	5650.04	5693.77	---	---
	Ant1	5670	40.40	5649.85	5690.25	---	---
	Ant0	5710	43.54	5690.04	5733.58	---	---
	Ant1	5710	39.92	5690.04	5729.96	---	---
	Ant0	5755	47.83	5730.85	5778.68	---	---
	Ant1	5755	40.21	5735.04	5775.25	---	---
	Ant0	5795	49.64	5769.04	5818.68	---	---
	Ant1	5795	39.92	5774.94	5814.87	---	---





11AX80MIMO	Ant0	5210	81.94	5169.31	5251.26	---	---
	Ant1	5210	89.19	5169.31	5258.50	---	---
	Ant0	5290	81.75	5249.12	5330.88	---	---
	Ant1	5290	81.56	5249.31	5330.88	---	---
	Ant0	5530	81.37	5489.31	5570.69	---	---
	Ant1	5530	81.37	5489.31	5570.69	---	---
	Ant0	5610	82.13	5569.31	5651.45	---	---
	Ant1	5610	85.56	5565.31	5650.88	---	---
	Ant0	5690	81.75	5649.31	5731.07	---	---
	Ant1	5690	81.94	5649.12	5731.07	---	---
	Ant0	5775	104.43	5724.21	5828.64	---	---
	Ant1	5775	81.56	5734.31	5815.88	---	---



Test Graphs

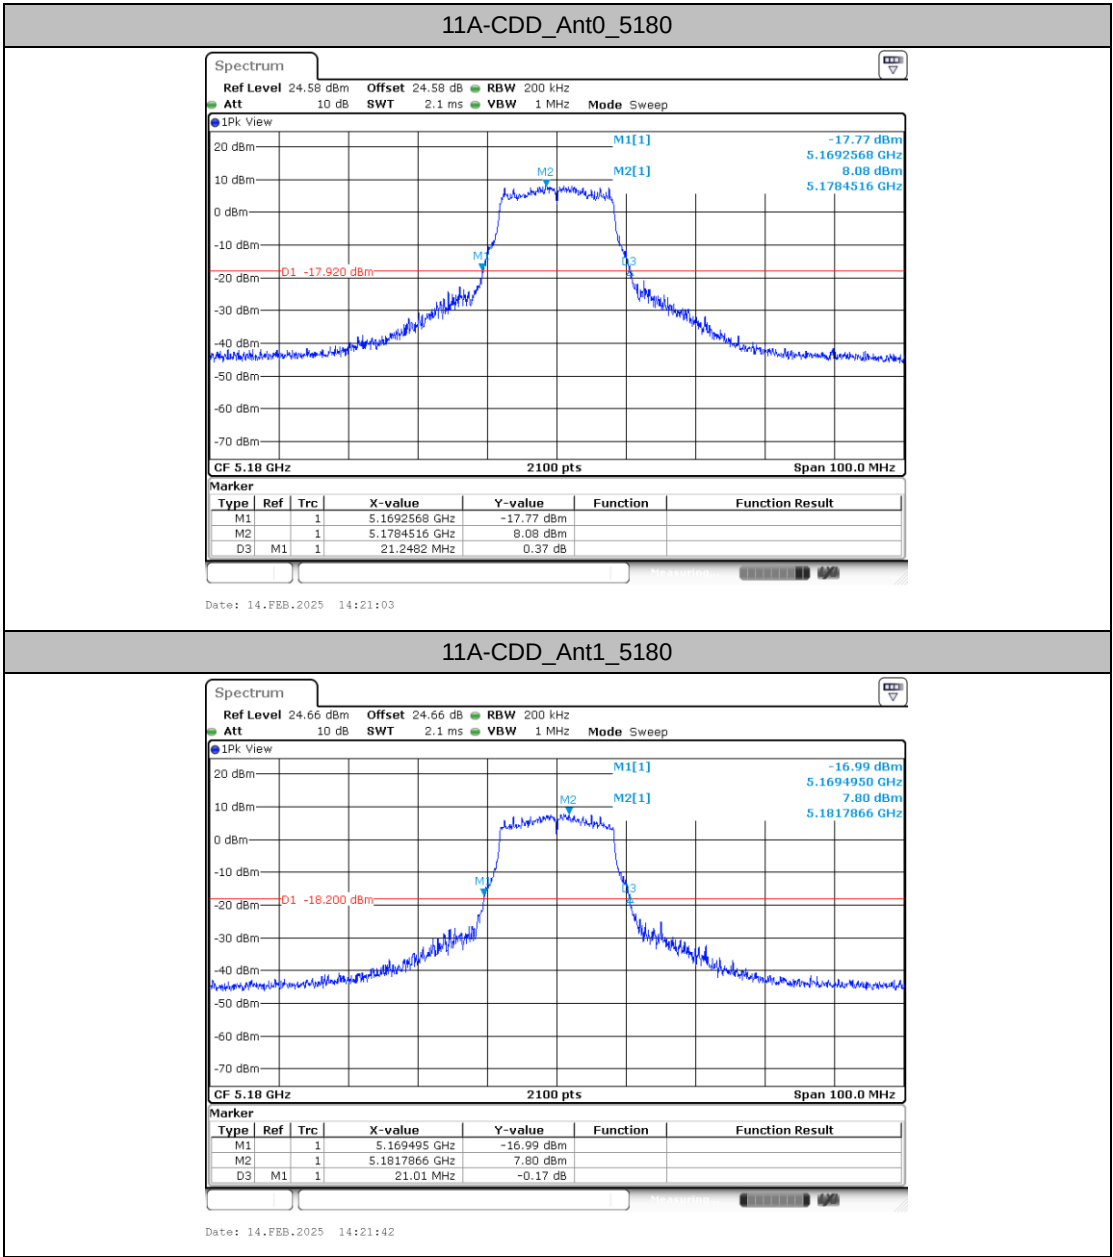


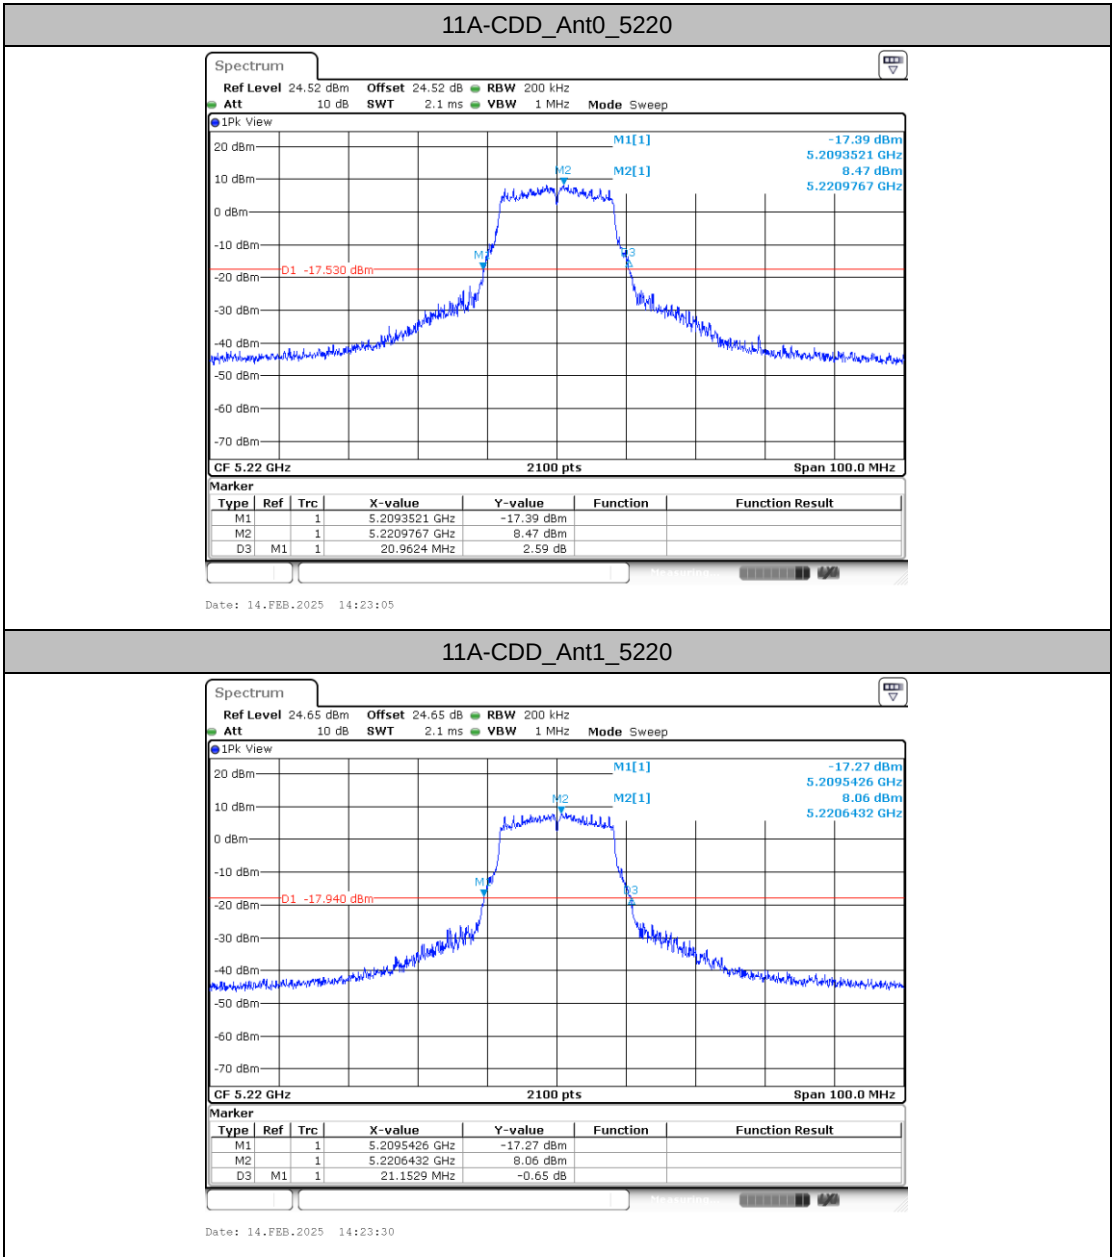

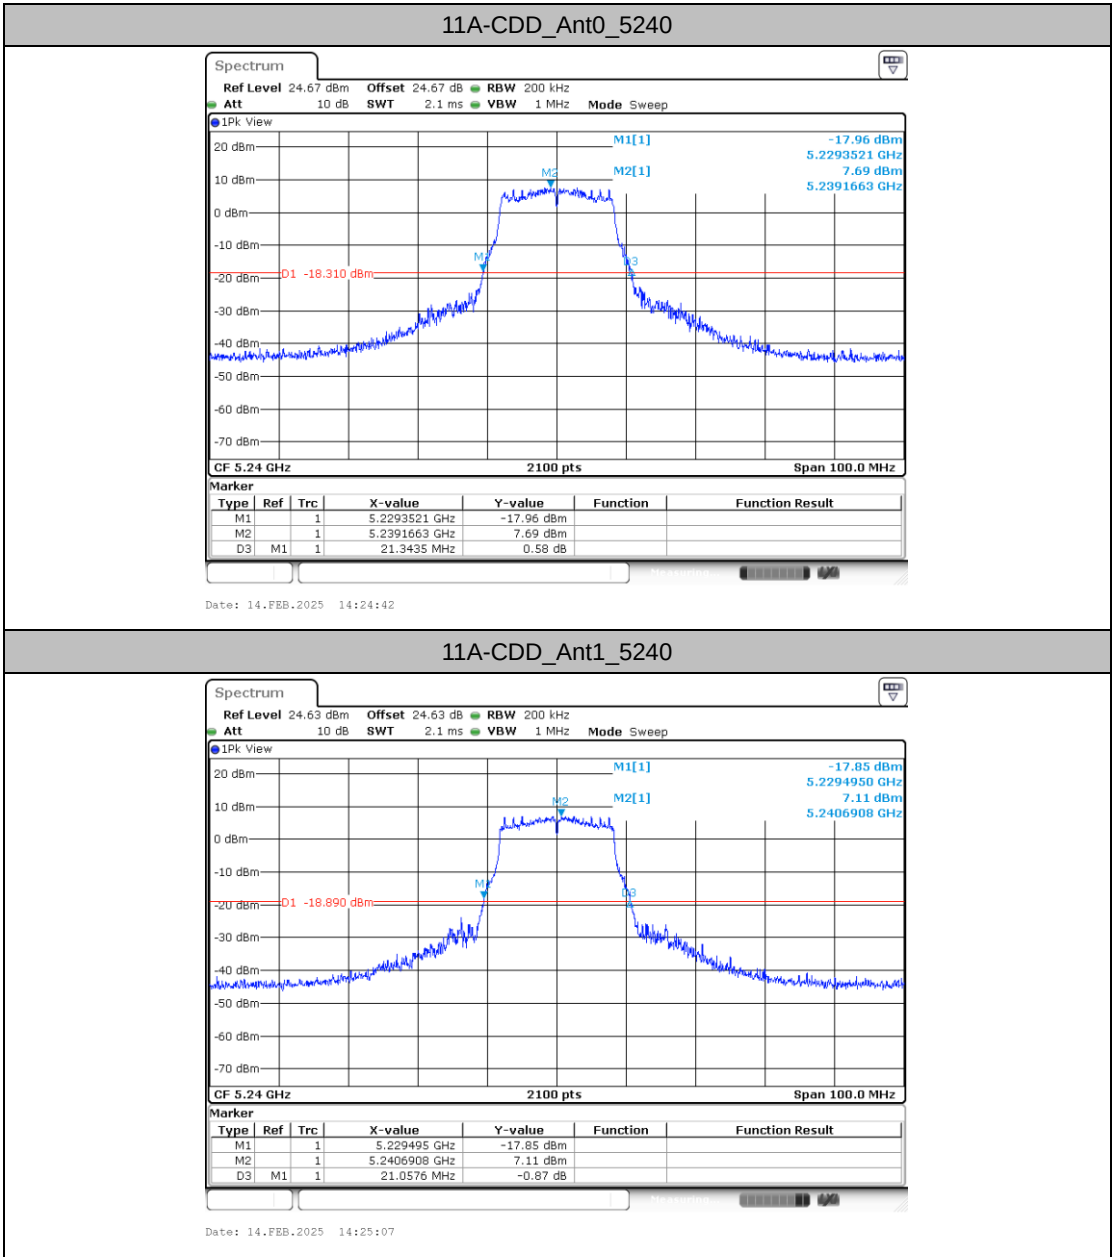




11A-CDD_Ant0_5260

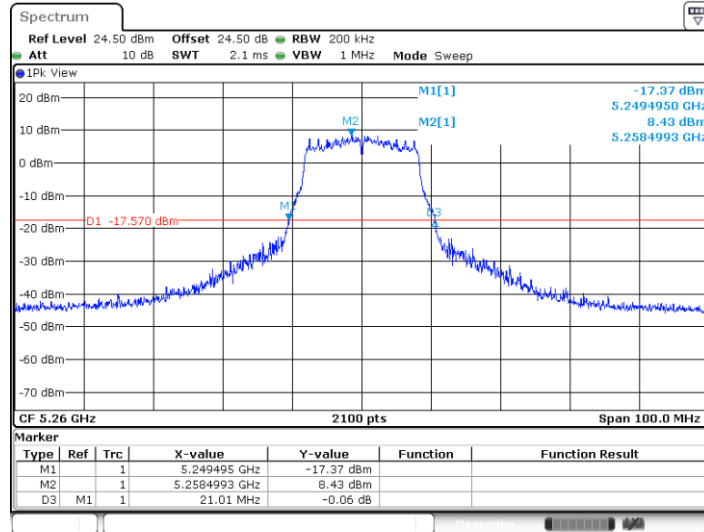


Date: 14.FEB.2025 14:27:22

11A-CDD_Ant1_5260

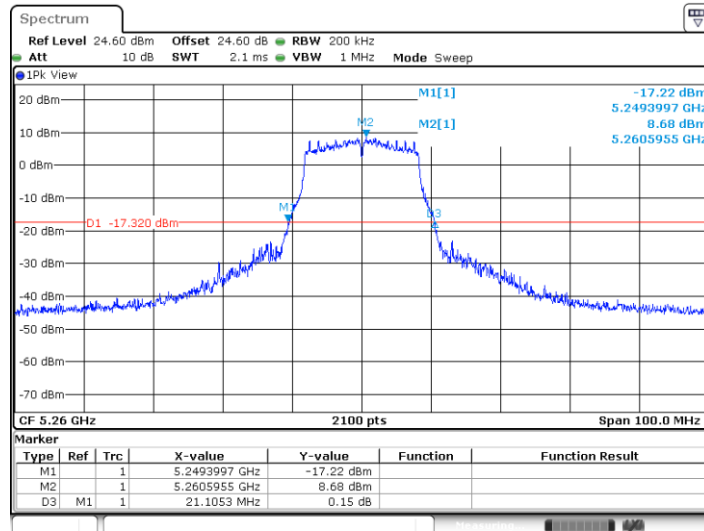


Date: 14.FEB.2025 14:27:47

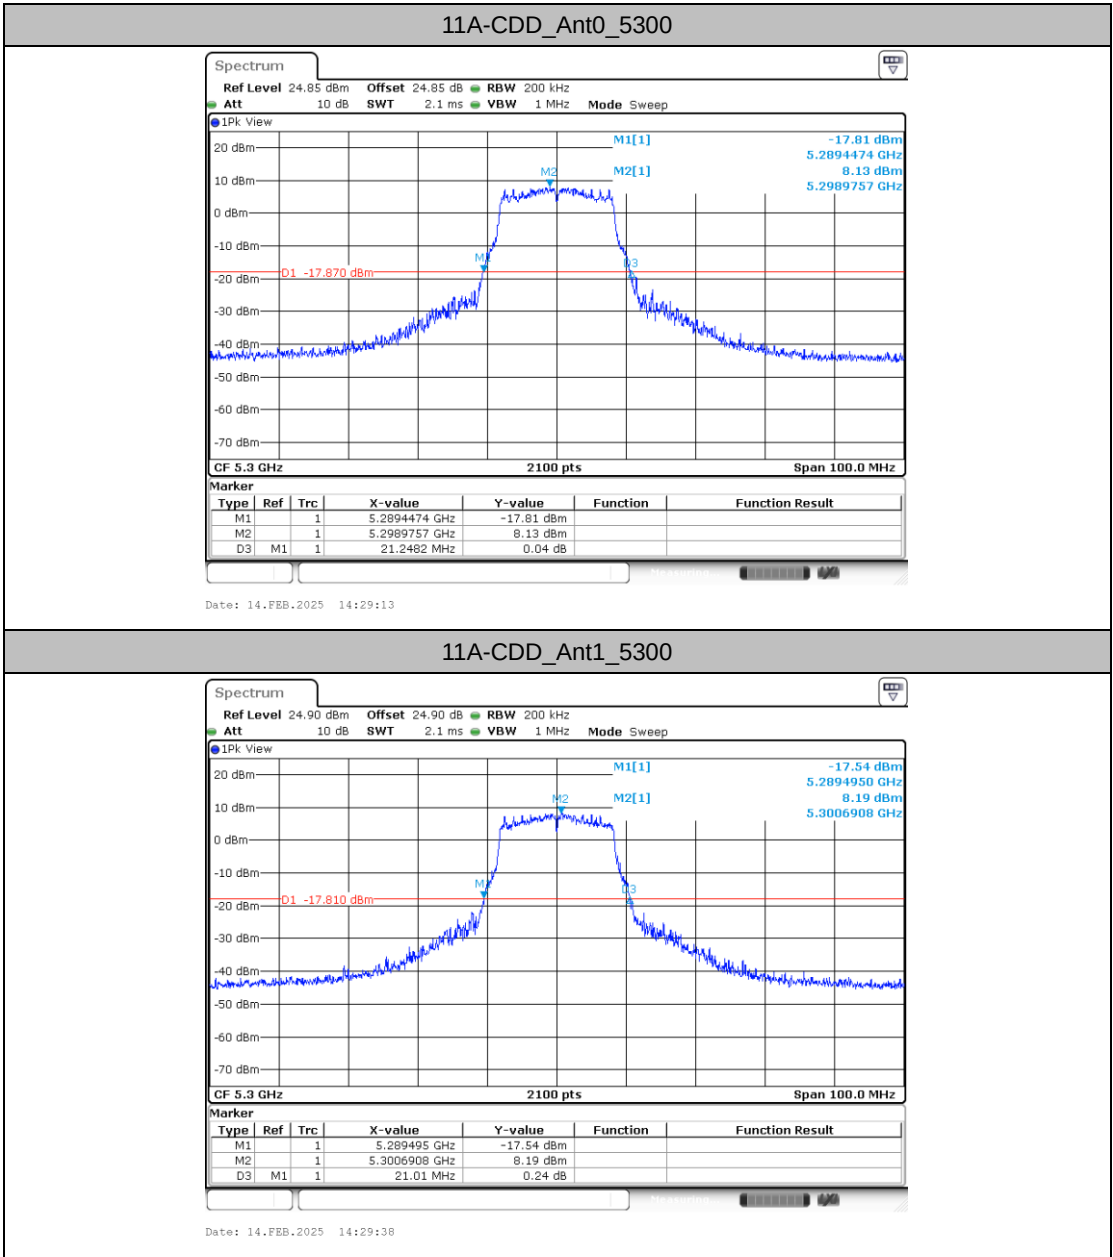




11A-CDD_Ant0_5320

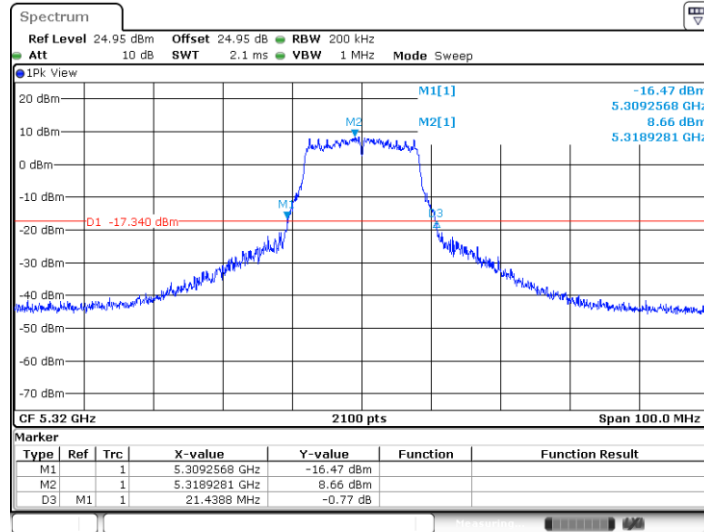



Date: 14.FEB.2025 14:30:33


11A-CDD_Ant1_5320

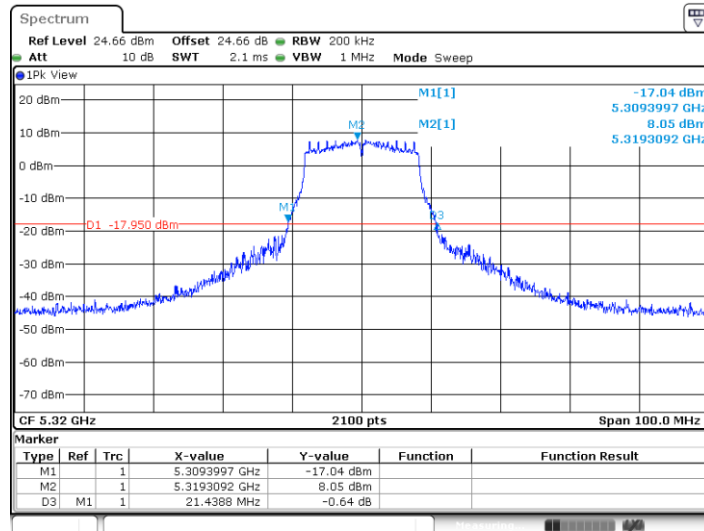

Date: 14.FEB.2025 14:30:58

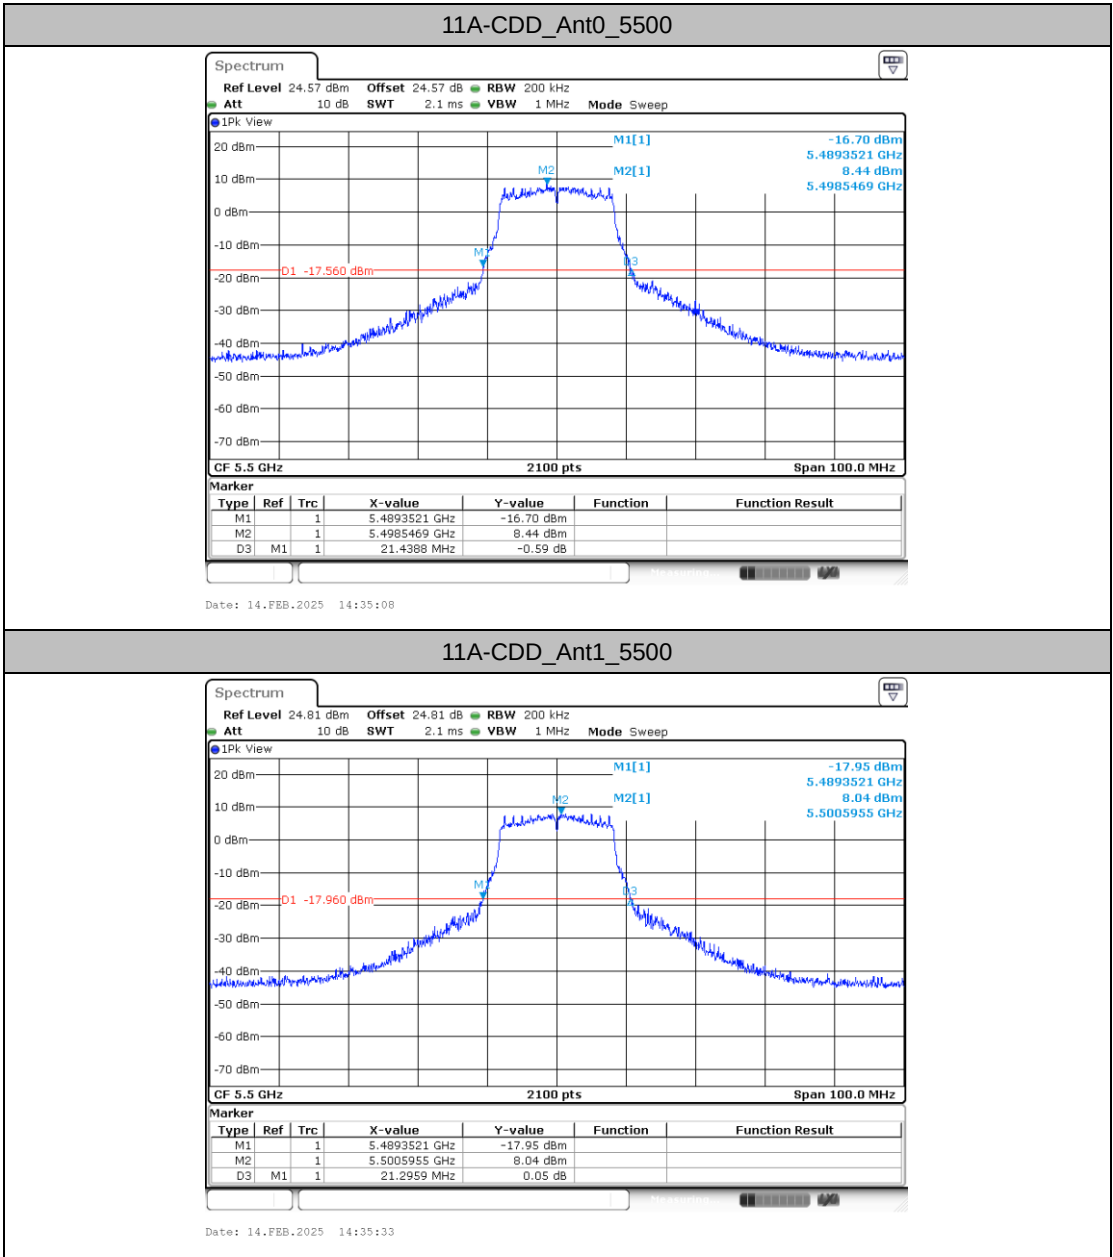


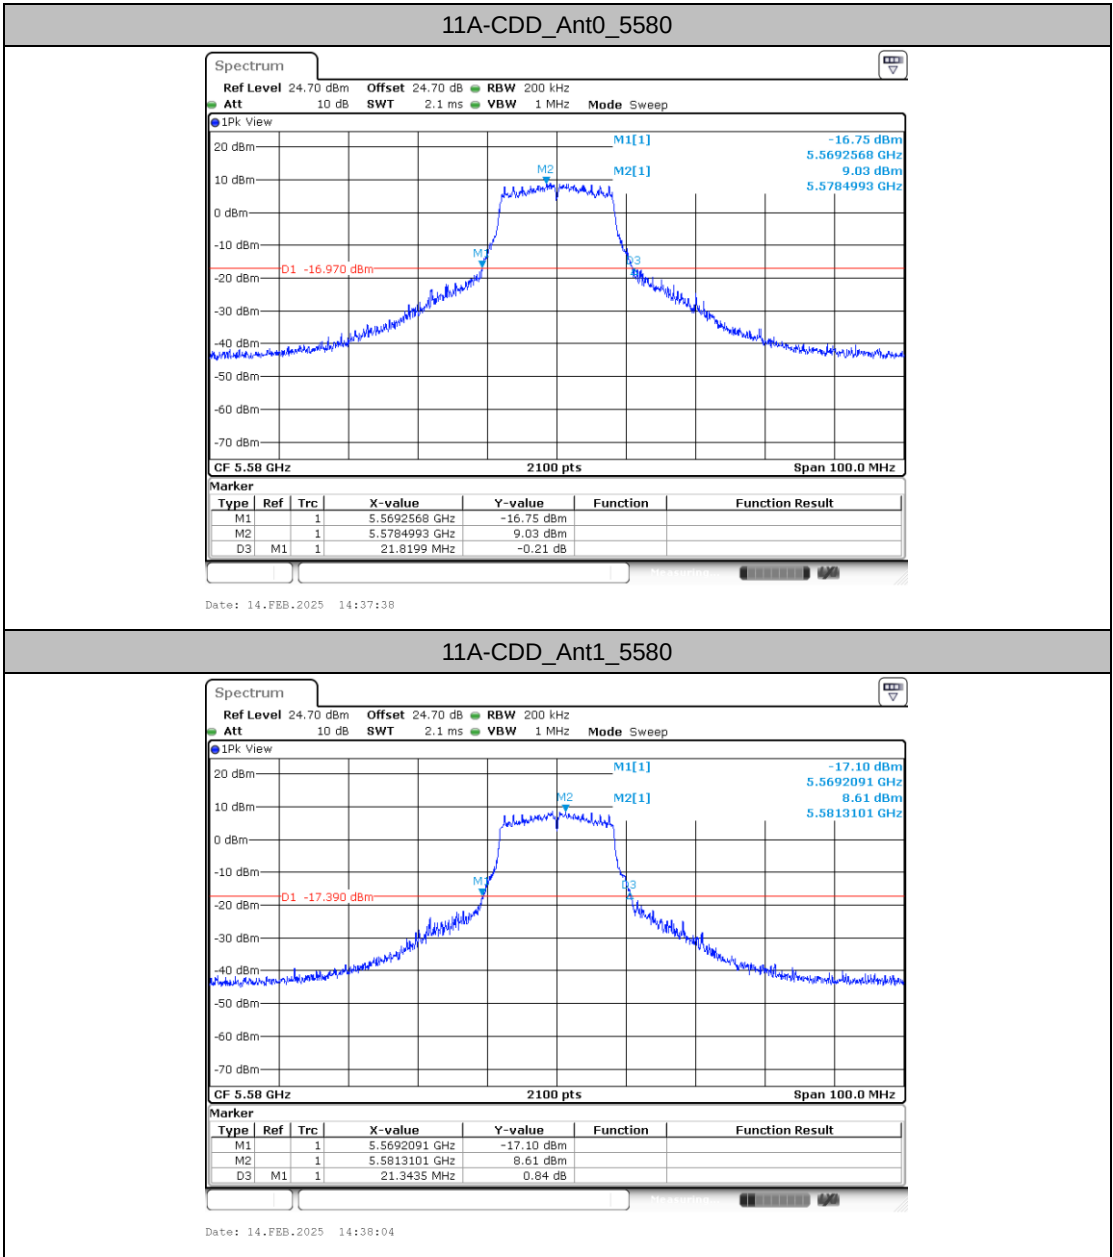

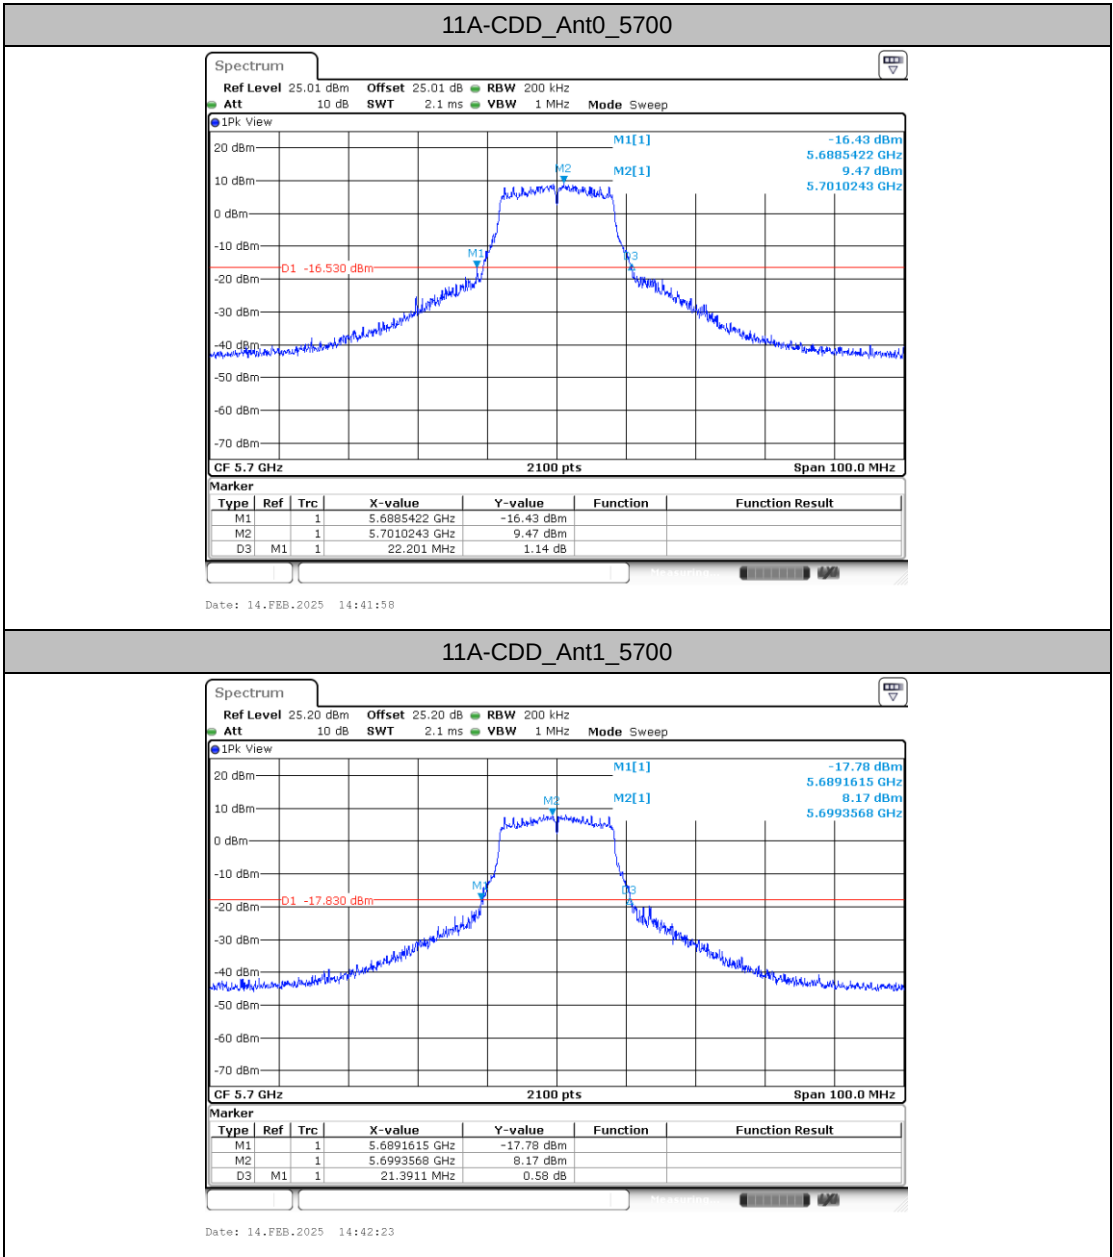






11A-CDD_Ant0_5720

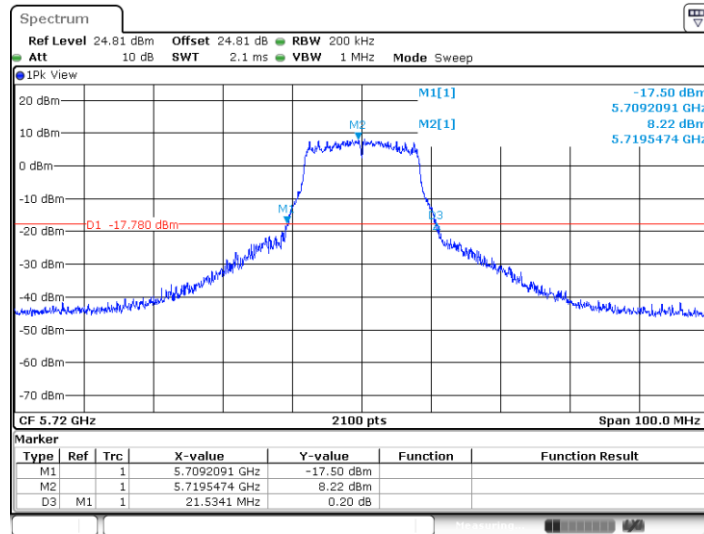


11A-CDD_Ant1_5720

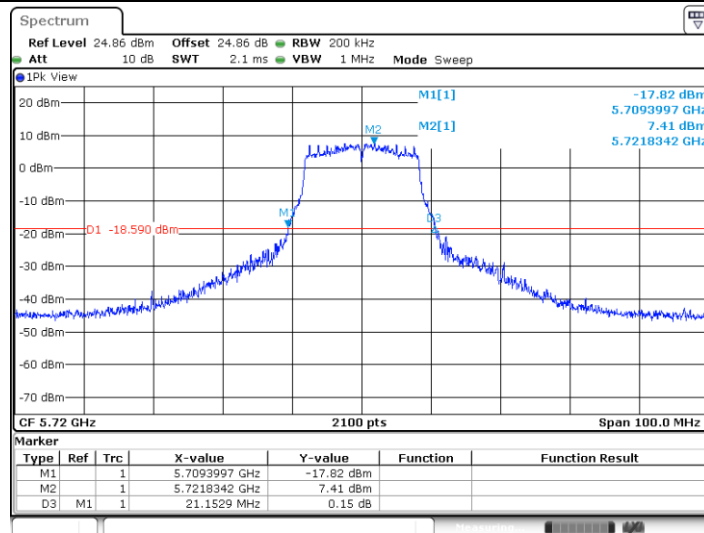

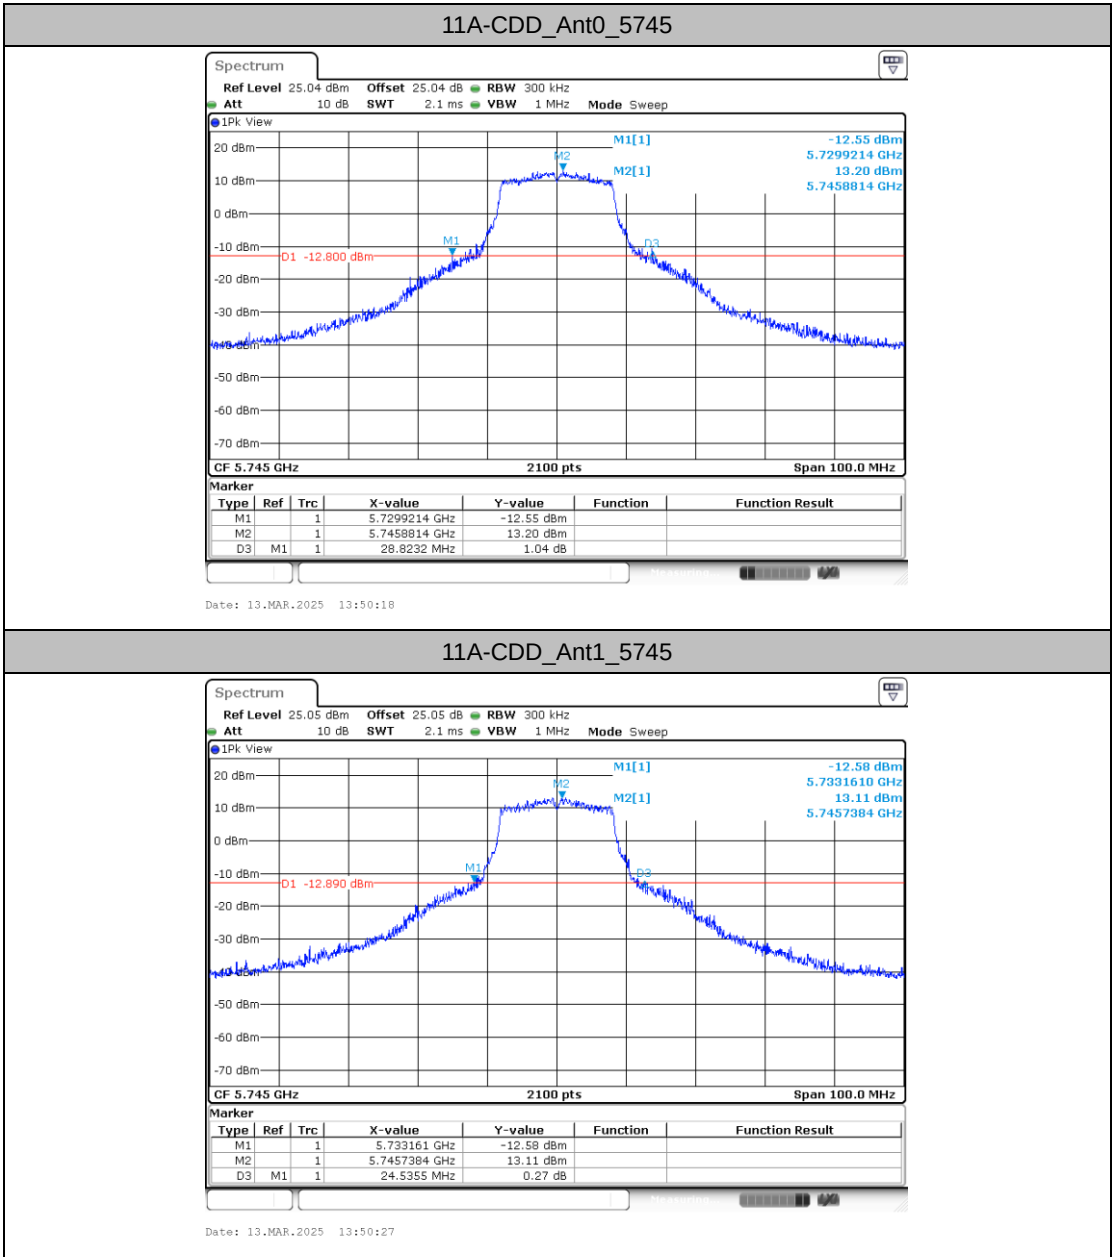


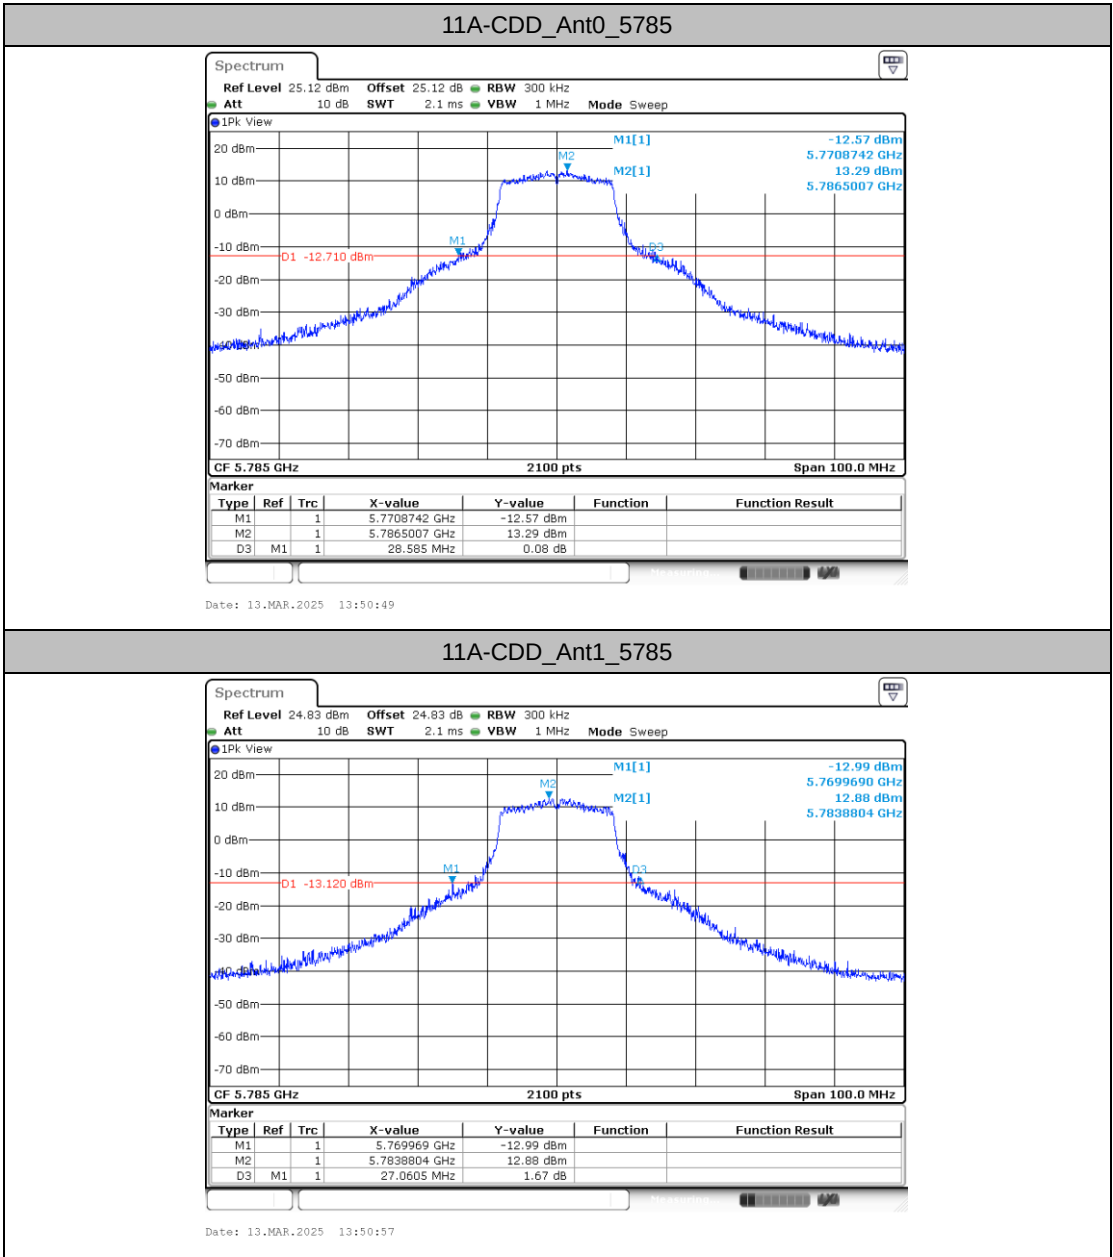

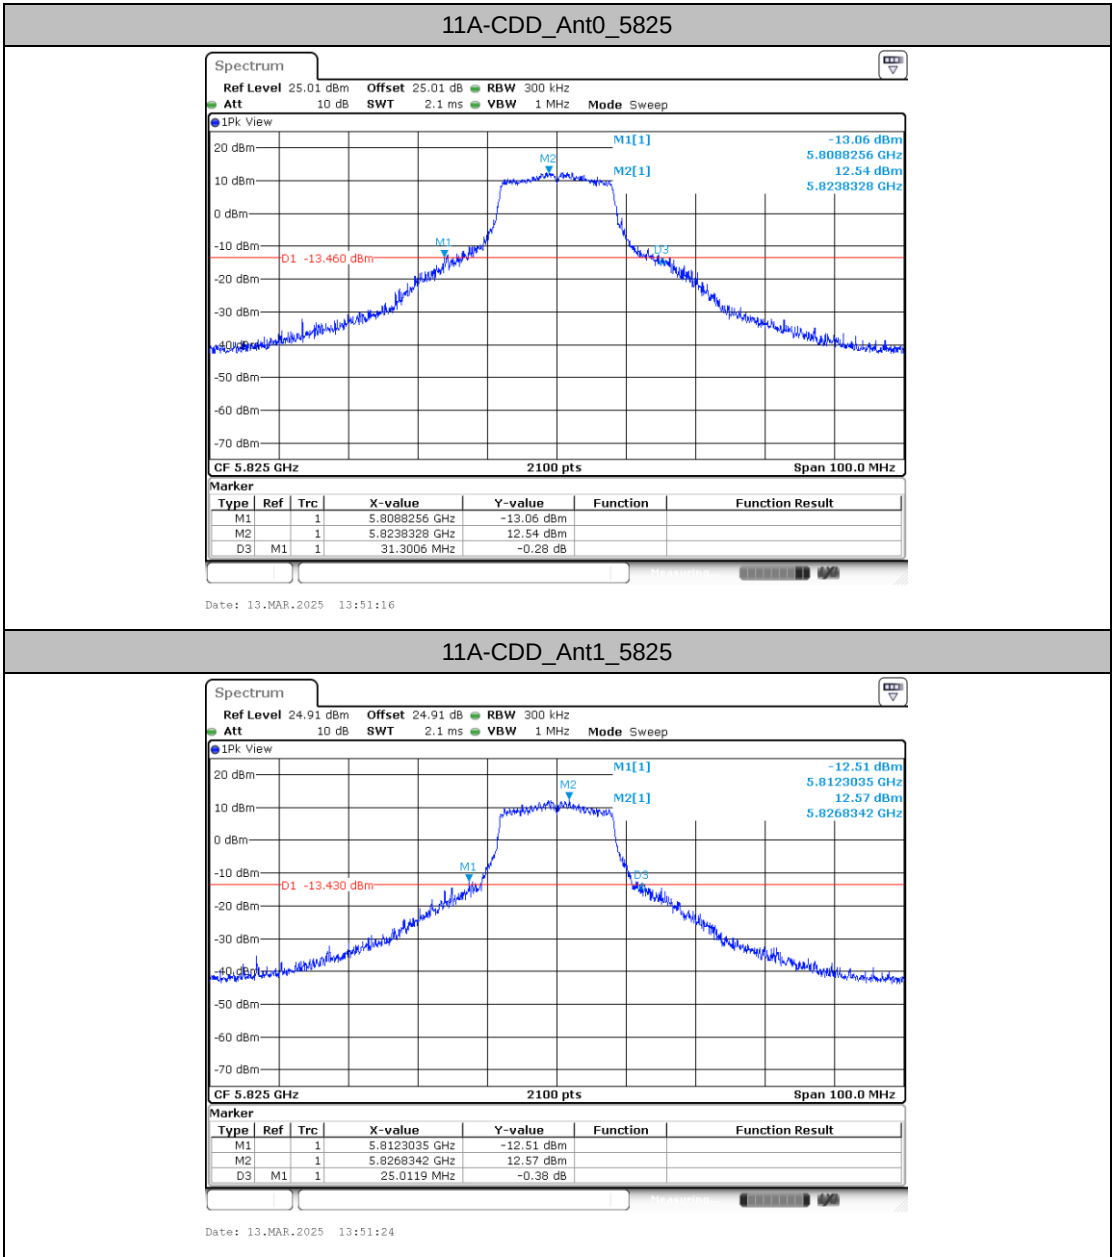




11AC20MIMO_Ant0_5180

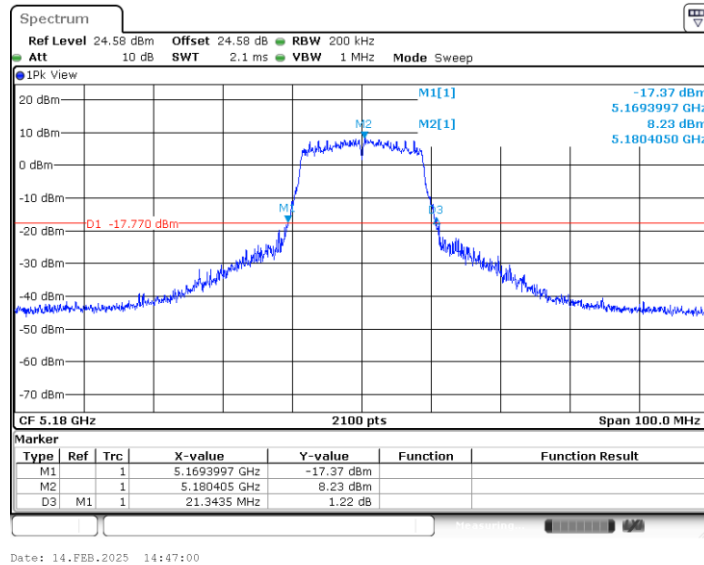


11AC20MIMO_Ant1_5180

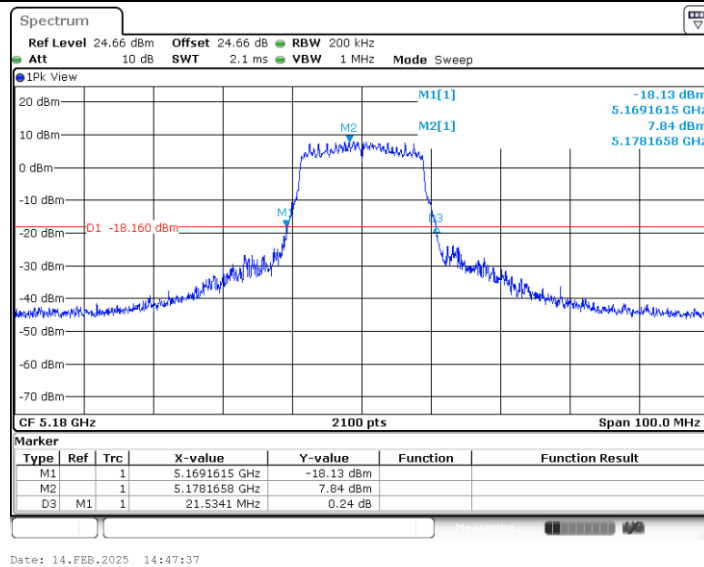




11AC20MIMO_Ant0_5220

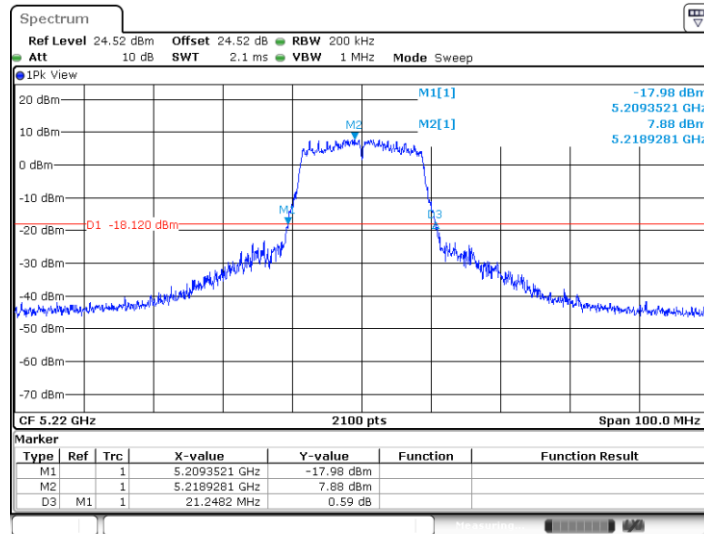

Date: 14.FEB.2025 14:48:47


11AC20MIMO_Ant1_5220

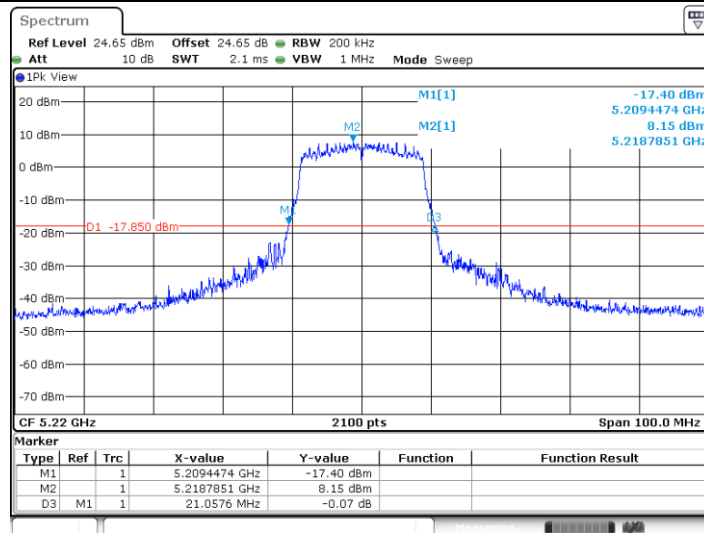


Date: 14.FEB.2025 14:49:13




11AC20MIMO_Ant0_5240

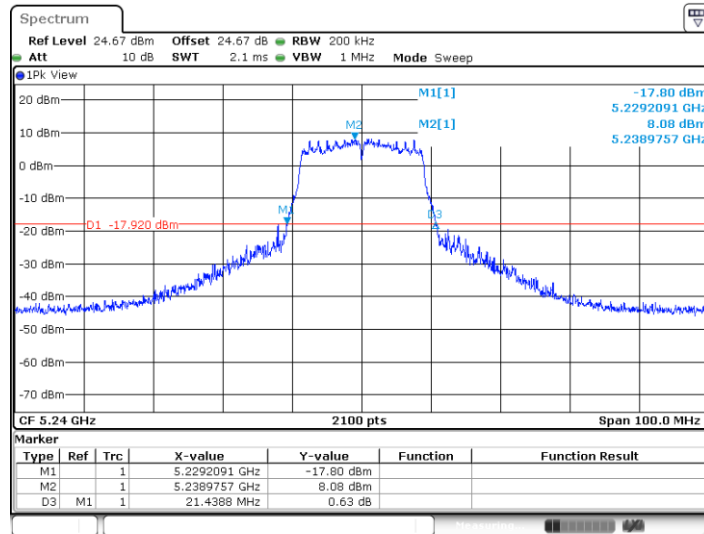


11AC20MIMO_Ant1_5240

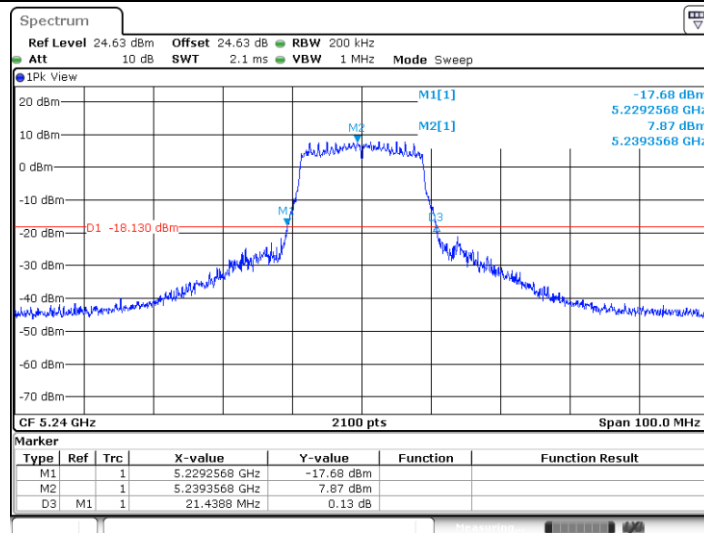

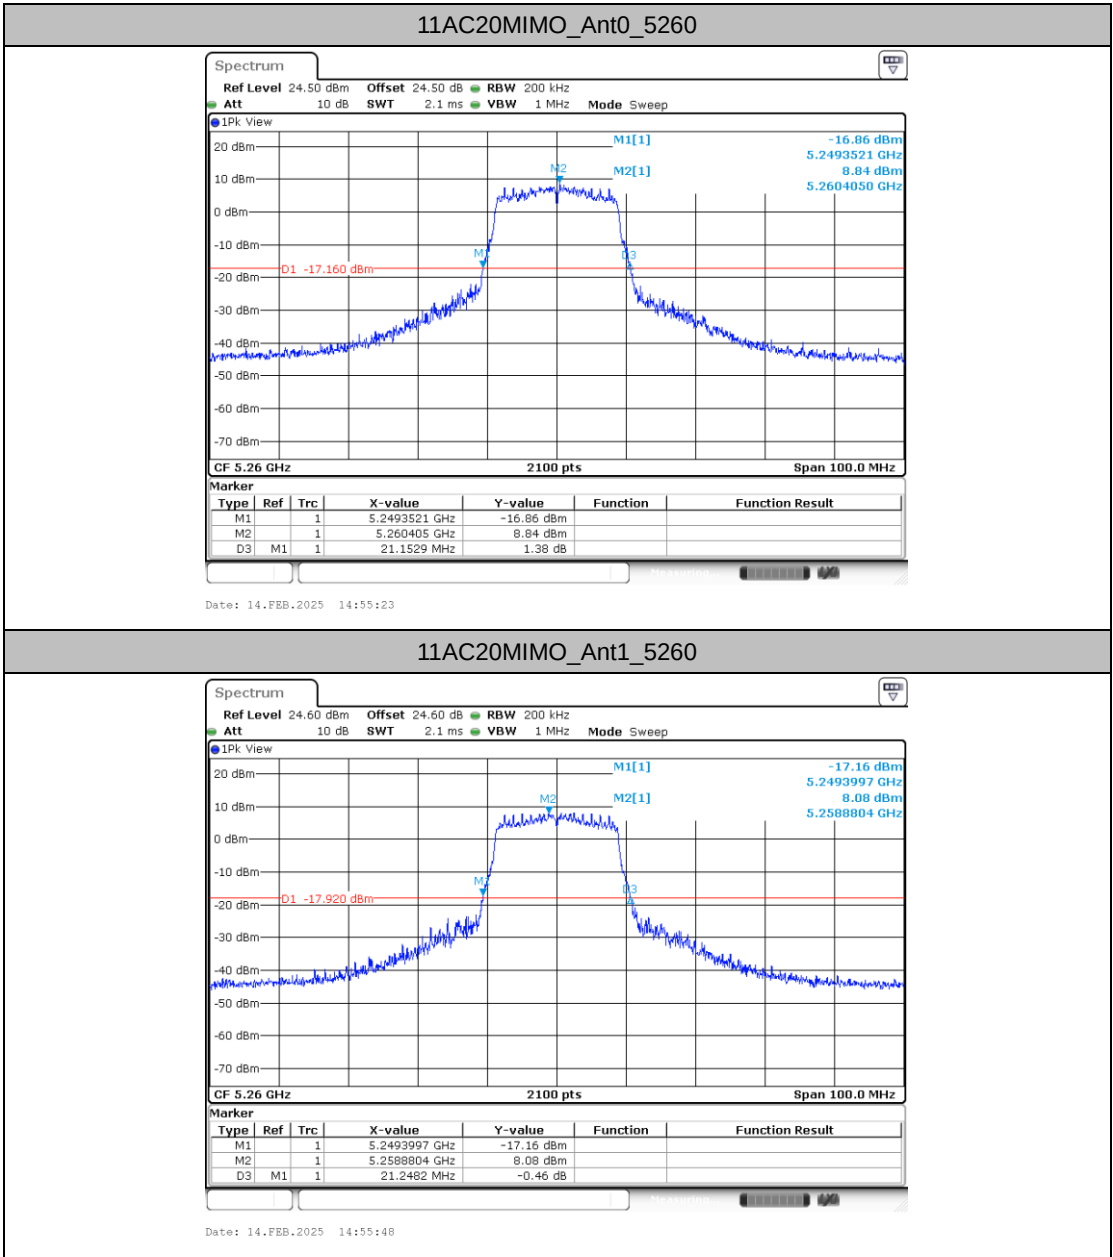




11AC20MIMO_Ant0_5300

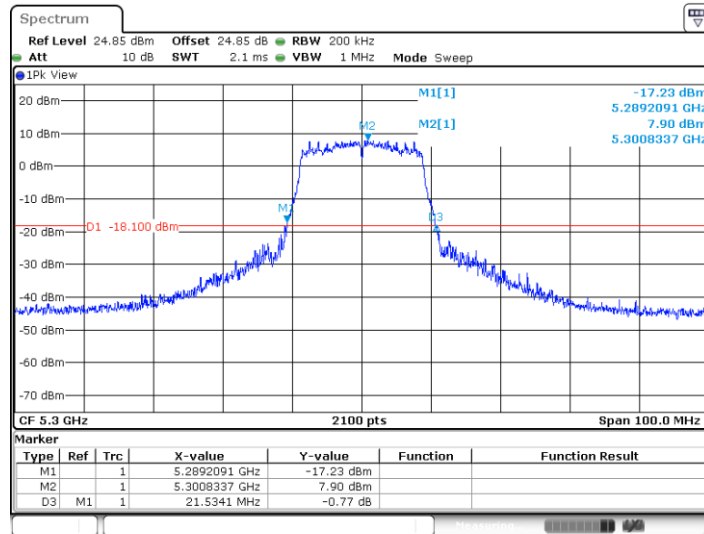

Date: 14.FEB.2025 14:56:34


11AC20MIMO_Ant1_5300

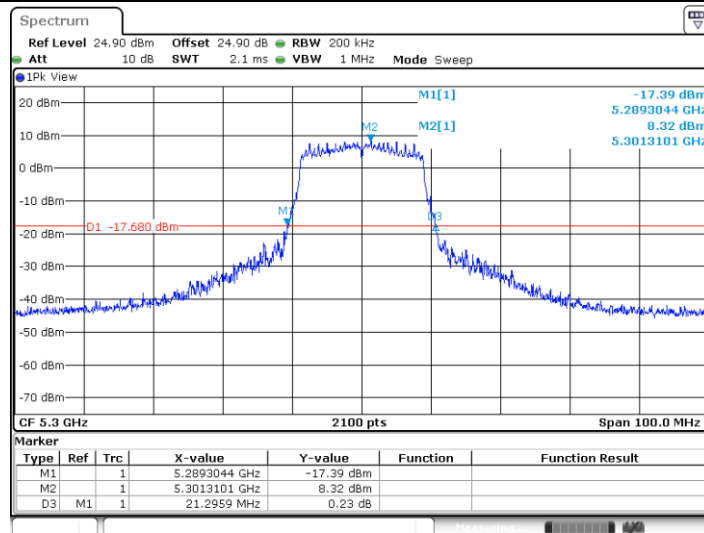

Date: 14.FEB.2025 14:57:01




11AC20MIMO_Ant0_5320

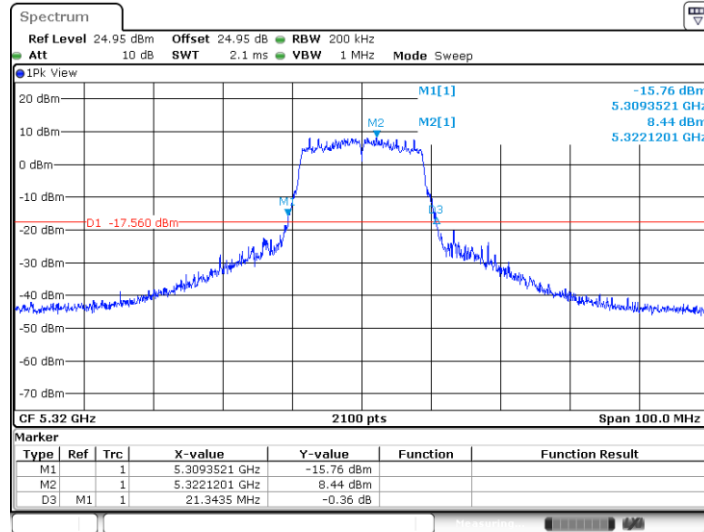



Date: 14.FEB.2025 14:57:54

11AC20MIMO_Ant1_5320

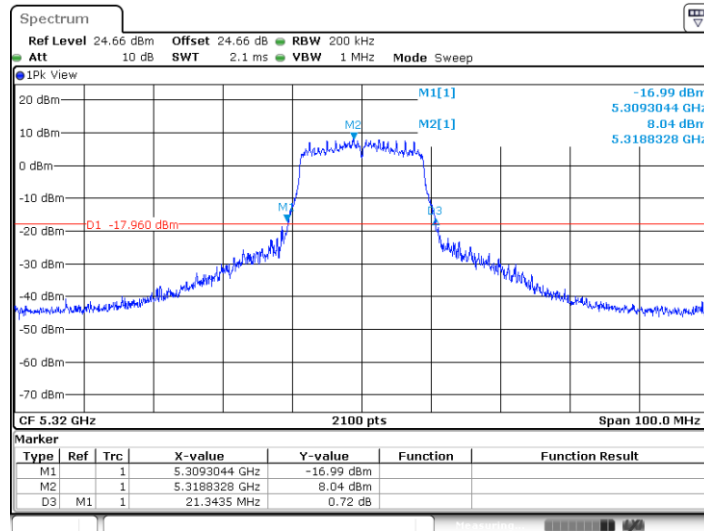


Date: 14.FEB.2025 14:58:20

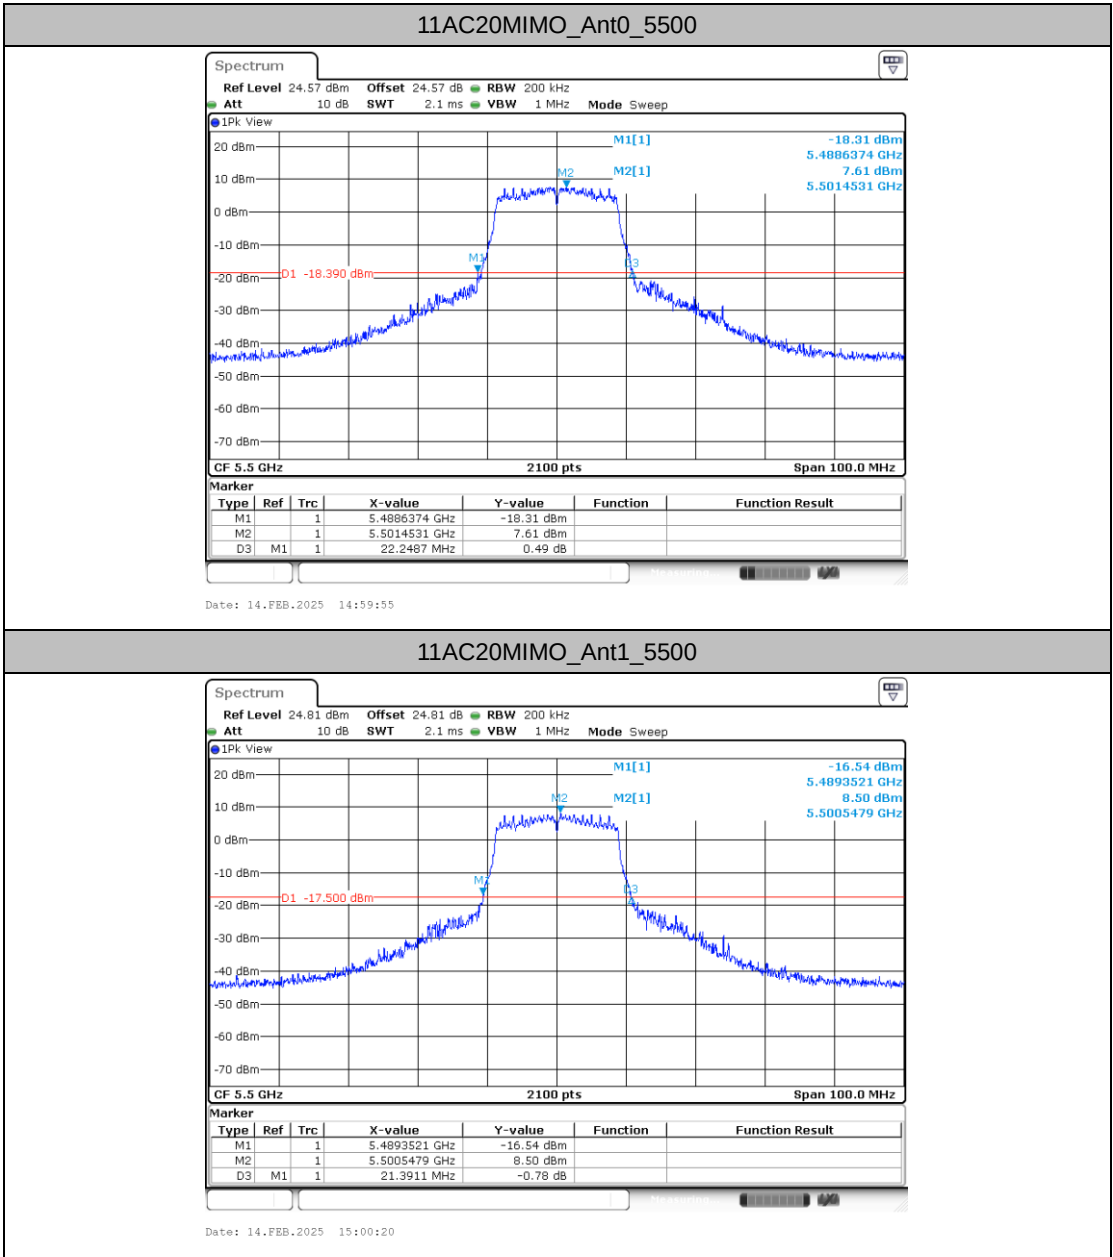

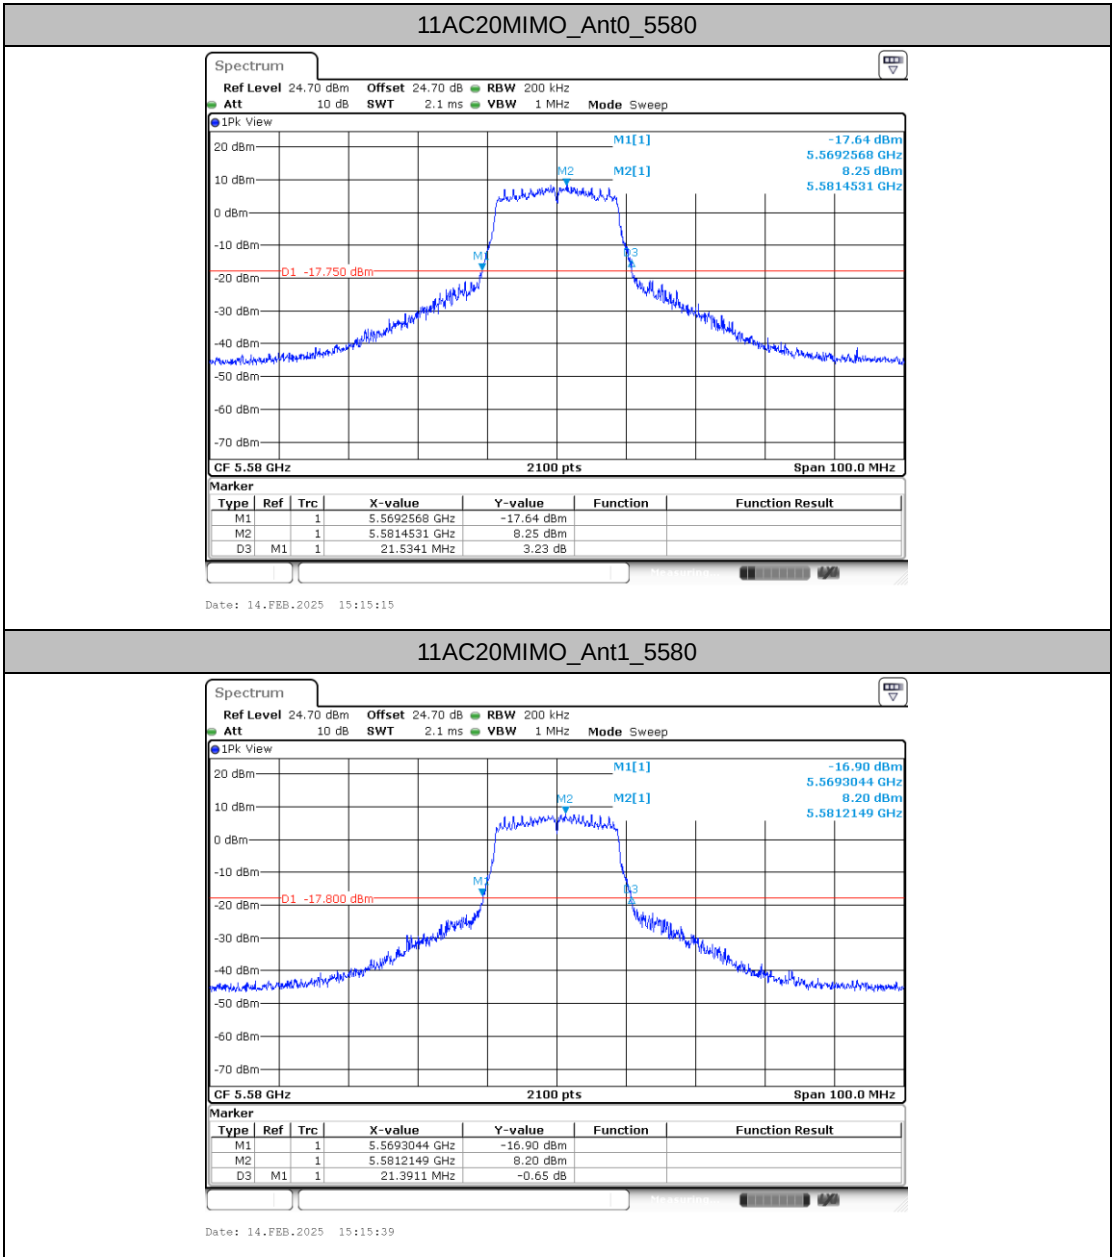




11AC20MIMO_Ant0_5700

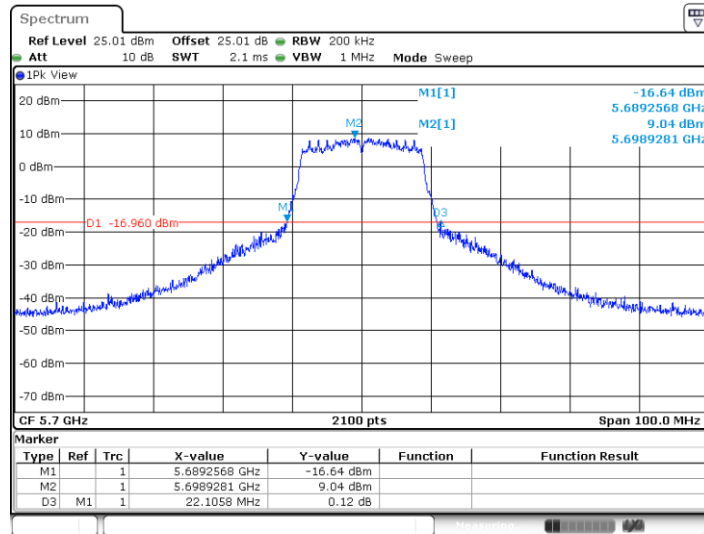



Date: 14.FEB.2025 15:18:06


11AC20MIMO_Ant1_5700

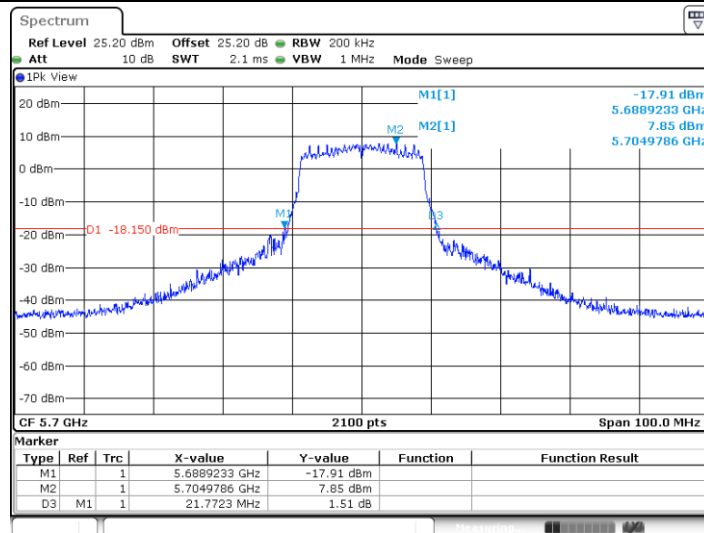

Date: 14.FEB.2025 15:18:31

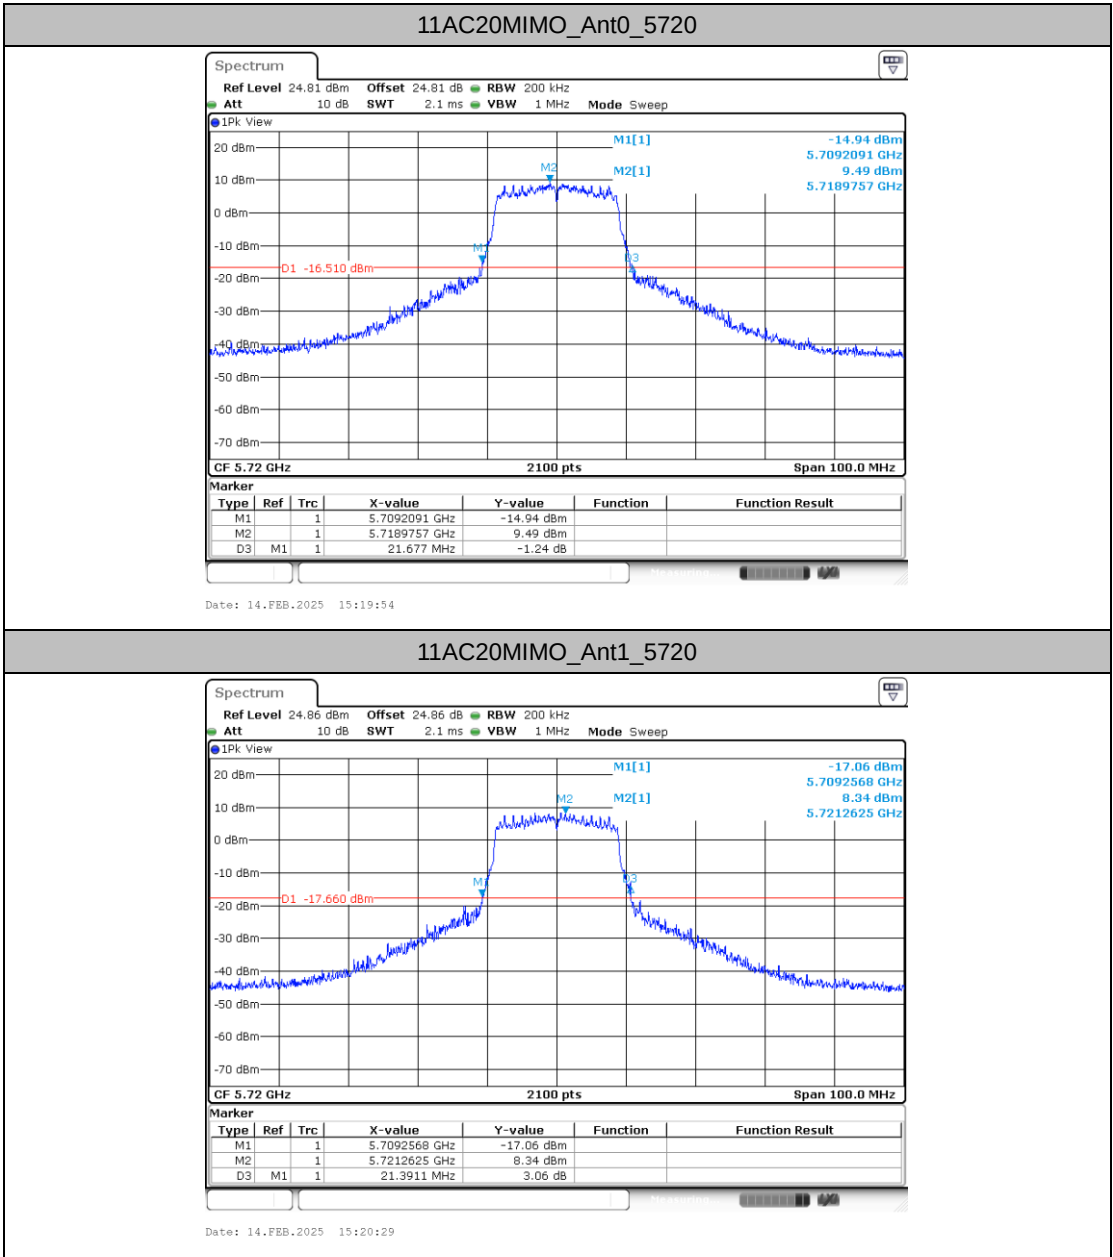


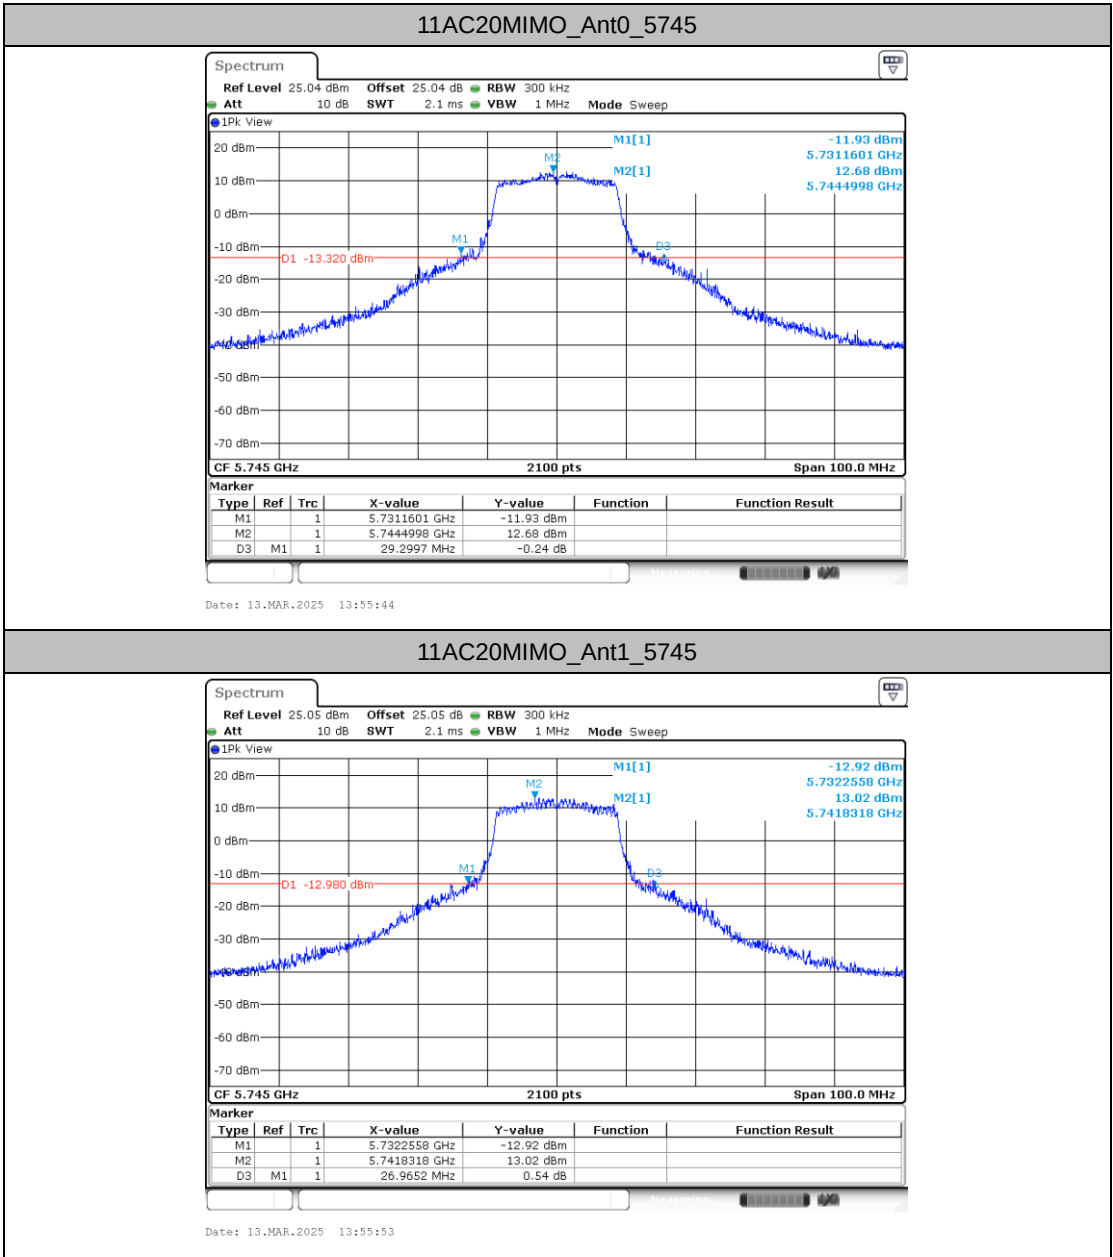

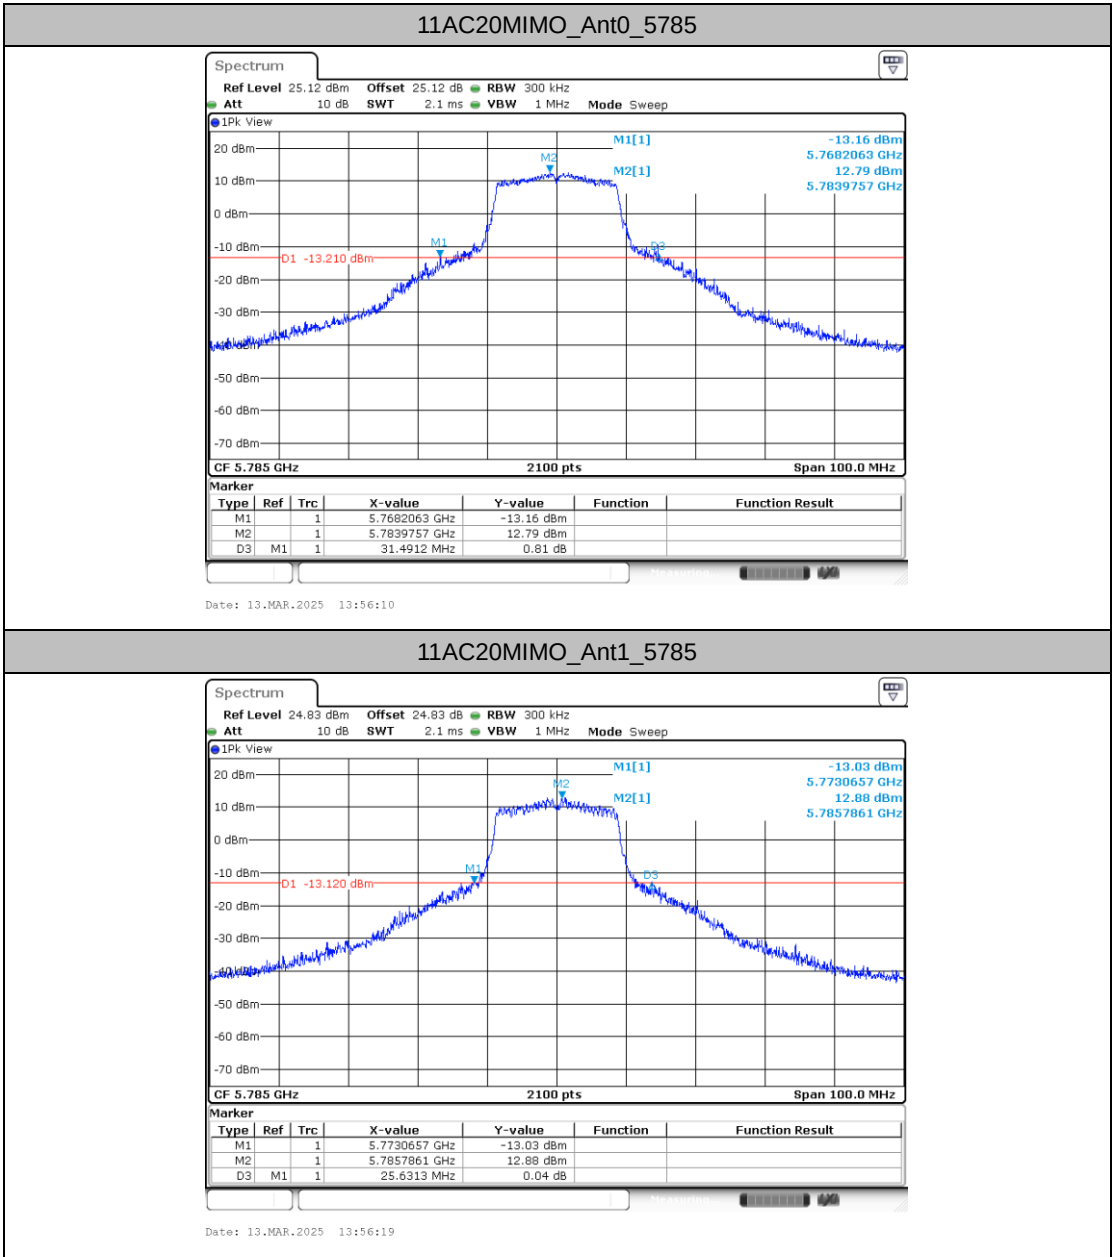




11AC20MIMO_Ant0_5825

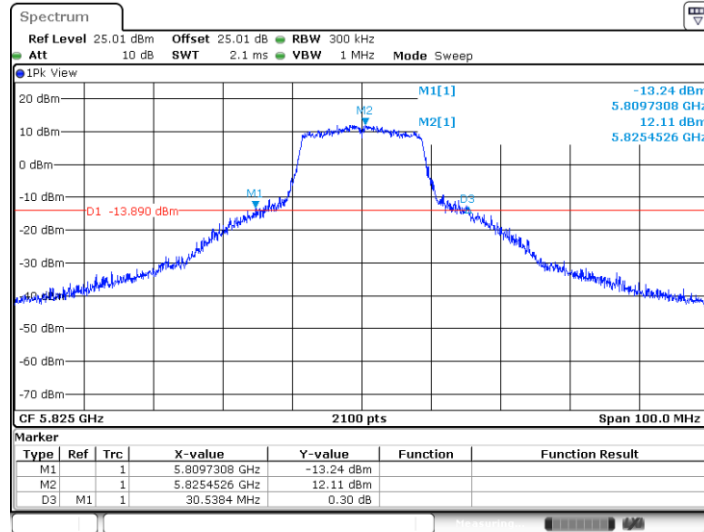



Date: 13.MAR.2025 13:56:33


11AC20MIMO_Ant1_5825

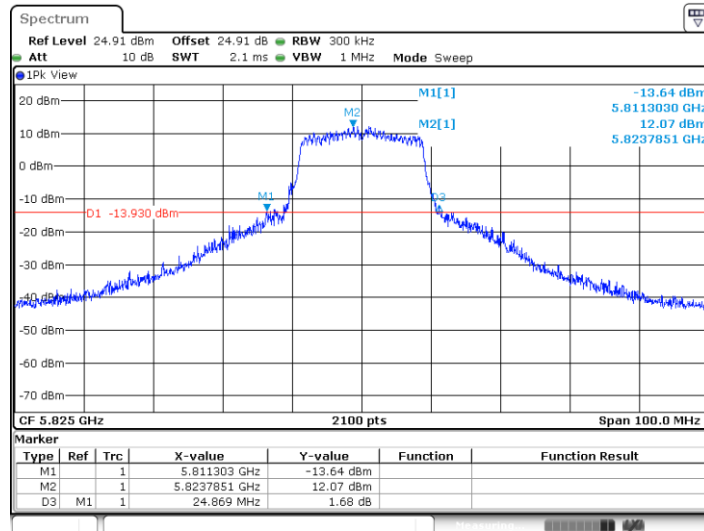


Date: 13.MAR.2025 13:56:41

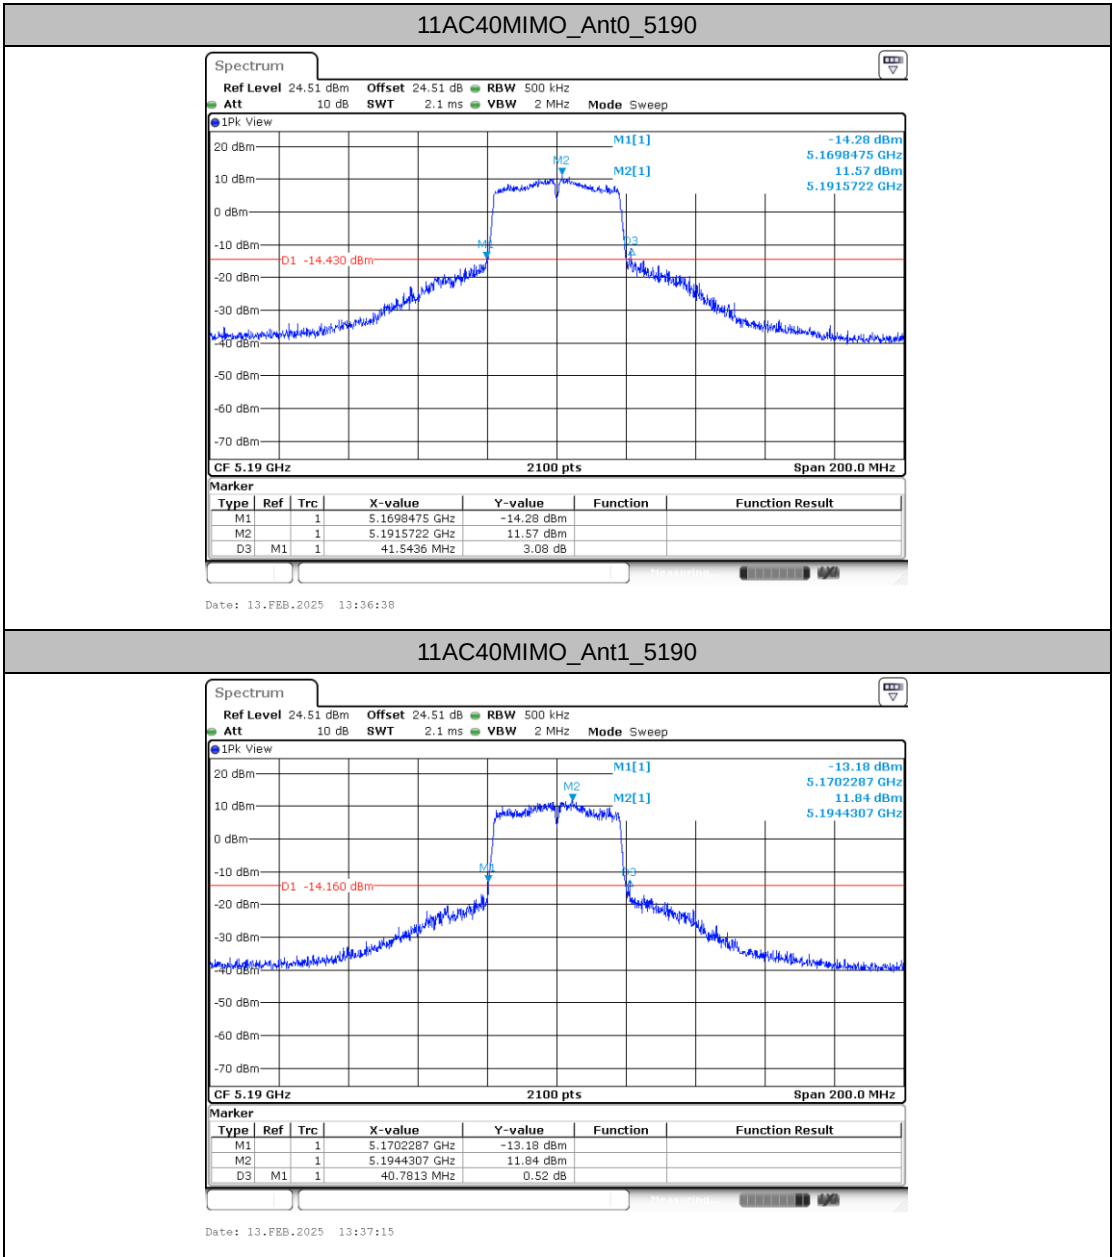

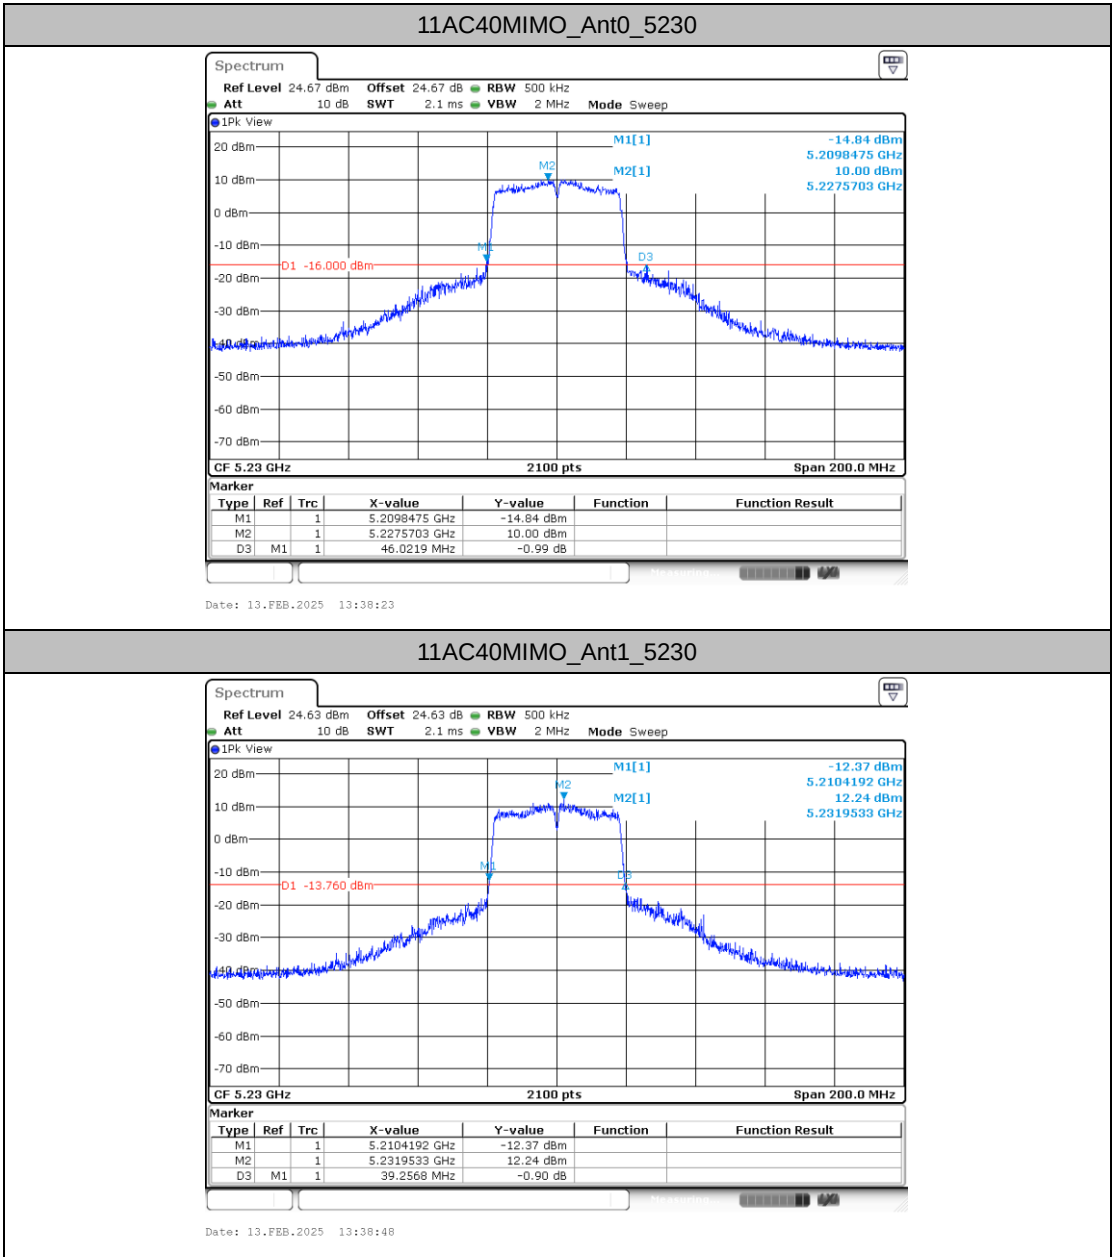


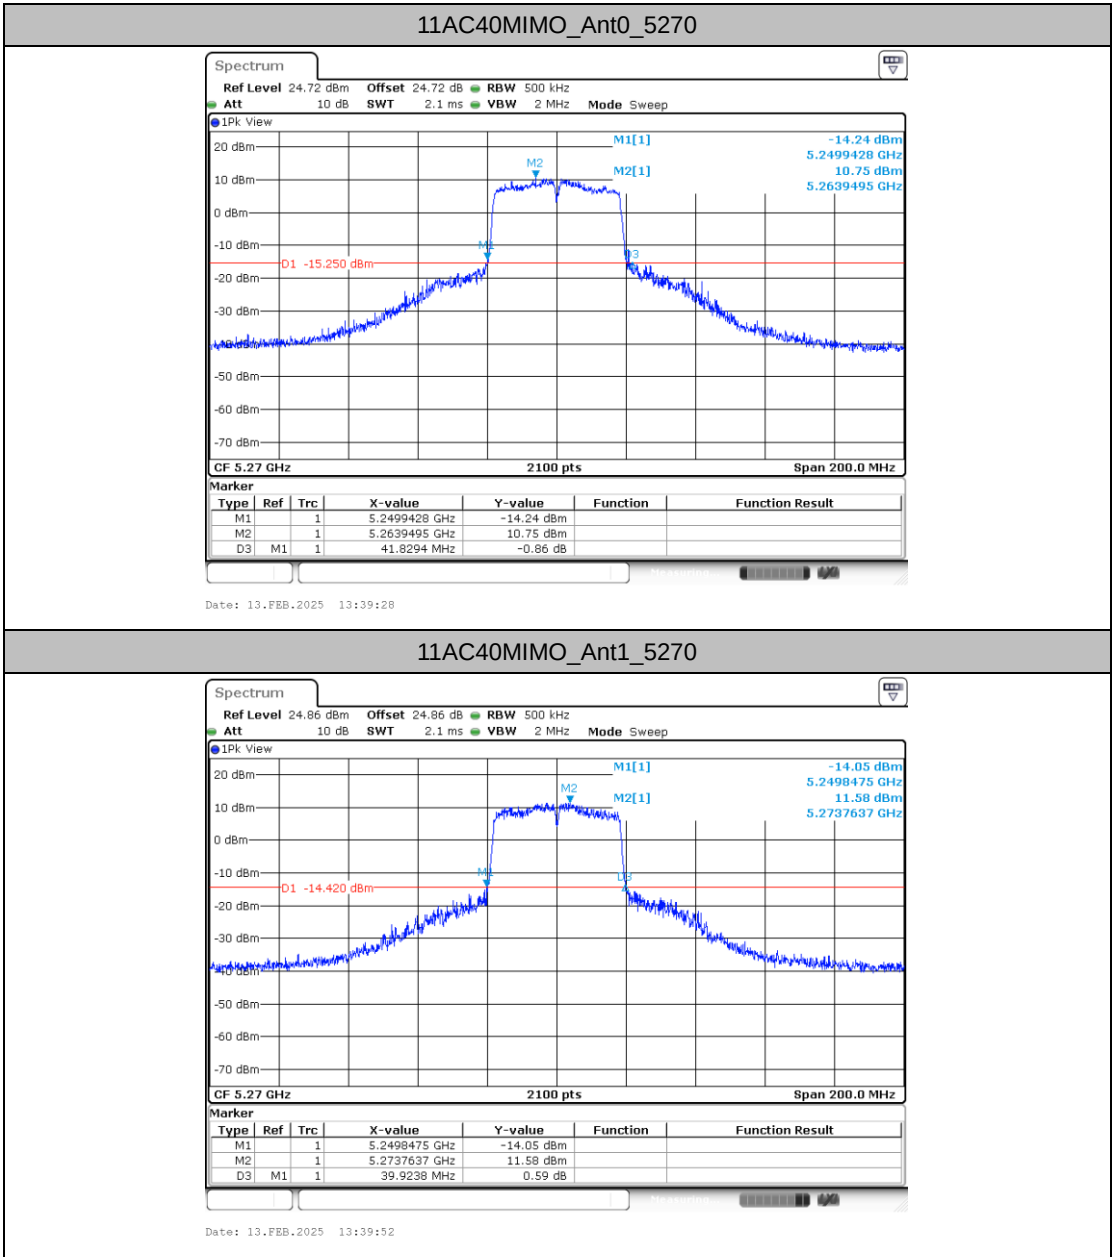

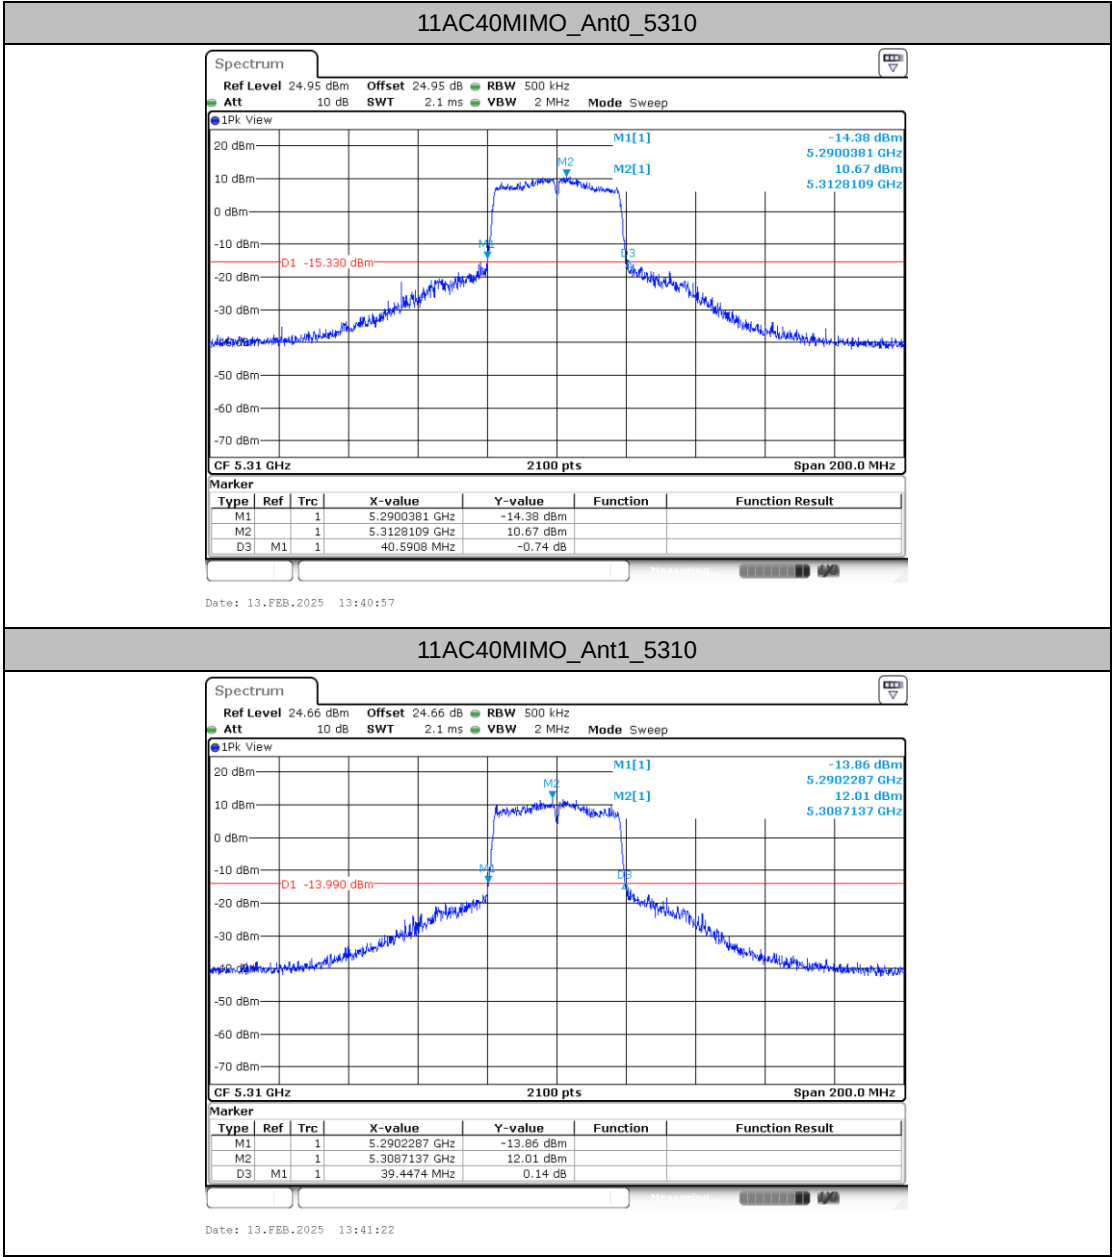




11AC40MIMO_Ant0_5510

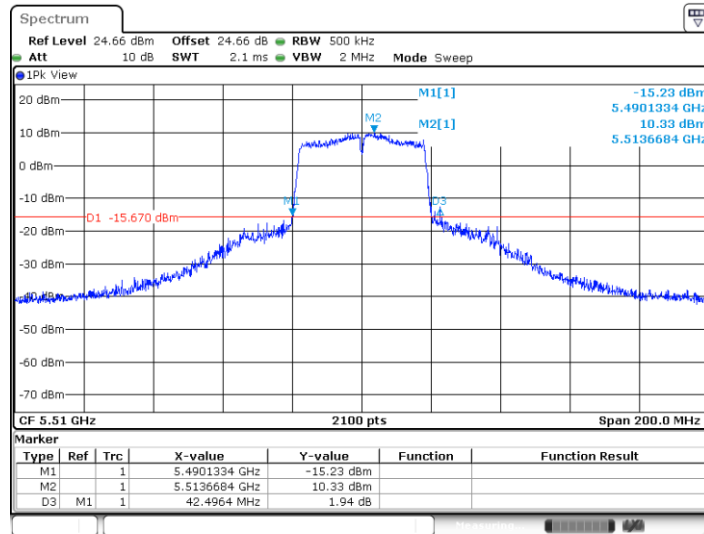



Date: 13.FEB.2025 13:42:08

11AC40MIMO_Ant1_5510

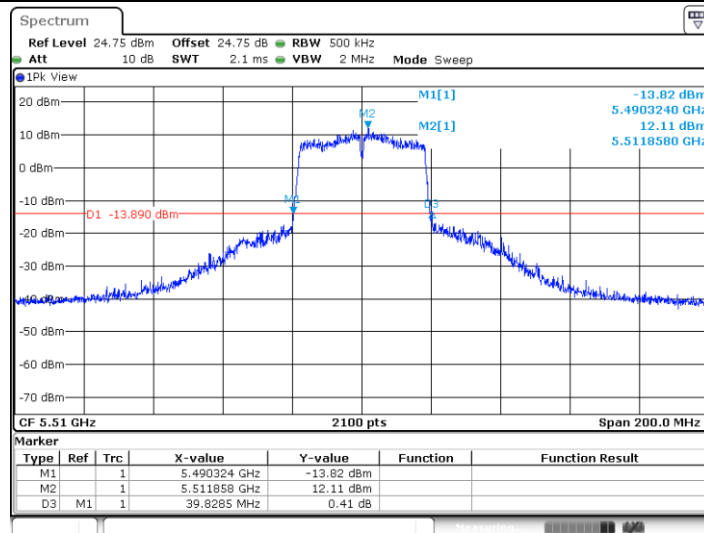


Date: 13.FEB.2025 13:42:33

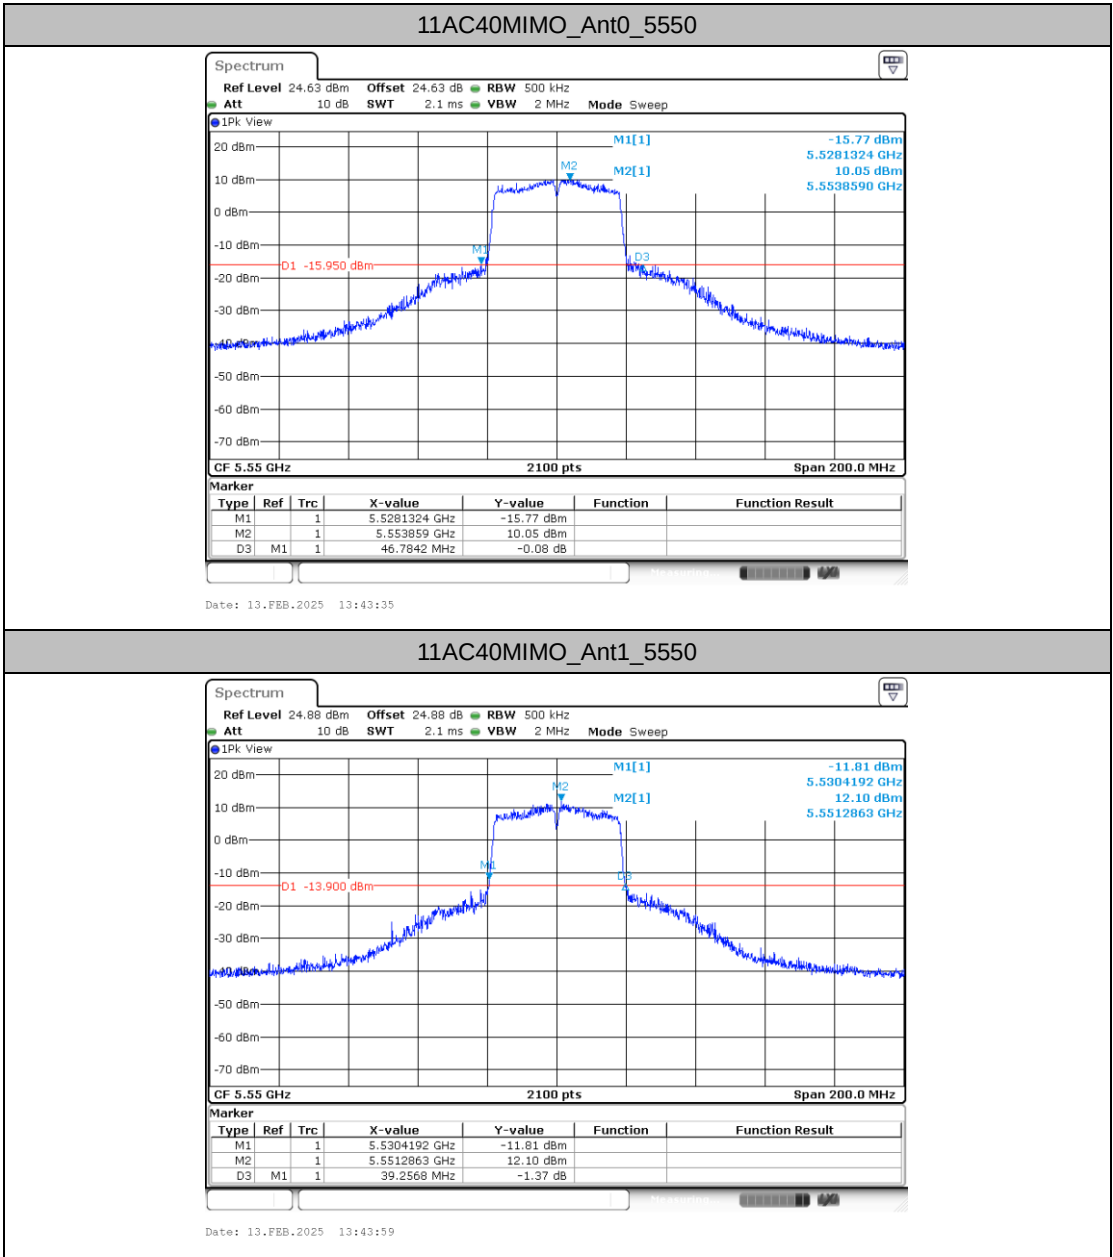

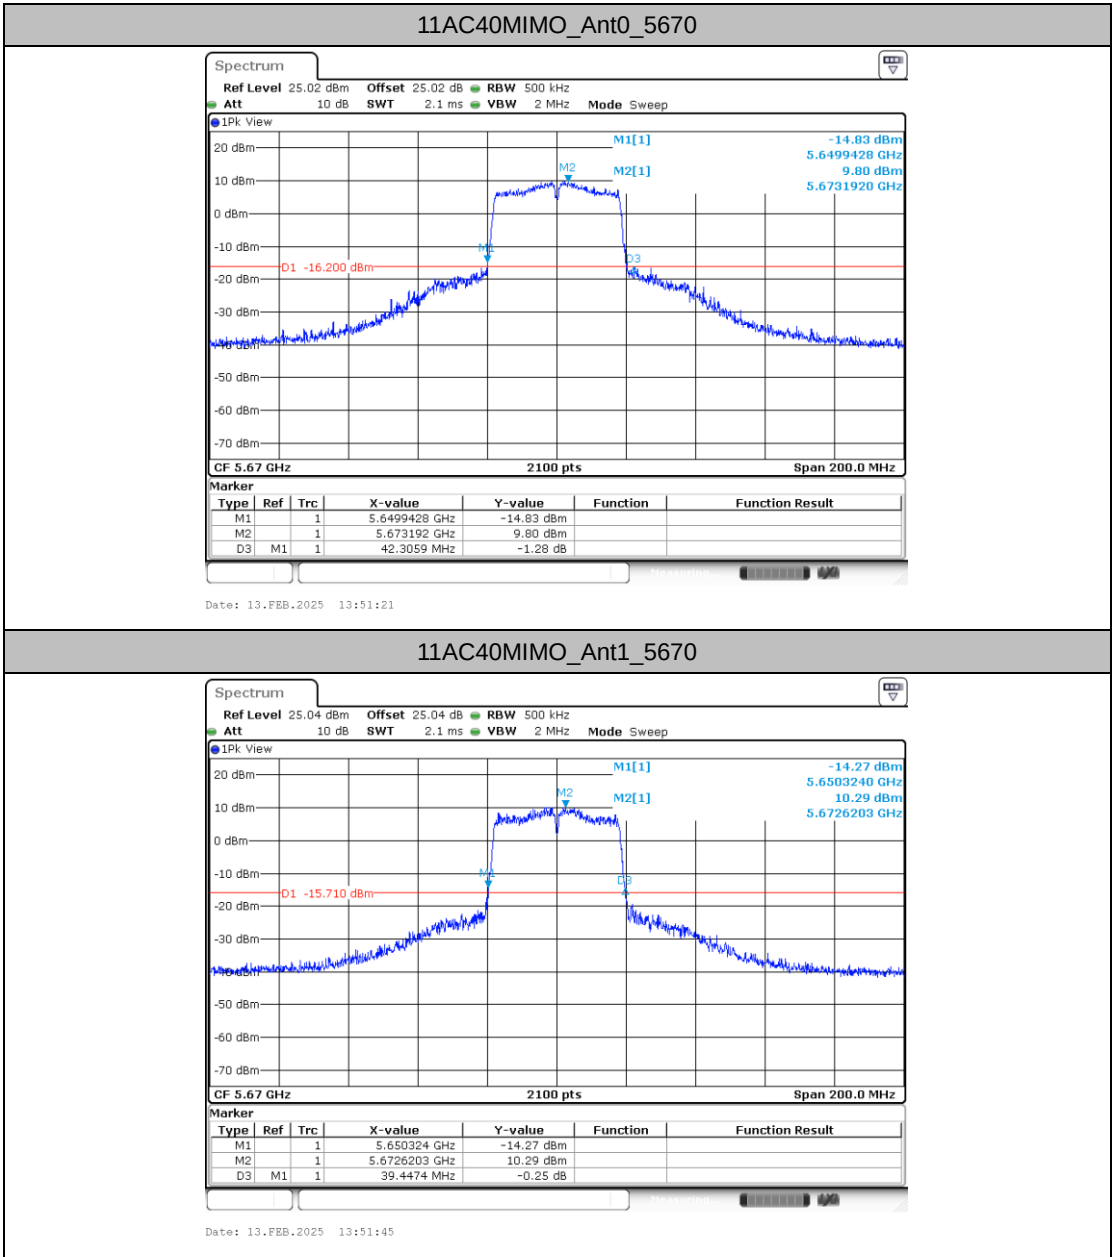



11AC40MIMO_Ant0_5710

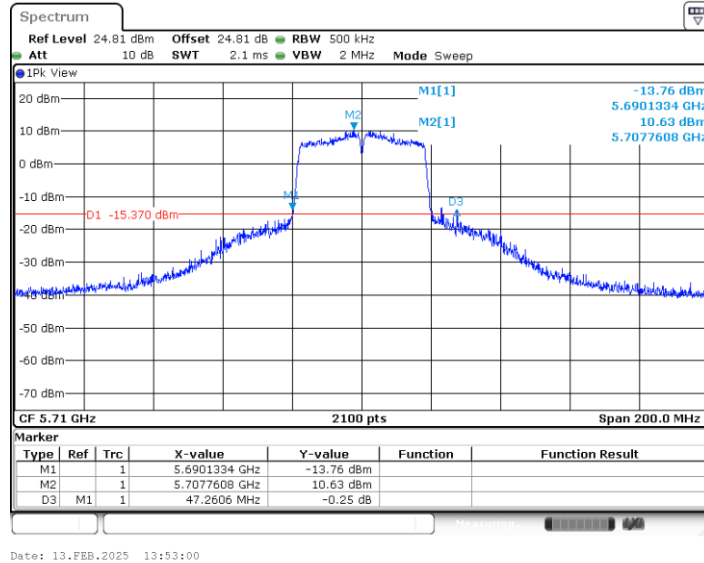

11AC40MIMO_Ant1_5710

