

InterLab®

Final Report on

Bittium Tough Mobile

FCC ID: V27SD-41

IC: 3282B-SD41

Report Reference: MDE_ELEKT_1502_FCCf
According to: Title 47 CFR chapter I part 15 subpart C

Date: October 22, 2015

Test Laboratory:
7layers GmbH
Borsigstraße 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH
Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350
www.7layers.com

Geschäftsführer /
Managing Director:
Dr. Harald Ansorge

Registergericht registered in:
Düsseldorf, HRB 75554
UST-IdNr VAT No.:
DE203159652
TAX No. 147/5869/0385
A Bureau Veritas Group Company

1 Administrative Data

1.1 Project Data

<i>Project Responsible:</i>	Imad Hjije
<i>Date Of Test Report:</i>	2015/10/22
<i>Date of first test:</i>	2015/06/24
<i>Date of last test:</i>	2015/07/27

1.2 Applicant Data

Company Name: Bittium Wireless Ltd.

<i>Street:</i>	Tutkijantie 8
<i>City:</i>	90570 Oulu
<i>Country:</i>	Finnland

Contact Person: Mr. Jyrki Juvani

<i>Function:</i>	Specialist, Test Management
<i>Department:</i>	Wireless Solutions
<i>Phone:</i>	+358 40 344 5781
<i>E-Mail:</i>	Jyrki.Juvani@bittium.com

1.3 Test Laboratory Data


The following list shows all places and laboratories involved for test result generation:

7 layers DE

<i>Company Name :</i>	7layers GmbH
<i>Street :</i>	Borsigstrasse 11
<i>City :</i>	40880 Ratingen
<i>Country :</i>	Germany
<i>Contact Person :</i>	Mr. Michael Albert
<i>Phone :</i>	+49 2102 749 201
<i>Fax :</i>	+49 2102 749 444
<i>E Mail :</i>	Michael.Albert@7Layers.com

Laboratory Details

Lab ID	Identification	Responsible	Accreditation Info
Lab 1	Conducted Emissions	Mr. Andreas Petz Mr. Wolfgang Richter	DAkkS-Registration no. D-PL-12140-01-01
Lab 2	Radiated Emissions	Mr. Marco Kullik Mr. Robert Machulec	DAkkS-Registration no. D-PL-12140-01-01
Lab 3	Regulatory Bluetooth RF Test Solution	Mr. Jimmy Chatheril Mr. Sören Berentzen	DAkkS-Registration no. D-PL-12140-01-01

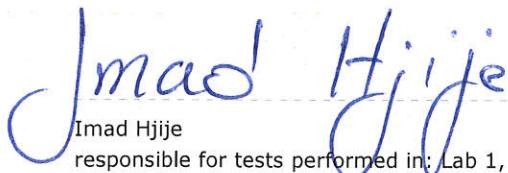1.4 Signature of the Testing Responsible
Imad Hjije

responsible for tests performed in: Lab 1, Lab 2, Lab 3

1.5 Signature of the Accreditation Responsible
B. RETKA [B. RETKA]Accreditation scope responsible person
responsible for Lab 1, Lab 2, Lab 3**2 Test Object Data****2.1 General OUT Description**

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: Bittium Tough Mobile
FCC ID: V27SD-41
IC: 3282B-SD41

Manufacturer:

Company Name: See applicant data:

Contact Person: -

Parameter List:

Parameter name	Value
Parameter for Scope FCC_v2:	
AC Power Supply	120 (V)
DC Power Supply	3.8 (V)

2.2 Detailed Description of OUT Samples

Sample : aa01

<i>OUT Identifier</i>	Bittium Tough Mobile	
	FCC ID: V27SD-41	
	IC: 3282B-SD41	
<i>Sample Description</i>	Radiated Sample	
<i>Serial No.</i>	K0251300425	
<i>HW Status</i>	0302	
<i>SW Status</i>	2.6.0	
<i>Nominal Voltage</i>	3.8 V	<i>Normal Temp.</i> 23 °C

Sample : ae01

<i>OUT Identifier</i>	Bittium Tough Mobile	
	FCC ID: V27SD-41	
	IC: 3282B-SD41	
<i>Sample Description</i>	Conducted Sample	
<i>Serial No.</i>	K0251300433	
<i>HW Status</i>	0302	
<i>SW Status</i>	2.6.0	
<i>Nominal Voltage</i>	3.8 V	<i>Normal Temp.</i> 23 °C

Sample : ah01

<i>OUT Identifier</i>	Bittium Tough Mobile	
	FCC ID: V27SD-41	
	IC: 3282B-SD41	
<i>Sample Description</i>	Radiated Sample	
<i>Serial No.</i>	K0251300430	
<i>HW Status</i>	0302	
<i>SW Status</i>	2.6.0	
<i>Nominal Voltage</i>	3.8 V	<i>Normal Temp.</i> 23 °C

2.3 OUT Features

Features for OUT: Bittium Tough Mobile

FCC ID: V27SD-41
IC: 3282B-SD41

Designation	Description	Allowed Values	Supported Value(s)
Features for scope: FCC_v2			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
BTLE	Support of Bluetooth Low Energy		
DC	The OUT is powered by or connected to DC		
EDGE850	EUT supports EDGE in the band 824 MHz - 849 MHz		
EDGE1900	EUT supports EDGE in the band 1850 MHz - 1910 MHz		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
eFDD2			
eFDD4			
eFDD5			
eFDD13			
eFDD17			
FDD2	EUT supports UMTS FDD2 in the band 1850 MHz - 1910 MHz		
FDD5	EUT supports UMTS FDD5 in the band 824 MHz - 849 MHz		
GSM850	EUT supports GSM850 band 824MHz - 849MHz		
HSDPA-FDD2	EUT supports UMTS FDD2 HSDPA in the band 1850 MHz - 1910 MHz		
HSDPA-FDD4	EUT supports UMTS FDD4 HSDPA in the band 1710 MHz - 1755 MHz		
HSDPA-FDD5	EUT supports UMTS FDD5 HSDPA in the band 824 MHz - 849 MHz		
HSUPA-FDD2	EUT supports UMTS FDD2 HSUPA in the band 1850 MHz - 1910 MHz		
HSUPA-FDD4	EUT supports UMTS FDD4 HSUPA in the band 1710 MHz - 1755 MHz		
HSUPA-FDD5	EUT supports UMTS FDD5 HSUPA in the band 824 MHz - 849 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
PCS1900	EUT supports PCS1900 band 1850MHz - 1910MHz		
TantC	temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment		
Wa1	EUT supports WLAN in mode a in the band 5150 MHz - 5250 MHz		
Wa2	EUT supports WLAN in mode a in the band 5250 MHz - 5350 MHz		
Wa3	EUT supports WLAN in mode a in the band 5470 MHz - 5725 MHz		

Features for OUT: Bittium Tough Mobile
FCC ID: V27SD-41
IC: 3282B-SD41

Designation	Description	Allowed Values	Supported Value(s)
Wa4	EUT supports WLAN in mode a in the band 5725 MHz - 5825 MHz		
Wa5	EUT supports WLAN in mode a in the band 5725 MHz - 5850 MHz		
Wa10	EUT supports WLAN in mode a in the band 5650 MHz - 5700 MHz		
Wn	EUT supports WLAN in mode n in the band 2400 MHz - 2483.5 MHz		

2.4 Auxiliary Equipment

AE No.	Type	Designation	Serial No.	HW Status	SW Status	Description
AE AUX3	3700034, 3.8 V, 2420 mAh		3520001			Battery from Celltech
AE AUX2	AK-300116-010-S					USB cable from ASSMANN
AE AUX1	KSA29B0500200D5		P0315			AC adapter (Seanen Electronics)

2.5 Operating Mode(s)

Ref.-No.	Description
2	The product is powered via AC/DC adapter

2.6 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

Setup No.	List of OUT samples		List of auxiliary equipment	
	Sample No.	Sample Description	AE No.	AE Description
S01_AA01				
	Sample: aa01	Radiated Sample		
S01_AE01				
	Sample: ae01	Conducted Sample		
Setup_ACDC				
	Sample: ah01	Radiated Sample	AE AUX3	Battery from Celltech
			AE AUX2	USB cable from ASSMANN
			AE AUX1	AC adapter (Seanen Electronics)

3 Results

3.1 General

Documentation of tested devices:	Available at the test laboratory.
Interpretation of the test results:	The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.
	In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.
	In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.
Note:	<ol style="list-style-type: none">1. This report contains the abbreviated information content pertaining to services rendered. Supporting documentation not included herein is maintained and available at the laboratory.2. All tests are performed under environmental conditions within the requirements of the specifications. Environmental conditions are available at the laboratory.3. This report is covering only Bluetooth low energy. Other radio technologies are reported in separately

3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES	Subpart C - Intentional Radiators; 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

3.3 List of Test Specification

<i>Test Specification:</i>	FCC part 2 and 15
<i>Version</i>	10-1-13 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES

3.4 Summary

<i>Test Case Identifier / Name</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
<i>Test (condition)</i>				
15c.1 Conducted emissions (AC power line) §15.207 15c.1; Mode = transmit operating mode: 2	Passed	2015/07/27	Lab 1	Setup_ACDC
15c.10 Power density §15.247 (e) 15c.10; Frequency = Low/Mid/High	Passed	2015/06/24	Lab 3	S01_AE01
15c.11 6dB Bandwidth §15.247 (a) (2) 15c.11; Frequency = Low/Mid/High	Passed	2015/06/24	Lab 3	S01_AE01
15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209 15c.2; Mode = Bluetooth Low Energy	Passed	2015/06/24	Lab 2	S01_AA01
15c.4 Peak power output §15.247 (b) (1) 15c.4; Mode = Bluetooth Low Energy	Passed	2015/06/24	Lab 3	S01_AE01
15c.5 Spurious RF conducted emissions §15.247 (d) 15c.5; Mode = Bluetooth Low Energy	Passed	2015/06/24	Lab 3	S01_AE01
15c.6 Band edge compliance §15.247 (d) 15c.6; Frequency = 2402, Mode = Bluetooth Low Energy 15c.6; Frequency = 2480, Mode = Bluetooth Low Energy 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated	Passed Passed Passed	2015/06/24 2015/06/24 2015/06/24	Lab 3 Lab 3 Lab 2	S01_AE01 S01_AE01 S01_AA01

3.5 Detailed Results

3.5.1 15c.1 Conducted emissions (AC power line) §15.207

Test: 15c.1; Mode = transmit

Result: Passed
Setup No.: Setup_ACDC
Date of Test: 2015/07/27 15:51
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15


Detailed Results:

AC MAINS CONDUCTED

EUT: (DE1132001ah01)
 Manufacturer: Elektrobit
 Operating Condition: BT TX on 2441 MHz, 1-DH1, USB-charging, 120V/60Hz
 Test Site: 7 layers Ratingen
 Operator: Mit
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207, Class B
 Comment: computer peripheral
 Start of Test: 27.07.2015 / 09:44:43

SCAN TABLE: "FCC Voltage"

Short Description:			FCC Voltage			
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

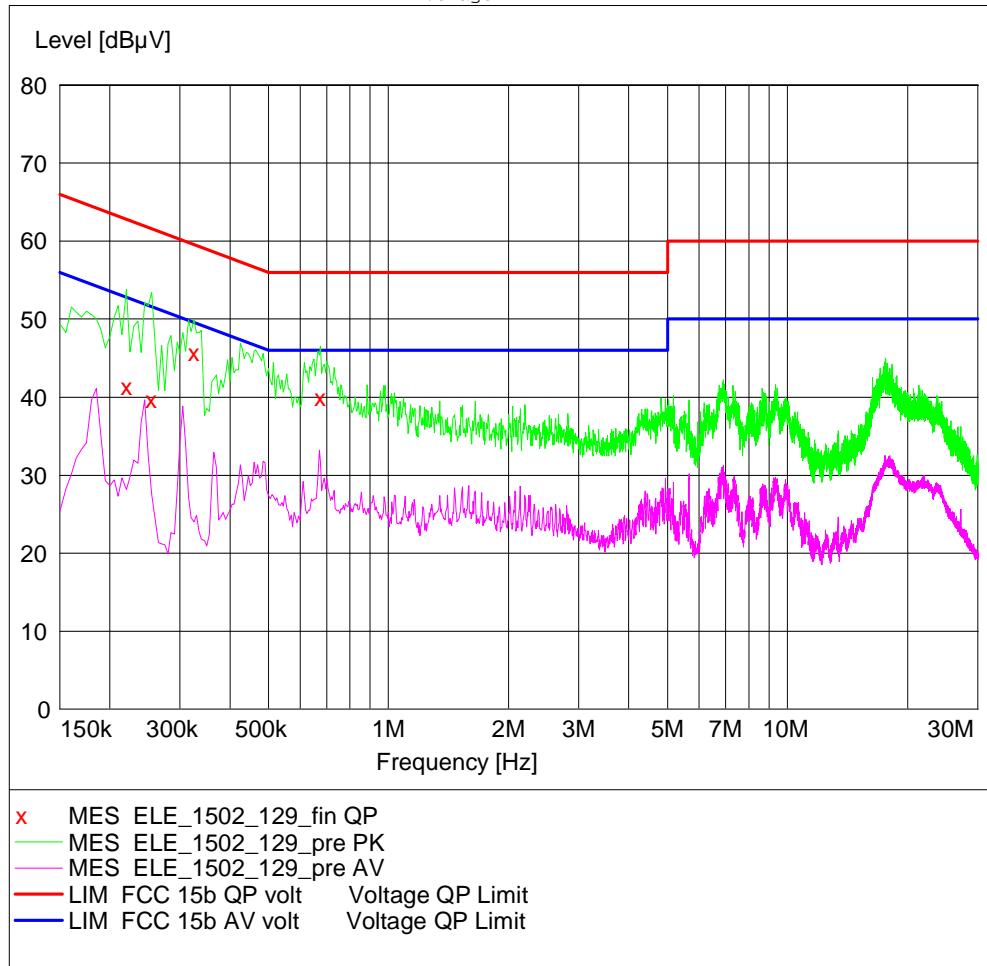

MEASUREMENT RESULT: "ELE_1502_129_fin QP"

27.07.2015 09:50

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.220000	41.30	10.1	63	21.6	N	GND
0.255000	39.70	10.1	62	21.9	L1	GND
0.325000	45.70	10.1	60	13.9	L1	GND
0.675000	40.00	10.1	56	16.0	L1	GND

3.5.2 15c.10 Power density §15.247 (e)

Test: 15c.10; Frequency = Low/Mid/High

Result: Passed

Setup No.: S01_AE01


Date of Test: 2015/06/24 11:41

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

		Power Density		
		2402 MHz	2440 MHz	2480 MHz
Modulation	Conditions	Power Density (dBm)	Power Density (dBm)	Power Density (dBm)
GFSK	TN, VN	-14.87	-13.9	-15.94
Maximum Power Density		-13.9		dBm

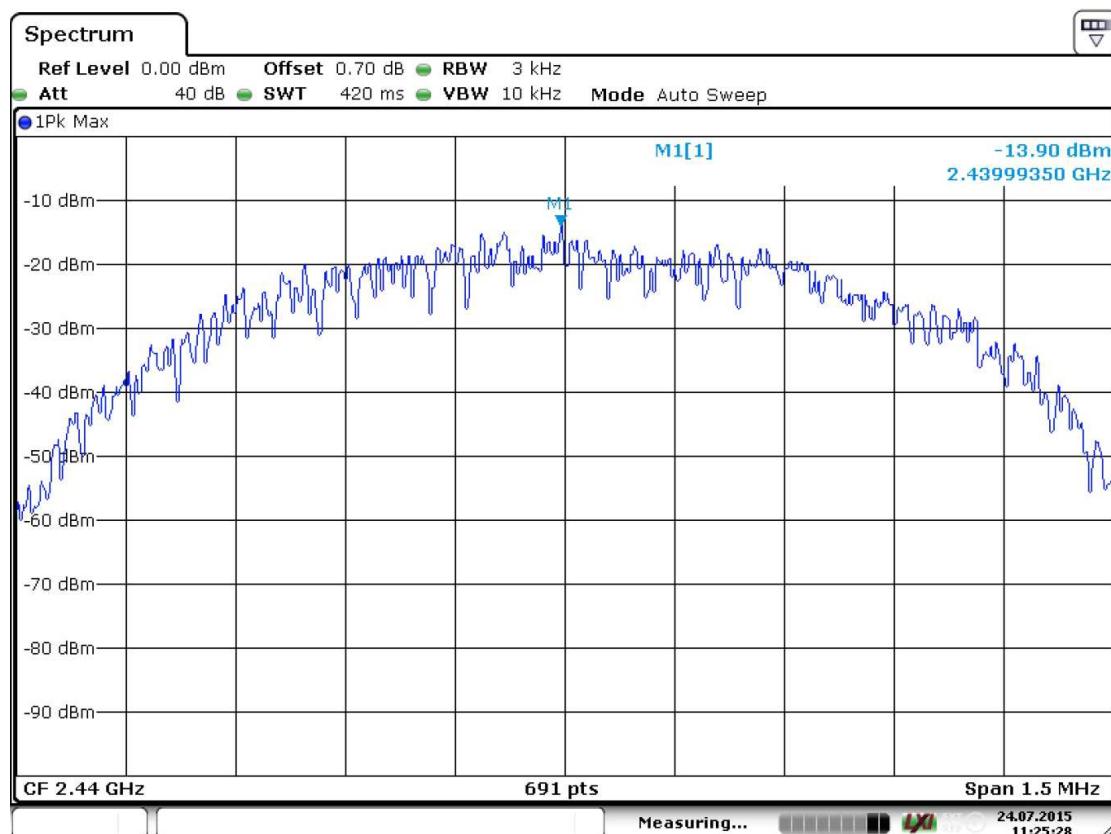

Date: 24.JUL.2015 11:25:28

3.5.3 15c.11 6dB Bandwidth §15.247 (a) (2)

Test: 15c.11; Frequency = Low/Mid/High

Result: Passed

Setup No.: S01_AE01


Date of Test: 2015/06/24 15:44

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Modulation	Frequency	6dB Bandwidth KHz
GFSK	2402 MHz	716.4
	2440 MHz	677.3
	2480 MHz	686

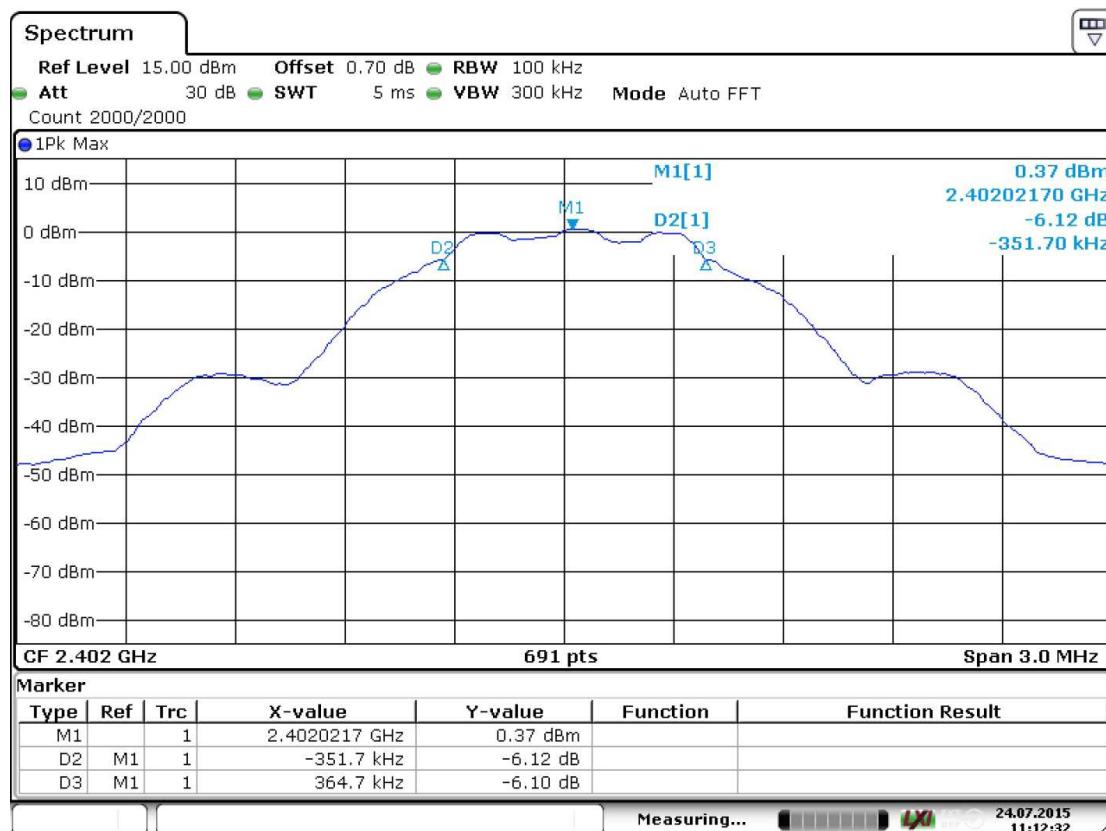

Date: 24.JUL.2015 11:12:33

**3.5.4 15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b),
 §15.209**
Test: 15c.2; Mode = Bluetooth Low Energy

Result: Passed

Setup No.: S01_AA01

Date of Test: 2015/06/24 15:48

Body: FCC47CFRchIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Test	TX freq.	EUT	Diagram no.	Result	Measure-ment Range	EUT	Diagram no.	Result	Measure-ment Range
FCC 15c247 Ch./MHz									
GFSK Modulation									
H-Field	19 / 2426	ah01	115-118	Passed	9k-30M	-	-	-	-
	0 / 2402	ah01	127	Passed	30M-1G	-	-	-	-
	19 / 2426	ah01	FCC15B	Passed	30M-1G	-	-	-	-
	39 / 2480	ah01	128	Passed	30M-1G	-	-	-	-
30M-1G	0 / 2402	aa01	004	Passed	1G-3G	-	-	-	-
	19 / 2426	aa01	005	Passed	1G-3G	-	-	-	-
	39 / 2480	aa01	006	Passed	1G-3G	-	-	-	-
	2480 BE	aa01	006_BE	Passed	78/2.48G-2.5G	-	-	-	-
	0 / 2402	aa01	004	Passed	3G-18G	-	-	-	-
	19 / 2426	aa01	005	Passed	3G-18G	-	-	-	-
	39 / 2480	aa01	006	Passed	3G-18G	-	-	-	-
1G-18G	0 / 2402	aa01	001	Passed	18G-25G	-	-	-	-
	19 / 2426	aa01	002	Passed	18G-25G	-	-	-	-
	39 / 2480	aa01	003	Passed	18G-25G	-	-	-	-
	18G-25G								

** REMARK: Emissions which are within 20 dB of the limit are listed in the tables below.

Diagram No.	Ant. Polar.	Limit QPK [dB μ V]	Frequency [MHz]	Corrected value QPK [dB μ V]	Margin QPK [dB]	Result
	Ver + Hor				Passed	

Diagram No.	Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
	Ver + Hor								Passed

Remark: The device is powered via AC/DC adapter, as it is the worst case

3.5.5 15c.4 Peak power output §15.247 (b) (1)


Test: 15c.4; Mode = Bluetooth Low Energy

Result: Passed
 Setup No.: S01_AE01
 Date of Test: 2015/06/24 11:43
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

Detailed Results:

Modulation	Conditions	Conducted Transmitter Power					
		2402 MHz		2440 MHz		2480 MHz	
		Output Power (dBm)	Output Power (mW)	Output Power (dBm)	Output Power (mW)	Output Power (dBm)	Output Power (mW)
GFSK	TN, VN	0.54	1.13	1.37	1.37	-0.49	0.89

Max Conducted Output Power (FSK Modulation)	1.37	dBm	1.37	mW

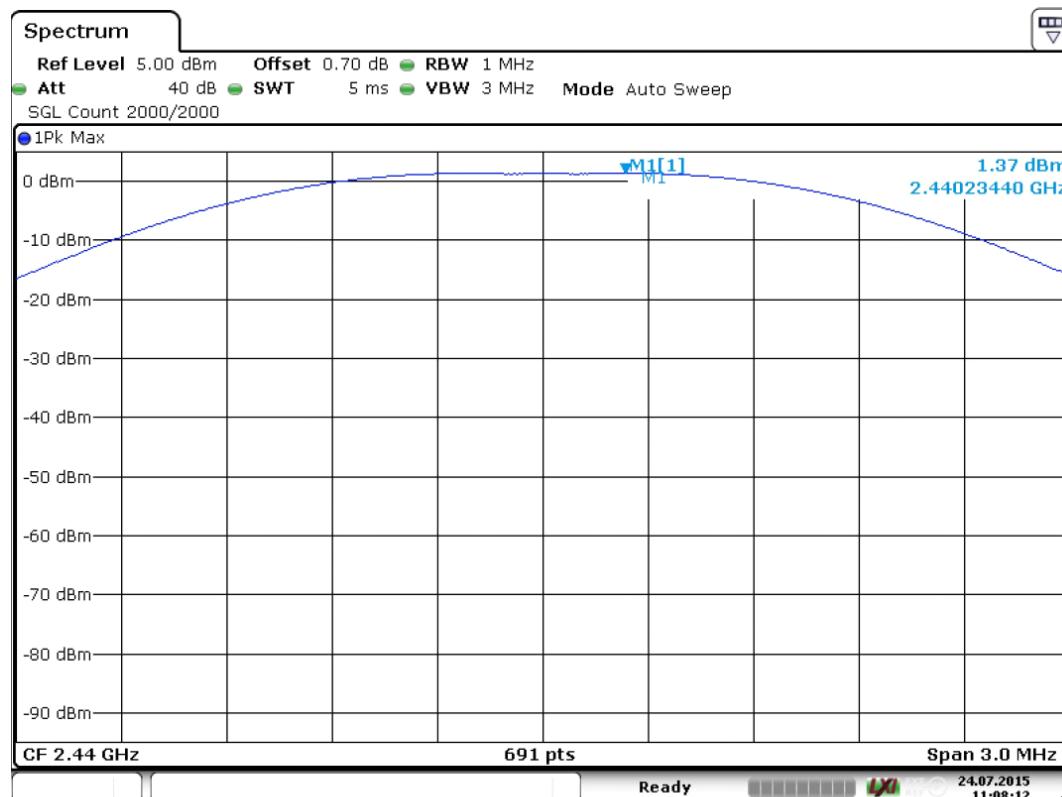

Date: 24.JUL.2015 11:08:12

3.5.6 15c.5 Spurious RF conducted emissions §15.247 (d)**Test: 15c.5; Mode = Bluetooth Low Energy**

Result: Passed

Setup No.: S01_AE01

Date of Test: 2015/06/24 11:44

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES


Test Specification: FCC part 2 and 15

Detailed Results:

Frequency range 30 MHz - 26 GHz			BT transmit using 1 Mbps with GFSK modulation		
Channel (MHz)	Frequency of emission MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2402	**				None found
2440	**				None found
2480	**				None found

* Reference value measured in the Band edge compliance test

** No Peaks found within 20 dB of limit line.

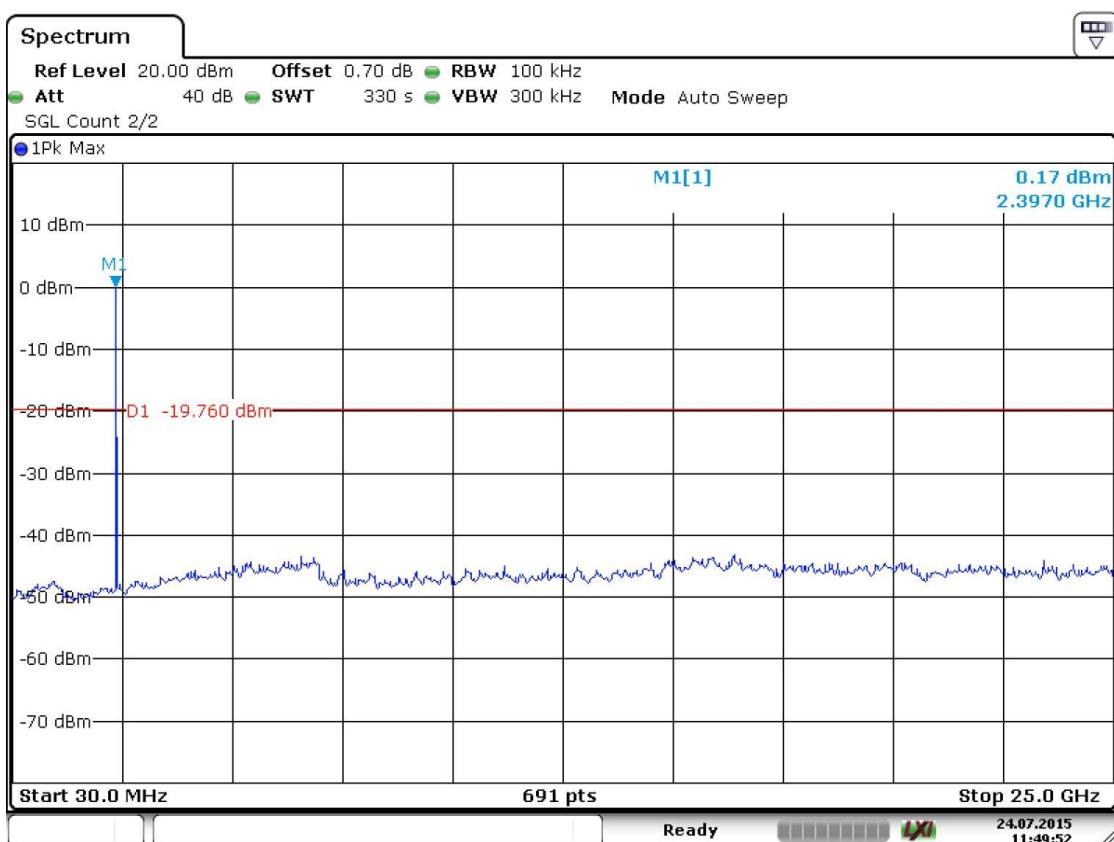

Date: 24.JUL.2015 11:49:52

3.5.7 15c.6 Band edge compliance §15.247 (d)

Test: 15c.6; Frequency = 2402, Mode = Bluetooth Low Energy

Result: Passed

Setup No.: S01_AE01


Date of Test: 2015/06/24 11:47

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-36.12	7.58	-12.42	23.70

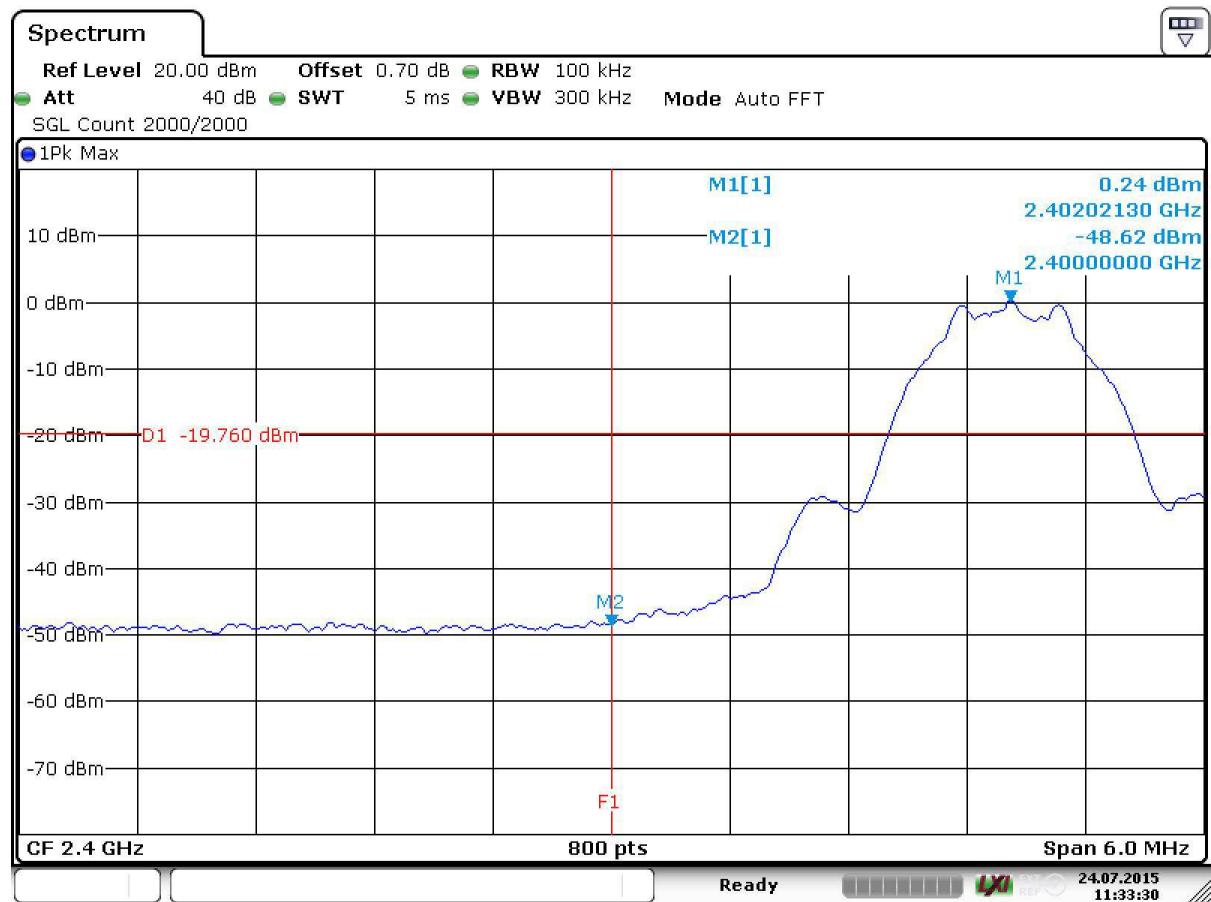


Date: 24.JUL.2015 11:33:30

Test: 15c.6; Frequency = 2480, Mode = Bluetooth Low Energy

Result: Passed
Setup No.: S01_AE01
Date of Test: 2015/06/24 11:44
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-47.95	7.47	-12.53	35.42

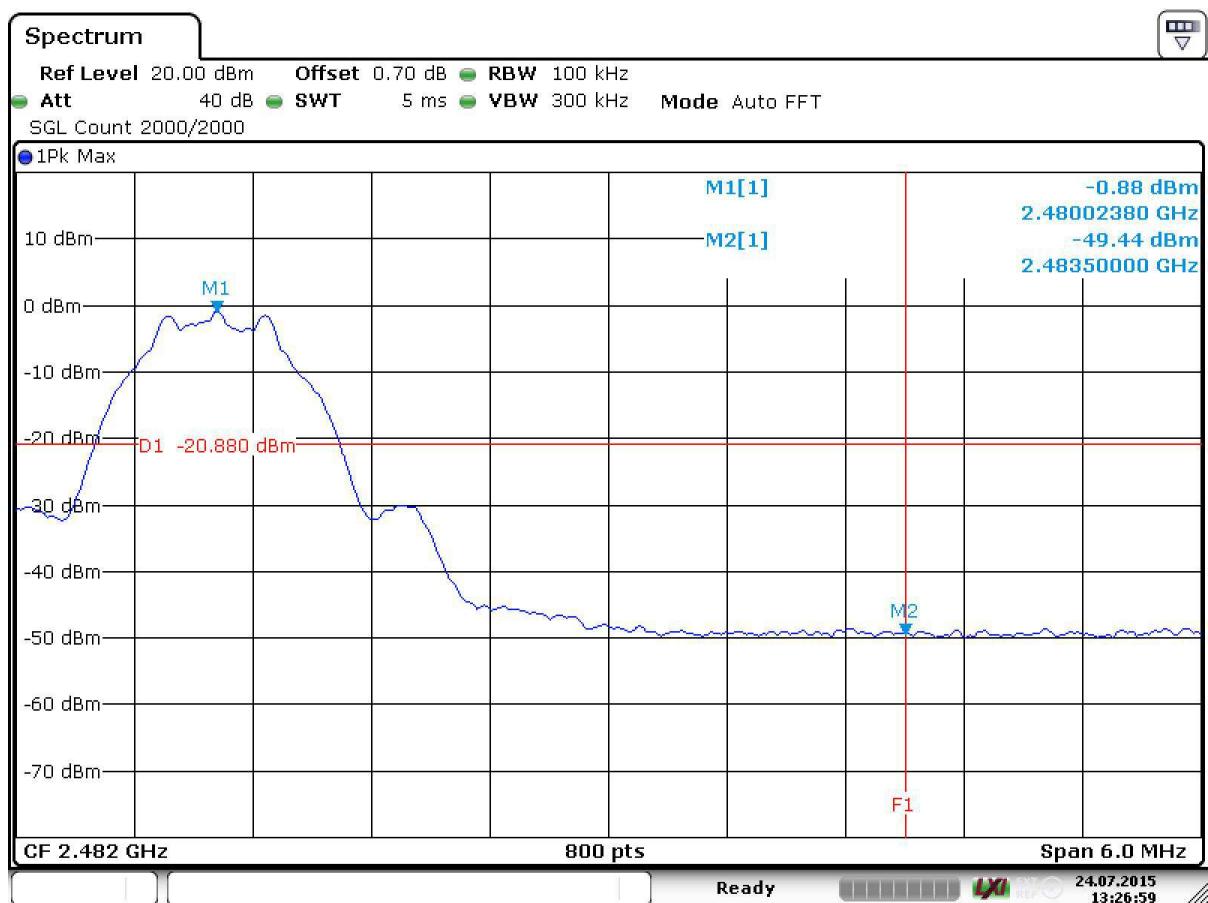

Date: 24.JUL.2015 13:26:59

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated*Result:* Passed*Setup No.:* S01_AA01*Date of Test:* 2015/06/24 15:49*Body:* FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES*Test Specification:* FCC part 2 and 15**Detailed Results:**

TX on	Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	48.75	34.98	25.25	19.02	Passed

4 Test Equipment Details

4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2	Last Execution	Next Exec.
Manufacturer:	Frankonia		
Description:	Anechoic Chamber for radiated testing		
Type:	10.58x6.38x6.00 m ³		
	<i>Calibration Details</i>		
	NSA (FCC)	2014/01/09	2017/01/09

Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions
Lab ID:
Lab 1
Manufacturer:

Rohde & Schwarz GmbH & Co.KG

Description:

EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/01/08 2016/01/31
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	standard calibration		2014/06/18 2017/11/30
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2013/11/25 2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DAkkS Calibration		2015/03/30 2017/03/31
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DAkkS Calibration		2015/03/30 2017/03/31

Test Equipment Auxiliary Equipment for Radiated emissions
Lab ID:
Lab 2

Description:

Equipment for emission measurements

Serial Number:

see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AM 4.0	AM4.0/180/11920 513	Maturo GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck Mess-Elektronik OHG
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck Mess-Elektronik OHG
Broadband Amplifier 1 GHz - 4 GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 18 GHz - 26 GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 30 MHz - 18 GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	SucoFlex	W18.02-2+W38.02-2	HUBER+SUHNER
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
			2012/06/26 2015/06/25
			2015/06/23 2018/06/22
Double-ridged horn	HF 907	102444	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
			2015/05/11 2018/05/10
Double-ridged horn-duplicated 2015-07-15 10:47:55	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/18000-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26.5 GHz BBHA 9170	BBHA 9170	BBHA9170262	Schwarzbeck Mess-Elektronik OHG
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
			2012/12/18 2015/12/17
Log.-per. Antenna (upgraded)	HL 562 Ultralog new biconicals	830547/003	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
			2015/06/30 2018/06/29
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
	DKD Calibration		2014/11/27 2017/11/27
Standard Gain / Pyramidal Horn Antenna 26.5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Standard Gain / Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5- 10kg/024/379070 9	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID: **Lab 2**
Manufacturer: see single devices
Description: Single Devices for various Test Equipment
Type: various
Serial Number: none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03
Digital Multimeter 13 (Clamp Meter)	Fluke 325	31270091WS	FLUKE
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2014/02/10 2016/02/09
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/07/29 2015/07/28
Spectrum Analyzer	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2015/06/23 2018/06/22
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co. KG

Test Equipment Digital Signalling Devices
Lab ID:
Lab 1, Lab 2
Description:

Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/27 2016/01/26
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2014/12/02 2017/12/01
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04		2007/07/16
	Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22		
	Firmware: μP1 8v50 02.05.06		

Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2014/12/03 2017/12/02
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02		2007/01/02
	SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10,		
	Firmware: μP1 8v40 01.12.05		

	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG

Test Equipment Emission measurement devices

Lab ID: **Lab 1, Lab 2**
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
EMI Receiver / Spectrum Analyzer	ESR 7	101424	Rohde & Schwarz
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial Factory Calibration		2014/11/13 2016/11/12
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2015/05/11 2016/05/10
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2015/05/11 2016/05/10
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/06/24 2017/06/23
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/01/07 2016/01/31
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03
Spectrum Analyzer	FSW 43	103779	Rohde & Schwarz
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial Factory Calibration		2014/11/17 2016/11/16

Test Equipment Harmonic & Flicker measurement system and AC Source

Lab ID: **Lab 1**
Manufacturer: Spitzenerger & Spieß GmbH & Co. KG
Description: EN61000-3-2&3 test system,source for magnetic field EN61000-4-8
Type: PHE 1200/B Spitzenerger&Spies
Serial Number: B6280

Single Devices for Harmonic & Flicker measurement system and AC Source

Single Device Name	Type	Serial Number	Manufacturer
Amplifier with integrated variable Oscillator	EP 1200/B, NA/B1	B6278	Spitzenerger & Spieß GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2015/07/23 2018/07/30
Flickermeter / Harmonic Analyzer	B10	M70579	Spitzenerger & Spieß GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2015/07/23 2018/07/30
Line impedance simulation system	1-pase 16A	B6279	Spitzenerger & Spieß GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2015/07/22 2018/07/30

Test Equipment Multimeter 03

Lab ID: **Lab 2**
Description: Fluke 177
Serial Number: 86670383

Single Devices for Multimeter 03

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03

Test Equipment Multimeter 12

Lab ID: **Lab 3**
Description: Ex-Tech 520
Serial Number: 05157876

Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03

Test Equipment Regulatory Bluetooth RF Test Solution

Lab ID: **Lab 3**
Description: Regulatory Bluetooth RF Tests
Type: Bluetooth RF
Serial Number: 001

Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit CBT	CBT	100302	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/08/29 2015/08/28
Power Meter NRVD	NRVD	832025/059	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/08/29 2015/08/28
Power Sensor NRV Z1 A	PROBE	832279/013	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/08/28 2015/08/27
Power Supply	NGSM 32/10	2725	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2015/06/22 2017/06/21
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/08/29 2015/08/28
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/06/21 2016/06/20

Test Equipment Shielded Room 02

Lab ID: **Lab 1**
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

Test Equipment Shielded Room 07

Lab ID: **Lab 3**
Description: Shielded Room 4m x 6m

Test Equipment T/A Logger 13

Lab ID: **Lab 1, Lab 2**
Description: Lufft Opus10 TPR
Type: Opus10 TPR
Serial Number: 13936

Single Devices for T/A Logger 13

Single Device Name	Type	Serial Number	Manufacturer
ThermoAirpressure Datalogger 13 (Environ)	Opus10 TPR (8253.00)	13936	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			
	Customized calibration	2015/02/27	2017/02/26

Test Equipment T/H Logger 02

Lab ID: **Lab 1**
Description: Lufft Opus10
Serial Number: 7489

Single Devices for T/H Logger 02

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 02 (Environ)	Opus10 THI (8152.00)	7489	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			
	Customized calibration	2015/02/27	2017/02/26

Test Equipment T/H Logger 12

Lab ID: **Lab 2**
Description: Lufft Opus10
Serial Number: 12482

Single Devices for T/H Logger 12

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 12 (Environ)	Opus10 THI (8152.00)	12482	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			
	Customized calibration	2015/03/10	2017/03/09

Test Equipment T/H Logger 15

Lab ID: **Lab 3**
Description: Lufft Opus10
Serial Number: 13985

Single Devices for T/H Logger 15

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 15 (Environ)	Opus10 THI (8152.00)	13985	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			
	Customized calibration	2015/03/10	2017/03/09

Test Equipment Temperature Chamber 01

Lab ID: Lab 3
Manufacturer: see single devices
Description: Temperature Chamber KWP 120/70
Type: Weiss
Serial Number: see single devices

Single Devices for Temperature Chamber 01

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umweltechnik GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2014/03/12 2016/03/11

5 Annex

5.1 Additional Information for Report

Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15. The following subparts are applicable to the results in this test report:

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

Additional documents

The tests were selected and performed with reference to the FCC Public Notice "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS)Operating Under §15.247, 558074 D01 DTS Meas Guidance v03r03, 2015-06-09".

ANSI C63.10-2013 is applied.

Description of Methods of Measurements

Conducted emissions (AC power line)

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.10,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.10.

The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50µH || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads. The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz

- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords.

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dB μ V) = 20 log (Limit (μ V)/1 μ V).

Occupied bandwidth

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 3
- Detector: Peak / Sample (6 dB bandwidth / 99% bandwidth)

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Used conversion factor: Output power (dBm) = 10 log (Output power (W) / 1mW)

Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz and 2400-2483.5 MHz bands: 1 watt.

==> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

Spurious RF conducted emissions

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.10,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration.

The Equipment Under Test (EUT) was set up on a non-conductive table $1.0 \times 2.0 \text{ m}^2$ in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz – 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz**Step 1: Preliminary scan**

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μs (BT Timing 1.25 ms)
- Turntable angle range: -180 to $+180^\circ$
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to $+180^\circ$
- Turntable step size: 45°

- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/-22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/-25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to +22.5° around the determined value
- Height variation range: -0.25 m to +0.25 m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz: The measurement distance was reduced to 1.4 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a standard gain horn antenna (18–25 GHz) are used, the steps 2–4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For the enhanced data rate packets the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at basic data rate. Typically, the measurement for these packets is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the basic data rate. Please refer to the results for the used frequency range.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency (MHz)	Limit (μ V/m)	Measurement distance (m)	Limit @ 10 m distance (dB μ V/m)
0.009 – 0.49	2400/F(kHz)	300	48.5..13.8 + 59.1 dB = 107.6..72.9
0.49 – 1.705	24000/F(kHz)	30	33.8..23.0 + 19.1 dB = 52.9..42.1
1.705 – 30	30	30	29.5 + 19.1 = 48.6

Frequency (MHz)	Limit (μ V/m)	Measurement distance (m)	Limit (dB μ V/m)
30 – 88	100	3	40.0
88 – 216	150	3	43.5

216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dB μ V/m) = 20 log (Limit (μ V/m)/1 μ V/m)

Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.10, FCC §15.31

Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements:

1. Show compliance of the lower band edge by a conducted measurement and
2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings for radiated measurement:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

...

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the lower band edge the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the higher band edge the limit is "specified in Section 15.209(a)".

Power Density

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.
 Analyzer settings:

- Detector: Peak-Maxhold
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 30 kHz
- Sweep Time: Coupled


Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


...
 The same method of determining the conducted output power shall be used to determine the power spectral density.

Setup Drawings

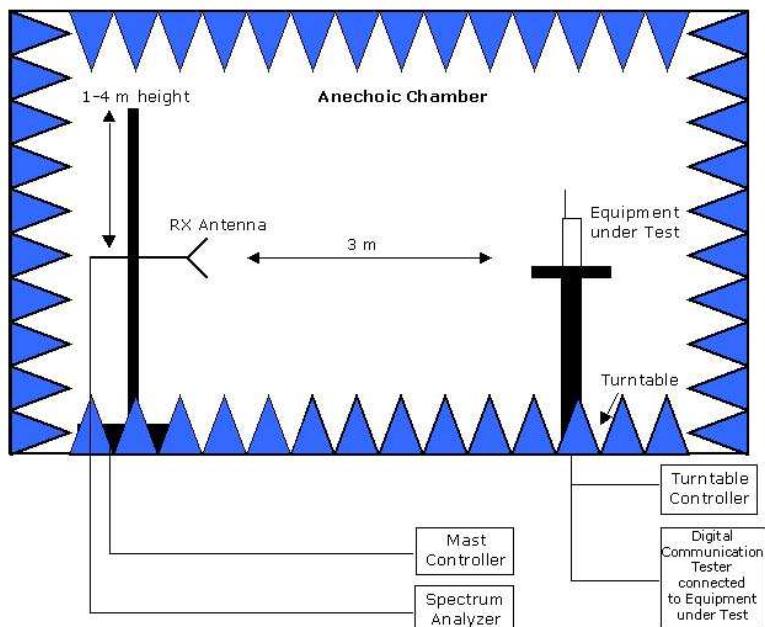


Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber:
 Measurements below 1 GHz: Semi-anechoic, conducting ground plane.
 Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces

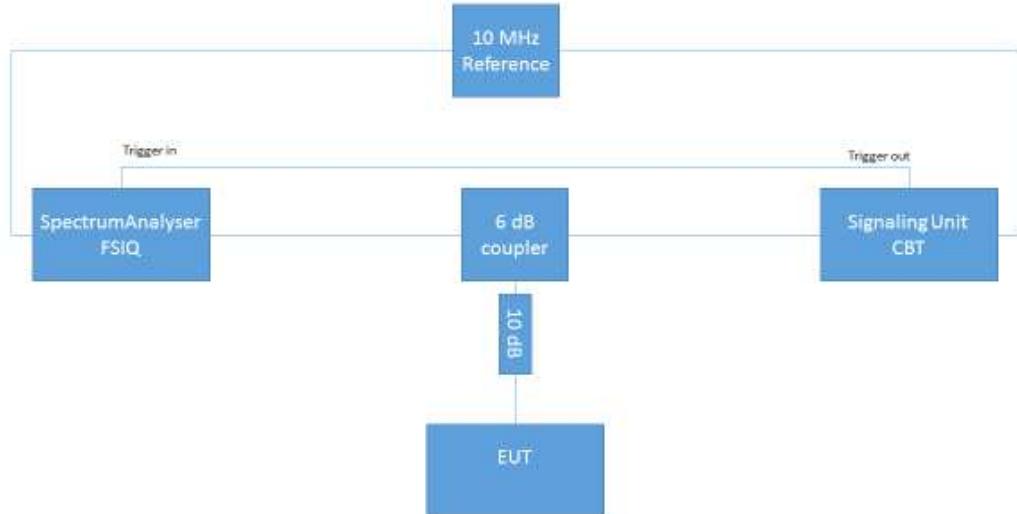

Test Setup; Conducted Tests; Bluetooth normal mode (BDR/EDR)

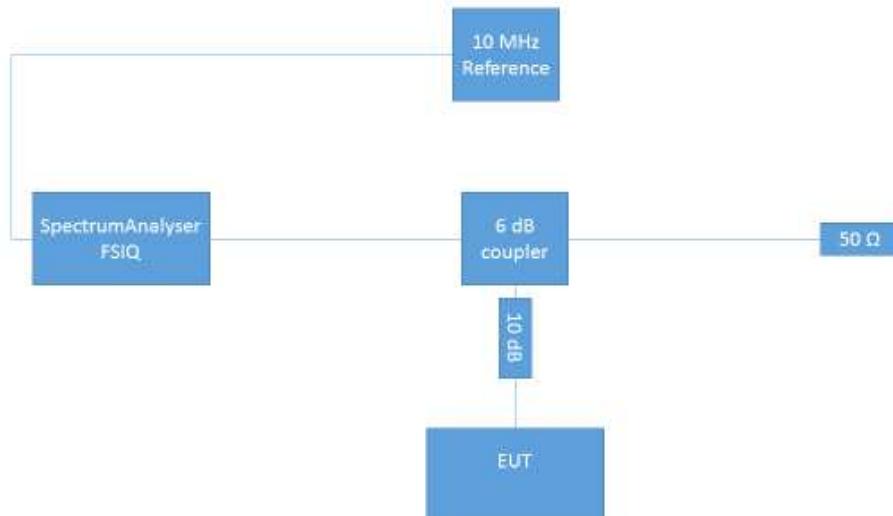

Test Setup; Conducted Tests; Bluetooth Low Energy Mode

September, 2015

To Whom This May Concern**Correlation of measurement requirements for
DTS (e.g. WLAN 2.4 GHz, BT LE) equipment
from
FCC and IC****DTS equipment**

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Occupied bandwidth	§ 15.247 (a) (2)	RSS-247 Issue 1: 5.2 (1)
Peak conducted output power	§ 15.247 (b) (3), (4)	RSS-247 Issue 1: 5.4 (4)
Transmitter spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 4: 6.13 / 8.9/8.10; RSS-247 Issue 1: 5.5
Transmitter spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 4: 6.13 / 8.9/8.10; RSS-247 Issue 1: 5.5
Band edge compliance	§ 15.247 (d)	RSS-247 Issue 1: 5.5
Power density	§ 15.247 (e)	RSS-247 Issue 1: 5.2 (2)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	-	-

Measurement Uncertainties

FCC Part 22, 24, 27, 90

IC RSS-132, RSS-133, RSS-139

Test Case	Parameter	Uncertainty
RF Power Output	Power	± 2.2 dB
Frequency Stability	Frequency	± 25 Hz
Spurious Emissions at antenna terminal	Power	± 2.2 dB
Field strength of spurious radiation	Power	± 4.5 dB
Emission and Occupied Bandwidth	Power Frequency	± 2.9 dB GSM: ± 10.6 kHz UMTS, LTE: ± 120.0 kHz
Band Edge Compliance	Power Frequency	± 2.9 dB GSM: ± 14.6 kHz UMTS, LTE: ± 68.0 kHz

FCC Part 15b

IC ICES-003

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power+	± 5.5 dB

FCC Part 15c, 15e

IC RSS-210, IC RSS-247

Test Case	Parameter	Uncertainty
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power		± 2.2 dB
Spurious Emissions at antenna terminal	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	3
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	3
2.1	General OUT Description	3
2.2	Detailed Description of OUT Samples	4
2.3	OUT Features	5
2.4	Auxiliary Equipment	6
2.5	Operating Mode(s)	6
2.6	Setups used for Testing	6
3	Results	7
3.1	General	7
3.2	List of the Applicable Body	7
3.3	List of Test Specification	7
3.4	Summary	8
3.5	Detailed Results	9
3.5.1	15c.1 Conducted emissions (AC power line) §15.207	9
3.5.2	15c.10 Power density §15.247 (e)	11
3.5.3	15c.11 6dB Bandwidth §15.247 (a) (2)	12
3.5.4	15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209	13
3.5.5	15c.4 Peak power output §15.247 (b) (1)	14
3.5.6	15c.5 Spurious RF conducted emissions §15.247 (d)	15
3.5.7	15c.6 Band edge compliance §15.247 (d)	17
4	Test Equipment Details	20
4.1	List of Used Test Equipment	20

5 Annex

5.1 Additional Information for Report

31

6 Index

42