

Figure B.5.2. Test Site Diagram (30MHz-1GHz)

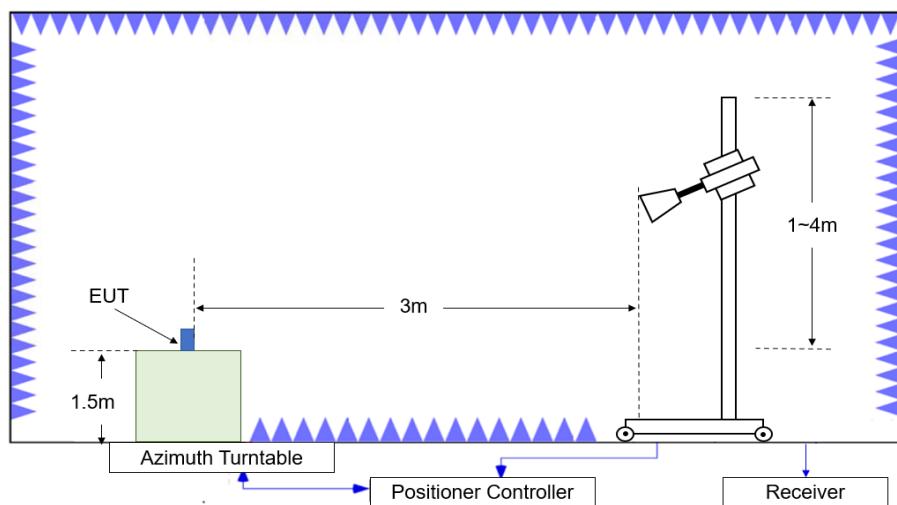


Figure B.5.3. Test Site Diagram (1GHz-40GHz)

Test Procedures

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10-2013 (ANSI C63.10-2020).

Test setting

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100kHz/300kHz	5
1000-3000	1MHz/3MHz	15
3000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Sample Calculation

A "reference path loss" is established and the A_{RPL} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result=P_{Mea}+A_{Rpl}=P_{Mea}+CableLoss+Antenna Factor

Test note

1. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
2. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
3. Measurement frequencies were performed from 9 kHz to the 10th harmonic of highest fundamental frequency or 40GHz, whichever is lower.
4. No spurious emissions were detected within 20dB of the limit below 30MHz. OFS and semi-chamber comparison testing had been performed and the result came out very similar. (KDB 414788)
5. The low/mid/high channels of all working mode with different bandwidths were all tested, only the worst ones were reported.

Test Result

EUT ID:EUT1

Radiated Spurious Emission

GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17619.500	50.98	-29.60	42.30	38.28	74.00	23.02	V
13725.500	47.01	-31.00	40.80	37.21	74.00	26.99	H
11290.000	43.16	-32.80	38.90	37.06	74.00	30.84	H
9404.000	41.14	-34.10	38.10	37.14	74.00	32.86	H
7206.000	39.57	-35.40	37.40	37.57	74.00	34.43	V
2338.400	52.89	-19.60	27.30	45.19	74.00	21.11	V

GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17988.000	50.72	-29.40	42.40	37.72	74.00	23.28	H
13735.500	46.62	-31.00	40.80	36.82	74.00	27.38	V
12782.500	43.29	-31.50	39.60	35.19	74.00	30.71	H
9487.500	40.62	-34.60	38.10	37.12	74.00	33.38	H
7975.000	38.02	-35.40	37.10	36.32	74.00	35.98	H
2489.200	52.83	-19.70	27.90	44.63	74.00	21.17	V

$\pi/4$ DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17959.000	51.64	-29.40	42.40	38.64	74.00	22.36	V
13692.500	46.66	-31.00	40.70	36.96	74.00	27.34	V
12633.500	45.24	-31.80	39.30	37.74	74.00	28.76	V
8707.500	41.09	-34.40	37.70	37.79	74.00	32.91	V
7518.500	39.41	-35.10	37.50	37.01	74.00	34.59	V
2382.300	52.32	-19.80	27.50	44.62	74.00	21.68	H

 $\pi/4$ DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17583.000	49.99	-29.60	42.30	37.29	74.00	24.01	H
14170.500	46.89	-30.20	40.40	36.69	74.00	27.11	H
12804.000	43.27	-31.50	39.60	35.17	74.00	30.73	H
9843.500	40.41	-34.10	38.00	36.51	74.00	33.59	V
7549.500	39.12	-35.50	37.40	37.22	74.00	34.88	H
2491.500	54.05	-19.70	27.90	45.85	74.00	19.95	V

8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17605.500	50.72	-29.60	42.30	38.02	74.00	23.28	H
13558.500	47.09	-31.50	40.60	37.99	74.00	26.91	V
12636.500	43.46	-31.80	39.30	35.96	74.00	30.54	V
9520.000	41.20	-33.80	38.00	37.00	74.00	32.80	V
7416.500	40.44	-35.10	37.50	38.04	74.00	33.56	H
2342.900	52.64	-19.60	27.30	44.94	74.00	21.36	V

8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17960.500	50.90	-29.40	42.40	37.90	74.00	23.10	H
13726.000	47.04	-31.00	40.80	37.24	74.00	26.96	H
12932.000	43.81	-31.40	39.80	35.51	74.00	30.19	V
9415.500	40.99	-33.60	38.10	36.49	74.00	33.01	H
7117.500	39.07	-35.10	37.10	37.07	74.00	34.93	H
2490.000	52.83	-19.70	27.90	44.63	74.00	21.17	H

Average Measurement results
GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17955.000	40.88	-29.40	42.40	27.88	54.00	13.12	H
13734.500	37.09	-31.00	40.80	27.29	54.00	16.91	V
12675.000	34.01	-31.90	39.40	26.51	54.00	19.99	H
9396.500	31.17	-34.10	38.10	27.17	54.00	22.83	H
7305.500	29.70	-35.40	37.50	27.60	54.00	24.30	H
2366.900	41.34	-19.60	27.30	33.64	54.00	12.66	H

GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17944.500	41.02	-29.40	42.40	28.02	54.00	12.98	V
13717.500	37.06	-31.00	40.80	27.26	54.00	16.94	H
12281.000	33.88	-32.10	38.80	27.18	54.00	20.12	H
9512.500	30.31	-33.80	38.00	26.11	54.00	23.69	H
7521.000	29.49	-35.10	37.50	27.09	54.00	24.51	H
2485.800	41.42	-19.70	27.90	33.22	54.00	12.58	H

π/4 DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17603.500	41.55	-29.60	42.30	28.85	54.00	12.45	V
13700.500	37.54	-31.00	40.70	27.84	54.00	16.46	V
12838.500	34.05	-31.90	39.70	26.35	54.00	19.95	H
9193.500	31.49	-34.70	37.90	28.29	54.00	22.51	H
7608.500	29.78	-35.60	37.40	27.98	54.00	24.22	H
2367.000	40.53	-19.60	27.30	32.83	54.00	13.47	V

π/4 DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17960.500	40.70	-29.40	42.40	27.70	54.00	13.30	H
14048.500	36.79	-31.10	40.60	27.29	54.00	17.21	H
12646.000	33.78	-31.80	39.30	26.28	54.00	20.22	V
9026.000	30.86	-34.30	37.60	27.56	54.00	23.14	H
7624.500	29.64	-35.50	37.30	27.84	54.00	24.36	H
2491.100	41.03	-19.70	27.90	32.83	54.00	12.97	V

8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17963.000	41.20	-29.40	42.40	28.20	54.00	12.80	V
13646.500	36.93	-31.30	40.70	27.53	54.00	17.07	V
12642.500	34.07	-31.80	39.30	26.57	54.00	19.93	V
8993.000	31.40	-34.70	37.60	28.50	54.00	22.60	V
7323.500	30.37	-35.40	37.50	28.27	54.00	23.63	H
2358.300	40.91	-19.60	27.30	33.21	54.00	13.09	V

8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17610.500	40.64	-29.60	42.30	27.94	54.00	13.36	V
13686.000	37.08	-31.00	40.70	27.38	54.00	16.92	H
12674.500	33.54	-31.90	39.40	26.04	54.00	20.46	H
9623.000	31.25	-34.30	37.90	27.65	54.00	22.75	H
7314.500	29.45	-35.40	37.50	27.35	54.00	24.55	H
2496.200	41.42	-19.70	27.90	33.22	54.00	12.58	V

Conclusion: Pass

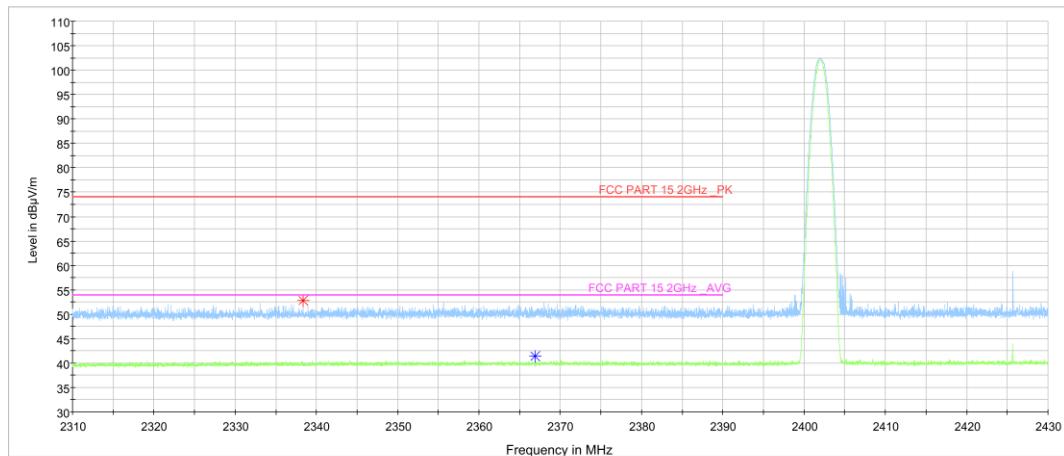
Note: the spurious emission above 18G is noise only and did not show on the report.

Band edge compliance

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.31GHz ~2.43GHz	Fig.58	P
	78	2.45GHz ~2.5GHz	Fig.59	P

Mode	Channel	Frequency Range	Test Results	Conclusion
$\pi/4$ DQPSK	0	2.31GHz ~2.43GHz	Fig.60	P
	78	2.45GHz ~2.5GHz	Fig.61	P

Mode	Channel	Frequency Range	Test Results	Conclusion
8DPSK	0	2.31GHz ~2.43GHz	Fig.62	P
	78	2.45GHz ~2.5GHz	Fig.63	P

Conclusion: PASS
Test graphs as below

Fig.58. Frequency Band Edges: GFSK, Channel 0, Hopping Off, 2.31 GHz – 2.45GHz

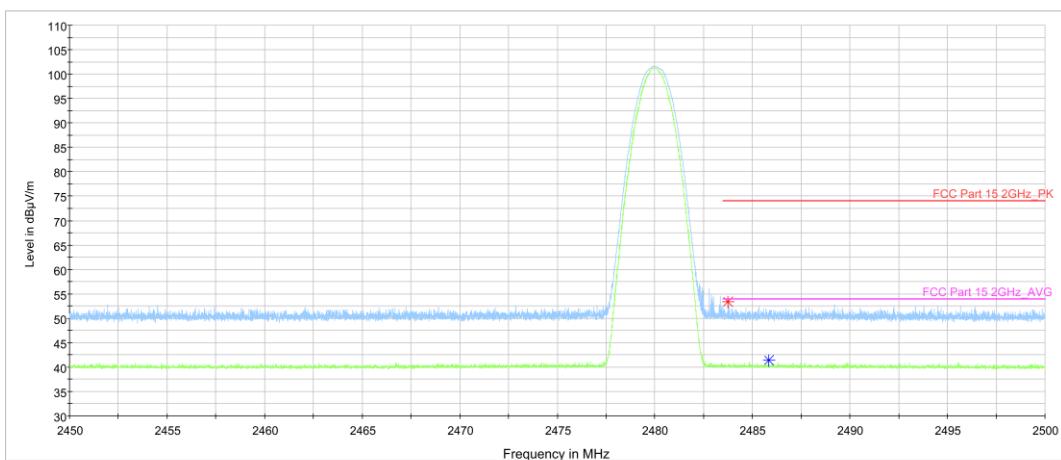


Fig.59. Frequency Band Edges: GFSK, Channel 78, Hopping Off, ch11, 2.45 GHz - 2.50GHz

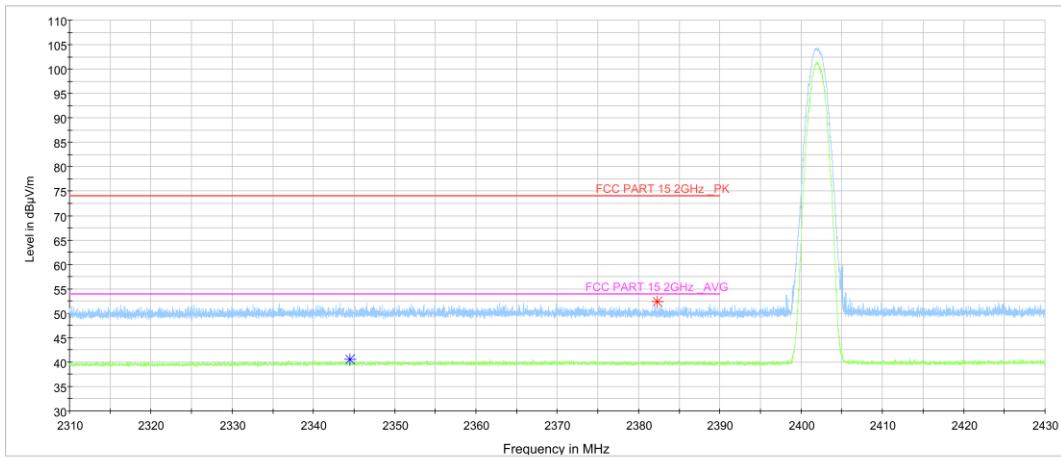


Fig.60. Frequency Band Edges: $\pi/4$ DQPSK, Channel 0, Hopping Off, 2.31 GHz - 2.45GHz

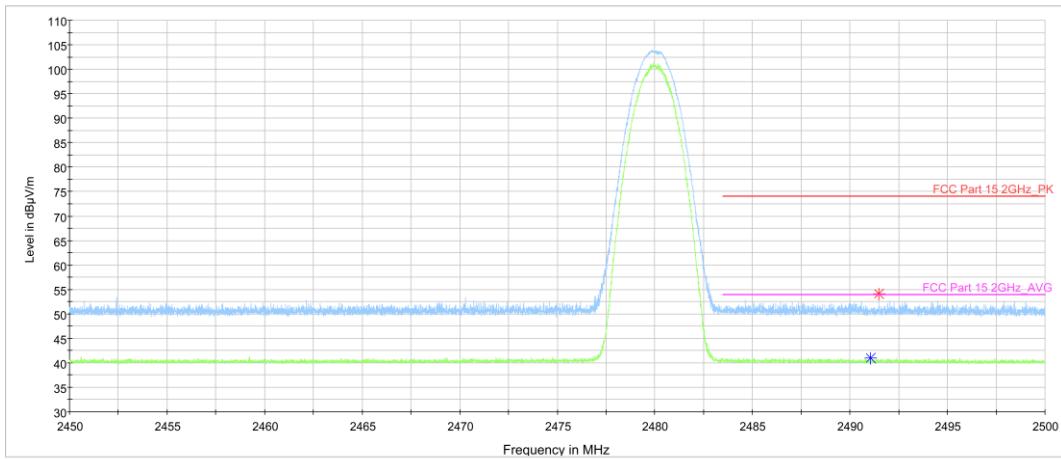


Fig.61. Frequency Band Edges: $\pi/4$ DQPSK, Channel 78, Hopping Off, 2.45 GHz - 2.50GHz

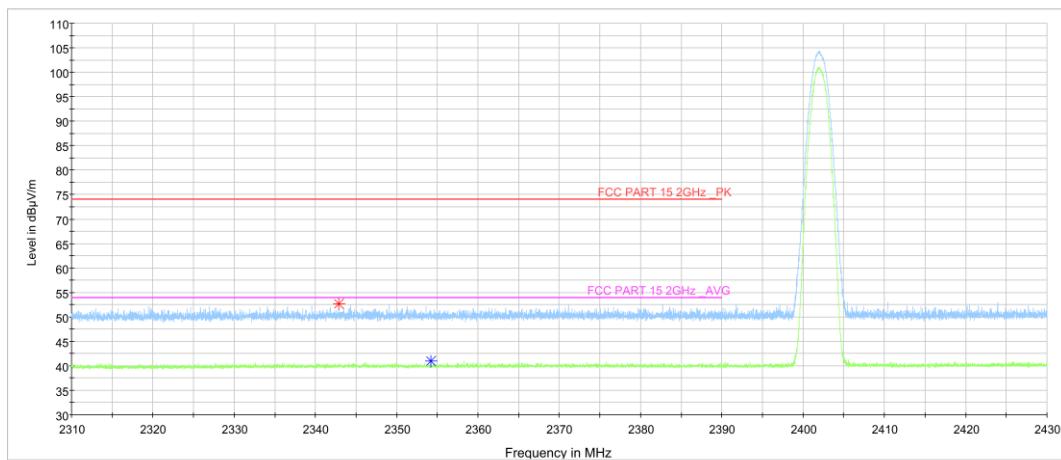


Fig.62. Frequency Band Edges: 8DPSK, Channel 0, 2.31 GHz - 2.45GHz

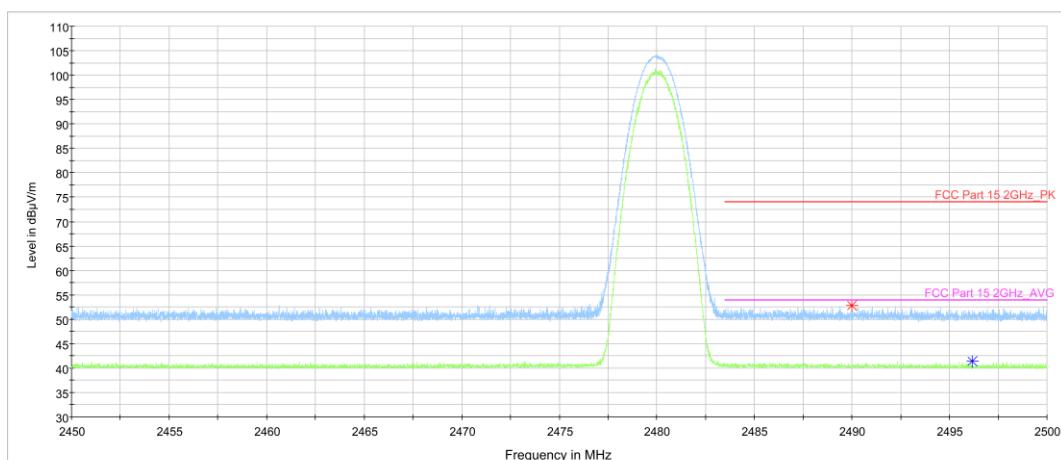


Fig.63. Frequency Band Edges: 8DPSK, Channel 78, 2.45 GHz - 2.50GHz

B.6. Time of Occupancy (Dwell Time)

Method of Measurement: See ANSI C63.10-clause 7.8.4

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW \geq RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

Measurement Result:

For GFSK

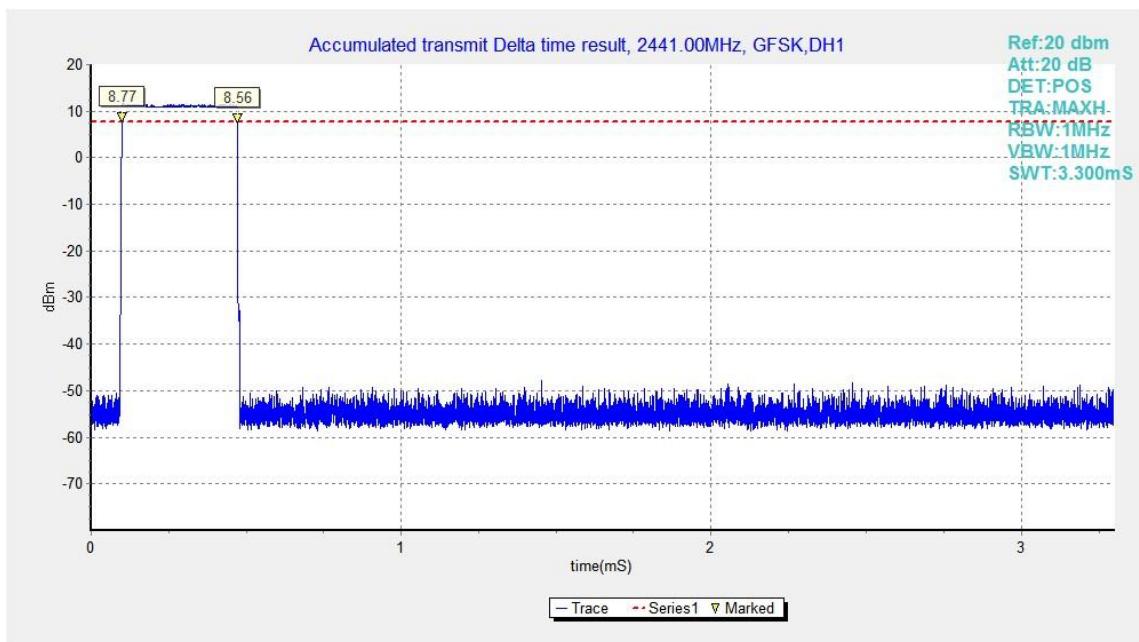
Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	DH1	Fig.64	0.37	Fig.65	321	118.77	P
	DH3	Fig.66	1.63	Fig.67	105	171.15	P
	DH5	Fig.68	2.88	Fig.69	67	192.96	P

For $\pi/4$ DQPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	2DH1	Fig.70	0.38	Fig.71	316	120.08	P
	2DH3	Fig.72	1.63	Fig.73	107	174.41	P
	2DH5	Fig.74	2.88	Fig.75	75	216	P

For 8DPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
39	3DH1	Fig.76	0.38	Fig.77	318	120.84	P
	3DH3	Fig.78	1.63	Fig.79	100	163	P
	3DH5	Fig.80	2.88	Fig.81	65	187.2	P

Conclusion: PASS
Test graphs as below:

Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

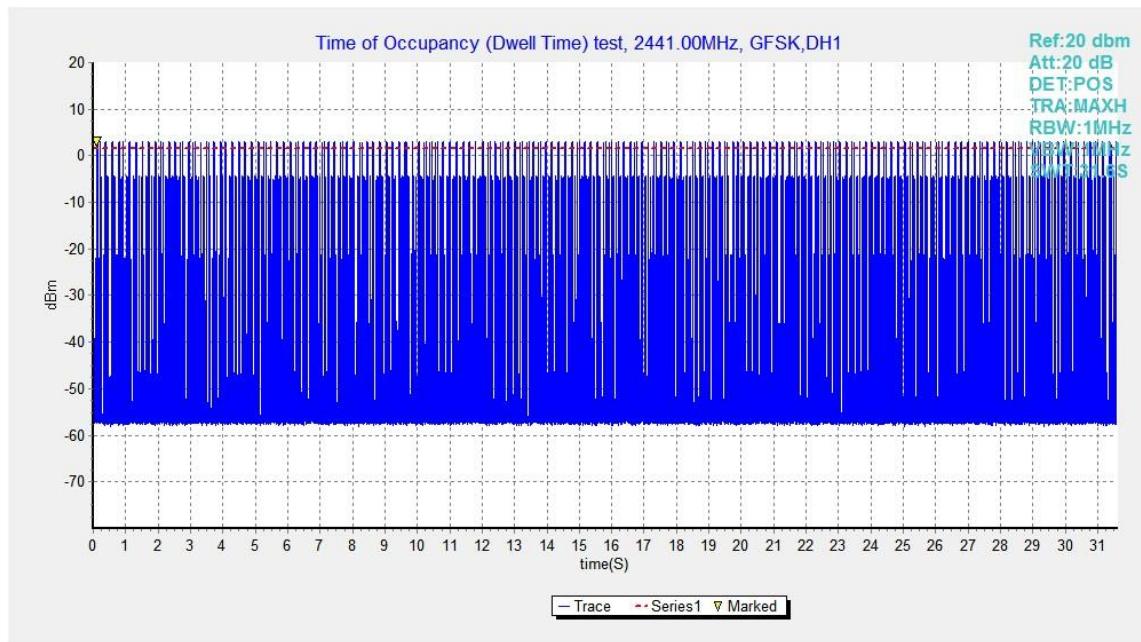


Fig.65. Number of Transmissions Measurement:Channel 39,Packet DH1

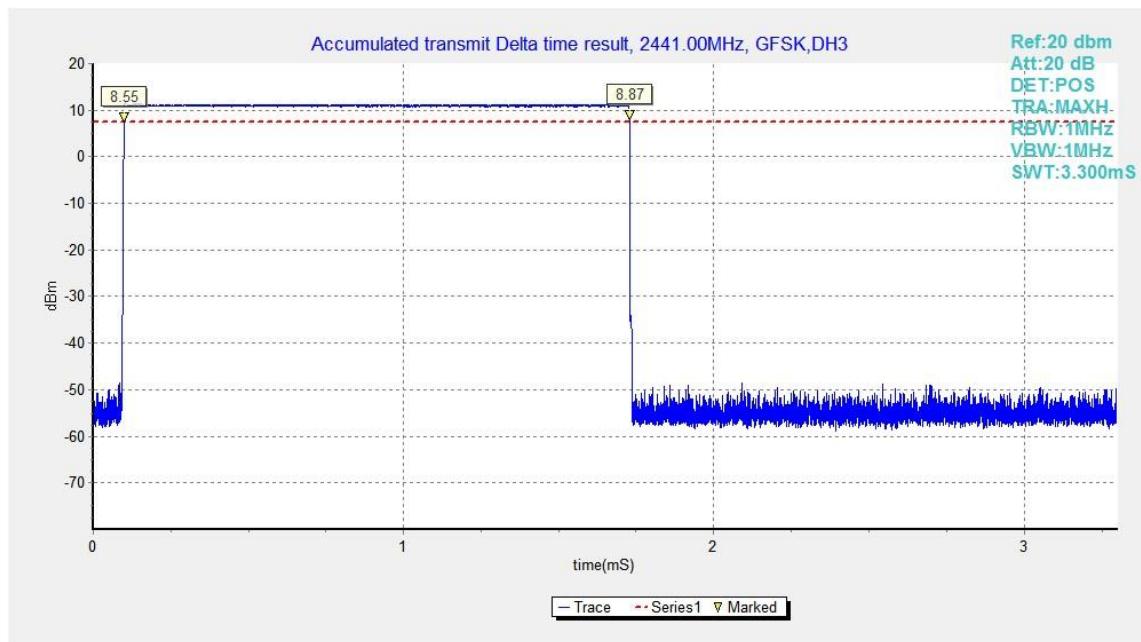


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

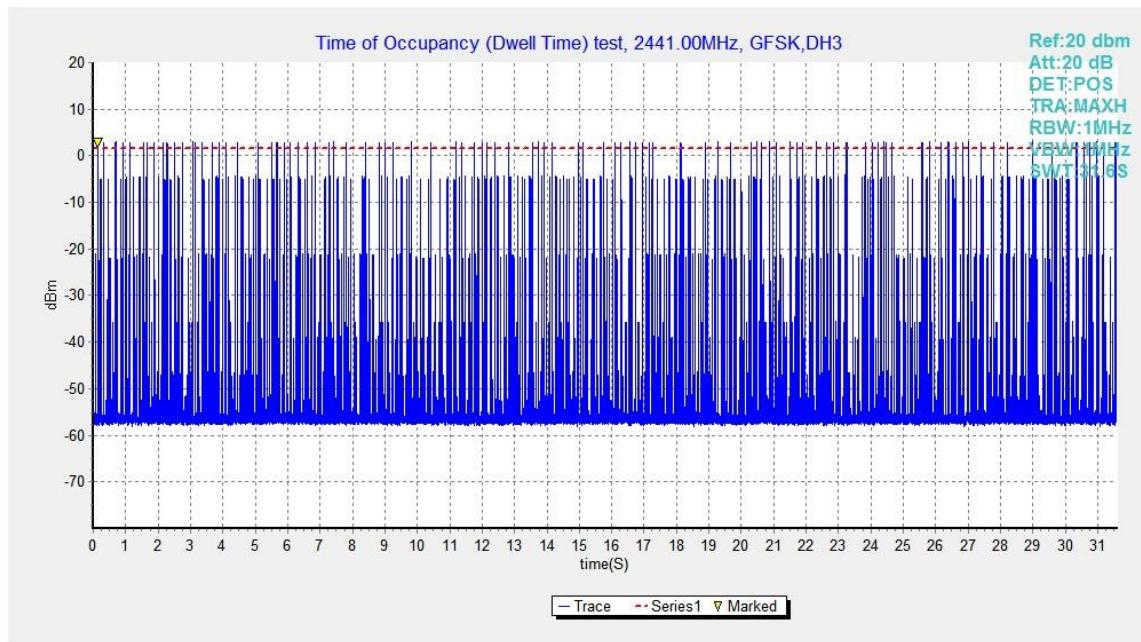


Fig.67. Number of Transmissions Measurement:Channel 39,Packet DH3

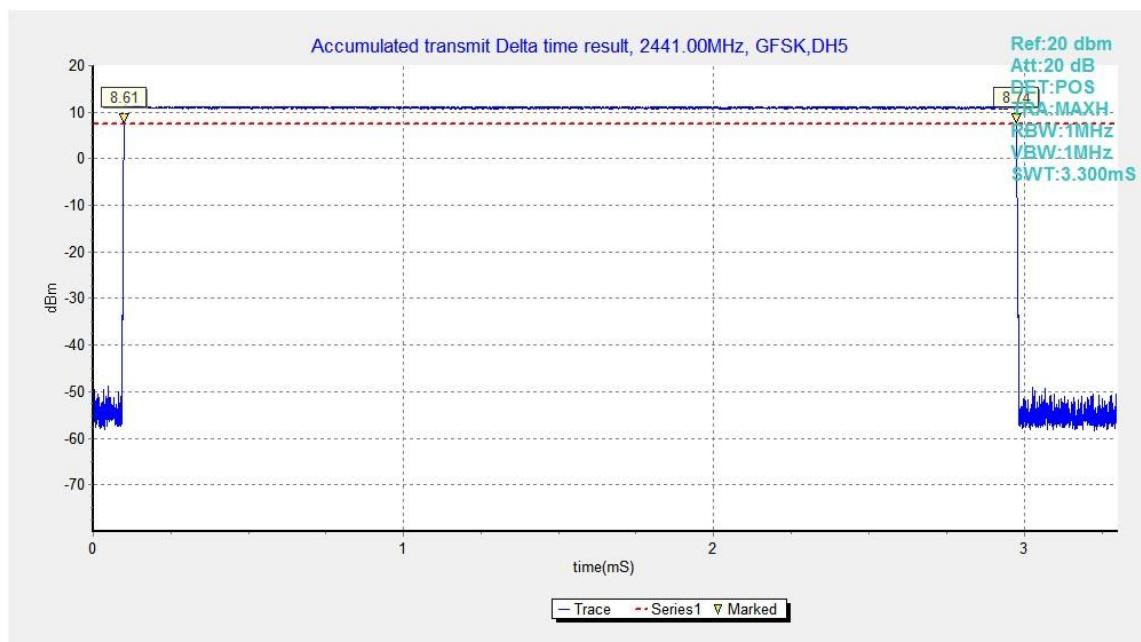


Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5

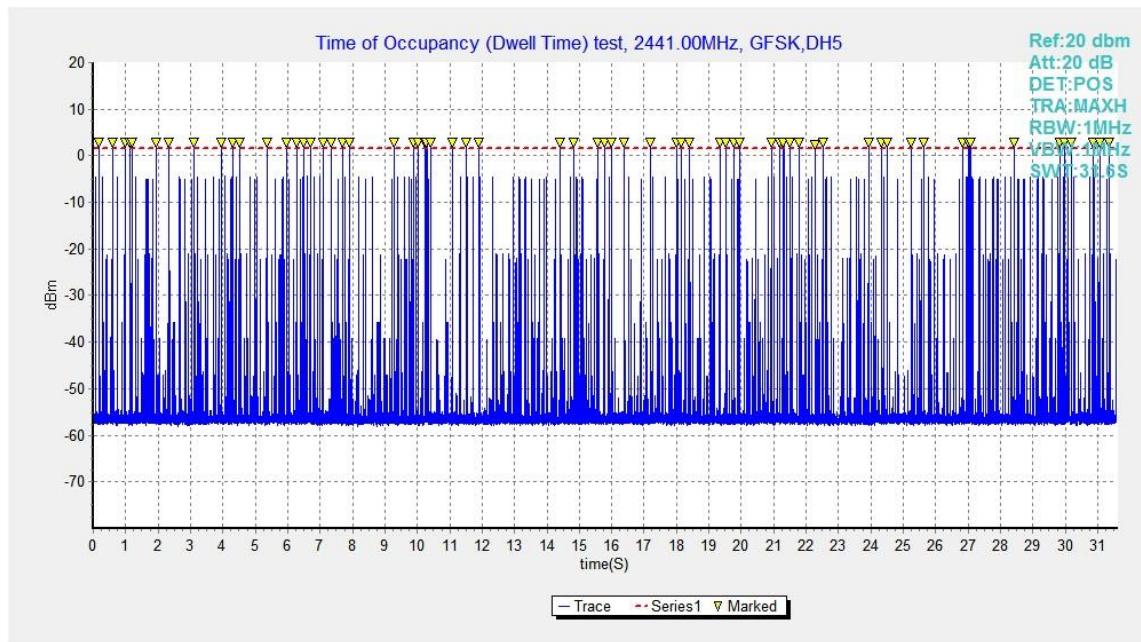


Fig.69. Number of Transmissions Measurement:Channel 39,Packet DH5

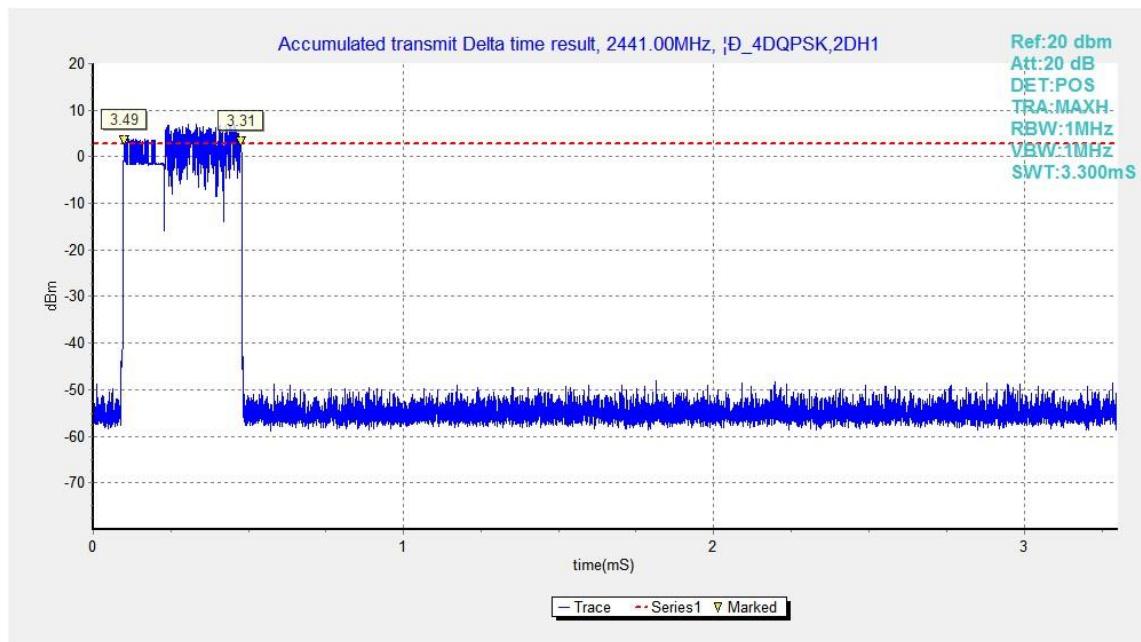


Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

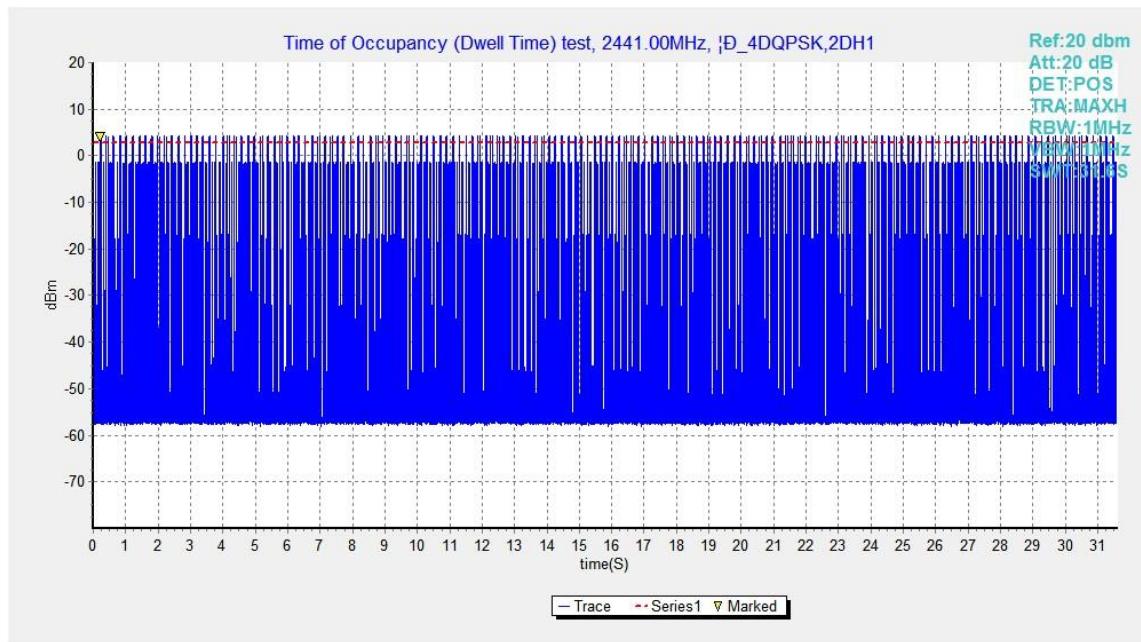


Fig.71. Number of Transmissions Measurement:Channel 39,Packet 2-DH1

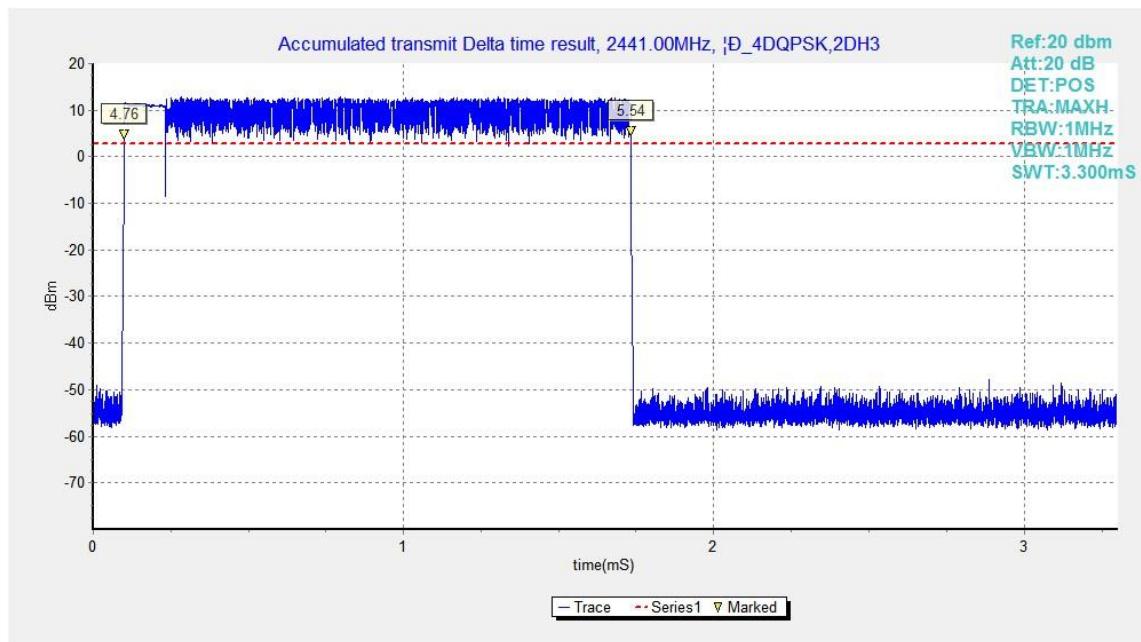


Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

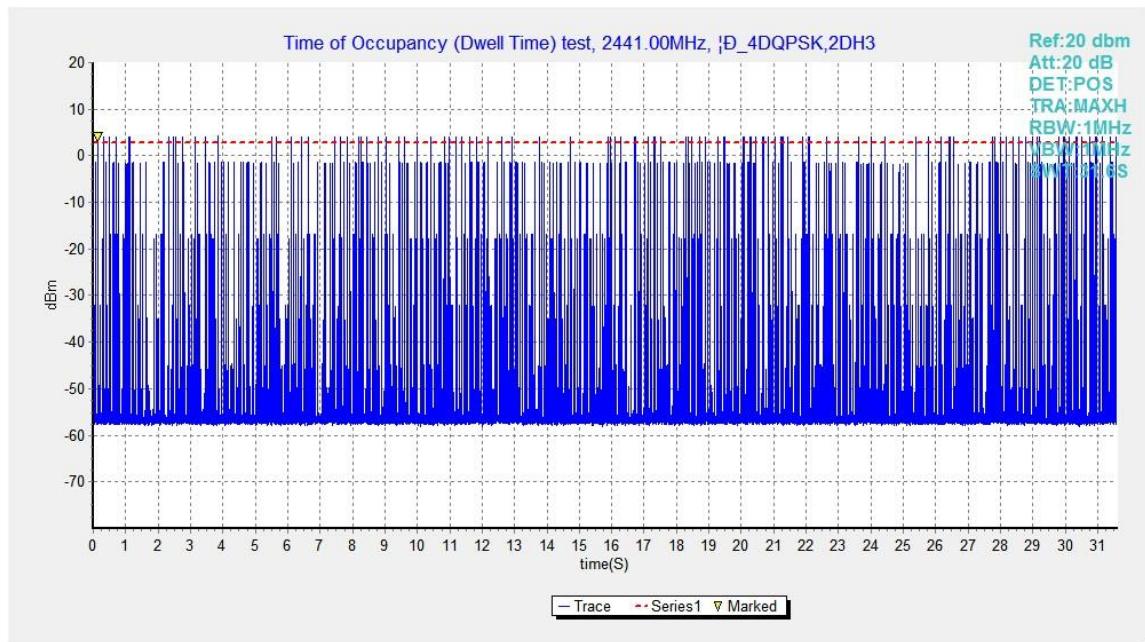


Fig.73. Number of Transmissions Measurement:Channel 39,Packet 2-DH3

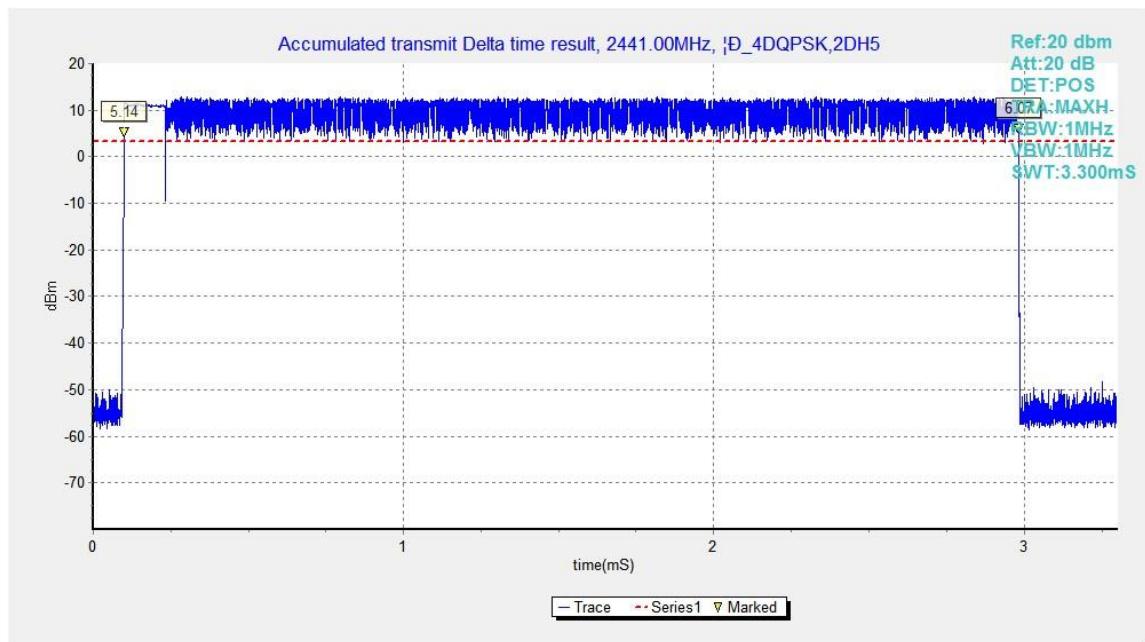


Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

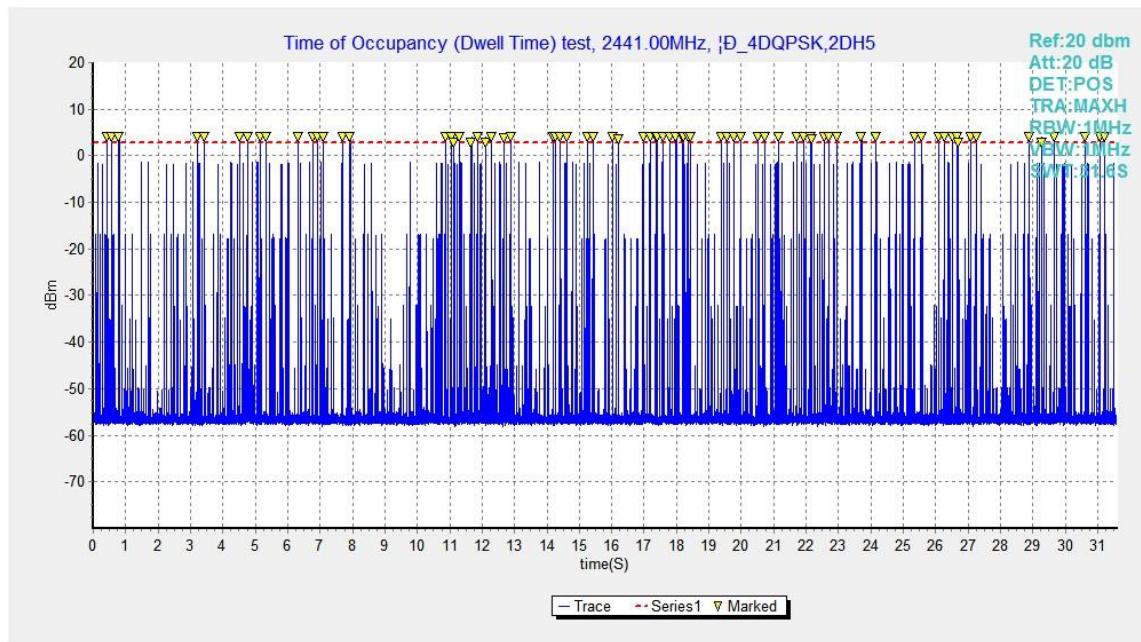


Fig.75. Number of Transmissions Measurement:Channel 39,Packet 2-DH5

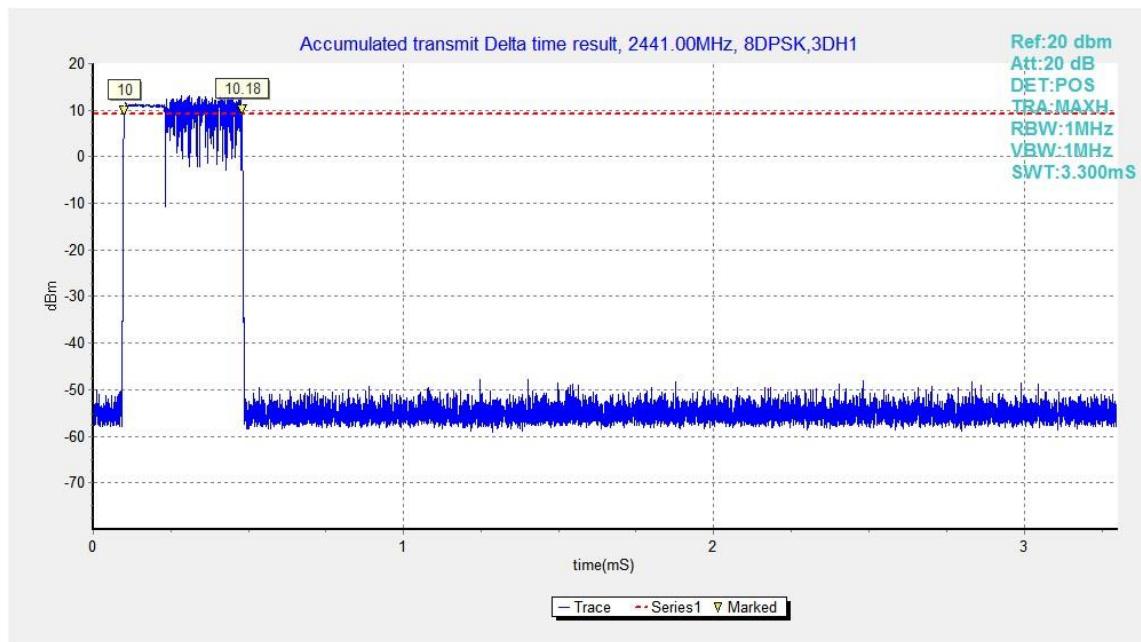


Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

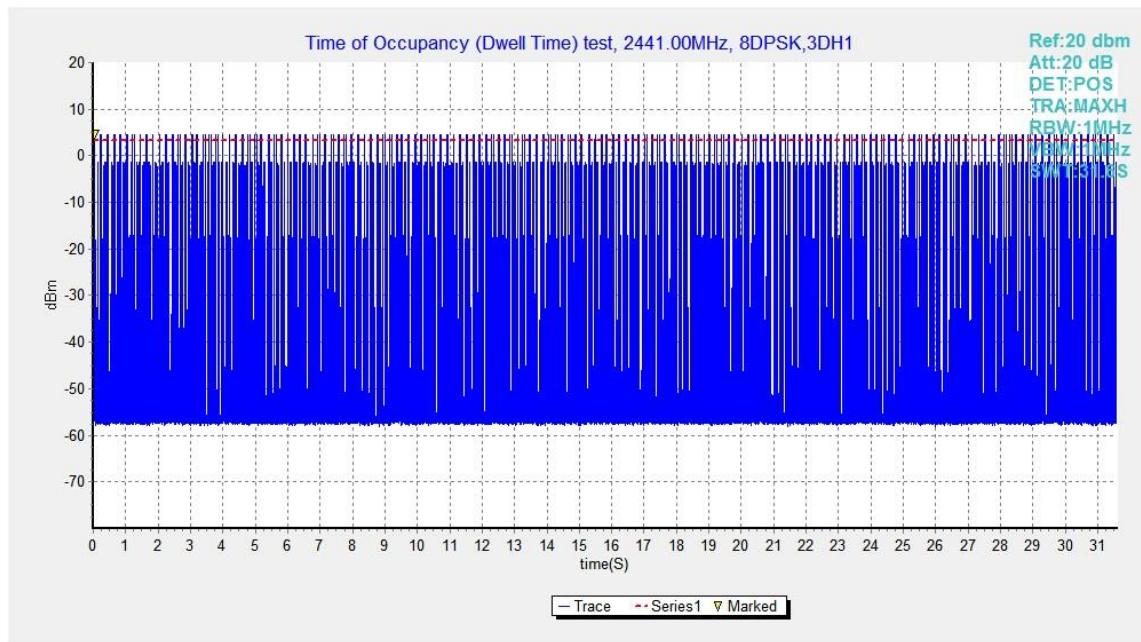


Fig.77. Number of Transmissions Measurement:Channel 39,Packet 3-DH1

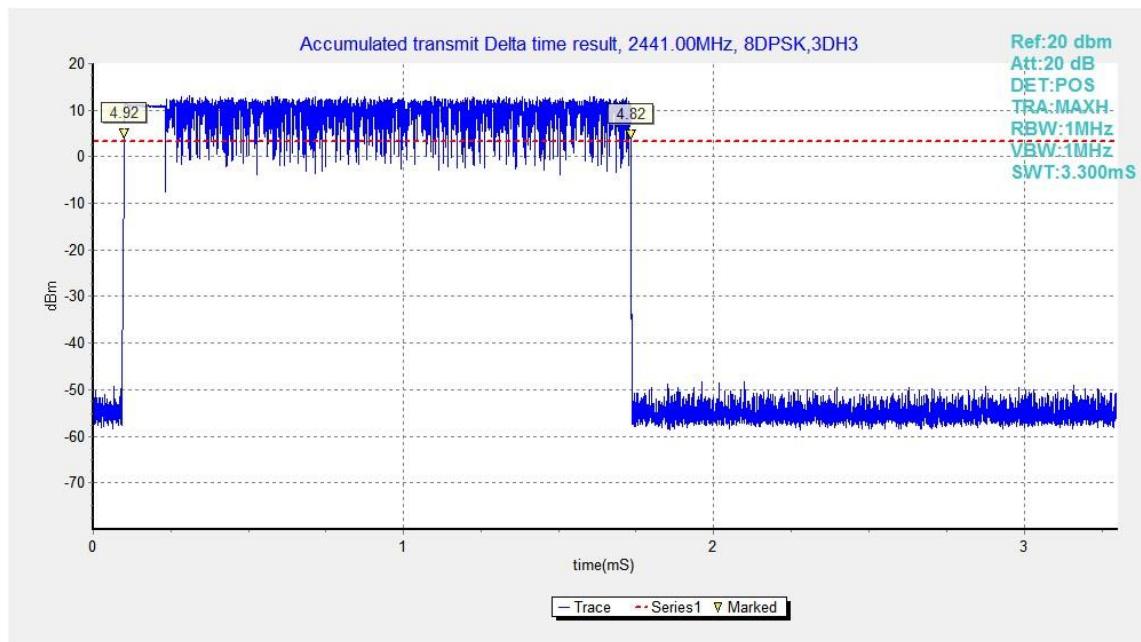


Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

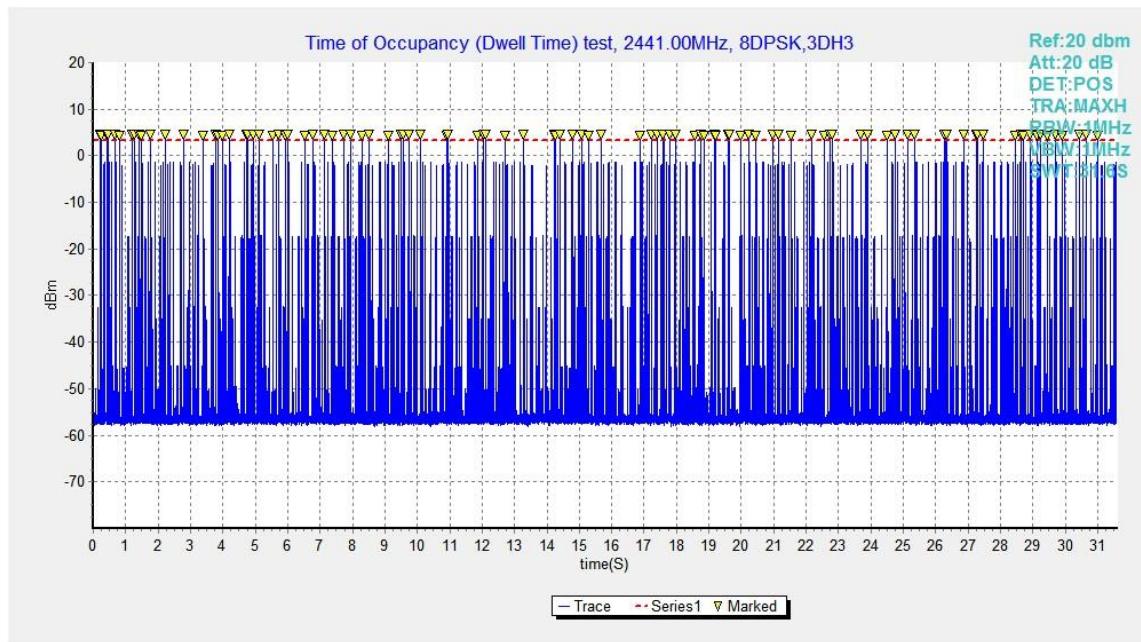


Fig.79. Number of Transmissions Measurement:Channel 39,Packet 3-DH3

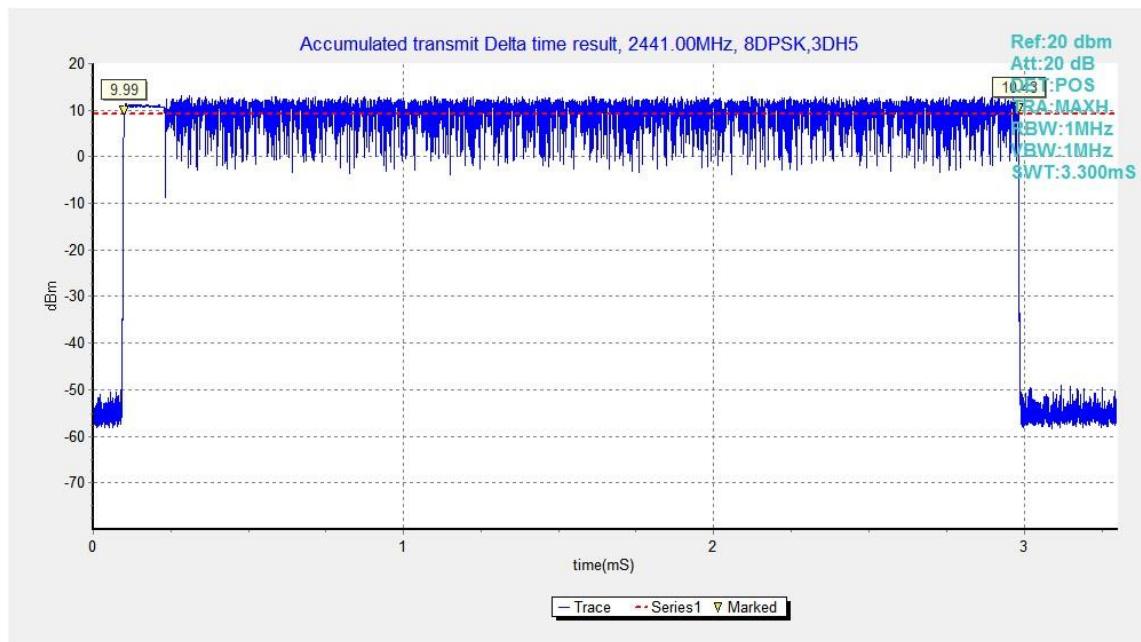


Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

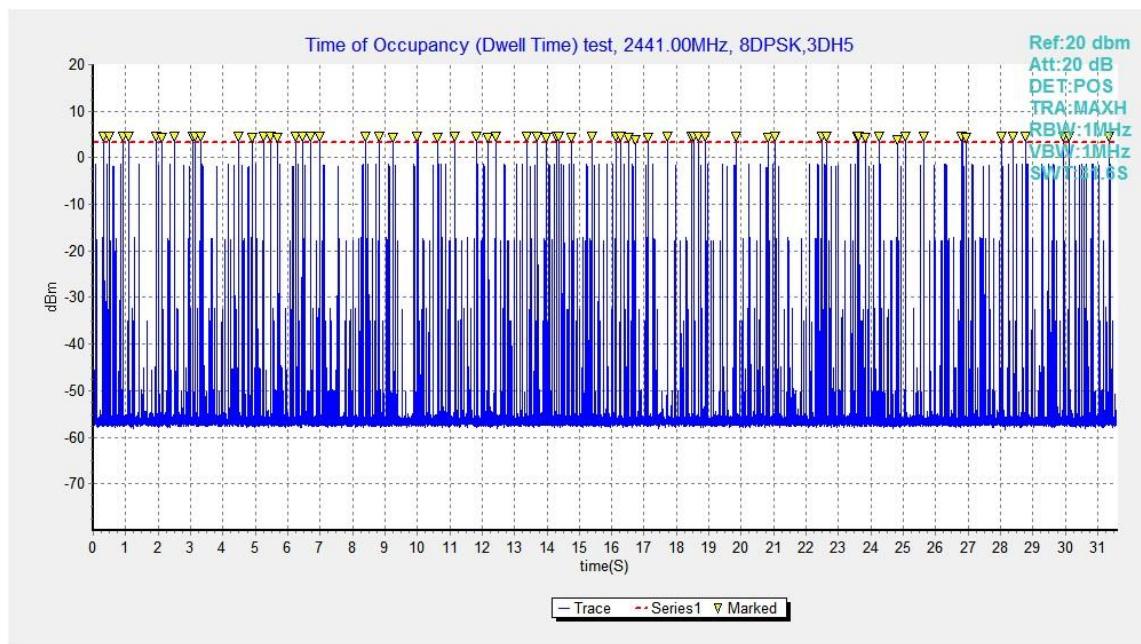


Fig.81. Number of Transmissions Measurement:Channel 39,Packet 3-DH5

B.7. 20dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA *

Use NdB Down function of the SA to measure the 20dB Bandwidth

* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	942.75	NA
39	Fig.83	936.75	NA
78	Fig.84	939.75	NA

For π/4 DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1311.75	NA
39	Fig.86	1309.50	NA
78	Fig.87	1307.25	NA

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1285.50	NA
39	Fig.89	1287.75	NA
78	Fig.90	1299.75	NA

Conclusion: NA

Test graphs as below:

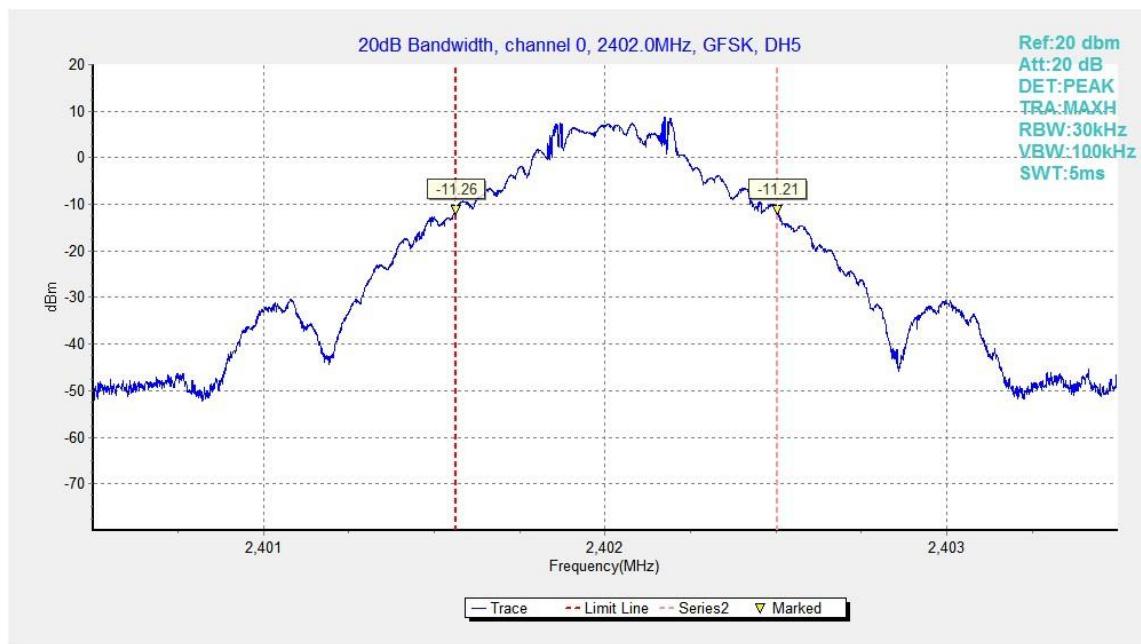


Fig.82. 20dB Bandwidth: GFSK, Channel 0

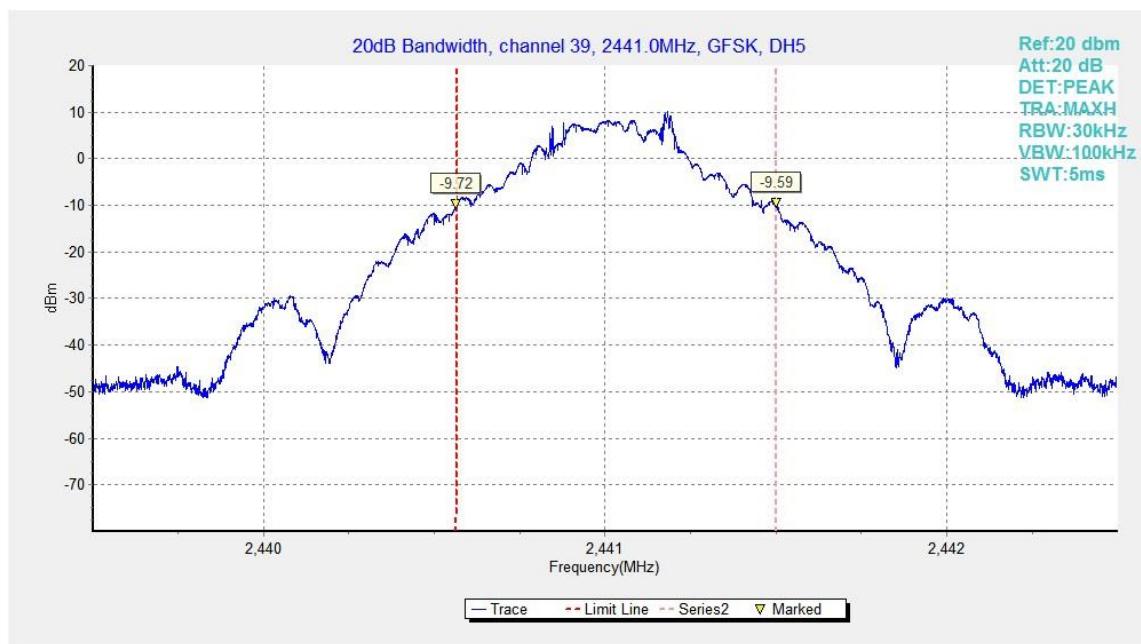


Fig.83. 20dB Bandwidth: GFSK, Channel 39

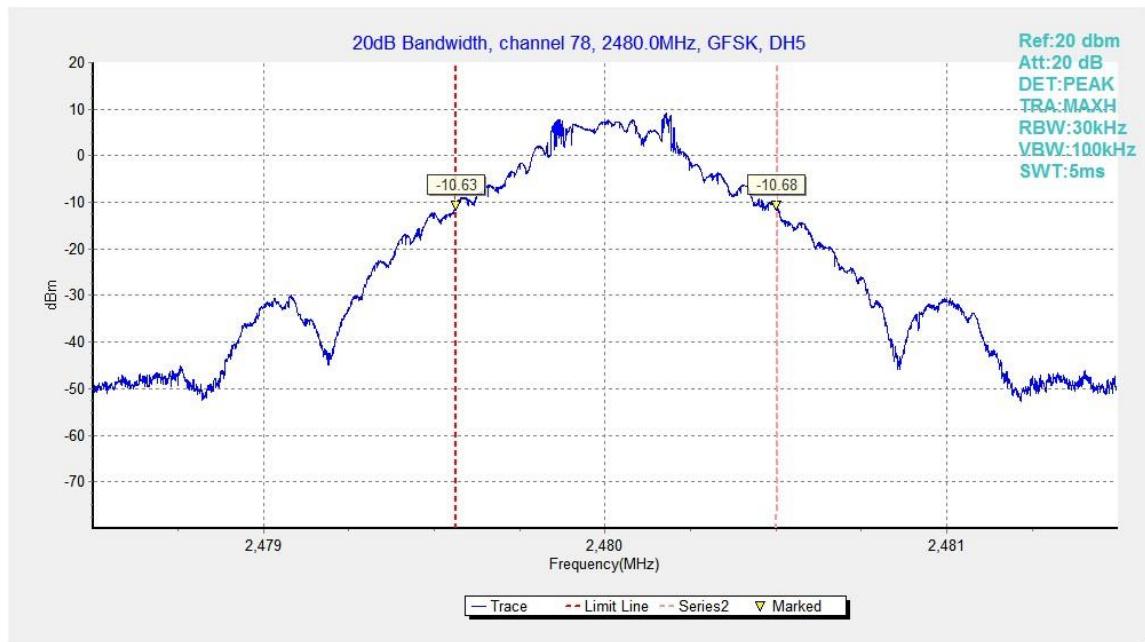


Fig.84. 20dB Bandwidth: GFSK, Channel 78

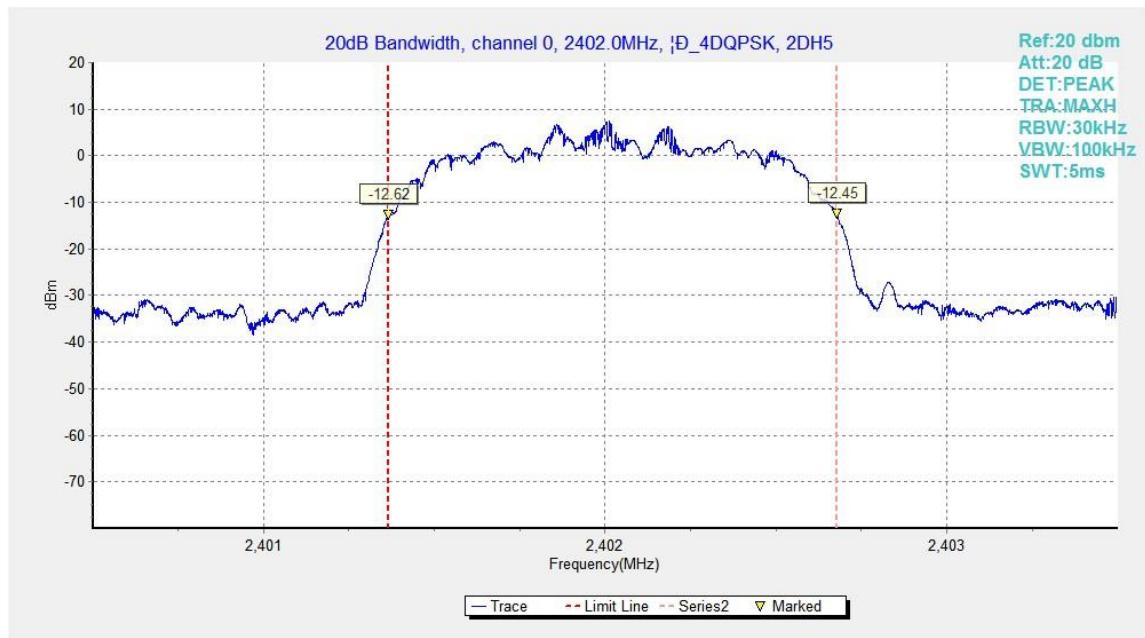


Fig.85. 20dB Bandwidth: π/4 DQPSK, Channel 0

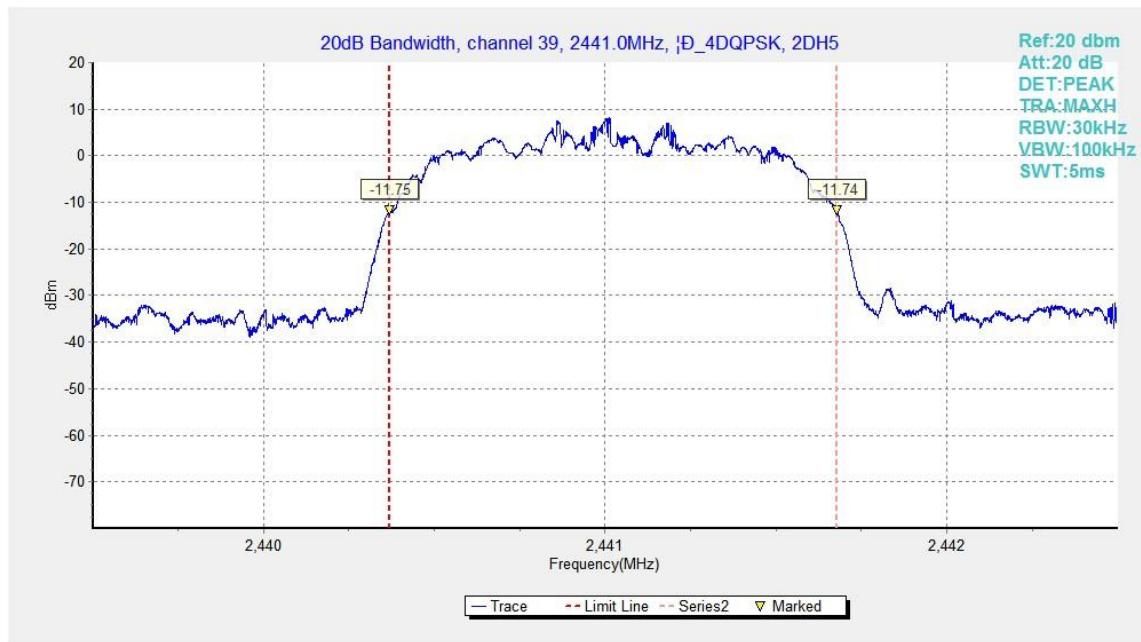


Fig.86. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 39

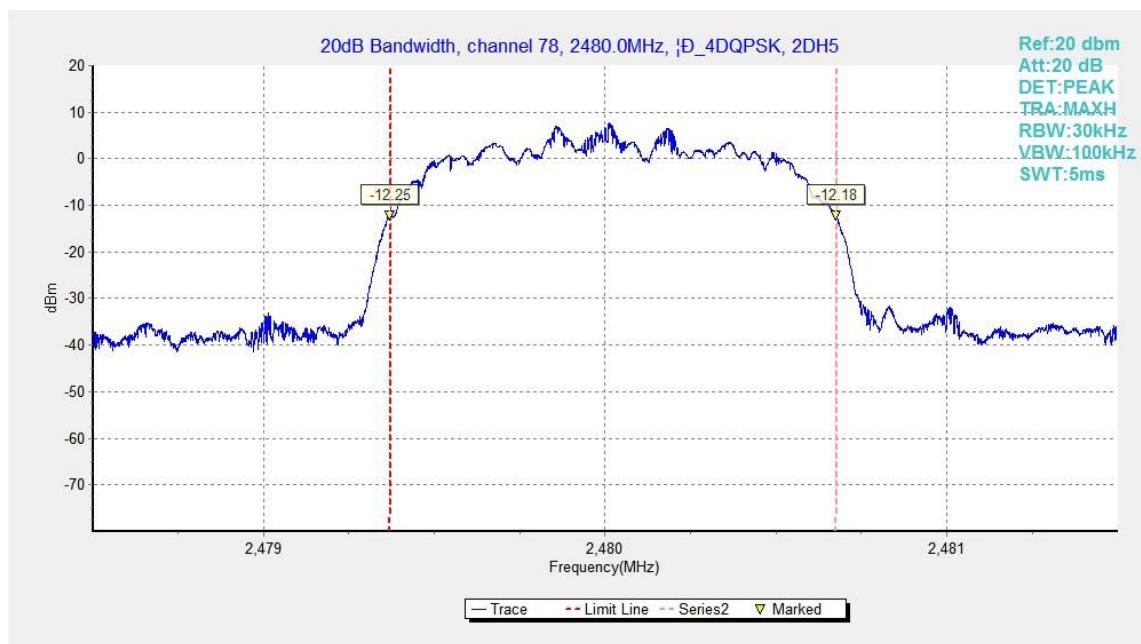


Fig.87. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 78

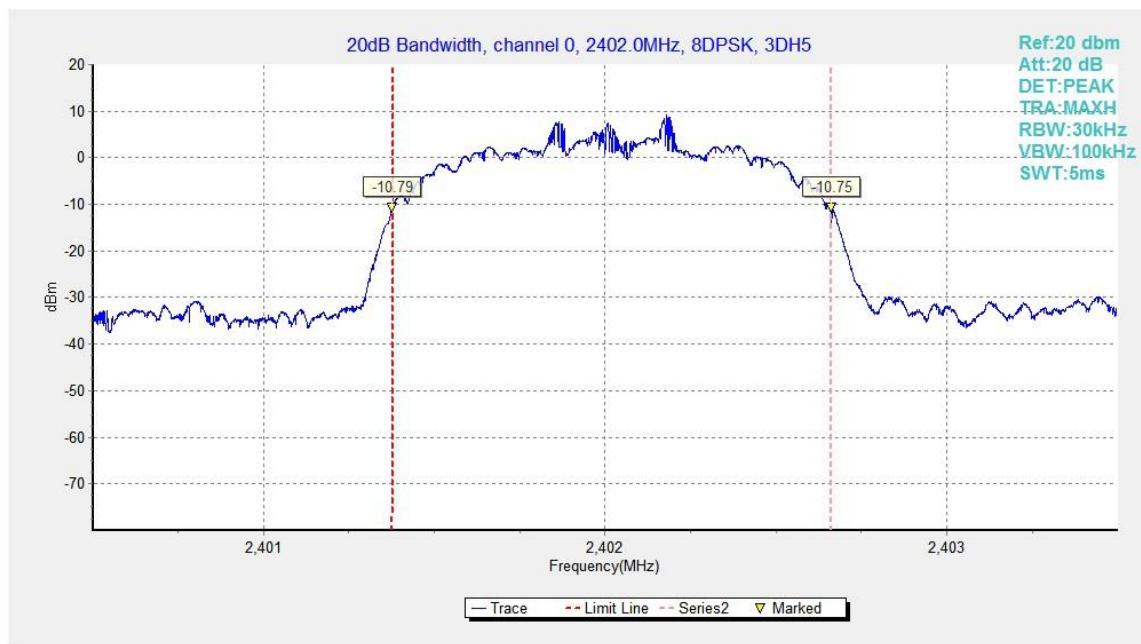


Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

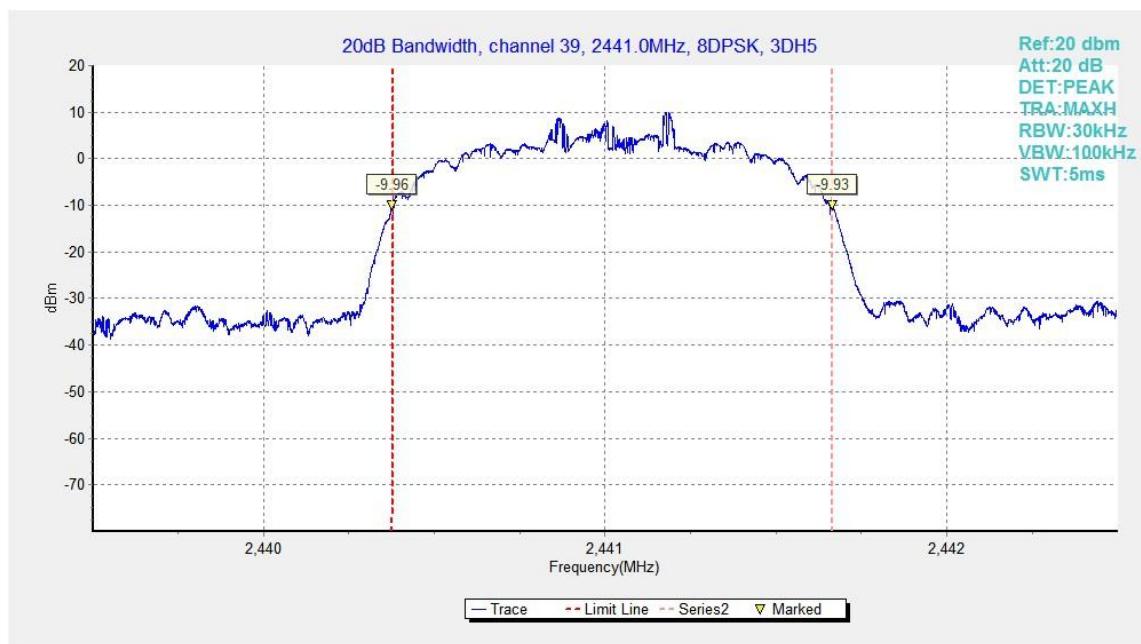


Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

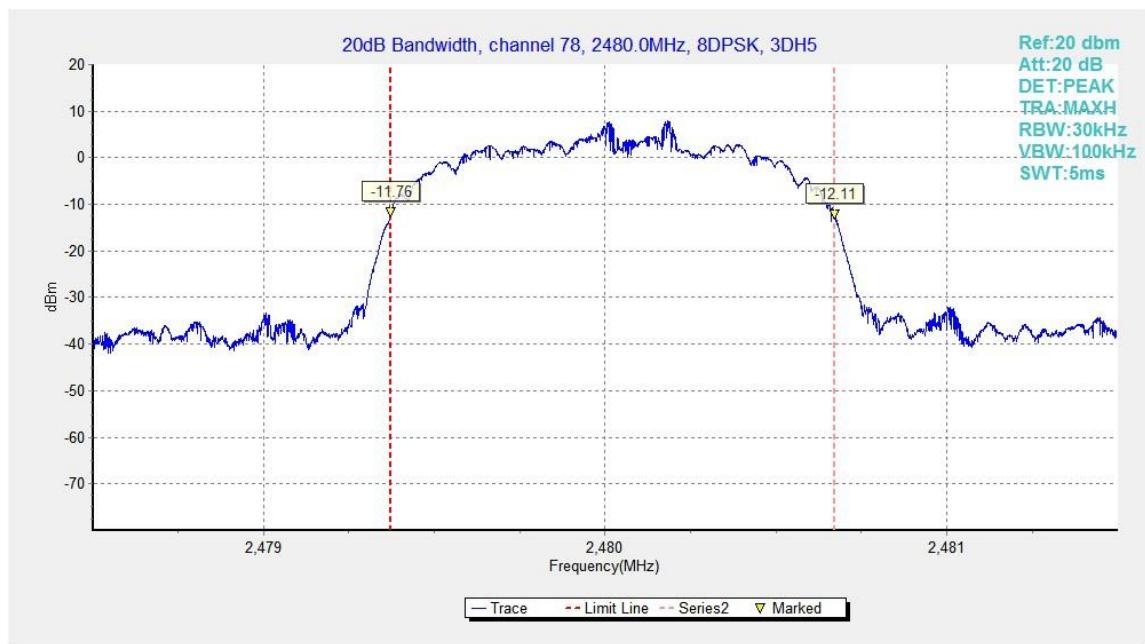


Fig.90. 20dB Bandwidth: 8DPSK, Channel 78

B.8. Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

* Comment: This limit should be over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth, whichever is greater.

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.91	987.75	P

For $\pi/4$ DQPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.92	1248.00	P

For 8DPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.93	968.25	P

Conclusion: PASS

Test graphs as below:

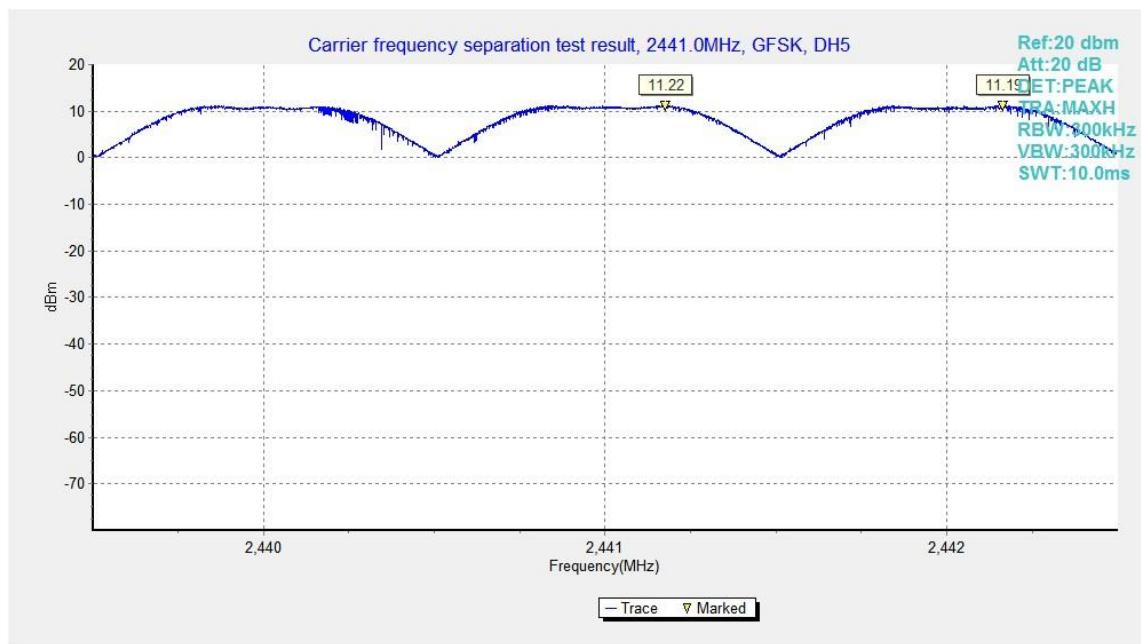


Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

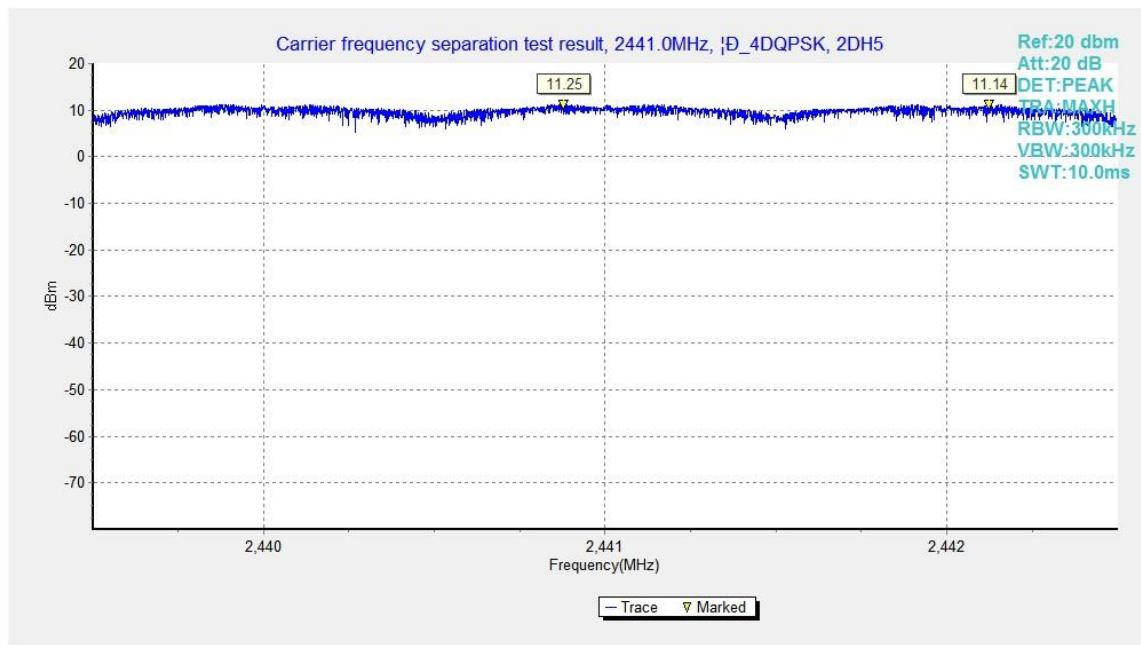


Fig.92. Carrier frequency separation measurement: $\pi/4$ DQPSK, Channel 39

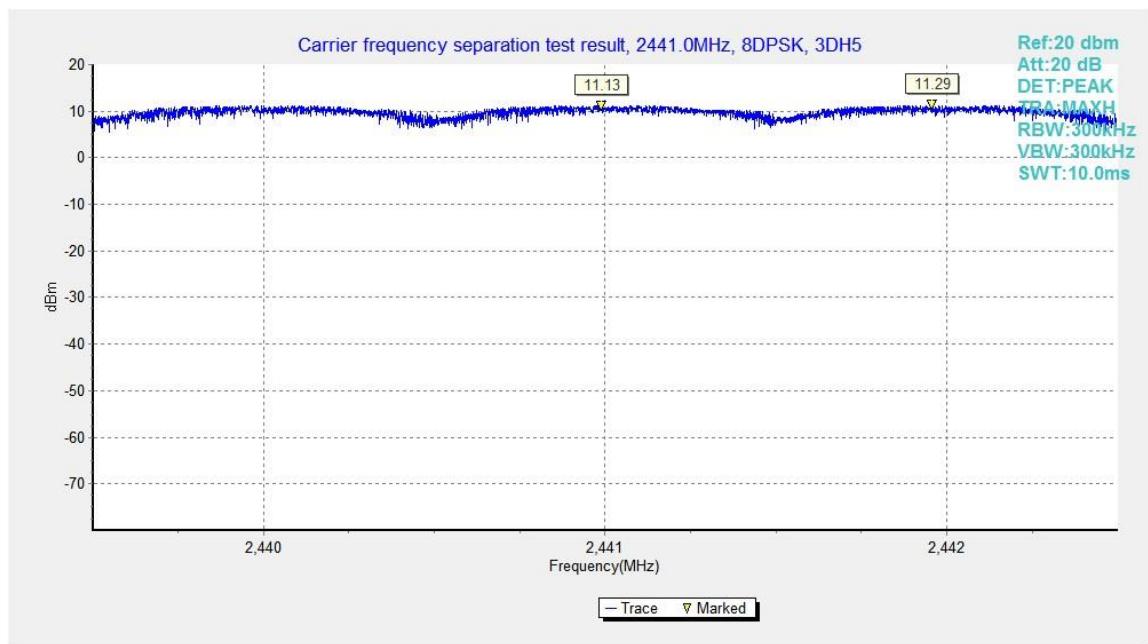


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

B.9. Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

Measurement Result:

For GFSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.94	
40~78	Fig.95	P

For π/4 DQPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.96	
40~78	Fig.97	P

For 8DPSK

Channel	Number of hopping channels	Conclusion
0~39	Fig.98	
40~78	Fig.99	P

Conclusion: PASS

Test graphs as below:

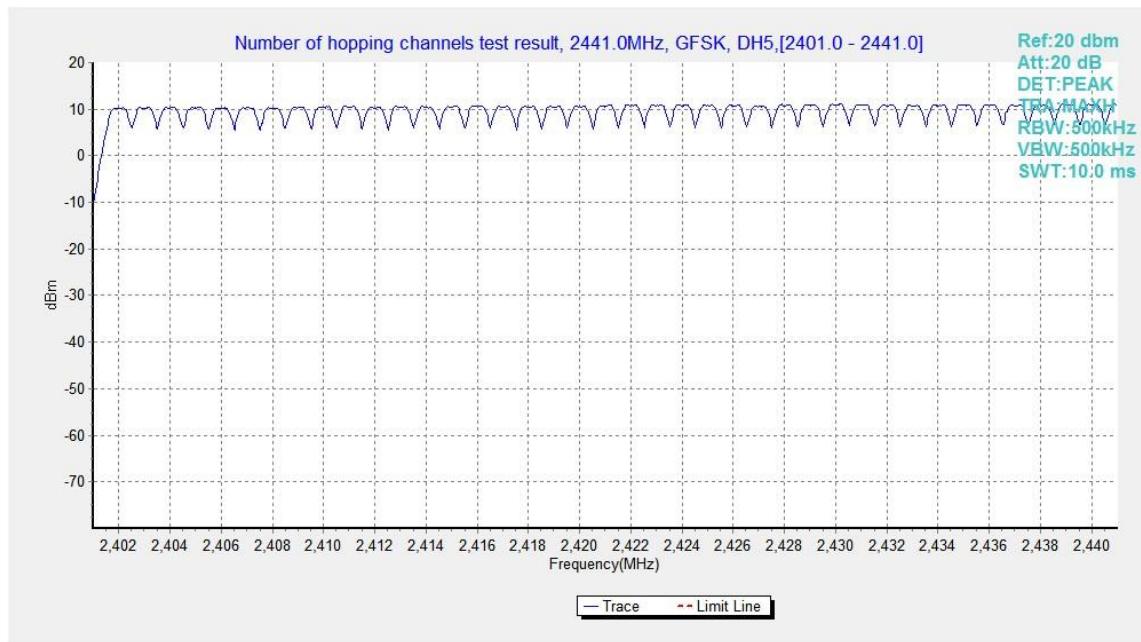


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

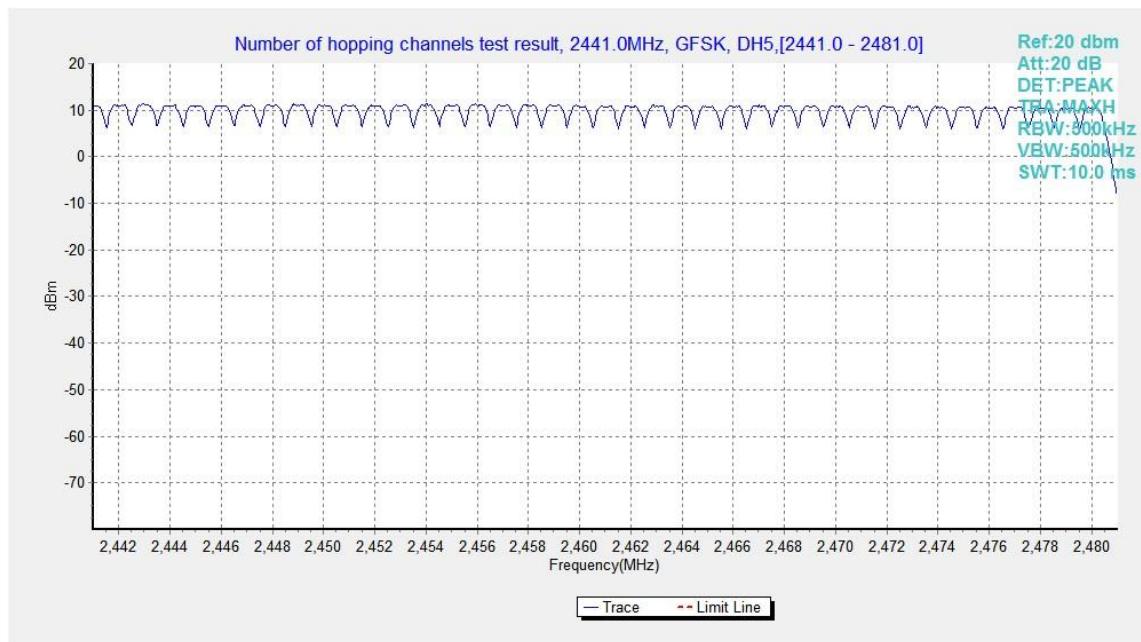


Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

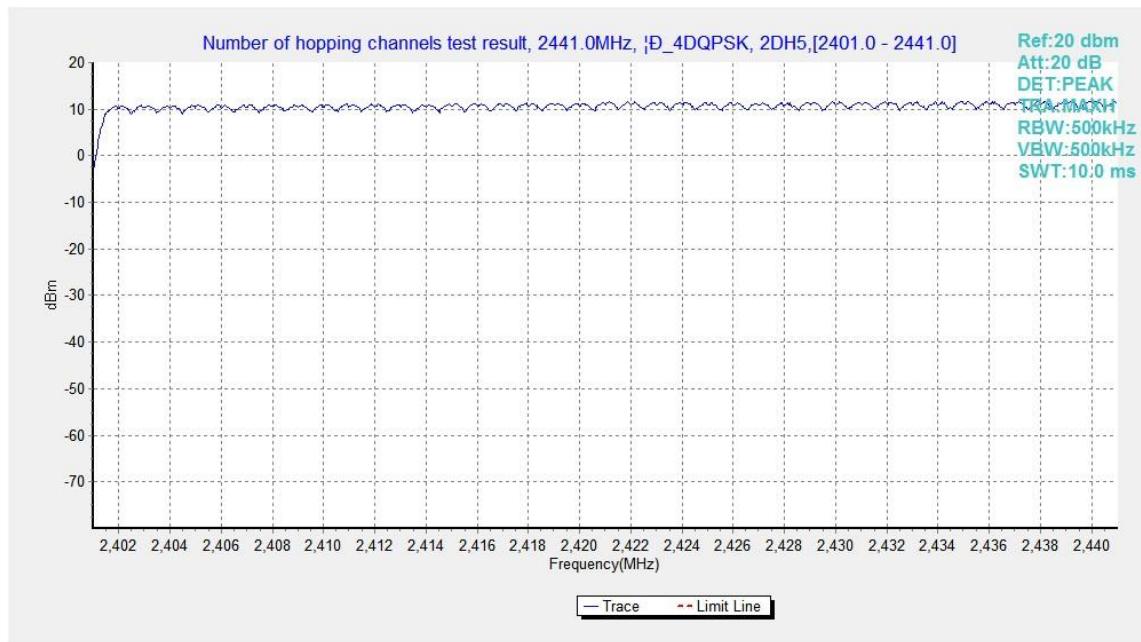


Fig.96. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 0 - 39

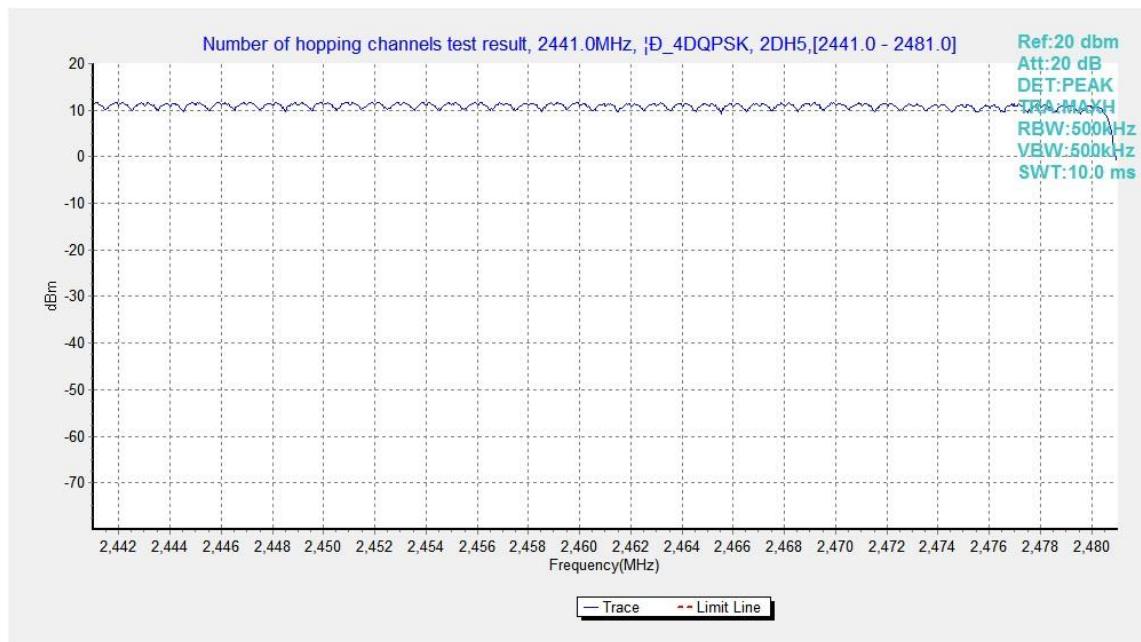


Fig.97. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 40 - 78

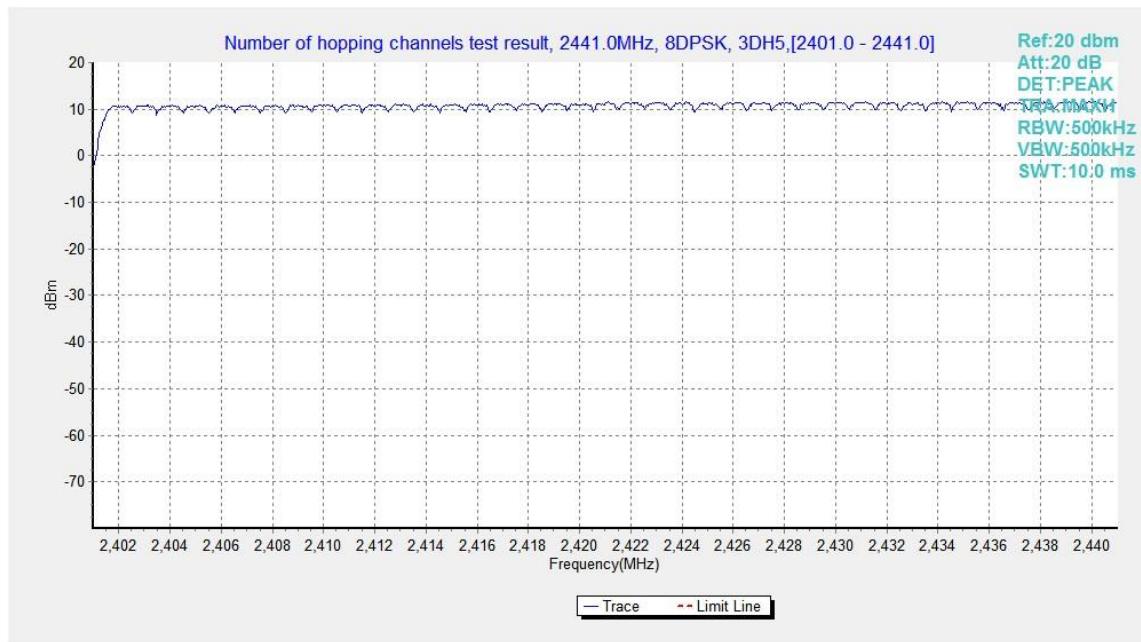


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

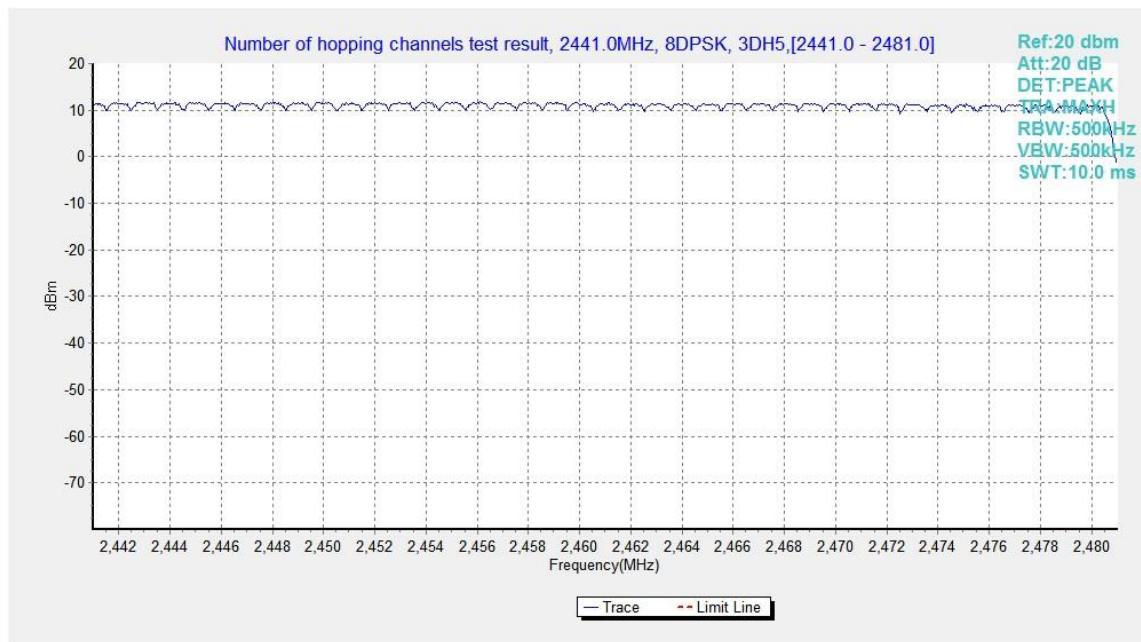


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

B.10. AC Powerline Conducted Emission

Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

Method of Measurement:

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:Quasi-Peak / Average Detector.

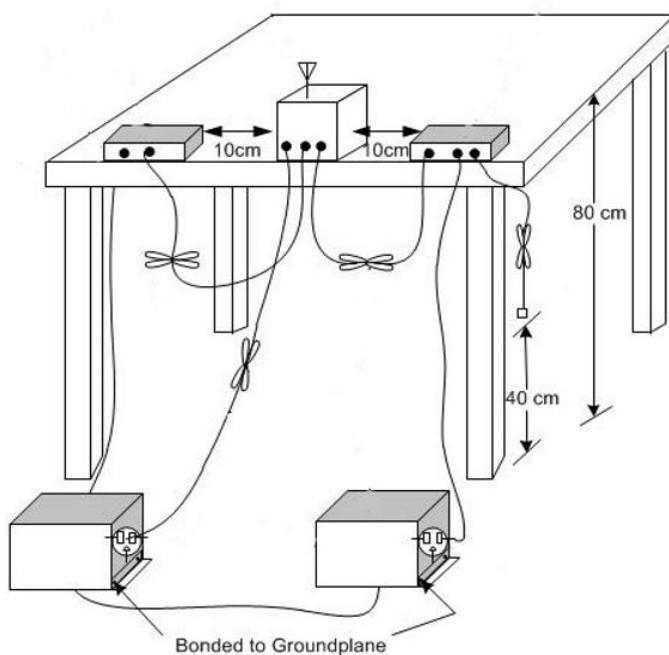
The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Test setup



Measurement Result and limit:

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	66 to 56	Fig.B.10.1	Fig.B.10.2	P	
0.5 to 5	56				
5 to 30	60				

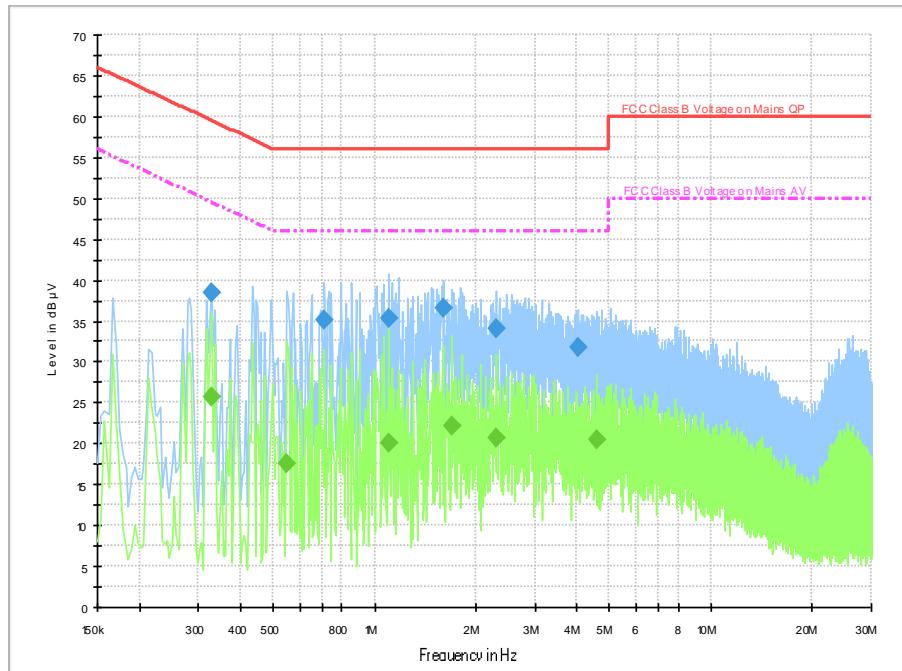
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	56 to 46	Fig.B.10.1	Fig.B.10.2	P	
0.5 to 5	46				
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass
Test graphs as below:


Fig.B.10.1 AC Powerline Conducted Emission-bluetooth

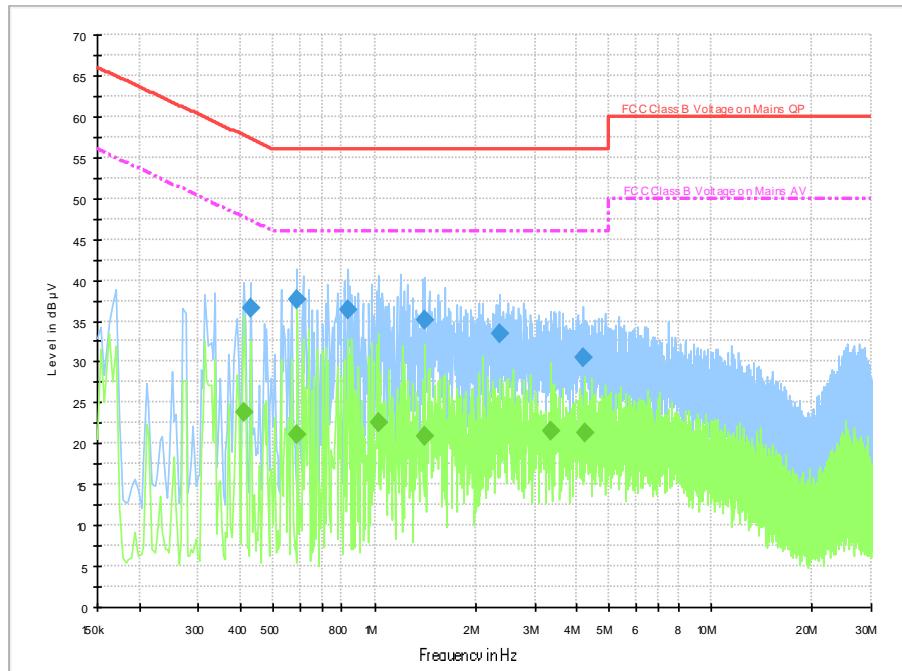
Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.326000	38.4	2000.0	9.000	On	L1	19.9	21.1	59.6	
0.710000	35.0	2000.0	9.000	On	L1	20.0	21.0	56.0	
1.098000	35.3	2000.0	9.000	On	L1	19.9	20.7	56.0	
1.606000	36.5	2000.0	9.000	On	L1	19.8	19.5	56.0	
2.298000	34.1	2000.0	9.000	On	L1	19.8	21.9	56.0	
4.034000	31.8	2000.0	9.000	On	L1	19.8	24.2	56.0	

Final Result 2

Frequency (MHz)	CAverage(dBμV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.326000	25.8	2000.0	9.000	On	L1	19.9	23.8	49.6	
0.550000	17.5	2000.0	9.000	On	L1	20.0	28.5	46.0	
1.098000	20.1	2000.0	9.000	On	L1	19.9	25.9	46.0	
1.690000	22.1	2000.0	9.000	On	L1	19.8	23.9	46.0	
2.298000	20.7	2000.0	9.000	On	L1	19.8	25.3	46.0	
4.566000	20.5	2000.0	9.000	On	L1	19.8	25.5	46.0	


Fig.B.10.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.430000	36.6	2000.0	9.000	On	N	19.9	20.6	57.3	
0.590000	37.5	2000.0	9.000	On	L1	20.0	18.5	56.0	
0.838000	36.3	2000.0	9.000	On	L1	19.9	19.7	56.0	
1.406000	35.2	2000.0	9.000	On	L1	19.9	20.8	56.0	
2.362000	33.4	2000.0	9.000	On	L1	19.8	22.6	56.0	
4.154000	30.5	2000.0	9.000	On	L1	19.8	25.5	56.0	

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.410000	23.9	2000.0	9.000	On	L1	20.0	23.8	47.6	
0.590000	21.0	2000.0	9.000	On	L1	20.0	25.0	46.0	
1.030000	22.6	2000.0	9.000	On	L1	19.9	23.4	46.0	
1.406000	20.9	2000.0	9.000	On	L1	19.9	25.1	46.0	
3.358000	21.6	2000.0	9.000	On	L1	19.8	24.4	46.0	
4.214000	21.4	2000.0	9.000	On	L1	19.8	24.6	46.0	

B.11. Antenna Requirement

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

ANNEX C: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

TELECOMMUNICATION TECHNOLOGY LABS, CAICT

Beijing, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 23rd day of July 2024.



Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 7049.01
Valid to July 31, 2026

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****END OF REPORT*****