

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1803-0065(1)

2. Customer

- Name (FCC) : POINTMOBILE CO., LTD. / Name (IC) : POINTMOBILE CO., LTD
- Address (FCC) : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709
Address (IC) : B-9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu Seoul Korea (Republic Of)

3. Use of Report : FCC & IC Original Grant

4. Product Name / Model Name : Mobile Computer / PM550

FCC ID : V2X-PM550 / IC : 10664A-PM550

5. Test Method Used : KDB 789033 D02v02r01

Test Specification : FCC Part 15.407 Subpart E

RSS-247 Issue 2 (2017-02), RSS-GEN Issue 4 (2014-11)

6. Date of Test : 2018.02.14 ~ 2018.04.05

7. Testing Environment : See appended test report.

8. Test Result : Refer to the attached test result.

Affirmation	Tested by Name : JaeHyeok Bang		Reviewed by Name : GeunKi Son	
-------------	-----------------------------------	---	----------------------------------	---

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2018 . 04 . 26 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRTFCC1803-0065	Mar. 16, 2018	Initial issue
DRTFCC1803-0065(1)	Apr. 26, 2018	Updated the list of test equipment(add the passive device) and retested the radiated emission.

CONTENTS

1. EUT DESCRIPTION	4
2. Information about test items.....	5
2.1 Transmitting configuration of EUT	5
2.2 Tested Channel Information	5
2.3 Testing Environment	5
2.4 EMI Suppression Device(s)/Modifications.....	5
2.5 Measurement Uncertainty	6
3. SUMMARY OF TESTS.....	7
4. TEST METHODOLOGY	8
4.1 EUT configuration.....	8
4.2 EUT exercise.....	8
4.3 General test procedures.....	8
4.4 Description of test modes.....	8
5. INSTRUMENT CALIBRATION	9
6. FACILITIES AND ACCREDITATIONS	9
6.1 Facilities	9
6.2 Equipment	9
7. ANTENNA REQUIREMENTS	9
8. TEST RESULT	10
8.1 Emission Bandwidth (26 dB Bandwidth)	10
8.2 Minimum Emission Bandwidth (6 dB Bandwidth).....	25
8.3 Maximum Conducted Output Power	31
8.4 Maximum Power Spectral Density	34
8.5 Frequency Stability	58
8.6 Radiated Spurious Emission Measurements	60
8.7 AC Conducted Emissions.....	69
8.8 Occupied Bandwidth (99%).....	78
8. LIST OF TEST EQUIPMENT.....	100
APPENDIX I.....	101
APPENDIX II.....	102
APPENDIX III.....	105

1. EUT DESCRIPTION

FCC Equipment Class	Unlicensed National Information Infrastructure (UNII)
Product	Mobile Computer
Model Name	PM550
Add Model Name	XG200
Power Supply	DC 3.63 V
Modulation type	OFDM
Antenna Specification	Antenna type: CARRIER LPS ANTENNA Antenna gain U-NII 1: 1.60 dBi U-NII 2A: 1.31 dBi U-NII 2C: 1.35 dBi U-NII 3: 1.46 dBi

5GHz Band	Mode	Frequency range (MHz)	Max power(dBm)
U-NII 1	802.11a	5180 ~ 5240	15.47
	802.11n(HT20)	5180 ~ 5240	15.47
	802.11n(HT40)	5190 ~ 5230	14.48
U-NII 2A	802.11a	5260 ~ 5320	15.34
	802.11n(HT20)	5260 ~ 5320	15.33
	802.11n(HT40)	5270 ~ 5310	14.94
U-NII 2C	802.11a	5500 ~ 5580, 5660 ~ 5700	15.06
	802.11n(HT20)	5500 ~ 5580, 5660 ~ 5700	15.02
	802.11n(HT40)	5510 ~ 5550, 5670	14.66
U-NII 3	802.11a	5745 ~ 5825	11.72
	802.11n(HT20)	5745 ~ 5825	11.71
	802.11n(HT40)	5755 ~ 5795	11.22

2. Information about test items

2.1 Transmitting configuration of EUT

Mode	Data rate
802.11a	6~54Mbps
802.11n(HT20)	MCS 0 ~ 7
802.11n(HT40)	MCS 0 ~ 7

2.2 Tested Channel Information

5GHz Band	802.11a/n(HT20)		802.11n(HT40)	
	Channel	Frequency [MHz]	Channel	Frequency [MHz]
U-NII 1	36	5180	38	5190
	40	5200	-	-
	48	5240	46	5230
U-NII 2A	52	5260	54	5270
	60	5300	-	-
	64	5320	62	5310
U-NII 2C	100	5500	102	5510
	116	5580	110	5550
	140	5700	134	5670
U-NII 3	149	5745	151	5755
	157	5785	-	-
	165	5825	159	5795

2.3 Testing Environment

Temperature	: 21 °C ~ 24 °C
Relative humidity content	: 40 % ~ 45 % R.H.
Details of power supply	: DC 3.63 V

2.4 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing
→ None

2.5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014 and ANSI C 63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Test items	Measurement uncertainty
Transmitter Output Power	± 1.3 dB (The confidence level is about 95 %, $k = 2$)
AC conducted emission	± 2.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated spurious emission (1 GHz Below)	± 5.1 dB (The confidence level is about 95 %, $k = 2$)
Radiated spurious emission (1 GHz ~ 18 GHz)	± 5.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated spurious emission (18 GHz Above)	± 5.3 dB (The confidence level is about 95 %, $k = 2$)

3. SUMMARY OF TESTS

FCC Part Section(s)	RSS Section(s)	Parameter	Limit	Test Condition	Status Note 1
I. Transmitter Mode (TX)					
15.407(a)	-	Emission Bandwidth (26 dB Bandwidth)	N/A	Conducted	C
15.407(e)	RSS-247[6.2.4]	Minimum Emission Bandwidth (6 dB Bandwidth)	Refer to the section 8.2.		C
15.407(a)	RSS-247[6.2]	Maximum Conducted Output Power	Refer to the section 8.3.		C
15.407(a)	RSS-247[6.2]	Peak Power Spectral Density	Refer to the section 8.4.		C
-	RSS GEN[6.6]	Occupied Bandwidth (99%)	RSS Gen [6.6]		C
15.407(g)	-	Frequency Stability	N/A		C
15.407(b)	RSS-247[6.2]	Undesirable Emissions	Refer to the section 8.6.	Radiated	C Note 2
15.205 15.209 15.407(b)	RSS-247[6.2] RSS-GEN[8.9] RSS-GEN[8.10]	General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	Refer to the section 8.6.		C Note 2
15.407(h)	RSS-247[6.3]	Dynamic Frequency Selection	FCC 15.407(h)	Conducted	C Note 3
15.207	RSS-GEN[8.8]	AC Conducted Emissions	Refer to the section 8.7.	AC Line Conducted	C
15.203	-	Antenna Requirements	FCC 15.203	-	C

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable

Note 2: These test items were performed in each axis and the worst case data was reported.

Note 3: For DFS testing, please refer to DFS test report.

4. TEST METHODOLOGY

Generally the tests were performed according to the **KDB789033 D02v02r01**. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing

4.1 EUT configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT exercise

The EUT was operated in the test mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

4.3 General test procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB789033 D02v02r01. So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10-2013.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB789033 D02v02r01. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10-2013 as stated on KDB789033 D02v02r01.

The EUT is placed on a non-conductive table, which is 0.8 m above ground plane. For emission measurements above 1 GHz, the table height is 1.5 m. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 1 or 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axis.

4.4 Description of test modes

The EUT has been tested with all modes of operating conditions to determine the worst case emission characteristics. A test program is used to control the EUT for staying in continuous transmitting mode with maximum fixed duty cycle.

5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

6. FACILITIES AND ACCREDITATIONS

6.1 Facilities

DT&C Co., Ltd.

The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The site is constructed in conformance with the requirements.

- FCC MRA Accredited Test Firm No. : KR0034

- IC Test site No. : 5740A-4

www.dtnc.net

Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

6.2 Equipment

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, loop, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and peak, quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

7. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The internal antenna is attached on the main PCB using the special spring tension. (Refer to Internal Photo file.) Therefore this E.U.T Complies with the requirement of §15.203

8. TEST RESULT

8.1 Emission Bandwidth (26 dB Bandwidth)

Test Requirements

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The 26 dB bandwidth is used to determine the conducted output power limit.

Test Configuration

Refer to the APPENDIX I.

Test Procedure

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB789033 D02v02r01**.

1. Set resolution bandwidth (RBW) = approximately **1 %** of the EBW.
2. Set the video bandwidth (**VBW**) > **RBW**.
3. Detector = **Peak**.
4. Trace mode = **max hold**.

Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.


TEST RESULTS: **Comply**

Mode	Band	Channel	Frequency [MHz]	Test Result [MHz]
802.11a	U-NII 1	36	5180	21.20
		40	5200	21.95
		48	5240	21.97
	U-NII 2A	52	5260	21.90
		60	5300	21.85
		64	5320	21.79
	U-NII 2C	100	5500	21.31
		116	5580	21.76
		140	5700	21.69
802.11n (HT20)	U-NII 1	36	5180	21.85
		40	5200	21.99
		48	5240	22.09
	U-NII 2A	52	5260	21.99
		60	5300	22.49
		64	5320	21.99
	U-NII 2C	100	5500	21.64
		116	5580	22.48
		140	5700	21.95
802.11n (HT40)	U-NII 1	38	5190	42.49
		46	5230	42.80
	U-NII 2A	54	5270	43.28
		62	5310	42.37
	U-NII 2C	102	5510	42.26
		110	5550	42.81
		134	5670	42.47

Result Plots


26 dB Bandwidth

Test Mode: 802.11a & Ch.36

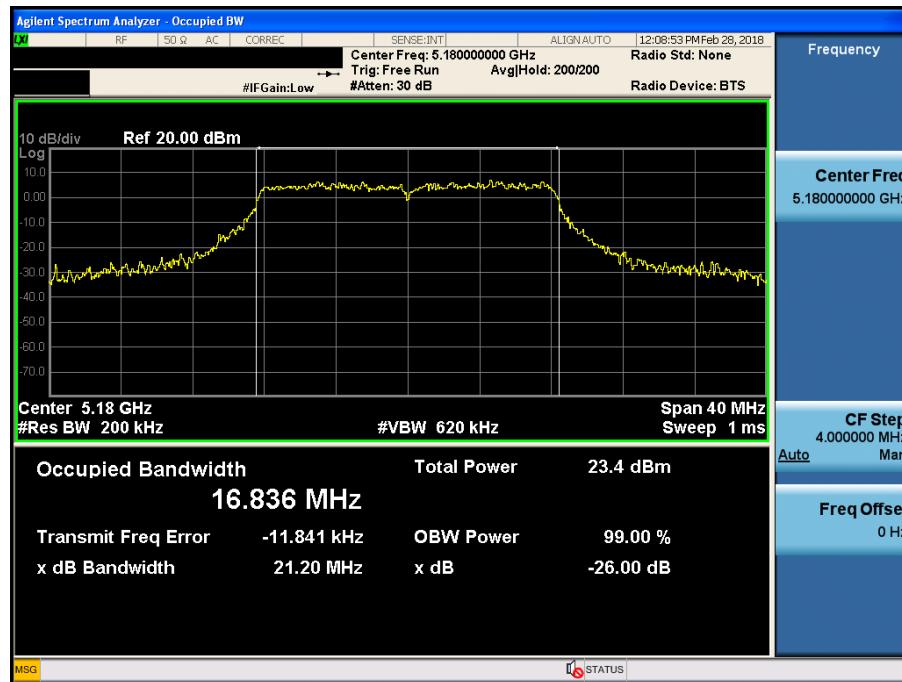


26 dB Bandwidth

Test Mode: 802.11a & Ch.40

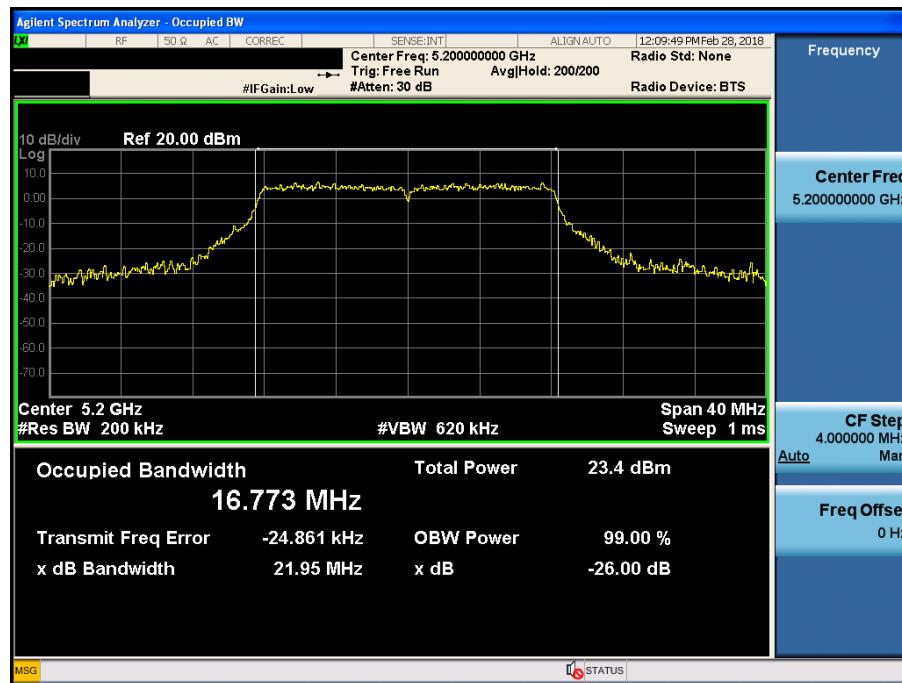


26 dB Bandwidth

Test Mode: 802.11a & Ch.48

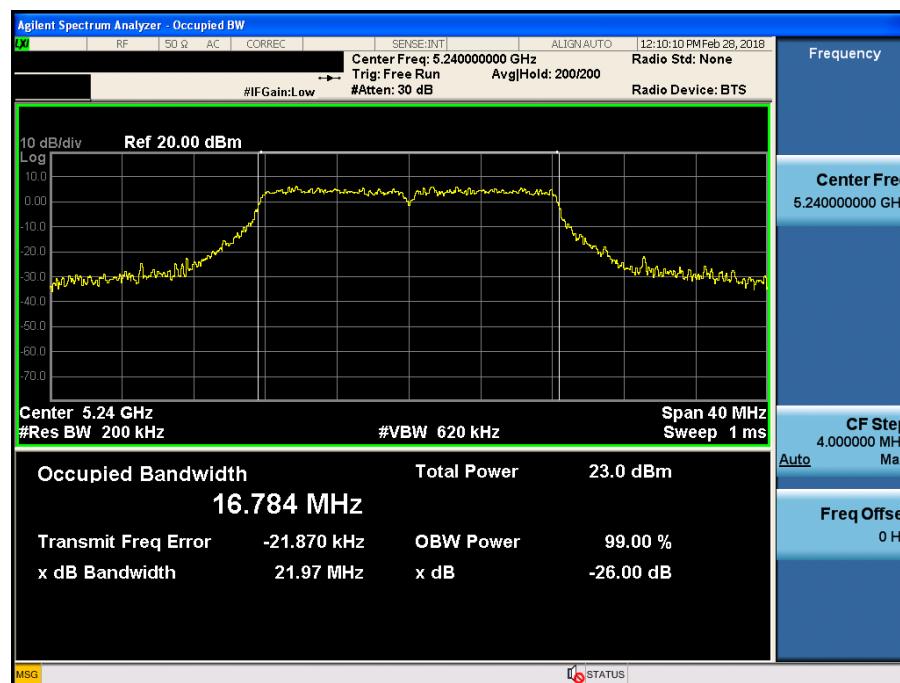


26 dB Bandwidth

Test Mode: 802.11a & Ch.52

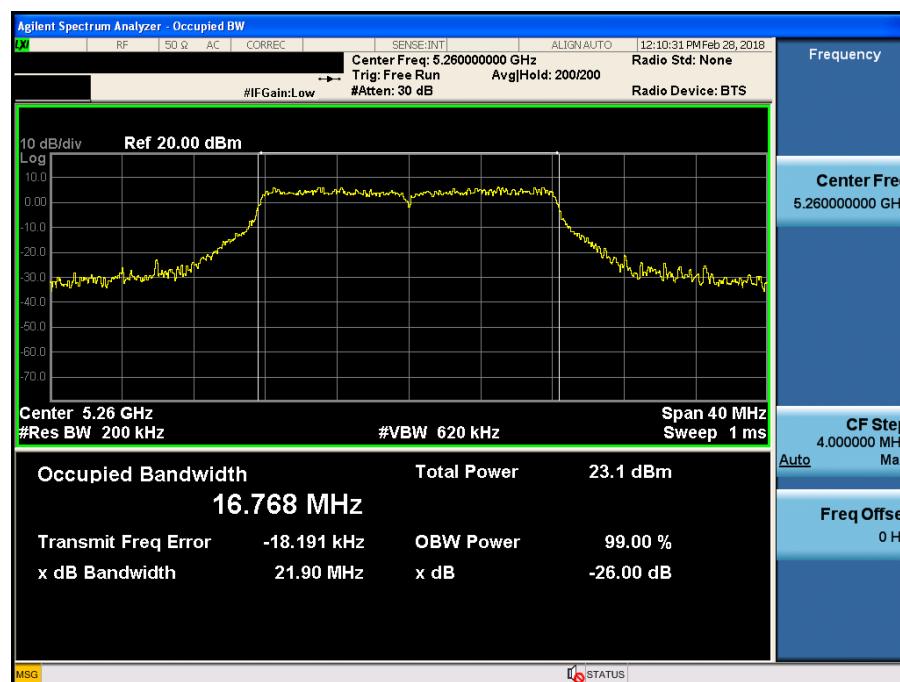


26 dB Bandwidth

Test Mode: 802.11a & Ch.60

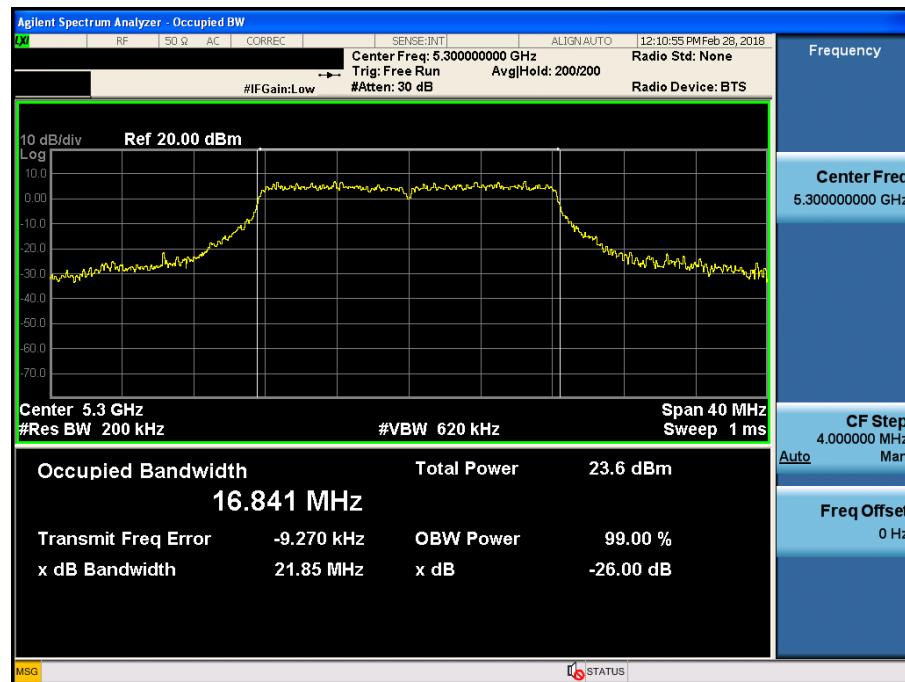


26 dB Bandwidth

Test Mode: 802.11a & Ch.64

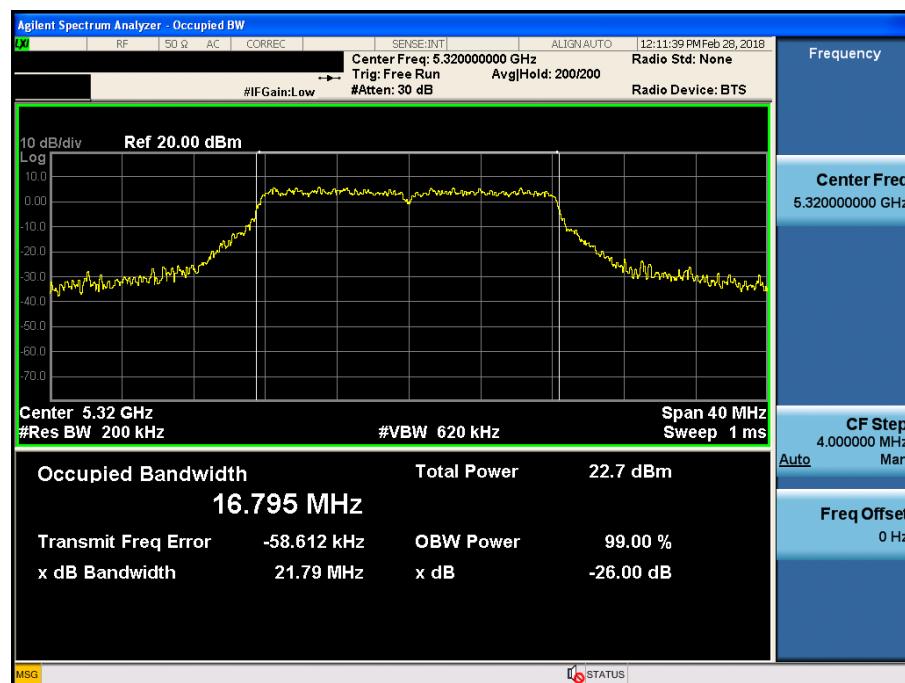

26 dB Bandwidth

Test Mode: 802.11a & Ch.100

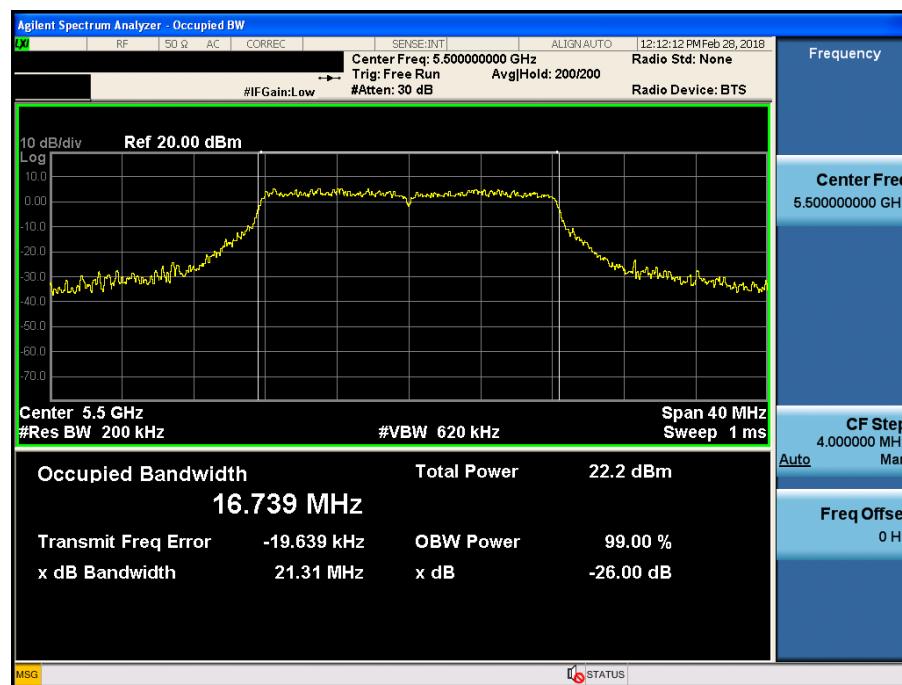

26 dB Bandwidth

Test Mode: 802.11a & Ch.116




26 dB Bandwidth

Test Mode: 802.11a & Ch.140




26 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.36

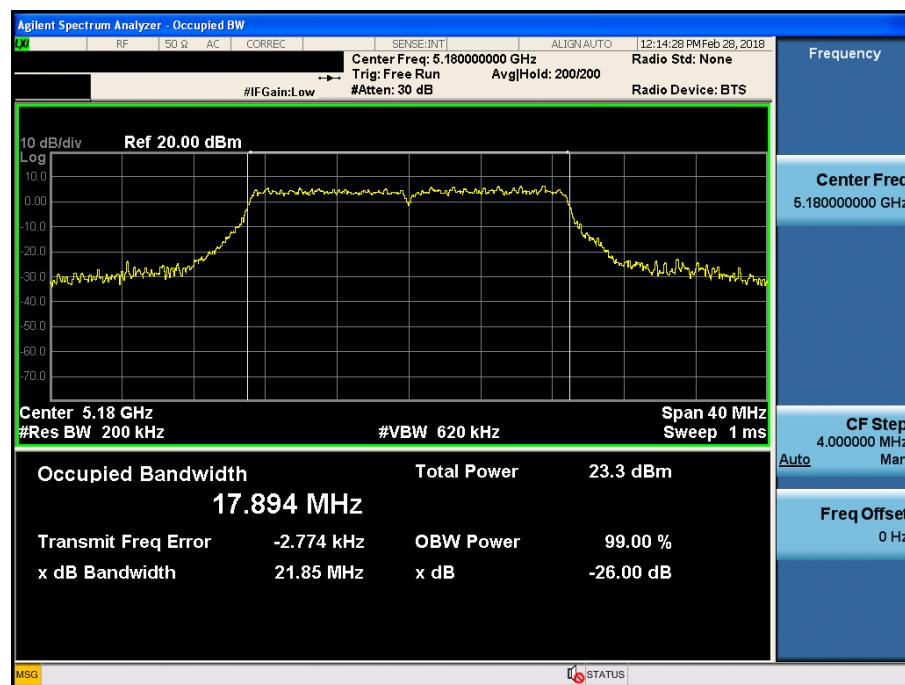


26 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.40

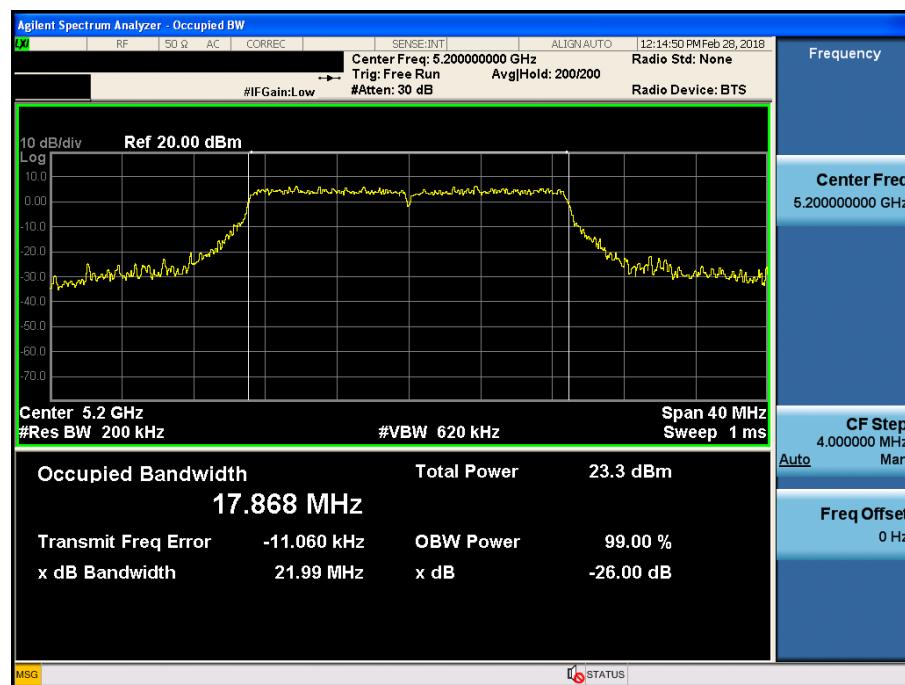


26 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.48

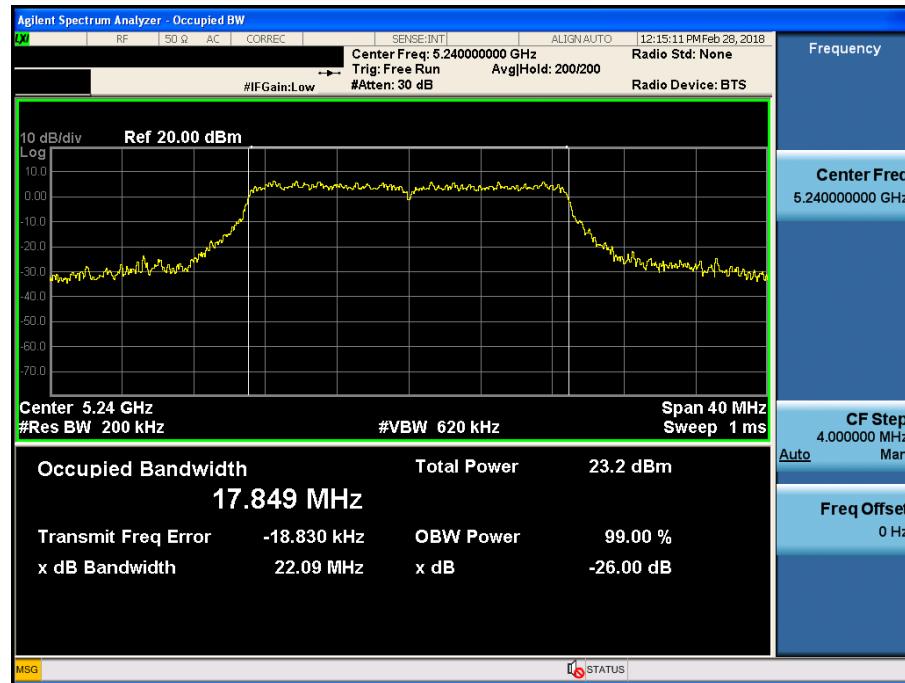


26 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.52

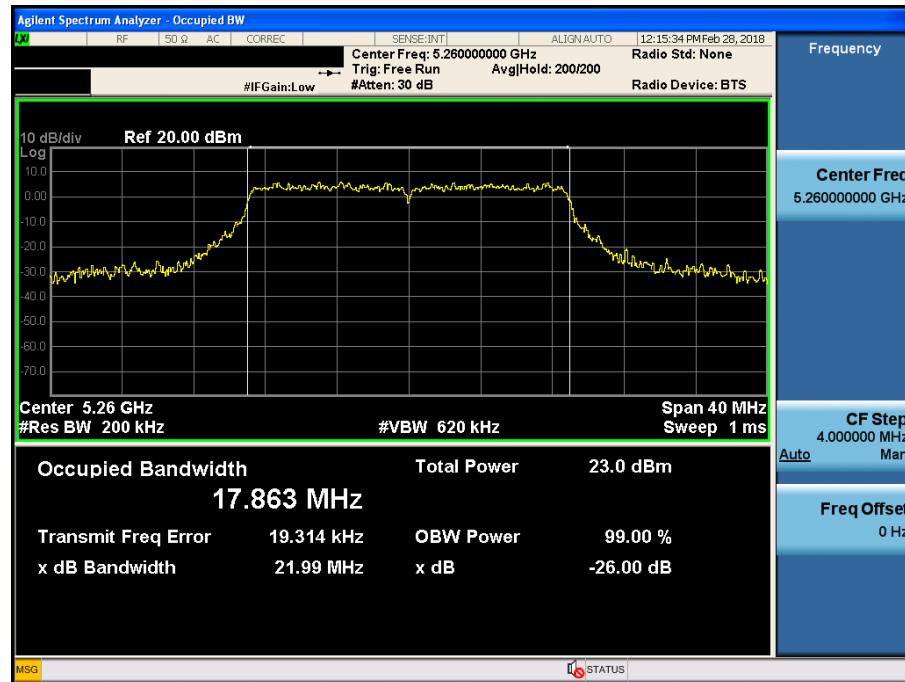


26 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.60

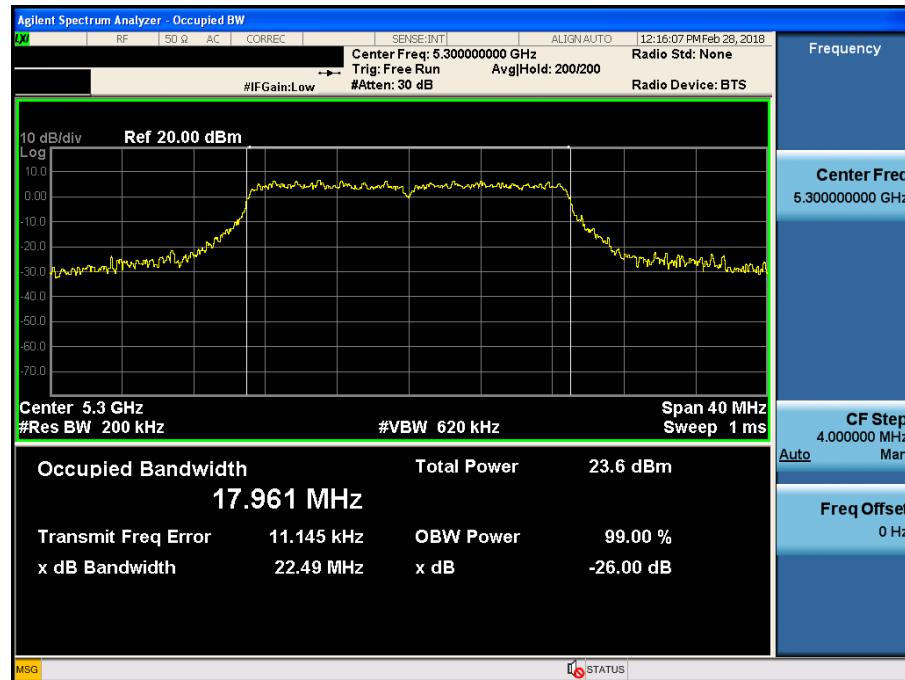


26 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.64

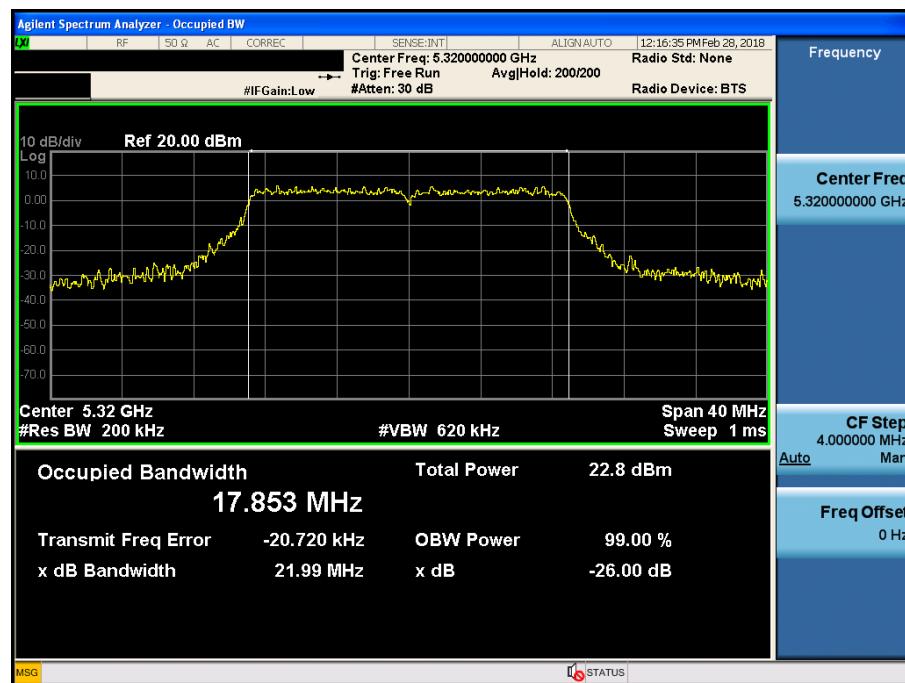


26 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.100

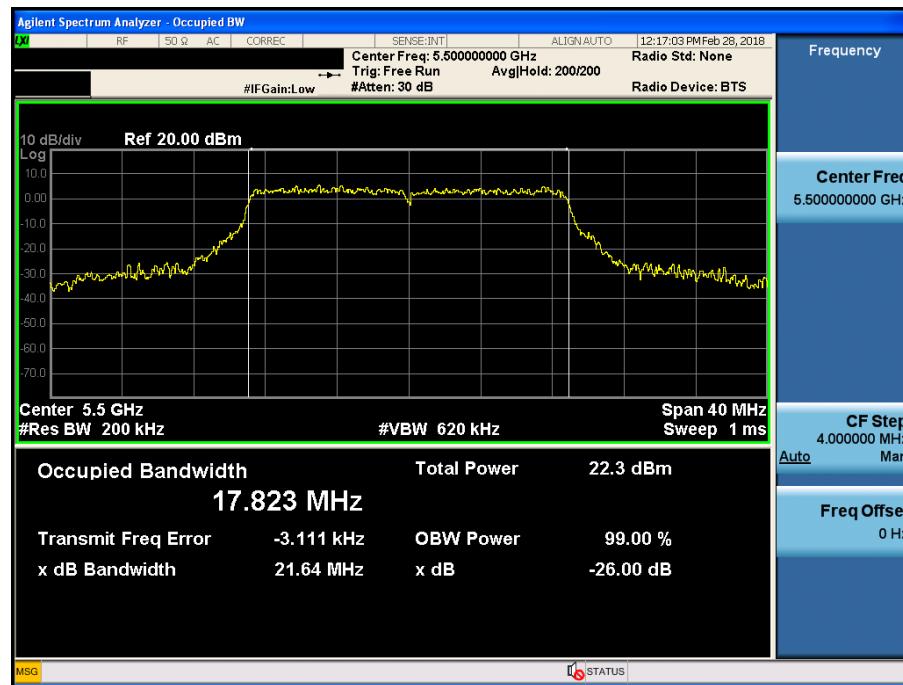


26 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.116

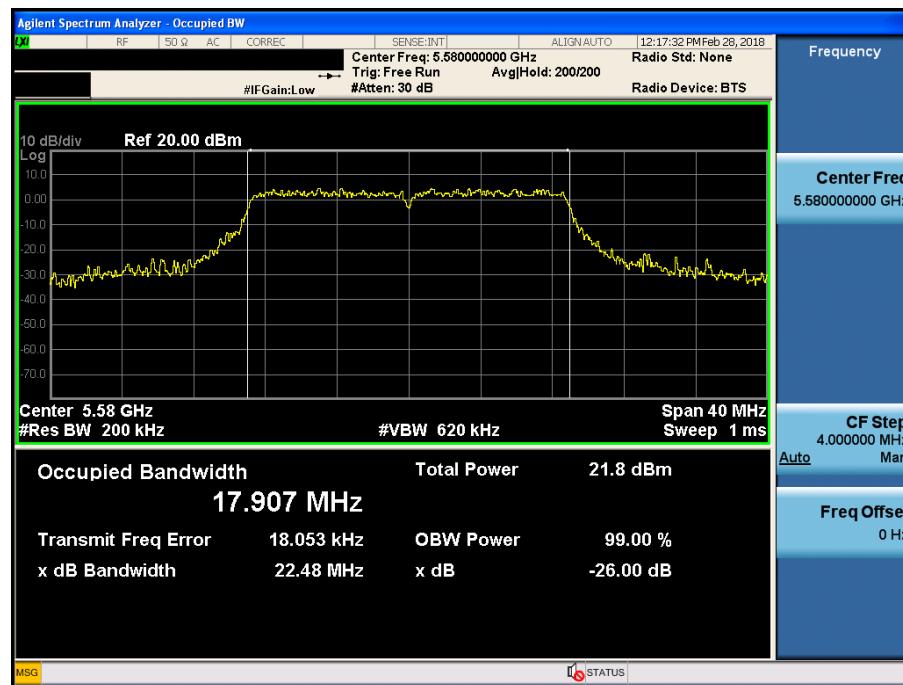


26 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.140

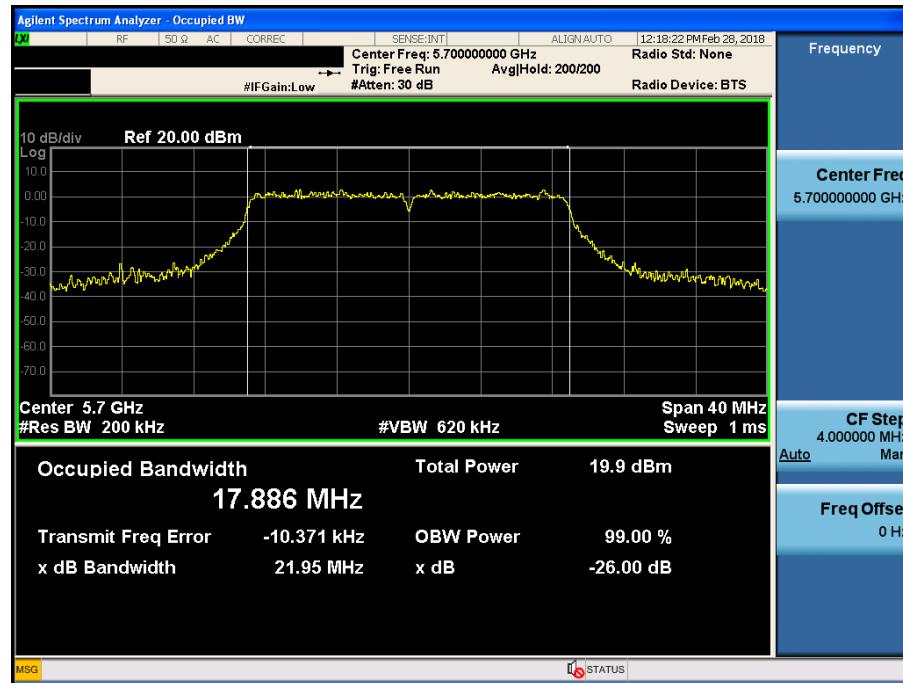


26 dB Bandwidth

Test Mode: 802.11n HT40 & Ch.38

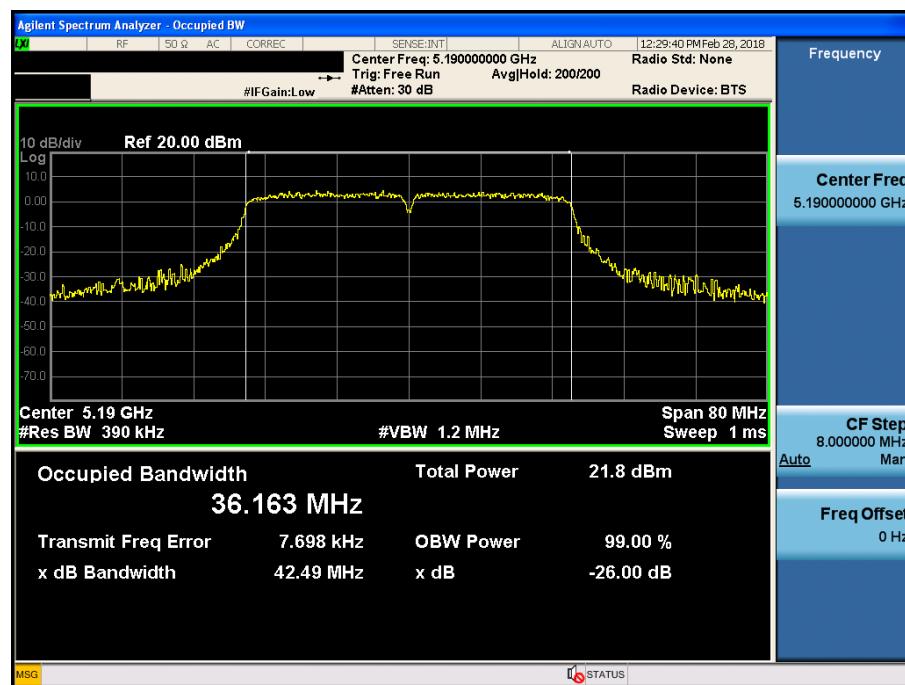


26 dB Bandwidth

Test Mode: 802.11n HT40 & Ch.46

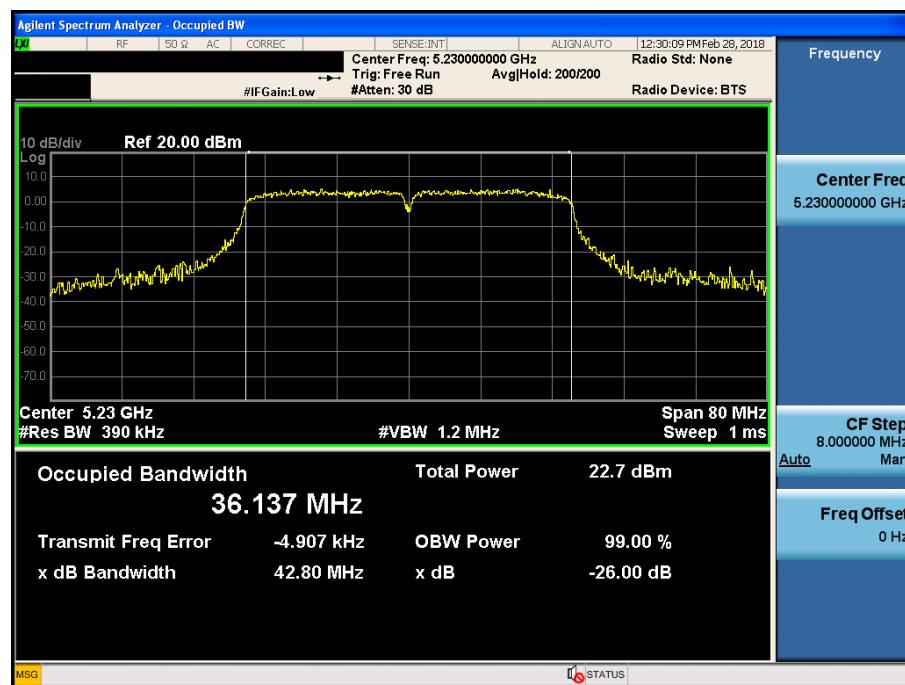


26 dB Bandwidth

Test Mode: 802.11n HT40 & Ch.54

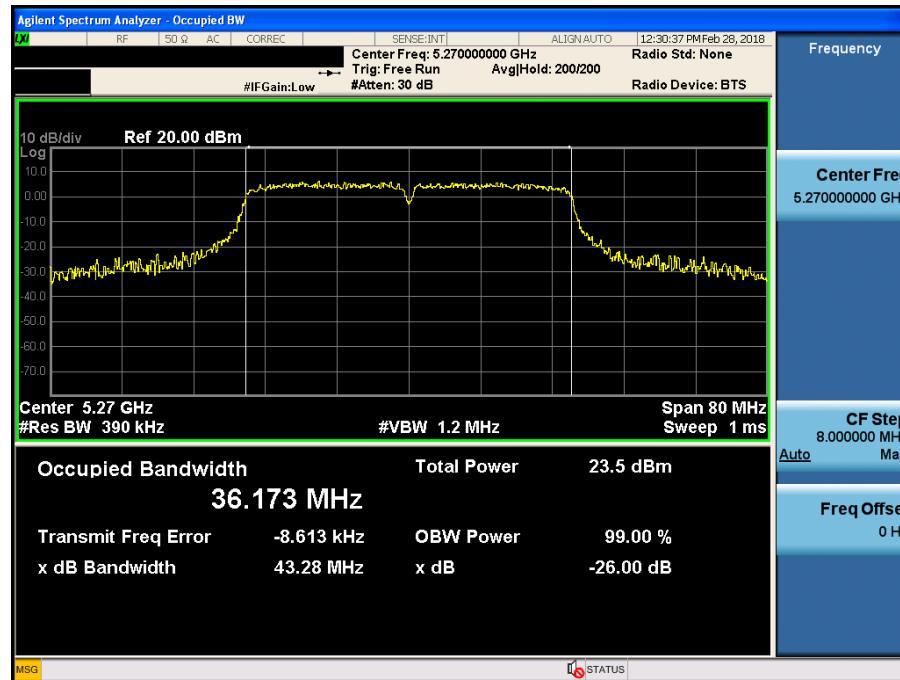


26 dB Bandwidth

Test Mode: 802.11n HT40 & Ch.62

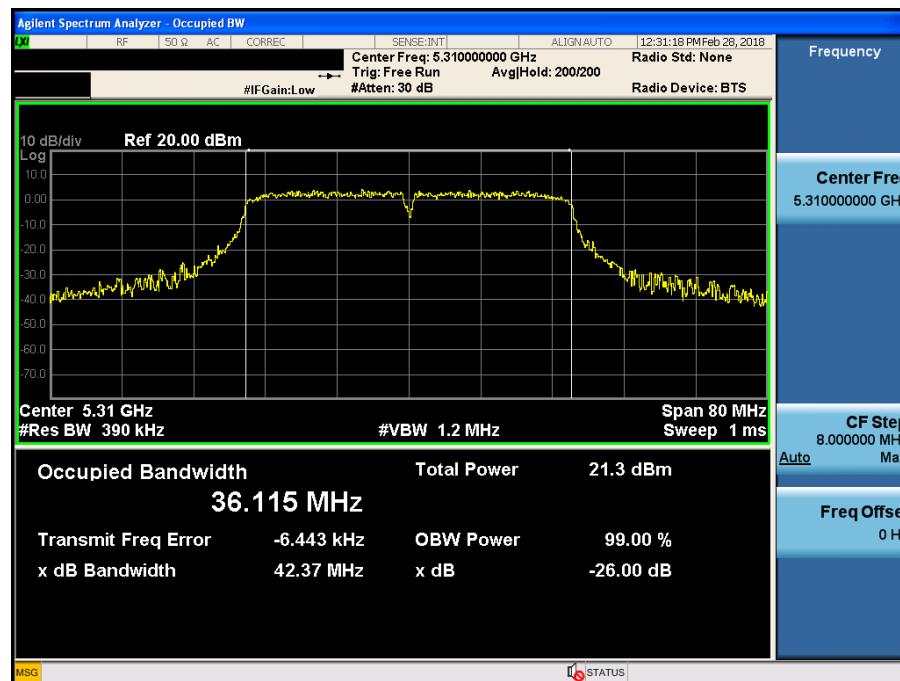


26 dB Bandwidth

Test Mode: 802.11n HT40 & Ch.102

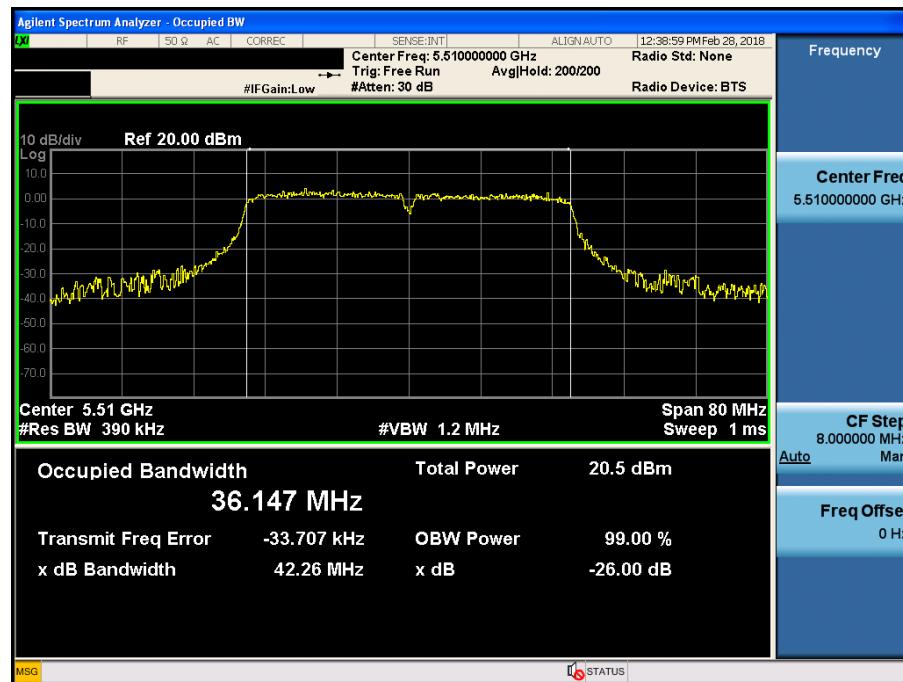


26 dB Bandwidth

Test Mode: 802.11n HT40 & Ch.110

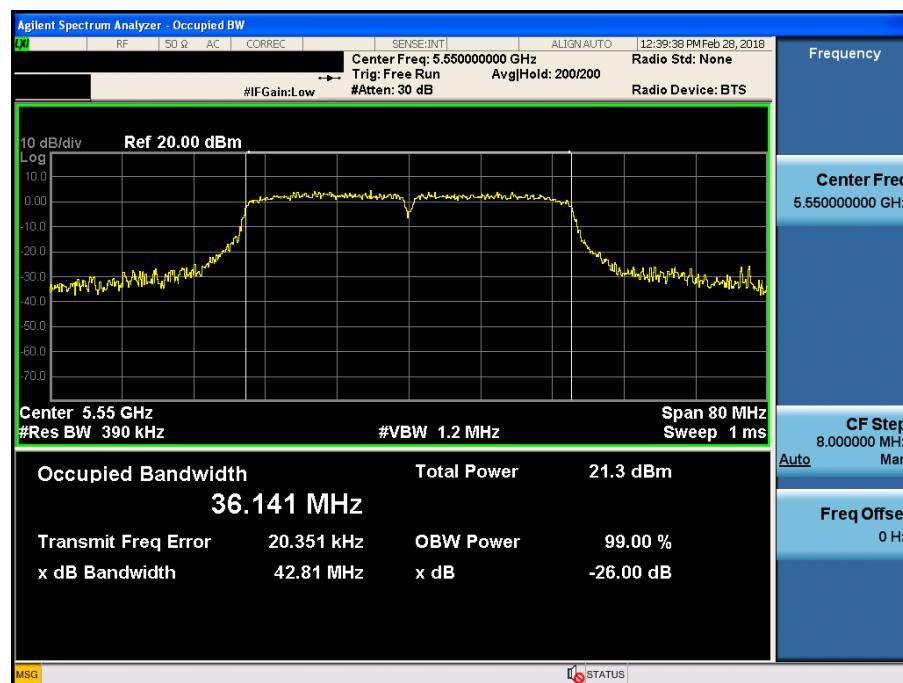

26 dB Bandwidth

Test Mode: 802.11n HT40 & Ch.134

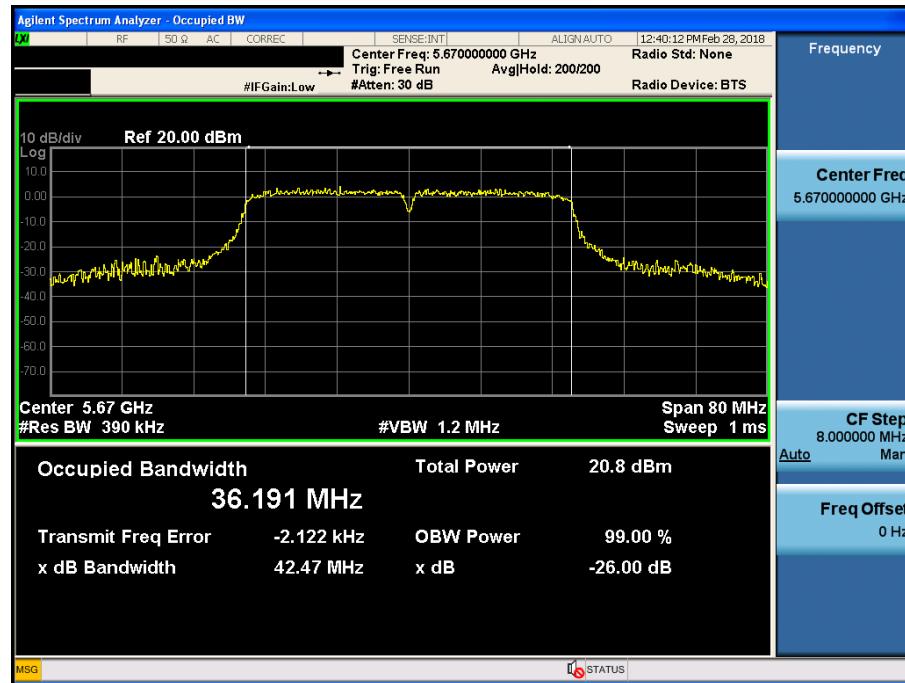

8.2 Minimum Emission Bandwidth (6 dB Bandwidth)

■ Test Requirements

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

■ Test Configuration

Refer to the APPENDIX I.

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB789033 D02v02r01**.

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth $\geq 3 \times \text{RBW}$.
3. Detector = **Peak**.
4. Trace mode = **max hold**.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

■ TEST RESULTS: **Comply**

Mode	Band	Channel	Frequency [MHz]	Test Result [MHz]
802.11a	U-NII 3	149	5745	16.42
		157	5785	16.40
		165	5825	16.41
802.11n (HT20)	U-NII 3	149	5745	17.62
		157	5785	17.63
		165	5825	17.60
802.11 n (HT40)	U-NII 3	151	5755	35.24
		159	5795	35.45

RESULT PLOTS

6 dB Bandwidth

Test Mode: 802.11a & Ch.149




6 dB Bandwidth

Test Mode: 802.11a & Ch.157




6 dB Bandwidth

Test Mode: 802.11a & Ch.165

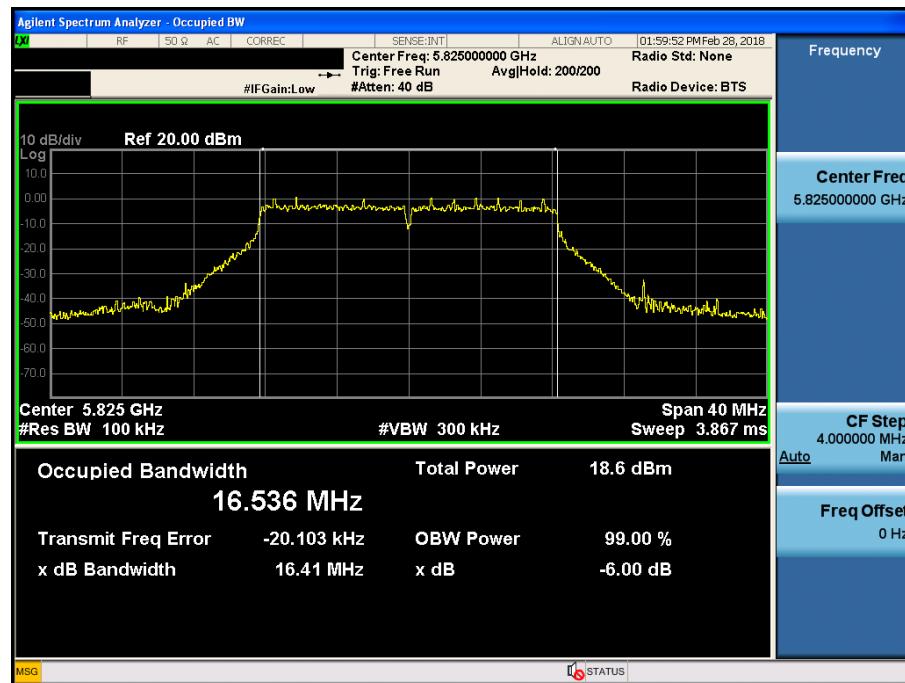


6 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.149

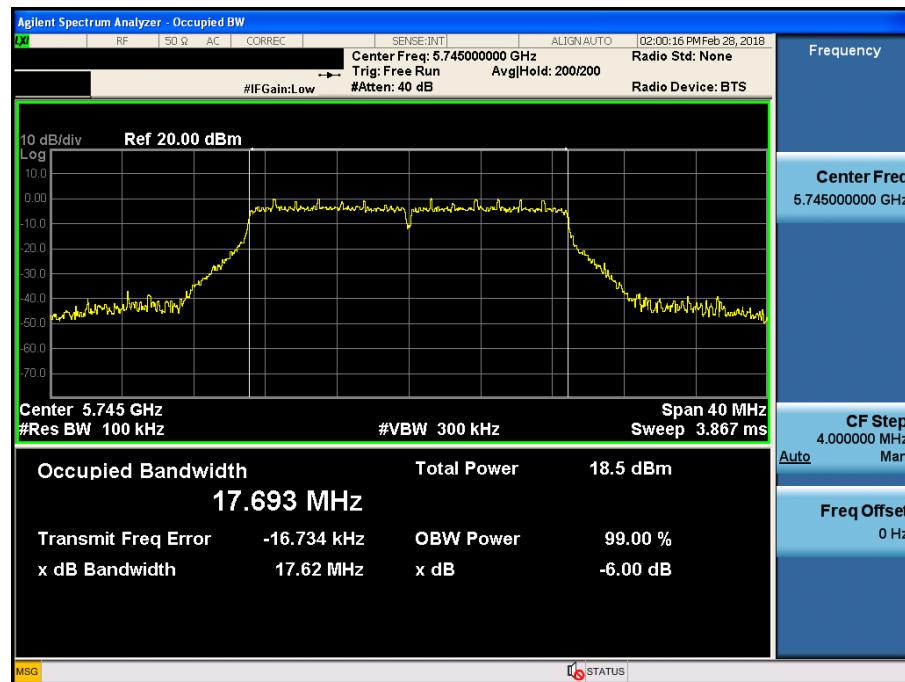


6 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.157

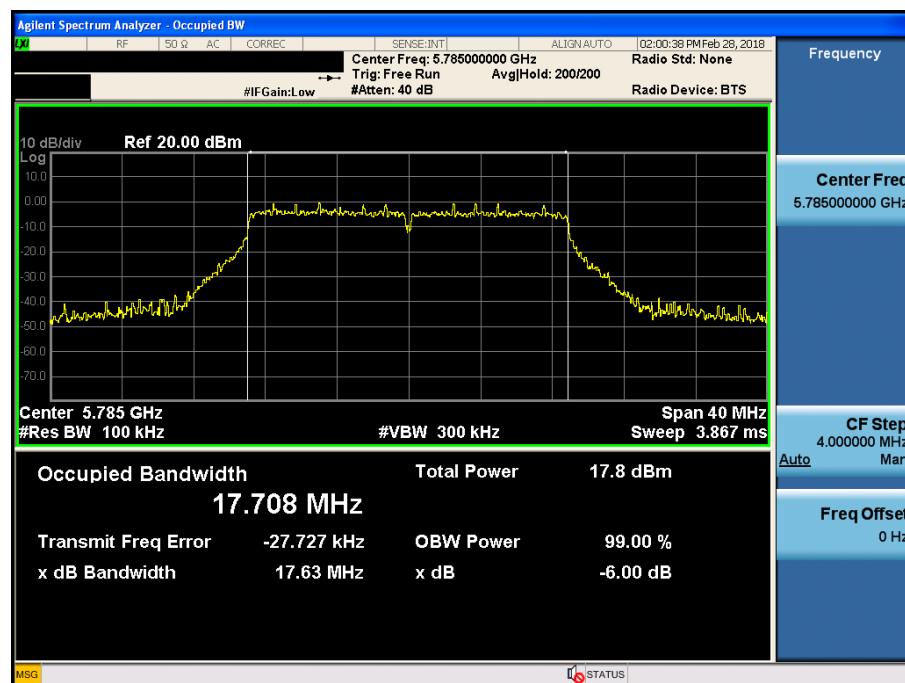


6 dB Bandwidth

Test Mode: 802.11n HT20 & Ch.165

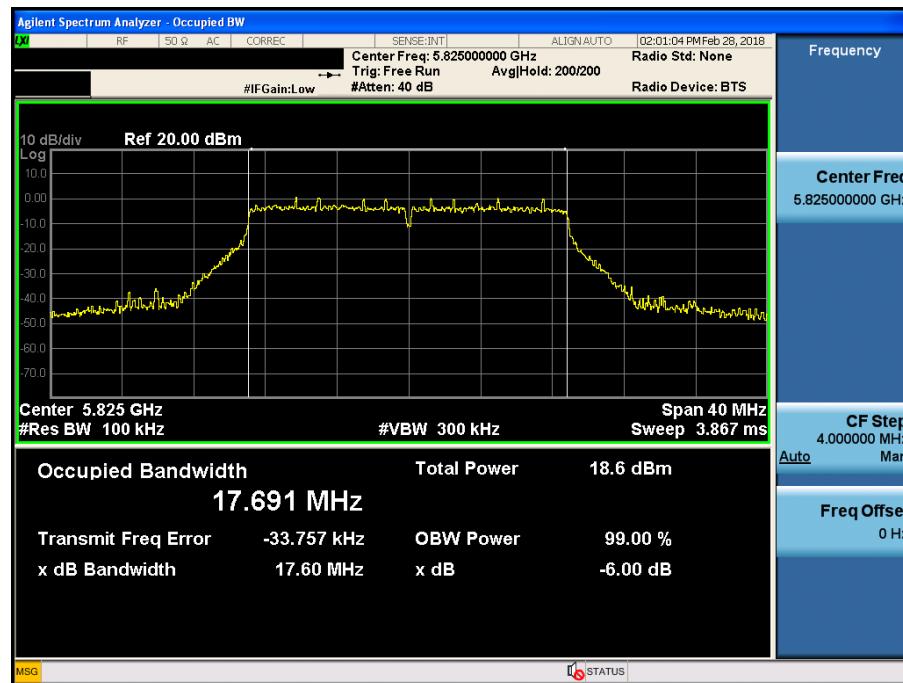


6 dB Bandwidth

Test Mode: 802.11n HT40 & Ch.151

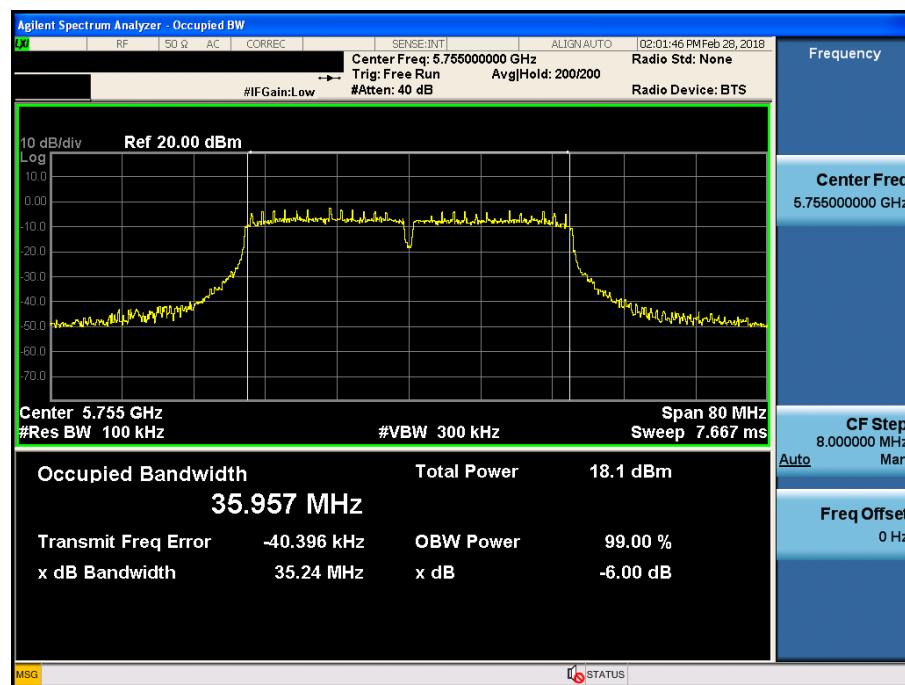

6 dB Bandwidth

Test Mode: 802.11n HT40 & Ch.159

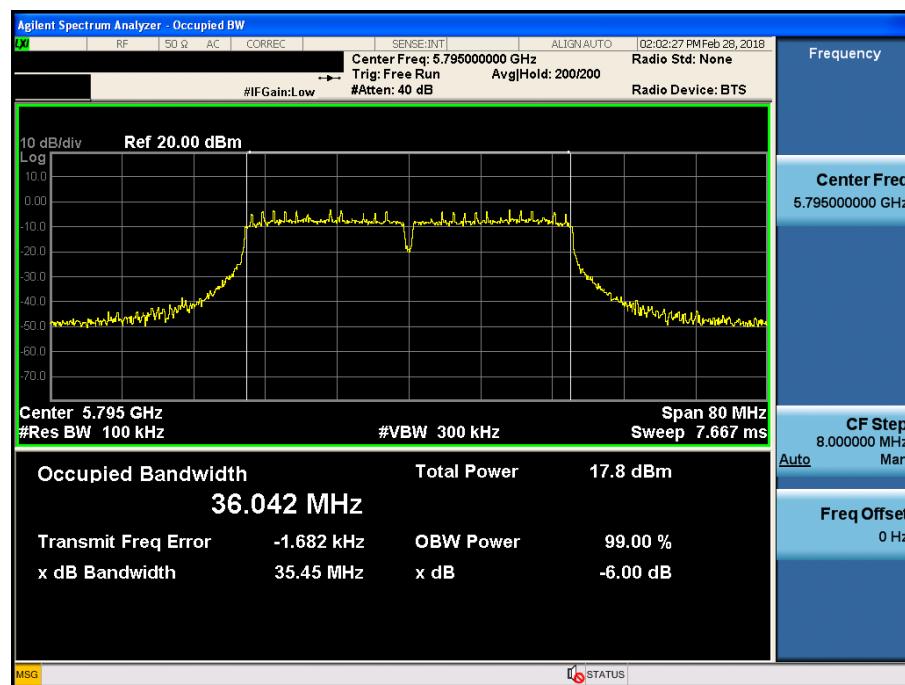

8.3 Maximum Conducted Output Power

Test Requirements, Part. 15.407(a)

(1) For the band 5.15 - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725 - 5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

□ Test Requirements, RSS-247[6.2]**(1) For band 5150 - 5250 MHz**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10}B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

(2) For band 5250 - 5350 MHz

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10}B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.


(3) For band 5470 - 5600 MHz and 5650 - 5725 MHz

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10}B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

(4) For band 5725 - 5850 MHz

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

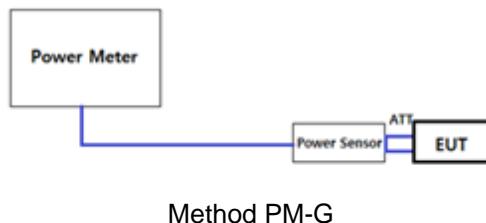□ Test Configuration

Method PM-G

□ Test Configuration**Method PM-G of KDB789033 D02v02r01**

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

■ Test Results: Comply

Mode	Band	Channel	Frequency [MHz]	Conducted Output Power[dBm]	Antenna Gain[dBi]	e.i.r.p ^{Note1} [dBm]
802.11a	U-NII 1	36	5180	15.45	1.60	17.05
		40	5200	15.47	1.60	17.07
		48	5240	15.40	1.60	17.00
	U-NII 2A	52	5260	15.34	1.31	16.65
		60	5300	15.12	1.31	16.43
		64	5320	15.15	1.31	16.46
	U-NII 2C	100	5500	15.03	1.35	16.38
		116	5580	15.06	1.35	16.41
		140	5700	14.99	1.35	16.34
	U-NII 3	149	5745	11.55	1.46	13.01
		157	5785	11.72	1.46	13.18
		165	5825	11.70	1.46	13.16
802.11n HT20	U-NII 1	36	5180	15.47	1.60	17.07
		40	5200	15.46	1.60	17.06
		48	5240	15.43	1.60	17.03
	U-NII 2A	52	5260	15.33	1.31	16.64
		60	5300	15.17	1.31	16.48
		64	5320	15.16	1.31	16.47
	U-NII 2C	100	5500	15.02	1.35	16.37
		116	5580	14.93	1.35	16.28
		140	5700	12.85	1.35	14.20
	U-NII 3	149	5745	11.63	1.46	13.09
		157	5785	11.65	1.46	13.11
		165	5825	11.71	1.46	13.17
802.11n HT40	U-NII 1	38	5190	14.48	1.60	16.08
		46	5230	14.21	1.60	15.81
	U-NII 2A	54	5270	14.94	1.31	16.25
		62	5310	14.52	1.31	15.83
	U-NII 2C	102	5510	13.18	1.35	14.53
		110	5550	14.66	1.35	16.01
		134	5670	14.52	1.35	15.87
	U-NII 3	151	5755	11.05	1.46	12.51
		159	5795	11.22	1.46	12.68

Note 1: e.i.r.p = Conducted Output Power + Antenna Gain

8.4 Maximum Power Spectral Density

■ Test requirements, Part. 15.407(a)

(1) For the band 5.15 - 5.25 GHz.

- (i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band. ^{note1}
- (ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band. ^{note1}
- (iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
- (iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band. ^{note1}

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. ^{note1}

(3) For the band 5.725 - 5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band. ^{note1,note2}

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

■ Test Requirements, RSS-247[6.2]

(1) For band 5150 - 5250 MHz

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10}B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

(2) For band 5250 - 5350 MHz

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10}B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

(3) For band 5470 - 5600 MHz and 5650 - 5725 MHz

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10}B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

(4) For band 5725 - 5850 MHz

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

□ Test Configuration

Refer to the APPENDIX I.

□ Test procedure

Maximum Power Spectral Density is measured using Measurement Procedure **of KDB789033 D02v02r01**

- 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA - 1, SA - 2, SA - 3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
- 2) Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- 3) Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA - 2 or SA - 2 Alternative was used, add $10 \log(1 / x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA - 3 Alternative was used and the linear mode was used in step II.E.2.g (viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- 4) The result is the Maximum PSD over 1 MHz reference bandwidth.
- 5) For devices operating in the bands 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, and 5.47 - 5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in §15.407(a)(5). For devices operating in the band 5.725 - 5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
 - a) Set RBW $\geq 1 / T$, where T is defined in section II.B.1.a). (Refer to Appendix II)
 - b) Set VBW ≥ 3 RBW.
 - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz} / \text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1 \text{ MHz} / \text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW = 100 kHz is available on nearly all spectrum analyzers.

■ Test results: Comply

Mode	Band	Channel	Frequency [MHz]	Reading [dBm]	T.F <small>Note 1</small> [dB]	Power Spectral Density[dBm]	Antenna Gain [dBi]	e.i.r.p Spectral Density [dBm]
802.11a	U-NII 1	36	5180	-5.30	10.60	5.30	1.60	6.90
		40	5200	-4.98		5.62	1.60	7.22
		48	5240	-5.21		5.39	1.60	6.99
	U-NII 2A	52	5260	-4.93		5.67	1.31	6.98
		60	5300	-5.58		5.02	1.31	6.33
		64	5320	-4.84		5.76	1.31	7.07
	U-NII 2C	100	5500	-5.47		5.13	1.35	6.48
		116	5580	-5.65		4.95	1.35	6.30
		140	5700	-6.69		3.91	1.35	5.26
	U-NII 3	149	5745	-8.97	7.59	-1.38	1.46	0.08
		157	5785	-9.44		-1.85	1.46	-0.39
		165	5825	-8.87		-1.28	1.46	0.18
802.11n (HT20)	U-NII 1	36	5180	-5.32	10.64	5.32	1.60	6.92
		40	5200	-5.54		5.10	1.60	6.70
		48	5240	-5.24		5.40	1.60	7.00
	U-NII 2A	52	5260	-5.32		5.32	1.31	6.63
		60	5300	-5.81		4.83	1.31	6.14
		64	5320	-5.54		5.10	1.31	6.41
	U-NII 2C	100	5500	-4.76		5.88	1.35	7.23
		116	5580	-5.85		4.79	1.35	6.14
		140	5700	-8.08		2.56	1.35	3.91
	U-NII 3	149	5745	-9.10	7.63	-1.47	1.46	-0.01
		157	5785	-9.54		-1.91	1.46	-0.45
		165	5825	-8.87		-1.24	1.46	0.22
802.11n (HT40)	U-NII 1	38	5190	-9.72	11.20	1.48	1.60	3.08
		46	5230	-9.55		1.65	1.60	3.25
	U-NII 2A	54	5270	-9.04		2.16	1.31	3.47
		62	5310	-9.24		1.96	1.31	3.27
	U-NII 2C	102	5510	-9.63		1.57	1.35	2.92
		110	5550	-9.50		1.70	1.35	3.05
		134	5670	-9.24		1.96	1.35	3.31
	U-NII 3	151	5755	-13.12	8.19	-4.93	1.46	-3.47
		159	5795	-12.95		-4.76	1.46	-3.30

Note 1: "U-NII 1, 2A, 2C [T.F] = $10 \cdot \log(1\text{MHz}/100\text{kHz}) + \text{DCCF}$ "

"U-NII 3 [T.F] = $10 \cdot \log(500\text{kHz}/100\text{kHz}) + \text{DCCF}$ "

For DCCF(Duty Cycle Correction Factor) please refer to appendix II.


Note 2: Power Spectral Density = Measurement Data + T.F

Note 3: e.i.r.p Spectral Density= Power spectral density + Antenna Gain

RESULT PLOTS


Maximum Power Spectral Density

Test Mode: 802.11a & Ch.36

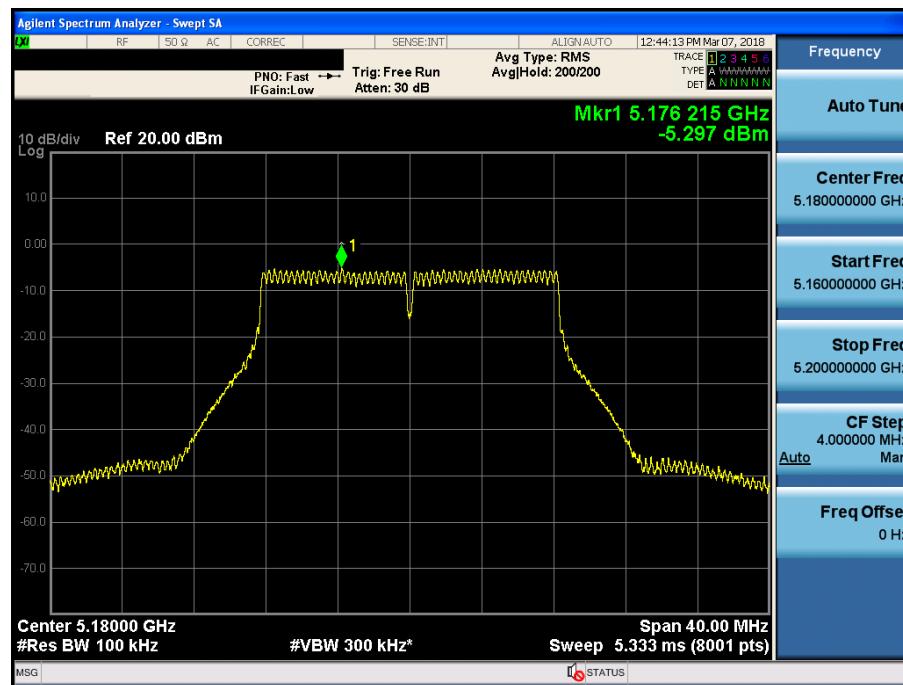


Maximum Power Spectral Density

Test Mode: 802.11a & Ch.40

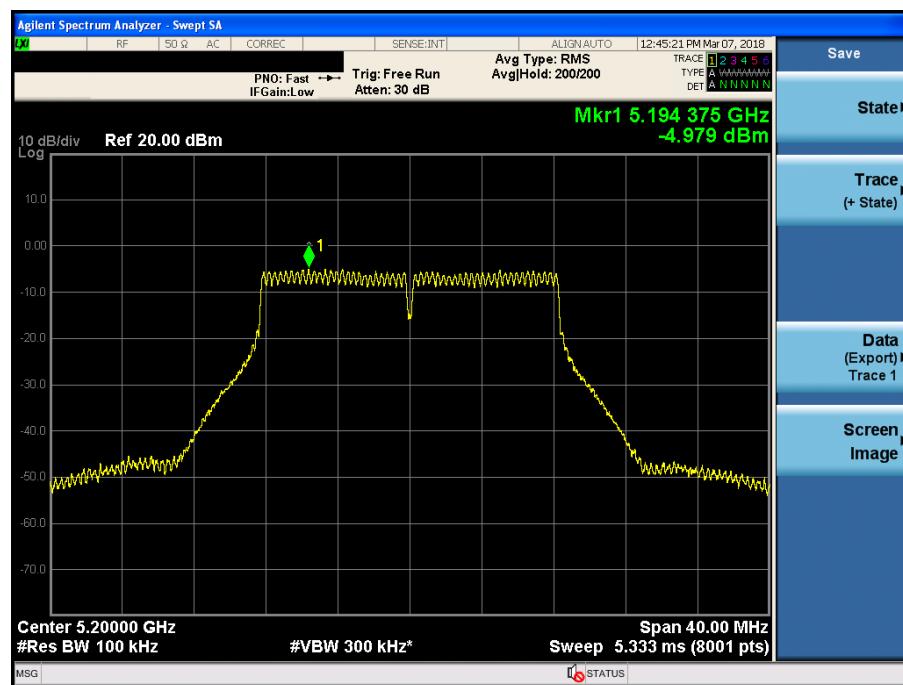


Maximum Power Spectral Density

Test Mode: 802.11a & Ch.48

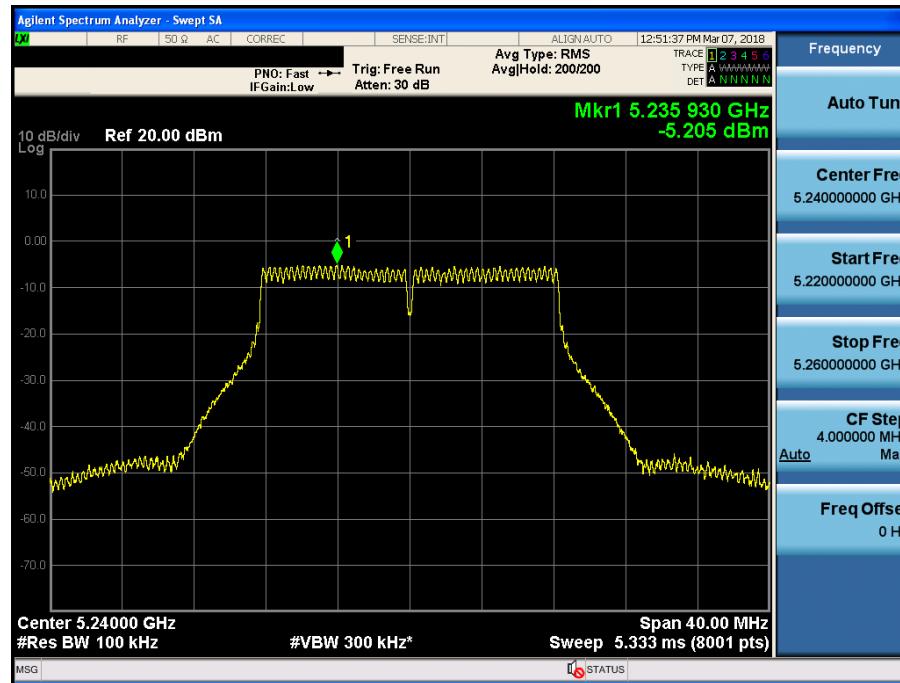


Maximum Power Spectral Density

Test Mode: 802.11a & Ch.52

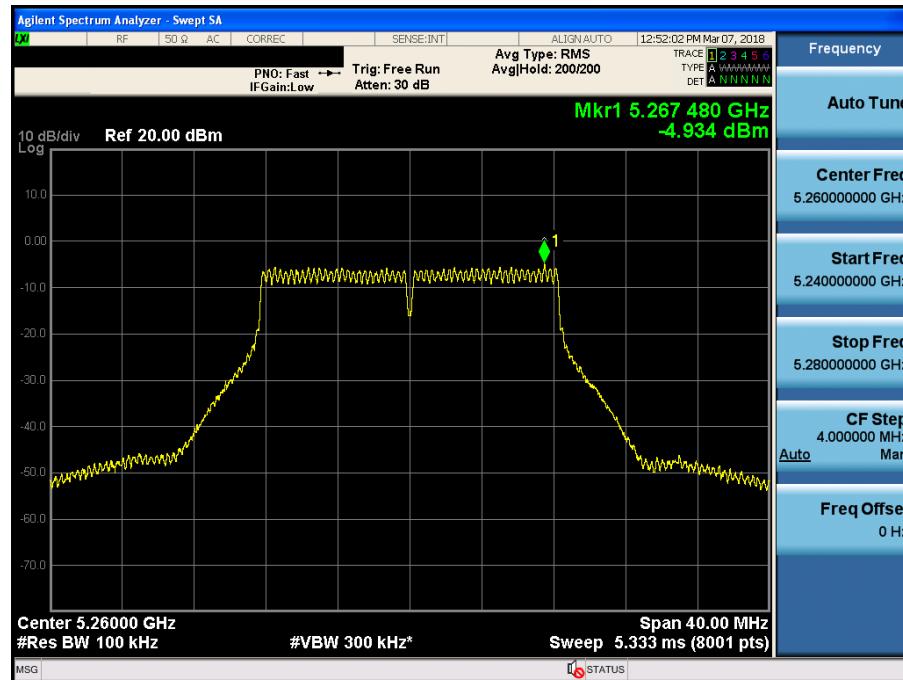


Maximum Power Spectral Density

Test Mode: 802.11a & Ch.60

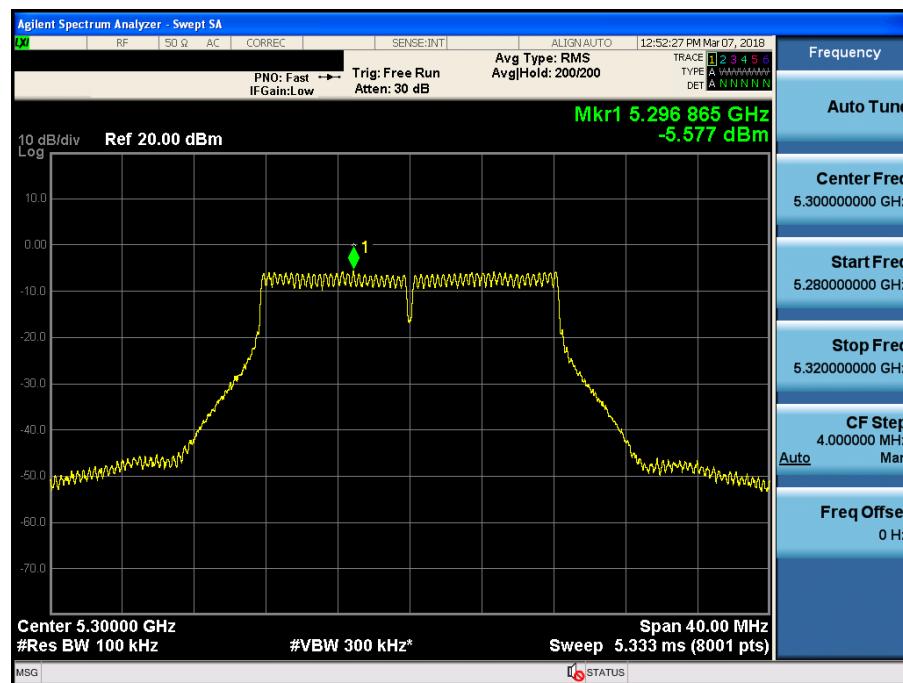


Maximum Power Spectral Density

Test Mode: 802.11a & Ch.64

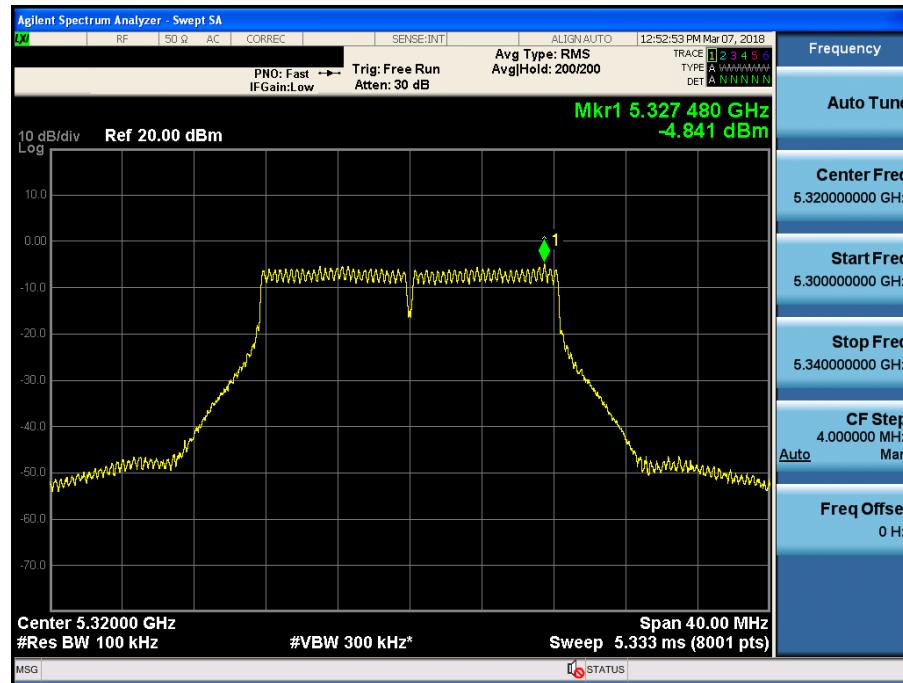


Maximum Power Spectral Density

Test Mode: 802.11a & Ch.100

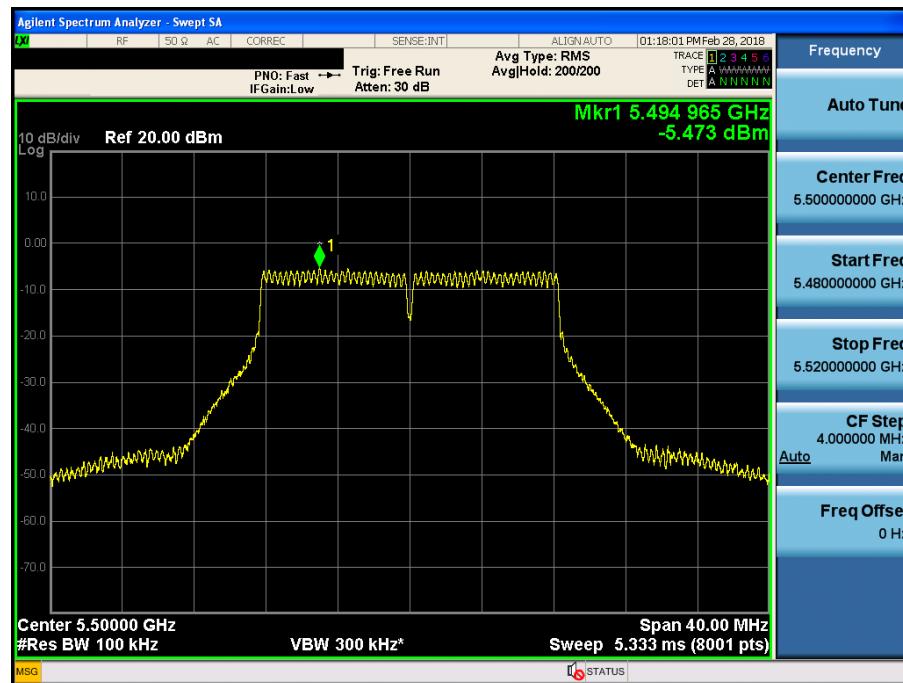


Maximum Power Spectral Density

Test Mode: 802.11a & Ch.116

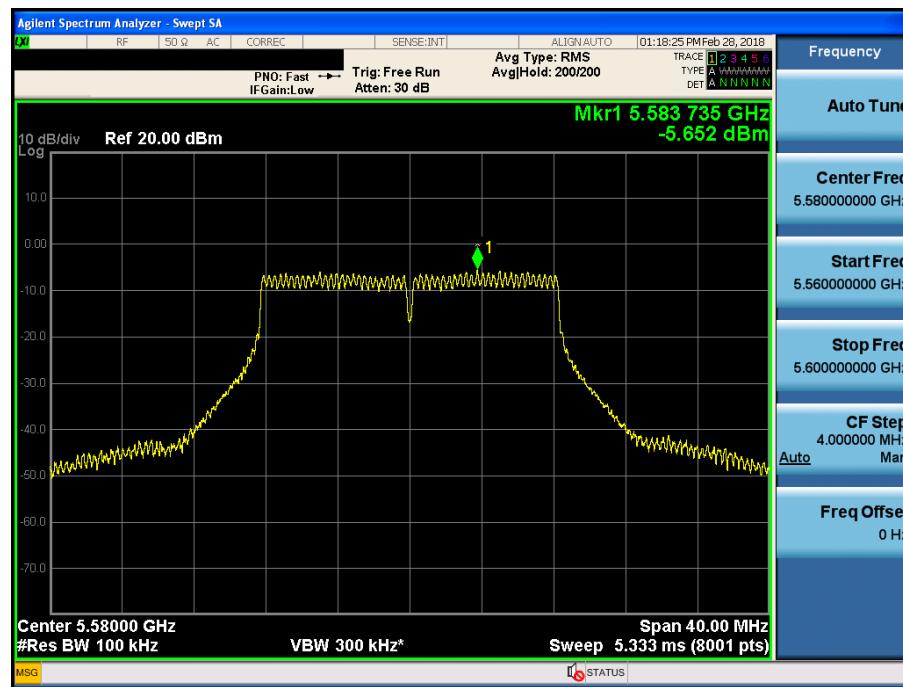


Maximum Power Spectral Density

Test Mode: 802.11a & Ch.140

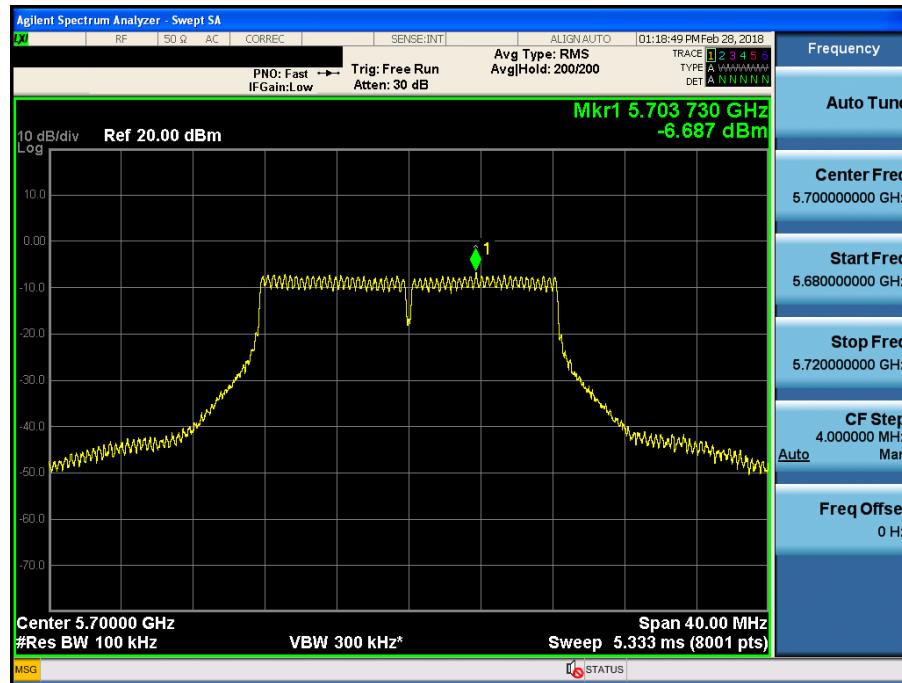


Maximum Power Spectral Density

Test Mode: 802.11a & Ch.149

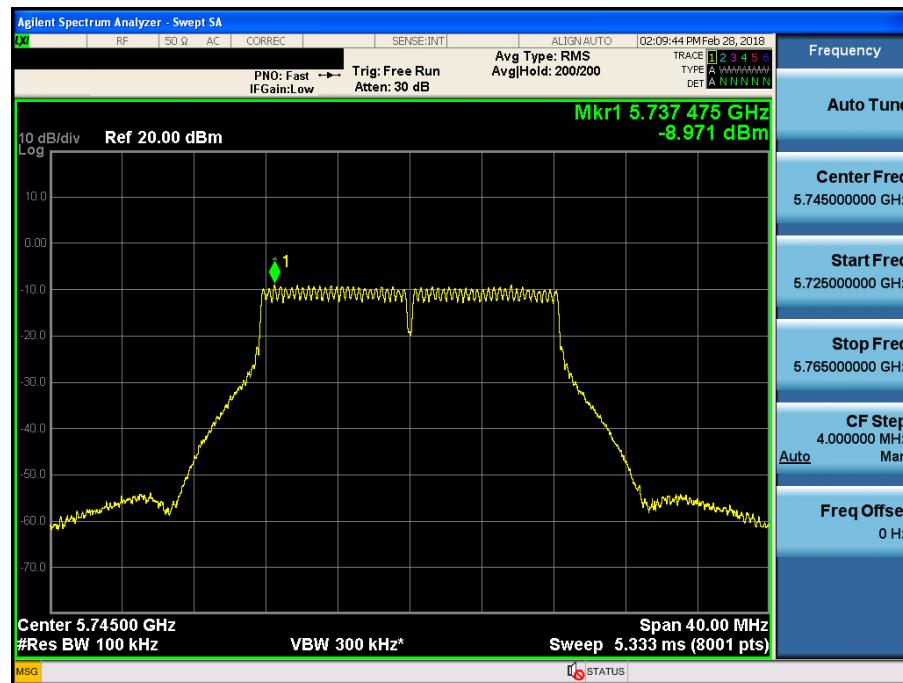

Maximum Power Spectral Density

Test Mode: 802.11a & Ch.157

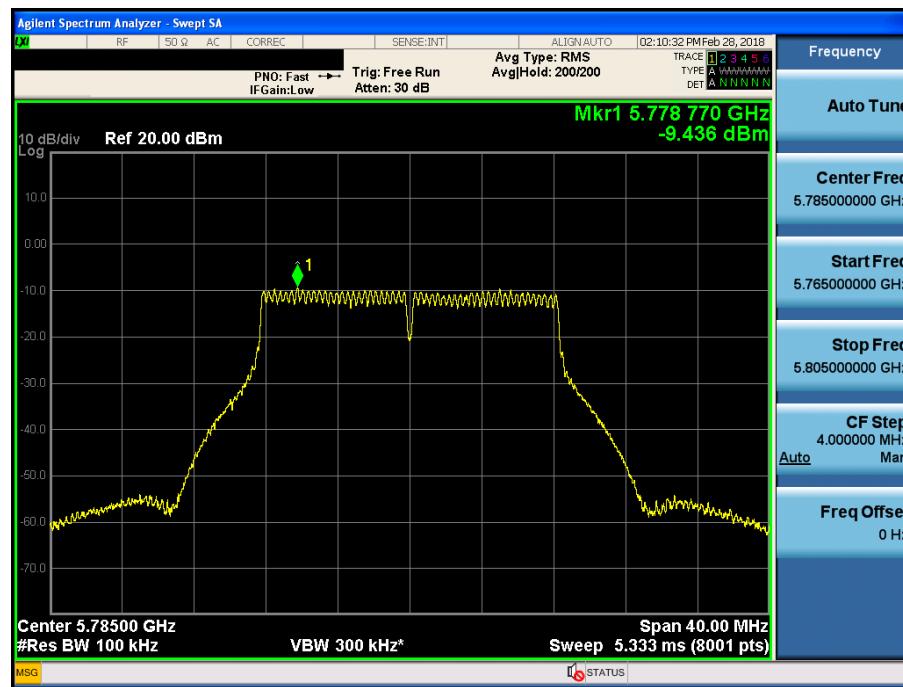


Maximum Power Spectral Density

Test Mode: 802.11a & Ch.165



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & Ch.36

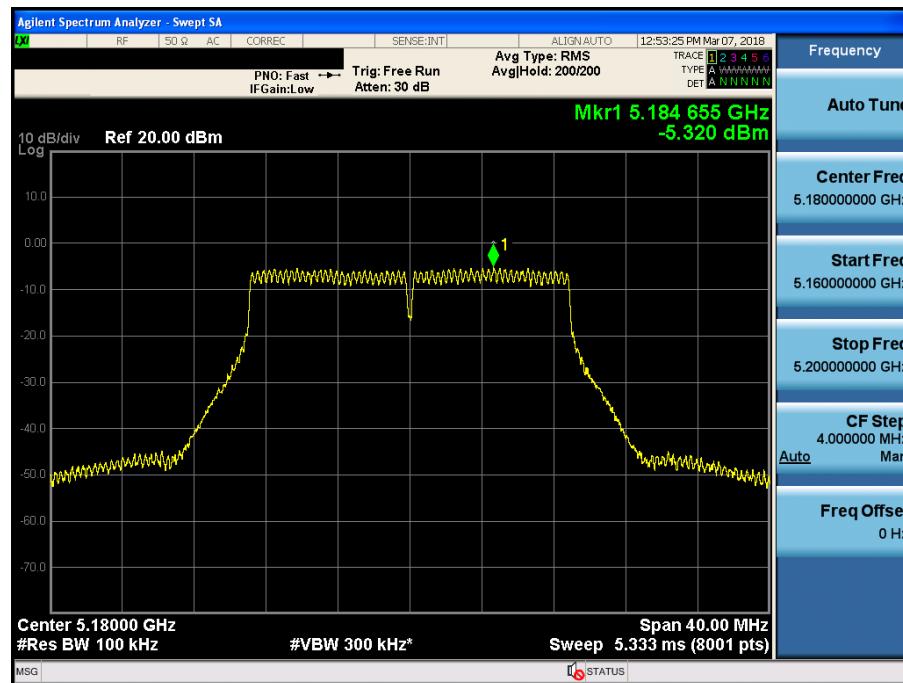

Maximum Power Spectral Density

Test Mode: 802.11n HT20 & Ch.40

