

TEST REPORT



Dt&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2307-0091

2. Customer

- Name : Point Mobile Co., LTD.
- Address : B-9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu, Seoul, South Korea, 08512

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : MOBILE COMPUTER / PM86

FCC ID : V2X-PM86

5. FCC Regulation(s): Part 2, 22, 90

Test Method Used : KDB971168 D01v03r01, ANSI C63.26-2015, ANSI/TIA-603-E-2016

6. Date of Test : 2023.04.19 ~ 2023.06.27

7. Location of Test : Permanent Testing Lab On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test report is not related to KOLAS accreditation.

Affirmation	Tested by Name : JaeHyeok Bang 	Technical Manager Name : JaeJin Lee  (Signature)
-------------	--	--

2023 . 07 . 17 .

Dt&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2307-0091	Jul. 17, 2023	Initial issue	JaeHyeok Bang	JaeJin Lee

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. EUT DESCRIPTION	5
2.2. TESTING ENVIRONMENT	5
2.3. MEASURING INSTRUMENT CALIBRATION.....	5
2.4. MEASUREMENT UNCERTAINTY.....	5
2.5. TEST FACILITY.....	5
3. DESCRIPTION OF TESTS.....	6
3.1. ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)	6
3.2. OCCUPIED BANDWIDTH.....	8
3.3. BAND EDGE EMISSIONS AT ANTENNA TERMINAL	9
3.4. SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	10
3.5. EMISSION MASK.....	11
3.6. UNDESIRABLE EMISSIONS	12
3.7. FREQUENCY STABILITY	13
4. LIST OF TEST EQUIPMENT	14
5. SUMMARY OF TEST RESULTS	15
6. EMISSION DESIGNATOR AND SAMPLE CALCULATION	16
7. TEST DATA.....	17
7.1. CONDUCTED OUTPUT POWER	17
7.2. OCCUPIED BANDWIDTH.....	18
7.3. BAND EDEG EMISSIONS (Conducted).....	18
7.4. SPURIOUS AND HARMONICS EMISSIONS (Conducted)	18
7.5. ERP	19
7.6. UNDESIRABLE EMISSIONS (Radiated).....	20
7.7. FREQUENCY STABILITY	21
8. TEST PLOTS	22
8.1. OCCUPIED BANDWIDTH.....	22
8.2. PEAK TO AVERAGE RATIO	32
8.3. BAND EDGE EMISSIONS(Conducted).....	42
8.4. SPURIOUS AND HARMONICS EMISSIONS(Conducted)	47

1. GENERAL INFORMATION

FCC Classification	PCS Licensed Transmitter (PCB)
FCC ID	V2X-PM86
Product Name	MOBILE COMPUTER
Model Name	PM86
Add Model Name	-
FVIN(Firmware Version Identification Number)	86.00
EUT Serial Number	Conducted: 23070A0070, Radiated: 23070A0111
Supplying power	DC 3.8 V
Antenna Information	Antenna Type: LDS Antenna Gain: -2.05 dBi (PK)

Mode	TX Frequency (MHz)	Emission Designator	Modulation	Conducted output power		ERP	
				Max power (dBm)	Max power (W)	Max power (W)	Max power (W)
LTE Band 26	821.5	13M4G7D	QPSK	22.24	0.167	19.96	0.099
LTE Band 26	821.5	13M4W7D	16QAM	21.07	0.128	19.00	0.079
LTE Band 26	821.5	13M4W7D	64QAM	20.43	0.110	17.97	0.063
LTE Band 26	819	8M93G7D	QPSK	22.28	0.169	19.85	0.097
LTE Band 26	819	8M89W7D	16QAM	21.26	0.134	18.93	0.078
LTE Band 26	819	8M92W7D	64QAM	20.30	0.107	18.10	0.065
LTE Band 26	816.5 ~ 821.5	4M48G7D	QPSK	22.28	0.169	20.04	0.101
LTE Band 26	816.5 ~ 821.5	4M47W7D	16QAM	21.19	0.132	19.33	0.086
LTE Band 26	816.5 ~ 821.5	4M48W7D	64QAM	20.52	0.113	18.15	0.065
LTE Band 26	815.5 ~ 822.5	2M69G7D	QPSK	22.30	0.170	19.92	0.098
LTE Band 26	815.5 ~ 822.5	2M68W7D	16QAM	21.26	0.134	18.53	0.071
LTE Band 26	815.5 ~ 822.5	2M68W7D	64QAM	20.32	0.108	18.20	0.066
LTE Band 26	814.7 ~ 823.3	1M08G7D	QPSK	22.18	0.165	19.80	0.095
LTE Band 26	814.7 ~ 823.3	1M08W7D	16QAM	21.36	0.137	18.70	0.074
LTE Band 26	814.7 ~ 823.3	1M08W7D	64QAM	20.33	0.108	17.81	0.060

2. INTRODUCTION

2.1. EUT DESCRIPTION

The Equipment Under Test (EUT) supports 850/1900 GSM, 850/1700/1900 WCDMA, Multi-band LTE, 802.11b/g/n/ac/ax WLAN(2.4GHz), 802.11a/n/ac/ax WLAN(5GHz), Bluetooth(BDR, EDR, LE) and NFC.

2.2. TESTING ENVIRONMENT

Ambient Condition	
▪ Temperature	+22 °C ~ +25 °C
▪ Relative Humidity	41 % ~ 45 %

2.3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.4. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Radiated Disturbance (Below 1 GHz)	4.8 dB (The confidence level is about 95 %, $k = 2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.0 dB (The confidence level is about 95 %, $k = 2$)
Radiated Disturbance (Above 18 GHz)	5.2 dB (The confidence level is about 95 %, $k = 2$)

2.5. TEST FACILITY

Dt&C Co., Ltd.

The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.

The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014.

- FCC & IC MRA Designation No. : KR0034

- ISED#: 5740A


www.dtnc.net

Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

3. DESCRIPTION OF TESTS

3.1. ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)

Test Set-up

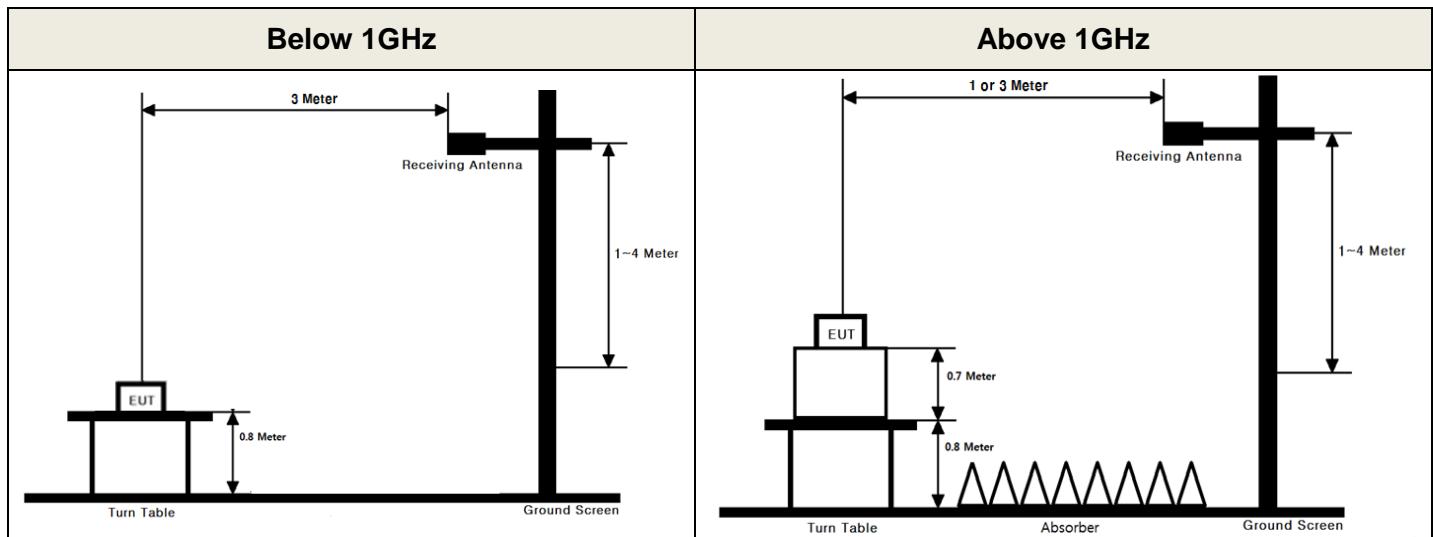

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5 meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.17
- KDB971168 D01v03 - Section 5.2.2
- ANSI C63.26-2015 – Section 5.2.4.4.1

Test setting

1. Set span to 2 x to 3 x the OBW.
2. Set RBW = 1 % to 5 % of the OBW.
3. Set VBW \geq 3 x RBW.
4. Set number of points in sweep \geq 2 x span / RBW.
5. Sweep time:
 - 1) Set = auto-couple, or
 - 2) Set \geq [10 \times (number of points in sweep) \times (transmission period)] for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
6. Detector = power averaging (rms).
7. If the EUT can be configured to transmit continuously, then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).

9. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over multiple symbols, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.
10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

The receiver antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminal of the substitute antenna is measured.


The ERP/EIRP is calculated using the following formula:

ERP/EIRP = The conducted power at the substitute antenna's terminal [dBm] + Substitute Antenna gain [dBd for ERP , dBi for EIRP]

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn antenna and an isotropic antenna are taken into consideration.

3.2. OCCUPIED BANDWIDTH

Test set-up

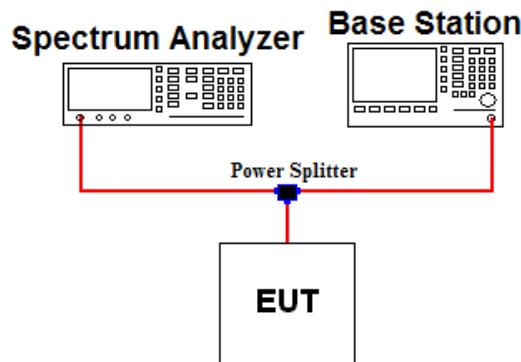

Test Procedure

- **KDB971168 D01v03 - Section 4.3**
- **ANSI C63.26-2015 – Section 5.4.4**


The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power of a given emission.

Test setting

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 % ~ 5 % of the expected OBW & VBW $\geq 3 \times$ RBW
3. Detector = Peak
4. Trace mode = Max hold
5. Sweep = Auto couple
6. The trace was allowed to stabilize
7. If necessary, step 2 ~ 6 were repeated after changing the RBW such that it would be within 1 % ~ 5 % of the 99 % occupied bandwidth observed in step 6.

3.3. BAND EDGE EMISSIONS AT ANTENNA TERMINAL

Test set-up

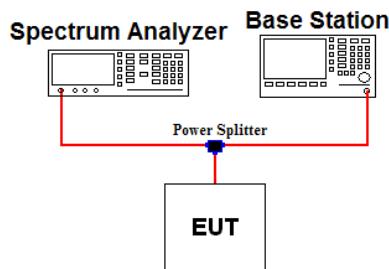

Test Procedure

- **KDB971168 D01v03 - Section 6, KDB971168D02v02 - Section 8**
- **ANSI C63.26-2015 – Section 5.7**

All out of band emissions are measured by means of a calibrated spectrum analyzer. Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The EUT was setup to maximum output power at its lowest and highest channel with all bandwidths, modulations and RB configurations.

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.


Section 90.691(a) compliance testing, use $\text{RBW} = 300 \text{ Hz}$ for offsets less than 37.5 kHz from a channel edge; $\text{RBW} = 100 \text{ kHz}$ for offsets greater than 37.5 kHz is allowed.

Test setting

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. $\text{RBW} = 300 \text{ Hz}$ & $\text{VBW} \geq 3 \times \text{RBW}$ (less than 37.5 kHz from a channel edge)
 $\text{RBW} = 100 \text{ kHz}$ & $\text{VBW} \geq 3 \times \text{RBW}$ (greater than 37.5 kHz from a channel edge)
3. Detector = RMS & Trace mode = Average
4. Sweep time = Auto couple
5. The trace was allowed to stabilize

3.4. SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

Test set-up

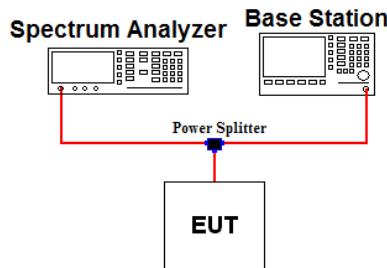

Test Procedure

- **KDB971168 D01v03 - Section 6**
- **ANSI C63.26-2015 – Section 5.7**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its low, middle, high channel with all bandwidths, modulations and RB configurations. The spectrum is scanned from 9 kHz up to a frequency including its 10th harmonic.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.


Test setting

1. RBW = 100 kHz(Below 1 GHz) or 1 MHz(Above 1 GHz) & VBW $\geq 3 \times$ RBW (Refer to Note 1)
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point $\geq 2 \times$ span / RBW
5. The trace was allowed to stabilize

Note 1: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1GHz and 1MHz or greater for frequencies greater than 1 GHz.

3.5. EMISSION MASK

Test set-up

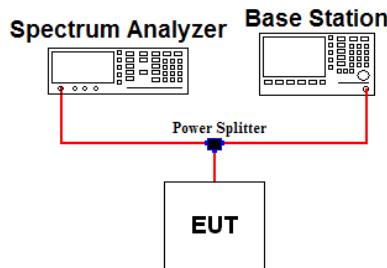

Test Procedure

- **KDB971168 D01v03 - Section 6**
- **ANSI C63.26-2015 – Section 5.7**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its low, middle, high channel with all bandwidths, modulations and RB configurations.

Transmitters used in the radio services by Part 90 must comply with the emission masks.


Test setting

6. RBW = 100 kHz(Below 1 GHz) or 1 MHz(Above 1 GHz) & VBW \geq 3 X RBW (Refer to Note 1)
7. Detector = RMS & Trace mode = Max hold
8. Sweep time = Auto couple
9. Number of sweep point \geq 2 X span / RBW
10. The trace was allowed to stabilize

Note 1: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1GHz and 1MHz or greater for frequencies greater than 1 GHz.

3.6. UNDESIRABLE EMISSIONS

Test Set-up

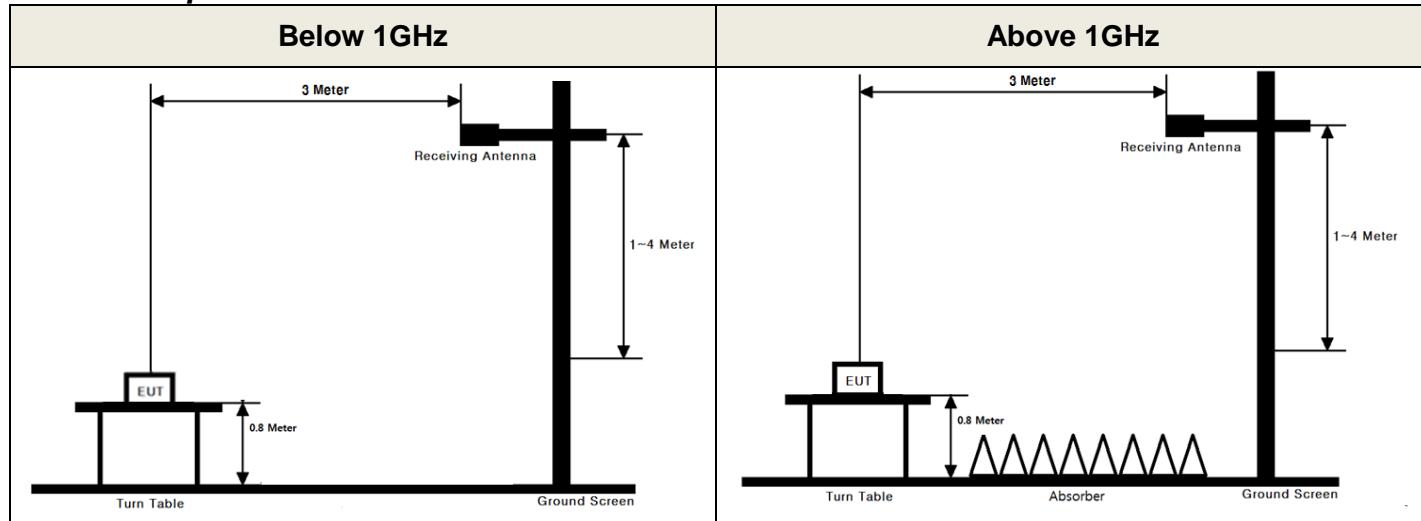

These measurements were performed at 3 test site. The equipment under test is placed on a non-conductive table 0.8 or 1.5 meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.12
- KDB971168 D01v03 - Section 5.8
- ANSI C63.26-2015 – Section 5.5

Test setting

1. RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW $\geq 3 \times$ RBW
2. Detector = RMS & Trace mode = Average
3. Sweep time = Auto couple
4. Number of sweep point $\geq 2 \times$ span / RBW
5. The trace was allowed to stabilize


The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

For radiated power measurements below 1 GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1 GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

3.7. FREQUENCY STABILITY

Test Set-up

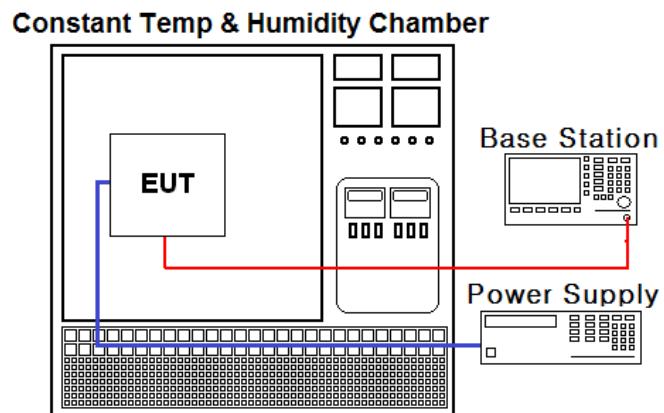

Test Procedure

- ANSI/TIA-603-E-2016
- KDB971168 D01v03 – Section 9

The frequency stability of the transmitter is measured by:

a.) **Temperature:**

The temperature is varied from – 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:**

The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification:

The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ ppm}$) of the center frequency for Part 90.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature.
(20 °C to provide a reference)
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	22/12/16	23/12/16	MY50110097
Spectrum Analyzer	Agilent Technologies	N9020A	22/12/16	23/12/16	MY48011700
Spectrum Analyzer	Agilent Technologies	N9020A	22/12/16	23/12/16	MY50410163
DC power supply	Agilent Technologies	66332A	23/06/23	24/06/23	US37474125
Multimeter	FLUKE	17B+	22/12/16	23/12/16	36390701WS
Power Splitter	Anritsu	K241B	23/06/23	24/06/23	020611
Temp & Humi	ESPEC	SU-261	23/06/23	24/06/23	92006578
Radio Communication Analyzer	Anritsu	MT8820C	23/06/23	24/06/23	6200951873
Thermohygrometer	BODYCOM	BJ5478	22/12/16	23/12/16	120612-1
Thermohygrometer	BODYCOM	BJ5478	22/12/16	23/12/16	120612-2
Signal Generator	Rohde Schwarz	SMBV100A	22/12/16	23/12/16	255571
Signal Generator	ANRITSU	MG3695C	22/12/16	23/12/16	173501
Loop Antenna	ETS-Lindgren	6502	22/04/22	24/04/22	203480
Bilog Antenna	Schwarzbeck	VULB 9160	22/12/16	23/12/16	3362
Dipole Antenna	Schwarzbeck	UHA 9105	22/12/16	24/12/16	2262
HORN ANT	ETS	3117	22/12/16	23/12/16	00140394
HORN ANT	A.H.Systems	SAS-574	23/06/23	24/06/23	155
PreAmplifier	H.P	8447D	22/12/16	23/12/16	2944A07774
PreAmplifier	Agilent	8449B	22/12/16	23/12/16	3008A02108
PreAmplifier	A.H.Systems Inc.	PAM-1840VH	23/06/23	24/06/23	163
High-pass filter	Wainwright	WHKX12-935-1000-15000-40SS	22/12/16	23/12/16	7
High-pass filter	Wainwright	WHKX10-2838-3300-18000-60SS	22/12/16	23/12/16	2
High-pass filter	Wainwright	WHKX6-6320-8000-26500-40CC	22/12/16	23/12/16	2
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-1
Cable	HUBER+SUHNER	SUCOFLEX100	23/01/04	24/01/04	M-2
Cable	Junkosah	MWX241/B	23/01/04	24/01/04	M-3
Cable	Junkosah	MWX221	23/01/04	24/01/04	M-4
Cable	Junkosah	MWX221	23/01/04	24/01/04	M-5
Cable	DTNC	Cable	23/01/04	24/01/04	M-6
Cable	JUNFLON	J12J101757-00	23/01/04	24/01/04	M-7
Cable	HUBER+SUHNER	SUCOFLEX104	23/01/04	24/01/04	M-8
Cable	HUBER+SUHNER	SUCOFLEX106	23/01/04	24/01/04	M-9
Cable	Junkosha	MWX342	23/01/04	24/01/04	RFC-72

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by Dt&C itself.

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Status Note 1
2.1046 90.635	Conducted Output Power	< 100 Watts	Conducted	C
2.1049	Occupied Bandwidth	N/A		C
2.1051 90.691	Band Edge / Conducted Spurious Emissions	> 43 + 10log ₁₀ (P) dB for all out-of-band emissions except > 50 + 10log ₁₀ (P) dB at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		C
2.1055 90.213	Frequency Stability	< 2.5 ppm		C
22.913(a.5)	Radiated Output Power	< 7 Watts max. ERP	Radiated	C ^{Note2}
2.1053 90.691	Undesirable Emissions	> 43 + 10log ₁₀ (P) dB for all out-of-band emissions except > 50 + 10log ₁₀ (P) dB at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		C ^{Note2}

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable

Note 2: This test item was performed in three orthogonal EUT positions and the worst case data was reported.

6. EMISSION DESIGNATOR AND SAMPLE CALCULATION

A. Emission Designator

LTE Band 26(QPSK)

Emission Designator = **13M4G7D**

LTE OBW = 13.424 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 26(16QAM)

Emission Designator = **13M4W7D**

LTE OBW = 13.366 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data Transmission

LTE Band 26(64QAM)

Emission Designator = **13M4W7D**

LTE OBW = 13.382 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data Transmission

B. For substitution method

- 1) The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1 GHz respectively above ground.
- 2) The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
- 3) During the test, the turn table is rotated until the maximum signal is found.
- 4) Record the field strength meter's level. (ex. Spectrum reading level is -8.5 dBm)
- 5) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 6) Increase the signal generator output till the field strength meter's level is equal to the item (4).
(ex. Signal generator level is -18.04 dBm)
- 7) The gain of the cable and amplifier between the signal generator and terminals of substituted antenna is 46.92 dB at test frequency.
- 8) Record the level at substituted antenna terminal. (ex. 28.88dBm)
- 9) The result is calculated as below;

EIRP(dBm) = LEVLE@ANTENNA TERMINAL + TX Antenna Gain (dBi)

ERP(dBm) = LEVLE@ANTENNA TERMINAL + TX Antenna Gain (dBd)

Where, TX Antenna Gain (dBd) = TX Antenna Gain (dBi) - 2.15 dB

7. TEST DATA

7.1. CONDUCTED OUTPUT POWER

- Test Notes

- 1) This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the below table.

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	Conducted Output power (dBm)	Conducted Output power (W)
15	821.5	QPSK	22.24	0.167
		16QAM	21.07	0.128
		64QAM	20.43	0.110
10	819	QPSK	22.28	0.169
		16QAM	21.26	0.134
		64QAM	20.30	0.107
5	816.5	QPSK	22.08	0.161
		16QAM	21.06	0.128
		64QAM	20.25	0.106
	821.5	QPSK	22.28	0.169
		16QAM	21.19	0.132
		64QAM	20.52	0.113
3	815.5	QPSK	22.19	0.166
		16QAM	21.06	0.128
		64QAM	20.25	0.106
	819	QPSK	22.23	0.167
		16QAM	21.15	0.130
		64QAM	20.28	0.107
	822.5	QPSK	22.30	0.170
		16QAM	21.26	0.134
		64QAM	20.32	0.108
1.4	814.7	QPSK	22.14	0.164
		16QAM	21.30	0.135
		64QAM	20.24	0.106
	819	QPSK	22.16	0.164
		16QAM	21.31	0.135
		64QAM	20.24	0.106
	823.3	QPSK	22.18	0.165
		16QAM	21.36	0.137
		64QAM	20.33	0.108

7.2. OCCUPIED BANDWIDTH

- Plots of the EUT's Occupied Bandwidth are shown in Clause 8.1

7.3. BAND EDEG EMISSIONS (Conducted)

- Plots of the EUT's Band Edge Emissions are shown in Clause 8.2

7.4. SPURIOUS AND HARMONICS EMISSIONS (Conducted)

- Plots of the EUT's Spurious Emissions are shown in Clause 8.3

7.5. ERP

- Test Notes

This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

- Measurement data:

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)
15	821.5	QPSK	1/36	H	21.38	-1.42	19.96	0.099
		16QAM	1/36	H	20.42	-1.42	19.00	0.079
		64QAM	1/36	H	19.39	-1.42	17.97	0.063
10	819	QPSK	1/25	H	21.27	-1.42	19.85	0.097
		16QAM	1/25	H	20.35	-1.42	18.93	0.078
		64QAM	1/25	H	19.52	-1.42	18.10	0.065
5	816.5	QPSK	1/12	H	21.25	-1.42	19.83	0.096
		16QAM	1/12	H	19.74	-1.42	18.32	0.068
		64QAM	1/12	H	19.08	-1.42	17.66	0.058
	821.5	QPSK	1/12	H	21.46	-1.42	20.04	0.101
		16QAM	1/12	H	20.75	-1.42	19.33	0.086
		64QAM	1/12	H	19.57	-1.42	18.15	0.065
3	815.5	QPSK	1/14	H	20.88	-1.42	19.46	0.088
		16QAM	1/14	H	19.54	-1.42	18.12	0.065
		64QAM	1/14	H	18.83	-1.42	17.41	0.055
	819	QPSK	1/14	H	21.34	-1.42	19.92	0.098
		16QAM	1/14	H	19.91	-1.42	18.49	0.071
		64QAM	1/14	H	19.17	-1.42	17.75	0.060
	822.5	QPSK	1/7	H	21.15	-1.42	19.73	0.094
		16QAM	1/7	H	19.95	-1.42	18.53	0.071
		64QAM	1/7	H	19.62	-1.42	18.20	0.066
1.4	814.7	QPSK	1/2	H	20.80	-1.41	19.39	0.087
		16QAM	1/2	H	19.21	-1.41	17.80	0.060
		64QAM	1/2	H	18.61	-1.41	17.20	0.052
	819	QPSK	1/2	H	21.22	-1.42	19.80	0.095
		16QAM	1/2	H	20.12	-1.42	18.70	0.074
		64QAM	1/2	H	19.18	-1.42	17.76	0.060
	823.3	QPSK	1/2	H	21.08	-1.42	19.66	0.092
		16QAM	1/2	H	20.05	-1.42	18.63	0.073
		64QAM	1/2	H	19.23	-1.42	17.81	0.060

7.6. UNDESIRABLE EMISSIONS (Radiated)

- Test Notes

1. This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported.
2. Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$
3. This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.
4. The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

- Measurement data:

Channel Bandwidth (MHz)	Test Freq. (MHz)	RB Size/Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level at Antenna Terminal(dBm)	Substitute Antenna Gain(dBd)	Result (dBm)	Limit (dBm)	Margin (dB)
15	821.5	1/36	QPSK	1 642.23	V	-67.92	4.09	-63.83	-13.00	50.83
				2 461.82	V	-65.51	3.81	-61.70	-13.00	48.70
				4 106.15	V	-69.30	7.10	-62.20	-13.00	49.20
			16QAM	1 642.43	V	-66.90	4.09	-62.81	-13.00	49.81
				2 463.37	V	-65.23	3.80	-61.43	-13.00	48.43
				4 092.46	V	-69.55	7.07	-62.48	-13.00	49.48
			64QAM	1 642.61	V	-67.54	4.09	-63.45	-13.00	50.45
				2 463.47	V	-65.42	3.80	-61.62	-13.00	48.62
				4 098.06	V	-69.63	7.09	-62.54	-13.00	49.54
				1 643.01	V	-64.34	4.09	-60.25	-13.00	47.25
5	821.5	1/12	QPSK	2 464.45	V	-59.95	3.79	-56.16	-13.00	43.16
				4 102.46	V	-69.44	7.09	-62.35	-13.00	49.35
				1 642.99	V	-67.40	4.09	-63.31	-13.00	50.31
			16QAM	2 464.56	V	-61.53	3.79	-57.74	-13.00	44.74
				4 103.63	V	-69.46	7.09	-62.37	-13.00	49.37
				1 642.86	V	-67.95	4.09	-63.86	-13.00	50.86
			64QAM	2 464.65	V	-62.48	3.79	-58.69	-13.00	45.69
				4 103.53	V	-69.25	7.09	-62.16	-13.00	49.16

7.7. FREQUENCY STABILITY

- Test Notes


Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING FREQUENCY : 819 MHz
REFERENCE VOLTAGE : 3.80 V DC
LIMIT : 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100 %	3.80	+20(Ref)	819,000,007	7	0.008 5	0.000 000 855
100 %		-30	819,000,001	1	0.001 2	0.000 000 122
100 %		-20	819,000,016	16	0.019 5	0.000 001 954
100 %		-10	818,999,999	-1	-0.001 2	-0.000 000 122
100 %		0	819,000,008	8	0.009 8	0.000 000 977
100 %		+10	818,999,997	-3	-0.003 7	-0.000 000 366
100 %		+20	819,000,007	7	0.008 5	0.000 000 855
100 %		+30	818,999,981	-19	-0.023 2	-0.000 002 320
100 %		+40	819,000,006	6	0.007 3	0.000 000 733
100 %		+50	819,000,002	2	0.002 4	0.000 000 244
115 %	4.37	+20	818,999,993	-7	-0.008 5	-0.000 000 855
BATT.ENDPOINT	3.20	+20	819,000,023	23	0.028 1	0.000 002 808

8. TEST PLOTS


8.1. OCCUPIED BANDWIDTH

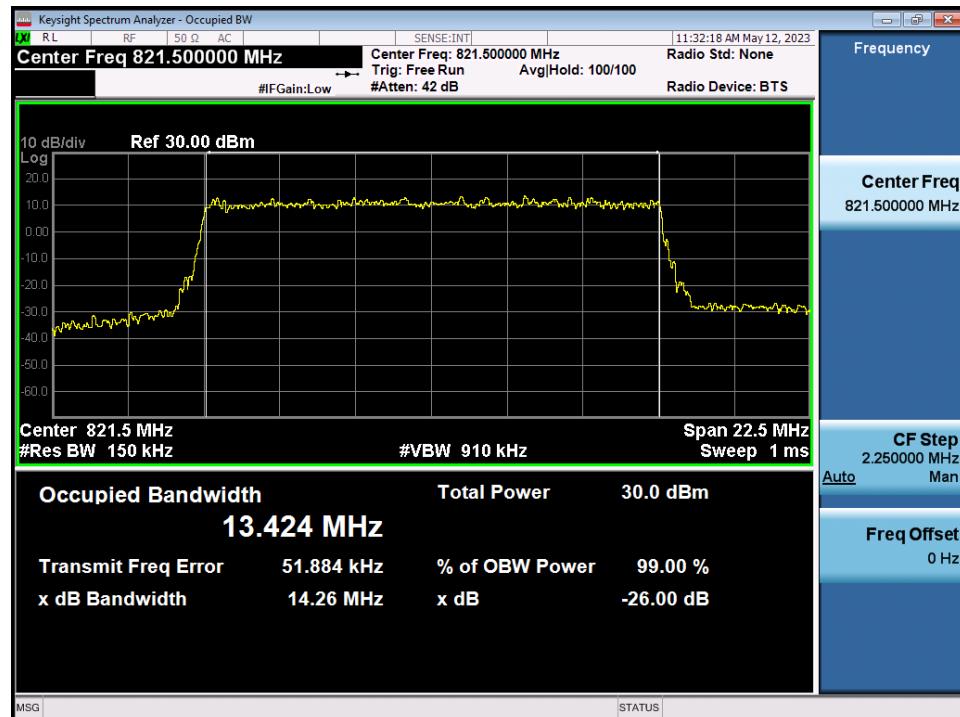

LTE Band 26 / 15 MHz / QPSK - RB Size 75

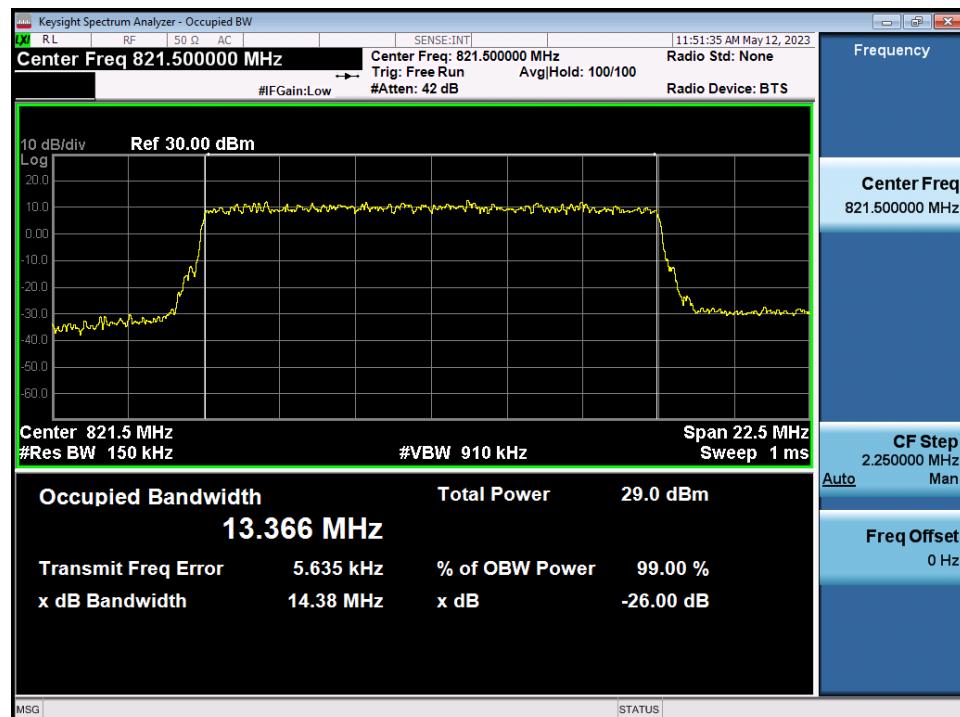


LTE Band 26 / 15 MHz / 16QAM - RB Size 75

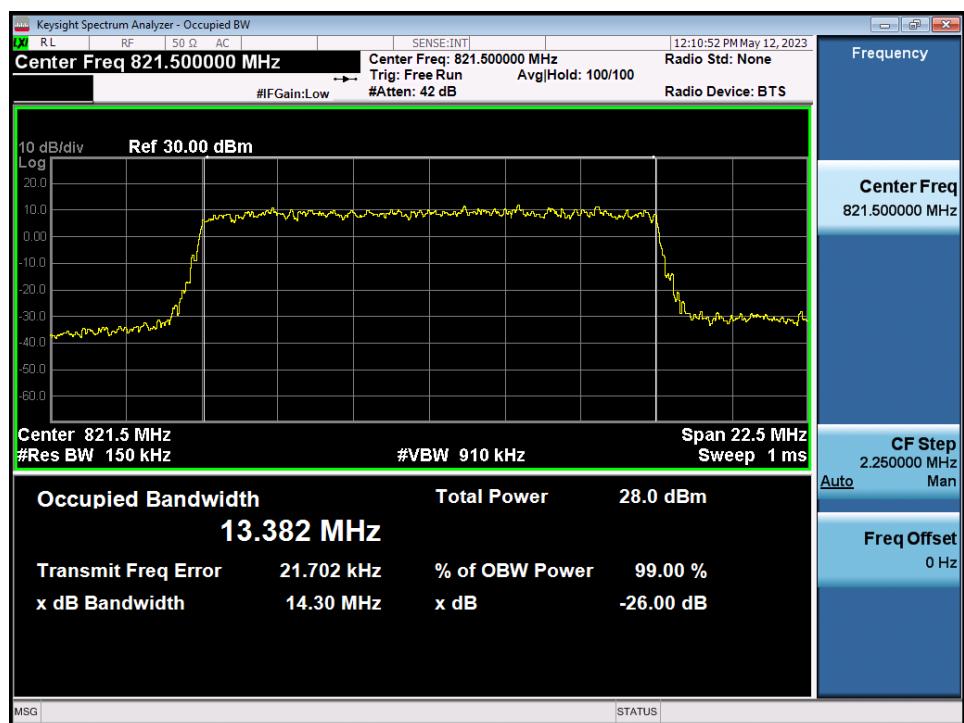


LTE Band 26 / 15 MHz / 64QAM - RB Size 75




LTE Band 26 / 10 MHz / QPSK - RB Size 50

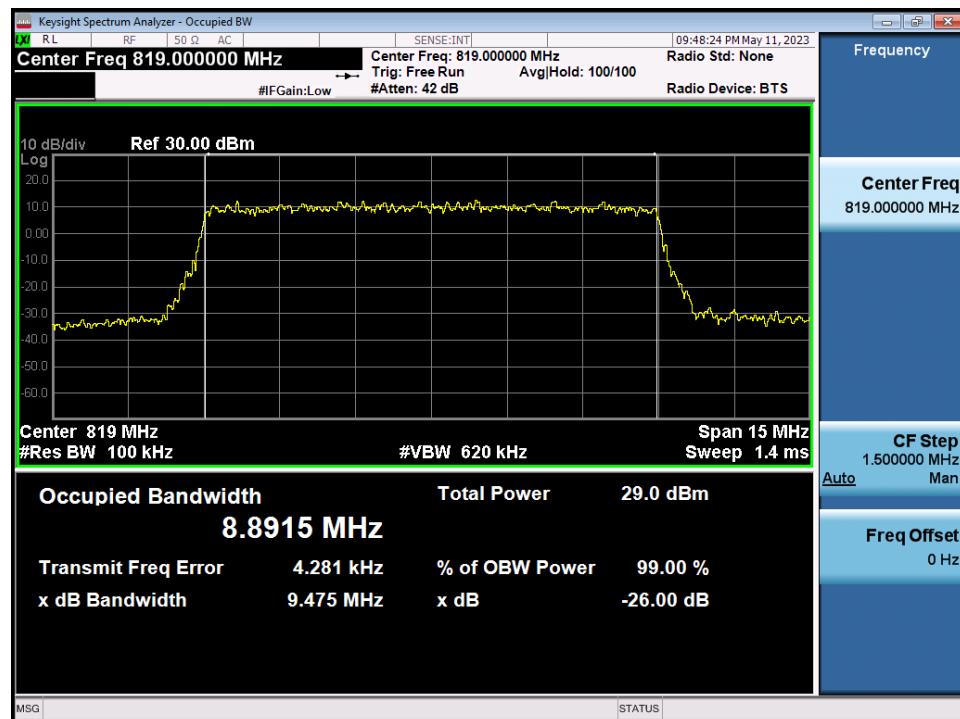


LTE Band 26 / 10 MHz / 16QAM - RB Size 50

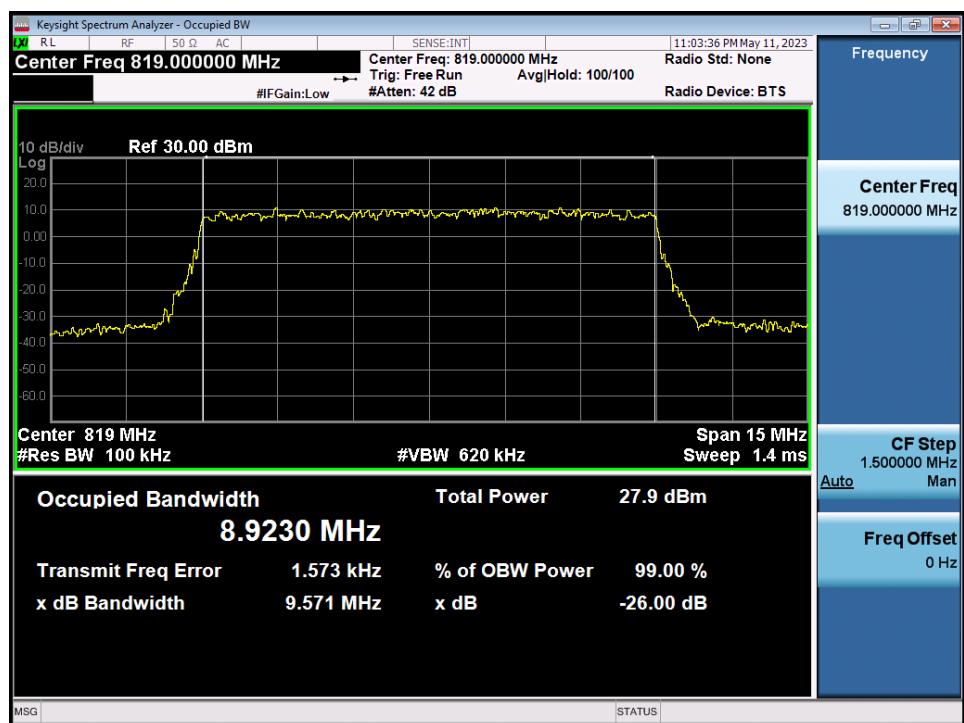


LTE Band 26 / 10 MHz / 64QAM - RB Size 50

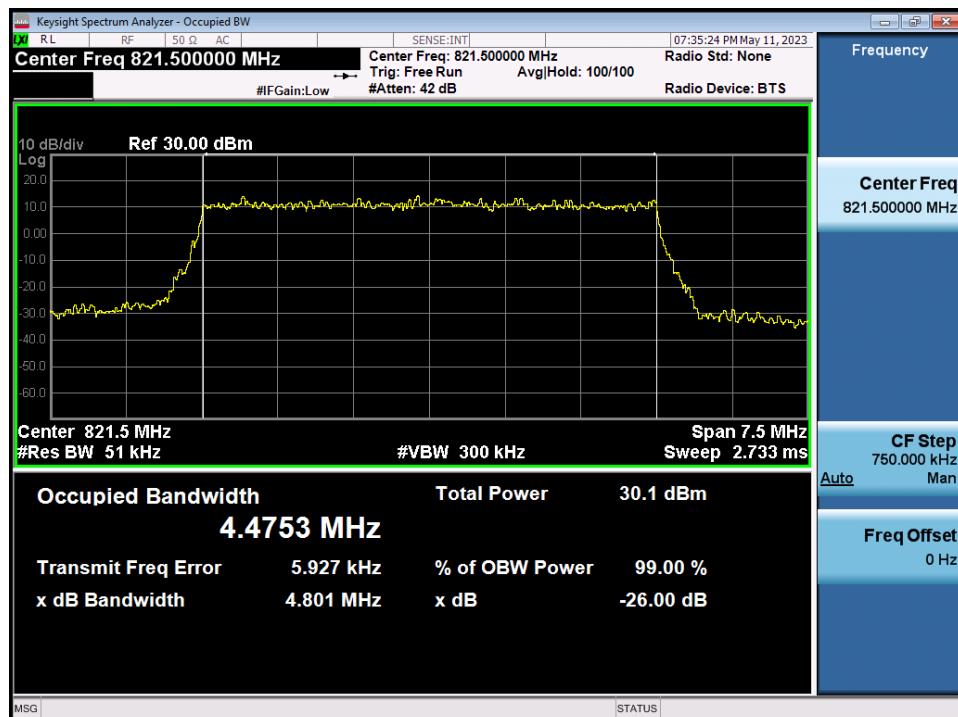


LTE Band 26 / 5 MHz / QPSK - RB Size 25

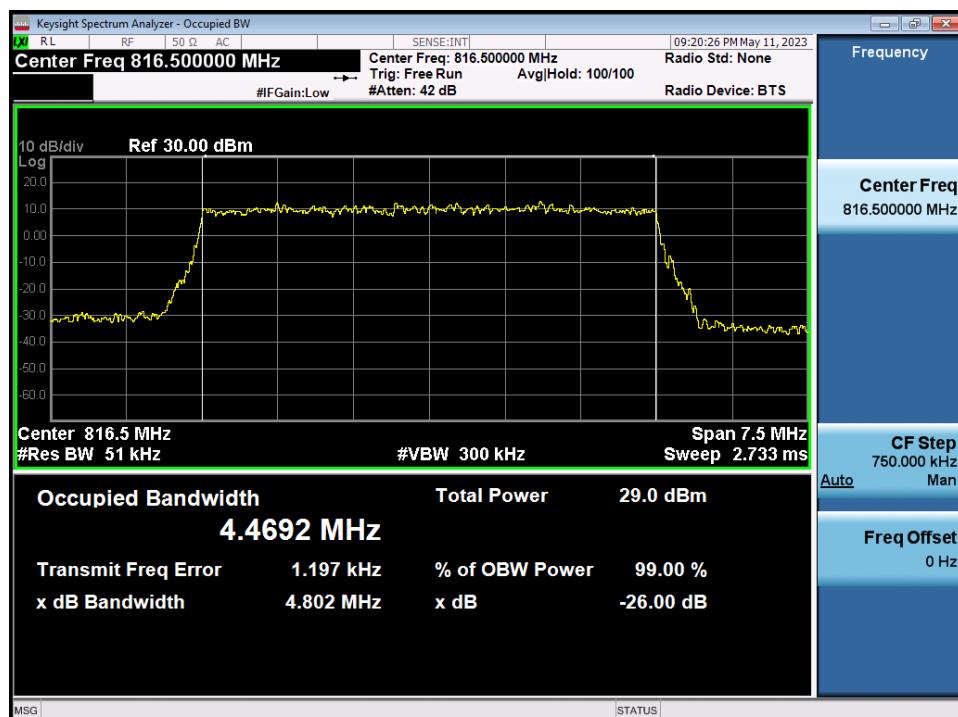


LTE Band 26 / 5 MHz / 16QAM - RB Size 25

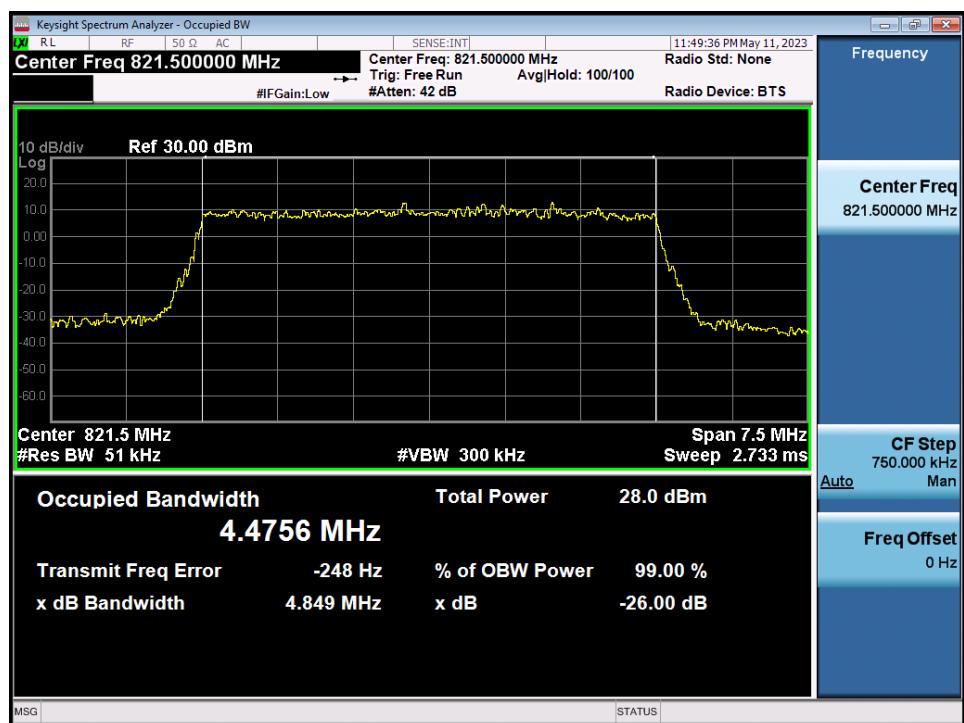


LTE Band 26 / 5 MHz / 64QAM - RB Size 25

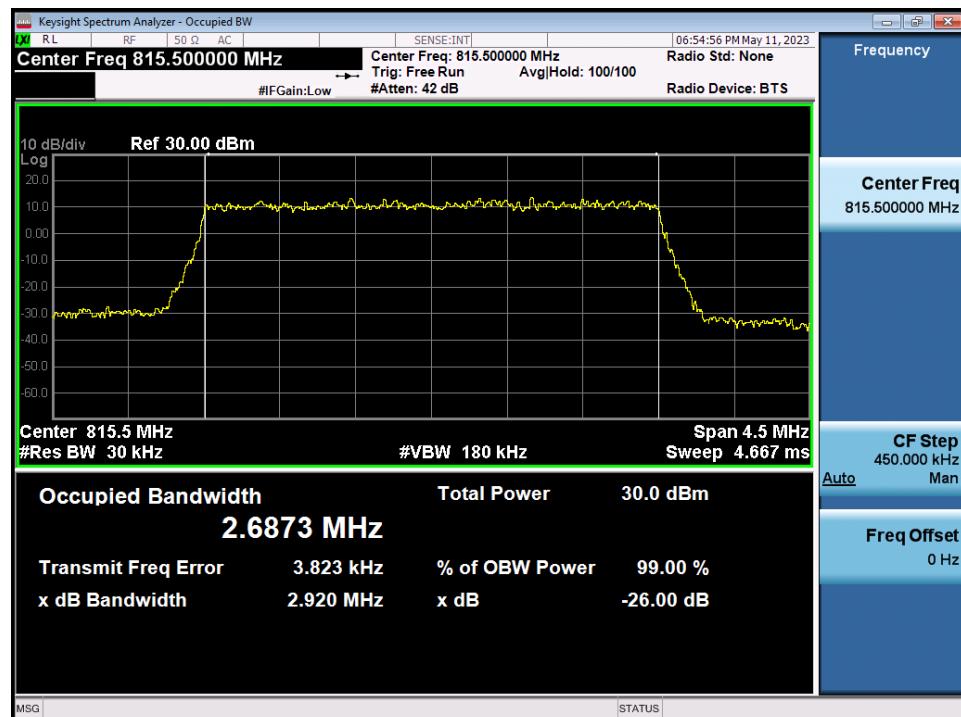


LTE Band 26 / 3 MHz / QPSK - RB Size 15

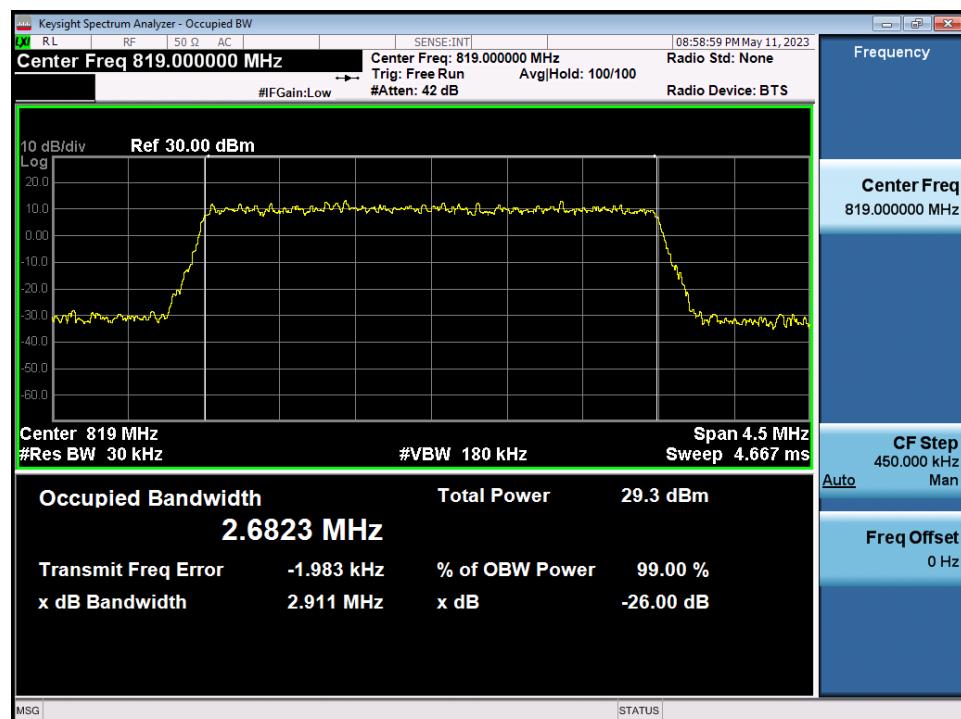


LTE Band 26 / 3 MHz / 16QAM - RB Size 15

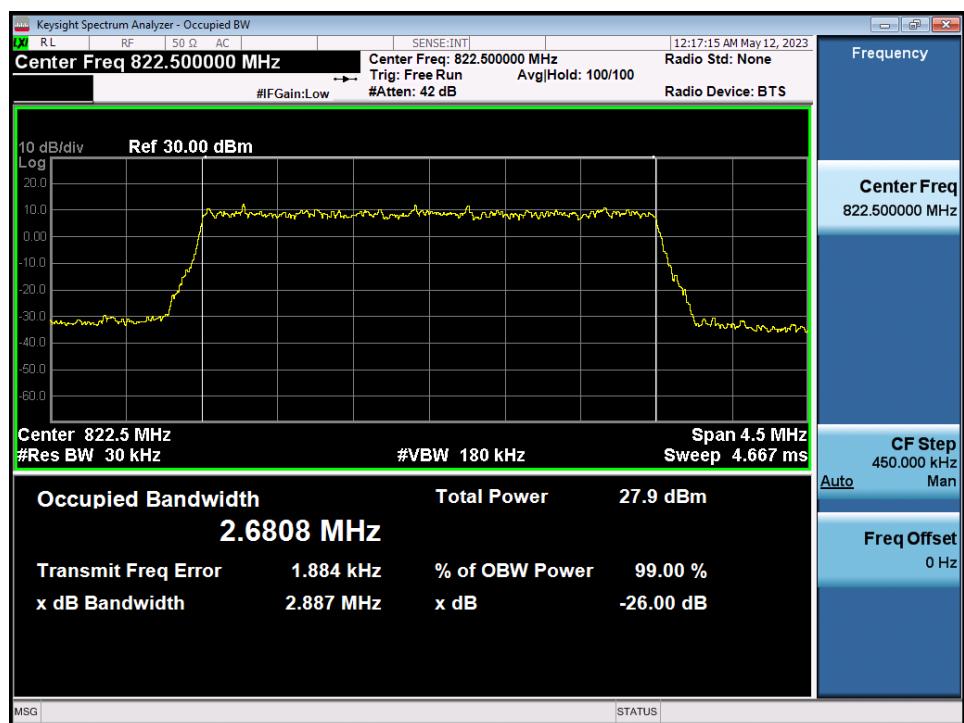


LTE Band 26 / 3 MHz / 64QAM - RB Size 15

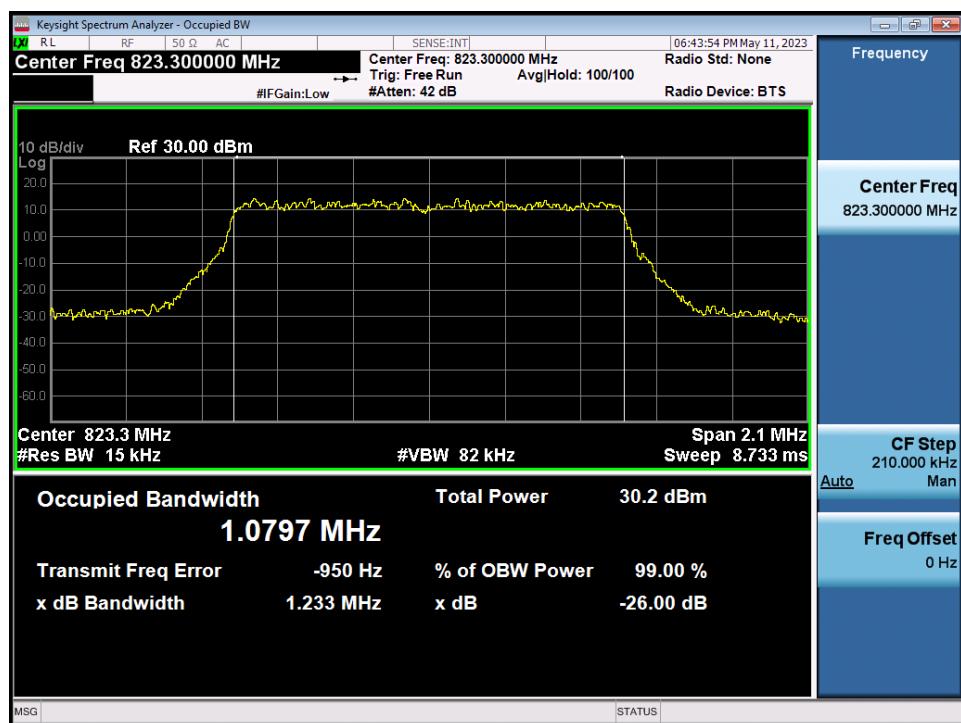

LTE Band 26 / 1.4 MHz / QPSK - RB Size 6

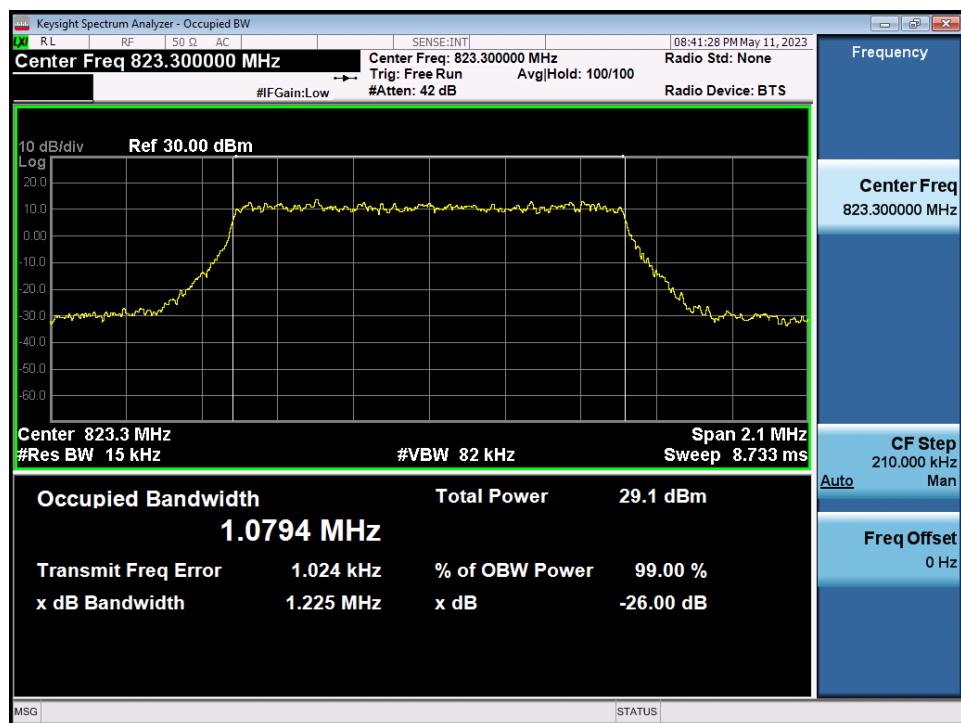


LTE Band 26 / 1.4 MHz / 16QAM - RB Size 6

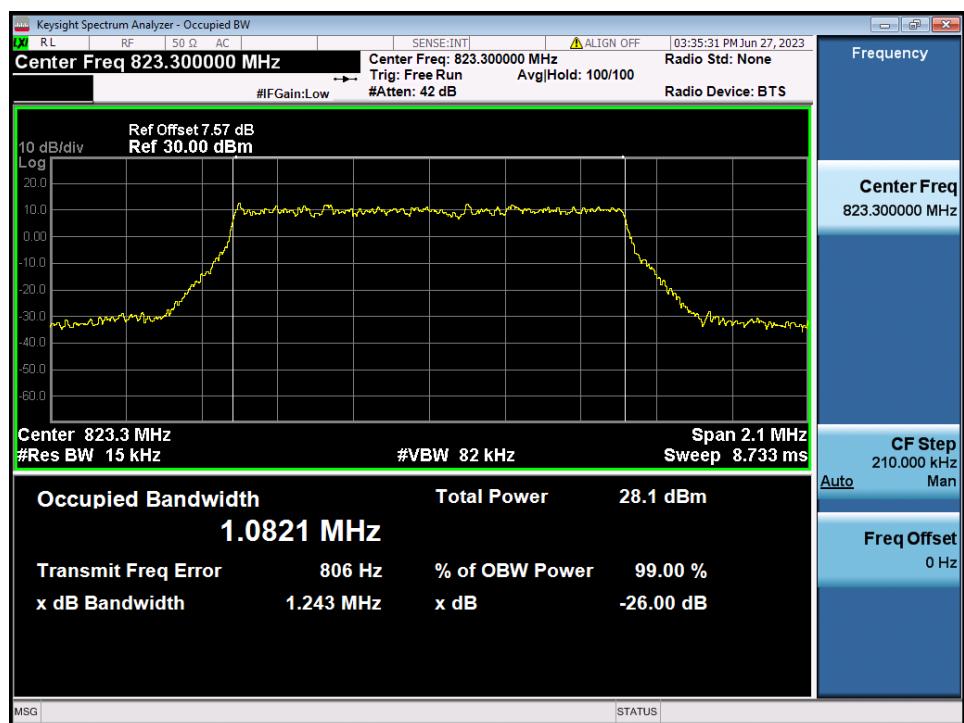


LTE Band 26 / 1.4 MHz / 64QAM - RB Size 6


8.2. PEAK TO AVERAGE RATIO

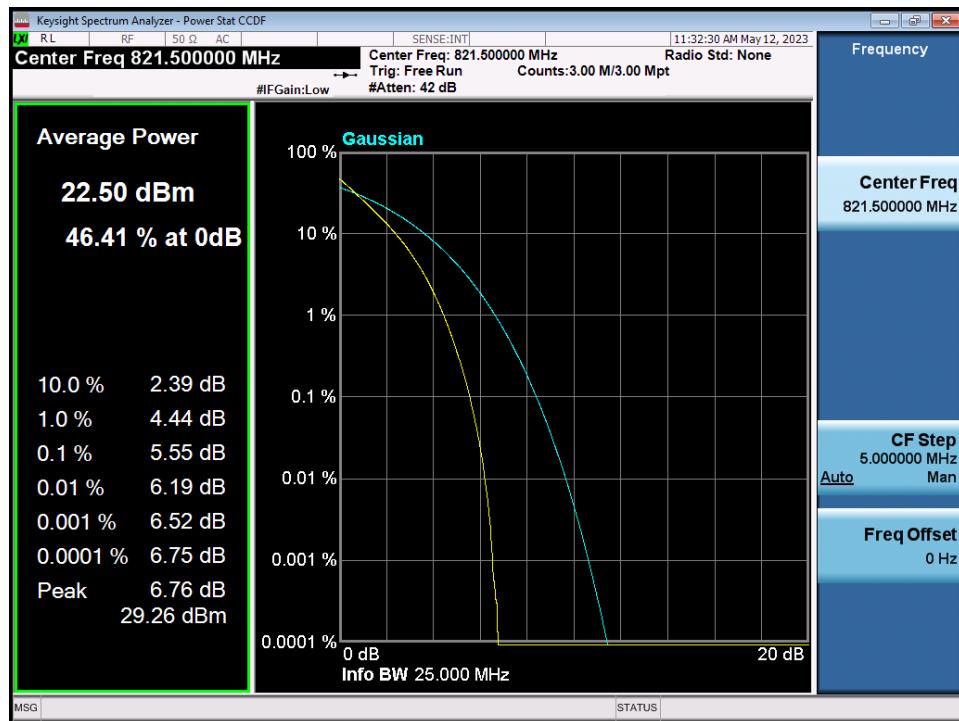


LTE Band 26 / 15 MHz / QPSK - RB Size 75

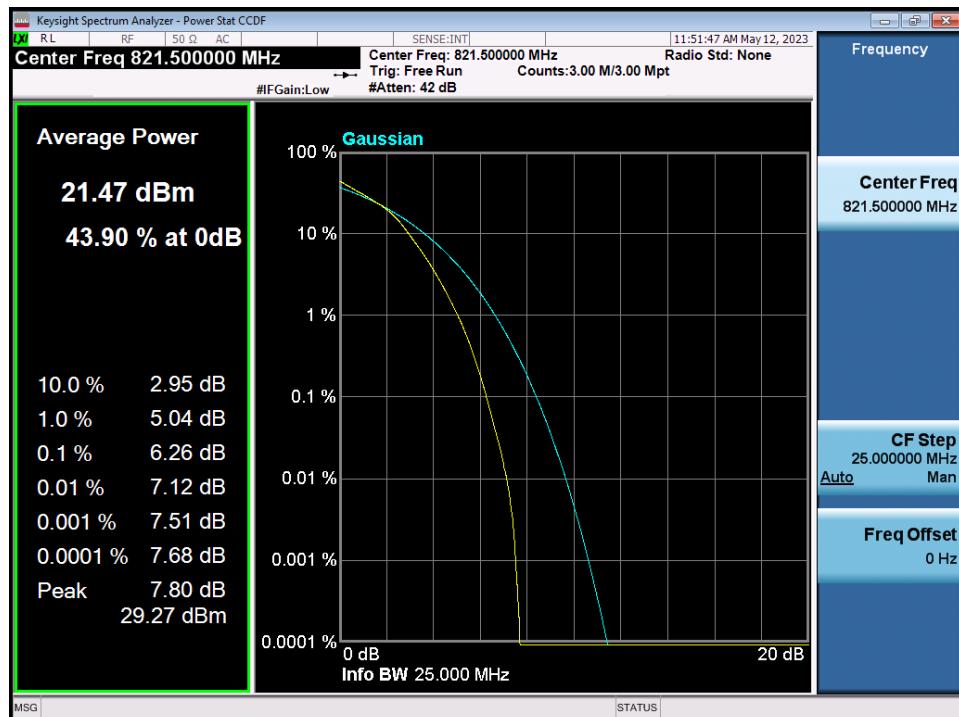


LTE Band 26 / 15 MHz / 16QAM - RB Size 75

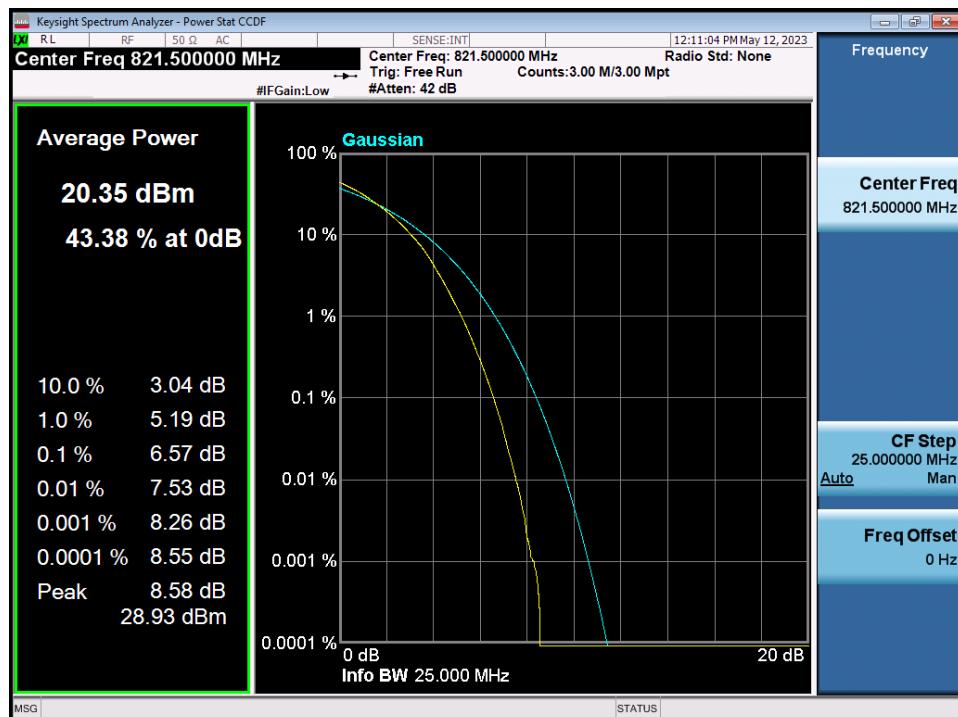


LTE Band 26 / 15 MHz / 64QAM - RB Size 75

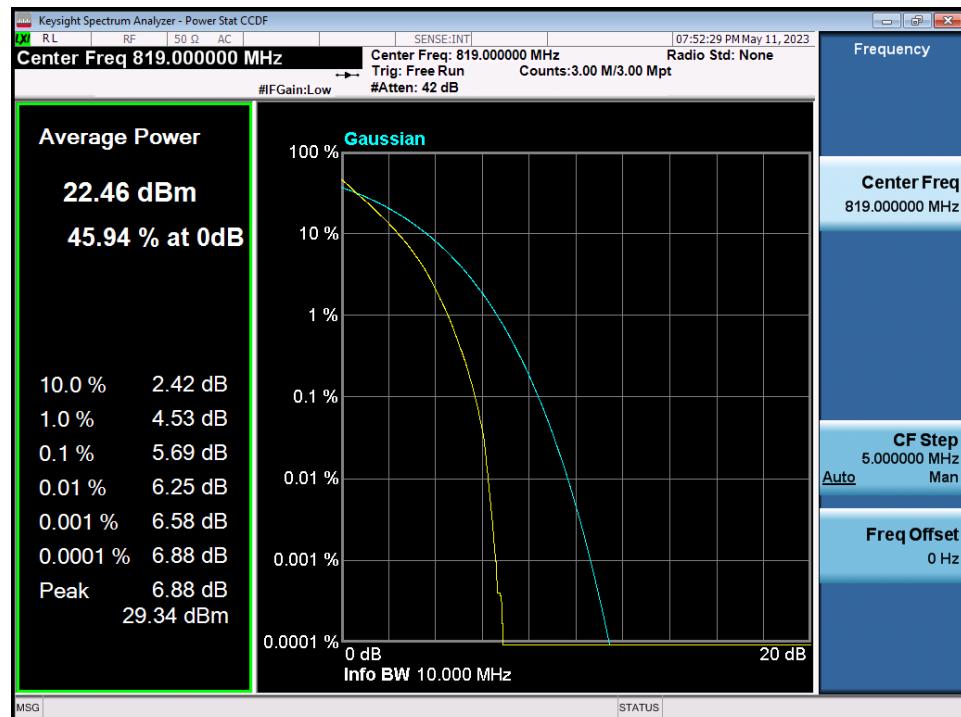


LTE Band 26 / 10 MHz / QPSK - RB Size 50

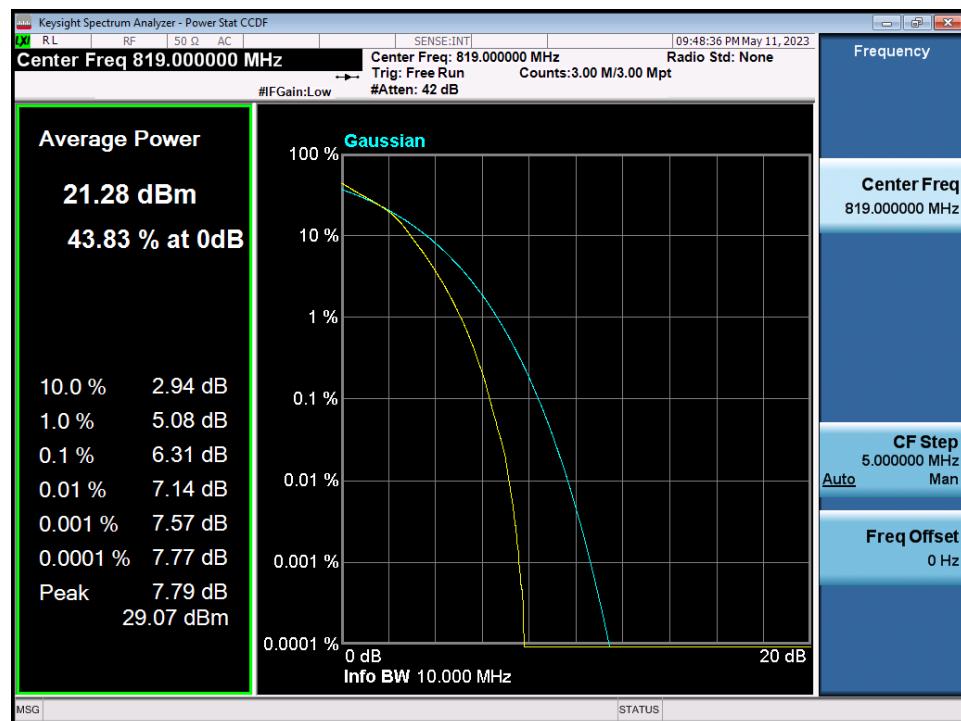


LTE Band 26 / 10 MHz / 16QAM - RB Size 50

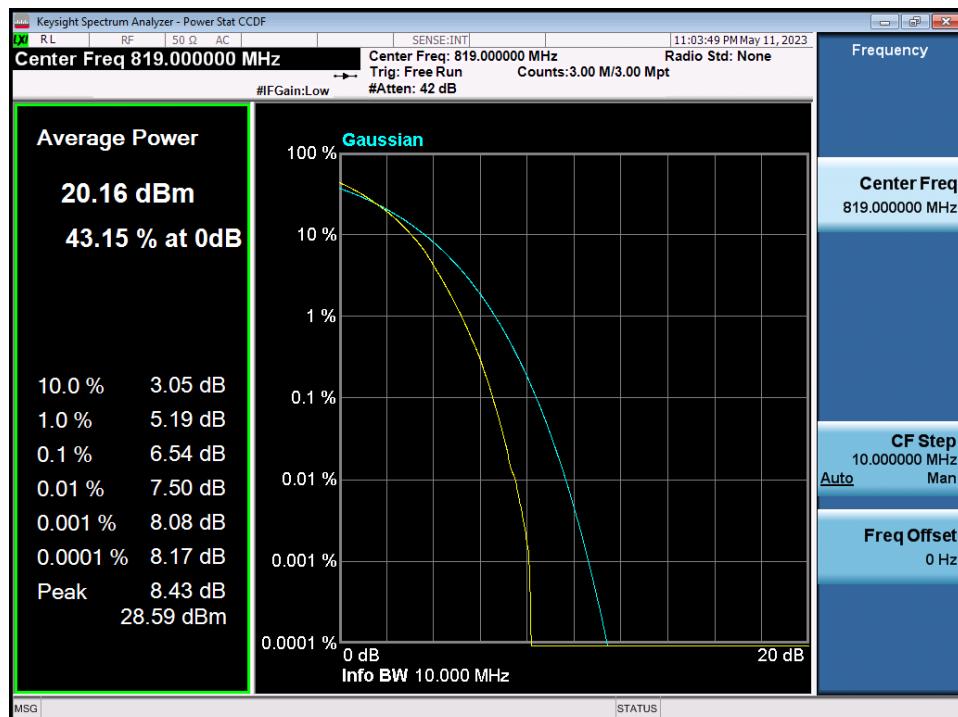


LTE Band 26 / 10 MHz / 64QAM - RB Size 50

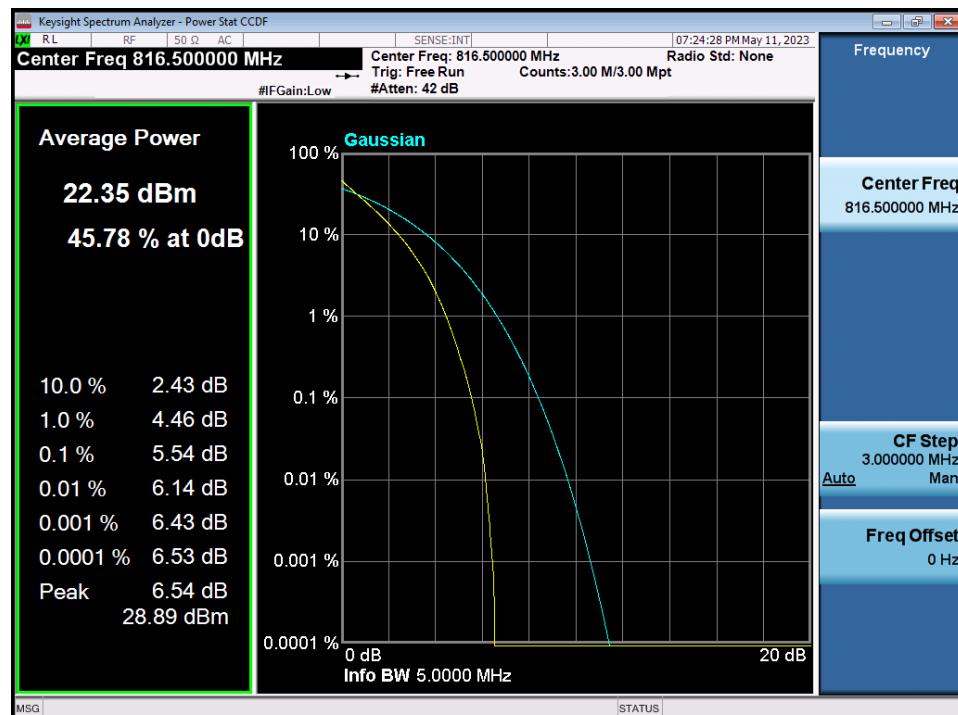


LTE Band 26 / 5 MHz / QPSK - RB Size 25

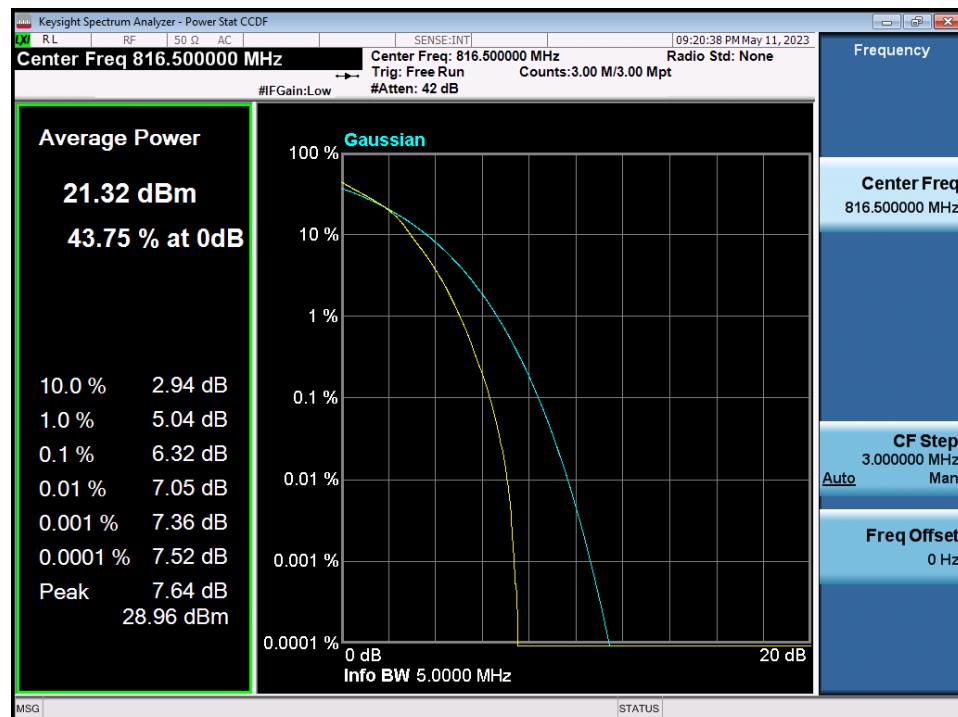


LTE Band 26 / 5 MHz / 16QAM - RB Size 25

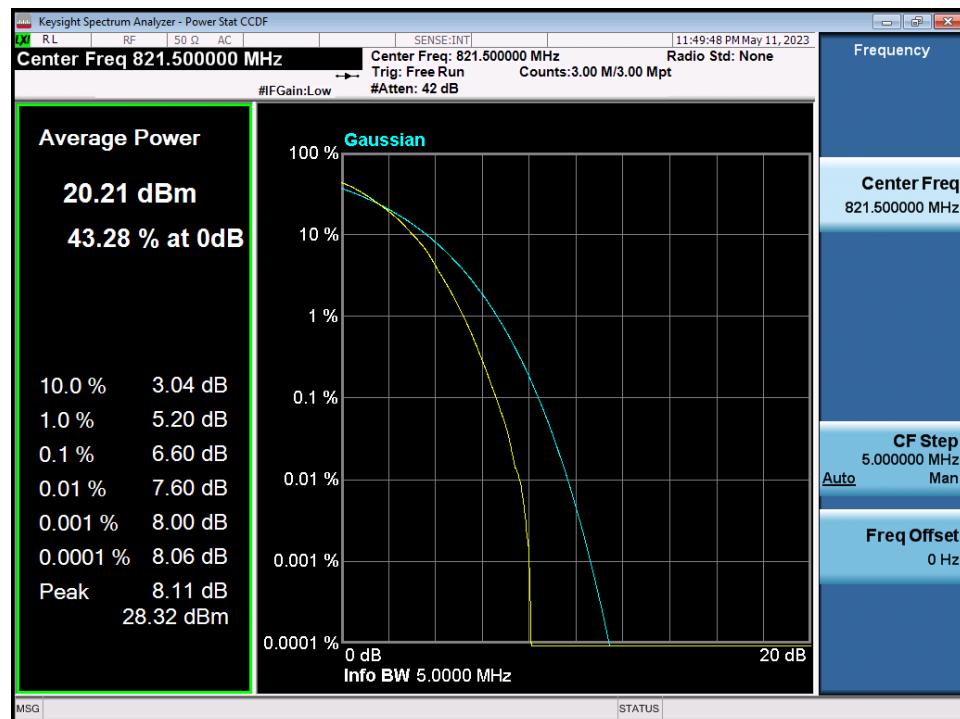


LTE Band 26 / 5 MHz / 64QAM - RB Size 25

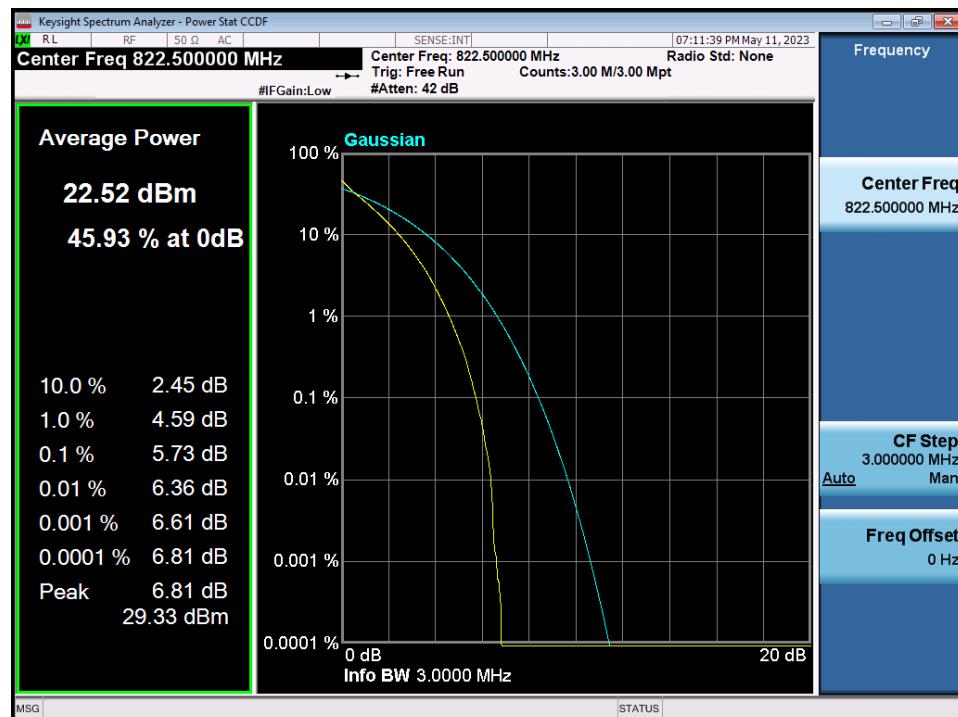


LTE Band 26 / 3 MHz / QPSK - RB Size 15

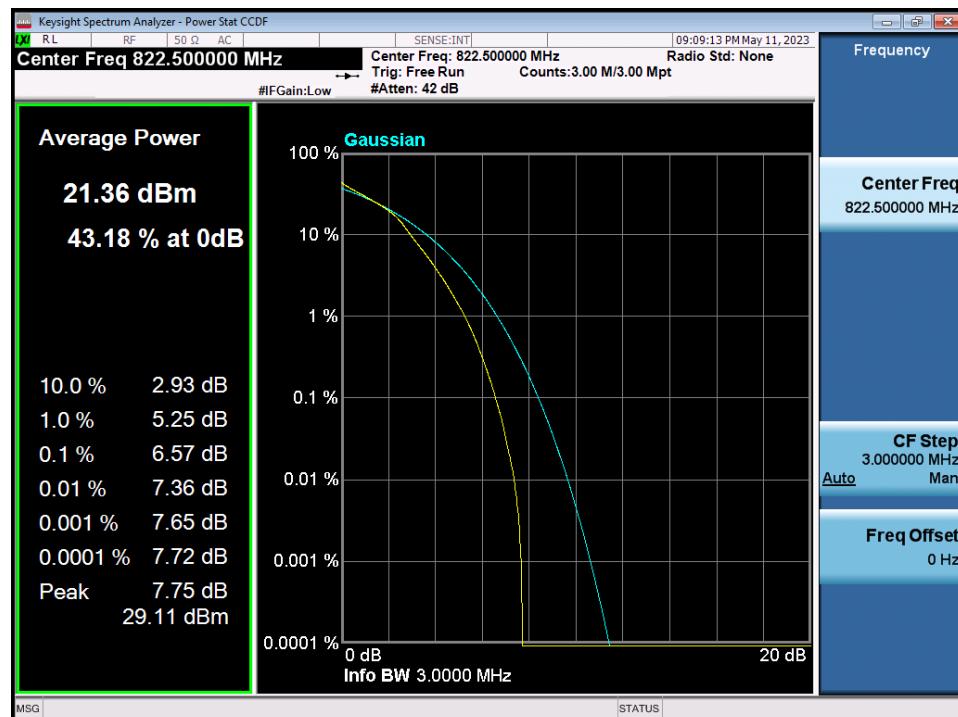


LTE Band 26 / 3 MHz / 16QAM - RB Size 15

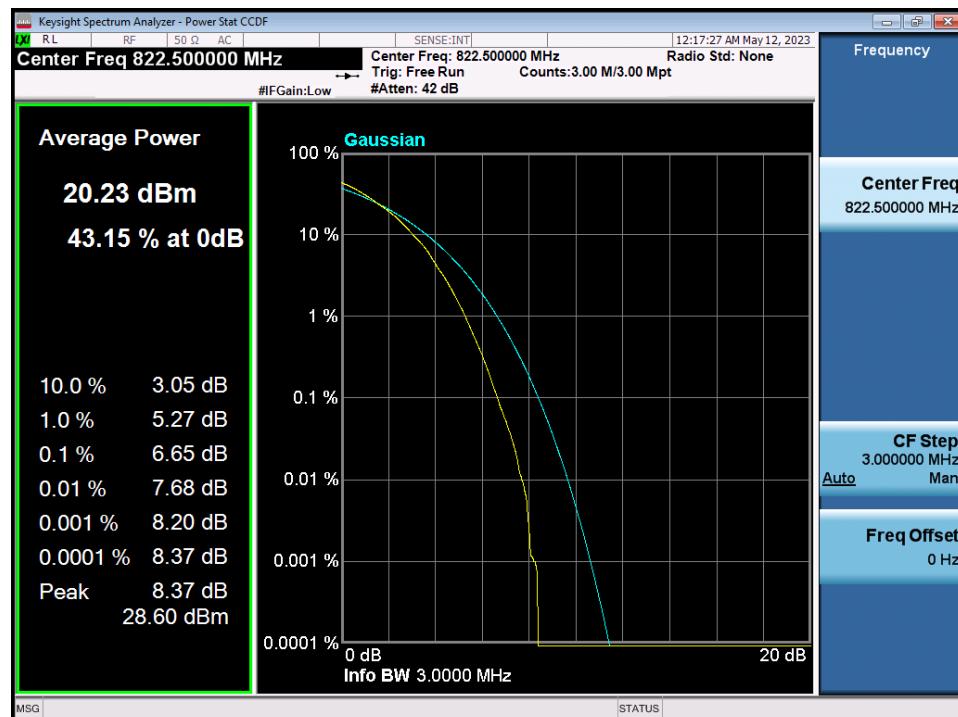


LTE Band 26 / 3 MHz / 64QAM - RB Size 15

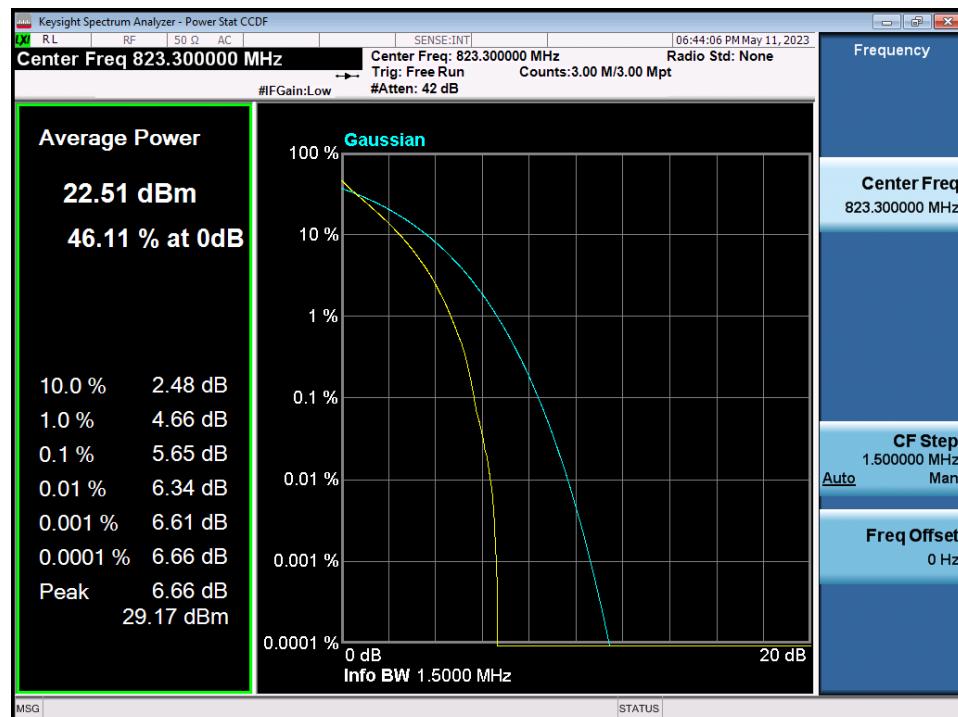

LTE Band 26 / 1.4 MHz / QPSK - RB Size 6

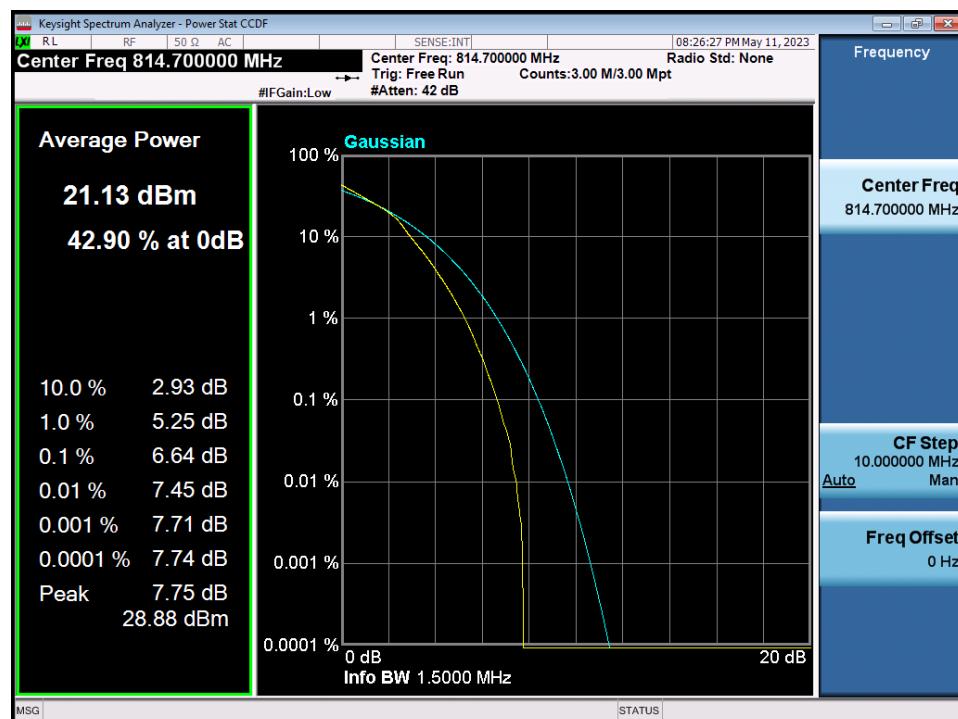

LTE Band 26 / 1.4 MHz / 16QAM - RB Size 6

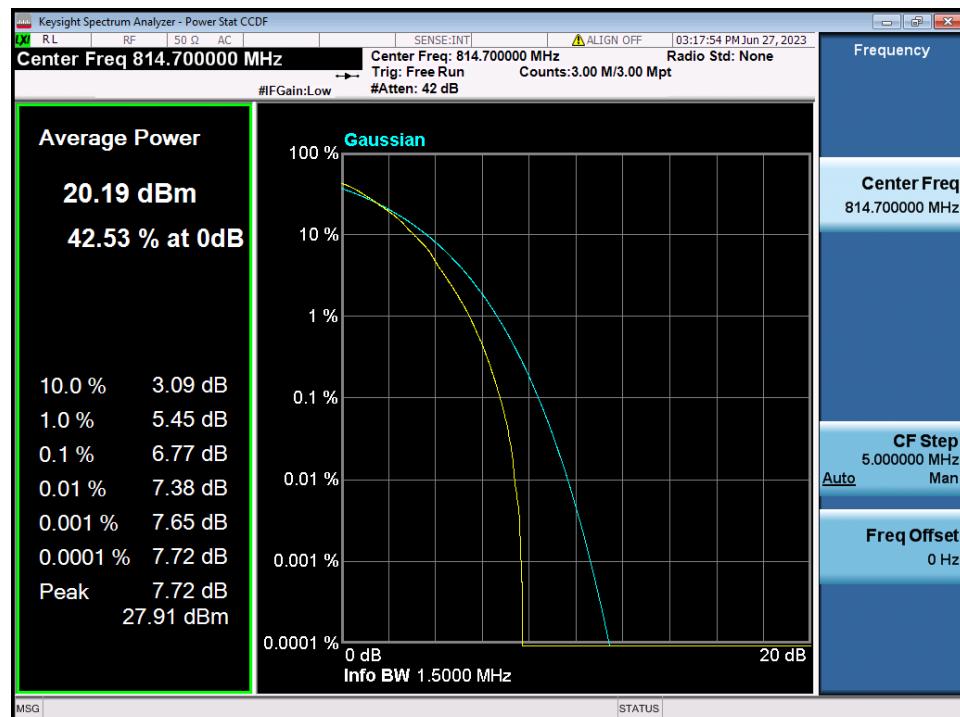


LTE Band 26 / 1.4 MHz / 64QAM - RB Size 6

8.3. BAND EDGE EMISSIONS(Conducted)


- Band Edge & Extended Band Edge



LTE Band 26 / 15 MHz / QPSK - RB Size/Offset (36/39)

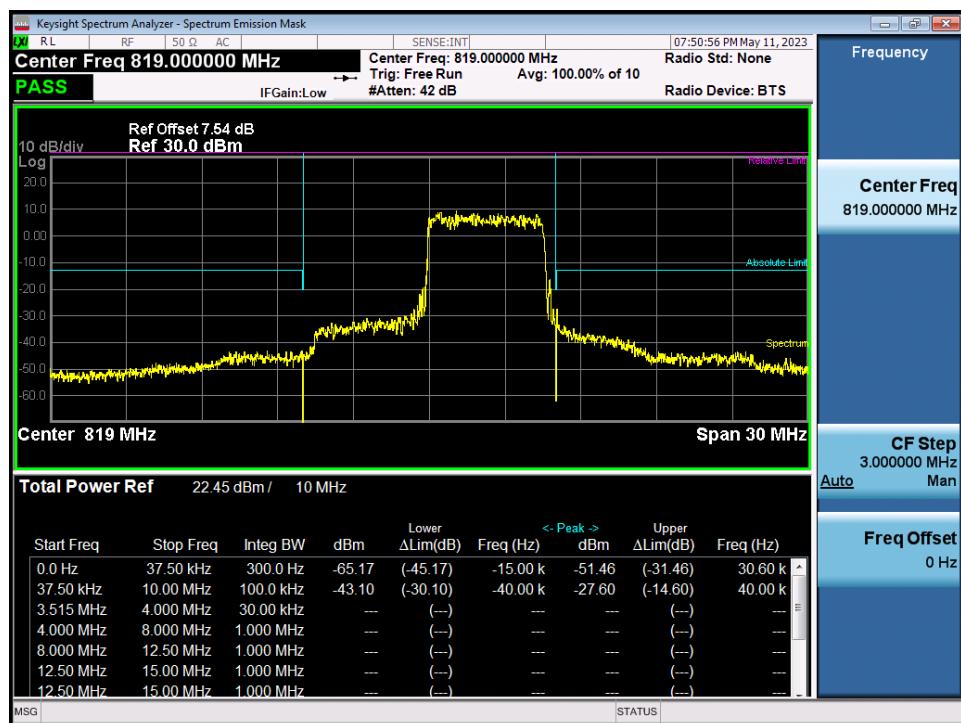


LTE Band 26 / 10 MHz / QPSK - RB Size/Offset (25/25)

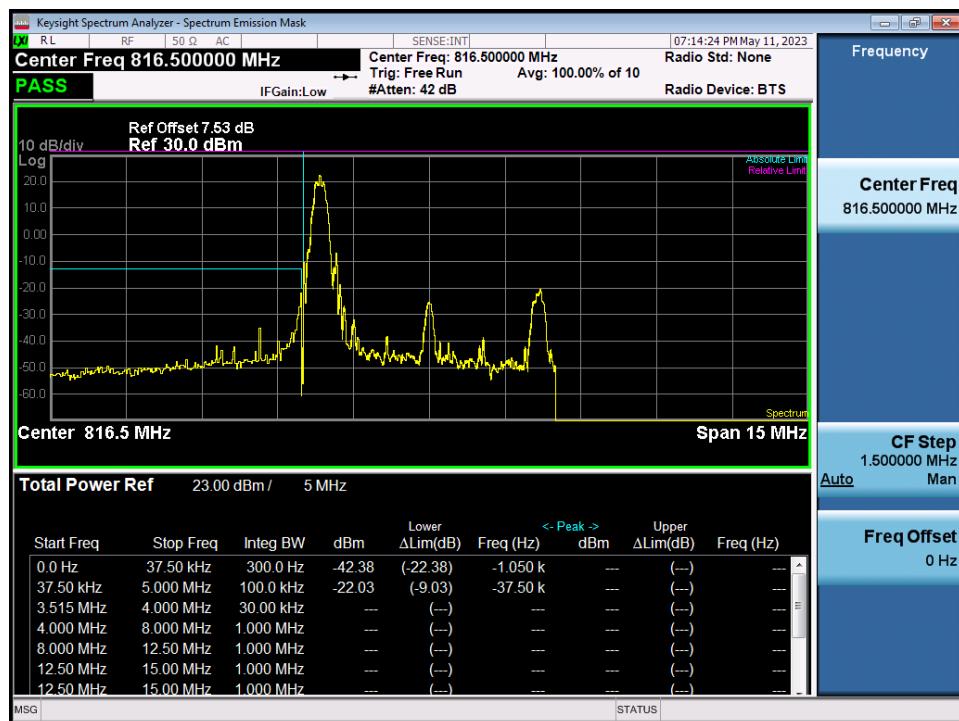


LTE Band 26 / 5 MHz / QPSK - RB Size/Offset (1/0)




LTE Band 26 / 5 MHz / 16QAM - RB Size/Offset (1/24)

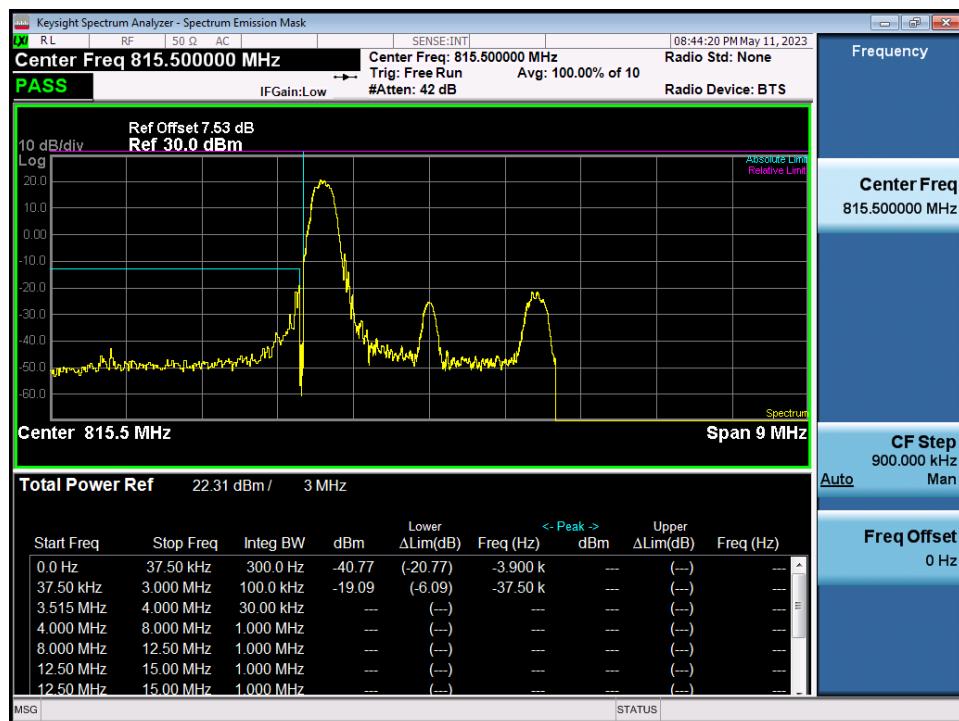

LTE Band 26 / 3 MHz / 16QAM - RB Size/Offset (1/0)

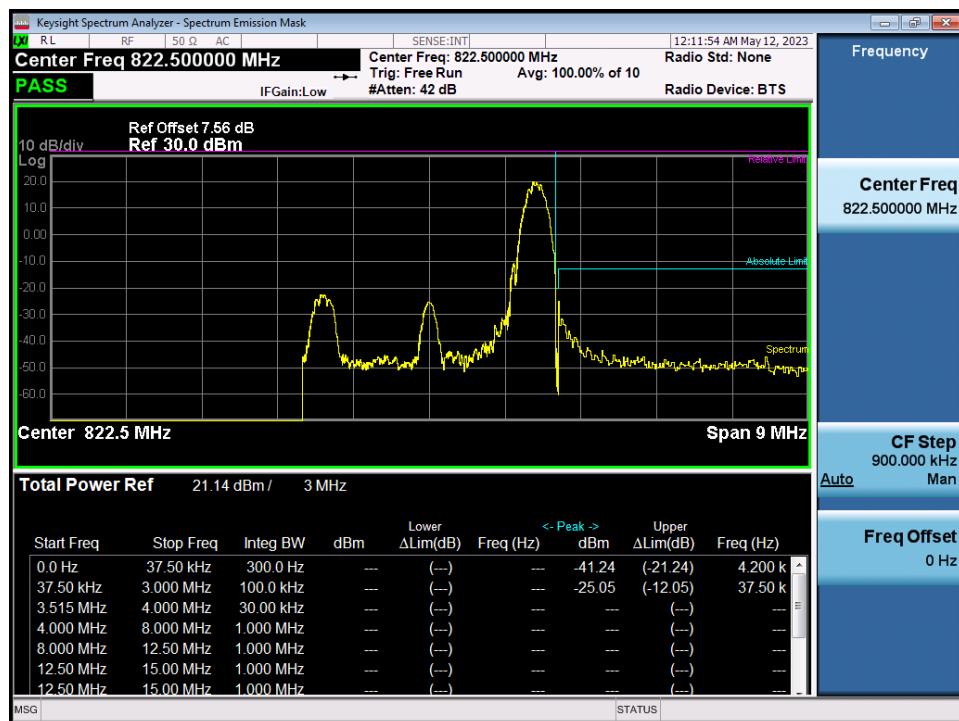

LTE Band 26 / 3 MHz / 64QAM - RB Size/Offset (1/14)

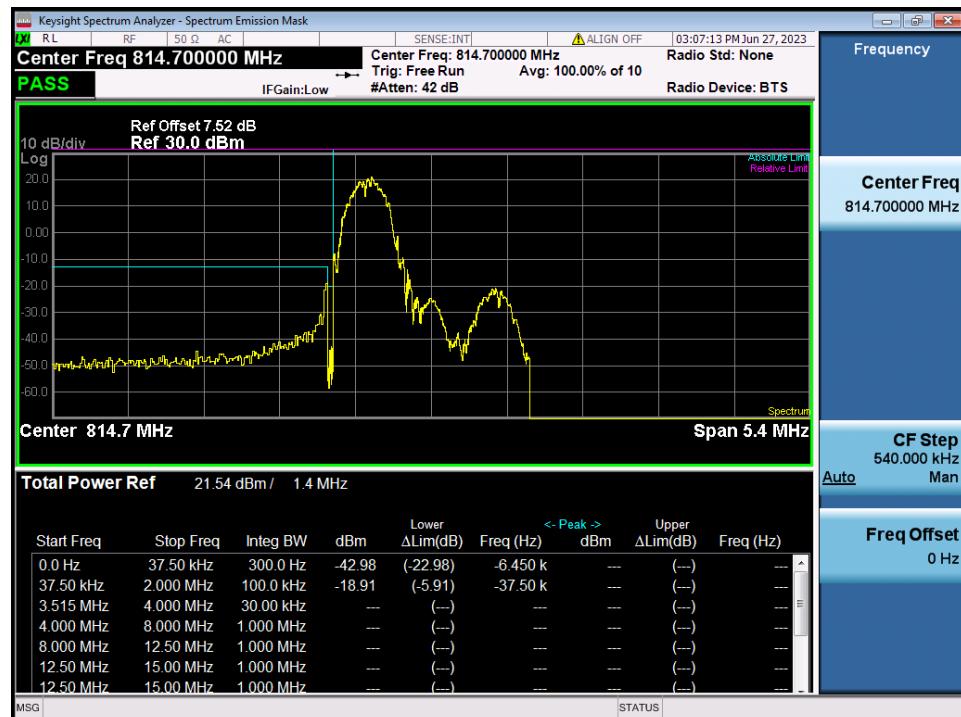


LTE Band 26 / 1.4 MHz / 64QAM - RB Size/Offset (1/0)




LTE Band 26 / 1.4 MHz / 16QAM - RB Size/Offset (3/3)


8.4. SPURIOUS AND HARMONICS EMISSIONS(Conducted)

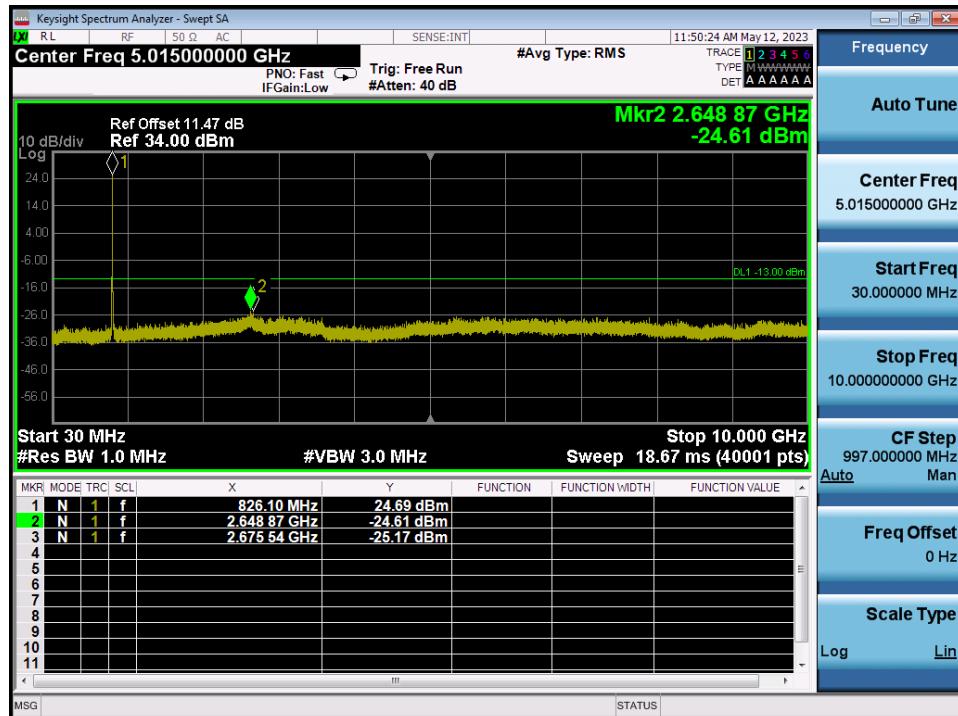


LTE Band 26 / 15 MHz / 16QAM - RB Size/Offset (36/39) - Low Channel

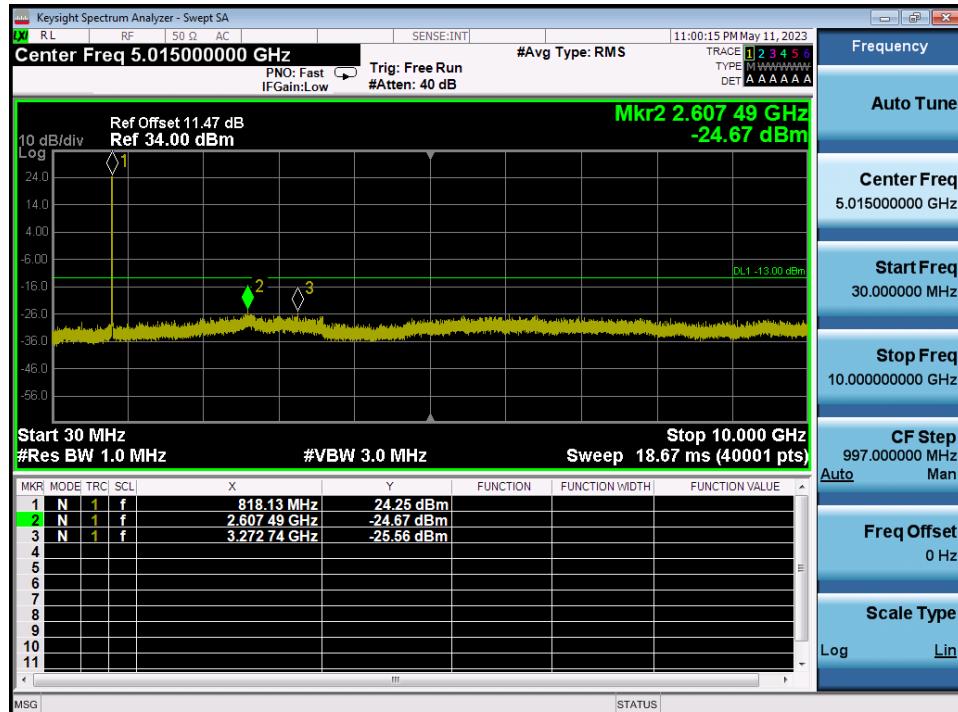


LTE Band 26 / 10 MHz / 64QAM - RB Size/Offset (25/12) - Low Channel

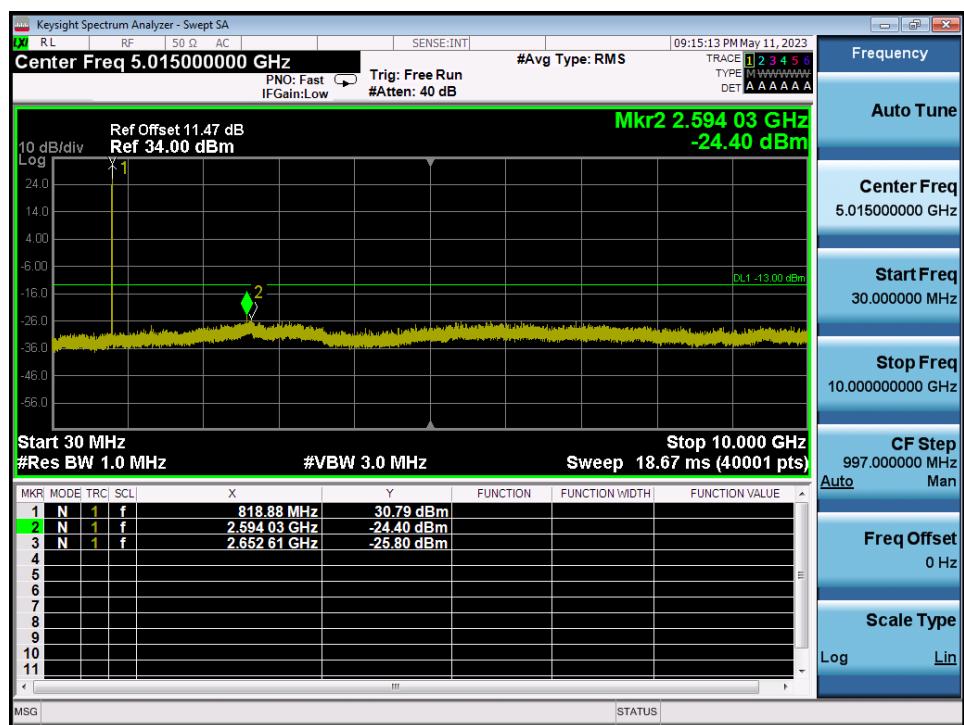


LTE Band 26 / 5 MHz / 16QAM - RB Size/Offset (1/24) - Low Channel

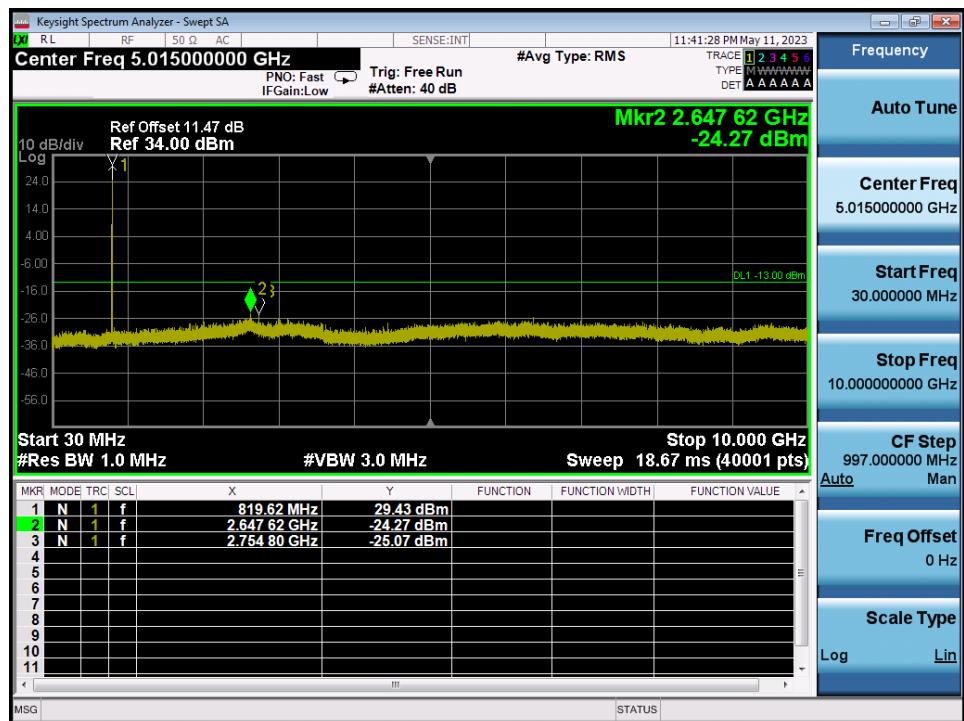


LTE Band 26 / 5 MHz / 64QAM - RB Size/Offset (1/0) - High Channel

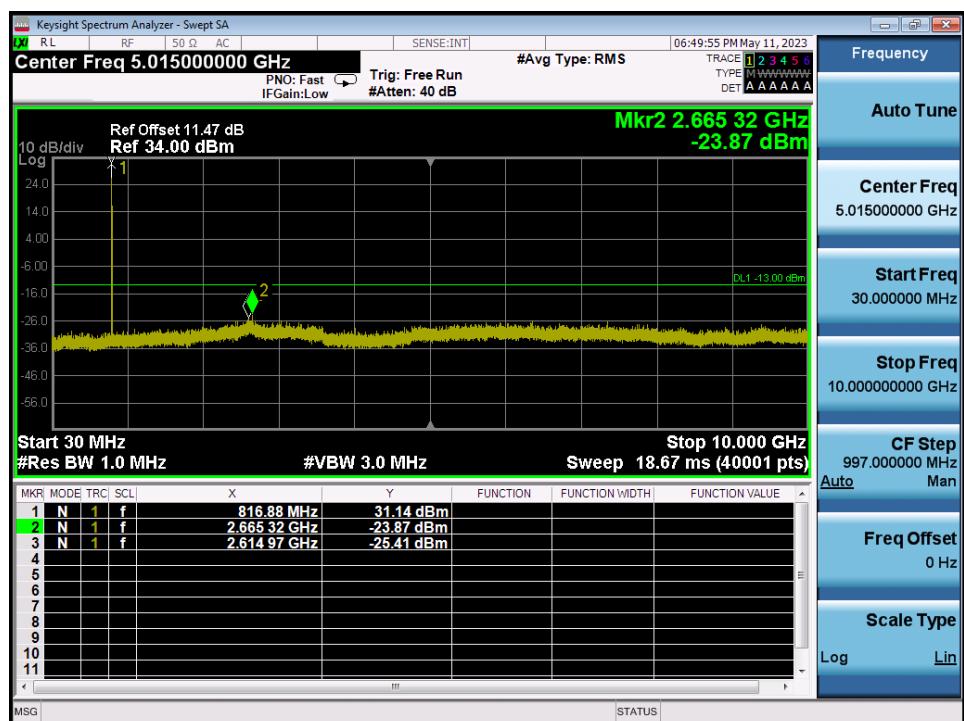


LTE Band 26 / 3 MHz / QPSK - RB Size/Offset (1/14) - Low Channel

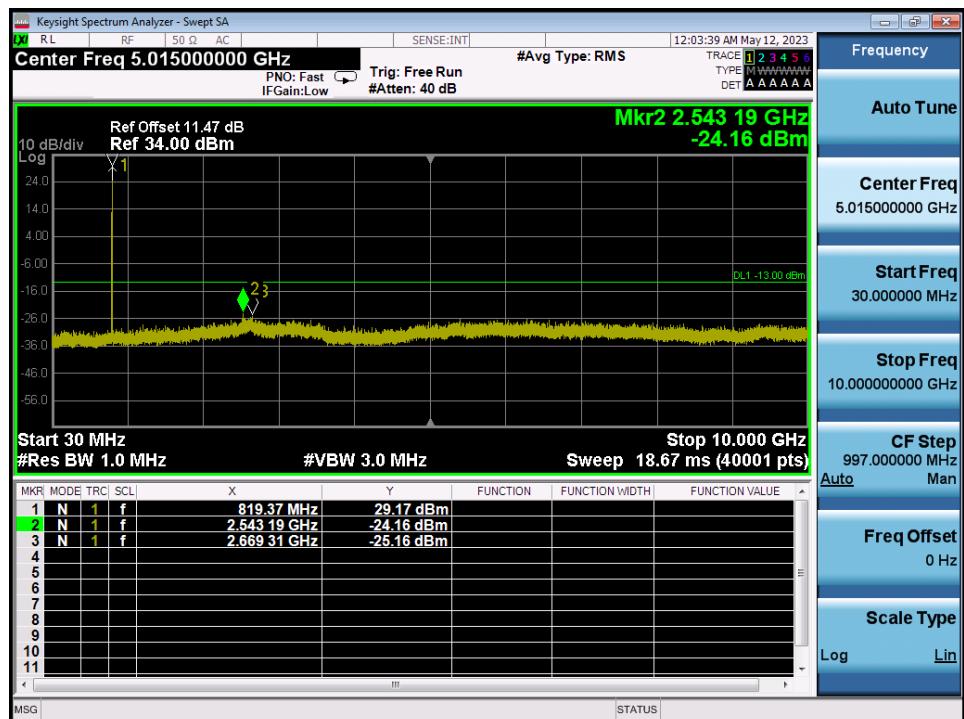


LTE Band 26 / 3 MHz / 64QAM - RB Size/Offset (1/7) - Mid Channel

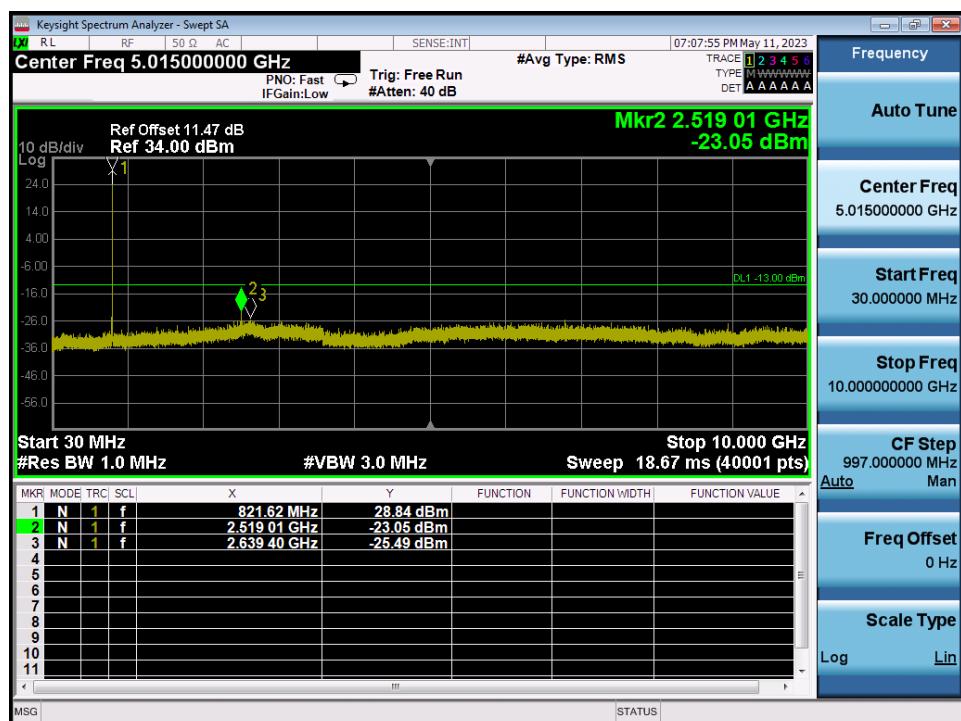


LTE Band 26 / 3 MHz / QPSK - RB Size/Offset (8/0) - High Channel

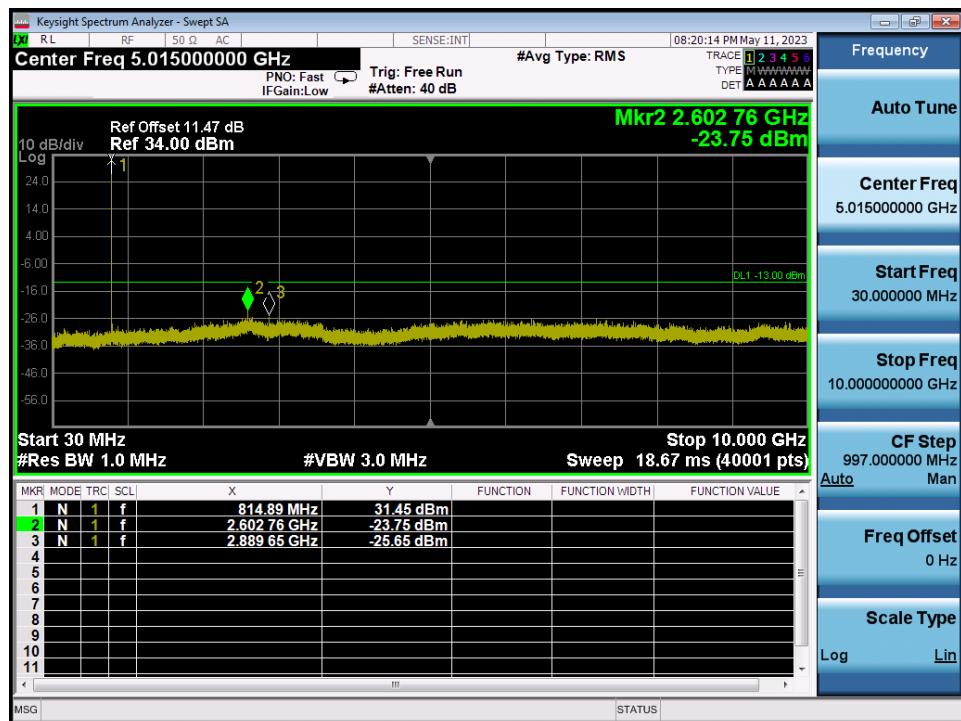

LTE Band 26 / 1.4 MHz / 16QAM - RB Size/Offset (1/2) – Low Channel

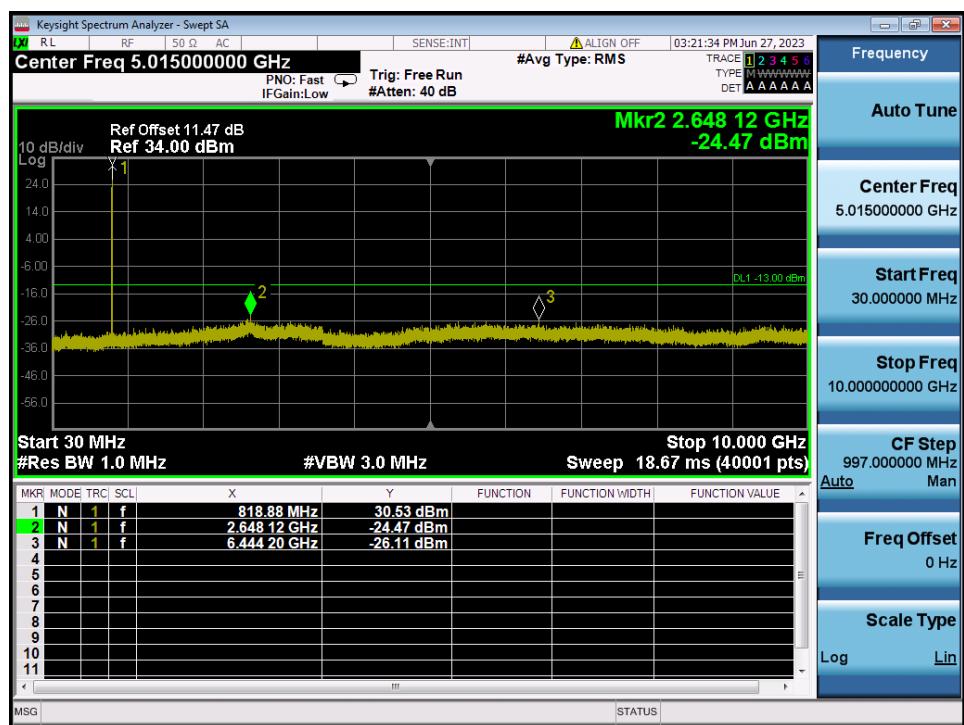

LTE Band 26 / 1.4 MHz / 64QAM- RB Size/Offset (3/0) – Mid Channel

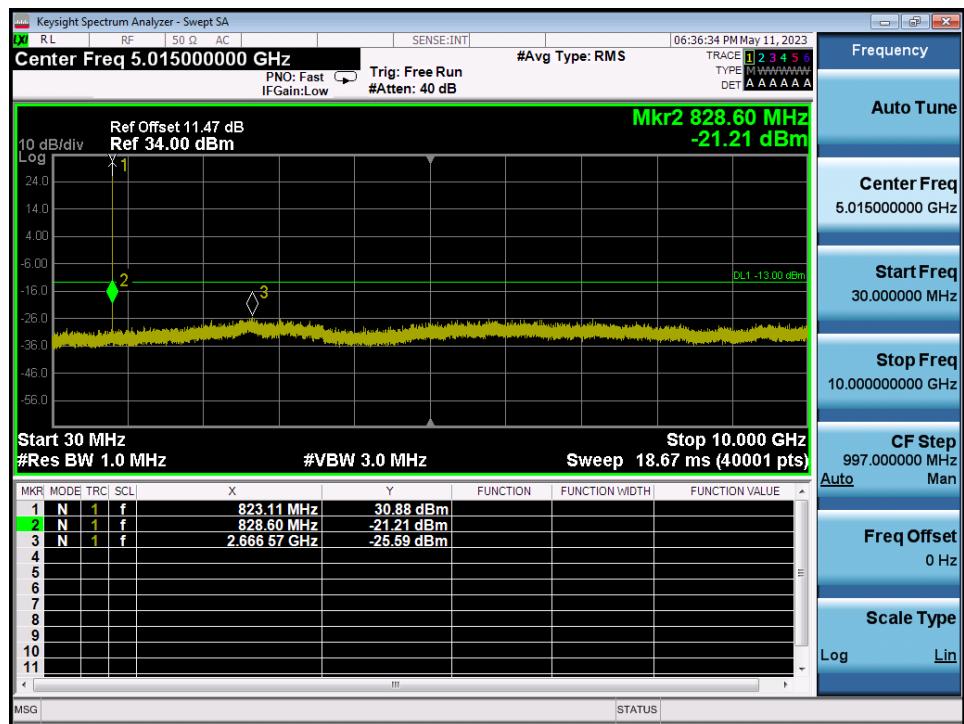

LTE Band 26 / 1.4 MHz / QPSK - RB Size/Offset (1/0) – High Channel